



(51) International Patent Classification:  
H04S 7/00 (2006.01)

(21) International Application Number:  
PCT/CN2019/106905

(22) International Filing Date:  
20 September 2019 (20.09.2019)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: HARMAN INTERNATIONAL INDUSTRIES, INCORPORATED [US/US]; 400 Atlantic Street, 15th Floor, Stamford, CT 06901 (US).

(72) Inventor; and

(71) Applicant (for BW only): ZHENG, Jianwen [CN/CN]; 19F, CMP Plaza, Gongye 3rd Road, Shekou, Nanshan, Shenzhen, Guangdong 518000 (CN).

(72) Inventor: SHIH, Shao-Fu; 1 Vista Montana, Unit 1213, San Jose, California 95134 (US).

(74) Agent: LIU, SHEN & ASSOCIATES; 10th Floor, Building 1, 10 Caihefang Road, Haidian District, Beijing 100080 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ROOM CALIBRATION BASED ON GAUSSIAN DISTRIBUTION AND K-NEARESTNEIGHBORS ALGORITHM

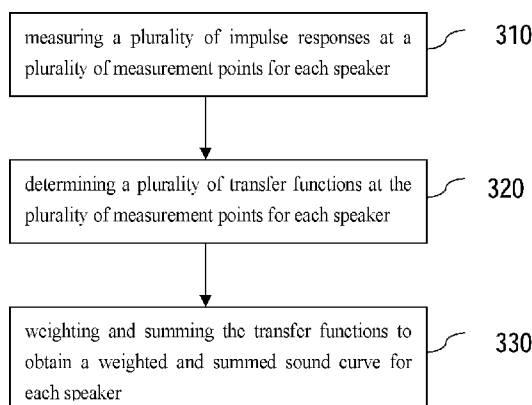


FIG. 3

(57) Abstract: A method of room calibration comprises measuring a plurality of impulse responses at a plurality of measurement points in a room for each speaker of a plurality of speakers. The method also comprises determining a plurality of transfer functions at the plurality of measurement points for each speaker based on the plurality of impulse responses. Furthermore, the method also comprises weighting and summing the transfer functions to obtain a weighted and summed sound curve for each speaker.



## ROOM CALIBRATION BASED ON GAUSSIAN DISTRIBUTION AND K-NEARESTNEIGHBORS ALGORITHM

5

### BACKGROUND

[0001] The present disclosure is related to room calibration, and more specifically, to room calibration based on a Gaussian distribution and a k-nearest neighbors algorithm.

[0002] Home theater system more and more moves from traditional stereo system to multi-channel system. This type of audio system, such as 5.1/7.1 home theater, WIFI speaker system, can create an immersive environment with realistic surround effect. However, setting up an audio system to produce high quality sound at home is a difficult task. When the audio system is put into a common room, the room will often in some way degrade the sound quality. In fact, this system should be installed in listening rooms that are professionally designed and use sound diffusers and absorption material to improve the room acoustics. Nevertheless, for most rooms, people find it difficult to improve their home theater in this way. Sometimes, even in the carefully designed room with diffusers and absorption, the user may still not get the best acoustic performance, since each speaker could be placed randomly in the room, depending on the room environment and configuration. Thus, the listener might feel unbalanced among each channel.

[0003] In recent years, room calibration that can balance the sound of each channel and improve the overall room acoustic performance has attracted many companies' attention. Most of the room calibration methods calibrate the delay, gain or frequency response of the speaker, but they only optimize the sound performance within a small listening area. Besides, they might use some annoying noise as measurement signal.

### SUMMARY

[0004] According to one embodiment of the present disclosure, a method for room calibration, comprises measuring a plurality of impulse responses at a plurality of measurement points in a room for each speaker of a plurality of speakers. The method also comprises determining a plurality of transfer functions at the plurality of

measurement points for each speaker based on the plurality of impulse responses. Furthermore, the method also comprises weighting and summing the transfer functions to obtain a weighted and summed sound curve for each speaker.

[0005] Another embodiment of the present disclosure is a system that includes a speaker system and a processor. The speaker system includes a plurality of speakers. A processor is configured to measure a plurality of impulse responses at a plurality of measurement points in a room for each speaker of the plurality of speakers. The processor is further configured to determine a plurality of transfer functions at the plurality of measurement points for each speaker based on the plurality of impulse responses. Also, the processor is configured to weight and sum the transfer functions to obtain a weighted and summed sound curve for each speaker.

[0006] Another embodiment of the present disclosure is a computer program product. The program code is configured to measure a plurality of impulse responses at a plurality of points in a room for each speaker of a plurality of speaker. The program code is configured to determine a plurality of transfer functions at the plurality of points for each speaker based on the plurality of impulse responses. Furthermore, the program code is configured to weight and sum the transfer functions to obtain a weighted and summed sound curve for each speaker.

#### BRIEF DESCRIPTION OF THE DRAWINGS

- [0007] Figure 1 illustrates a schematic view of a system for room calibration.
- [0008] Figure 2 illustrates a schematic view of a system with multi-points measurement.
- [0009] Figure 3 is a flowchart of the method for room calibration according to one embodiment of the present disclosure.
- [0010] Figure 4 is a flowchart of the method for room calibration according to another embodiment of the present disclosure.
- [0011] Figure 5 is a flowchart of the method for room calibration according to another embodiment of the present disclosure.

[0012] To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures. It is contemplated that elements disclosed in one embodiment may be beneficially utilized on other embodiments without specific recitation. The drawings referred to here  
5 should not be understood as being drawn to scale unless specifically noted. Also, the drawings are often simplified and details or components omitted for clarity of presentation and explanation. The drawings and discussion serve to explain principles discussed below, where like designations denote like elements.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

10 [0013] Embodiments herein describe a room calibration system and a room calibration that are based on the Gaussian distribution and k-nearest neighbors algorithm. Instead of relying on a noise that is annoying as a measurement signal, the room calibration system and method described herein use a predetermined signal (e.g., a custom sine tone) as a measurement signal, which could measure full band spectrum.  
15 Moreover, to achieve a better approach of room calibration, instead of performing room measurements by microphones on devices (near field measurements), the system for room calibration herein performs room measurements by one or more external microphone (far field measurements).

[0014] In a multi-channel speaker system, a plurality of amplifiers and speakers  
20 are usually used to provide a listener with some simulated placement of sound sources. The multi-channel sound can be reproduced through each speaker to the listening area and create a realistic listening environment. When setting up the multi-channel speaker system in a room, the user wants to have the best performance of the system as that in the test lab. However, the room environment and the configuration are  
25 usually different with those of the test lab. Thus, the system needs to be in-situ reconfigured, so that the sound from all the speakers arrives at a listener's ear with the desired frequency response.

[0015] To do so, the system for room calibration may include a calibration system and a speaker system comprising a plurality of speakers. The system for room  
30 calibration may further include one or more microphones. For example, the calibration system can be implemented as a processor or a controller. Figure 1

illustratively shows the calibration model of the system for room calibration using for example one external microphone. The measurement signal is input sequentially to each speaker included in the speaker system, and then the output signal of the speaker system may be measured by the microphone independently. The measurement signal could be used to measure the full band frequency response of the speaker, and the measurement signal may be for instance a custom sine tone. Instead of optimizing only one listening spot or a very narrow listening area in most of the room calibration methods, the system described herein creates a wide-optimized listening area by measuring the responses of most measurement points in the room, thus achieves better performance of room calibration.

[0016] Figure 2 shows a schematic view of a multi-point measurement configuration in a room, which may include a plurality of speakers and a plurality of the measuring points. The configuration of the plurality of measuring points and the plurality of speakers here is only an example for illustration.

[0017] In one aspect, the system for room calibration measures a plurality of impulse responses at a plurality of points in a room for each speaker of the plurality of speakers. The system determines a plurality of transfer functions at the plurality of points for each speaker based on the plurality of impulse responses. Moreover, the system weights and sums the transfer functions to obtain a weighted and summed sound curve for each speaker. Regardless of the number or the location of the measurements points and the number or the location of the speaker, the system may perform the room calibration in order to optimize audio performance. The system may also run in the lab or user's home for training the calibration mode. For example, the measured frequency responses (namely magnitude and phase) can be stored as a dataset. For each measured dataset, there will be a reference tuning tone based on that particular room setup. Those data are called training data, which are used to produce statistical models. For example, during data training, the system weights and sums the transfer functions to obtain a weighted and summed sound curve for each speaker, as a predict output.

[0018] Figure 3 illustrates a flowchart of a method of room calibration. To improve understanding, the blocks of method are described in reference with the system shown in Figures 1-2. At block 310, one or more microphones can measure a

plurality of impulse responses at a plurality of points in a room for each speaker of a plurality of speakers. For example, the microphone(s) can obtain the microphone measurement  $h_{ij}$ . Assuming there are totally  $I$  speakers and  $J$  measuring points,  $h_{ij}$  represents the impulse response between the  $i^{\text{th}}$  fine-tuned speaker and the microphone at the  $j^{\text{th}}$  position. At block 320, the transfer function  $H_{ij}$  can be determined based on the impulse response,  $H_{ij}$  represents the transfer function between the  $i^{\text{th}}$  fine-tuned speaker and the microphone at the  $j^{\text{th}}$  position. They satisfy the following equation,

$$H_{ij} = \mathcal{F}(h_{ij}), \text{ for } i = 1 \dots I \text{ and } j = 1 \dots J \quad (1)$$

where  $\mathcal{F}(\ast)$  denotes the Discrete Fourier Transformation.

10 [0019] Then, at block 330, the method weights and sums the transfer functions of all points for each speaker to obtain a weighted and summed sound curve for each speaker. For example, for the  $i^{\text{th}}$  fine-tuned speaker, all transfer functions between the  $i^{\text{th}}$  speaker and the  $J$  measurement points can be calculated by weighting and summing based on the Gaussian distribution and k-nearest neighbors algorithm.

15 [0020] Figure 4 shows the method of weighting and summing process using the Gaussian distribution in combination with the k-nearest neighbors algorithm.

[0021] As shown in Figure 4, at block 410, based on the transfer functions for each speaker, the magnitude components and the phase components can be calculated. For example, assuming  $H_{ij}$  is composed of a magnitude component  $M_{ij}$  and a phase component  $\varphi_{ij}$ , which can be calculated as,

$$M_{ij} = |H_{ij}| \quad (2)$$

$$\varphi_{ij} = \text{angle}(H_{ij}) \quad (3)$$

where  $\text{angle}(\ast)$  and  $|\ast|$  are the angle operator and the absolute value operator, respectively.

25

[0022] Then, at block 420, Gaussian distributions of the first magnitude components and the first phase components for each speaker can be constructed. For example,  $2 \times I$

Gaussian distributions for the normalized  $M_i$  and  $\varphi_i$  of the  $i^{\text{th}}$  fine-tuned speaker may be constructed. The Gaussian distribution is written as,

$$N(x|\mu, \sigma^2) = \frac{1}{\sqrt{2\pi\sigma^2}} e^{-\frac{(x-\mu)^2}{2\sigma^2}} \quad (4)$$

wherein  $\mu$  and  $\sigma^2$  are the expectation and the variance of the distribution, respectively.

5 All the measurement for the  $i^{\text{th}}$  fine-tuned speaker at all  $J$  measuring points are considered in the  $(2i-1)^{\text{th}}$  and  $2i^{\text{th}}$  distributions.

[0023] At block 430, for each Gaussian distribution, a k-nearest neighbors algorithm is performed to compute weights for the distributions of the magnitude components and the phase components for each speaker. Then, at block 440, the magnitude  
10 components and the phase components for each speaker are weighted and summed to obtain the weighted and summed sound curve (output) for each speaker.

[0024] For example, the k-nearest neighbors algorithm (k-NN) for each distribution may be conducted so as to figure out the weight based on the distance to a cluster center. Then, a weighted sum for the k-NN cluster may be performed to generate  $M_i^k$   
15 and  $\varphi_i^k$  for the in-situ measurement of the  $i^{\text{th}}$  speaker.

[0025] For example, the distance of the  $j^{\text{th}}$  measurement to the cluster center can be written as,

$$d_{M_i}(j) = \frac{1}{N_f} \sum_{f=1}^{N_f} |M_i(f, j) - \mu_{M_i}(f, j)|, d_{\varphi_i}(j) = \frac{1}{N_f} \sum_{f=1}^{N_f} |\varphi_i(f, j) - \mu_{\varphi_i}(f, j)| \quad (5)$$

where  $d_{M_i}$  and  $d_{\varphi_i}$  are the distances to the cluster center of the  $M_i$  and  $\varphi_i$  distributions,  
20 respectively.  $N_f$  and  $f$  denote the number and index of the frequency bin, respectively. The  $\mu_{M_i}$  and  $\mu_{\varphi_i}$  are the expectations of the  $M_i$  and  $\varphi_i$  distributions, respectively.

[0026] Hence, we will define a function  $F(\bullet)$  mapping the distance to a weight that can generate the reasonable  $M_i^k$  and  $\varphi_i^k$ . One example is given as follows,

$$F(d_{M_i}(j)) = \frac{1/d_{M_i}(j)}{\sum_{j=1}^J 1/d_{M_i}(j)}, F(d_{\varphi_i}(j)) = \frac{1/d_{\varphi_i}(j)}{\sum_{j=1}^J 1/d_{\varphi_i}(j)} \quad (6)$$

$$25 \quad M_i^k = \sum_{j=1}^J M_i(j) F(d_{M_i}(j)), \varphi_i^k = \sum_{j=1}^J \varphi_i(j) F(d_{\varphi_i}(j)) \quad (7)$$

[0027] When the in-situ measurement is performed, the similar procedure from Eq. (1) to Eq. (7) will be performed, but just replacing the  $\mu_{M_i}$  and  $\mu_{\varphi_i}$  by the  $M_i^k$  and  $\varphi_i^k$  in order to obtain the final weighted and summed sound curve,  $M_i^a$  and  $\varphi_i^a$ .

5 [0028] Figure 5 shows another aspect of the method. As shown in Figure 5, at block 510, based on the transfer functions for each speaker, the magnitude components and the phase components may be calculated. Then, at block 520, Gaussian distributions of the magnitude components and the phase components for each speaker may be constructed.

10 [0029] As described above in reference with Figures 3-4, with a combination of multiple acoustic measurements in the room using calibrated microphones, a spectral weighting can be performed so as to better refine the room measurement. However, in practice, a measurement in a room includes, but not limits to, room modes, deflections and reflections, which would significantly fluctuate the measurement result. To avoid extreme cases from deviating the measurement results, statistical weighting on the measured frequency responses is used by the room calibration system described  
15 herein. Then, as shown in Figure 5, at block 530, the method compares each distribution of the first magnitude components and the first phase components with a threshold which could be predefined, and excludes the distribution of which the magnitude components and the phase components are greater than the threshold. For example, the threshold of the distributions is set as T, for instance  $T = 3\sigma^2$ . When  
20 some measurements of the  $M_i$  or  $\varphi_i$  are greater than T in the  $(2i-1)^{th}$  or  $2i^{th}$  distribution, these measurements out of the threshold of distribution are excluded because these abnormal measurements are assumed to be caused by the measurement error or the room modes.

25 [0030] Then, at block 540, for each Gaussian distribution, a k-nearest neighbors algorithm is performed to obtain weights of the magnitude components and the phase components for each speaker based on the cluster distance. At block 550, performing weighted sum for the magnitude components and the phase components for each speaker to obtain the weighted and summed magnitude components and phase  
30 components for each speaker. The processes of blocks 540-550 may refer to the same equalizations described in reference to Figure 4, thus the details are omitted here.

[0031] According to another aspect, the correction curves for each speaker may be obtained by performing a pseudo-inverse on the weighted sound curve of each speaker. Then, the correction curves may be applied to the speakers included in the speaker system. The calibration process generates the correction curves to each speaker of the speaker system, which will playback the input signal with both the magnitude and phase adjustment.

[0032] The descriptions of the various embodiments have been presented for purposes of illustration, but are not intended to be exhaustive or limited to the embodiments disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art without departing from the scope and spirit of the described embodiments. The terminology used herein was chosen to best explain the principles of the embodiments, the practical application or technical improvement over technologies found in the marketplace, or to enable others of ordinary skill in the art to understand the embodiments disclosed herein.

[0033] In the preceding, reference is made to embodiments presented in this disclosure. However, the scope of the present disclosure is not limited to specific described embodiments. Instead, any combination of the preceding features and elements, whether related to different embodiments or not, is contemplated to implement and practice contemplated embodiments. Furthermore, although embodiments disclosed herein may achieve advantages over other possible solutions or over the prior art, whether or not a particular advantage is achieved by a given embodiment is not limiting of the scope of the present disclosure. Thus, the preceding aspects, features, embodiments and advantages are merely illustrative and are not considered elements or limitations of the appended claims except where explicitly recited in a claim(s).

[0034] Aspects of the present disclosure may take the form of an entirely hardware embodiment, an entirely software embodiment (including firmware, resident software, micro-code, etc.) or an embodiment combining software and hardware aspects that may all generally be referred to herein as a “circuit,” “module” or “system.”

[0035] The present disclosure may be a system, a method, and/or a computer program product. The computer program product may include a computer readable storage medium (or media) having computer readable program instructions thereon for causing a processor to carry out aspects of the present disclosure.

5 [0036] The computer readable storage medium can be a tangible device that can retain and store instructions for use by an instruction execution device. The computer readable storage medium may be, for example, but is not limited to, an electronic storage device, a magnetic storage device, an optical storage device, an electromagnetic storage device, a semiconductor storage device, or any suitable  
10 combination of the foregoing. A non-exhaustive list of more specific examples of the computer readable storage medium includes the following: a portable computer diskette, a hard disk, a random access memory (RAM), a read-only memory (ROM), an erasable programmable read-only memory (EPROM or Flash memory), a static random access memory (SRAM), a portable compact disc read-only memory (CD-  
15 ROM), a digital versatile disk (DVD), a memory stick, a floppy disk, a mechanically encoded device such as punch-cards or raised structures in a groove having instructions recorded thereon, and any suitable combination of the foregoing. A computer readable storage medium, as used herein, is not to be construed as being transitory signals *per se*, such as radio waves or other freely propagating  
20 electromagnetic waves, electromagnetic waves propagating through a waveguide or other transmission media (*e.g.*, light pulses passing through a fiber-optic cable), or electrical signals transmitted through a wire.

[0037] Computer readable program instructions described herein can be  
25 downloaded to respective computing/processing devices from a computer readable storage medium or to an external computer or external storage device via a network, for example, the Internet, a local area network, a wide area network and/or a wireless network. The network may comprise copper transmission cables, optical transmission fibers, wireless transmission, routers, firewalls, switches, gateway computers and/or edge servers. A network adapter card or network interface in each  
30 computing/processing device receives computer readable program instructions from the network and forwards the computer readable program instructions for storage in a computer readable storage medium within the respective computing/processing device.

[0038] Computer readable program instructions for carrying out operations of the present disclosure may be assembler instructions, instruction-set-architecture (ISA) instructions, machine instructions, machine dependent instructions, microcode, firmware instructions, state-setting data, or either source code or object code written in any combination of one or more programming languages, including an object oriented programming language such as Smalltalk, C++ or the like, and conventional procedural programming languages, such as the "C" programming language or similar programming languages. The computer readable program instructions may execute entirely on the user's computer, partly on the user's computer, as a stand-alone software package, partly on the user's computer and partly on a remote computer or entirely on the remote computer or server. In the latter scenario, the remote computer may be connected to the user's computer through any type of network, including a local area network (LAN) or a wide area network (WAN), or the connection may be made to an external computer (for example, through the Internet using an Internet Service Provider). In some embodiments, electronic circuitry including, for example, programmable logic circuitry, field-programmable gate arrays (FPGA), or programmable logic arrays (PLA) may execute the computer readable program instructions by utilizing state information of the computer readable program instructions to personalize the electronic circuitry, in order to perform aspects of the present disclosure.

[0039] Aspects of the present disclosure are described herein with reference to flowchart illustrations and/or block diagrams of methods, apparatus (systems), and computer program products according to embodiments of the disclosure. It will be understood that each block of the flowchart illustrations and/or block diagrams, and combinations of blocks in the flowchart illustrations and/or block diagrams, can be implemented by computer readable program instructions.

[0040] These computer readable program instructions may be provided to a processor of a general purpose computer, special purpose computer, or other programmable data processing apparatus to produce a machine, such that the instructions, which execute via the processor of the computer or other programmable data processing apparatus, create means for implementing the functions/acts specified in the flowchart and/or block diagram block or blocks. These

computer readable program instructions may also be stored in a computer readable storage medium that can direct a computer, a programmable data processing apparatus, and/or other devices to function in a particular manner, such that the computer readable storage medium having instructions stored therein comprises an article of manufacture including instructions which implement aspects of the function/act specified in the flowchart and/or block diagram block or blocks.

[0041] The computer readable program instructions may also be loaded onto a computer, other programmable data processing apparatus, or other device to cause a series of operational steps to be performed on the computer, other programmable apparatus or other device to produce a computer implemented process, such that the instructions which execute on the computer, other programmable apparatus, or other device implement the functions/acts specified in the flowchart and/or block diagram block or blocks.

[0042] The flowchart and block diagrams in the Figures illustrate the architecture, functionality, and operation of possible implementations of systems, methods, and computer program products according to various embodiments of the present disclosure. In this regard, each block in the flowchart or block diagrams may represent a module, segment, or portion of instructions, which comprises one or more executable instructions for implementing the specified logical function(s). In some alternative implementations, the functions noted in the block may occur out of the order noted in the figures. For example, two blocks shown in succession may, in fact, be executed substantially concurrently, or the blocks may sometimes be executed in the reverse order, depending upon the functionality involved. It will also be noted that each block of the block diagrams and/or flowchart illustration, and combinations of blocks in the block diagrams and/or flowchart illustration, can be implemented by special purpose hardware-based systems that perform the specified functions or acts or carry out combinations of special purpose hardware and computer instructions.

[0043] While the foregoing is directed to embodiments of the present disclosure, other and further embodiments of the disclosure may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims that follow.

## CLAIMS

What is claimed is:

1. A method for room calibration, comprising:  
measuring a plurality of impulse responses at a plurality of measurement  
5 points in a room for each speaker of a plurality of speakers,  
determining a plurality of transfer functions at the plurality of measurement  
points for each speaker based on the plurality of impulse responses; and  
weighting and summing the transfer functions to obtain a weighted and  
summed sound curve for each speaker.  
10
2. The method of claim 1, wherein the weighting and summing further comprises:  
obtaining magnitude components and phase components of the transfer  
functions for each speaker;  
constructing Gaussian distributions with the magnitude components and the  
15 phase components for each speaker; and  
generating weights for the distributions of the magnitude components and the  
phase components for each speaker based on each cluster distance;  
weighting and summing the magnitude components and the phase components  
for each speaker based on the weights, to obtain the weighted and summed sound  
20 curve for each speaker.
3. The method of claim 2, further comprises:  
comparing each distribution of the magnitude components and the phase  
components with a threshold; and  
25 excluding the distribution which is greater than the threshold.
4. The method of one of claims 1-3, wherein the method further comprises:  
performing a pseudo-inverse operation on the weighted and summed sound  
curve of each speaker to generate a correction curve for each speaker.  
30
5. The method of claim 4, wherein the method further comprises:  
applying the correction curve to each speaker.

6. The method of claim 2, wherein the weights are obtained by performing a k-nearest neighbors algorithm for each distribution.
- 5 7. The method of claim 2, wherein each cluster distance is mapped to a weight with a defined function.
8. The method of claim 1, wherein the measuring a plurality of impulse responses for each speaker comprising:
- 10 measuring a plurality of impulse responses for each speaker based on a measurement signal.
9. The method of claim 1, wherein the plurality of impulse responses for each speaker of a plurality of speakers are measured by one or more external microphones.
- 15
10. A system for room calibration, comprising:
- a speaker system including a plurality of speakers; and
- a processor configured to:
- measure a plurality of impulse responses at a plurality of measurement
- 20 points in a room for each speaker of the plurality of speakers,
- determine a plurality of transfer functions at the plurality of measurement points for each speaker based on the plurality of impulse responses; and
- weight and sum the transfer functions to obtain a weighted and summed sound curve for each speaker.
- 25
11. The system of claim 10, wherein the processor further configured to:
- obtain magnitude components and phase components of the transfer functions for each speaker;
- construct Gaussian distributions with the magnitude components and the phase
- 30 components for each speaker; and
- generate weights for the distributions of the magnitude components and the phase components for each speaker based on each cluster distance;

weight and sum the magnitude components and the phase components for each speaker, based on the weights, to obtain the weighted and summed sound curve for each speaker.

5 12. The system of claim 11, wherein the processor further configured to:  
compare each distribution of the magnitude components and the phase components with a threshold; and  
exclude the distribution which is greater than the threshold.

10 13. The system of any one of claims 10-12, wherein the processor further configured to:  
perform a pseudo-inverse on the weighted and summed sound curve of each speaker to generate a correction curve for each speaker.

15 14. The system of claim 13, wherein the processor is further configured to apply the correction curve to each speaker.

15. The system of claim 11, wherein the weights are obtained by performing a k-nearest neighbors algorithm for each distribution.

20

16. The system of claim 11, wherein each cluster distance is mapped to a weight with a defined function.

17. The system of claim 10, wherein the processor is configured to measure the plurality of impulse responses for each speaker based on a measurement signal.

25

18. The system of claim 10, wherein the plurality of impulse responses for each speaker of a plurality of speakers are measured by one or more external microphones.

30 19. A computer program product including computer-readable program code executable for performing the method according to one of claims 1-9.

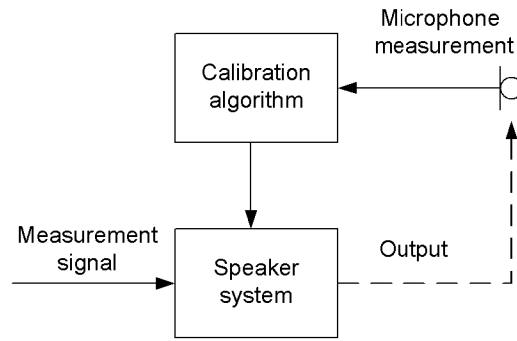


FIG.1

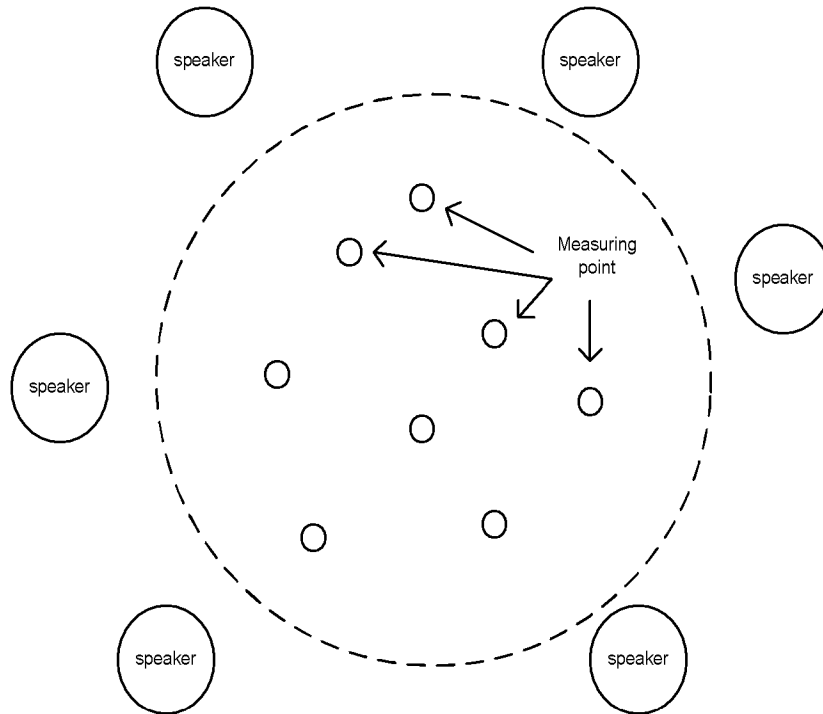


FIG.2

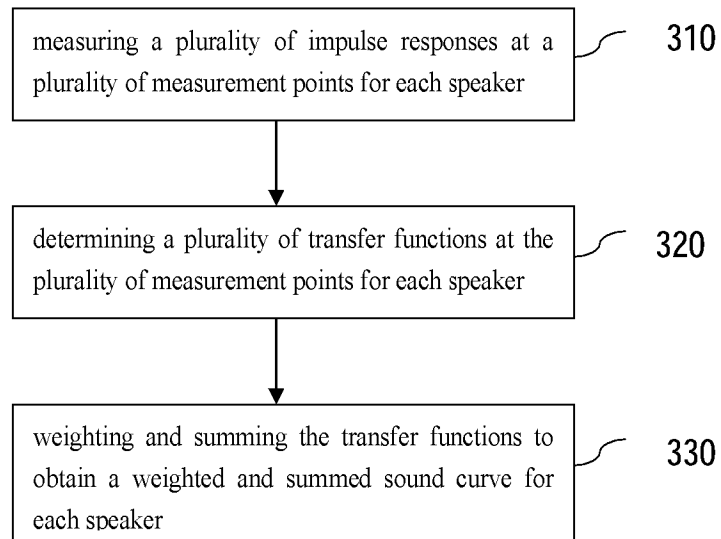


FIG.3

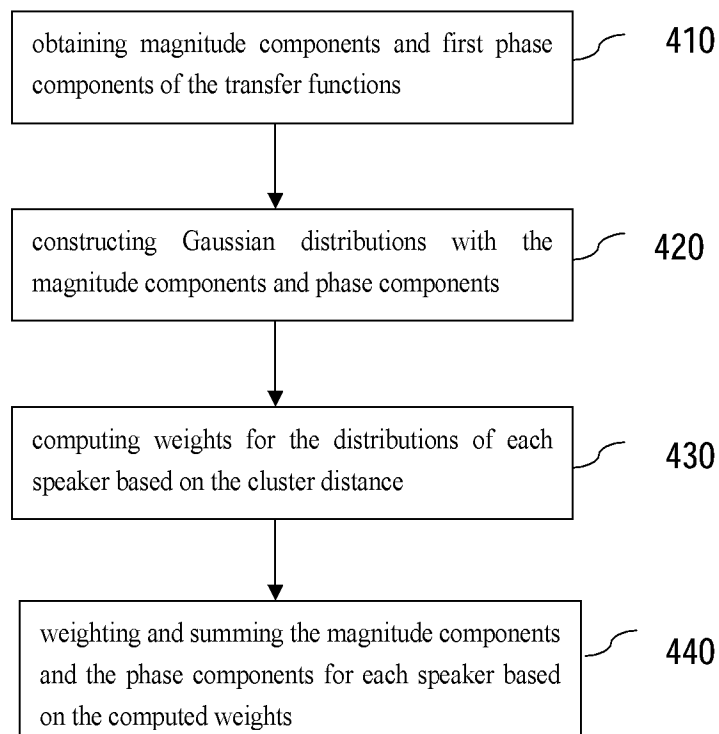


FIG.4

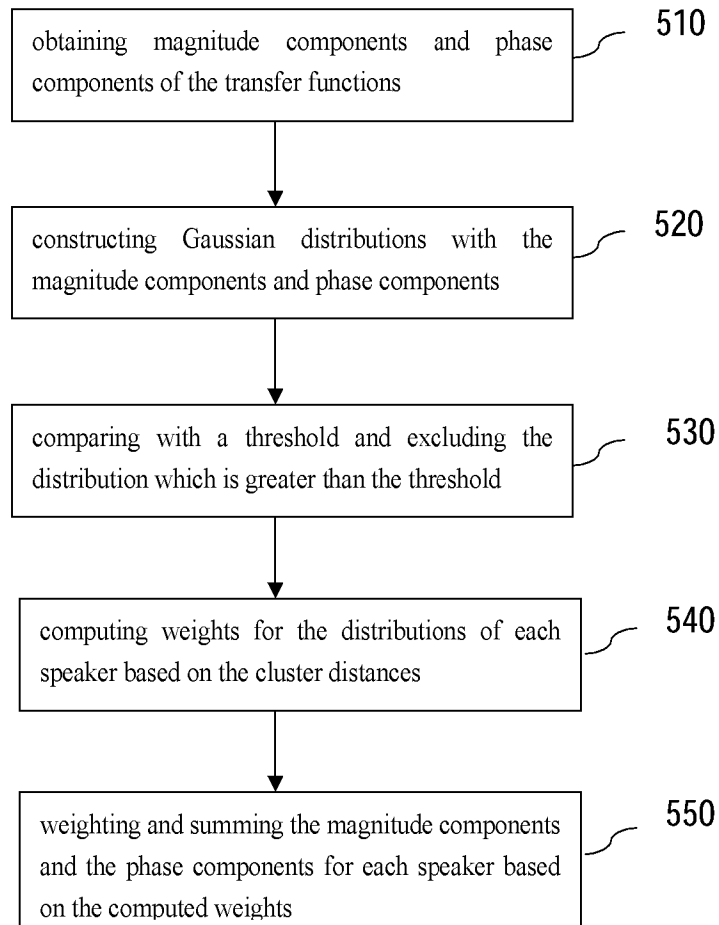


FIG.5

## INTERNATIONAL SEARCH REPORT

International application No.

**PCT/CN2019/106905**

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
H04S 7/00(2006.01)i		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols)		
H04S		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPI, EPODOC, CNPAT, CNKI: room, calibrat+, impulse, response, measur+, transfer, function, weight, sum, curve, sound, balance+		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 1659927 A (EQUATECH APS) 24 August 2005 (2005-08-24) claims 1-10, the abstract	1-19
A	CN 106063293 A (ARKAMYS) 26 October 2016 (2016-10-26) the whole document	1-19
A	CN 106535076 A (SHENZHEN EMUNKS TECHNOLOGY CO., LTD.) 22 March 2017 (2017-03-22) the whole document	1-19
A	CN 110246480 A (HARMAN INT. IND. INC.) 17 September 2019 (2019-09-17) the whole document	1-19
A	CN 104581604 A (OTICON AS) 29 April 2015 (2015-04-29) the whole document	1-19
A	CN 107079229 A (DIRAC RES AB) 18 August 2017 (2017-08-18) the whole document	1-19
A	DE 102004018375 A1 (KUEHN, Steffen) 03 November 2005 (2005-11-03) the whole document	1-19
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
25 May 2020		24 June 2020
Name and mailing address of the ISA/CN		Authorized officer
National Intellectual Property Administration, PRC 6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing 100088 China		WANG, Siwen
Facsimile No. (86-10)62019451		Telephone No. 86-(10)-53961342

**INTERNATIONAL SEARCH REPORT**  
**Information on patent family members**

International application No.

**PCT/CN2019/106905**

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	1659927	A	24 August 2005	EP	1516514	A1	23 March 2005
				WO	03107719	A1	24 December 2003
				AU	2003232175	A1	31 December 2003
				KR	20050026928	A	16 March 2005
				JP	2005530432	A	06 October 2005
				US	2005157891	A1	21 July 2005
CN	106063293	A	26 October 2016	WO	2015128160	A1	03 September 2015
				FR	3018015	A1	28 August 2015
				EP	3111667	A1	04 January 2017
				ES	2676577	T3	23 July 2018
CN	106535076	A	22 March 2017	None			
CN	110246480	A	17 September 2019	KR	20190106775	A	18 September 2019
				JP	2019159322	A	19 September 2019
				US	10339912	B1	02 July 2019
				EP	3537431	A1	11 September 2019
CN	104581604	A	29 April 2015	EP	2863654	A1	22 April 2015
				US	2015110310	A1	23 April 2015
				DK	2863654	T3	22 October 2018
CN	107079229	A	18 August 2017	TW	201611626	A	16 March 2016
				US	2017238118	A1	17 August 2017
				WO	2016028199	A1	25 February 2016
				EP	3183892	A1	28 June 2017
DE	102004018375	A1	03 November 2005	None			