

15394/88

APPLICATION ACCEPTED AND AMENDMENTS

AMENDED 12-4-90

FORM 1

598664 SPRUSON & FERGUSON

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

APPLICATION FOR A STANDARD PATENT

Lutron Electronics Co., Inc., incorporated in Pennsylvania, of 205 Suter Road, Coopersburg, Pennsylvania, 18036, UNITED STATES OF AMERICA, hereby apply for the grant of a standard patent for an invention entitled:

Multiple-Input Power Control System

which is described in the accompanying complete specification.

Details of basic application(s):-

Basic Applic. No: Country:

079845

US

Application Date:

30 July 1987

The address for service is:-

Spruson & Ferguson
Patent Attorneys
Level 33 St Martins Tower
31 Market Street
Sydney New South Wales Australia


DATED this TWENTY EIGHTH day of APRIL 1988

Lutron Electronics Co., Inc.


By:

M. J. [Signature]

Registered Patent Attorney



TO: THE COMMISSIONER OF PATENTS
OUR REF: 57430
S&F CODE: 57692

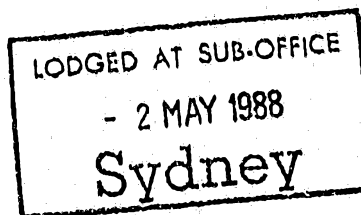

COMMONWEALTH OF AUSTRALIA

THE PATENTS ACT 1952

DECLARATION IN SUPPORT OF A
CONVENTION APPLICATION FOR A PATENTIn support of the Convention Application made for a
patent for an invention entitled:AUSTRALIA
CONVENTION
STANDARD
& PETTY PATENT
DECLARATION

Title of Invention

Multiple-Input Power Control System

Full name(s) and
address(es) of
Declarant(s)

I/~~We~~ Joel S. Spira
President,
of Lutron Electronics Co., Inc. (A corporation of
205 Suter Road Pennsylvania)
Coopersburg, PA 18036
U.S.A.

do solemnly and sincerely declare as follows:--

Full name(s) of
Applicant(s)

1. ~~I am/We are the applicant(s) for the patent~~
(or, in the case of an application by a body corporate)
1. I am/~~We are~~ authorised by Lutron Electronics Co., Inc. (A
corporation of Pennsylvania)

the applicant(s) for the patent to make this declaration on
its/~~their~~ behalf.

2. The basic application(s) as defined by Section 141 of the
Act was/~~were~~ made

Basic Country(ies)

in U.S.A.

Priority Date(s)

on July 30, 1987

Basic Applicant(s)

by Stephen J. Yuhasz

Full name(s) and
address(es) of
inventor(s)

3. ~~I am/We are the actual inventor(s) of the invention referred
to in the basic application(s)~~
(or where a person other than the inventor is the applicant)

3. Stephen J. Yuhasz
Box 248, Route 1,
of Zionsville, PA 18092,
United States of America

(respectively)--

is/~~are~~ the actual inventor(s) of the invention and the facts upon
which the applicant(s) is/~~are~~ entitled to make the application are
as follows:Set out how Applicant(s)
derive title from actual
inventor(s) e.g. The
Applicant(s) is/~~are~~ the
assignee(s) of the
invention from the
inventor(s)The Applicant is the assignee of the
invention from the inventor.

4. The basic application(s) referred to in paragraph 2 of this
Declaration was/~~were~~ the first application(s) made in a Convention
country in respect of the invention(s) the subject of the application.

Declared at Coopersburg this 19th day of April 19 88
PA U.S.A.

(12) PATENT ABRIDGMENT (11) Document No. AU-B-15394/88
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 598664

(54) Title
MULTIPLE-INPUT POWER CONTROL SYSTEM

International Patent Classification(s)
(51)⁴ **G08C 023/00 G08C 017/00 H05B 037/02**

(21) Application No. : **15394/88** (22) Application Date : **02.05.88**

(30) Priority Data

(31) Number (32) Date (33) Country
079845 30.07.87 US UNITED STATES OF AMERICA

(43) Publication Date : **02.02.89**

(44) Publication Date of Accepted Application : **28.06.90**

(71) Applicant(s)
LUTFION ELECTRONICS CO., INC.

(72) inventor(s)
STEPHEN J. YUHASZ

(74) Attorney or Agent
SPRUSON & FERGUSON

(56) Prior Art Documents
AU 588667 68774/87 H05B 37/02
US 3697821

(57) Claim

1. A wireless power control system with auxiliary local control comprising, in combination,
 (a) transmitter means to transmit a radiant first control signal,
 (b) receiver means to receive and store said first control signal,
 (c) auxiliary local control means to provide a second control signal,
 (d) decider means to select one of said first or second control signals and to provide said selected signal to power control means to control the power supplied from a source to a load over a substantially continuous range of values,

 wherein at least one of said transmitter means or said auxiliary local control means has actuator means manually movable through a continuous range of positions to produce a control signal characteristic of a position substantially immediately as said actuator means is moved to that position.

59 8664

S & F Ref: 57430

FORM 10

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

COMPLETE SPECIFICATION

(ORIGINAL)

FOR OFFICE USE:

Class Int Class

Complete Specification Lodged:
Accepted:
Published:

Priority:

Related Art:

This document contains the
amendments made under
Section 49 and is correct for
printing.

Name and Address
of Applicant:

Lutron Electronics Co., Inc.
205 Suter Road
Coopersburg Pennsylvania 18036
UNITED STATES OF AMERICA

Address for Service: Spruson & Ferguson, Patent Attorneys
Level 33 St Martins Tower, 31 Market Street
Sydney, New South Wales, 2000, Australia

Complete Specification for the invention entitled:

Multiple-Input Power Control System

The following statement is a full description of this invention, including the
best method of performing it known to me/us

Abstract of the Disclosure

A multiple-input power control system accepts control signals from a radiant signal transmitter and from a local control, selects one of the signals, and provides the
5 selected signal to a power controller to control the power to a load. At least one of the control signal sources has an actuator which is movable through a range of positions, to determine the control signal provided by that source. The system finds particular utility in controlling lighting
10 loads.

DESCRIPTION
MULTIPLE-INPUT POWER CONTROL SYSTEM

Background of the Invention

This invention relates to an electrical control system, and more particularly to a novel wireless electrical load control system wherein control of the power supplied to a load may be varied from a remote location by using a remote control device not electrically wired to the load and from a local control device which is electrically wired to the load.

Although the invention is described with reference to the control of lighting level, it has application in other areas, such as the control of sound volume, tone or balance; video brightness or contrast; the tuning setting of a radio or television receiver and the position, velocity or acceleration of a moveable object.

Load control systems are known in which the power supplied to the load can be adjusted by control units mounted at one or more different locations remote from the power controller. The control units are typically connected to the controller using two or three electrical wires in the structure in which the load control system is used. In an advanced version of such systems, control is transferred between different locations immediately upon manipulation of a control switch without the need for any additional overt act by the user. See, for instance, ~~expending~~ U.S. Patent No. 4,639,547, issued 25 August 1987 to Rowen et al. Application Serial No. 857,730, filed April 20, 1986.

To permit greater user flexibility and to permit installation of a load control system with no modification of the existing wiring system in the structure, load control systems have been modified to incorporate wireless remote control units. For example, a known type of light dimming system uses a power controller/receiver/local control and a



remote control transmitter for transmitting a control signal by radio, infrared, or microwave to the power controller/receiver/local control. In these systems, a switch on the transmitter or local control must typically be maintained in a depressed position until the desired light level is reached. In such a system, it is only possible to cause the light level to be raised or lowered at a predetermined fixed rate and it is not possible to select a particular light level directly, nor is there any visual indication at the transmitter of the light level selected. In such a system a lag of two to ten seconds typically exists between actuation of the transmitter or local control and achievement of the desired light level. Especially at the higher end of the range, this lag tends to limit the commercial acceptability of such systems.

Alternative load control systems have been produced that incorporate wireless remote controls where the desired light level is reached instantaneously on operation of the remote control unit. Unfortunately, these systems only allow the selection of three or four light levels that have been previously programmed at the power controller/receiver; usually it is not possible to select one of an essentially continuous range of values.

In the case of the systems using radio waves for the control signal transmission medium, the transmitter is often larger than is commercially desirable so as to accommodate the radio transmitting system, and an antenna must frequently be hung from the controller/receiver.

Remote control systems are frequently incorporated in television sets. In these systems, a switch on the transmitter must typically be maintained in a depressed position until the desired load level, e.g., volume, is reached, with a time lag typically existing between the depression of the switch and achievement of the desired load level. Model airplanes are typically controlled by remote

radio control where a control signal is typically continually transmitted during the operation of the airplane. It is possible, however, to select the control signal from an essentially continuous range of values.

5 Generally, in the known wireless remote load control systems, both the local and wireless remote controls are of the raise/lower type described above, where a switch has to be maintained in a depressed position until the desired load level is reached. In such a system, it is not necessary for
10 the power controller receiving signals from the local and wireless remote controls to be able to choose which control signal to respond to as a raise signal has the same effect whether it comes from the local or wireless remote controls.

However, in a wireless remote load control system
15 wherein either the wireless remote control or local control or both adjust power to the load through a continuous range of values immediately as the control actuator of the control device is manipulated, it is necessary for the power controller to be able to choose which control signal to
20 respond to, as the instantaneous signals from the local and remote controls will necessarily be different.

Brief Description of the Invention

A primary object of the present invention is to provide a means of choosing between the signals coming from the
25 wireless remote control, or from the local control in a wireless remote load control system wherein either the wireless remote control or the local control or both adjust power to the load through a continuous range of values immediately as the control actuator of the control device is
30 manipulated.

To achieve this and other objects, the invention generally comprises a novel wireless remote control dimmer system with a local control for controlling application of alternating current to a load. The system includes a power
35 controller for varying the power supplied to the load

pursuant to a control signal, a wireless remote control, a receiver, a local control and a 'decider' to choose between the local control signal and the wireless control signal received by the receiver, with at least one of the wireless remote control or the local control adjusting power to the load through a continuous range of values immediately as its control actuator is manipulated.

Brief Description of the Figures

For a fuller understanding of the nature and objects of the invention, reference should be had to the following detailed description taken in connection with the accompanying drawings wherein:

Fig. 1 is a block diagram showing an overview of a prior art remote control dimmer system wherein both the local and wireless remote controls are of the raise/lower type.

Fig. 2 is a block diagram showing an overview of one embodiment of the remote control dimmer system of the invention wherein both the local and wireless remote controls adjust power to the load through a continuous range of values immediately as their control actuators are manipulated.

Fig. 3 is a block diagram showing an overview of an alternative embodiment of the remote control dimmer system of the invention wherein the wireless remote control is of the raise/lower type and the local control adjusts power to the load through a continuous range of values immediately as its control actuator is manipulated.

Fig. 4 is a block diagram showing an overview of another alternative embodiment of the remote control dimmer system of the invention wherein the local control is of the raise/lower type and the wireless remote control adjusts power to the load through a continuous range of values immediately as its control actuator is manipulated.

Fig. 5 is a schematic diagram of a decider circuit

suitable for use with the invention.

Detailed description of the Figures

In the drawings, wherein like reference numerals denote like parts, a prior art remote control dimmer system is described in Fig 1. The latter includes power controller 100 wireless transmitter 104, receiver 102 and local control 106. Wireless transmitter 104 is of the raise/lower type providing either separate signals for raising and lowering the light level or a single signal which causes the light level to be raised and lowered in a cyclical fashion until the signal is removed. The signals from transmitter 104 are received by receiver 102 and applied to power controller 100. Wired local control 106 is also of the raise/lower type, and once again, can provide either separate signals for raising and lowering the light level or a single signal which causes the light level to be raised and lowered in a cyclical fashion until the signal is removed. Once again, these signals are applied to power controller 100.

It should be noted that in this prior art case, it is not necessary for the power controller 100 to be able to distinguish whether a signal is coming from transmitter 104 or local control 106 because the effect of a raise or lower signal is the same regardless of its source.

An overview of one embodiment of the invention is described in Fig. 2. The latter includes power controller 100, wireless transmitter 110, receiver/memory unit 108, local control 112 and decider circuitry 114. Wireless transmitter 110 is of the type which causes power controller 100 to adjust power to a load through a continuous range of values immediately as its control actuator is manipulated. Signals from wireless transmitter 110 are received by receiver/memory unit 108, which stores in its memory unit the latest signal received from wireless transmitter 110. Local control 112 also causes power controller 100 to adjust power to the load through a continuous range of values

immediately as its control actuator is manipulated.

The signals from local control 112 and receiver/memory unit 108 are applied to decider circuitry 114, which applies either the signal from local control 112 or the signal from receiver/memory unit 108 to power controller 100 in response to selection signals from local control 112 and receiver/memory unit 108. Suitable designs for transmitter 110, receiver/memory unit 108, power controller 100, local control 112 and decider circuitry 114 are discussed in European Patent Application No. 88303936.4, published as pending patent application number 079,847, filed July 30, 1 February 1989, Publication No. 0301680, incorporated herein by reference. 1987, incorporated herein by reference.

An alternative embodiment of the invention is illustrated in Fig. 3. Once again, power controller 100, local control 112 and decider circuitry 114 are included as in the embodiment illustrated in Fig. 2. However, in the alternative embodiment of Fig. 3 receiver/memory unit 108' receives signals from wireless transmitter 104, which is of the raise/lower type. These signals serve to modify the value of the output signal stored in the memory unit of receiver/memory unit 108 and hence cause the light level controlled by power controller 100 to increase or decrease accordingly. Once again, decider circuitry 114 responds to selection signals from receiver/memory unit 108 and local control 112 to apply either the signal from receiver/memory unit 108 or local control 112 to power controller 100.

A further embodiment of the invention is illustrated in Fig. 4. As in the embodiment illustrated in Fig. 2, power controller 100, wireless transmitter 110, receiver/memory unit 108 and decider circuitry 114 are included. However, local control 112 is replaced by local control 106'. Local control 106' is of the raise/lower type and has an internal memory to store the value of the signal to be applied to power controller 100. Operating the local control 106' causes the signal value stored in the internal memory to be changed. Decider circuitry 114 responds to selection



signals from receiver/memory unit 108 or local control 106' to apply either the signal from receiver/memory unit 108 or local control 106' to power controller 100.

5 The memory circuitry in receiver/memory unit 108 or 108' or in local control 106' can be either digital or analog.

Decider circuitry suitable for use with the invention is illustrated in figure 5. The selection signal line from the receiver memory unit is connected to the cathode of
10 diode 200 and one terminal of resistor 202. The anode of diode 200 is connected to ground. The other terminal of resistor 202 is connected to the base of transistor 204. The emitter of transistor 204 is connected to ground and the collector is connected to one terminal of resistor 205. The
15 other terminal of resistor 205 is connected to the cathode of diode 206, one terminal of resistor 210, one terminal of latching relay coil 214A and the anode of diode 212.

The other terminal of resistor 210 is connected to the base of transistor 208. The anode of diode 206 is connected
20 to the emitter of transistor 208 and to command line 218. The collector of transistor 208 is connected to one terminal of latching relay coil 214B and to the anode of diode 216. The cathodes of diodes 212 and 216 and the other terminals of relay coils 214A and 214B are connected to the positive
25 terminal of a 24V DC supply.

The output signal from the receiver/memory unit is connected to one terminal of relay contacts 214C. The other terminal of relay contacts 214C being connected to the signal line to the power controller, 220.

30 The selection signal from the local control unit is connected to the cathode of diode 300 and one terminal of resistor 302. The anode of diode 300 is connected to ground. The other terminal of resistor 302 is connected to the base of transistor 304. The emitter of transistor 304
35 is connected to ground and the collector is connected to one

terminal of resistor 305. The other terminal of resistor 305 is connected to the cathode of diode 306, one terminal of resistor 310, one terminal of latching relay coil 314A and the anode of diode 312.

5 The other terminal of resistor 310 is connected to the base of transistor 308. The anode of diode 306 is connected to the emitter of transistor 308 and to command line 218. The collector of transistor 308 is connected to one terminal of latching relay coil 314B and to the anode of diode 316.
 10 The cathodes of diodes 312 and 316 and the other terminals of relay coils 314A and 314B are connected to the positive terminal of the 24V DC supply.

15 The output signal from the local control unit is connected to one terminal of relay contacts 314C. The other terminal of relay contacts 314C being connected to the signal line to the power controller 220.

20 The operation of the decider circuitry of Fig. 5 is as follows. Assume that relay contacts 314C are closed and hence the signal from the local control unit is being applied to the power controller via line 220. On receipt by the receiver of a valid transmission from the transmitter, the selection signal from the receiver/memory unit goes high. This allows base current for transistor 204 to flow through resistor 202 turning transistor 204 on. This allows
 25 current to flow through relay coil 214A closing relay contacts 214C and applying the output signal from the receiver/memory unit (and hence the wireless transmitter) to the power controller via line 220. At the same time, the emitter of transistor 308 is pulled low through diode 206,
 30 and transistor 308 receives base current through relay coil 314A and resistor 310. The collector current for transistor 308 flows through relay coil 314B, which opens relay contacts 314C. Since the relay formed by relay coils 214A, 214B, and relay contacts 214C is a latching relay, relay
 35 contacts 214C remain closed even when the signal at the

cathode of diode 200 goes low again.

If now the local control unit is activated, then the selection signal line connected to the cathode of diode 300 and one terminal of resistor 302 will go high, turning
5 transistor 304 on. This allows current to flow through relay coil 314A, closing relay contacts 314C and applying the output signal from the local control unit to the power controller via line 220. At the same time the emitter of transistor 208 is pulled low through diode 306, and
10 transistor 208 receives base current through relay coil 214A and resistor 210. The collector current for transistor 208 flows through relay coil 214B, which opens relay contacts 214C. Since the relay formed by relay coils 314A, 314B and relay contacts 314C is a latching relay, relay contacts 314C
15 remain closed even when the signal at the cathode of diode 300 goes low again.

Diodes 212, 216, 312, and 316 are flyback protection diodes for relay coils 214A, 214B, 314A, and 314B respectively. Diodes 200 and 300 are protection diodes for
20 transistors 204 and 304 respectively.

The presently preferred values of the components for the circuit of figure 5 are as follows. Resistors 202 and 302, are 56k ohms; Resistors 205 and 305 are 68 ohms; Resistors 210 and 310 are 56k ohms. All diodes are type
25 1N914. All transistors are type MPSA29. Relay coils 214A and 214B and relay contacts 214C together form a latching relay, for example an Omron G5AK237POC24. Similarly, relay coils 314A and 314B and relay contacts 314C together form a second latching relay.

30 It should be apparent to one skilled in the art, that the implementation described hereinbefore can be extended to encompass more than one receiver or auxiliary local control.

Since these and certain other changes may be made in the above apparatus and method without departing from the
35 scope of the invention herein involved, it is intended that

all matter contained in the above description or shown in the accompanying drawings shall be interpreted in an illustrative and not a limiting sense.

The claims defining the invention are as follows:

1. A wireless power control system with auxiliary local control comprising, in combination,

- (a) transmitter means to transmit a radiant first control signal,
- (b) receiver means to receive and store said first control signal,
- (c) auxiliary local control means to provide a second control signal,
- (d) decider means to select one of said first or second control

signals and to provide said selected signal to power control means to control the power supplied from a source to a load over a substantially continuous range of values,

wherein at least one of said transmitter means or said auxiliary local control means has actuator means manually movable through a continuous range of positions to produce a control signal characteristic of a position substantially immediately as said actuator means is moved to that position.

2. The system of claim 1 in which said transmitter means has an actuator manually movable through a range of positions to produce said first control signal.

3. The system of claim 1 in which said auxiliary local control means has an actuator manually movable through a range of positions to produce said second control signal.

4. The system of claim 2 in which said auxiliary local control means has an actuator manually movable through a range of positions to produce said second control signal.

5. The system of claim 1 in which one of said transmitter means and said auxiliary local control means produces control signals which serve only to increase and decrease the power supplied to the load.

6. The system of claim 5 in which said transmitter means operates to produce signals which serve only to increase and decrease the power supplied to the load.

7. The system of claim 5 in which said auxiliary local control means operates to produce signals which serve only to increase and decrease the power supplied to the load.

8. The system of claim 1 in which said power control means controls a lighting load.

9. The system of claim 1 in which said power control means produces a phase controlled output signal.



-12-

10. The system of claim 1 in which said decider means comprises at least one latching relay.





11. A wireless power control system substantially as hereinbefore described with reference to any one of Figures 2, 3 or 4 and Figure 5 of the drawings.

DATED this SIXTH day of APRIL 1990
Lutron Electronics Co, Inc.

Patent Attorneys for the Applicant
SPRUSON & FERGUSON



1/2

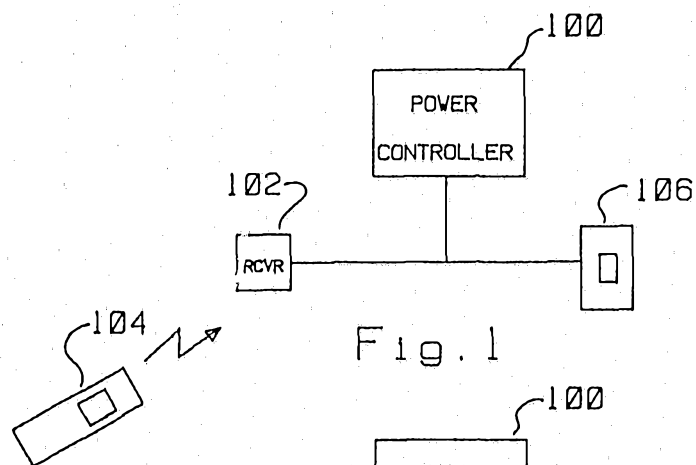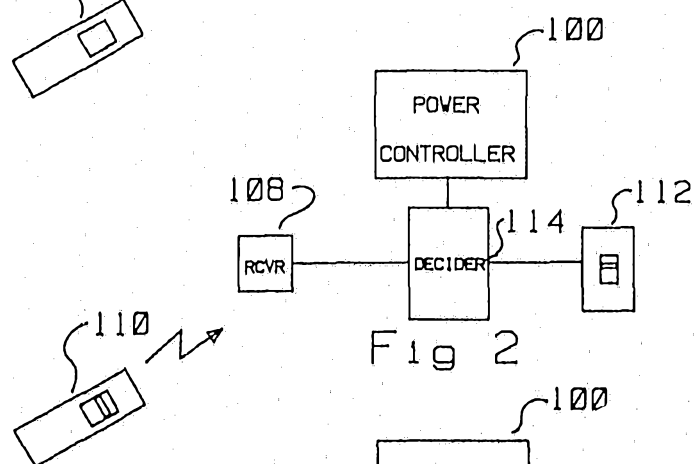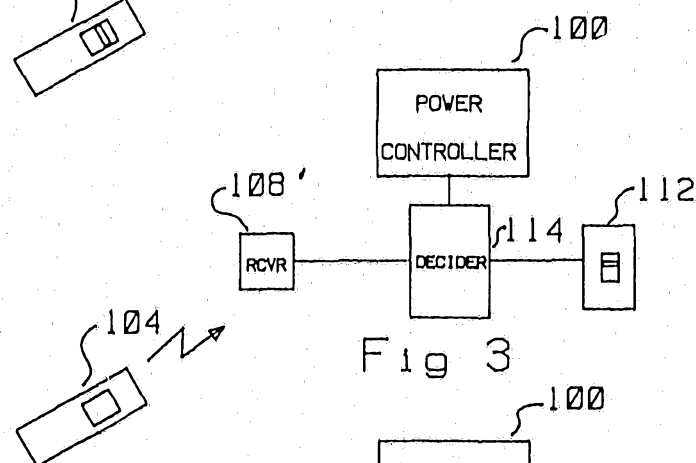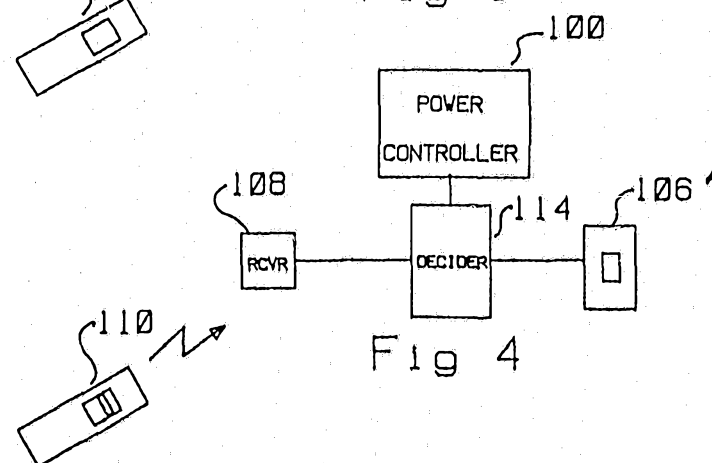

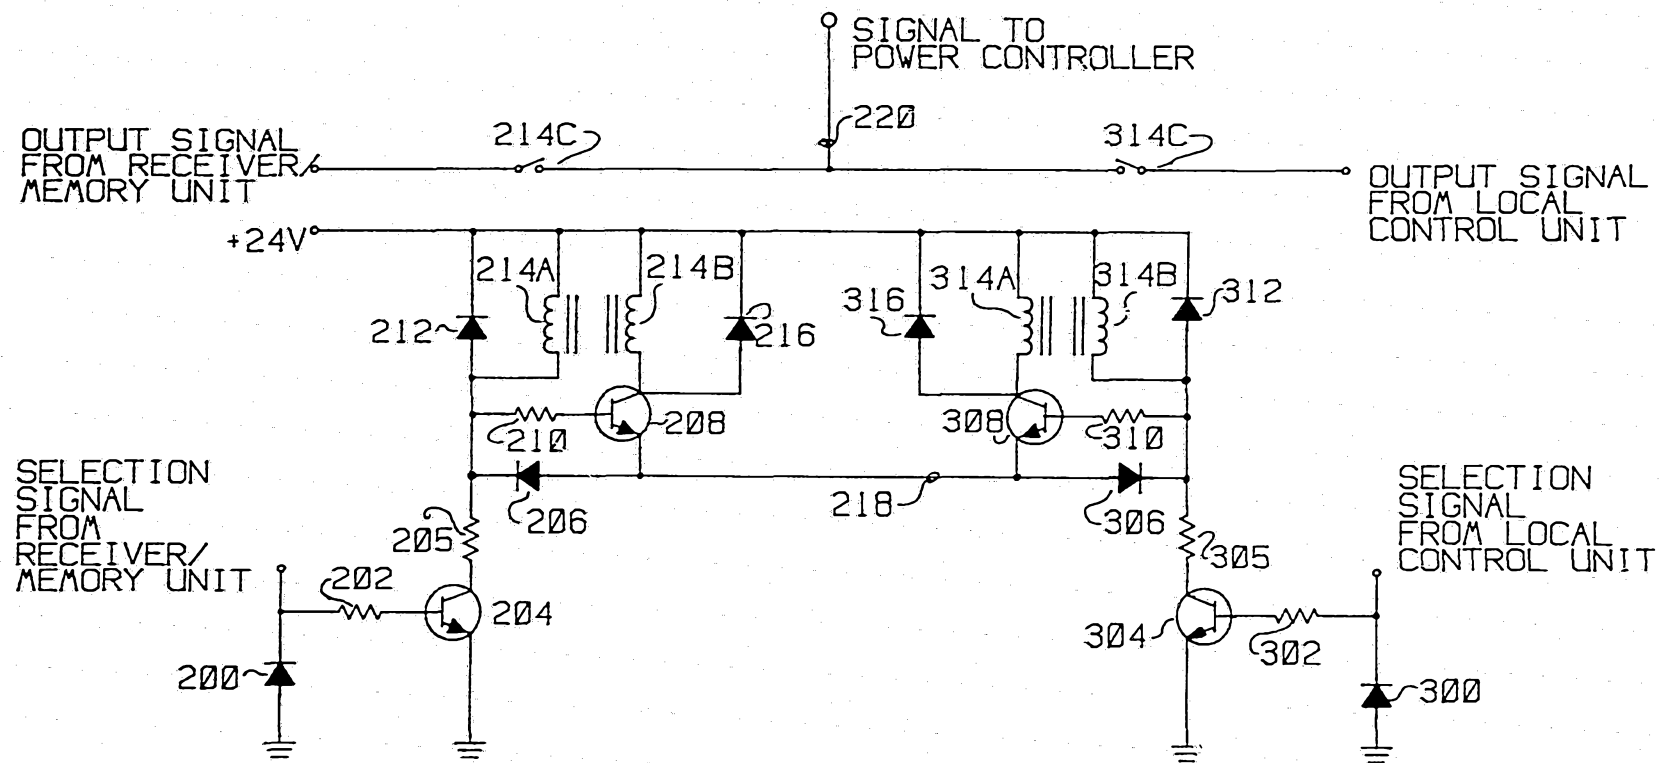


Fig. 5