

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 March 2005 (24.03.2005)


PCT

(10) International Publication Number  
**WO 2005/027301 A1**

- (51) International Patent Classification<sup>7</sup>: **H02J 3/12**, (74) Agents: **HILLERINGMANN, Jochen et al.**; Bahnhofsvorplatz 1 (Deichmannhaus), 50667 Cologne (DE).  
3/18, H02M 5/44
- (21) International Application Number: PCT/EP2003/010269
- (22) International Filing Date: 16 September 2003 (16.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **GENERAL ELECTRIC COMPANY** [US/US]; 1 River Road, Schenectady, NY 12345 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **MENKE, Detlef** [DE/DE]; Bahnhofstrasse 61, 49504 Lotte (DE).  
**JANSSEN, Wilhelm** [DE/DE]; Am Schwalbenberg 6a, 26683 Saterland (DE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report

[Continued on next page]

(54) Title: METHOD FOR OPERATING A FREQUENCY CONVERTER OF A GENERATOR

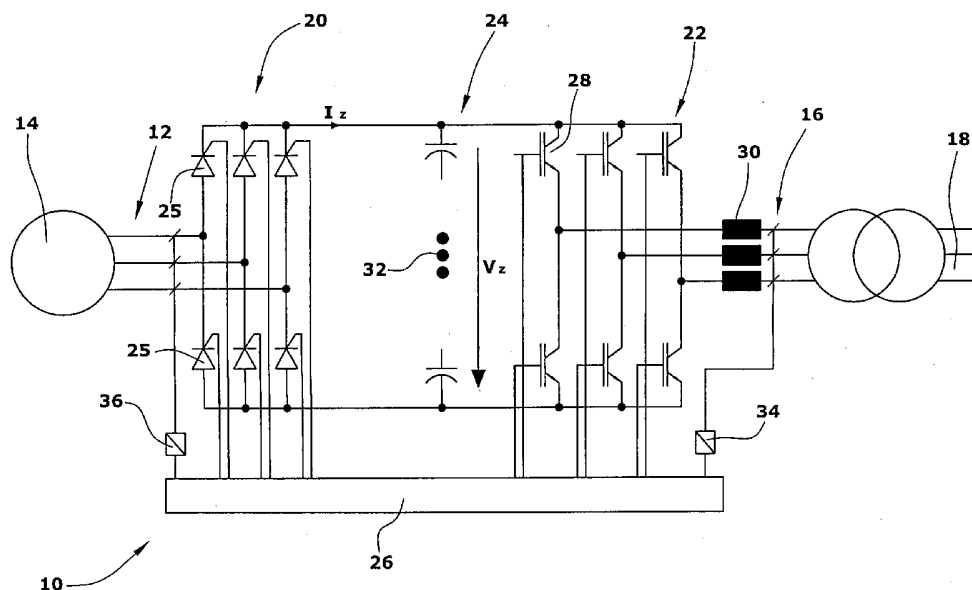

(57) Abstract: The method relates to the operation of a frequency converter of a generator in particular of a wind energy turbine, in the event of a substantial grid voltage drop, wherein the frequency converter (10) comprises an AC/DC converter (20), to be connected to the generator (14), a DC/AC converter (22) to be connected to the voltage grid (18), and a DC link circuit (24) for connecting the AC/DC converter (20) to the DC/AC converter (22). The method comprises the step of reducing an output voltage of the DC link circuit (24) for increasing an output current of the DC/AC converter (22) and/or reducing the operation frequency of electronic switches (28) of the DC/AC converter (22) for increasing the output current of the DC/AC converter (22).

WO 2005/027301 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## TITLE

Method for operating a frequency converter of a generator

5

## BACKGROUND OF THE INVENTION

## Field of the Invention

10 The present invention relates to the operation of power converters for supplying electrical power to a grid and, in particular, to a frequency converter of a generator of a wind energy turbine.

## Related Prior Art

15 Electrical power in public power grids is supplied by diverse energy sources converting mechanical energy into electrical energy. The main energy sources supporting public power grids are coal power plants and nuclear power plants. Several other types of energy sources, in particular power plants of regenerative energy like solar power plants, water power plants or  
20 wind energy turbines, also contribute to support the public power grid.

In the past, in the event of a significant grid voltage drop in a public power grid, it was required that in such an event wind energy turbines are shut down automatically. However, due to the increased number of wind energy  
25 turbines it becomes more and more important that these turbines support the public power grid in the event of a substantial grid voltage drop. However, due to thermal stresses applied to the electronic components of the frequency converter of a generator converting mechanical energy into

- 2 -

electrical energy, increasing the output current of the converter in the event of a grid voltage drop is critical and limited.

Accordingly, it is an object of the present invention to increase the output current of a generator in particular of a wind energy turbine in the event of a substantial grid voltage drop.

### SUMMARY OF THE INVENTION

10 According to the invention there is provided a method for operating a frequency converter of a generator in particular of a wind energy turbine, in the event of a substantial grid voltage drop, wherein the frequency converter includes an AC/DC converter, to be connected to the generator, a DC/AC converter to be connected to the voltage grid, and a DC link circuit  
15 for connecting the AC/DC converter to the DC/AC converter, the method including the step of

- reducing an output voltage of the DC link circuit for increasing an output current of the DC/AC converter and/or
- reducing the operation frequency of electronic switches of the DC/AC  
20 converter for increasing the output current of the DC/AC converter.

The solution proposed by the present invention for solving the above-mentioned object relates to an increase of the current to be supplied into the public power grid in the event of a substantial grid voltage drop.  
25 According to a first aspect of the invention, the increase of the output current of the DC/AC converter, i.e. of the frequency converter, is performed by reducing the output voltage of the DC link circuit of the frequency converter, the output voltage being the operating voltage for the DC/AC converter of the frequency converter. By means of reducing the  
30 output voltage of the DC link circuit it is possible to increase the current flowing through the electronic switches (typically transistors) of the DC/AC converter without increasing the energy losses of the electronic switches

- 3 -

which occur under normal operation conditions of the frequency converter. In particular, the electronic switches includes transistors, (e.g., IGBT modules) as is generally known by those of ordinary skill in the art.

5 According to a second aspect of the present invention, the switching frequency of the electronic switches of the DC/AC converter is reduced resulting in an increase of the output current of the DC/AC converter supplied to the power grid. Also, according to this aspect of the invention, when a substantial grid voltage drop occurs, there are substantially no  
10 changes of the energy losses in the electronic switches which are given under normal operation conditions of the frequency converter.

According to a further aspect of the present invention, the steps described above whereby the output voltage and operating frequency are reduced,  
15 can occur simultaneously.

In another embodiment, the output voltage of the DC link circuit can be reduced by reducing the output voltage of the DC link circuit within the DC link circuit itself, i.e. by activating voltage dividers or the like. Yet another  
20 advantageous approach relates to controlling the time interval for which electronic switches of the AC/DC converter are in their on-state. Namely, depending on the operating state (on or off) of the electronic switches, (typically thyristors), the output voltage of the AC/DC converter can be controlled. The shorter the time interval for the on-state of the electronic  
25 switches of the AC/DC converter is, the lower the output voltage of the AC/DC converter is.

According to another aspect of the present invention, the reducing step described above or at least one of the reducing steps is performed when, for  
30 a short time (msec up to sec), the grid voltage is decreased. The level of voltage decrease for initiating at least one of the reducing steps depends on the design of components. The reducing step or at least one of the reducing

- 4 -

steps is terminated when, for a short time (msec up to sec), the normal grid voltage is increased again up a certain level (near nominal value).

#### BRIEF DESCRIPTION OF THE DRAWINGS

5

A full and enabling disclosure of the present invention, including the best mode thereof, to one of ordinary skill in the art, is set forth more particularly in the remainder of the specification, including reference to the accompanying drawing schematically showing the circuitry of the frequency  
10 converter arranged between a generator and a power grid.

#### DESCRIPTION OF A REFERRED EMBODIMENT

Reference will now be made in detail to the various embodiments of the  
15 invention, one or more examples of which are illustrated in the drawings. Each example is provided by way of explanation of the invention, and is not meant as a limitation of the invention. For example, features illustrated or described as part of one embodiment can be used on or in conjunction with other embodiments to yield yet a further embodiment. It is intended that  
20 the present invention includes such modifications and variations.

In the drawing, the circuitry of a frequency converter 10 as used for providing electrical power to a power grid is shown. The frequency converter is arranged between the output 12 of a generator 14 of a wind energy  
25 turbine (not shown) and the input 16 of a power grid 18.

The frequency converter 10 includes three major stages, namely an input stage, an intermediate stage, and an output stage. The input stage is configured as an AC/DC converter 20, while the output stage includes a  
30 DC/AC converter 22. These two converters 20,22 are connected by the intermediate stage which is configured as a DC link circuit 24.

- 5 -

In this embodiment, the AC/DC converter 20 and the DC/AC converter 22 both typically includes electronic semiconductor power elements. However, other electronic or electrical elements are also possible to be used. In particular, in this embodiment, the AC/DC converter 20 includes six  
5 thyristors 25 controlled by a control unit 26, which in turn is controlled by depending on the current operation parameters of the wind energy turbine and environmental conditions. As an alternative, diodes can be used in place of the thyristors 25. As shown herein, the DC/AC converter 22 includes six transistors 28, which are also controlled by the control unit 26. Various  
10 types of transistors can be used according to the present invention for electrical power converters, such as IGBT modules. As also known by those of ordinary skill in the art, the DC/AC converter 22 includes a filtering device at its output end, which in this embodiment includes three inductors 30.

15 The DC link circuit 24 normally includes at least one filter for the DC link current which can configured as DC link chokes (not shown). Moreover, the DC link circuit includes an electrical energy storage device 32, which can be for example a capacitor bank, a battery, a super-capacitor or the like.

20 Grid voltage drops can be sensed by means of a grid voltage sensor 34 connected to the control unit 26. In a similar manner, the output voltage of the generator 14 can be sensed by a stator voltage sensor 36 also connected to the control unit 26.

25 In the event of a grid voltage drop, it is necessary that the generator 14 of a wind energy turbine is capable of supporting the grid so that the required electrical power is generated and supplied to the grid 18. There are two approaches according to the invention which can be used for increasing the electrical power supplied to the grid in the event of a grid voltage drop. The  
30 first approach according to the present invention relates to the reduction of the output voltage  $V_z$  of the DC link circuit 24, which can be achieved for example by controlling the AC/DC converter 20 accordingly. For doing so,

- 6 -

the thyristors 25 of the AC/DC converter 20 needs to be controlled according to the phase shifts of the stator of the generator 14. Also the frequency of the stator has to be detected or determined. In accordance with these parameters, the control of the thyristors 25 is amended so as to  
 5 reduce the output voltage  $V_z$  of the DC link circuit 24.

Due to the reduction of the output voltage  $V_z$  of the DC link circuit 24, in the event of a grid voltage drop the output current  $I_c$  of the DC/AC converter 22 can be increased without changing the power losses in the transistors 28 so  
 10 that these power losses are substantially left unchanged when compared with the conditions under normal operation.

In the following, an example is given showing an increase of the current in the event of a grid voltage drop.

15

Assuming that under normal conditions, for the frequency converter 10 the following parameters are given. The output voltage  $V_z$  of the DC link circuit 24 is 600 V and the output current  $I_c$  is 1600 A. The allowable temperature of a transistor 28 is 125 °C and the duty cycle of the transistors 28 is 1. The  
 20 energy losses  $E_{on}$  when switching on a transistor 28 is 210 mWs, the energy losses  $E_{off}$  when switching off a transistor 28 is 260 mWs, and the energy losses  $E_{rec}$  during the interval in which a transistor 28 is switched off is 115 mWs. It is to be noted that these parameters are merely examples and that variations are possible accordingly.

25

Assuming further that the switching frequency  $f$  is 2500 1/s, the power losses based on  $E_{on}$ ,  $E_{off}$ , and  $E_{rec}$  as well as the power loss  $P_{sw}$  during the on-state of a transistor 28 are as follows:

$$\begin{aligned}
 30 \quad P_{on} + P_{off} + P_{rec} &= (E_{on} + E_{off} + E_{rec}) * f \\
 &= (0.210 \text{ Ws} + 0.260 \text{ Ws} + 0.115 \text{ Ws}) * 2500 \text{ 1/s} \\
 &= 0.585 \text{ Ws} * 2500 \text{ 1/s}
 \end{aligned}$$

- 7 -

$$= \underline{1462.5 \text{ W}}$$

$$\begin{aligned}
 P_{\text{sw}} &= V_{\text{ce}} * I_{\text{c}} * (\text{on-state interval})/(\text{on} + \text{off state interval}) \\
 &= 2.4 \text{ V} * 1600 \text{ A} * 1/2 \\
 &= \underline{1920 \text{ W}}
 \end{aligned}$$

$$\begin{aligned}
 P &= P_{\text{on}} + P_{\text{off}} + P_{\text{rec}} + P_{\text{sw}} \\
 &= \underline{3382.5 \text{ W}}
 \end{aligned}$$

Assuming further that the output voltage  $V_z$  of the DC link circuit 24 is reduced to 30 % and further assuming that  $P_{\text{on}}$ ,  $P_{\text{off}}$ , and  $P_{\text{rec}}$  are substantially reduced by the same percentage, the overall sum of these power losses is as follows:

$$\begin{aligned}
 P_{\text{on}} + P_{\text{off}} + P_{\text{rec}} &= 1/3 * 1462.5 \text{ W} \\
 &= 487.5 \text{ W} \\
 P &= 1920 \text{ W} + 487.5 \text{ W} = 2407.5 \text{ W}
 \end{aligned}$$

In order to not exceed the power losses as under normal operational condition, the output current  $I_c$  can be increased by approximately about 30 % up to

$$I_c = 2100 \text{ A (for 2407.5 W)}.$$

It is to be noted that the percentage of the increase of the maximum output voltage  $I_c$  is independent from type of transistor 28 used.

Another measure for increasing the output voltage  $I_c$  in the event of an grid voltage drop is to reduce the switching frequency  $f$  for the transistors 28. Namely, when the transistors 28 are switched on for a shorter period of time, when maintaining the current unchanged, the energy losses are

- 8 -

reduced. Accordingly, if the energy losses can be left unchanged, the current can be increased.

In the following an example based on the above-mentioned parameters will  
5 be given for this scenario.

Assuming that the switching frequency  $f$  is reduced from 2500 1/s to 500 1/s, the following equations can be obtained:

$$\begin{aligned}
 10 \quad P_{\text{on}} + P_{\text{off}} + P_{\text{rec}} &= (E_{\text{on}} + E_{\text{off}} + E_{\text{rec}}) * f \\
 &= (0.210 \text{ Ws} + 0.260 \text{ Ws} + 0.115 \text{ Ws}) * 500 \text{ 1/s} \\
 &= 0.585 \text{ Ws} * 500 \text{ 1/s} \\
 &= \underline{292.5 \text{ W}}
 \end{aligned}$$

$$\begin{aligned}
 15 \quad P_{\text{sw}} &= V_{\text{ce}} * I_{\text{c}} * (\text{on-state interval}) / (\text{on} + \text{off state} \\
 &\quad \text{interval}) \\
 &= 2.4 \text{ V} * 1600 \text{ A} * 1/2 \\
 &= \underline{1920 \text{ W}}
 \end{aligned}$$

$$P = 1920 \text{ W} + 292.5 \text{ W} = 2212.5 \text{ W}$$

20

Therefore, for obtaining the same overall power losses as in the event of normal operation, the output current  $I_{\text{c}}$  can be increased up to

$$I_{\text{c}} = 2200 \text{ A (for 2212.5 W)}.$$

25

Although the invention has been described and illustrated with reference to specific illustrative embodiments thereof, it is not intended that the invention be limited to those illustrative embodiments. Those skilled in the art will recognise that variations and modifications can be made without  
30 departing from the true scope of the invention as defined by the claims that follow. It is therefore intended to include within the invention all such

variations and modifications as fall within the scope of the appended claims and equivalents thereof.


**CLAIMS**

1. Method for operating a frequency converter of a generator in particular of a wind energy turbine, in the event of a substantial grid voltage drop, wherein the frequency converter (10) comprises an AC/DC converter (20), to be connected to the generator (14), a DC/AC converter (22) to be connected to the voltage grid (18), and a DC link circuit (24) for connecting the AC/DC converter (20) to the DC/AC converter (22), the method comprising the step of
  - reducing an output voltage of the DC link circuit (24) for increasing an output current of the DC/AC converter (22) and/or
  - reducing the operation frequency of electronic switches (28) of the DC/AC converter (22) for increasing the output current of the DC/AC converter (22).
2. Method according to claim 1, wherein the reducing step or at least one of the reducing steps is performed when, for a few seconds, the grid voltage is decreased up to at least about 10 % of its normal value and wherein the reducing step of at least one of the reducing steps is terminated when, for a few seconds, the normal grid voltage is increased again up to at least about 80 % of its normal value.
3. Method according to claim 1, wherein the reducing step or at least one of the reducing steps is performed when, for a few seconds, the grid voltage is decreased up to at least about 20 % of its normal value and wherein the reducing step of at least one of the reducing steps is terminated when, for a few seconds, the normal grid voltage is increased again up to at least about 90 % of its normal value.
4. Method according to any one of claims 1 to 3, wherein the step of reducing the output voltage of the DC link circuit (24) comprises controlling the time interval between a crossover of the output voltage

- 11 -

of a phase of the generator (14) and an operation of an electronic switch (25) of the AC/DC converter (20).

5. Method according to any one of claims 1 to 3, wherein the step of reducing the output voltage of the DC link circuit (24) comprises reducing the pulse width interval of the electronic switch (25) of the AC/DC converter (20).
6. Method according to any one of claims 1 to 5, wherein the reduction of the output voltage of the DC link circuit (24) and/or the reduction of the operational frequency of the DC/AC converter (22) is/are performed such that an increased current flows without a substantial change of the energy losses in the electronic switches (28) of the DC/AC converter (22).

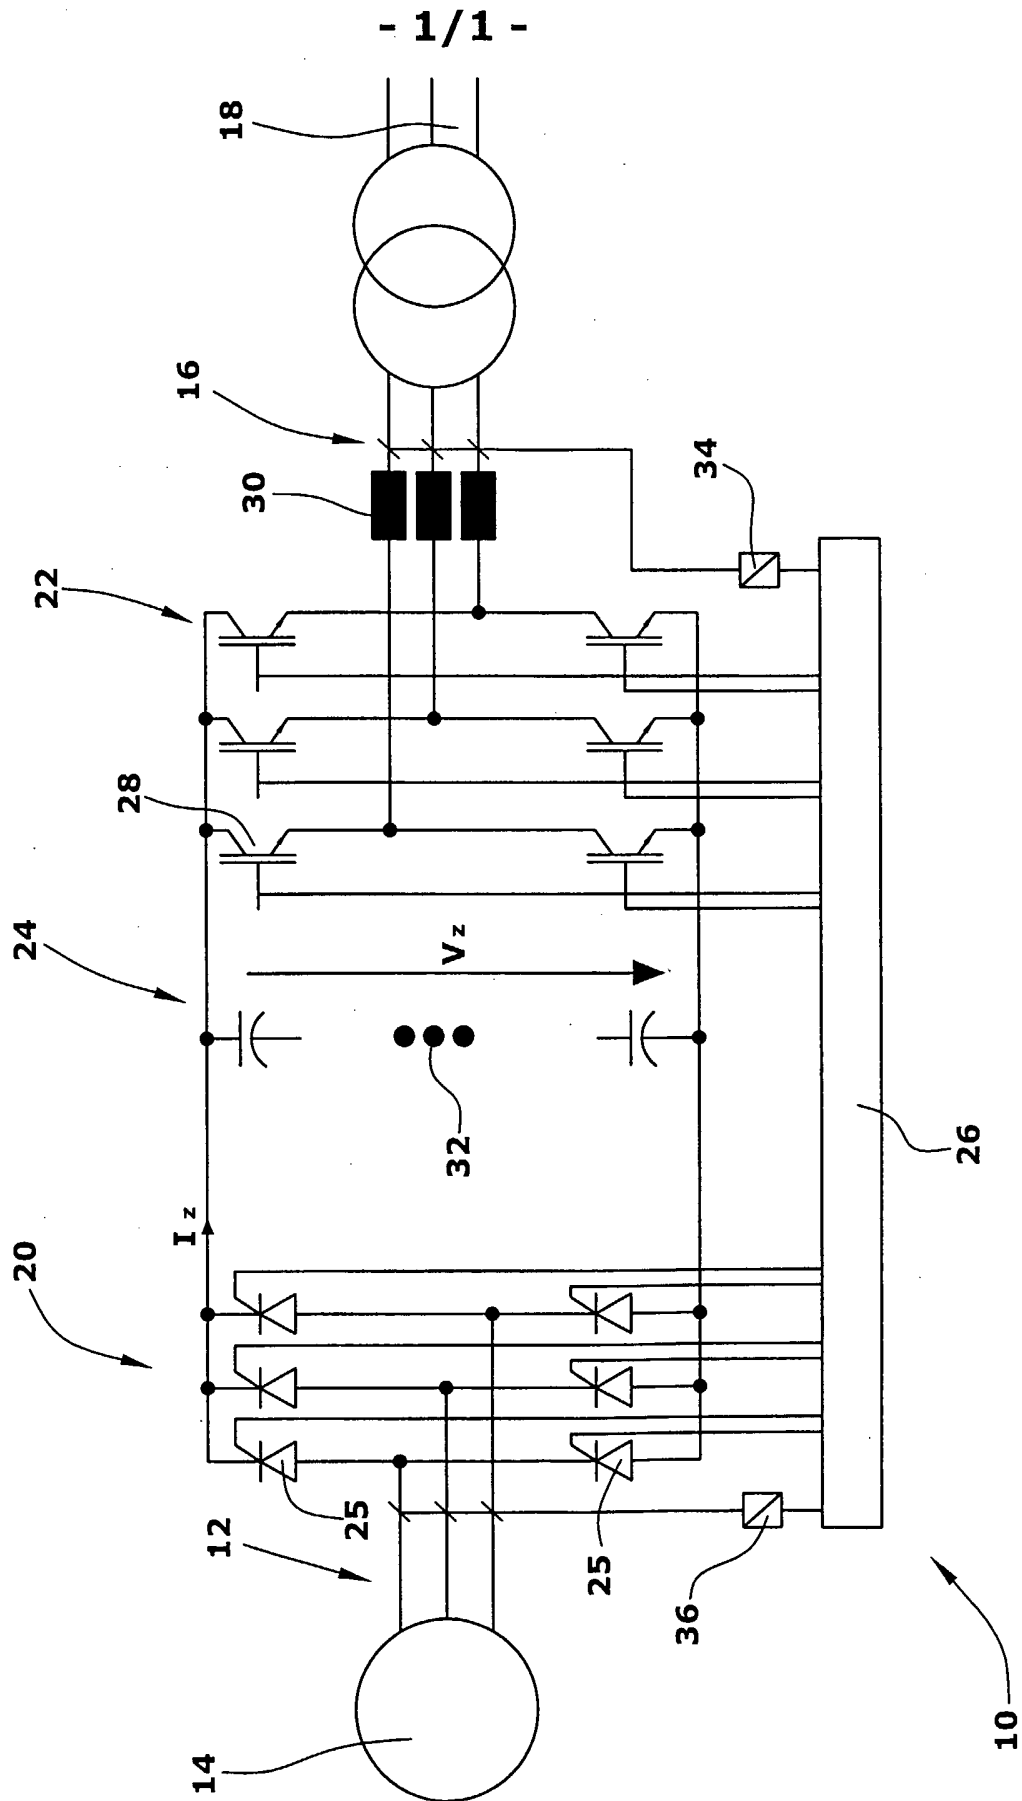

**INTERNATIONAL SEARCH REPORT**

International Application No  
PCT/EP 03/10269

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC 7 H02J3/12 H02J3/18 H02M5/44

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H02J H02M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, IBM-TDB

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2003/126060 A1 (LOF PER-ANDERS KRISTIAN ET AL) 3 July 2003 (2003-07-03) abstract figure 1	1-6
Y	BLAABJERG F ET AL: "Power losses in PWM-VSI inverter using NPT or PT IGBT devices" POWER ELECTRONICS SPECIALISTS CONFERENCE, PESC '94 RECORD., 25TH ANNUAL IEEE TAIPEI, TAIWAN 20-25 JUNE 1994, NEW YORK, NY, USA, IEEE, 20 June 1994 (1994-06-20), pages 434-441, XP010549405 ISBN: 0-7803-1859-5 page 435 -page 436, left-hand column -/--	1-6

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

17 June 2004

Date of mailing of the international search report

05/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Zettler, K-R

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 03/10269

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	BENNO JÄCKLI: "Energiesparen mit Frequenzumrichter" INTERNET ARTICLE, 'Online! 2 December 1996 (1996-12-02), XP002284829 Retrieved from the Internet: <URL:http://www.energie.ch/themen/industrie/fr/> 'retrieved on 2004-06-15! page 4-5 ---	1-6
Y	BIRD/KING/PEDDER: "An Introduction to Power Electronics" 1993, JOHN WILEY & SONS, CHICHESTER, NEW YORK, BRISBANE, TORONTO, SINGAPORE XP002284830 2 ISBN: 0 471 92616 7 page 85-86; figures 2.41,2.42 ---	4,5
A	DE 100 10 350 A (SETEC ELEKTRONISCHE ANTRIEBSRE) 13 September 2001 (2001-09-13) the whole document ---	1
A	BERRINGER K ET AL: "Semiconductor power losses in AC inverters" 8 October 1995 (1995-10-08), INDUSTRY APPLICATIONS CONFERENCE, 1995. THIRTIETH IAS ANNUAL MEETING, IAS '95., CONFERENCE RECORD OF THE 1995 IEEE ORLANDO, FL, USA 8-12 OCT. 1995, NEW YORK, NY, USA, IEEE, US, PAGE(S) 882-888 XP010193037 ISBN: 0-7803-3008-0 abstract page 885, right-hand column -page 886, right-hand column -----	1

**INTERNATIONAL SEARCH REPORT**

International Application No  
 PCT/EP 03/10269

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003126060 A1	03-07-2003	US 2002087234 A1	04-07-2002
		US 2002084655 A1	04-07-2002
		EP 1346452 A1	24-09-2003
		WO 02054561 A2	11-07-2002
		US 2003006613 A1	09-01-2003
		US 2002103745 A1	01-08-2002
-----			
DE 10010350 A	13-09-2001	DE 10010350 A1	13-09-2001
-----			