


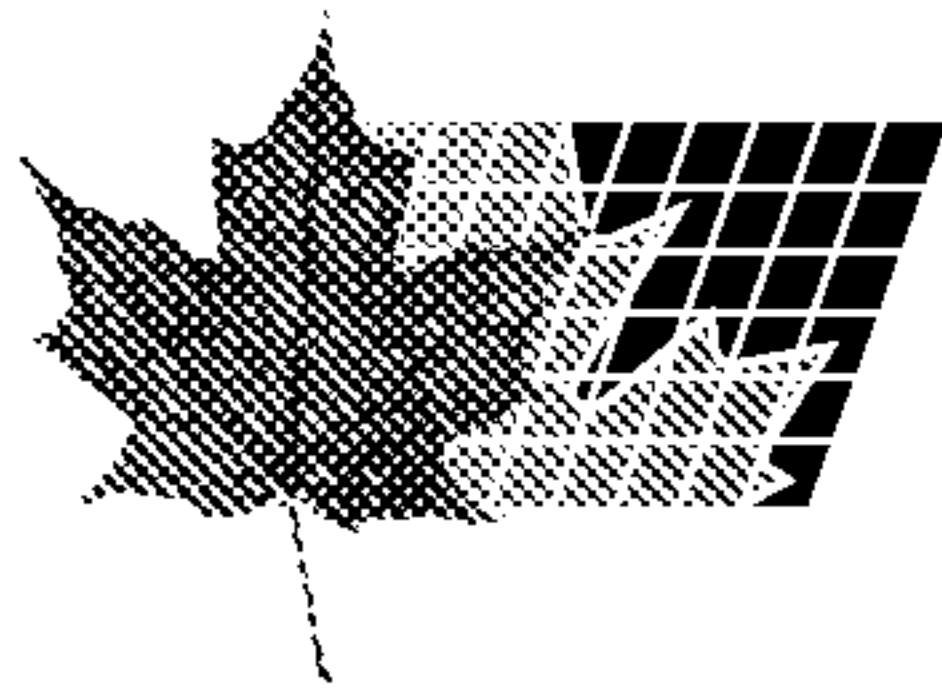


(72) IMS, Horst Otto Herbert, CA

(71) IMS, Horst Otto Herbert, CA

(51) Int.Cl.⁶ B60C 7/14

(54) **PNEUS NON PNEUMATIQUES AMELIORES**

(54) **IMPROVEMENTS IN THE NON PNEUMATIC TIRES**

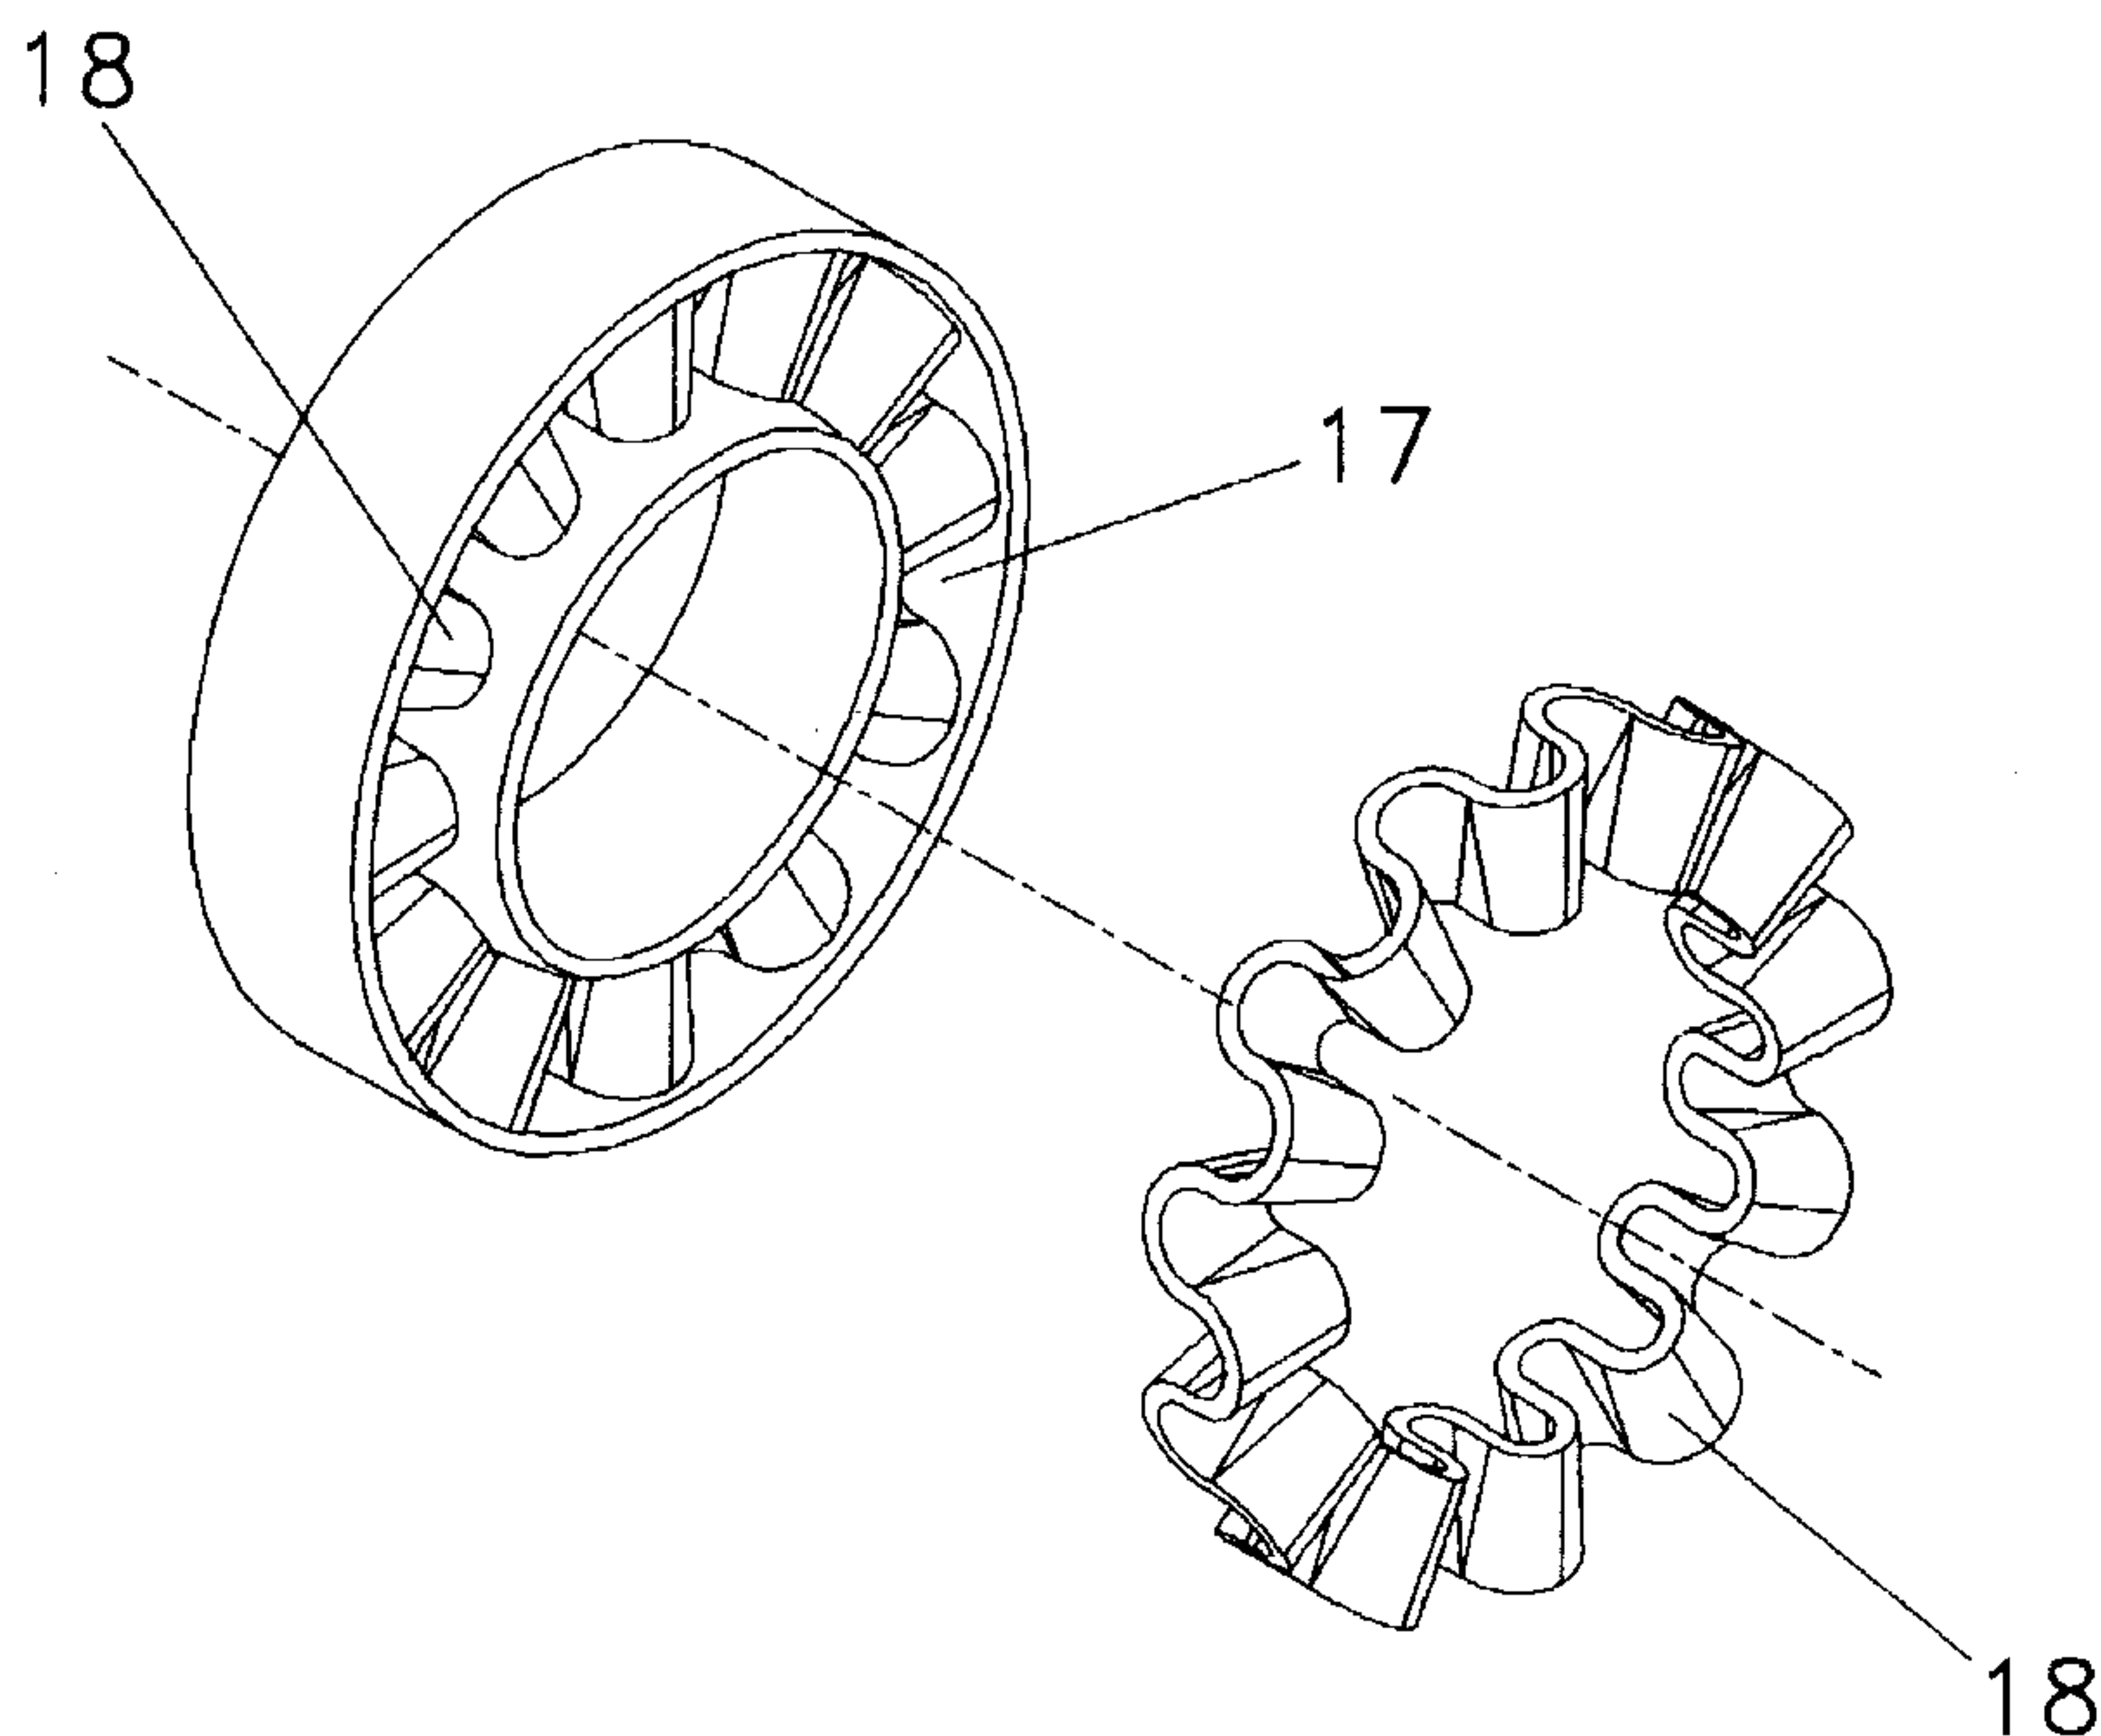

(57) A new class of non pneumatic tires is proposed, comprising and exterior torus and an interior torus and in the space between them a waveform undulating ribbon like structure having a constant wavelenght and the undulating direction being perpendicular on the plane of rotation of the tire, an example of this class of non pneumatic tires being that where the undulations are in form of a succesion of semicircular modules alternating one after another in the space between the two toruses;the new class of non pneumatic tires has a superior capability for fatigue and load compared with the prior art.

ABSTRACT

A new class of non pneumatic tires is proposed , comprising and exterior torus and an interior torus and in the space between them a waveform undulating ribbon like structure having a constant wavelenght and the undulating direction being perpendicular on the
5 plane of rotation of the tire, an example of this class of non pneumatic tires being that where the undulations are in form of a succesion of semicircular modules alternating one after another in the space between the two toruses;the new class of non pneumatic tires has a superior capability for fatigue and load compared with the prior art.

IMPROVEMENTS IN THE NON PNEUMATIC TIRES

BACKGROUND OF THE INVENTION

1.Field of the invention

This invention relates to the field of so called non pneumatic tires .More
5 particularly ,this invention relates to a class of wheels involving an outer and inner rings
and a space between them where some flexing structures are provided .The said flexing
structures being in form of web like objects able to flex under the load and providing an
equivalent of the pneumatic tire behaviour .

This class of wheels including the “non-pneumatic”term was started by pioneers
10 like Long at Goodyear in late seventies and Palinkas,Hybokken,Ims,Pajtas at Uniroyal in
late eighties and is believed to play a significant role in the future of wheel technology .All
these pioneers dedicated their life to the rubber and polyurethane wheel applications and
Horst Ims worked at Pennemunde as a mechanical engineer later specialising in polymer
technology.

15 2.Prior Art

The prior art is described in the Long&Rye Palinkas,Hybokken ,Pajtas patents and
essentially is based on a central web in form of a ring/disk placed symmetrically in the
space between the outer and inner annular rings of the wheel. Essentially this disk is the

main load carrying object of the wheel .

The concept of two annular rings with a space between them making the basic structure of the wheel was probably first time presented by Long and Rye in US patent 4226273. The space between the said rings was occupied by some flexing structures
5 anticipating the later work of Palinkas and all.

Coming back to the closest prior art (Palinkas and all) this load carrying ring/disk is reinforced or supported laterally on each side by inclined webs so that when the load is applied they can flex and by this simulating the effect of a pneumatic tire.

When rolling the structure formed of the central web and the lateral webs are
10 flexing under load . The central web has a buckling type of flexing and the lateral webs they simply bend.

The tests proved in time that the stress spectra generated in the central and lateral web structure has peaks in the area connecting the central disk with the inner surface of the outer annular ring (the rim) of the wheel.

15 The cyclic nature of the stress combined with the magnitude of it generated a combined effect of either heat or fatigue or combination of these depending of the load and the time the wheel was used.

Even at normal loads -in the case of spare tire application- after a certain number of cycles the area where the central disk is united with the rim overheated reaching
20 temperatures in excess of 120 to 150 degrees Celsius and simply the material melted and affected area between the rolling rim and the web structure ending in failure of the wheel. A combination of hysteresis and low heat dissipation capability inherent to polymers

created the failure conditions. In the case of polyurethane this was even more dangerous because the polyurethane melts when reaches a certain temperature.

This initial class of non pneumatic tires had a lot of hope to use the flexing effect and to eliminate the hysteresis melting typical for the solid tires. In that case the only wear
5 expected from the tire was supposed to be the outer lining involved directly in the rolling contact-which was a wear based on abrasion mainly, Velcro effect and flakes generated by Hertz/Palmgren effect. However this was not happened the stumbling block being the generation of the hot areas which produced the failure of the wheel.

The heating effect was also generated by the fact that, the outer rim was softer
10 than the web flexing/supporting structure so the deformation and the shearing and compression stress structure was different for the two material resulting in stressing the bonding area and also the structural connection between the central disk/web and the annular outer element.

It is an object of this invention to provide a flexing supporting structure between
15 the inner and outer rings of the non pneumatic tire to reduce the stress and heat generated by hysteresis so that the wheel to be used safely in high speed and safety applications-the only wear expected being the one associated strictly with the outside surface of the wheel.

It is yet a further object of this invention to provide a wheel with increased load capacity .

20 It is a still further object of this invention to provide a wheel easier to manufacture than those in the prior art.

SUMMARY OF THE INVENTION

The foregoing and other objects are achieved by this invention by the fact that is involving/comprising the following:

- an exterior torus having an inside diameter and an exterior diameter and having a thickness and having a width and having an inside and an outside surface;
- 5 -an interior torus having an inside diameter and an exterior diameter and having a thickness and having a width and having an inside and an outside surface;
- the interior and the exterior toruses being placed in such a way that they share the same centre of gravity and the same axis of rotation/symmetry;
- the interior torus having the outside diameter smaller than the exterior diameter of
10 the exterior torus;
- in the space between the exterior Torus and the interior torus being a waving, undulating waveform structure comprising the following and defined as follows:
 - on the outer surface of the inner torus being a median circle resulted from the intersection of a plane perpendicular on the axis of rotation of the inner torus, with the
15 outer surface of the inner torus, and passing through the centre of gravity of the inner torus;
 - in relation with the medial circle and contained on the outer surface of the inner torus a waveform curve having amplitude and wavelength is generated as follows:
 - the wavelength is defined along the circumference of the median circle and the
20 amplitude variation being defined perpendicularly on the median circle plane and the said waveform curve has a constant wavelength and the number of wavelengths contained in the median circle is an integer;

-the areas contained between the waveform curve and the median circle associated with the half of the wavelength being constant and symmetric/ equal with each other and being identic in terms of profile and form as well as the areas associated with the quarters of wavelength being also constant and symmetric/equal with each other and being identic
5 in terms of profile and form;

-therefore on the outer surface of the inner torus we have along the median circle as a circular axis a symmetric/regular oscillating curve with constant wavelength and amplitude, the number of wavelengths contained in the median circle being an integer;

-a generating profile defined as follows:

10 -a plane perpendicular on the waveform curve, therefore intersecting the waveform curve in only one point, the perpendicular plane intersecting the inner surface of the outside torus and the outer surface of the inner torus;

-whereby from the intersecting resulting intersection curves on the inner surface of the exterior torus and the outer surface of the interior torus, these intersection curves ,
15 depending of the position of the perpendicular plane could be either straight lines or slightly curved lines;

-on each line of intersection between the perpendicular plane and the inner surface of the outer torus and the outer surface of the inner torus are selected 2 points,

-the points from the inner surface of the outer torus are united with the points from
20 the outer surface of the inner torus, by uniting curves contained in the perpendicular plane in such a way that these uniting curves are not intersecting each other and they are contained in the space between the toruses, in such a way that the four points ,the uniting

curves and the intersecting lines are defining a closed plane surface or profile having at the top and bottom the intersecting lines of the perpendicular plane with the inner surface of the exterior torus and with the outer surface of the interior torus and on the sides the said uniting curves contained in the perpendicular plane;

5 -the closed plane surface/profile defined as above being hereinafter named the generating closed surface/contouring/profile;

 -it is important to remember that the generating closed surface/contouring/profile is contained in the perpendicular plane therefore is all the time perpendicular on the wave form curve, the upper and lower lines varying depending on the intersection with the
10 toruses surfaces;

 -the generating process is started from a starting point which can be any point on the wave form curve but for the ease of understanding it is supposed to start from a point where the wave form curve is intersecting the median circle;

 -the surface/solid generating process is done by ,moving the generating closed
15 surface/contouring /profile along the wave form curve respecting the above conditions , the uniting curves describing/contouring the surface structure of the said wave form undulating structure between the toruses;

 -whereby the toruses, the waveform undulating structure being unitized/rigidized together by casting or any other known approach, forming a toroidal elastic structure
20 having an inner diameter, which is the inner diameter of the interior torus and an outside diameter which is the outside diameter of the exterior torus;

-whereby the toroidal elastic structure having on the outside applied a rim for rolling and at the inside a hub by this the assembly made of the toroidal elastic structure and the rim and hub becoming a wheel ;

-in a simpler case , the wave form curve on the outer surface of the inner torus

5 being defined as follows:

-a curve in form of a semicircle called semicircle module having a beginning and an end these being diametrically opposed;

-the inner torus being cut with a plane containing its axis of symmetry ; the inner torus then is unfolded and on the unfolded outer surface and in reference with the median
10 circle above defined and also unfolded , a wave form curve is traced characterized by the fact that is formed of a succession of semicircle modules all having the same radius ;

-therefore if the wave form curve is starting from a point on the median circle, there we have placed the first semicircle module with the beginning in the starting point and the end diametrically opposed but on the median circle unfolded ,and after this another
15 semicircle module but rotated accordingly to permit a continuation of the waveform curve; so the wave form curve is a continuous unicursal succession of semicircle modules;

-then the unfolded torus with the waveform curve as described above is brought back to toroidal form ,in this way having the wave form curve defined on the outer surface of the inner torus;

20 -a contouring profile is defined as above except the fact that the uniting curves are straight lines intersecting with the axis of symmetry /rotation of the toruses therefore all the time perpendicular on the outer surface of the inner torus and on the inner surface of

the exterior torus;

-whereby the straight lines as defined above are equally distanced from the wave form curve on the inner surface of the inner torus;

-whereby at the areas of intersection of the waveform structure and the inner
5 /outer surfaces of the toruses there are provided appropriate fillets to reduce the concentration stresses;

-whereby the wave like structure has a width which is twice the amplitude of the wave which is less than the width of the toruses;

The above described non pneumatic tire has the advantage of using the buckling
10 capacity of curved or circular cylindrical structures as opposed the vertical web like as in the prior art. This is increasing the wheel capacity and reduces the stresses and eliminates the heat generation in the dangerous areas. The tests made by the author proved an improved performance on terms of load/speed and fatigue substantially higher than the prior art solutions. The tests made by the author suggests that this new class of non
15 pneumatic tires could have substantial application in areas where safety and long term operation is important.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects, features and advantages of the invention will be better understood by reading the following detailed description in conjunction with the attached
20 drawings, in which:

FIG. 1 is a representation of the exterior/interior torus structure;

FIG. 2 Is a representation of the torus together with the wave form undulating

structure according with the invention;

FIG. 3 is representing the concept of the median circle;

FIG. 4 is representing the waveform curve on the outer surface of the inner torus;

FIG. 5 is representing the generating/contouring profile;

5 FIG. 6 is representing the process of generating the surface of the wave form structure;

FIG. 7 is representing the non pneumatic wheel assembly according with the invention;

FIG. 8 is representing the defining a simpler profile based on semicircular modules;

10 FIG. 9 is representing the generating process of the simpler variant;

FIG.10 is a 3D illustration of a wave form undulating structure/ribbon.

DETAILED DESCRIPTION OF THE DRAWINGS

Below is given a illustration of the invention in relation with the Figures 1,2,3,4,5,6,7,8,9 and 10, describing a non pneumatic tire involving/comprising the following:

15 -an exterior torus 1 having an inside diameter 2 and an exterior diameter 3 and having a thickness 4 and having a width 5 and having an inside 6 and an outside surface 7;

-an interior torus 8 having an inside diameter 9 and an exterior diameter 10 and having a thickness 11 and having a width 12 and having an inside 13 and an outside
20 surface 14;

-the interior and the exterior toruses being placed in such a way that they share the same centre of gravity 15 and the same axis of rotation/symmetry 16;

-the interior torus having the outside diameter smaller than the exterior diameter of the exterior torus;

-in the space 17 between the exterior torus and the interior torus being a waving, undulating waveform structure 18 comprising the following and defined as follows:

5 -on the outer surface of the inner torus being a median circle 19 resulted from the intersection of a plane 20 perpendicular on the axis of rotation of the inner torus 16, with the outer surface of the inner torus, and passing through the centre of gravity 21 of the inner torus;

10 -in relation with the median circle and contained on the outer surface 14 of the inner torus 8 a waveform curve 22 having amplitude and wavelength is generated as follows:

15 -the wavelength 23 is defined along the circumference of the median circle 19 and the amplitude variation 24 being defined perpendicularly on the median circle plane and the said waveform curve has a constant wavelength and the number of wavelengths contained in the median circle is an integer;

20 -the areas 25 contained between the waveform curve and the median circle associated with the half of the wavelength 26 being constant and symmetric/ equal with each other and being identical in terms of profile and form as well as the areas 27 associated with the quarters of wavelength 28 being also constant and symmetrical/equal with each other and being identic in terms of profile and form;

 -therefore on the outer surface of the inner torus we have along the median circle as a circular axis a symmetrical/regular oscillating curve with constant wavelength and

amplitude, the number of wavelengths contained in the median circle being an integer;

-a generating profile defined as follows:

-a plane 29 perpendicular on the waveform curve, therefore intersecting the waveform curve in only one point 30, the perpendicular plane intersecting the inner

5 surface of the outside torus and the outer surface 14 of the inner torus;

-whereby from the intersecting resulting intersection curves 31 on the inner surface 17 of the exterior torus and the outer surface 14 of the interior torus, these intersection curves, depending of the position of the perpendicular plane could be either straight lines or slightly curved lines;

10 -on each line of intersection between the perpendicular plane and the inner surface of the outer torus and the outer surface of the inner torus are selected 2 points 32;

-the points 33 from the inner surface of the outer torus are united with the points 34 from the outer surface of the inner torus, by uniting curves 34a contained in the perpendicular plane in such a way that these uniting curves are not intersecting each other

15 and they are

contained in the space between the toruses, in such a way that the four points, the uniting curves and the intersecting lines are defining a closed plane surface 35 or profile "abcd" having at the top and bottom the intersecting lines of the perpendicular plane with the inner surface of the exterior torus and with the outer surface of the interior torus and on

20 the sides the said uniting curves contained in the perpendicular plane;

-the closed plane surface/profile defined as above being hereinafter named the generating closed surface/contouring/profile;

-it is important to remember that the generating closed surface/contouring/profile is contained in the perpendicular plane 29 therefore is all the time perpendicular on the wave form curve, the upper and lower lines varying depending on the intersection with the toruses surfaces;

5 -the generating process is started from a starting point which can be any point on the wave form curve but for the ease of understanding it is supposed to start from a point 36 where the wave form curve is intersecting the median circle;

 -the surface/solid generating process is done by ,moving the generating closed surface/contouring /profile 35 along the wave form curve respecting the above conditions
10 , the uniting curves describing/contouring the surface structure of the said wave form undulating structure between the toruses;

 -whereby the toruses, the waveform undulating structure being unitized/rigidized together by casting or any other known approach, forming a toroidal elastic structure 37 having an inner diameter 38, which is the inner diameter of the interior torus and an
15 outside diameter 39 which is the outside diameter of the exterior torus;

 -whereby the toroidal elastic structure having on the outside applied a rim 39 for rolling and at the inside a hub 40 by this the assembly made of the toroidal elastic structure and the rim and hub becoming a wheel ;

 -in a simpler case , the wave form curve on the outer surface of the inner torus
20 being defined as follows:

 -a curve 41 in form of a semicircle 42 called semicircle module having a beginning

43 and an end 44 these being diametrically opposed;

-the inner torus being cut with a plane 45 containing its axis of symmetry 16 ; the inner torus then is unfolded 46 and on the unfolded outer surface 47 and in reference with the median circle 19 above defined and also unfolded , a wave form curve is traced

5 characterized by the fact that is formed of a succession of semicircle modules 42 all having the same radius ;

-therefore if the wave form curve is starting from a point 48 on the median circle, there we have placed the first semicircle module 49 with the beginning in the starting point and the end diametrically opposed but on the median circle unfolded ,and after this another

10 semicircle module 50 but rotated accordingly to permit a continuation of the waveform curve; so the wave form curve is a continuous unicursal succession of semicircle modules;

-then the unfolded torus with the waveform curve as described above is brought back to toroidal form 51 ,in this way having the wave form curve defined on the outer surface 14 of the inner torus 8;

15 -a contouring profile is defined as above except the fact that the uniting curves are straight lines 53 intersecting with the axis of symmetry /rotation of the toruses therefore all the time perpendicular on the outer surface of the inner torus and on the inner surface of the exterior torus;

-whereby the straight lines as defined above are equally distanced 54 from the
20 wave form curve on the inner surface of the inner torus;

-whereby at the areas of intersection of the waveform structure and the inner /outer surfaces of the toruses there are provided appropriate fillets to reduce the

concentration stresses;

-whereby the wave like structure has a width which is twice the amplitude of the wave which is less than the width of the toruses;

The main advantage of the application of this invention is the fact that the
5 proposed class of non pneumatic tire is using the full advantage of the curved or circular bodies to sustain bigger buckling forces than the web like bodies of the same volume.

CLAIMS

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR/AND PRIVILEGE UNDER THE LAWS IS CLAIMED ARE
DEFINED AS FOLLOWS:**

- 5 1. A class of non pneumatic tires characterized by the fact that involves/comprises the
following:
- an exterior torus having an inside diameter and an exterior diameter and having a
thickness and having a width and having an inside and an outside surface;
 - an interior torus having an inside diameter and an exterior diameter and having a
10 thickness and having a width and having an inside and an outside surface;
 - the interior and the exterior toruses being placed in such a way that they share the
same centre of gravity and the same axis of rotation/symmetry;
 - the interior torus having the outside diameter smaller than the exterior diameter of
the exterior torus;
 - 15 -in the space between the exterior Torus and the interior torus being a waving,

undulating waveform structure comprising the following and defined as follows:

-on the outer surface of the inner torus being a median circle resulted from the intersection of a plane perpendicular on the axis of rotation of the inner torus, with the outer surface of the inner torus, and passing through the centre of gravity of the inner
5 torus;

-in relation with the medial circle and contained on the outer surface of the inner torus a waveform curve having amplitude and wavelength is generated as follows:

-the wavelength is defined along the circumference of the median circle and the amplitude variation being defined perpendicularly on the median circle plane and the said
10 waveform curve has a constant wavelength and the number of wavelengths contained in the median circle is an integer;

-the areas contained between the waveform curve and the median circle associated with the half of the wavelength being constant and symmetric/ equal with each other and being identic in terms of profile and form as well as the areas associated with the quarters
15 of wavelength being also constant and symmetric/equal with each other and being identic in terms of profile and form;

-therefore on the outer surface of the inner torus we have along the median circle as a circular axis a symmetric/regular oscillating curve with constant wavelength and amplitude, the number of wavelengths contained in the median circle being an integer;

20 -a generating profile defined as follows:

-a plane perpendicular on the waveform curve, therefore intersecting the waveform curve in only one point, the perpendicular plane intersecting the inner surface of the

outside torus and the outer surface of the inner torus;

-whereby from the intersecting resulting intersection curves on the inner surface of the exterior torus and the outer surface of the interior torus, these intersection curves, depending of the position of the perpendicular plane could be either straight lines or
5 slightly curved lines;

-on each line of intersection between the perpendicular plane and the inner surface of the outer torus and the outer surface of the inner torus are selected 2 points,

-the points from the inner surface of the outer torus are united with the points from the outer surface of the inner torus, by uniting curves contained in the perpendicular plane
10 in such a way that these uniting curves are not intersecting each other and they are contained in the space between the toruses, in such a way that the four points, the uniting curves and the intersecting lines are defining a closed plane surface or profile having at the top and bottom the intersecting lines of the perpendicular plane with the inner surface of the exterior torus and with the outer surface of the interior torus and on the sides the said
15 uniting curves contained in the perpendicular plane;

-the closed plane surface/profile defined as above being hereinafter named the generating closed surface/contouring/profile;

-it is important to remember that the generating closed surface/contouring/profile is contained in the perpendicular plane therefore is all the time perpendicular on the wave
20 form curve, the upper and lower lines varying depending on the intersection with the toruses surfaces;

-the generating process is started from a starting point which can be any point on

the wave form curve but for the ease of understanding it is supposed to start from a point where the wave form curve is intersecting the median circle;

-the surface/solid generating process is done by ,moving the generating closed surface/contouring /profile along the wave form curve respecting the above conditions ,
5 the uniting curves describing/contouring the surface structure of the said wave form undulating structure between the toruses;

-whereby the toruses, the waveform undulating structure being unitized/rigidized together by casting or any other known approach, forming a toroidal elastic structure having an inner diameter, which is the inner diameter of the interior torus and an outside
10 diameter which is the outside diameter of the exterior torus;

-whereby the toroidal elastic structure having on the outside applied a rim for rolling and at the inside a hub by this the assembly made of the toroidal elastic structure and the rim and hub becoming a wheel ;

2. A class of non pneumatic tires as in the claim 1 characterized by the fact that the wave
15 form curve on the outer surface of the inner torus being defined as follows:

-a curve in form of a semicircle called semicircle module having a beginning and an end these being diametrically opposed;

-the inner torus being cut with a plane containing its axis of symmetry ; the inner torus then is unfolded and on the unfolded outer surface and in reference with the median
20 circle above defined and also unfolded , a wave form curve is traced characterized by the fact that is formed of a succession of semicircle modules all having the same radius ;

-therefore if the wave form curve is starting from a point on the median circle, there we have placed the first semicircle module with the beginning in the starting point and the end diametrically opposed but on the median circle unfolded ,and after this another semicircle module but rotated accordingly to permit a continuation of the waveform curve;

5 so the wave form curve is a continuous unicursal succession of semicircle modules;

-then the unfolded torus with the waveform curve as described above is brought back to toroidal form ,in this way having the wave form curve defined on the outer surface of the inner torus;

-a contouring profile is defined as above except the fact that the uniting curves are
10 straight lines intersecting with the axis of symmetry /rotation of the toruses therefore all the time perpendicular on the outer surface of the inner torus and on the inner surface of the exterior torus;

-whereby the straight lines as defined above are equally distanced from the wave form curve on the inner surface of the inner torus;

15 -whereby at the areas of intersection of the waveform structure and the inner /outer surfaces of the toruses there are provided appropriate fillets to reduce the concentration stresses;

-whereby the wave like structure has a width which is twice the amplitude of the wave which is less than the width of the toruses;

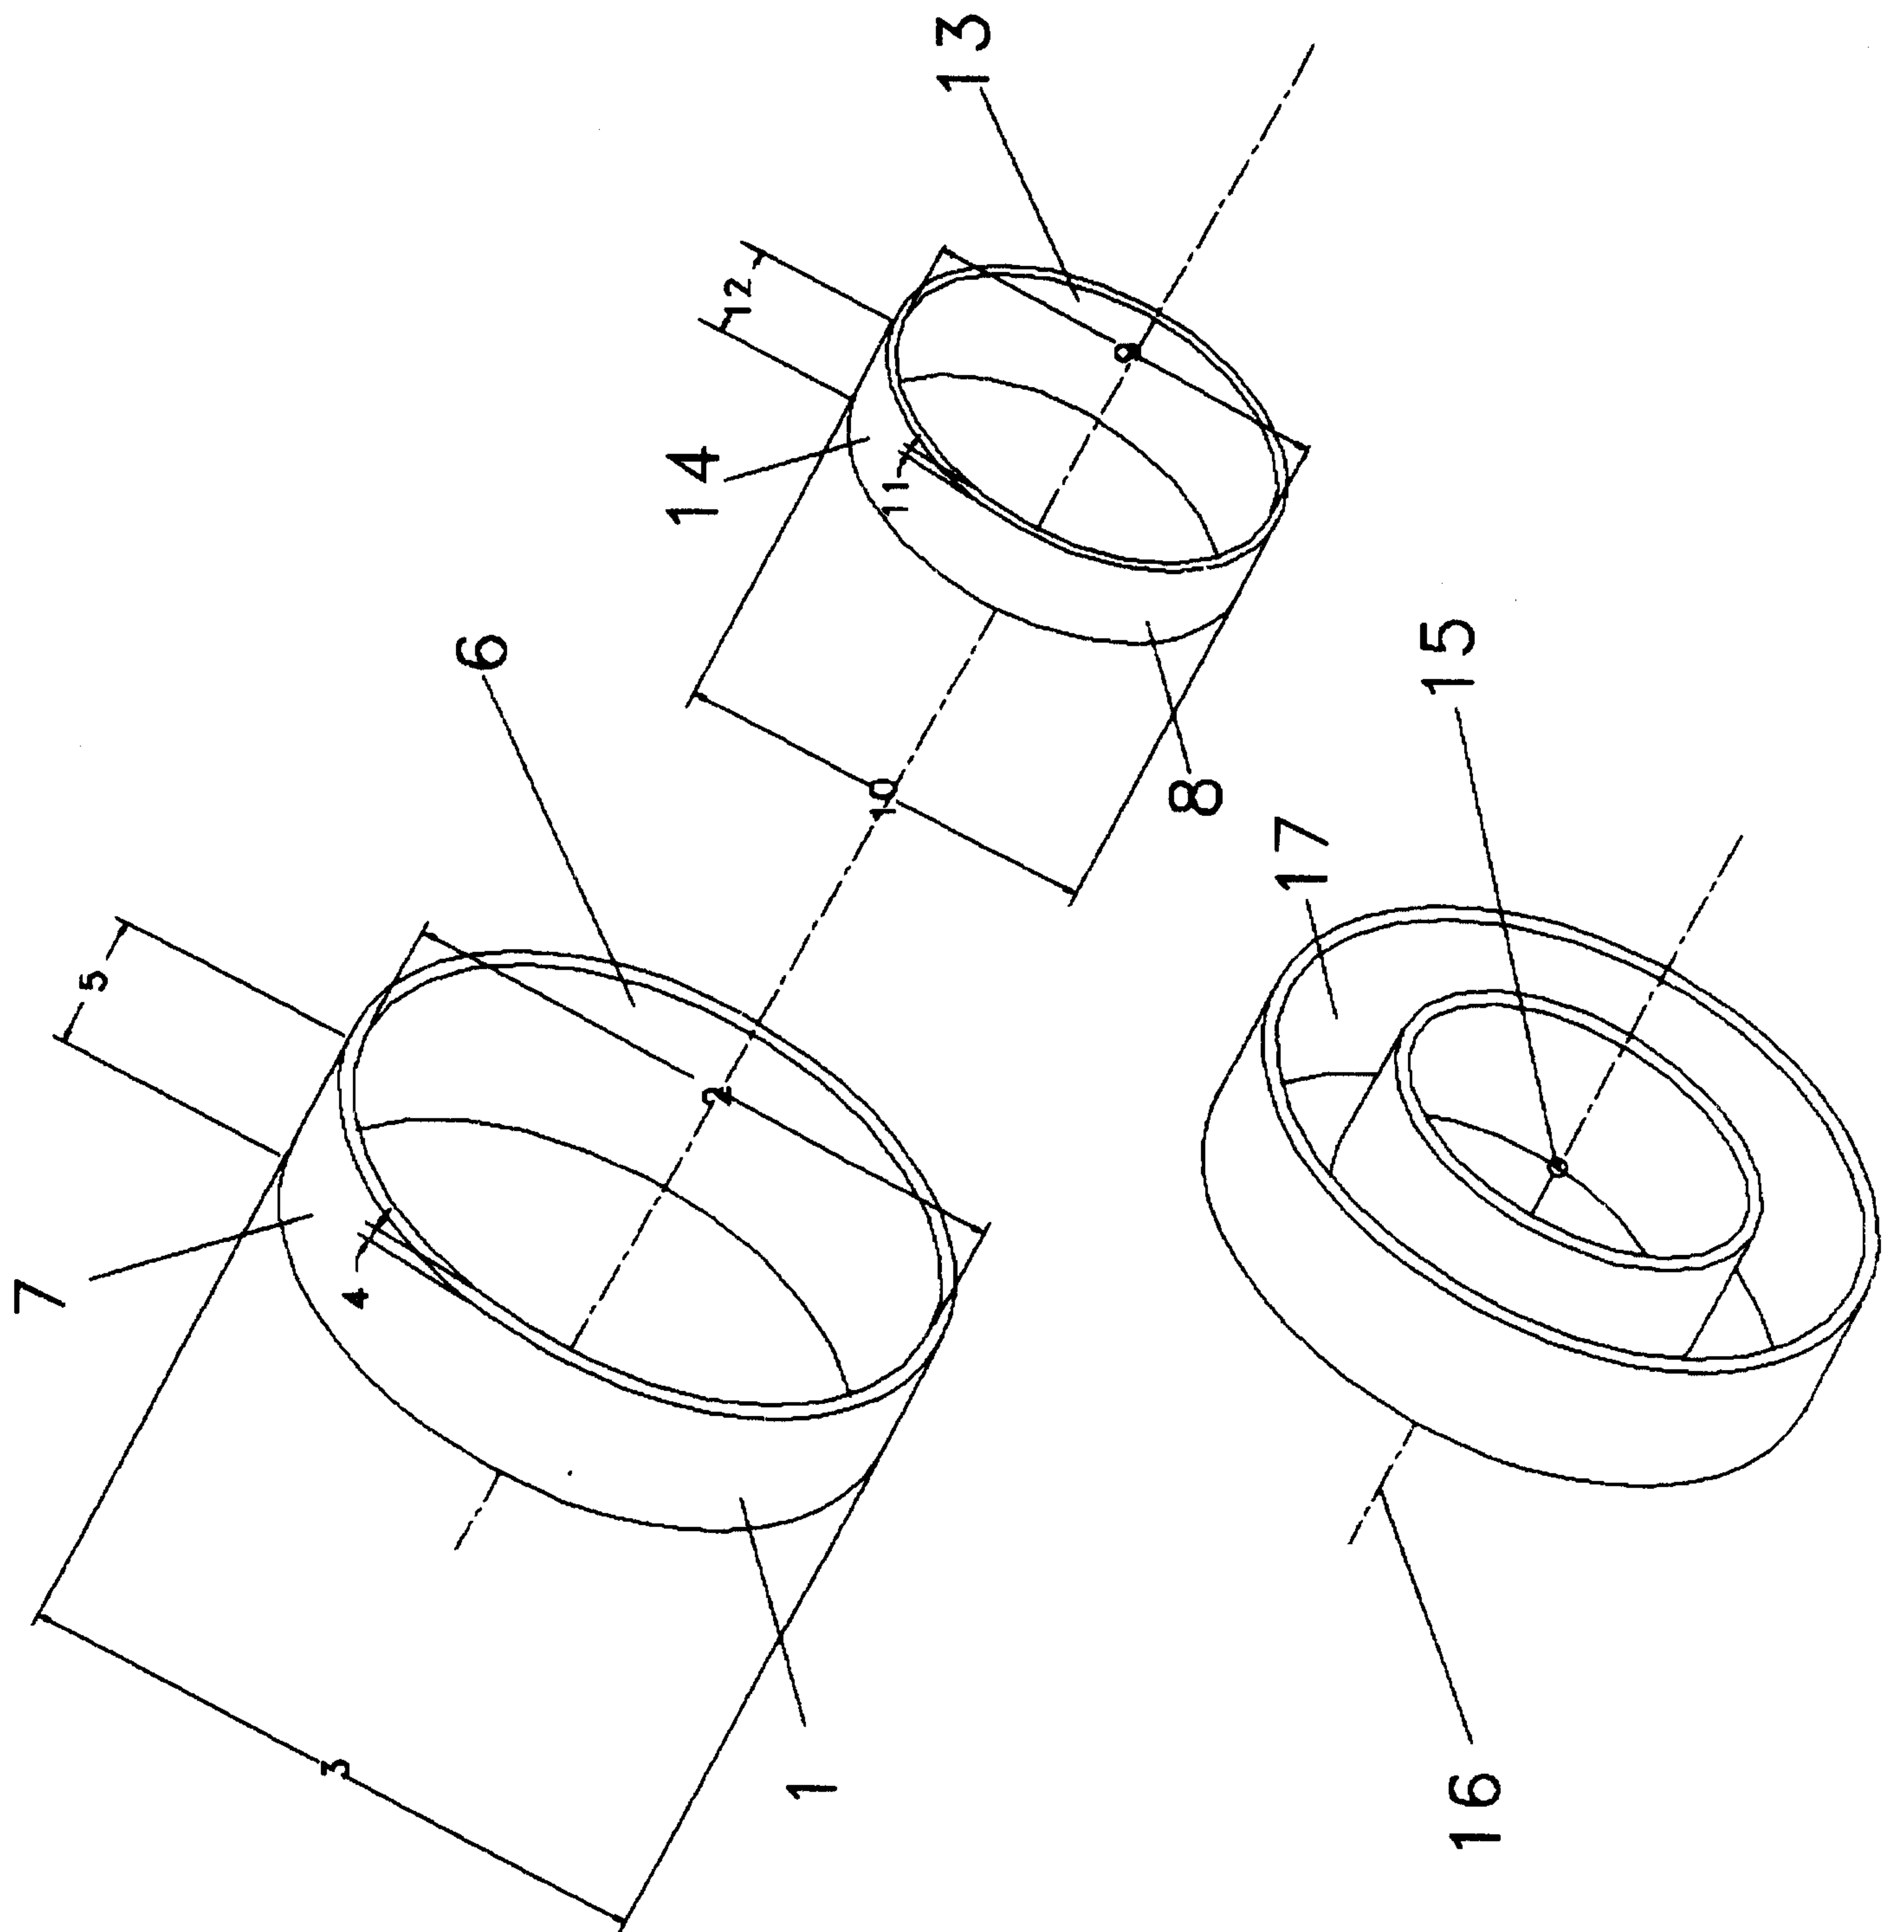


FIG.1

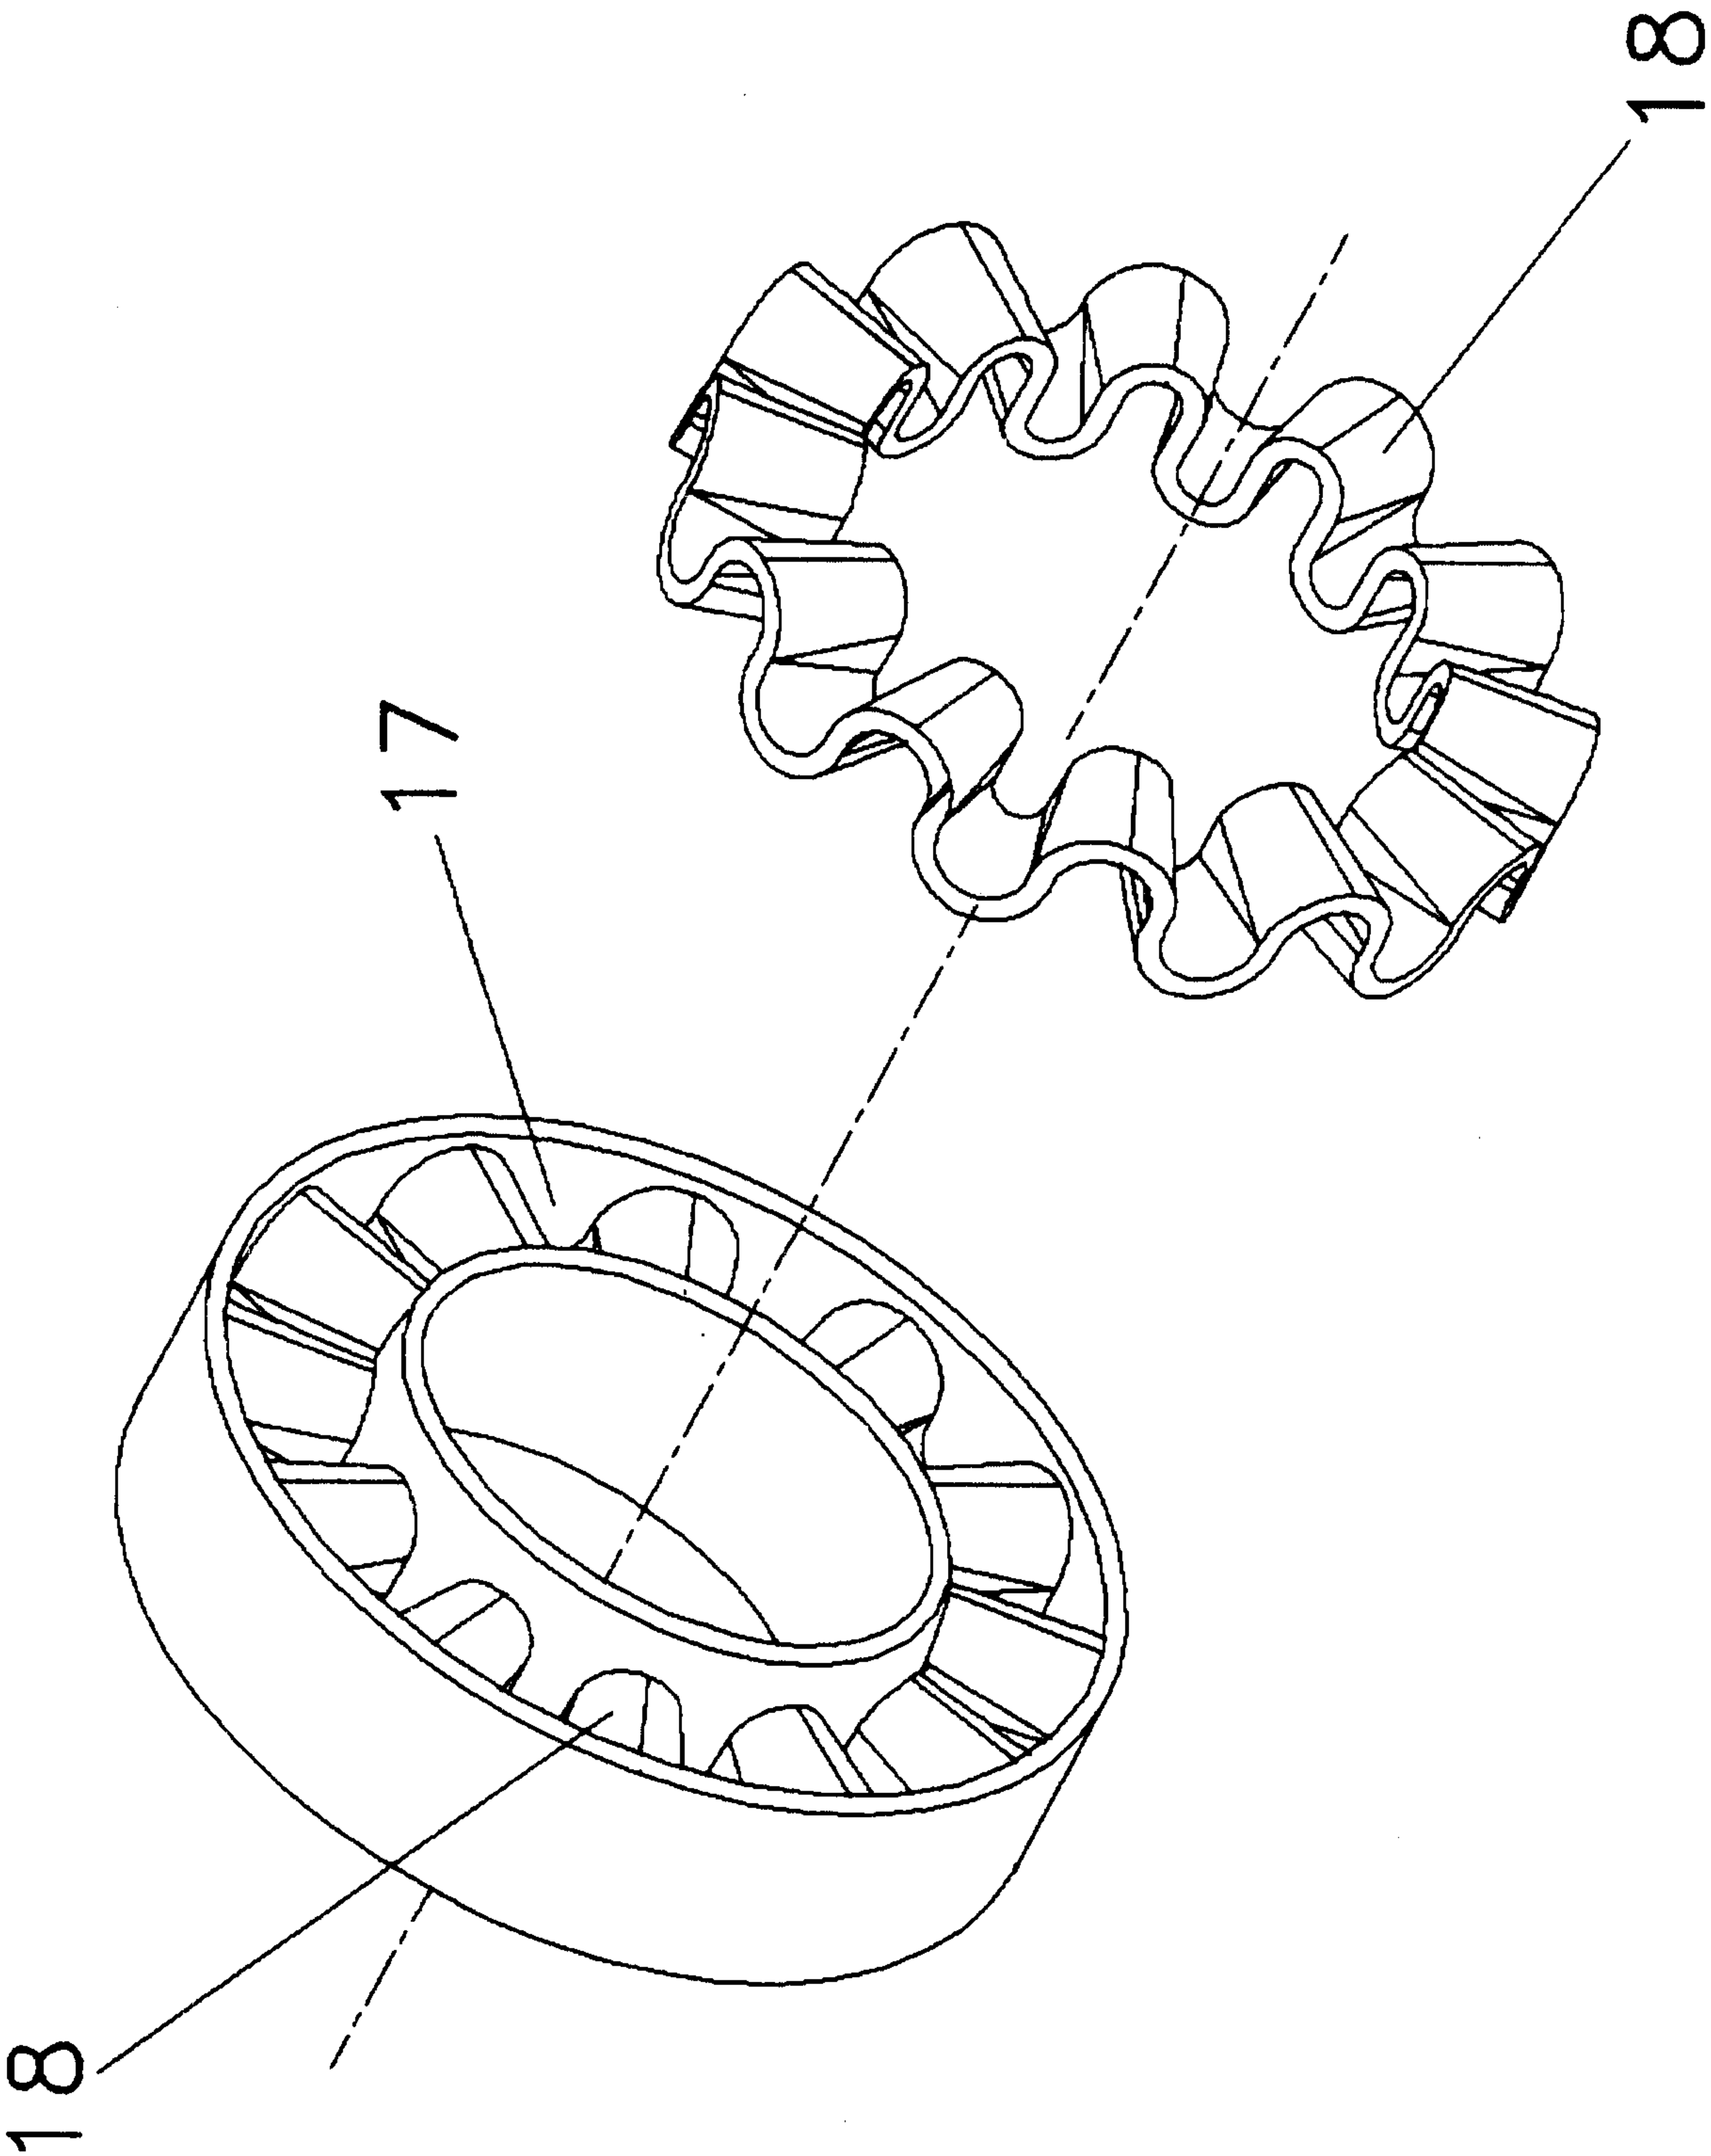


FIG. 2

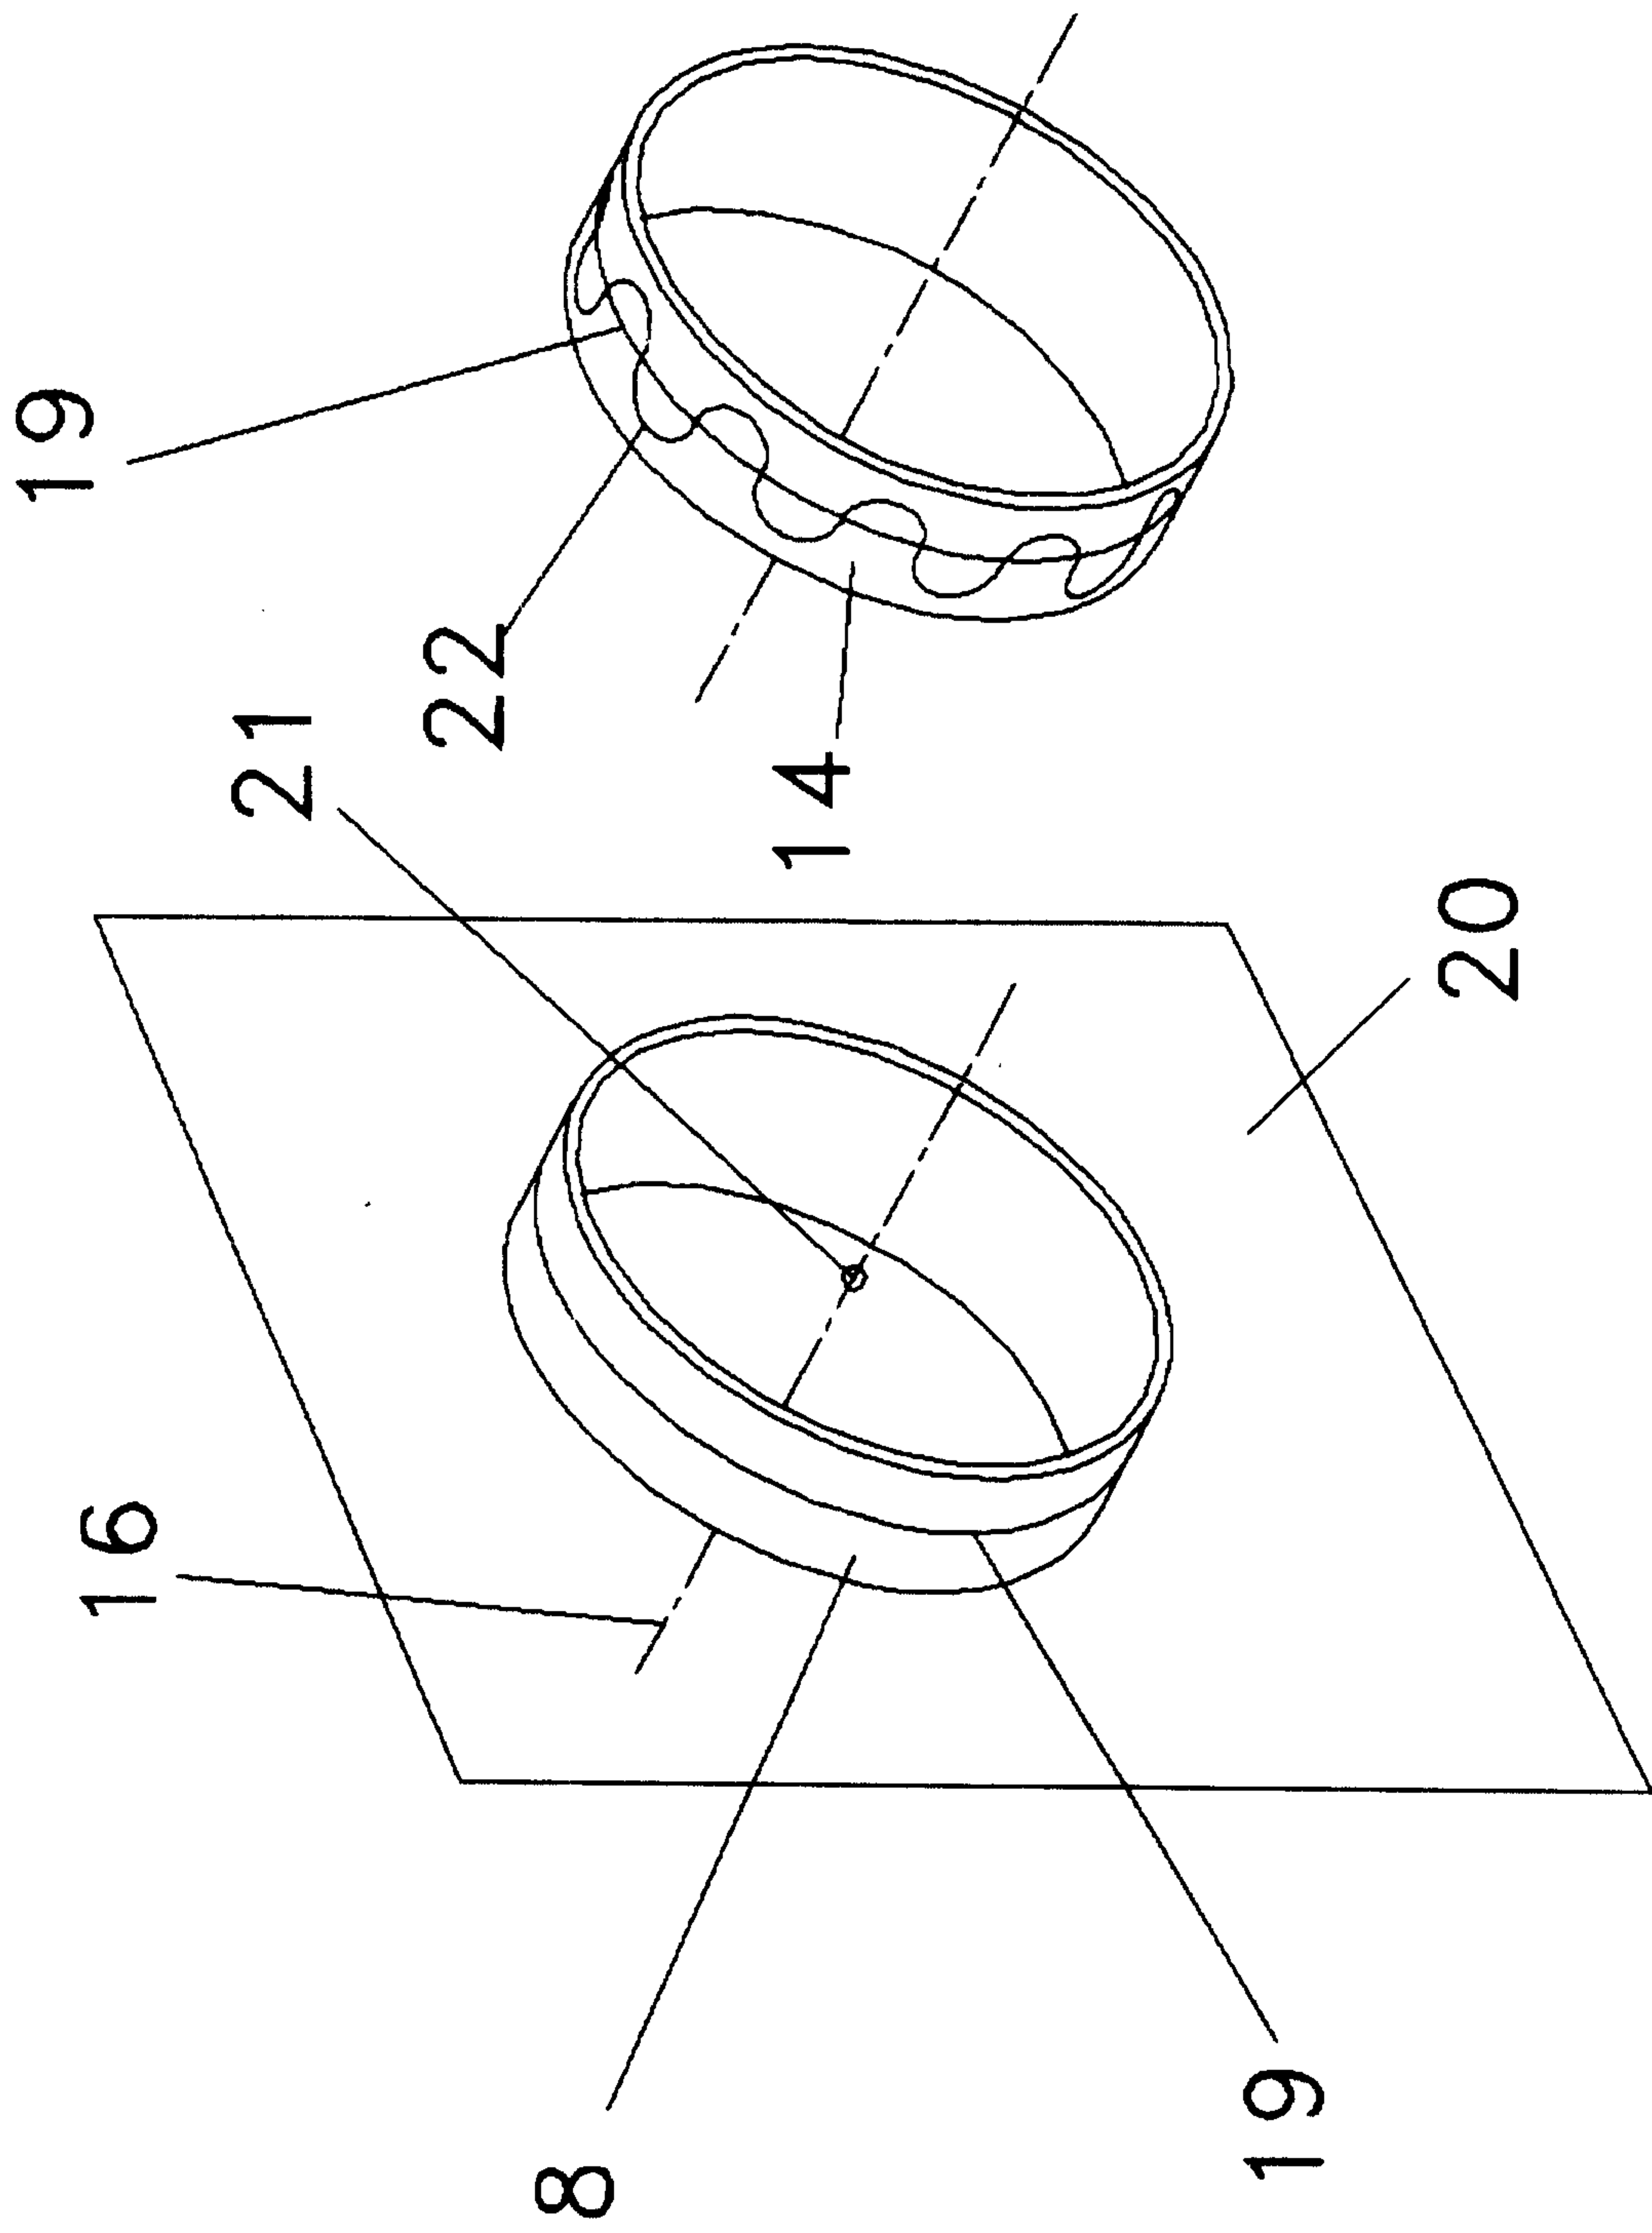


FIG. 3

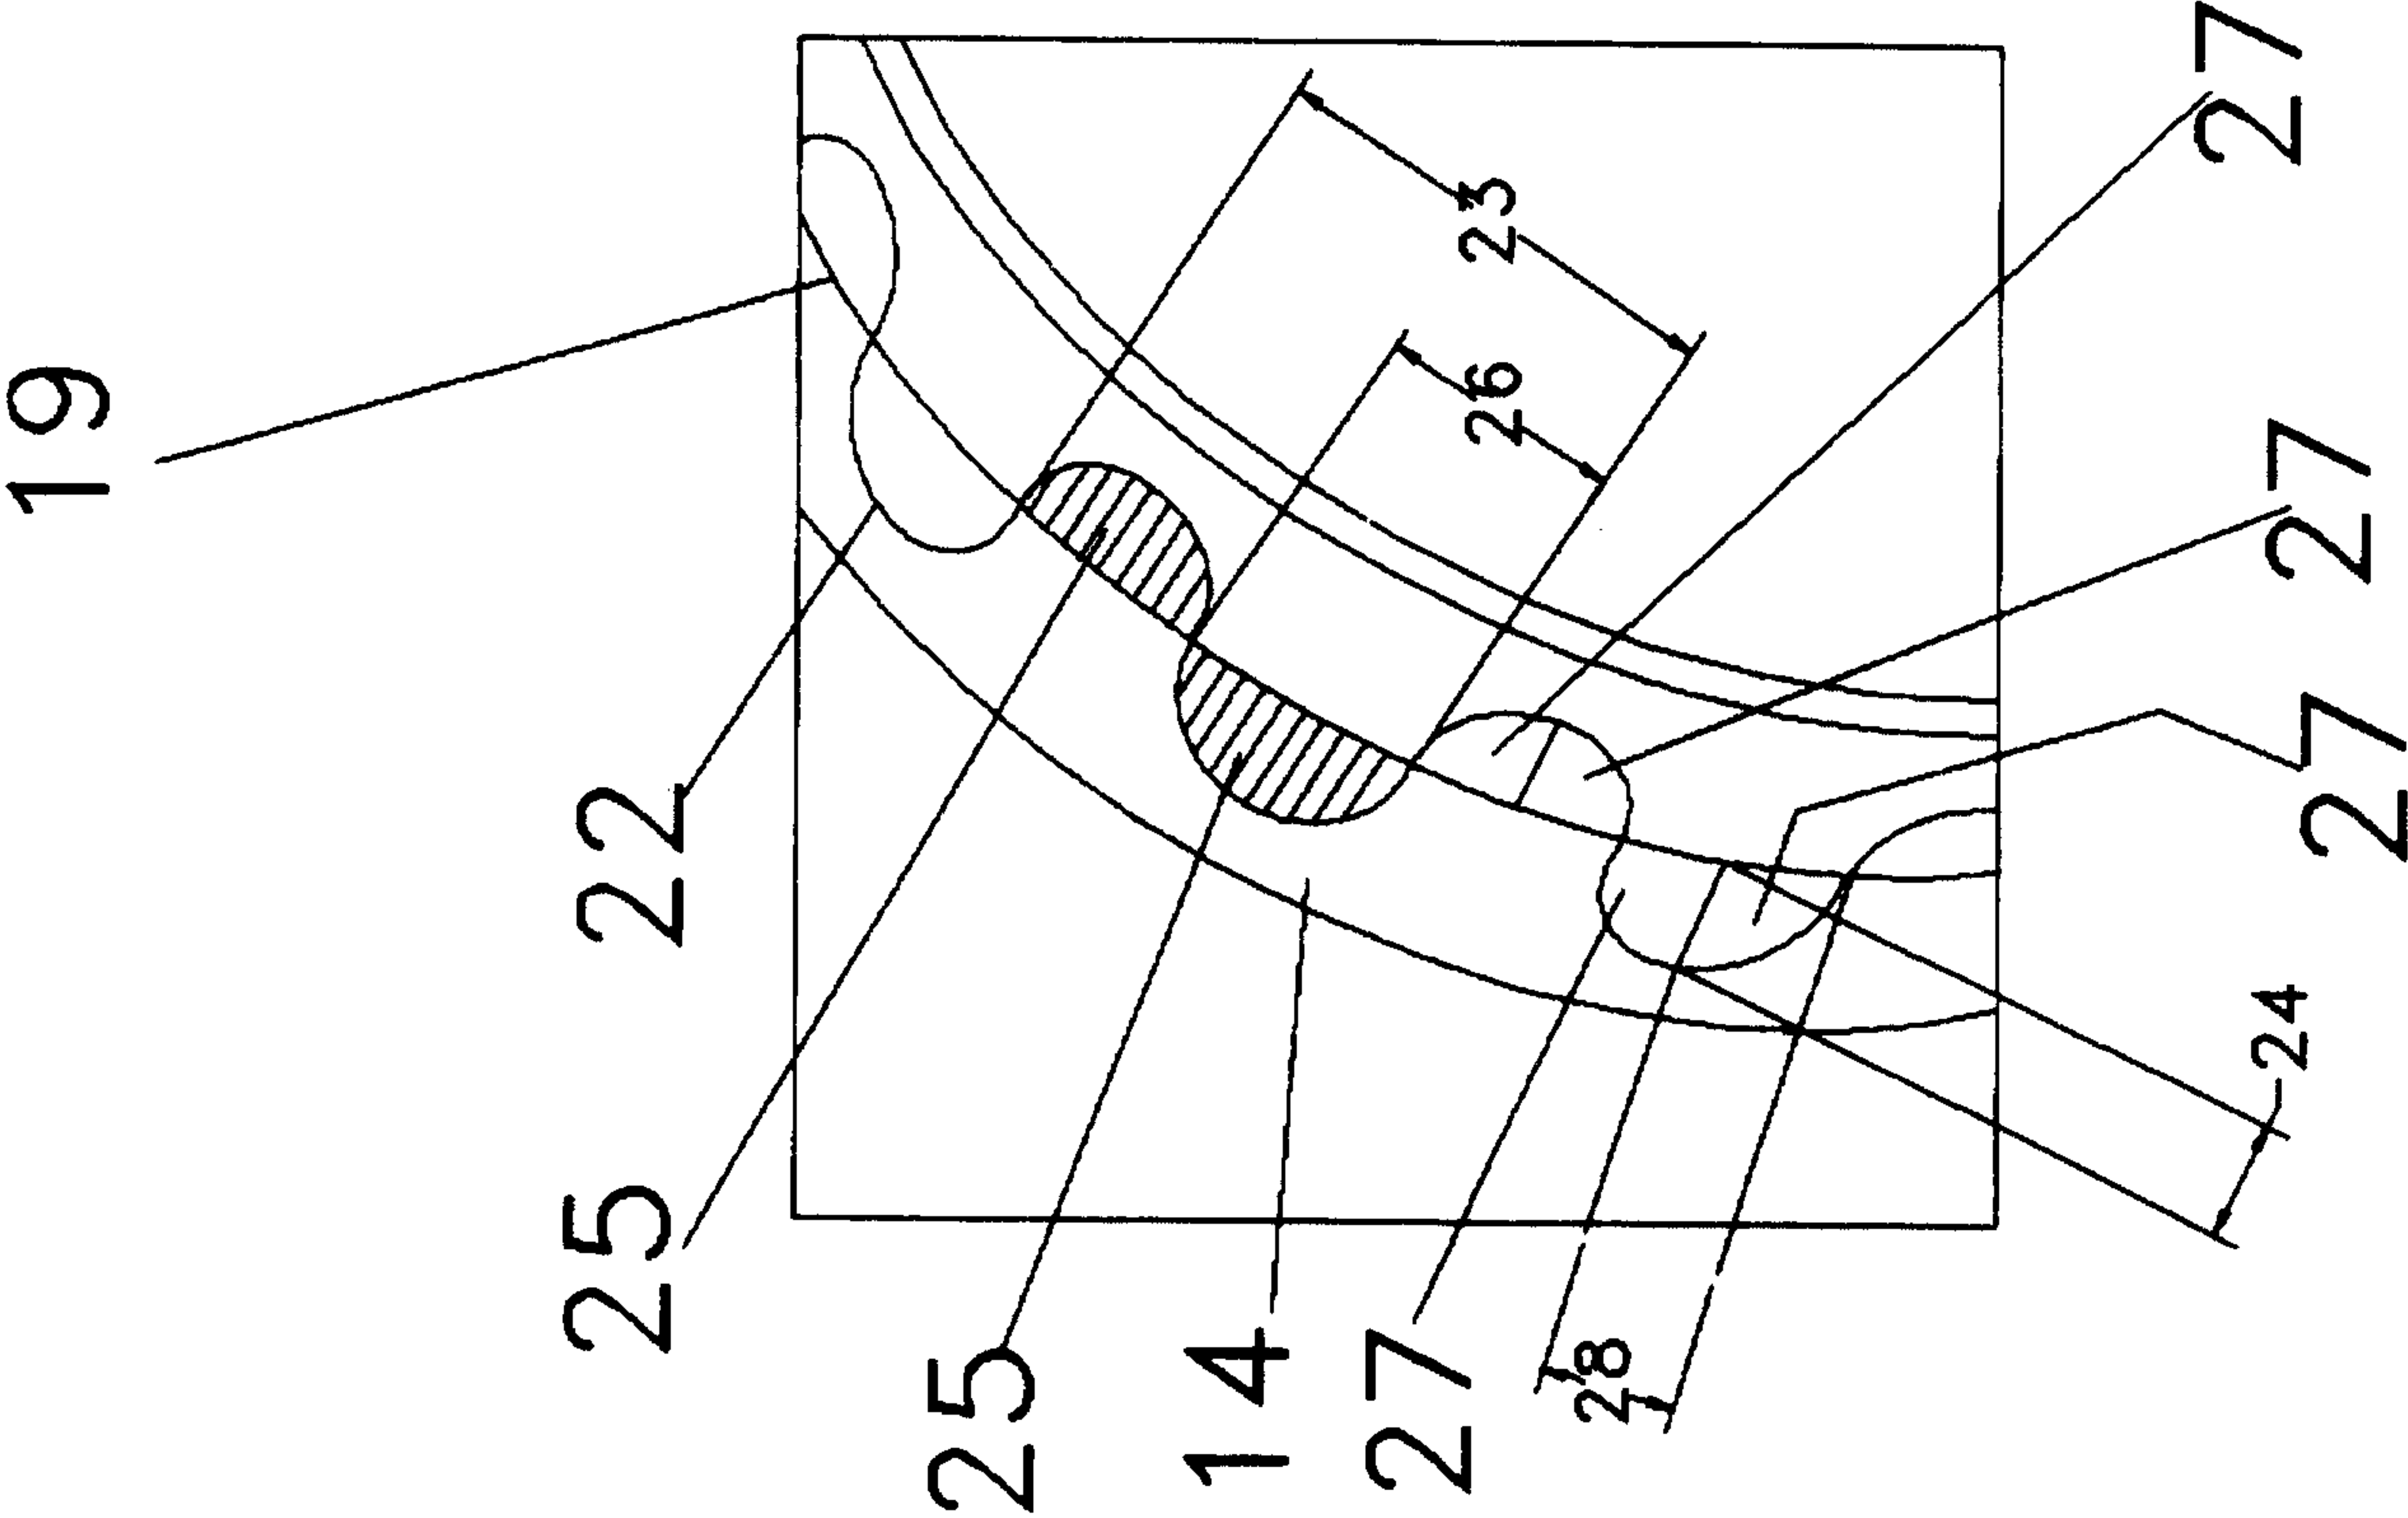


FIG. 4

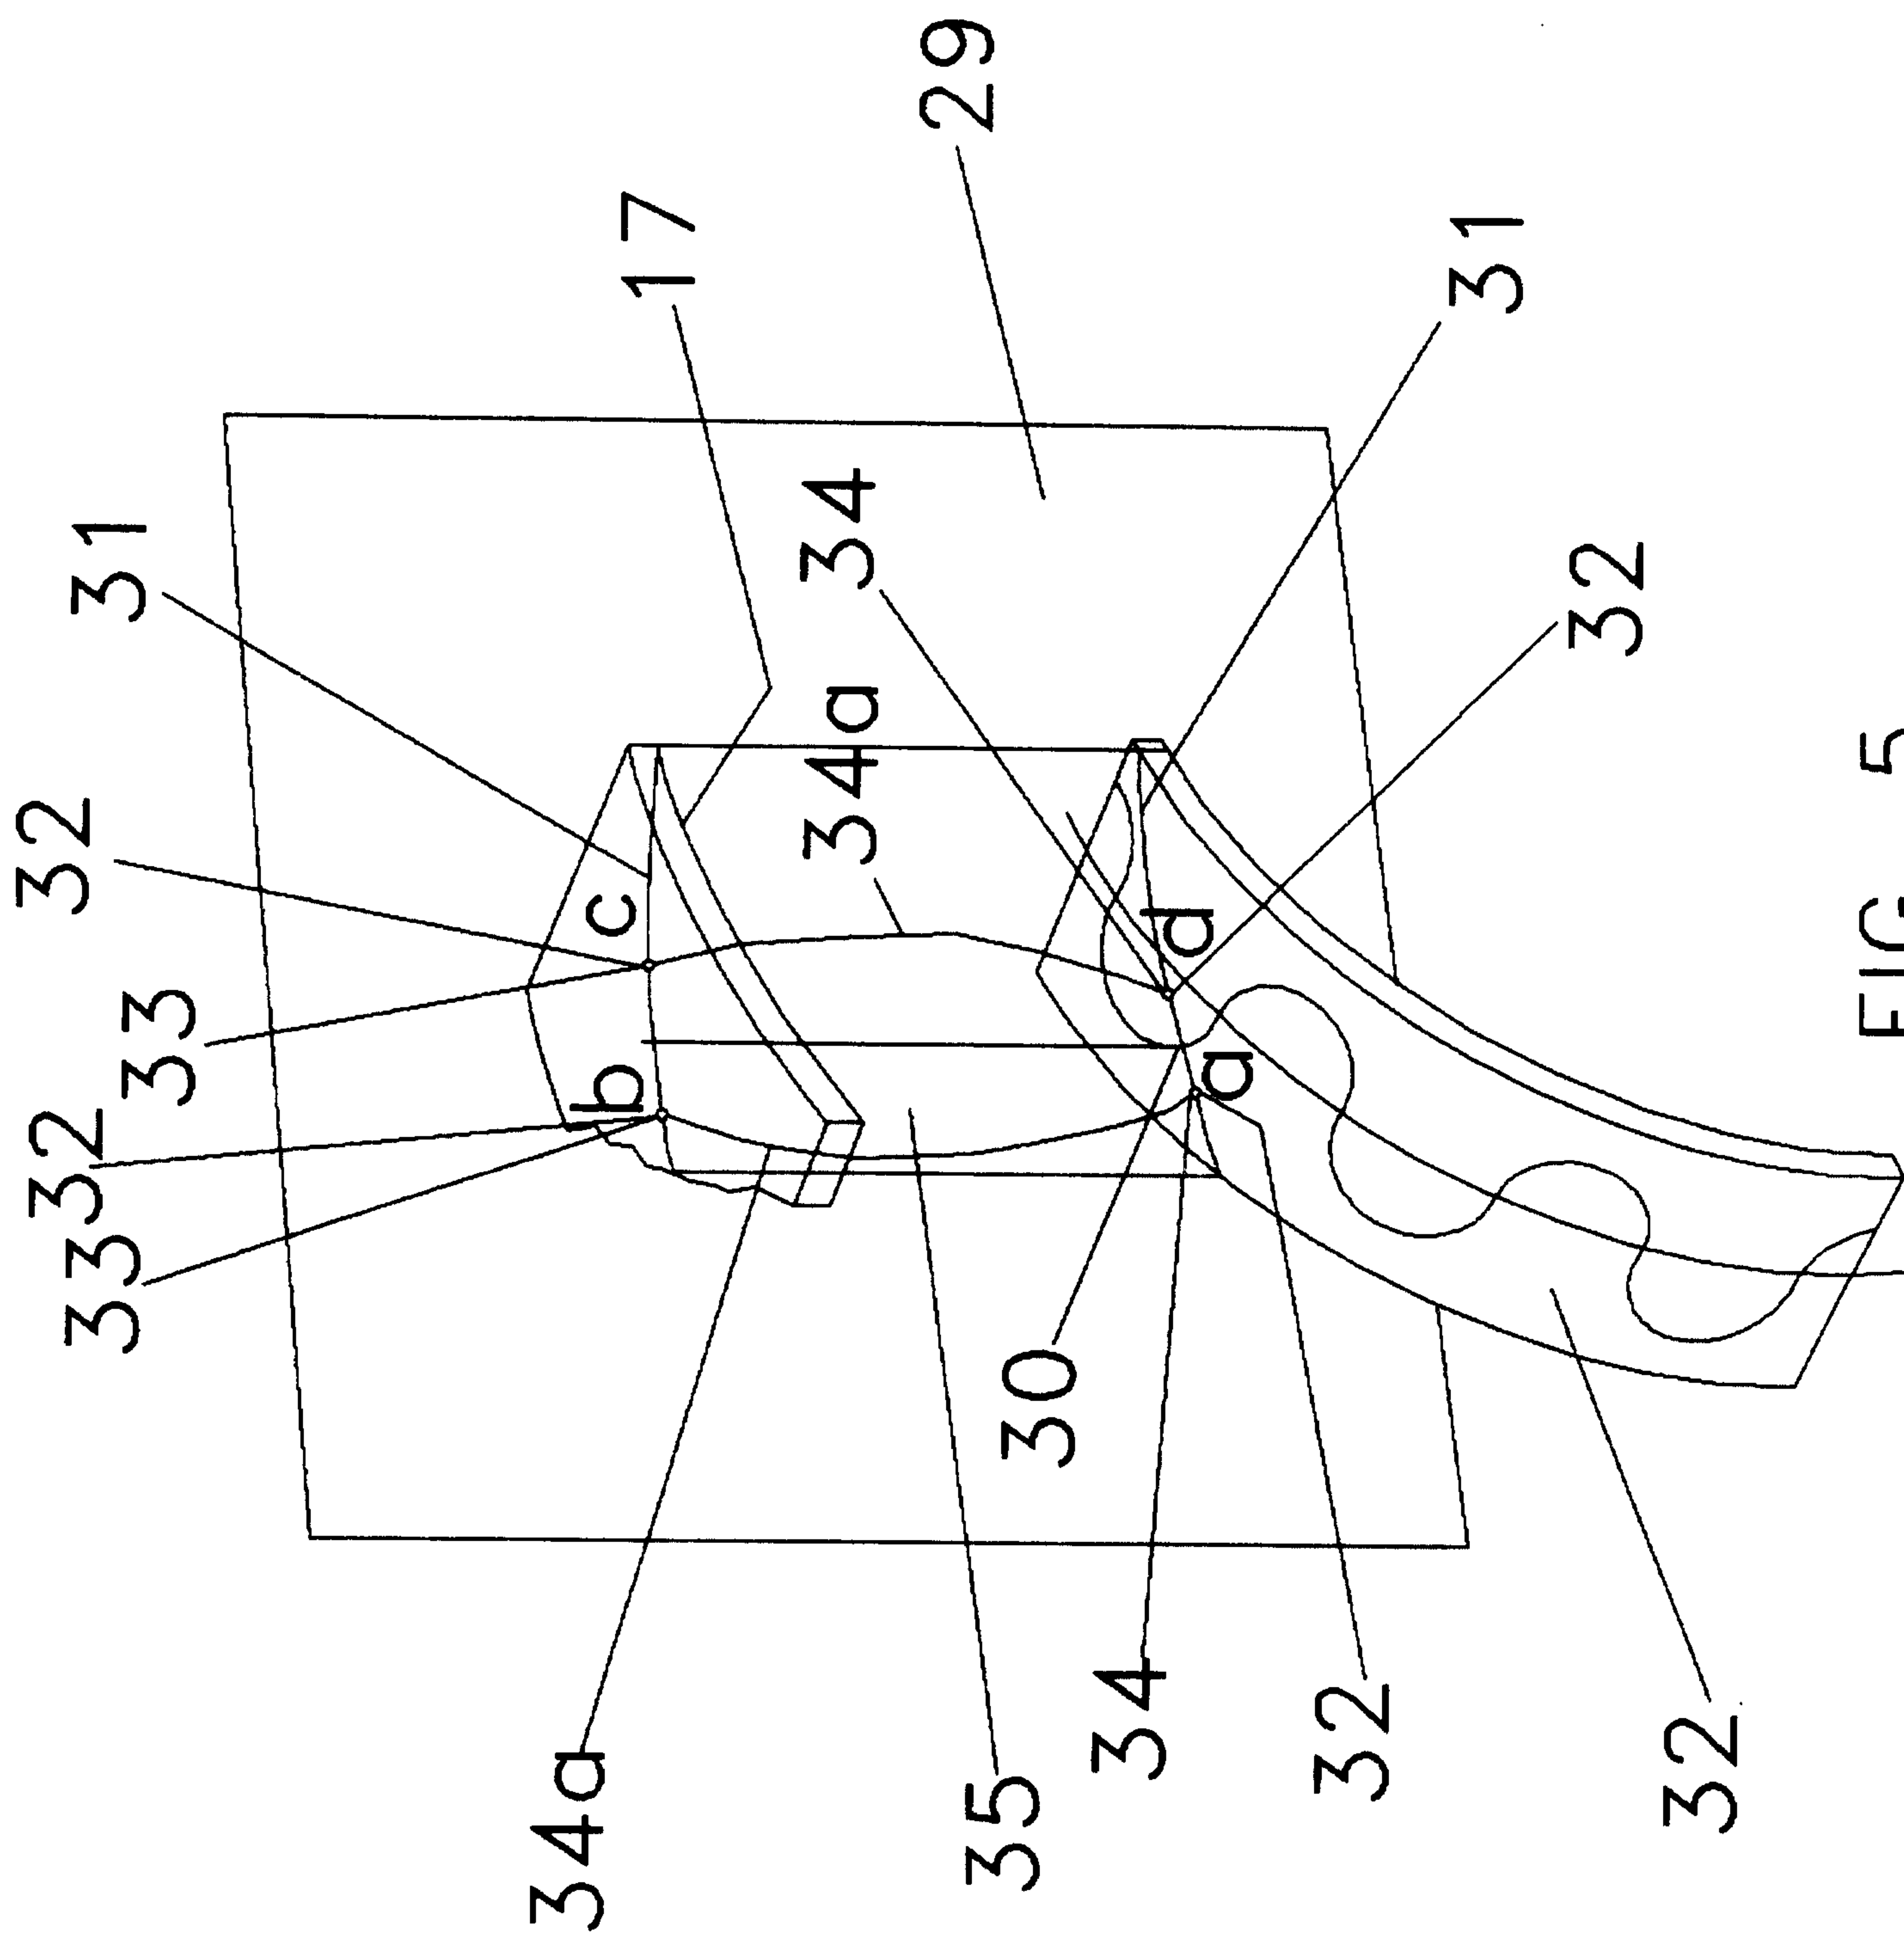


FIG. 5

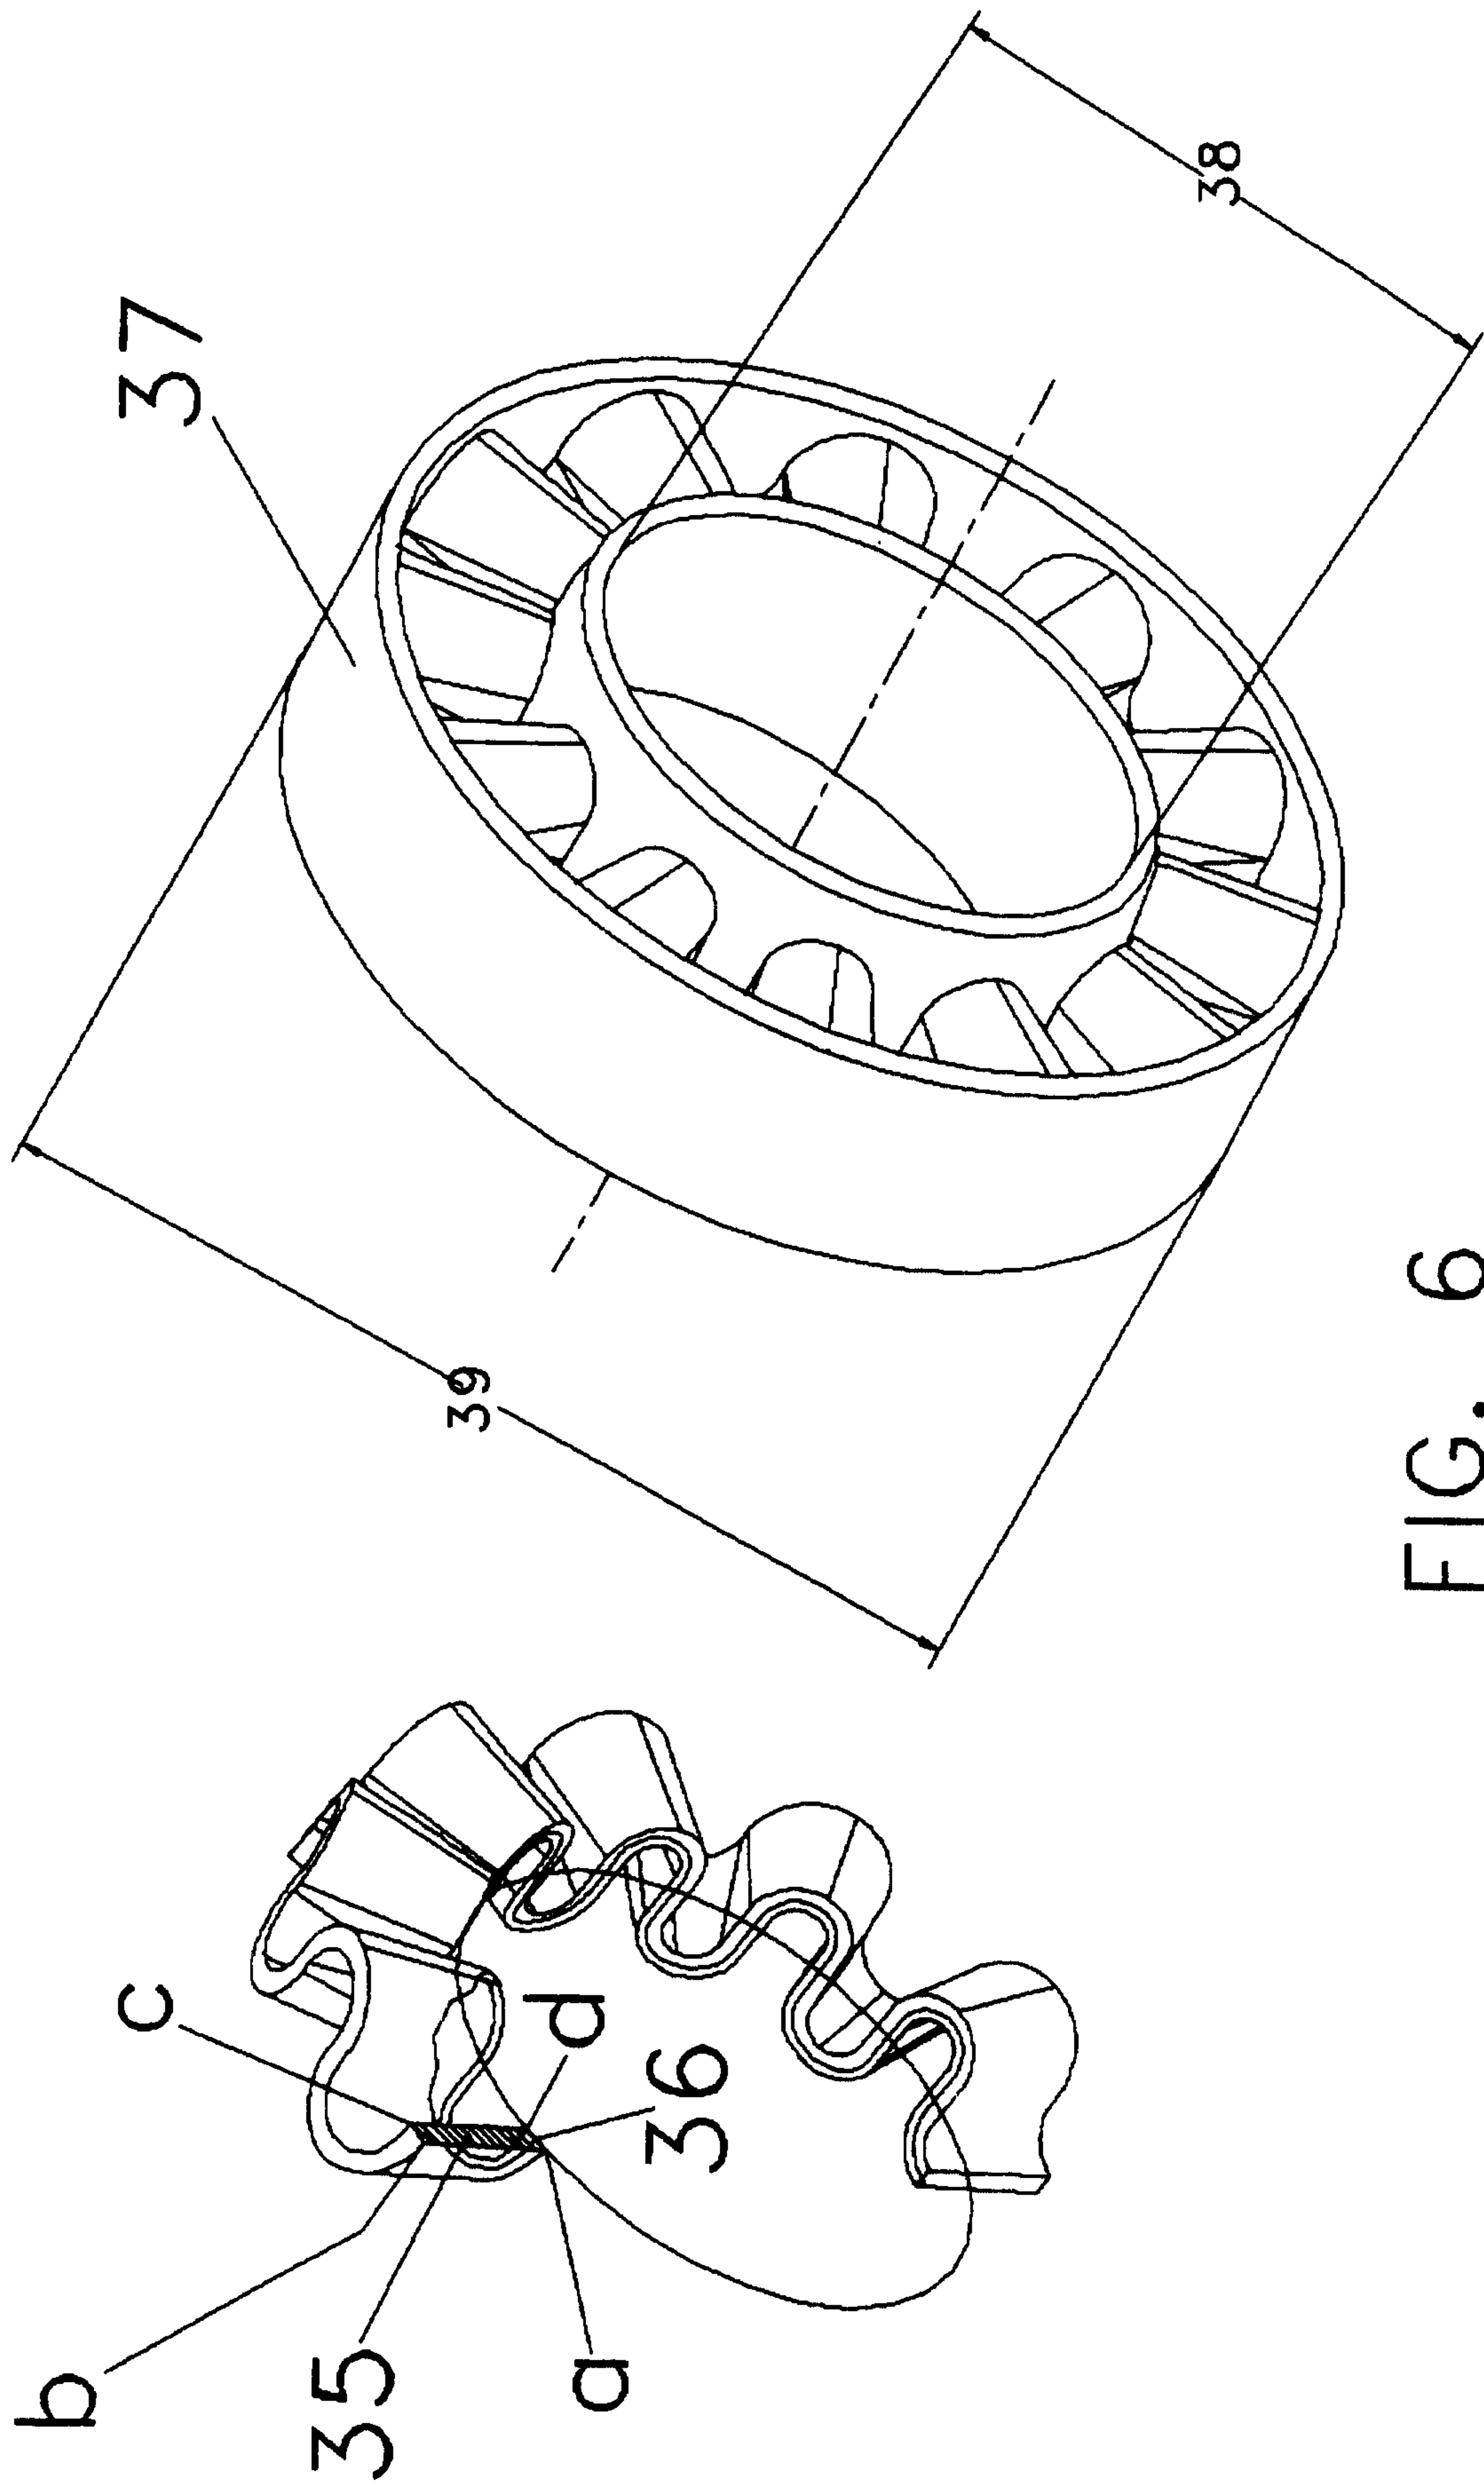


FIG. 6

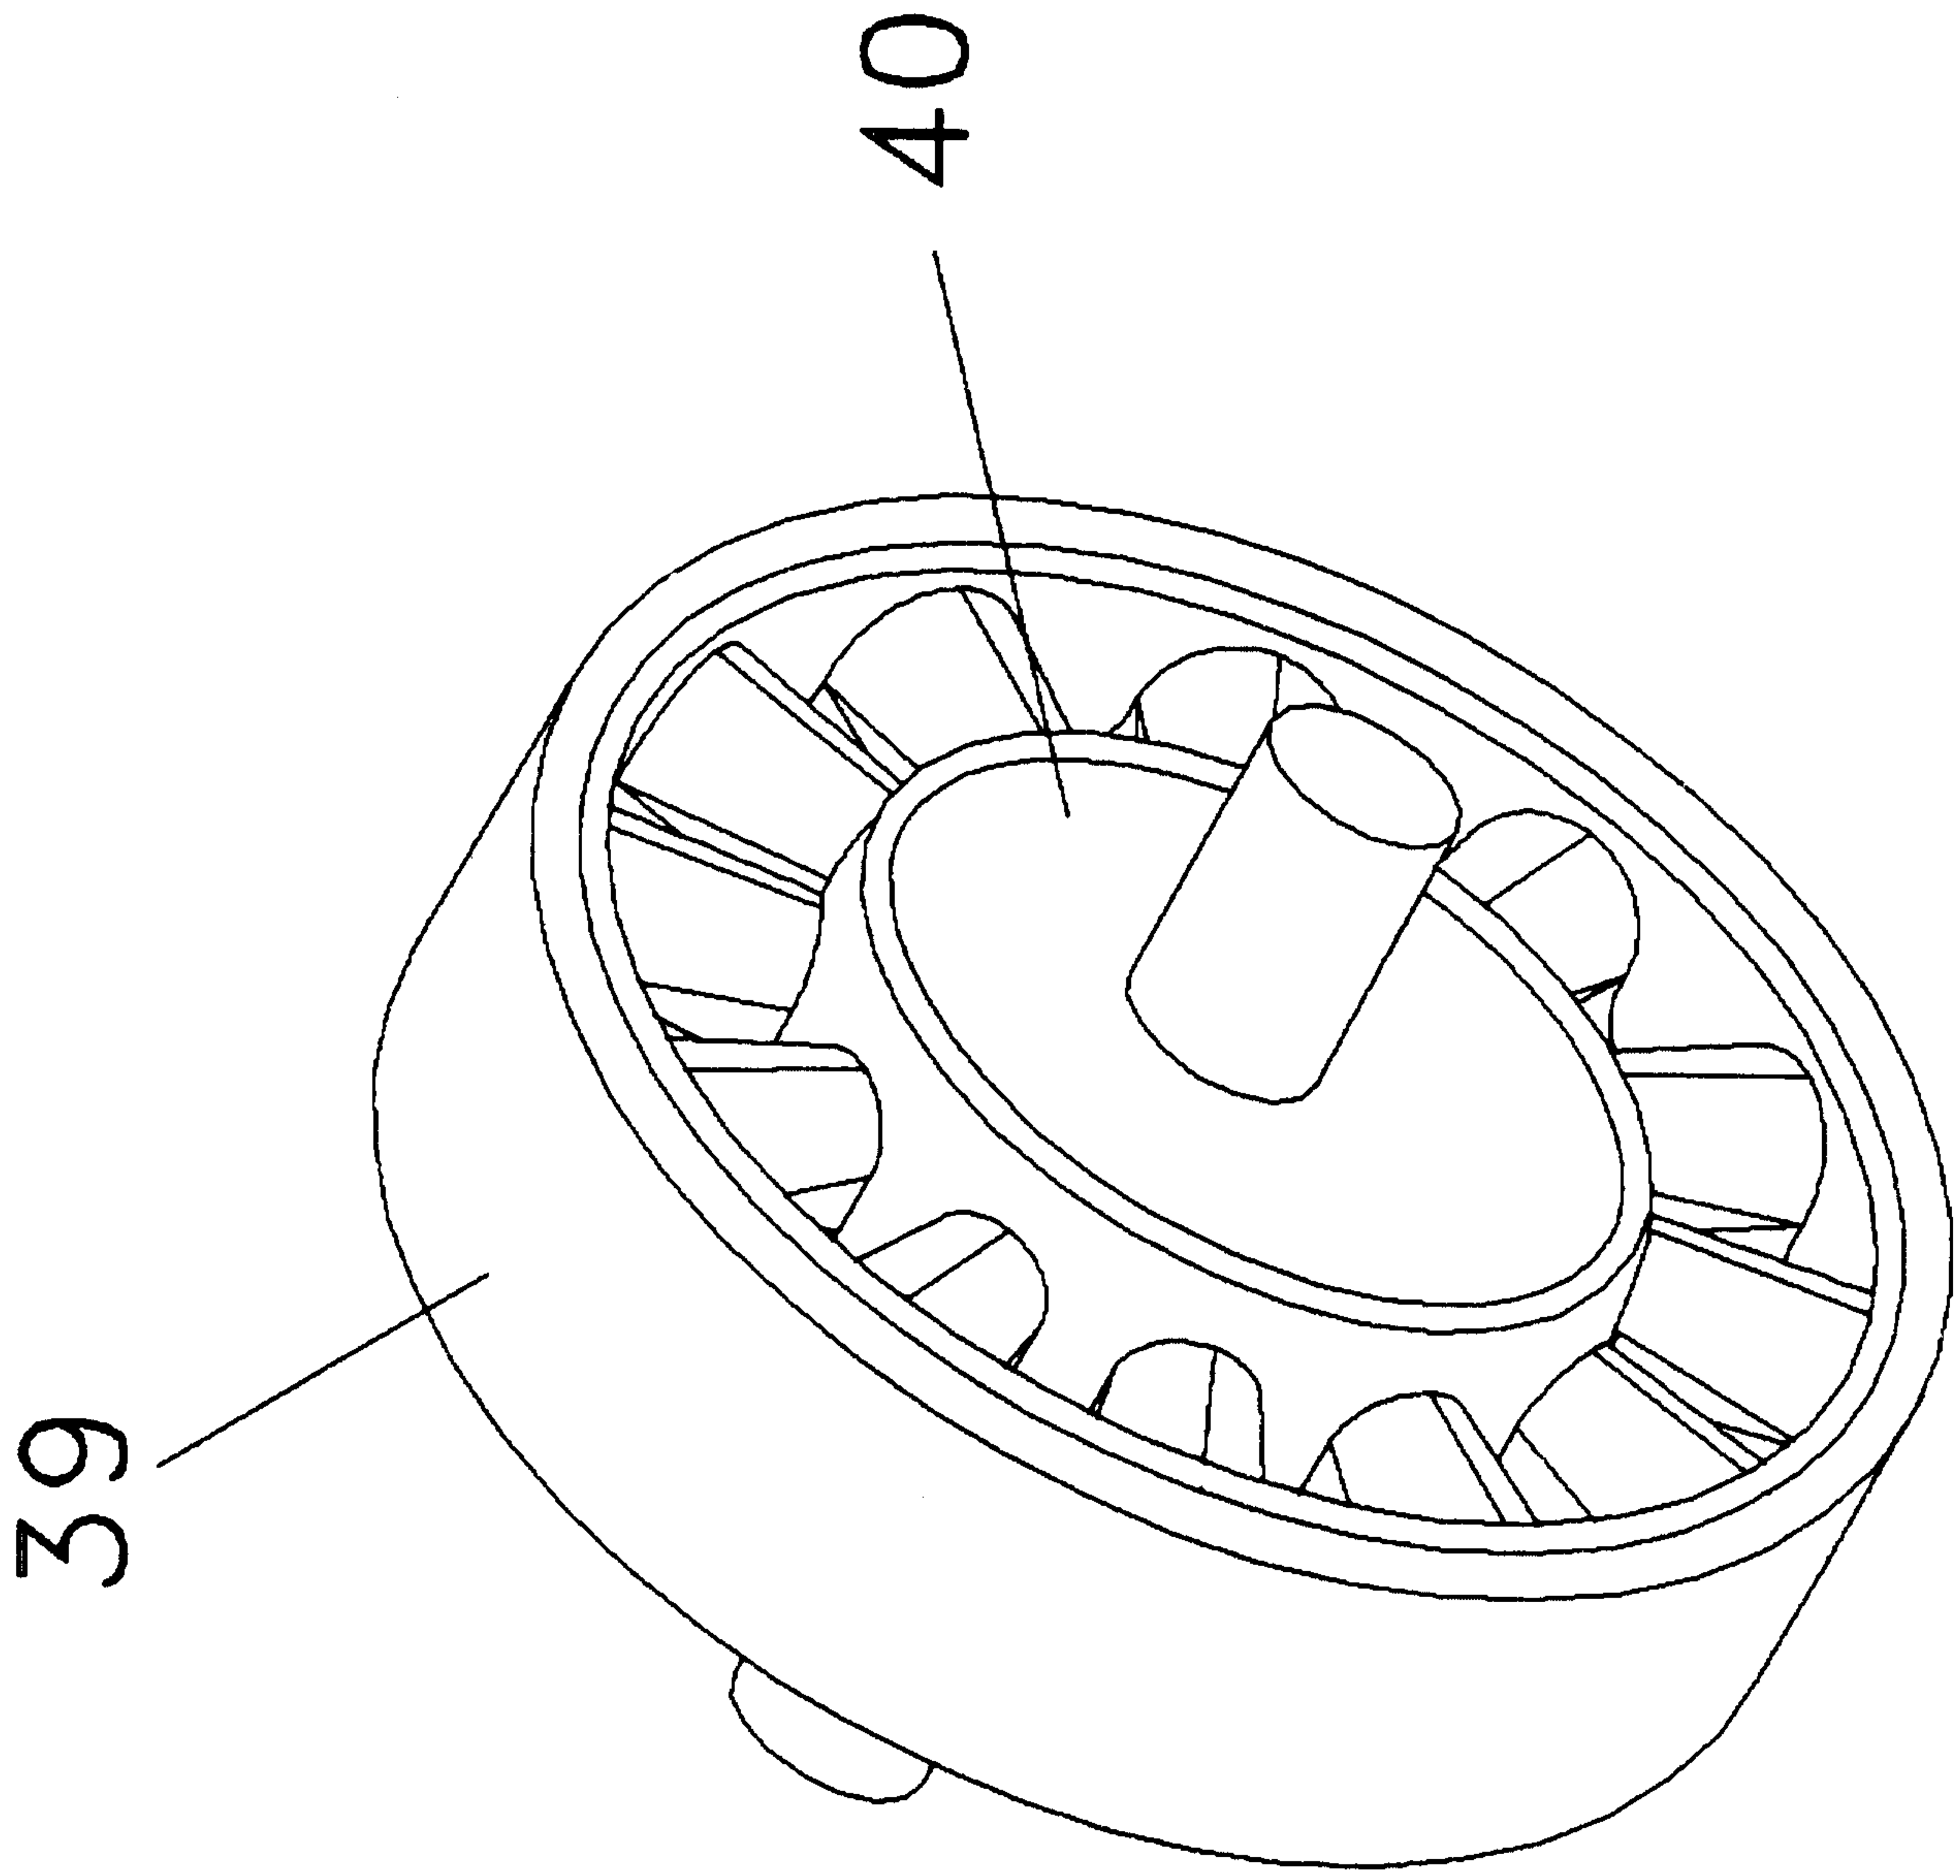
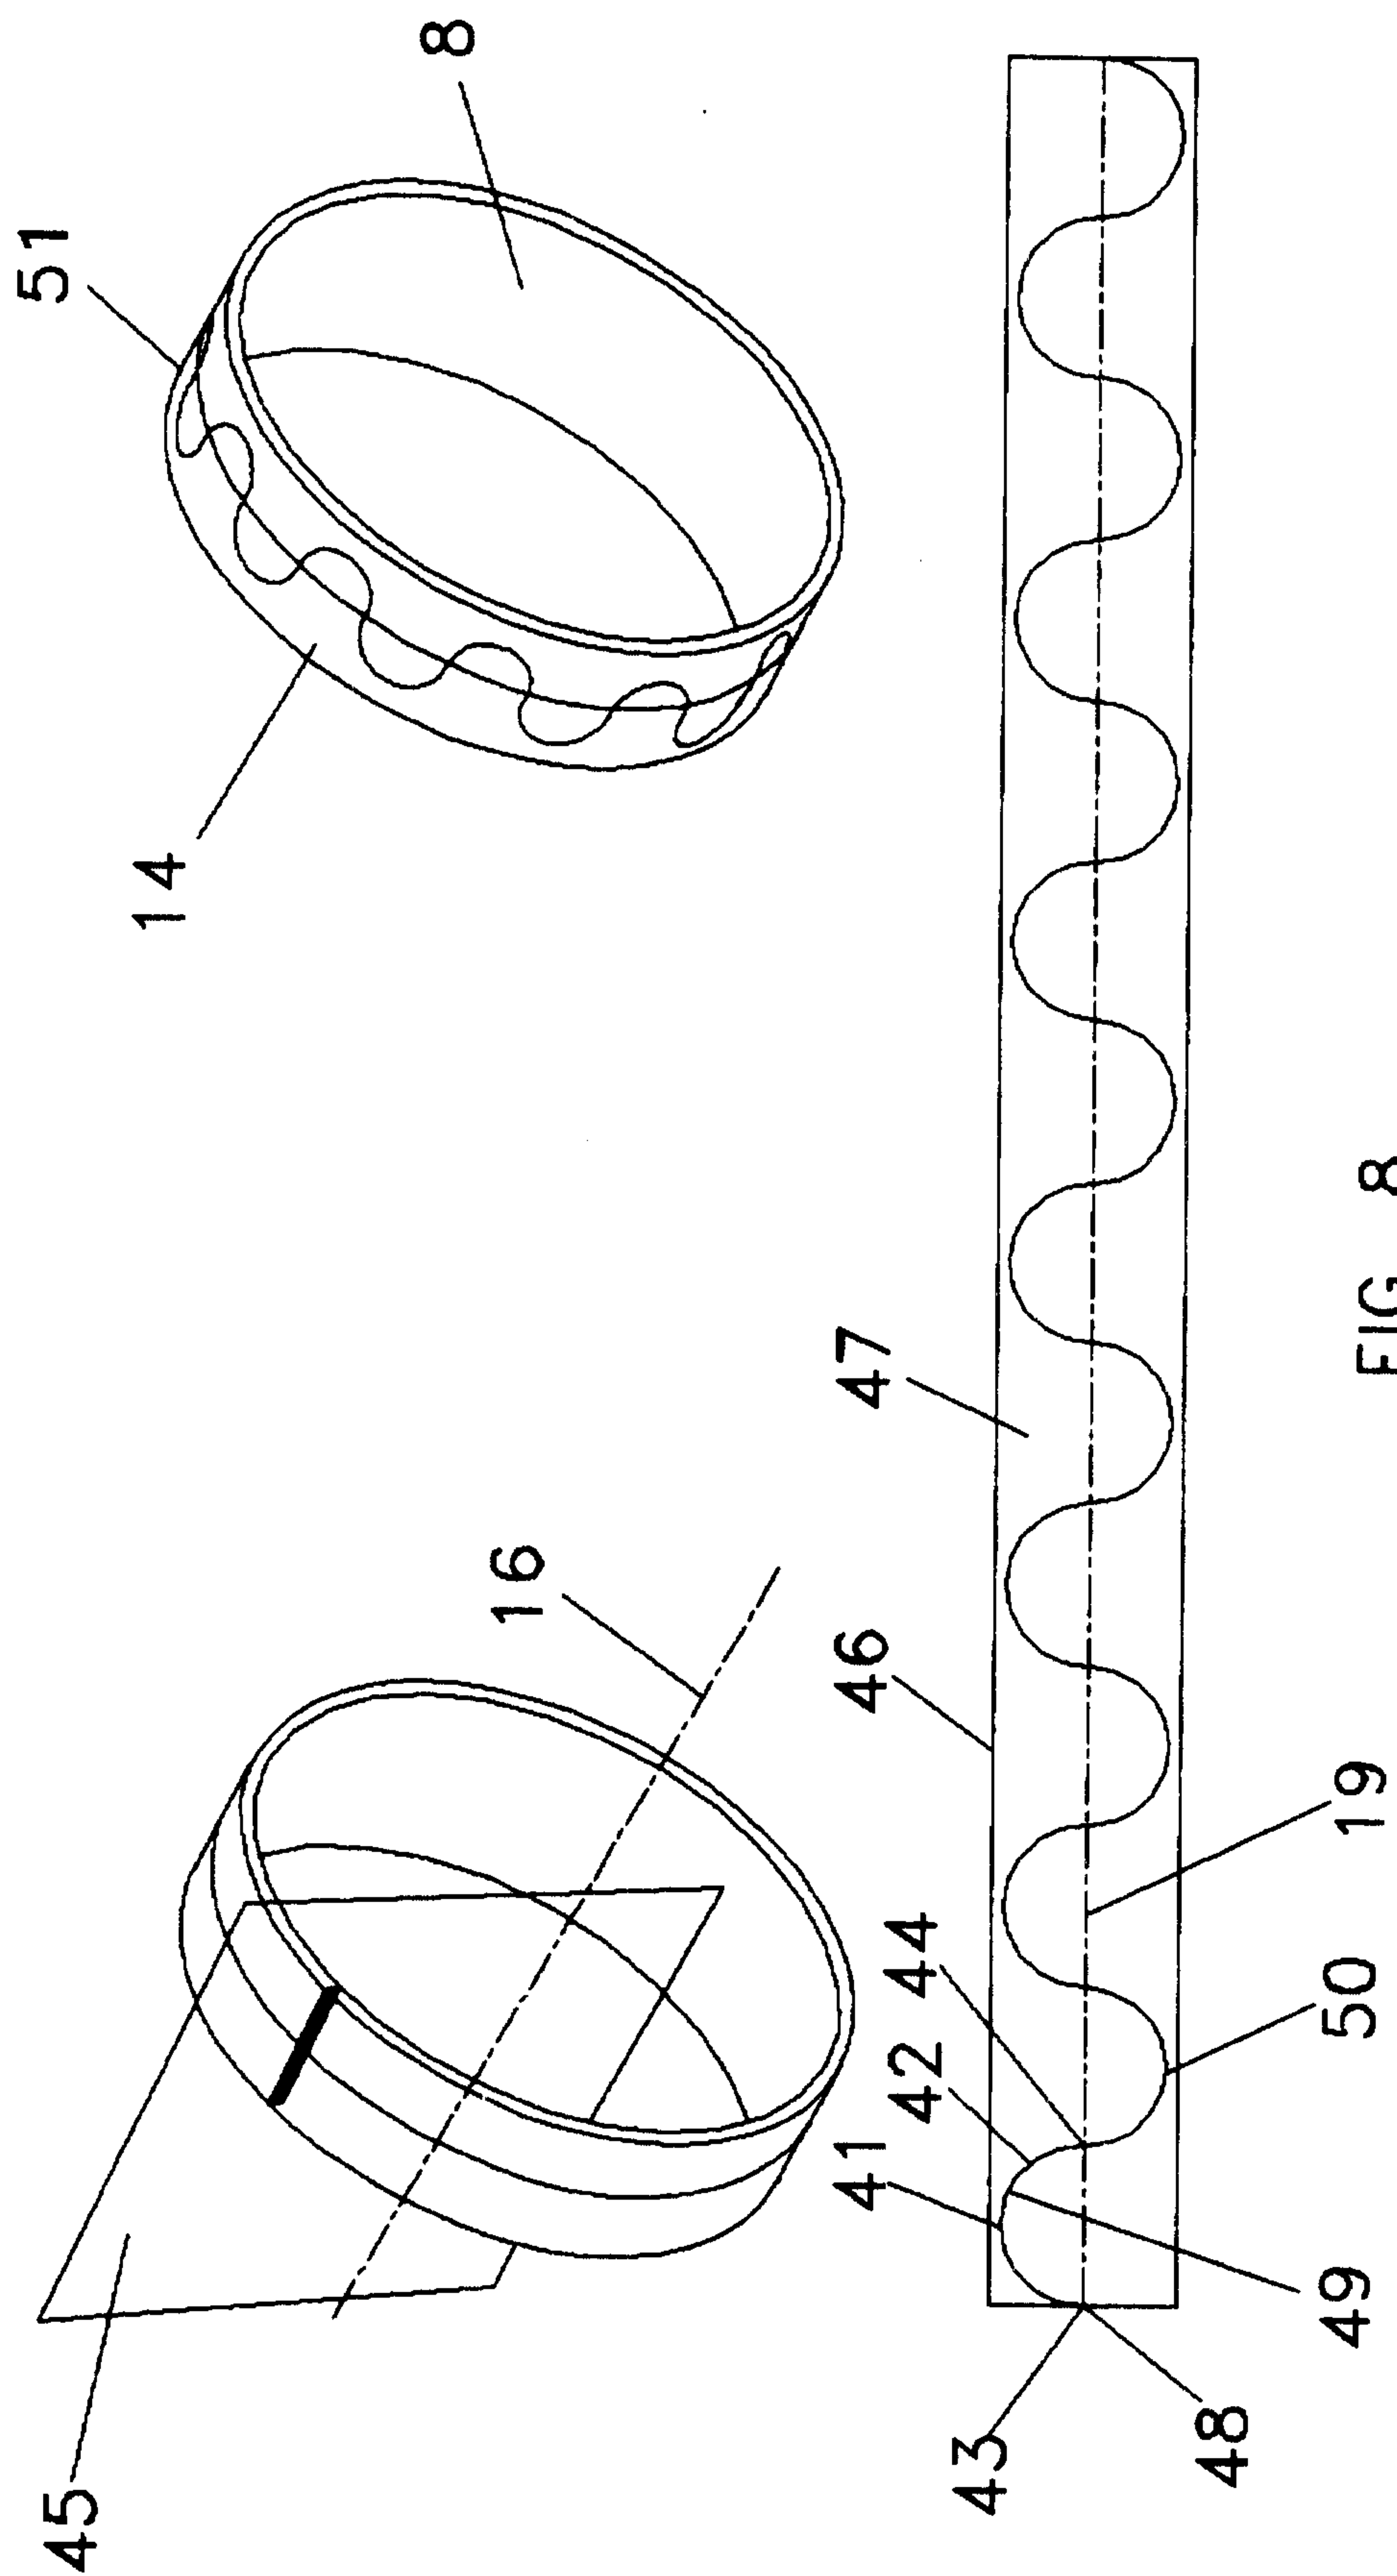


FIG. 7



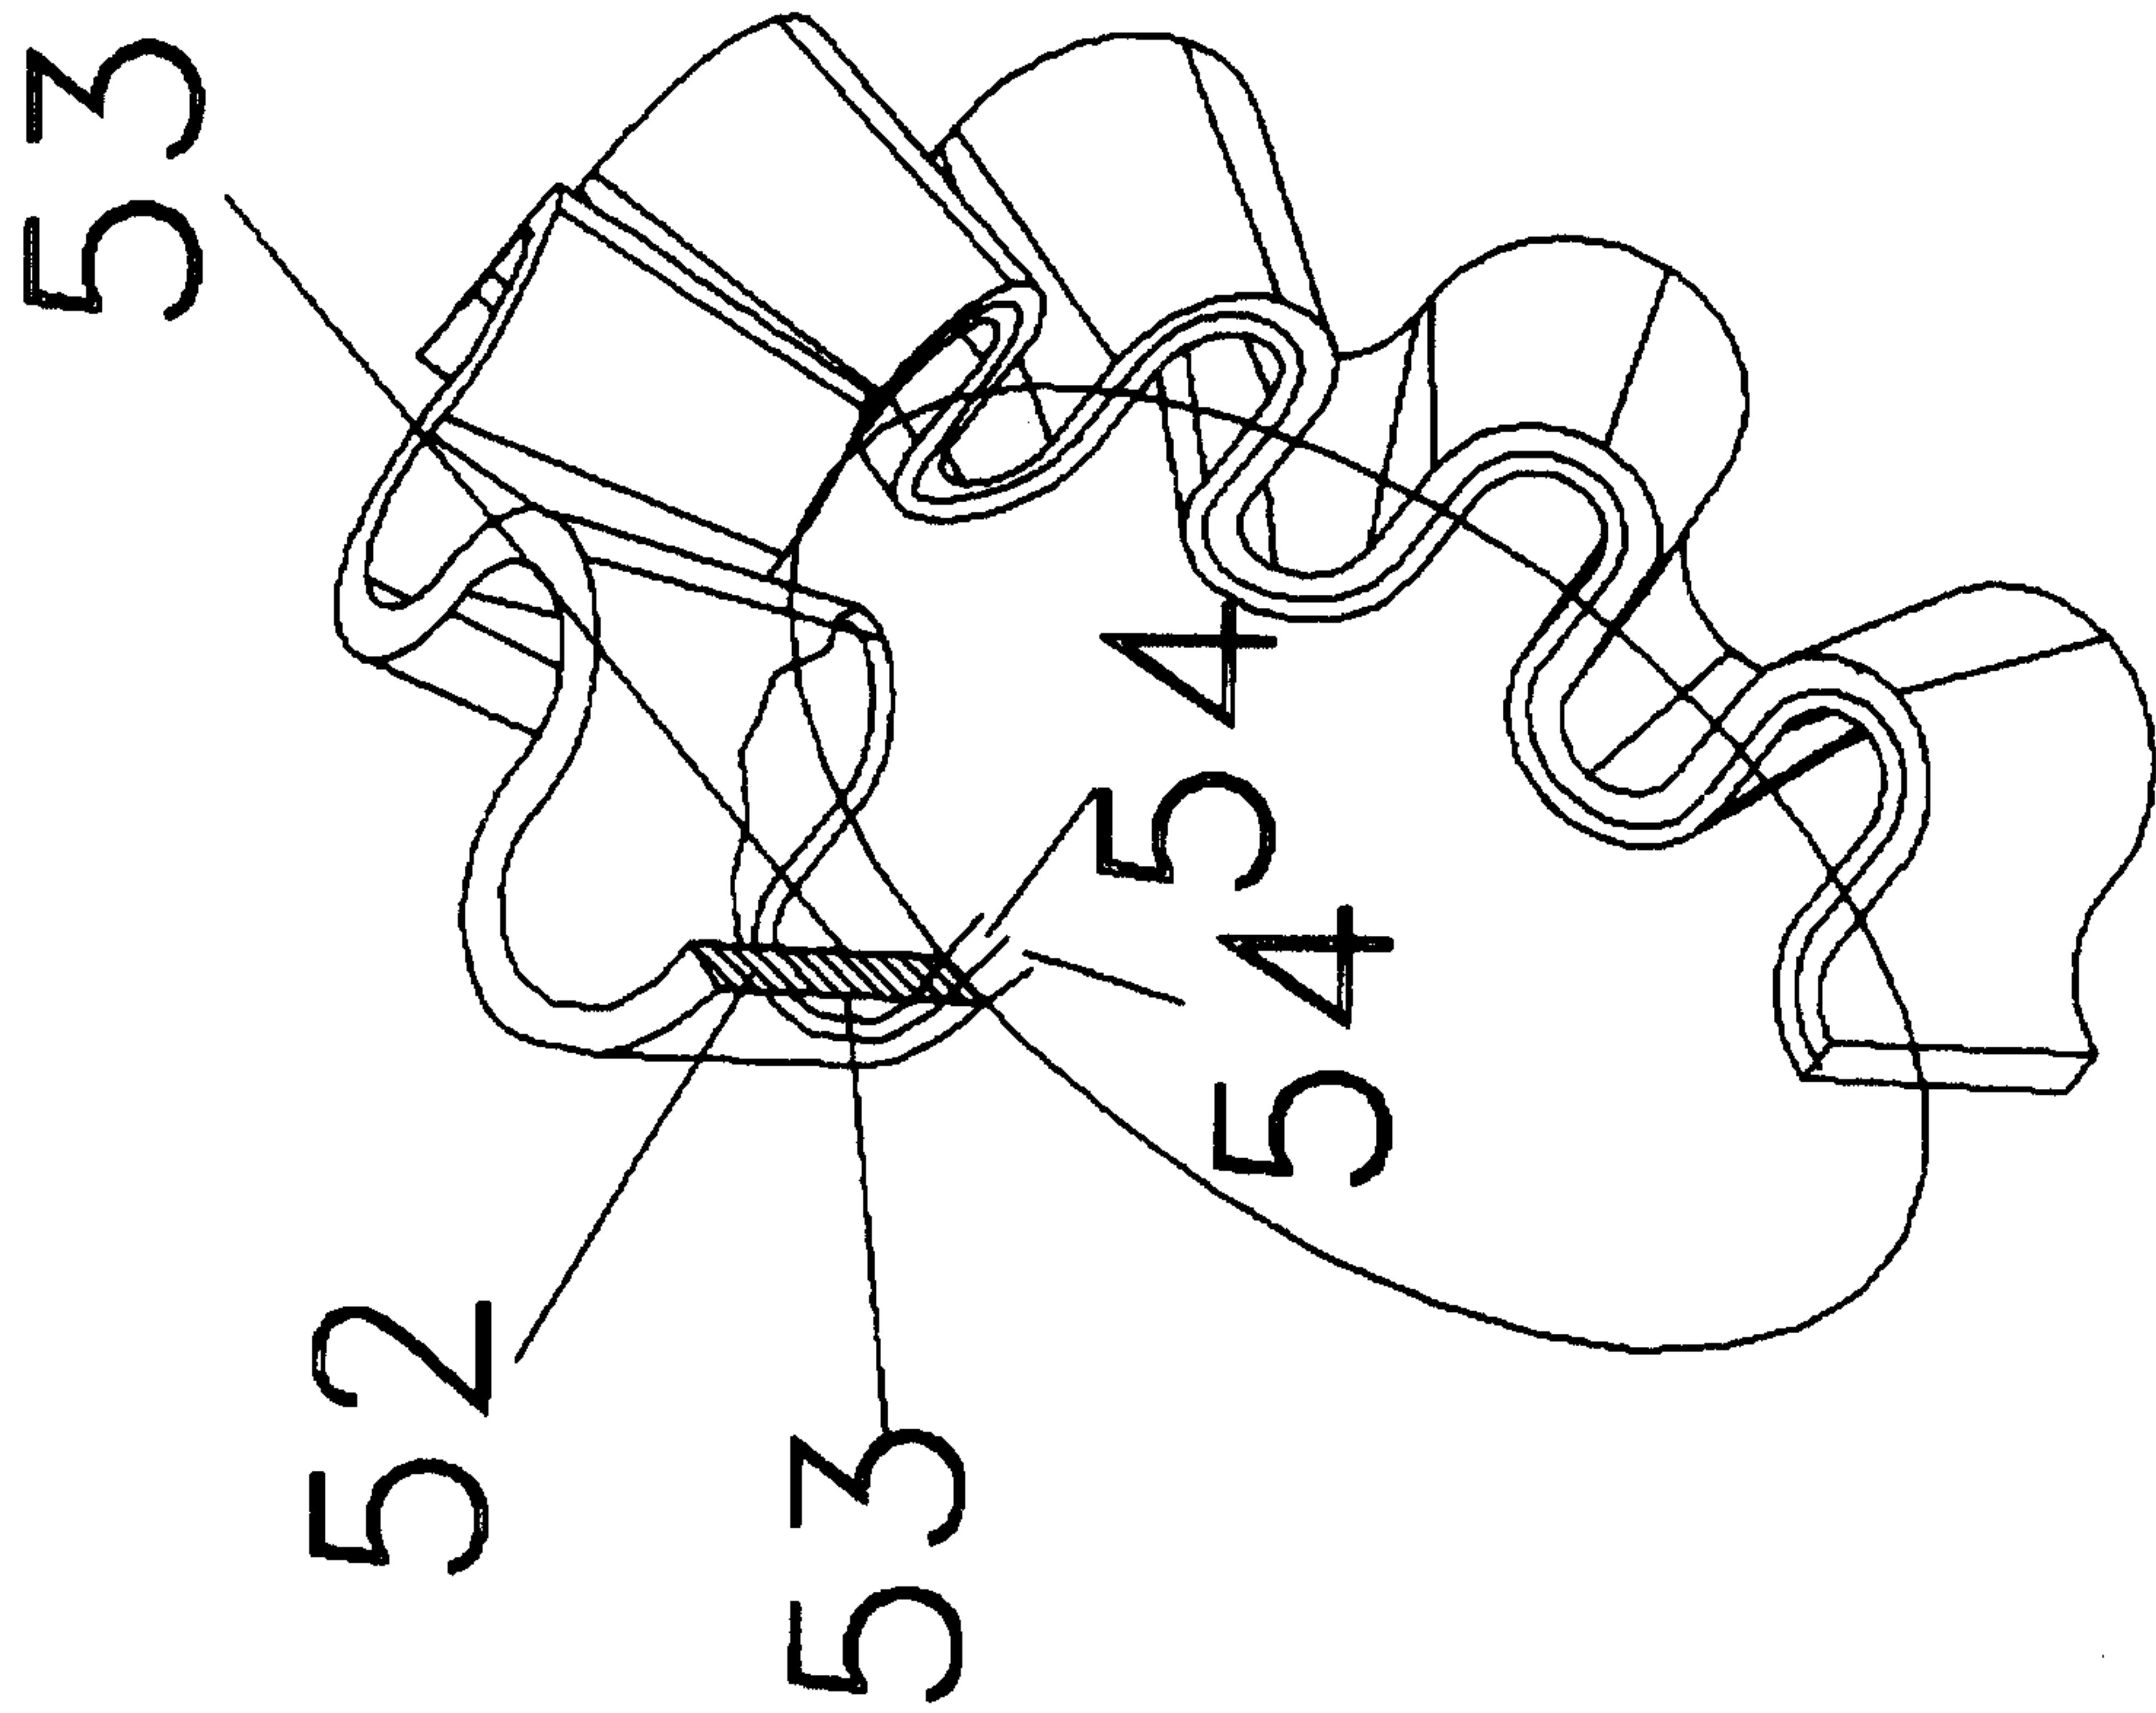
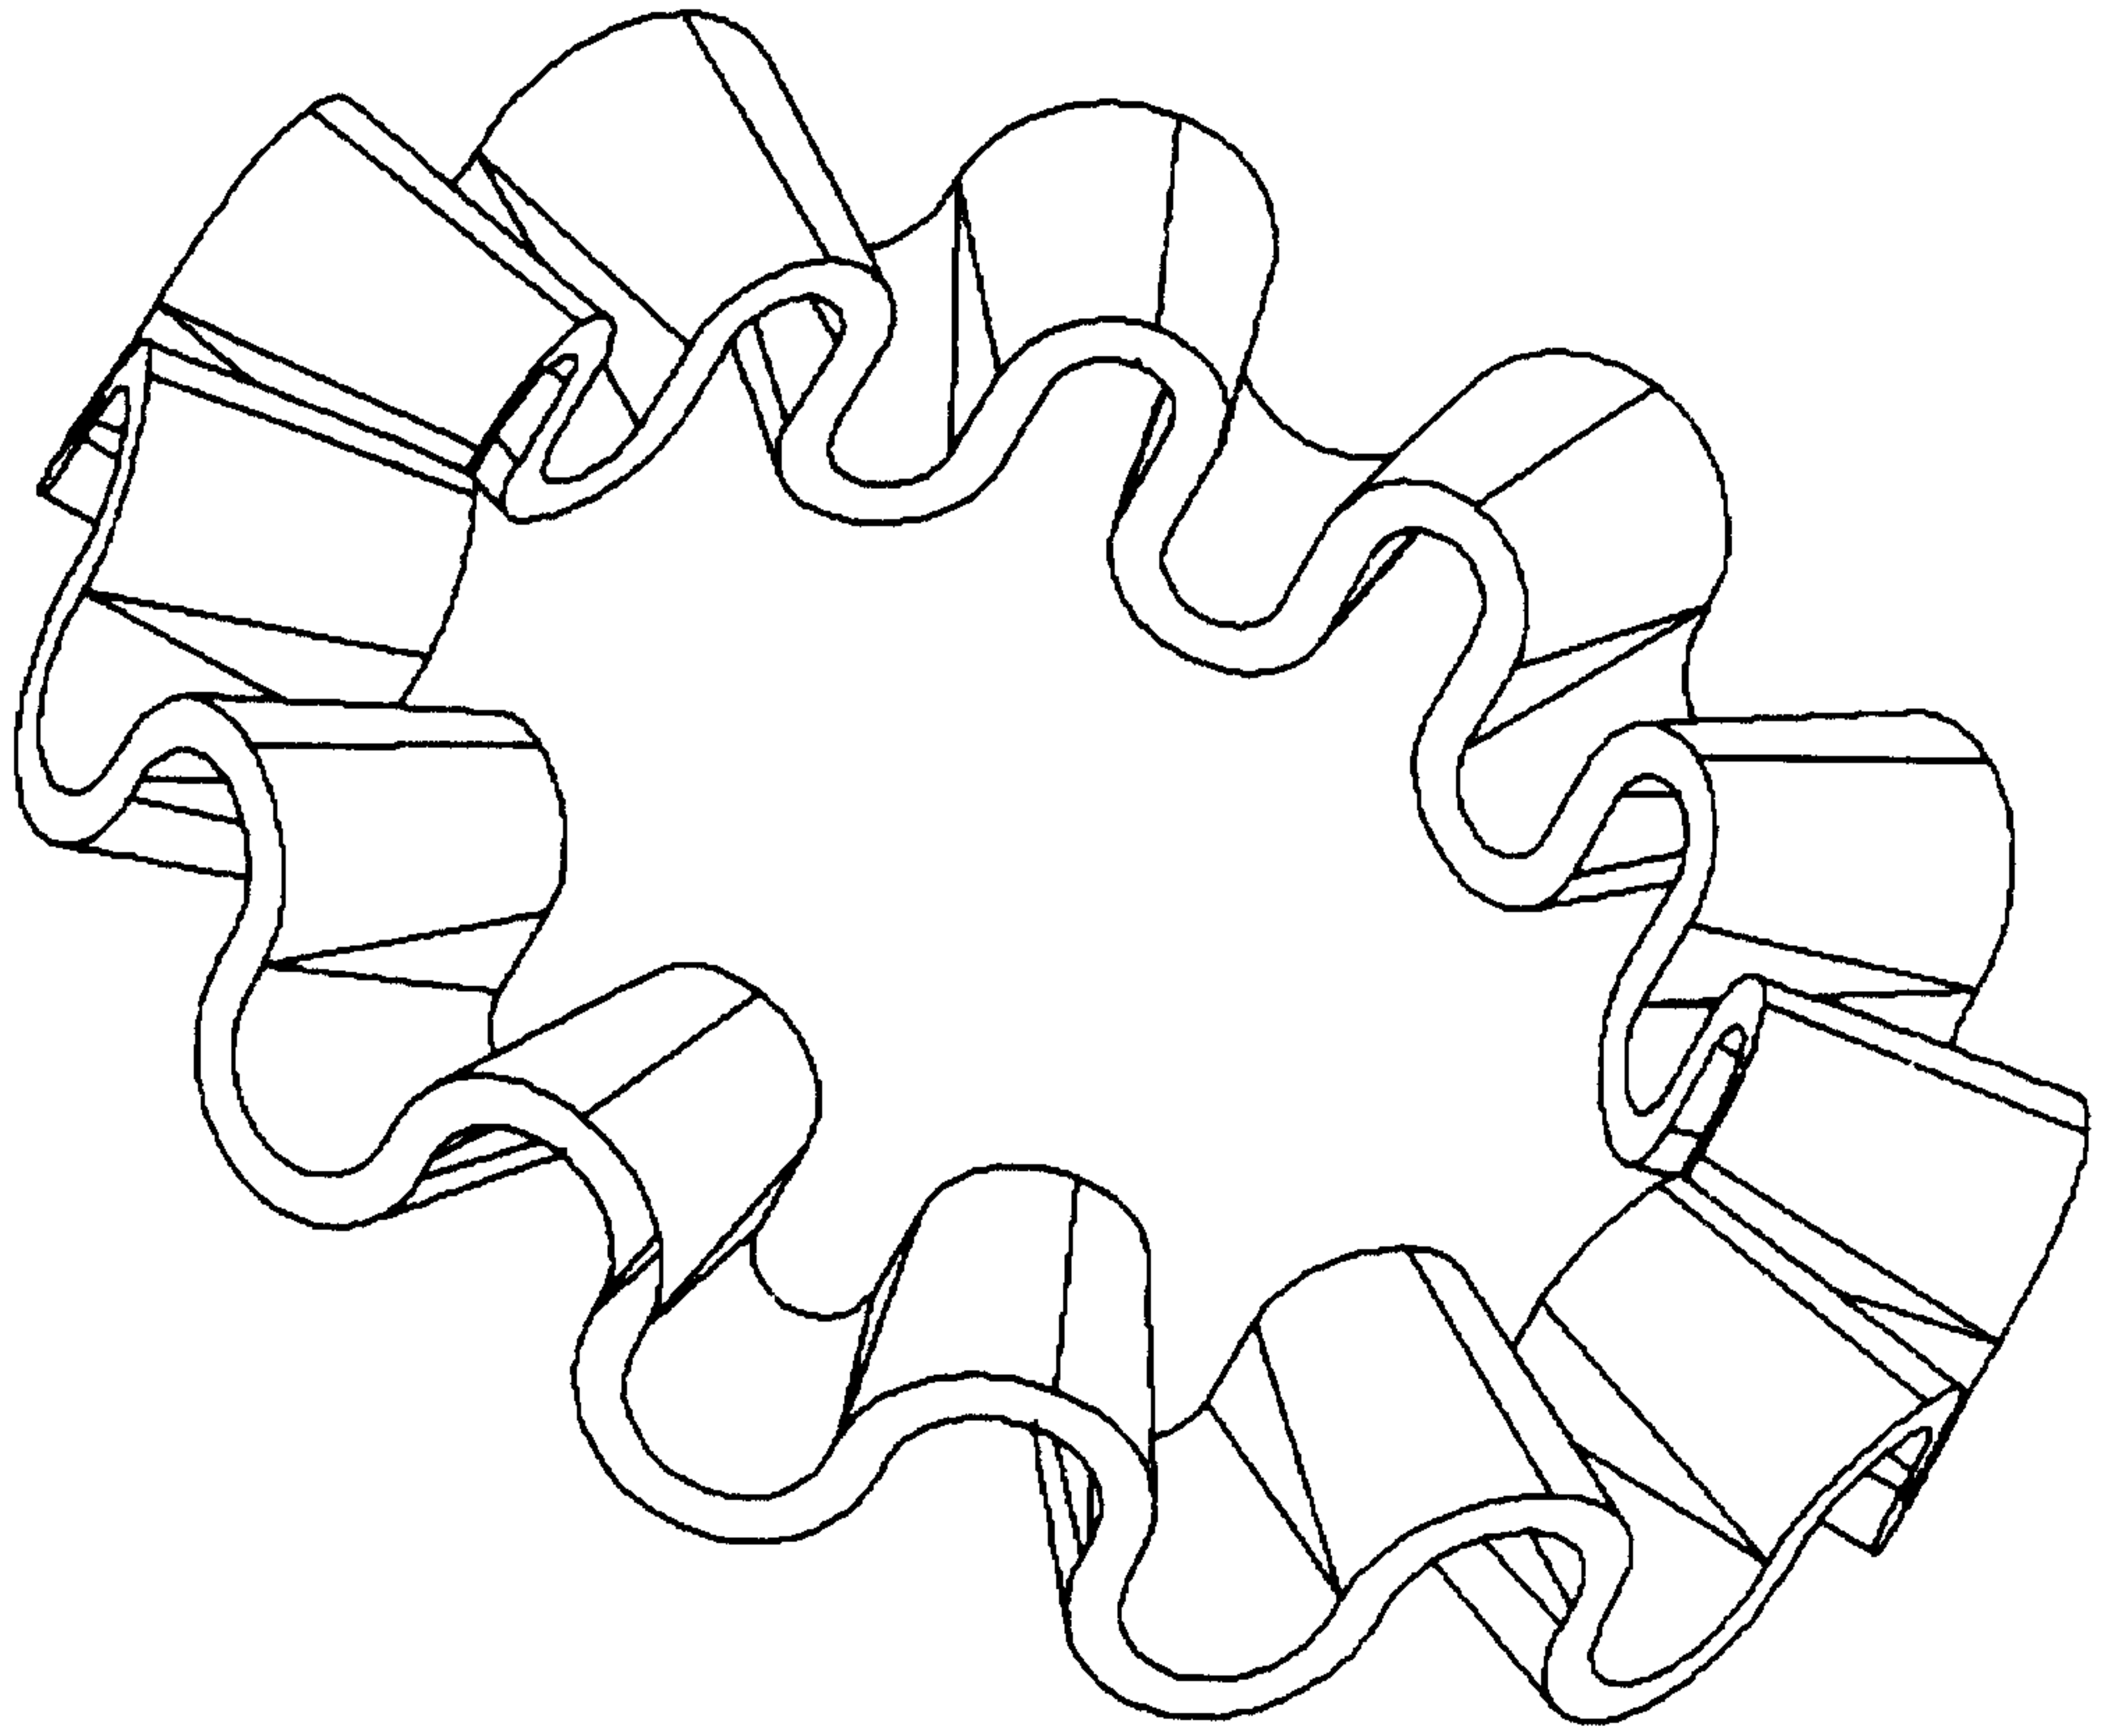


FIG. 9



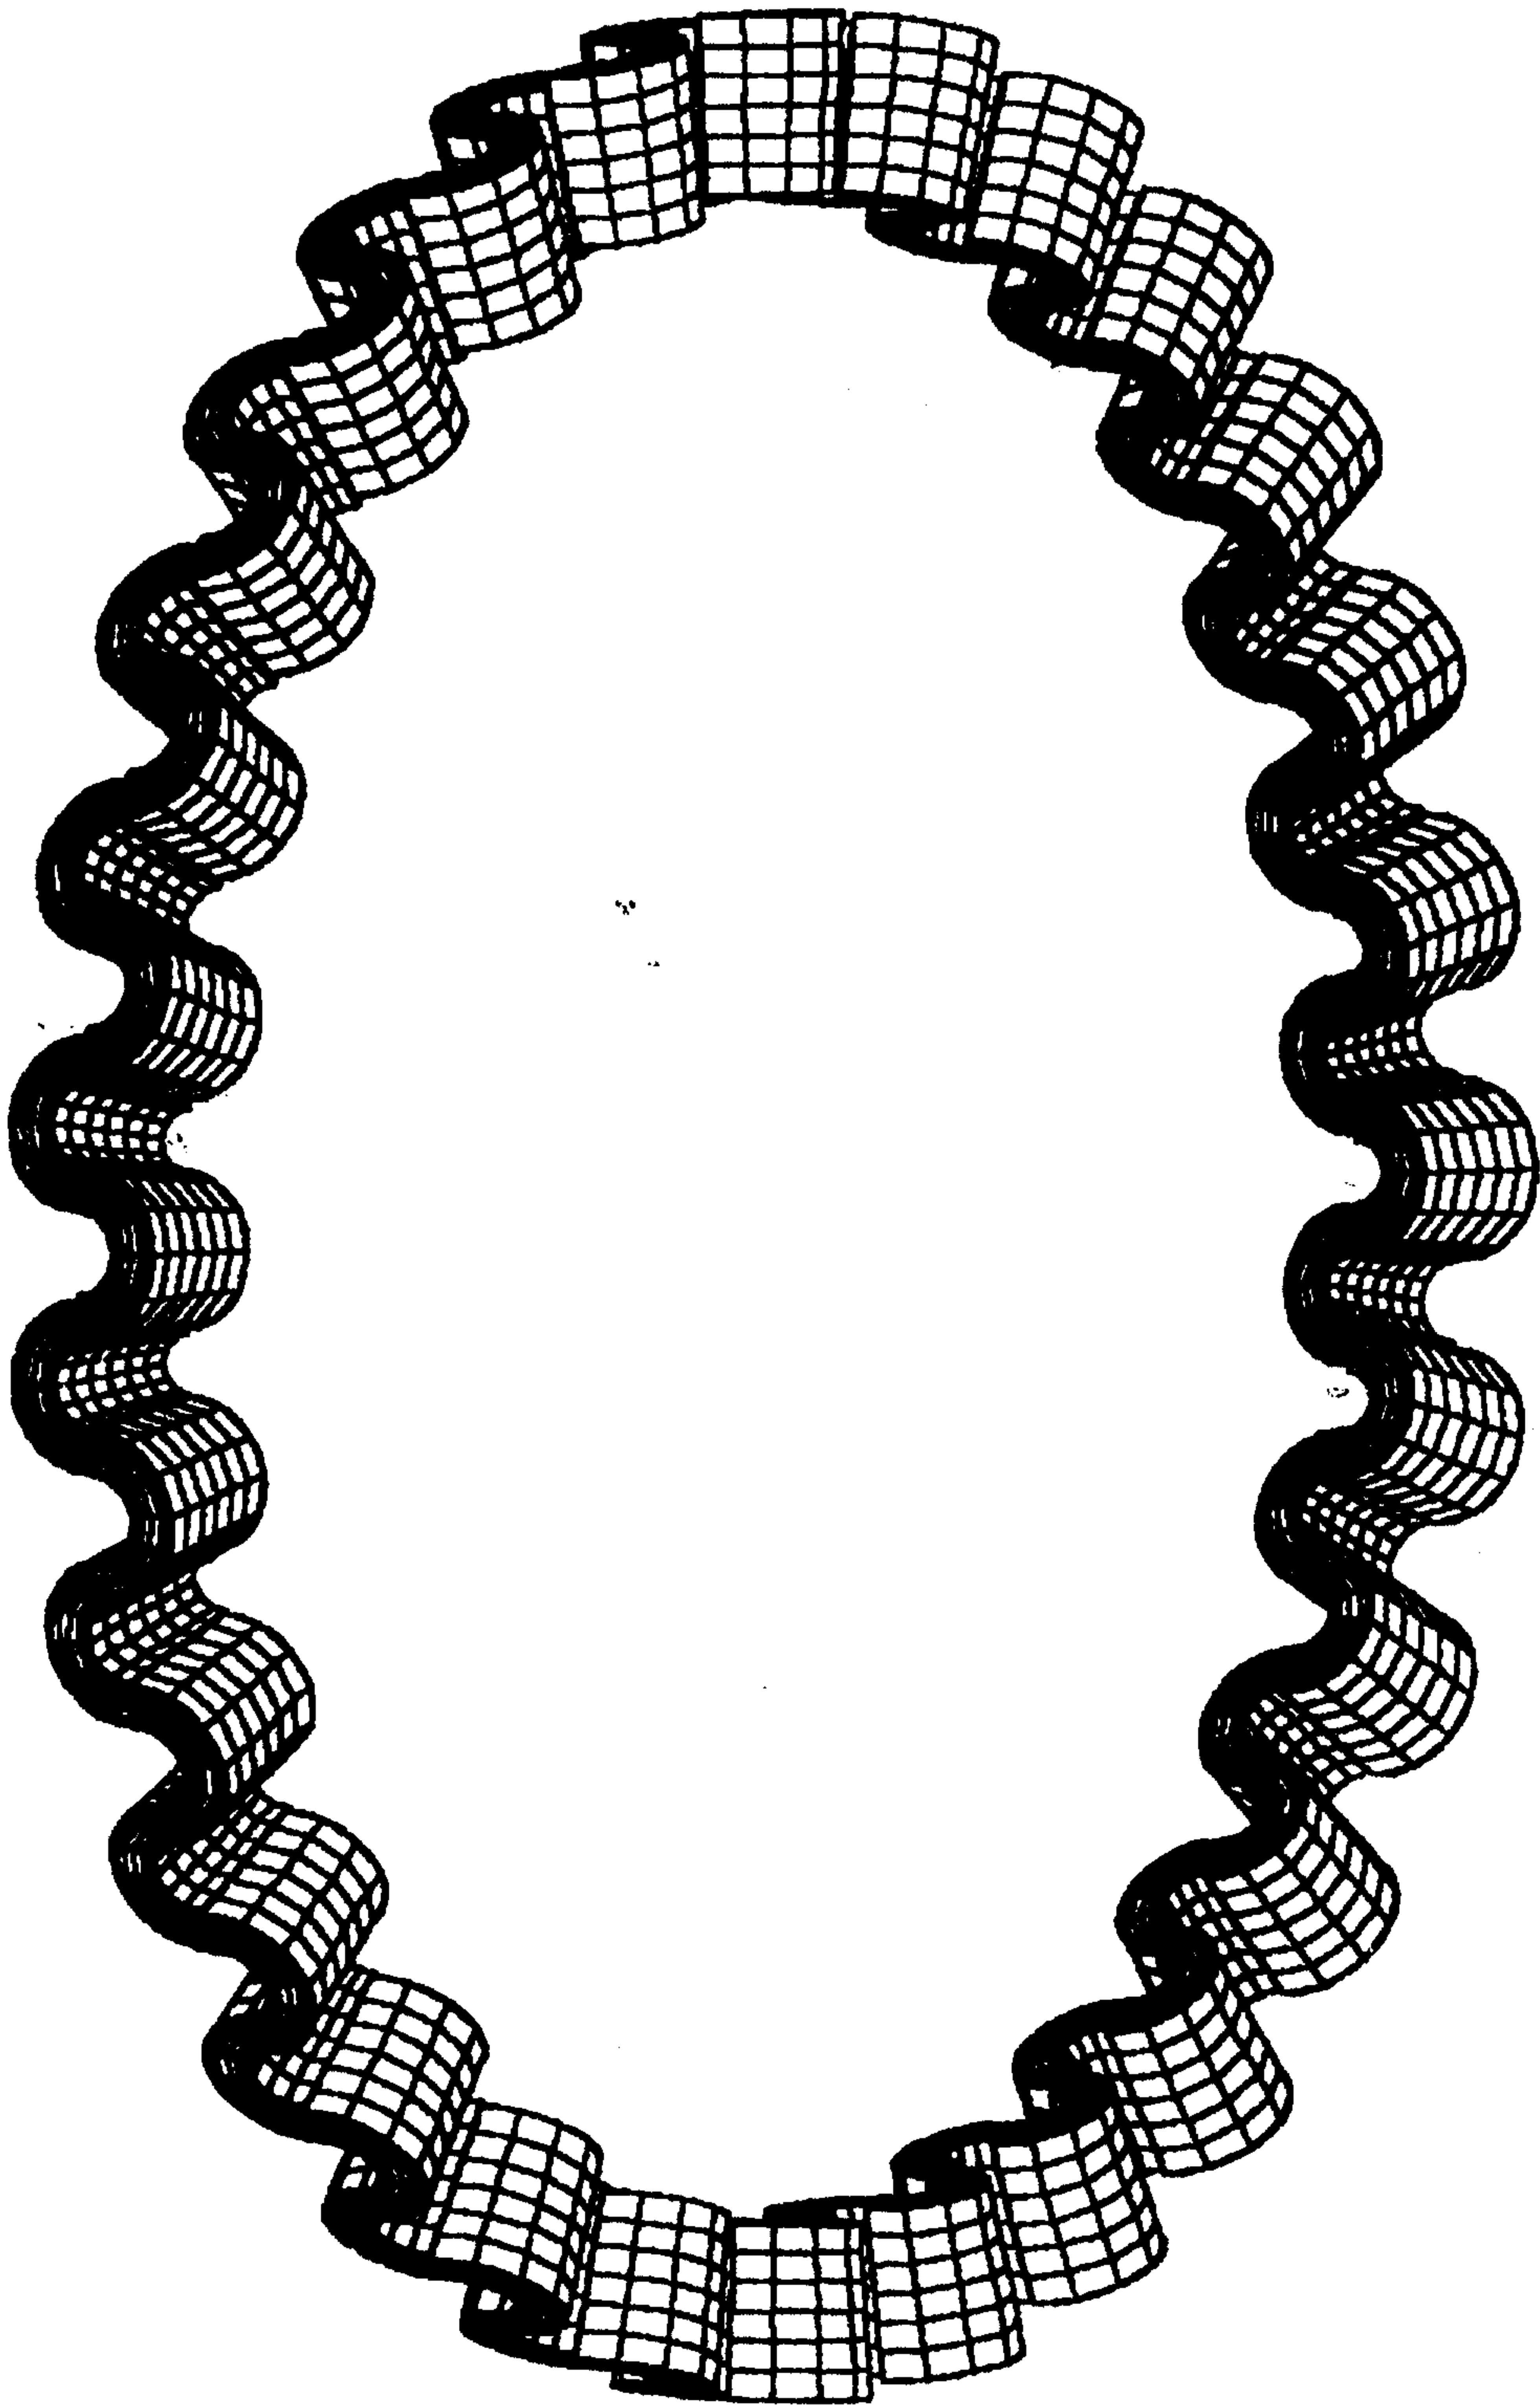


FIG. 10