

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
8 August 2002 (08.08.2002)

PCT

(10) International Publication Number
WO 02/062004 A1

- (51) International Patent Classification⁷: H04L 7/02, (72) Inventor: HENDRICKSON, Norm; 4323 Arrows West Drive, Colorado Springs, CO 80907 (US).
H03D 3/24
- (21) International Application Number: PCT/US02/03432 (74) Agent: IKEHARA, Patrick, Y.; Christie, Parker & Hale, LLP, Post Office Box 7068, Pasadena, CA 91109-7068 (US).
- (22) International Filing Date: 1 February 2002 (01.02.2002)
- (25) Filing Language: English (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (26) Publication Language: English
- (30) Priority Data: 60/266,395 1 February 2001 (01.02.2001) US Published: — with international search report
- (71) Applicant: VITESSE SEMICONDUCTOR CORPORATION [US/US]; 741 Calle Plano, Camarillo, CA 93012 (US). For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RZ RECOVERY

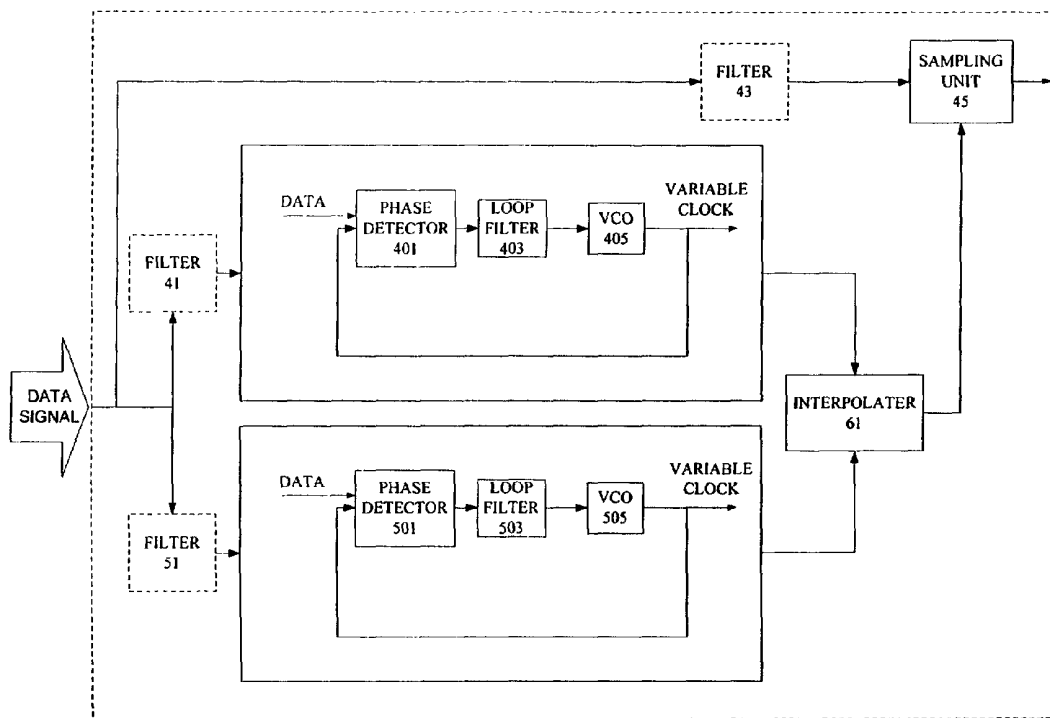

(57) Abstract: A data and clock recovery system adapted for use with RZ data. In one embodiment a phase detector (401) provides phase information for low to high data signal transitions only. In another embodiment a clock recovered from rising transitions is mixed with a clock recovered from falling transitions to form a recovered clock signal.

WO 02/062004 A1

1

RZ RECOVERY

BACKGROUND OF THE INVENTION

5 The present invention relates generally to clock recovery circuits and methods and in particular to systems and methods performing clock recovery for return-to-zero (RZ) serial data streams.

Modern communication systems transfer tremendous amounts of data at ever increasing rates. Various transmission schemes and encoding of data are utilized to assist in the transfer. One particular type of encoding scheme for digital data transmission is an RZ data stream. A RZ data stream transmits digital data in which a logical one and a logical zero are determined based on voltage pulses having certain or specific characteristics. In particular, a logical one or zero is determined by the voltage during a first half of each bit. The signal returns to a resting state, typically zero volts, during the subsequent or remaining half of the bit. Additionally, there are two types of RZ data, a positive logic RZ data and negative logic RZ data.

15 In positive-logic RZ data, a logical zero is represented by a voltage that is more negative or less positive than the voltage that represents a logical one. Conversely, in negative-logic RZ data, a logical zero is represented by a voltage that is more positive or less negative than the voltage that represents a logical one.

Another type of encoding scheme for digital data transmission is a non-return-to-zero (NRZ) data in which a logical one and zero are determined by specific and constant direct-current (DC) voltages. Similar to RZ data, NRZ data has two forms, a positive-logic NRZ data and a negative-logic NRZ data. In positive-logic NRZ data, a logical zero is represented by a voltage that is more negative or less positive than the voltage that represents a logical one. Likewise, in negative-logic NRZ data, the logical zero is represented by a voltage that is more positive or less negative than the voltage that represents a logical one.

25 Typically, the data stream transmitted in either form, as RZ or NRZ data, is transferred optically and then converted to electrical signals. Subsequently, clock and data information are retrieved from the converted electrical signals. However, optimizing the retrieval of clock and data information from the converted electrical signals is sometimes difficult.

30

SUMMARY OF THE INVENTION

The present invention provides a return-to-zero recovery system that optimizes data re-timing and improves signal to noise ratio for data recovery.

35 In one aspect the present invention provides a return-to-zero (RZ) recovery system. The return-to-zero recovery system in one embodiment comprises a filter configured to receive a data signal and to reduce high frequency components from the data signal to form a filtered data

1 signal and a recovery unit configured to receive the filtered data signal identify a first type of data transition and provide phase information when the first type of data transition is identified.

In a further aspect the present invention provides a method of sampling return-to-zero data. In one embodiment the method comprises receiving a data signal; identifying a transition
5 to a second data state from a first data state; and providing phase information when the transition is identified.

In a further aspect the present invention provides a method of sampling return-to-zero data. In one embodiment the method comprises determining first phase information from a data signal when a first type of data transition occurs; determining second phase information from
10 a data signal when a second type of data transition occurs; generating a first clock signal based on the first phase information; generating a second clock signal based on the second phase information; generating a third clock signal based on the first and second clock signals.

In a further aspect the present invention provides a return-to-zero (RZ) recovery system. In one embodiment the system comprises first recovery unit configured to receive a data signal and identifying a first type of data transition and determining a first phase information when
15 the first type of data transition is identified; and second recovery unit configured to receive the data signal and identifying a second type of data transition and determining second phase information when the second type of data transition is identified.

These and other aspects of the present invention will be more readily understood upon
20 review of the accompanying drawings and following detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of an embodiment of a receiving unit with a clock and data recovery unit;

25 FIG. 2 is a block diagram of an embodiment of a clock and data recovery unit;

FIG. 3 is a block diagram of a multiple recovery unit clock signal provider adapted for use with RZ data systems; and

FIG. 4 is a block diagram of a receiver with multiple CRU instantiations.

30 DETAILED DESCRIPTION

In FIG. 1, a return to zero (RZ) optical pulse waveform is supplied as an input to a receiver 3. The receiver 3 includes a low-pass filter 31 and a non-return to zero (NRZ) clock and a clock and data recovery unit 33. The RZ optical pulse waveform is provided to the low pass filter. The low pass filter removes or attenuates the high frequency components in the RZ
35 waveform. As such, the RZ waveform is largely transformed into a NRZ signal. The NRZ signal is supplied to the clock and data recovery (CDR) unit. The CDR unit extracts the clock

1 signal encoded in the NRZ signal. Hence, a local clock at the receiver is synchronized to the extracted clock signal.

5 The low-pass filter, by removing or attenuating high frequency components contained in the received RZ waveform performs two functions. The first function is a validation function that detects or qualifies that a one or high level is valid when a specific voltage level is maintained for a specific amount of time. In other words, transient high voltages are filtered out, and do not result in false data readings or otherwise impact system operation. In addition the slope of the rising and falling edges of waveform are somewhat flattened, potentially increasing the size of the data eye. The second function is a phase function that maintains or
10 adjusts the RZ waveform to have a one to zero transition time at approximately the same position with respect to the bit time as a zero to one data transition. A potential problem with the low-pass filter performing both functions, however, is that sharp transitions in the data-eye are blurred, with negative effects on data-eye shape.

15 In one embodiment, the CDR unit performs the phase function. Thus, the cut-off frequency of the low-pass filter may be increased, allowing increased frequency components of the signal to improve the shape of the data-eye. The low-pass filter can therefore be optimized to achieve optimal results for the validation function without having to provide a trade off to achieve optimal results to perform the phase function.

20 In one embodiment, the CDR unit receives RZ waveform as an input. The RZ waveform has zero to one data signal transitions spaced nominally at the start of the bit period. However, one to zero data signal transitions occur at normally less than half the bit period after the zero to one data signal transition. The CDR unit rejects phase information, or alternatively does not perform comparisons to obtain phase information, except at zero to one data signal transitions. As such, the phase detector operates only when data bits prior to and following a perceived zero
25 to one data transition occurs.

FIG. 2 illustrates a block diagram of an embodiment of a CDR unit in accordance with the present invention. In FIG. 2, the CDR unit includes a phase detector 301, an inhibitor 303, a loop filter 305 and a voltage controlled oscillator (VCO) 307. The CDR unit receives a data signal and a reference clock signal, and generates an output clock signal. The phase detector
30 detects the amount by which the phase of the recovered clock signal leads or lags the phase of the transmitted data signal. The phase detector receives the data signal and the output clock signal and generates a phase difference signal. In various embodiments the phase difference signal is based on up/down signals, increment/decrement signals, or other signals, depending on specific PLL, or DPLL implementations. The phase difference signal is proportional to the
35 difference in phase between the transmitted data signal and the output clock signal. The phase difference signal is provided to the inhibitor.

1 The inhibitor receives the data signal and determines if a zero to one data transition has
occurred. If a zero to one data transition has occurred, the inhibitor provides the phase
difference signal to the loop filter. Otherwise, the inhibitor does not provide the phase
difference signal to the loop filter. In one embodiment, this is accomplished using shift registers
5 and simple logic, although in other embodiments various circuitry is utilized. In one
embodiment, circuitry for performing the inhibitor function is contained within the phase
detector block.

 The loop filter filters the phase difference signal and provides the filtered phase
difference signal to the VCO as a control voltage signal. The VCO generates the output clock
10 signal based on the filtered phase difference signal. The VCO adjusts the oscillation frequency
of the output clock signal based on the filtered phase difference signal.

 If the phase of the reference clock signal leads the phase of the shifted output clock
signal, the filtered phase difference signal indicates a need for a phase shift, i.e., for the shifted
variable clock signal to speed up. On the other hand, if the phase of the reference clock signal
15 lags behind the phase of the shifted variable clock signal, the filtered phase difference signal
indicates a need for a phase shift, i.e., for the shifted variable clock signal to slow down.

 In another embodiment, the inhibitor is placed before the phase detector instead of after
the phase detector. The inhibitor receives the data signal and determines if a zero to one data
transition occurs. If a zero to one data transition occurs, the inhibitor provides the data signal
20 to the phase detector. Otherwise, the inhibitor does not provide the data signal to the phase
detector. Subsequently, the phase detector provides a phase difference signal to the loop filter.
In various embodiments, the CDR unit is composed of analog components and/or digital
components.

 In FIG. 3, a data signal, e.g., an RZ data signal, is supplied to a first recovery unit 21 and
25 a second recovery unit 23. The first recovery unit extracts a first clock signal from the data
signal. Similarly, the second recovery unit extracts a second clock signal from the data signal.
The first and second clock signals are provided to an adder or interpolator 25. The interpolator
provides an output clock signal based on the first and second clock signals.

 In one embodiment, the first recovery unit receives an RZ data signal and recovers a
30 clock signal from the RZ data signal based on rising edge signal transitions. Thus, in some
embodiments the first recovery unit rejects phase information, or alternatively does not perform
comparisons to obtain phase information, except at zero to one data transitions. As such, for
example, a phase detector of the first recovery unit provides for phase adjustment around a
perceived zero to one data transition. The first clock signal is therefore adjusted to be in phase
35 with the zero to one transitions in the RZ data signal.

1 The second recovery unit also receives the RZ data signal and recovers a clock signal
from the RZ data based on falling edge signal transitions. Thus, in some embodiments the
second recovery unit rejects phase information, or alternatively does not perform comparisons
to obtain phase information, except at one to zero data transitions. As such, for example, a
5 phase detector of the second recovery unit provides for phase adjustment when data bits around
a perceived one to zero data transition. The second clock signal is therefore adjusted to be in
phase with the one to zero transitions in the RZ data signal.

 The interpolator adds the first clock signal and the second clock signal to form an output
clock signal. The first clock signal and the second clock signal have rising edges bounding an
10 expected data eye of the RZ data signal. The output clock signal, formed by combining the first
clock signal and the second clock signal, has a rising edge, or is in phase with, the expected data
eye of the RZ data signal. In some embodiments the combining of the first clock signal and the
second clock signal is performed using weighted summers, which also allows for some further
phase shift in the output clock signal to more accurately sample in the middle of the data eye.

15 FIG. 4 illustrates a block diagram of an embodiment of a receiver in accordance with
the present invention. In FIG. 4, the receiver receives a data signal. In one embodiment, the
data signal is an RZ data signal. The data signal is supplied to two clock recovery units. A first
clock recovery unit includes a phase detector 401, a loop filter 403 and a voltage controlled
oscillator (VCO) 405. A second clock recovery unit includes a phase detector 501, a loop filter
20 503 and a VCO 505.

 The recovery units generate clock signals that are supplied to an interpolator 61. The
interpolator, in one embodiment, compares or adds the clock signals together to generate an
output clock signal. The output clock signal is supplied to a sampling unit or an output buffer
45. The output buffer generates a data signal based on the output clock signal and the incoming
25 data signal.

 The phase detector 401 receives the data signal and the clock signal generated by the
VCO 405. The phase detector 401 determines if a zero to one data transition has occurred. If
a zero to one data transition has occurred, the phase detector determines whether the rising edge
of the clock signal is early or late with respect to the data transition and generates a phase
30 difference signal. In one embodiment, if the rising edge of the clock signal is early, a slow, or
down, signal is generated. If the rising edge of the clock signal is late a fast, or up, signal is
generated. The up/down signals are provided to the loop filter 403. Thus, the phase detector
401 may be viewed in one embodiment as a rising edge phase detector.

 In an alternative embodiment, the phase detector determines a phase difference between
35 the data signal and the clock signal. In other words, the phase detector determines the amount
by which the phase of the clock signal leads or lags the phase of the data signal, about zero to

1 one transitions in the data signal. The phase detector generates a phase difference signal that, in one embodiment, is proportional to the difference in phase between the data signal and the recovered clock signal. In the alternative embodiment, the phase difference signal is provided to the loop filter.

5 Returning to FIG. 4, the loop filter filters the up/down signals and provides a filtered up/down signal to the VCO 405. The VCO generates the clock signal based on the up/down signal. As such, the VCO adjusts the oscillation frequency of the output clock signal based on the filtered up/down signal. The clock signal is supplied to the interpolator 61.

10 The phase detector 501 receives the data signal and the clock signal generated by the VCO 505. The phase detector 501 determines if a one to zero data transition has occurred. If a one to zero data transition has occurred, the phase detector determines whether the rising edge of the clock signal is early or late with respect to the data transition and generates a phase difference signal. In one embodiment, if the rising edge of the clock signal is early, a slow, or down, signal is generated. If the rising edge of the clock signal is late a fast, or up, signal is generated. The up/down signals are provided to the loop filter 503. Thus, the phase detector 501 may be viewed in one embodiment as a falling edge phase detector.

15 In an alternative embodiment, the phase detector determines a phase difference between the data signal and the clock signal. In other words, the phase detector determines the amount by which the phase of the clock signal leads or lags the phase of the data signal, about zero to one transitions in the data signal. The phase detector generates a phase difference signal that, in one embodiment, is proportional to the difference in phase between the data signal and the recovered clock signal. In the alternative embodiment, the phase difference signal is provided to the loop filter.

20 Referring back to FIG. 4, the loop filter filters the up/down signals and provides the filtered up/down signal to the VCO 505. The VCO generates the clock signal based on the filtered up/down signal. As such, the VCO adjusts the oscillation frequency of the output clock signal based on the filtered up/down signal. The clock signal is supplied to the interpolator 61. In one embodiment, a plurality of phase-shifted clock signals are provided by a single VCO. The frequency of the VCO, for example, is controlled or determined by the rising edge phase detector. The falling edge phase detector outputs are used in forming a selection signal used to select one of the clock signals provided by the VCO.

25 The interpolator additively mixes the clock signals from the VCOs to form an output clock signal. The output clock signal is provided to the sampling unit. The sampling unit recovers data from the data signal, and, for example, forms an NRZ data signal.

30 In one embodiment, a filter 43 filters the RZ data signal provided to the sampling unit. The filter filters out the high frequency components of the data signal, and thereby stretches out

1 the data eye of the data signal. Thus, the sampling area of the data eye available to recover the
data becomes larger and thereby sampling is easier to perform. In such a variation, the filter
43 also filters, in one embodiment, the RZ data signal provided to the rising edge phase detector
and the falling edge phase detector to allow for phase shifts in the data eye due to the filter. In
5 a further embodiment filters 41 and 51 are also available to filter the data signals provided to
the clock recovery units. In operation the use of such filters may allow for optimal stretching
of the RZ signal to form an NRZ type signal used by the clock recovery units for clock
recovery.

10 Accordingly, the present invention provides for RZ recovery. Although this invention
has been described in certain specific embodiments, many additional modifications and
variations would be apparent to those skilled in the art. It is therefore to be understood that this
invention may be practiced otherwise than as specifically described. Thus, the present
embodiments of the invention should be considered in all respects as illustrative and not
restrictive.

15

20

25

30

35

1 CLAIMS:

1. A return-to-zero (RZ) recovery system comprising:
filter configured to receive a data signal and to reduce high frequency components from
5 the data signal to form a filtered data signal;
recovery unit configured to receive the filtered data signal identify a first type of data
transition and provide phase information when the first type of data transition is identified.
2. The system of claim 1 wherein the first type of data transition is a logical one to
10 a logical zero transition.
3. The system of claim 1 wherein the first type of data transition is a logical zero to
a logical one transition.
4. The system of claim 1 wherein the filter is a low pass filter.
15
5. The system of claim 4 wherein the data signal is a RZ data signal and the filter
is further configured to convert the RZ data signal into a non-return-to-zero (NRZ) data signal.
6. The system of claim 1 wherein the filter qualifies that a logical one is valid when
20 a specific voltage level is maintained for a specific amount of time.
7. The system of claim 1 wherein the recovery unit adjusts the data signal based on
the occurrence of the first and second data transitions.
25
8. The system of claim 1 wherein the recovery unit comprises phase detector
determining phase difference between a recovered clock signal and the data signal.
9. The system of claim 8 wherein the phase detector generates a phase difference
30 signal based on the determined phase difference.
10. The system of claim 9 wherein the phase difference signal is proportional to
determined phase difference.
35

1 11. The system of claim 8 wherein the recovery unit further comprises an inhibitor receiving a phase difference signal and the data signal, the inhibitor determining if the first type of data transition has occurred.

5 12. The system of claim 11 wherein the recovery unit further comprises loop filter receiving the phase difference signal from the inhibitor if the first type of data transition has occurred.

10 13. The system of claim 12 wherein the recovery unit further comprises a oscillator and wherein the loop filter filters the phase difference signal and provides the filtered phase difference signal to the oscillator.

15 14. The system of claim 13 wherein the filtered phase difference signal acts as a control voltage to the oscillator.

 15. The system of claim 13 wherein the oscillator generates the recovered clock signal based on the filtered phase difference signal.

20 16. The system of claim 13 wherein the oscillator adjusts the frequency of the recovered clock signal based on the filtered phase difference signal.

25 17. The system of claim 1 wherein the recovery unit comprises phase detector determining a phase difference between a recovered clock signal and the data signal when the first type of data transition has occurred.

 18. The system of claim 17 wherein the phase detector determines if the first type of data transition has occurred.

30 19. The system of claim 1 wherein the recovery unit comprises inhibitor receiving the data signal and determines if the first type of data transition occurs.

 20. The system of claim 19 wherein the recovery unit comprises a phase detector and wherein the inhibitor provides the data signal to the phase detector when the first type of data transition occurs.

35 21. A method of sampling return-to-zero phase data, the method comprising:

- 1 receiving a data signal;
identifying a transition to a second data state from a first data state; and
providing phase information when the transition is identified.
- 5 22. The method of claim 21 wherein the data signal is a return-to-zero data signal.
23. The method of claim 22 further comprising converting the return-to-zero data
signal to a non-return-to-zero data signal.
- 10 24. The method of claim 23 further comprising removing high frequency components
on the return-to-zero data signal.
25. The method of claim 24 further comprising:
identifying a second transition to the first data state from the second data state; and
15 providing phase information when the second transition is identified.
26. The method of claim 25 further comprising generating a clock signal based on the
provided phase information.
- 20 27. The method of claim 26 wherein the transition is a rising edge data transition.
28. The method of claim 26 wherein the second transition is a falling edge data
transition.
- 25 29. A method of sampling return-to-zero data, the method comprising:
determining first phase information from a data signal when a first type of data transition
occurs;
determining second phase information from a data signal when a second type of data
transition occurs;
30 generating a first clock signal based on the first phase information;
generating a second clock signal based on the second phase information; and
generating a third clock signal based on the first and second clock signals.
- 35 30. The method of claim 29 further comprising sampling the data signal based on the
third clock signal.

1 31. The method of claim 30 wherein the data signal being a RZ data signal and
converting the data signal to a non-return-to-zero data signal.

5 32. The method of claim 29 wherein the third clock signal is an interpolation of the
first and second clock signals.

10 33. A return-to-zero (RZ) recovery system comprising:
first recovery unit configured to receive a data signal and identifying a first type of data
transition and determining a first phase information when the first type of data transition is
identified; and

second recovery unit configured to receive the data signal and identifying a second type
of data transition and determining second phase information when the second type of data
transition is identified.

15 34. The system of claim 33 wherein the first recovery unit generates a first recovered
clock signal based on the determined first phase information and the second recovery unit
generates a second recovered clock signal based on the determined second phase information.

20 35. The system of claim 34 further comprising a interpolator generating a third
recovered clock signal based on the first recovered clock signal and the second recovered clock
signal.

25 36. The system of claim 35 wherein the third recovered clock signal is an additive
result of the first and the second recovered clock signals.

30 37. The system of claim 35 wherein the third recovered clock signal is an
interpolation of the first and second recovered clock signal.

35 38. The system of claim 35 wherein the data signal is a RZ data signal and the system
further comprises a sampling unit and a filter, the filter converting the RZ data signal into a
non-return-to-zero (NRZ) data signal and providing the NRZ data signal to the sampling unit.

 39. The system of claim 38 wherein the sampling unit samples the data signal using
the third recovered clock signal from the interpolator.

1 40. The system of claim 34 wherein the data signal is a RZ data signal and the system further comprises a sampling unit and a filter, the filter converting the RZ data signal into a non-return-to-zero (NRZ) data signal and providing the NRZ data signal to the first recovery unit.

5

 41. The system of claim 40 wherein the second recovery unit is disabled.

 42. The system of claim 33 wherein the first type of data transition is a low voltage to a high voltage transition.

10

 43. The system of claim 33 wherein the second type of data transition is a high voltage to a low voltage transition.

15

 44. The system of claim 33 wherein a high voltage is a voltage that is greater than the low voltage.

 45. The system of claim 33 wherein the first type of data transition is a rising edge data transition.

20

 46. The system of claim 33 wherein the second type of data transition is a falling edge data transition.

25

 47. The system of claim 33 wherein the data signal is a RZ data signal and the system further comprises a filter to convert the RZ data signal into a non-return-to-zero (NRZ) data signal and the filter provides the NRZ data signal to one of the first and second recovery units.

 48. The system of claim 33 wherein the first recovery unit comprises a first phase detector determining phase difference between a first recovered clock signal and the data signal.

30

 49. The system of claim 48 wherein the phase detector generates a phase difference signal based on the determined phase difference.

35

 50. The system of claim 49 wherein the phase difference signal is proportional to determined phase difference.

1 51. The system of claim 49 wherein the first recovery unit further comprises first loop
filter receiving the phase difference signal from the first phase detector.

5 52. The system of claim 49 wherein the first recovery unit further comprises a
oscillator and wherein the first loop filter filters the phase difference signal and provides the
filtered phase difference signal to the oscillator.

10 53. The system of claim 52 wherein the oscillator generates the first recovered clock
signal based on the filtered phase difference signal.

15 54. The system of claim 53 wherein the oscillator adjusts the frequency of the first
recovered clock signal based on the filtered phase difference signal.

20 55. The system of claim 33 wherein the second recovery unit comprises a second
phase detector determining phase difference between a second recovered clock signal and the
data signal.

25 56. The system of claim 55 wherein the phase detector generates a phase difference
signal based on the determined phase difference

30 57. The system of claim 56 wherein the second recovery unit further comprises
second loop filter receiving the phase difference signal from the second phase detector.

35 58. The system of claim 57 wherein the first recovery unit further comprises an
oscillator and wherein the second loop filter filters the phase difference signal and provides the
filtered phase difference signal to the oscillator.

 59. The system of claim 58 wherein the oscillator generates the second recovered
clock signal based on the filtered phase difference signal.

 60. The system of claim 58 wherein the oscillator adjusts the frequency of the second
recovered clock signal based on the filtered phase difference signal.

 61. The system of claim 35 further comprises a sampling unit sampling the data signal
using the third recovered clock signal from the interpolator.

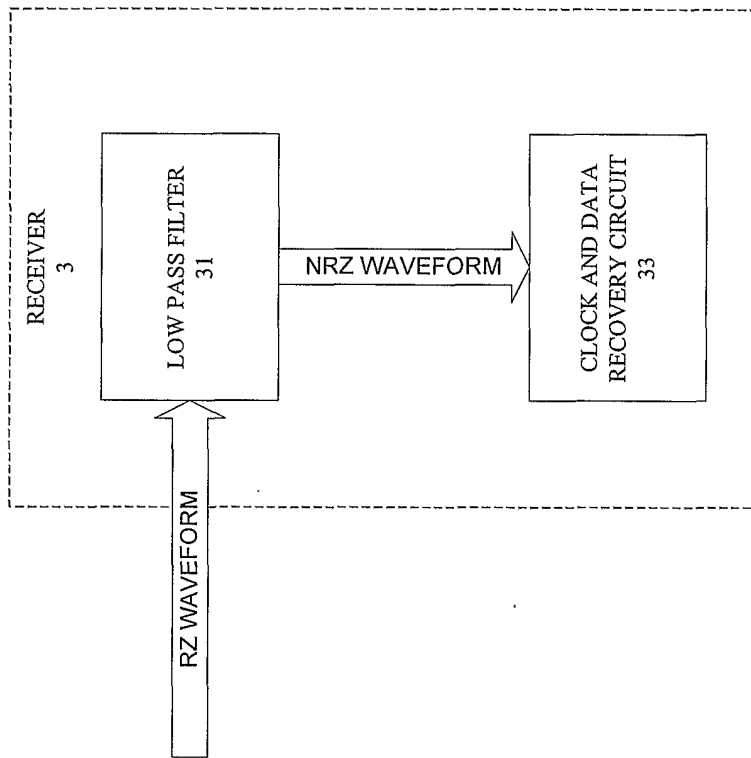


FIG. 1

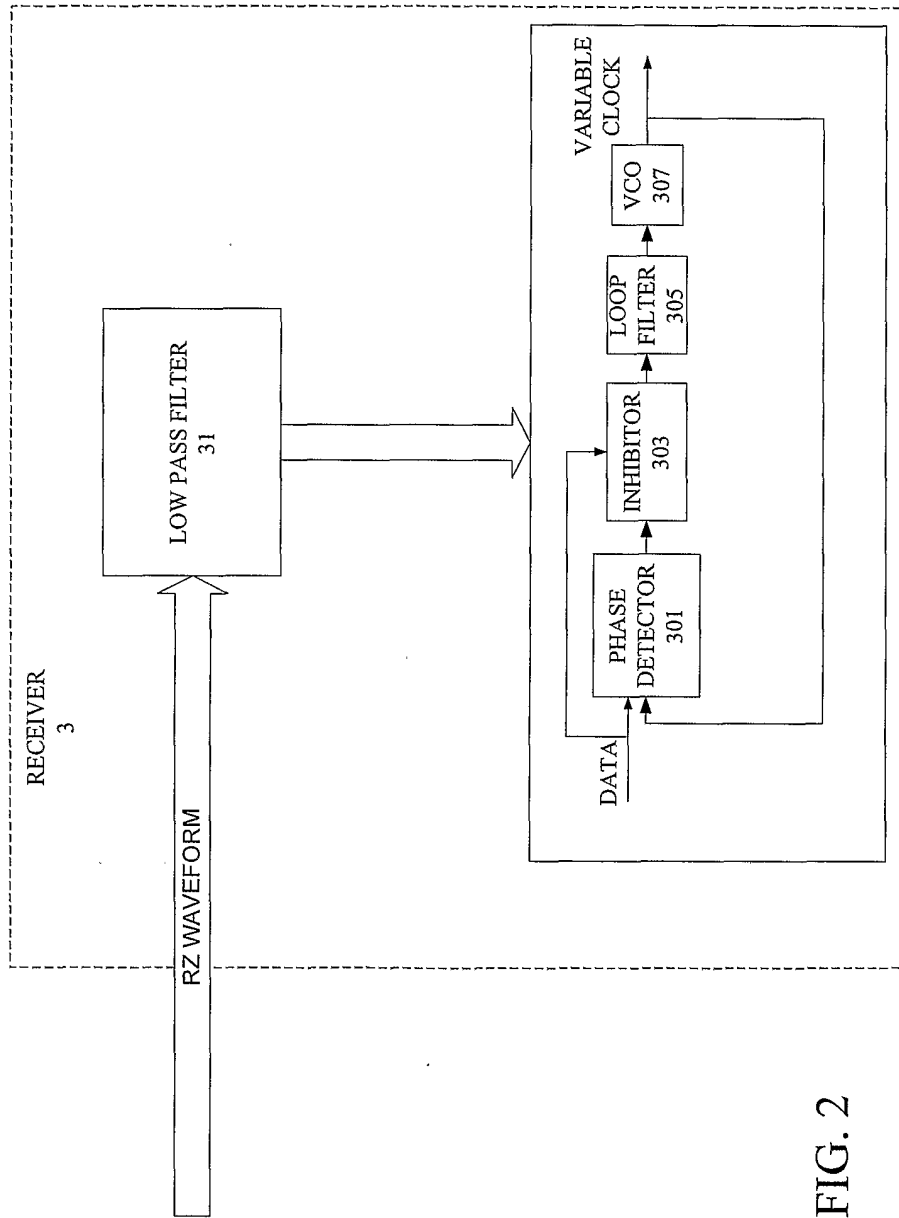


FIG. 2


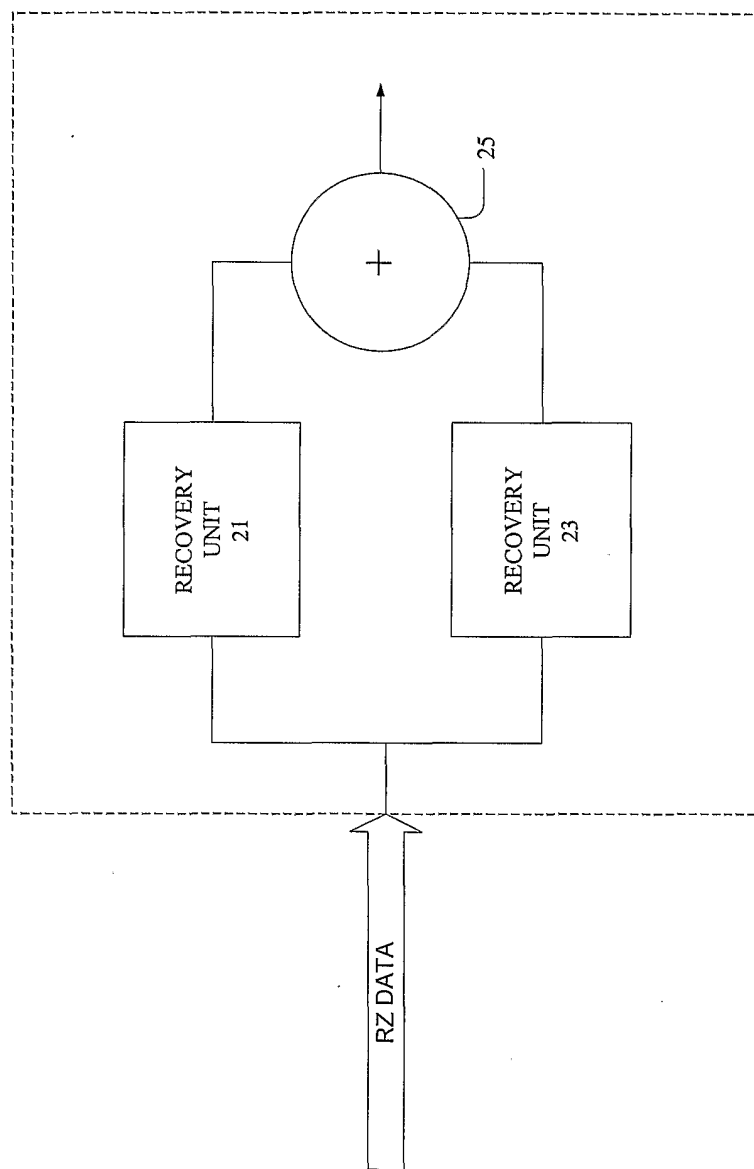


FIG. 3

FIG. 4

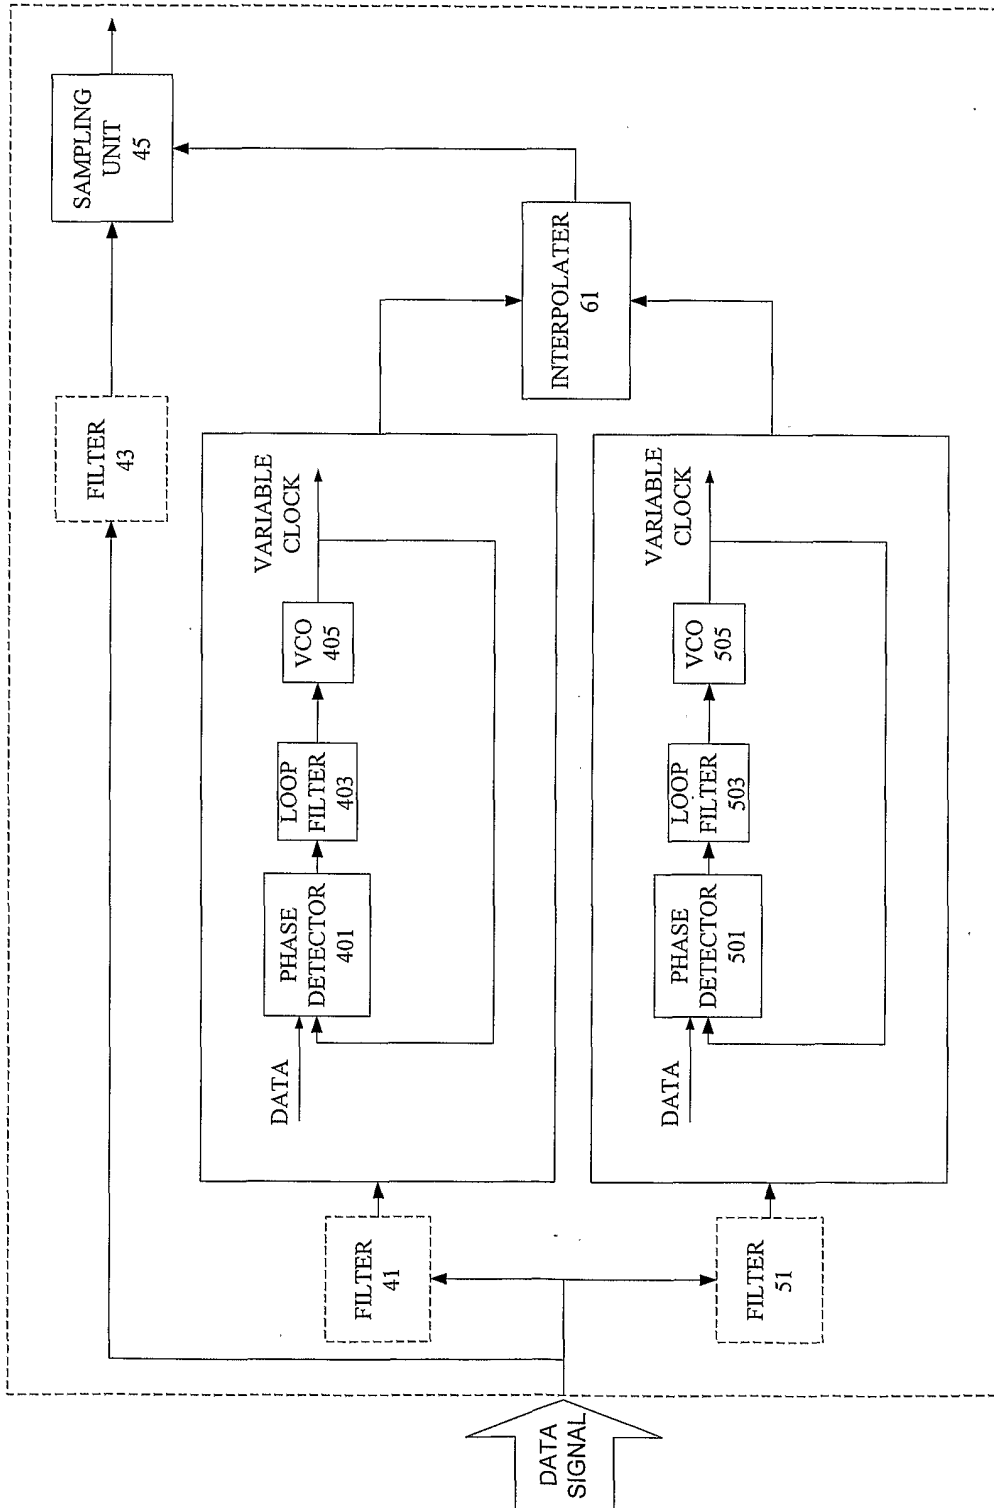

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/03432

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H04L 7/02; H03D 3/24
 US CL : 375/360,375,376

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 375/360,375,376,359,361,371,214,215,355; 327/144,147,156; 359/162,158; 341/68,69,70; 360/51; 370/516

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6,041,090 A (CHEN) 21 March 2000, col. 3, line 44 to col. 4, line 25, and figure 2.	1, 21, 29, 33
A	US 6,028,903 A (DROST et al.) 22 February 2000, col. 7, line 48 to col. 8, line 28, and figure 9.	1, 21, 29, 33
A	US 5,953,386 A (ANDERSON) 14 September 1999, col. 4, lines 8-48, and figure 3C.	1, 21, 29, 33
A	US 6,104,326 A (LEE et al.) 15 August 2000, col. 2, line 64 to col. 4, line 19, and figure 1.	1, 21, 29, 33
A, P	US 6,310,521 B1 A (DALMIA) 30 October 2001, col. 2, line 58 to col. 4, line 53, and figure 4.	1, 21, 29, 33
X	US 4,970,609 A (CUNNINGHAM et al.) 13 November 1990, col. 7, line 9 to col. 9, line 13, and figures 2 and 4.	1-10, 17-28, 33, 42-60
X	US 5,987,085 A (ANDERSON) 16 November 1999, col. 3, line 33 to col. 6, line 11, and figures 3-5.	1-5, 7-19, 21-28

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents:		
"A" document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search 02 April 2002 (02.04.2002)	Date of mailing of the international search report 19 APR 2002
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703)305-3230	Authorized officer Phuong Phu Telephone No. 703-308-0158