




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B60K 31/00		A1	(11) International Publication Number: WO 93/02885
			(43) International Publication Date: 18 February 1993 (18.02.93)
(21) International Application Number: PCT/EP92/01720 (22) International Filing Date: 29 July 1992 (29.07.92) (30) Priority data: 743,461 9 August 1991 (09.08.91) US (71) Applicant (for CA only): FORD MOTOR COMPANY OF CANADA LTD. [CA/CA]; The Canadian Road, Oakville, Ontario L6J 5E4 (CA). (71) Applicant (for DE only): FORD WERKE A.G. [DE/DE]; Werk Köln-Niehl, Henry Ford Strasse, Postfach 60 04 02, D-5000 Köln 60 (DE). (71) Applicant (for FR MC only): FORD FRANCE S.A. [FR/FR]; B.P. 307, F-92506 Reuil-Malmaison Cédex (FR).		(71) Applicant (for GB only): FORD MOTOR COMPANY LIMITED [GB/GB]; Eagle Way, Brentwood, Essex CM13 3BW (GB). (71) Applicant (for all designated States except CA DE FR GB MC): FORD MOTOR COMPANY [US/US]; County of Wayne, Dearborn, MI 48120 (US). (72) Inventors: OO, Kah, Seng ; 27339 Hystone Drive, Farmington Hills, MI 48334 (US). KLINGLER, Gary, Michael ; 5681 Deerwood Lane, Milford, MI 48042 (US). (74) Agent: MESSULAM, Alec, Moses; A. Messulam & Co., 24 Broadway, Leigh on Sea, Essex SS9 1BN (GB). (81) Designated States: CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IT, LU, MC, NL, SE). Published With international search report.	

(54) Title: SPEED CONTROL SYSTEM WITH VARIABLE GAINS RELATED TO SPEED ERROR

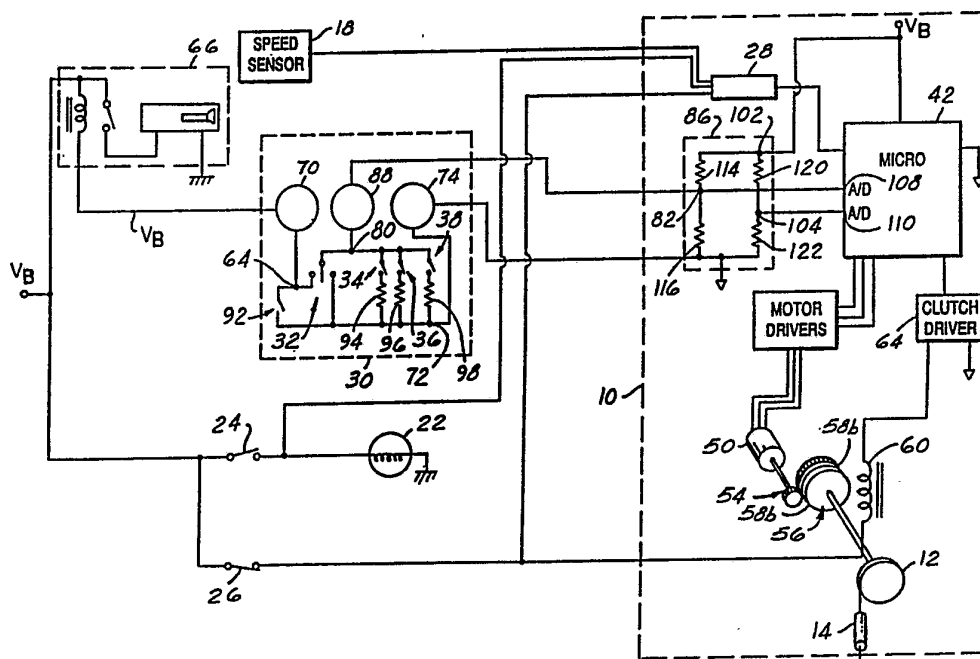

(57) Abstract

A speed control system electronically controls the engine throttle to maintain vehicle speed at a reference speed in response to a control signal. The control signal is generated by multiplying a speed error signal by a gain value. Such gain value is provided with a variable amplitude having a first linear relationship to the error signal which is increased to a second linear relationship having greater sensitivity when the error signal exceeds a preselected amplitude.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	MN	Mongolia
AU	Australia	FR	France	MR	Mauritania
BB	Barbados	GA	Gabon	MW	Malawi
BE	Belgium	GB	United Kingdom	NL	Netherlands
BF	Burkina Faso	GN	Guinea	NO	Norway
BG	Bulgaria	GR	Greece	NZ	New Zealand
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	PT	Portugal
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	RU	Russian Federation
CG	Congo	KP	Democratic People's Republic of Korea	SD	Sudan
CH	Switzerland	KR	Republic of Korea	SE	Sweden
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovak Republic
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CS	Czechoslovakia	LU	Luxembourg	SU	Soviet Union
CZ	Czech Republic	MC	Monaco	TD	Chad
DE	Germany	MG	Madagascar	TG	Togo
DK	Denmark	ML	Mali	UA	Ukraine
ES	Spain			US	United States of America

SPEED CONTROL SYSTEM WITH
VARIABLE GAINS RELATED TO SPEED ERROR

The field of the invention relates to speed
5 control systems for motor vehicles.

Speed control systems are known which control the engine throttle in response to a difference between vehicle speed and a reference speed. Many of such speed control systems amplify this difference signal by a gain
10 constant.

It is also known to adjust the sensitivity of speed control systems to changes in vehicle speed by adjusting the gain constant. For example, U.S. Patent No. 3,885,644 issued to Seidler et al increases the gain at
15 high speeds to allegedly provide a more psychologically pleasing operator response.

Gains are also adjusted to address certain deficiencies of a particular speed control system. For example, U.S. Patent No. 4,803,637 issued to Tada et al
20 discloses a diaphragm coupled to the engine throttle and actuated by engine manifold vacuum. During a preset time after speed control operation is initiated, the system gain is increased to rapidly move the diaphragm in an attempt to reduce speed droop which may otherwise occur
25 during speed control initiation.

The inventors herein have recognised various disadvantages of prior approaches. For example, prior speed control systems do not appear to distinguish between operation while cruising over a relatively flat super
30 highway or encountering a sudden gradient. Accordingly, speed control operation may appear to be hunting on flat surfaces, drooping when encountering uphill gradients and overshooting when travelling downhill.

An object of the invention claimed herein is to
35 provide a speed control system with variable gains related to the speed error such that stable speed control operation is achieved over a wide variation of road

2

conditions.

The above object is achieved, and disadvantages of prior approaches overcome, by providing a speed control system for controlling the engine throttle to maintain vehicle speed at a desired speed. In one particular aspect of the invention, the speed control system comprises: comparison means for generating an error signal by comparing the vehicle speed to the desired speed, correction means for providing a plurality of correction signals each related to the error signal and multiplying each of the correction signals by one of an equal plurality of corresponding gain values, gain providing means for providing each of the variable gain values with a variable amplitude having a first linear relationship to the error signal amplitude, the gain providing means providing the variable gain value with a second linear relationship when the error signal amplitude exceeds a preselected amplitude, summing means for generating a control signal by summing each of the products each correction signal times each corresponding gain value, and actuation means for actuating the engine throttle in relation to the control signal. Preferably, the second linear relationship has greater sensitivity to speed error than the first linear relationship.

An advantage of the above aspect of the invention is that low gain values are provided for small speed errors such that speed hunting, which was indicative of some prior approaches, on relatively flat road surfaces is avoided. Another advantage is provided by having gain values with greater gains at higher speed errors, such that more rapid speed control response is provided when encountering a road gradient. Accordingly, speed droop when encountering an uphill gradient is avoided as is speed overshoot when encountering a downhill gradient. Still another advantage is provided of rapidly correcting for road gradients by increasing the linear relationship between gain values and speed error when speed error exceeds a preselected threshold. In addition, different

3

linear relationships are selectable for positive and negative speed errors to specifically compensate for vehicle response. An additional advantage is thereby achieved of compensating for variations in vehicle response which are related to speed error sign.

5 The invention will now be described further, by way of example, with reference to the accompanying drawings, in which :

 Figure 1 is an electro-mechanical schematic of a speed control system which utilises the invention
10 described herein to advantage;

 Figures 2A-2B are a flowchart showing process steps performed by a microcomputer to generate various speed control commands by decoding a plurality of operator actuatable switches shown in Figure 1;

15 Figure 3 is a flowchart showing process steps performed by a microcomputer to generate a throttle position command during speed control operations;

 Figure 4 is a graphical illustration of quadratic speed control operation;

20 Figure 5 is a flowchart showing process steps performed by a microcomputer in controlling a stepper motor coupled to the engine throttle in response to a throttle position command;

 Figures 6A-6B are a flowchart showing process
25 steps performed by a microcomputer to initialise speed control operation;

 Figure 7 is a graphical illustration of generating an initial throttle position for initialising speed control operation;

30 Figures 8A-8C are graphical illustrations of the speed control initialisation described with reference to Figures 6A-6B;

 Figure 9 is a flowchart of process steps performed by a microcomputer in adaptively learning an
35 initial target throttle position;

 Figures 10A-10B are a flowchart of process steps performed by a microcomputer in controlling speed control

4

operation during a particular embodiment of a resume mode;

Figures 11A-11C are a graphical illustration of speed control operation during the resume mode of operation described with reference to Figures 10A-10B;

Figures 12A-12C are another graphical
5 illustration of speed control operation during the resume mode of operation described with reference to Figures 10A-10B;

Figure 13 is a flowchart of process steps performed by a microcomputer in controlling speed control
10 operation by adjusting speed control gains as a function of the speed error signal;

Figure 14 is a graphical illustration of one particular speed control gain adjusted in accordance with the operation described with reference to Figure 13;

15 Figure 15 is a flowchart of process steps performed by a microcomputer in adjusting various speed control gain constants during the resume mode of operation; and

Figure 16 is a graphical illustration of
20 operation during the resume control described with reference to Figure 15.

Speed control system 10 is first described in general terms with reference to the block diagram shown in Figure 1. More detailed description is provided later
25 herein with particular reference to Figures 2-16. Speed control system 10 controls the engine throttle (not shown) via cable drum 12, connected to throttle cable 14. In general, speed control system 10 is responsive to: vehicle speed sensor 18 which is described in greater
30 detail in U.S. Patent Application Serial No. 280,907, the specification of which is incorporated herein by reference; brake light switch 24; and brake dump switch 26 which is responsive to a predetermined hydraulic fluid pressure in the brake line such as, for example, 100 psi.
35 The above inputs are filtered and buffered in a conventional manner by input signal conditioning circuitry 28. In addition, as described in greater detail later

5

herein with particular reference to Figures 2A-2B, speed control system 10 is responsive to multiplex switch assembly 30 mounted on the vehicle steering wheel (not shown). In this particular example, multiplex switch assembly 30 includes the following operator actuatable momentary switches: ON/OFF switch 32, COAST switch 34, SET/ACCEL switch 36, and RESUME/CANCEL switch 38.

Microcomputer 42, a conventional microcomputer such as the 6805 series, is shown responsive to the above described inputs for controlling stepper motor 50 which in turn controls cable drum 12 via reduction gearing 54 and electromagnetic clutch 56. In this particular example, electromagnetic clutch 56 includes clutch plates 58a and 58b wherein clutch plate 58b is displaced against a return spring (not shown) in response to the flow of electrical current through coil 60. These mechanical components are described in greater detail in U.S. patent application Serial No. 07/588,918, the specification of which is incorporated herein by reference.

Continuing with Figure 1, coil 60 is shown having one end connected to an electrical ground via clutch driver 64, a field effect transistor in this particular example, which is responsive to microcomputer 42. The other end of coil 60 is coupled to battery power V_B via brake dump switch 26. During deactivation of speed control operation, such as when ON/OFF switch 32 is depressed in the OFF position or brake light switch 24 is closed, microcomputer 42 instructs stepper motor 50 to turn to an idle position and thereafter opens electromagnetic clutch 56 via clutch driver 64. In addition, electromagnetic clutch 56 becomes immediately disengaged upon actuation of brake dump switch 26 when a predetermined pressure is achieved in the brake system.

SPEED CONTROL COMMANDS

The operation of multiplex switch assembly 30 and decoding of switch actuation by microcomputer 42 to provide corresponding speed control commands (i.e., speed

6

control operating modes), is now described with continuing reference to Figure 1 and reference to Figures 2A-2B. For the particular embodiment shown herein, multiplex switch assembly 30 receives electrical power (V_B') at node 64 via the relay coil of electrical horn assembly 66 through slip ring 70. Electrical ground is shown received at node 72 of multiplex switch assembly 30 via slip ring 74. Switch assembly 30 includes output node 80 which is coupled to node 82 of bridge circuit 86 via slip ring 88. As described in greater detail later herein, a multiplexed output signal or voltage is provided at node 80 by multiplex switch assembly 30. Microcomputer 42 decodes the multiplexed output signal to provide the appropriate command signals. In this particular example, one of five preselected voltages is provided at node 82 (V_{g2}) by actuation of either momentary switch 32, 34, 36, or 38.

ON/OFF switch 32 is shown as a single pole double throw momentary switch having its pole connected to node 80, its "ON" position connected to node 64, and its "OFF" position connected to electrical ground at node 72. COAST switch 34 is shown as a momentary switch connected in series with resistor 94 between node 80 and node 72. SET/ACCEL switch 36 is shown as a momentary switch connected in series with resistor 96 between node 80 and node 72. RESUME/CANCEL switch 38 is shown as a momentary switch connected in series with resistor 98 between node 80 and node 72. Horn switch 92 is connected in series between nodes 64 and 74.

Electrical bridge 86 is shown including two resistive voltage dividers coupled between electrical ground and node 102 which in turn is coupled to V_B . The first voltage divider includes resistor 114 (R_{114}) coupled between node 102 and node 82, and resistor 116 (R_{116}) coupled between electrical ground and node 82. The second resistive voltage divider includes resistor 120 (R_{120}) and resistor 122 (R_{122}) interconnected with node 104. Nodes 82 and 104 are shown connected to respective A/D inputs A/D_1 and A/D_2 of microcomputer 42.

7

Operation of multiplex switch assembly 30 and bridge 86 in producing preselected voltages at node 82 corresponding to speed control commands is now described. During actuation of ON/OFF switch 32 to the "ON" mode, voltage V_B' is coupled to node 82. When ON/OFF switch 32 is actuated in the "OFF" mode, electrical ground is coupled to node 82. When all switches of multiplex switch assembly 30 are deactuated (i.e., none are depressed) node 80 is floating such that the voltage at node 82 of electrical bridge 86 is $V_B * R_{116}/(R_{114} + R_{116})$. That is, the voltage at node 82 is determined by dividing V_B by the first resistive voltage divider including resistors 114 and 116. This voltage is therefore a reference voltage designating the concurrent deactuated or idle position of momentary switches 32, 34, 36 and 38.

During momentary depression of COAST switch 34, resistor 94 is coupled in parallel with resistor 116 of electrical bridge 86. Accordingly, the voltage at node 82 during depression of COAST switch 34 is represented by:

$$V_B * \parallel R_{116} R_{94}/(R_{114} + \parallel R_{116} R_{94});$$

where $\parallel R_{116} R_{94}$ represents the resistance of the parallel combination of R_{116} and R_{94} .

While SET/ACCEL switch 36 is held in the depressed position, resistor 96 is coupled in parallel with resistor 116. During such momentary depression, the voltage at node 82 is represented by:

$$V_B * \parallel R_{116} R_{96}/(R_{114} + \parallel R_{116} R_{96}).$$

Similarly, during depression of RESUME/CANCEL switch 38, resistor 98 is coupled in parallel with resistor 116. Thus, the voltage at node 82 is then represented by:

$$V_B * \parallel R_{116} R_{98}/(R_{114} + \parallel R_{116} R_{98}).$$

8

The voltage at node 104 (V_{104}) of bridge 86 is a system reference voltage determined by dividing V_B by the second resistive voltage divider including resistors 120 and 122 (i.e., $V_B * R_{120}/R_{120} + R_{122}$). Any variation in battery voltage, voltage transients or noise on the voltage line will affect both V_{82} and V_{104} in a proportionate manner. As described below with reference to Figures 2A-2B, microcomputer 42 scales V_{82} by V_{104} to cancel the effects of voltage variations and noise from V_{82} .

The operation of microcomputer 42 in decoding multiplex switch assembly 30, and providing speed control commands is now described with reference to the flowchart shown in Figures 2A-2B. Each block shown is representative of process steps performed by microcomputer 42 during each of its background loops. Those skilled in the art will recognise that the process shown may be performed by other components such as analog circuitry or discrete logic components commonly referred to as Integrated Circuits.

At the start of each background loop the brake light signal is sampled in step 152. In the event of a brake light signal, the Brake Flag is set and the STANDBY COMMAND generated (see steps 154 and 156). During the STANDBY mode, stepper motor 50 is phase stepped to an idle throttle position and electromagnetic clutch 56 then opened. Thereafter, resumption of speed control operation occurs with either a SET COMMAND or a RESUME COMMAND.

If the brake light signal is not present, step 158 compares actual vehicle speed (v) to preselected range around reference speed v_s which is stored in memory. When vehicle speed is beyond this preselected range, a STANDBY COMMAND is generated (steps 156 and 158). When vehicle speed is within the preselected range, the digital representation of V_{82} and V_{104} is sampled during step 162. Command signal V_C is then generated in step 164 by scaling V_{82} with V_{104} to eliminate the effects of voltage

9

variations and noise at node 82 as previously described herein. Accordingly, command signal V_C is a digital representation or coding of V_{82} which in turn is a voltage representation of switch actuation in multiplex switch assembly 30.

- 5 During steps 168, 170 and 172 an ON Flag is set and the ON COMMAND generated when the digital representation of V_{82} is greater than V_{104} . Stated another way, speed control operation is enabled when the above comparison indicates that ON/OFF Switch 32 is
10 momentary actuated in the ON position.

 Command signal V_C is then compared to a digital representation of the voltage, or voltage range, associated with momentary actuation of ON/OFF switch 32 in the OFF position (V_{OFF}) during step 176. If V_C is equal
15 to V_{OFF} , the ON Flag is cleared and the OFF COMMAND generated during steps 178 and 180. Stepper motor 50 is then sequenced to an idle position and electromagnetic clutch assembly 56 opened. Speed control operation cannot thereafter be reactuated until an ON COMMAND is received.

- 20 When command signal V_C is not equal to signal V_{OFF} and the ON Flag was previously set (see steps 176 and 184), command signal V_C is compared to signal V_{Set} which is a digital representation of the voltage at node 82 during actuation of SET/ACCEL switch 36 (see step 186).
25 If command signal V_C and signal V_{Set} are equal, the previous state of signal V_C is then checked for an idle switch condition (V_{Idle}) corresponding to concurrent deactuation of all momentary switches in multiplex switch assembly 30 (see step 188). Should the previous state be
30 other than an idle switch position, two switches may be concurrently actuated by the operator, in which case further speed control processing is exited.

 If command signal V_C is equal to V_{Set} (see step 186), and the previous state of command signal V_C was at
35 an idle position (see step 188) indicating that all switches were previously deactuated, then the Brake Flag is checked during step 190. It is noted that the Brake

/0

Flag is set during application of the vehicular brakes (see steps 150 and 152) and cleared when command signal V_C is detected at an idle position indicating that all momentary switches were concurrently deactuated (see steps 230 and 232).

- 5 Returning to step 190, when the Brake Flag is detected as being cleared, command signal V_C is checked to see if it was also at V_{Set} during the previous background loop. If it was not, then a SET COMMAND is generated (see steps 192 and 194). On the other hand, if command signal
- 10 V_C was also at V_{Set} during the previous background loop, an ACCEL COMMAND is generated (see steps 192 and 196). Stated another way, detection of continued depression of SET/ACCEL switch 36 results in an ACCEL COMMAND.

- As described in greater detail later herein with
- 15 particular reference to Figure 3, the SET COMMAND begins initialising speed control operation to achieve the vehicle speed present at the time SET/ACCEL switch 36 is depressed. During continued depression of the switch, speed control system 10 accelerates the vehicle by
- 20 incrementing the set speed in a preprogrammed manner.

- Decoding the actuation of COAST switch 34 occurs during process step 200. After the digital representation of the voltage at node 82 associated with such actuation is detected (V_{Idle}), the previous state of command signal
- 25 V_C is checked in step 202. When a previous idle condition of all switches is detected, and the Brake Flag is in a cleared condition (see step 204), a COAST COMMAND is generated. Otherwise, processing for the particular background loop ceases. During speed control coast
- 30 operation, stepper motor 50 is turned to idle. Release of COAST switch 34 results in reinitialising speed control operation at the vehicle speed which occurred at the time of such release.

- Decoding actuation of RESUME/CANCEL switch 38 and
- 35 subsequent generation of the RESUME COMMAND begins with step 210. After affirmative comparison of signal V_C with signal V_{Rsm} , the previous state of command signal V_C is

II

checked for an idle condition during step 212. If all switches were previously deactuated and the Brake Flag is in the cleared state (see step 214), the Standby Mode is then checked during (see step 216). If previously in the Standby Mode, the RESUME COMMAND is then generated during
5 step 218. However, if speed control was not previously in the Standby Mode (i.e., speed control in control mode), then depression of RESUME/CANCEL switch 38 is interpreted as a Cancel and the Standby Mode generated (step 220).

During operation in the Resume mode, speed
10 control operation is reinitialised to achieve the desired or set speed which was stored prior to application of the vehicular brakes. A detailed description of Resume operation is described later herein with particular reference to Figures 10A-10B, 11A-11C, and 12A-12C.

15 Continuing with Figures 2A-2B, detection of concurrent deactuation of all switches in multiplex switch assembly 30 (i.e., $V_C = V_{Idle}$) during step 230 results in clearing the Brake Flag in step 232. In view of the above described process steps, neither the SET, ACCEL, COAST, or
20 RESUME COMMANDS can be generated unless the Brake Flag is cleared. Stated another way, these commands cannot be generated until each switch of multiplex switch assembly 30 is concurrently at an idle position. Further, each previous state of signal V_C must be at an idle position
25 (see steps 188, 202 and 212). Accordingly, speed control operation is prevented when any of the switches remains in an actuated position such as when the vehicular operator inadvertently holds down a momentary switch or concurrently actuates two switches. However, once such
30 switch returns to normal operation, speed control processing will then continue.

CONTROL MODE

Referring now to Figures 3 and 4, the Control
35 Mode, or steady-state, speed control operation is now described. The Control Mode is entered after initialising operations during the Set, ACCEL, or Resume Mode, as

/2

described in greater detail later herein. During the Control Mode, feedback speed control operations maintain the vehicle at the set or desired speed. Upon recognition of the control mode in step 240 speed error signal v_e is computed in step 246 by subtracting actual vehicle speed v from reference speed m_s which is stored in memory location m . Gain constants k_p (proportional term), k_q (quadratic term), and k_I (integral term) are set in step 248 as a function of vehicle speed. In this particular example, each gain constant is one of three values each associated with one of three speed ranges. These speed ranges are designated as a high speed range (v_h), a medium speed range (v_m), and a low speed range (v_l).

During process steps 250-254, proportional, quadratic, and integral speed control are derived from error speed signal v_e . In process step 250 the proportional speed control term is provided by multiplying proportional gain constant k_p times speed error signal v_e . This proportional term provides relatively fast speed control response to a speed error.

The integral control term is computed in step 252 by integrating speed error signal v_e , multiplying this integral by integral term k_I , and adding an initial throttle position designated as TP_i . The computation of initial throttle position TP_i is described later herein with particular reference to Figure 6. This integral control term provides speed control system 10 with stable steady-state operation.

As shown in process step 254, the quadratic speed control term is calculated by multiplying quadratic constant k_q times the product of error signal v_e and the absolute value of error signal v_e . This particular multiplication is used to advantage for generating a quadratic control term having the sign of error signal v_e . The quadratic, integral, and proportional control terms are then added in step 258 to generate throttle position command signal TP . As described later herein with particular reference to Figure 5, throttle position

13

command signal TP causes stepper motor 50 to turn to the commanded throttle position.

Referring now to Figure 4, the advantages of the quadratic control term are described. Quadratic control term $k_q * v_e * |v_e|$ is plotted as a function of speed error signal v_e . It is noted that at low speed error signals (such as v_e less than 1 mph), the quadratic control term is relatively small due to its squaring feature. On the other hand, the quadratic control term contributes substantially at higher speed error signals.

10 To prevent excessive contribution at high speed error signals, the quadratic control term is clipped or limited at predetermine positive and negative limits. An advantage of the quadratic control term utilised herein is that small speed error signals are essentially ignored

15 thereby providing a more stable speed control system. On the other hand, large corrections are quickly provided for significant speed errors thereby achieving a speed control system with a relatively fast response time.

Referring now to Figure 5, a block diagram

20 showing the process steps for phase control of three-phase stepper motor 50 is now described. During step 272 throttle position command TP is provided in a manner described later herein with particular reference to Figure 4. In step 274 throttle position command TP is compared

25 to total phase count ϕ_c which, as described below, infers the actual position of stepper motor 50 and accordingly the throttle plate (not shown). The difference between throttle position TP and phase count ϕ_c is representative of the angular position which stepper motor 50 must be

30 incremented or decremented to in order to achieve the throttle position commanded by microcomputer 42. In response, a sequence of phase pulses (ϕ_1 , ϕ_2 , and ϕ_3) is generated during step 276 for turning stepper motor 50 to throttle position TP. As phase pulses ϕ_1 , ϕ_2 , and ϕ_3 are

35 generated for turning stepper motor 50 in discrete phase steps, each pulse is counted to provide a total phase count ϕ_c in step 278 which is related to the actual

14

position of stepper motor 50. The above described process then continues the next background loop of microcomputer 42 when a new throttle position command is received.

SET MODE

5 Referring to Figures 6A-6B and 7, initialisation of speed control operation is described in response to a SET COMMAND. Upon recognition of the SET COMMAND in step 282, a rounded off value of actual vehicle speed at the time of actuation of SET/ACCEL switch 36 is stored as a
10 set or desired speed in the rs memory location (see step 284). Stepper motor 50 is then zeroed or turned to an idle position and electromagnetic clutch assembly 56 engaged during steps 288 and 290.

Referring to process steps 292-304 in Figure 6A
15 and also referring to the graph shown in Figure 7 a description is provided for initialising speed control system 10 with an initial throttle position computed as follows. Throttle position is calculated by assuming a straight line relationship between vehicle speed and
20 throttle position as illustrated by line 280 in Figure 7. This illustrative line is shown having a slope "a" and an offset value c_i which intersects the throttle position axis. Offset c_i corresponds to the throttle position at idle after slack and mechanical stacking in the throttle
25 cable and associated mechanical linkage have been taken in. Accordingly, initial throttle position TP_i is calculated as follows: $TP_i = a * rs + c_i$ (see step 292 in Figure 6).

Referring back to Figure 6A, the integrator
30 memory is initialised with initial throttle position TP_i in step 294 a SET COMMAND (as described in greater detail later herein, a similar initialising process occurs after a RESUME COMMAND or ACCEL COMMAND). Stepper motor 50 is then advanced until its angular position, as represented
35 by phase count ϕ_c , reaches initial throttle position TP_i as shown by process steps 298 and 300. Actual vehicle speed existing at that time is then stored as initial

15

reference speed ms_i during process step 304. As described in greater detail later herein, reference speed ms is incremented in a preprogrammed manner until desired speed rs is achieved.

The above operation is illustrated by the waveforms shown in Figures 8A-8C for a hypothetical speed control operation. It is noted that after operator actuation of SET/ACCEL switch 36 at time t_1 the vehicle speed droops as the operator releases the accelerator pedal (see Figure 8B). Concurrently, the integrator storage location is initialised with target throttle position TP_i and stepper motor 50 turned to target throttle position TP_i (see Figure 8C). Stated another way, stepper motor 50 is advanced until its total phase count ϕ_c reaches target throttle position TP_i at time t_2 . Actual vehicle speed at such time is then stored as initial reference speed ms_i . As described in greater detail below, reference ms is then incremented in a preprogrammed manner and closed loop speed control operation is concurrently commenced to gradually increase vehicle speed until desired speed rs is achieved at time t_3 .

Referring to Figure 6B, speed error signal v_e is generated by subtracting actual vehicle speed (v) from reference speed ms as reference speed ms is being incremented (step 308). Proportional gain constant k_p , quadratic gain constant k_q , and integral gain constant k_I are set in a manner described later herein with particular reference to Figures 15 and 16. During steps 312, 314, 316, and 318 throttle position (TP) is determined in the same manner as previously described herein with particular reference to process steps 250, 252, 254, and 258 shown in Figure 3. That is, the throttle position commanded of stepper motor 50 is generated as follows:

$$TP = k_p * v_e + k_I \int v_e dt + TP_i + k_q * v_e * |v_e|$$

The programming for incrementing reference speed

16

ms is provided in steps 322-334. In general, a preselected number of ramps are utilised dependent upon vehicle speed. If vehicle speed is less than initial reference speed ms_i plus predetermined deviation Δ_1 (such as one mile per hour), then initial reference speed ms_i is incremented at predetermined Rate 1. When vehicle speed is less than desired speed rs by predetermined amount Δ_3 such as three miles per hour, (see process step 324), but greater than initial reference speed ms_i plus Δ_1 (see process step 326), then reference speed ms is incremented at predetermined Rate 2.

When vehicle speed v is equal to desired speed rs (see step 322), reference speed ms is set equal to desired speed rs during step 330. As shown in the hypothetical example in Figure 8B, ms is incremented at Rate 3 from ms_i to rs for providing gradual vehicle acceleration to reference speed rs . Subsequently, the control mode is entered as indicated by process step 336 in Figure 6.

ADAPTIVE LEARNING

Updating of offset value c_i during the Control mode for use in subsequent calculation of target throttle position TP_i is now described with reference to Figures 7 and 9. It is noted that speed control during the Control mode of operation was previously described with reference to Figure 3. Referring first to Figure 9, the contents of the integrator storage location are sampled during step 352 each background loop upon entering the control mode (see step 350). Since the integrator contents represent the integral of speed error signal v_e plus the initial throttle position, this value (I_{i+1}) is approximately equivalent to the actual throttle position. During step 354, the product of desired speed rs times slope "a" of the curve represented in Figure 9 is subtracted from sampled integrator value I_{i+1} to generate an updated offset value c_{i+1} . Offset value c_{i+1} is then stored during step 356 for use in a subsequent calculation of target throttle position TP_i as previously described

17

herein with reference to process step 292, 294, 298, and 300 shown in Figure 6A.

The above described steps for adaptively learning offset value c_{i+1} and utilising such value to compute a target throttle position (TP_i) may be better understood by reviewing the hypothetical example of operation presented in Figure 7. As previously discussed herein, line 280 represents an estimate of throttle position versus vehicle speed. Offset value c_i represents throttle position at idle. However, initial reference line 280 represents only a best guess relationship, it will vary between different vehicles, vehicle accessories, and throttle cable slack.

During each background loop of microcomputer 40 (Figure 9), the integrator storage location is sampled (I_{i+1}). This value, as previously discussed, represents actual throttle position. Thus, line 280 should be shifted in a parallel manner such that it intersects sampled integrator value I_{i+1} . Stated another way, offset value c_i is replaced by updated offset c_{i+1} as a function of sampled integrator value I_{i+1} (i.e., c_{i+1} equals $I_{i+1} - a \cdot rs$). Accordingly, offset value c_i is adaptively learned or updated such that line 280 becomes shifted to line 280' which in this example represents a true relationship between vehicle speed and throttle position for the particular vehicle upon which speed control system 10 is installed.

Referring to the example shown in Figure 7, speed control system 10 maintains vehicle speed at reference speed rs .

In accordance with the description provided above with reference to Figures 7 and 9, speed control system 10 is initialised with an adaptively learned target throttle position such that desired speed rs is achieved in a stable manner with minimal undershoot, overshoot, or abrupt changes in vehicle speed. In addition, the adaptive learning process of target throttle positioning enables speed control system 10 to automatically adapt to different vehicles, and to variations among the same

vehicle upon which it may be installed.

RESUME MODES

Operation during the resume mode is now described with reference to the flowchart of process steps performed by microcomputer 42 shown in Figures 10A-10B, and the graphical representation of a hypothetical resume operation shown in Figures 11A-11C. After a RESUME COMMAND is recognised in step 382, stepper motor 50 is turned to an idle position (see step 384) and electromagnetic clutch assembly 56 activated (see step 388).

During step 392, initial throttle position TP_i is computed by multiplying vehicle speed existing at the time resume switch 38 is depressed times slope value "a" and adding adaptively learned offset value c_i . The integrator memory is then initialised with the computed initial target position TP_i (see step 394). Stepper motor 50 is advanced until it reaches a phase count associated with target throttle position TP_i (see steps 398 and 400). Actual vehicle speed v is then stored as reference speed ms_i in step 404.

During step 408, speed error signal v_e is computed by subtracting vehicle speed from reference speed ms . Proportional gain constant k_p , quadratic gain constant k_q , and integral gain constant k_i are set in step 410. During steps 412, 414, 416, and 418 throttle position TP is determined in the same manner as previously described herein with particular reference to process steps 250, 252, 254, and 258 shown in Figure 3.

The operation of microcomputer 42 for incrementing reference speed ms to achieve resume or set speed rs is now described with continuing reference to Figures 10A-10B, Figures 11A-11C, and Figures 12A-12C. Figures 11A-11D represent a hypothetical resume operation wherein reference speed ms is greater than actual vehicle speed v (i.e., $v_e > \text{zero}$) throughout resume operations. On the other hand, Figures 12A-12C represent a more

19

complex hypothetical resume operation wherein actual vehicle speed v exceeds reference speed ms (i.e., $v_e < \text{zero}$) during a portion of resume operation.

Resume speed control operation is first described of conditions when vehicle speed v is less than reference speed ms (i.e., $v_e > \text{zero}$). After a determination is made that the speed error signal v_e is positive (see step 430) and reference speed ms is less than set speed rs (see step 432), vehicle speed v is compared to various speed ranges (see steps 434, 436, and 438). More specifically, when vehicle speed v is less than predetermined value Δ_3 from set speed rs and within predetermined value Δ_1 from initial reference speed ms_i , reference speed ms is incremented at predetermined rate R_1 as shown by steps 434, 436, and 438. When vehicle speed v exceeds initial reference speed ms_i plus Δ_1 (see step 436), and is less than reference speed rs minus Δ_3 (see step 434), reference speed ms is incremented at rate R_2 (see step 440). If vehicle speed v is greater than set speed rs minus Δ_3 (see step 434), reference speed ms is incremented at rate R_3 (see step 442) until reference speed ms reaches set speed rs (see steps 432 and 446).

When reference speed ms reaches set speed rs , the throttle angle is greater than that required to maintain set speed rs because the vehicle has been accelerating. Speed overshoot would therefore result unless corrected for. Process steps 450, 452, and 454 prevent or substantially reduce such overshoot. More specifically, a new target throttle position is calculated based upon set speed rs during step 450 where $TP_i = c_i + a * rs$. Since the adaptive learning previously described herein with particular reference to Figure 9 has updated offset c_i , the calculated target throttle position should be highly accurate. This calculated target throttle position reinitialises the integrator storage position when reference speed ms is incremented to set speed rs thereby preventing speed overshoot. Afterwards, the control mode is entered as shown by step 454.

20

The operation presented above may be better understood by referring to the graphical representation of an example of resume operation presented in Figures 11A-11C. Upon depression of resume switch 38 at time t_1 (see Figure 11A), the integrator storage location is
5 initialised with target throttle position TP_i calculated as a function of vehicle speed v at time t_1 (see Figure 11C). Stepper motor 50 is then advanced until phase count ϕ_c reaches target throttle position TP_i at time t_2 (Figure 11C).

10 Referring to Figure 11B, reference speed ms is initialised with vehicle speed v when stepper motor 50 reaches target throttle position TP_i at time t_2 . Initial reference speed ms_i is then gradually advanced at rate R_1 until vehicle speed v reaches initial reference speed ms_i
15 plus Δ_1 at time t_3 . Subsequently, reference speed ms is incremented at rate R_2 until vehicle speed v reaches set speed rs minus Δ_3 at time t_4 . Thereafter, reference speed ms is incremented at rate R_3 until it reaches set speed rs at time t_5 . The integrator storage location is then reset
20 with a target throttle position based on set speed rs ($TP_i = a * rs + c_i$). As shown in Figure 11C, this integrator resetting operation reduces throttle position thereby reducing or eliminating any speed overshoot.

Speed control operation when speed error signal
25 v_e is negative (i.e., $v > ms$) during a portion of resume operation is now described with continuing reference to Figures 10A-10B, and reference to the hypothetical example graphically shown in Figures 12A-12C. Such operation occurs under resume speed control operation while the
30 operator is accelerating or while travelling downhill. Vehicle speed is first compared to an upper reference speed ums (see step 460) which, in this particular example, is generated by adding a predetermined value m to reference speed ms during each background loop of
35 microcomputer 42. When vehicle speed v is greater than ums , reference speed ms is incremented to upper reference speed ums as shown in steps 460 and 462. When vehicle

21

speed v is less than upper reference speed ums and is also less than set speed rs minus Δ_3 (steps 460 and 464), then reference speed ms is updated with vehicle speed v (step 468). Referring to steps 464, 470, and 472, reference speed ms is incremented at rate R_3 when vehicle speed is within a predetermined range Δ_3 of set speed rs . When vehicle speed v reaches rs (step 470), reference speed ms is set to set speed rs and the integrator storage location reset as previously described herein with relation to process steps 450, 452, and 454. That is, the integrator is reinitialised with a target throttle position as a function of set speed rs ($TP_i = a * rs + c_i$).

The above described resume operation having a negative speed error during a portion of the resume mode may be better understood by the hypothetical example of operation shown in Figures 12A-12C. Resume switch 38 is shown actuated at time t_1 in Figure 12A. As shown in Figure 12C, the integrator storage location is then set with a target throttle position calculated in relation to vehicle speed v existing at time t_1 ($TP_i = a * v + c_i$) in the manner previously described. In response, stepper motor 50 is turned to target throttle position TP_i . Upon reaching the target throttle position at time t_2 , reference speed ms is initialised with vehicle speed v (see Figure 12B). Reference speed ms is then incremented as described below and feedback speed control commenced based upon speed error signal v_e ($v_e = ms - v$).

Referring to the example presented in Figure 12B, line 470 represents reference speed ms incremented at rates R_1 , R_2 , and R_3 under hypothetical conditions where vehicle speed v is less than reference speed ms . Similarly, line 472 represents upper reference speed ums which is incremented at rates R_1 , R_2 , and R_3 under hypothetical conditions where vehicle speed v is less than upper reference speed ums . Line 474 represents actual vehicle speed v for the example presented herein. And, the solid portions of lines 470, 472, and 474 represent the actual reference speed ms utilised for speed error

22

control in the particular example presented herein.

Continuing with Figure 12B, reference speed ms is increased at rate R_1 until it is greater than initial reference speed ms_i plus Δ_1 as shown at time t_3 .

5 Thereafter, reference speed ms is increased at rate R_2 . As shown in the previous example presented herein with reference to Figures 11A-11C, reference speed ms would increase at rate R_2 until vehicle speed v reaches set speed rs minus Δ_3 . However, as shown in the particular
10 example presented in Figure 12B, vehicle speed v exceeds reference speed ms at time t_4 . Reference speed ms is therefore set to vehicle speed v at time t_4 .

Vehicle speed v is shown exceeding upper
reference speed ums at time t_5 . This may be an indication
15 of acceleration while travelling downhill. Accordingly, reference speed ms is then limited to upper reference speed ums (line 472) at time t_5 . Between times t_6 and t_8 , vehicle speed v is again shown occurring between upper
reference speed ums and the lower or base reference speed
20 shown by line 470. Reference speed ms is therefore set to vehicle speed v (line 474). After time t_8 , vehicle speed v is shown falling below reference line 470. Accordingly, reference speed ms is incremented at rate R_3 as shown by
line 470 until it reaches set speed rs at time t_9 . Upon
25 reaching set speed rs , the integrator storage location is reset with a target throttle position based upon set speed rs as previously described herein ($TP_i = a * rs + c_i$).

In accordance with the resume operation described herein with reference to steps 460-472 and 446-454
30 presented in Figure 10 and Figures 12A-12C, smooth resume operation is provided which adapts to actual vehicle speed under conditions of operator acceleration and downhill operation. In addition, the unique manner of initialising the integrator with throttle position based upon vehicle
35 speed v and reinitialising the integrator with target throttle position based upon set speed rs , provides smooth and stable operation with minimal undershoot or overshoot.

GAIN CONTROL - CONTROL MODE

An embodiment is described with reference to Figures 13 and 14 wherein gain values k_p , and k_I are adjusted during the control mode as a function of speed error v_e . In this particular example, speed control response is reduced at small speed errors and enhanced at large speed errors such that quadratic control component $k_q * v_e * |v_e|$ is not utilised. Thus, the gain control operation described herein is an alternate embodiment to the quadratic control previously described herein.

The process steps performed by microcomputer 108 in adjusting gain constants k_p and k_I are first described with reference to the flowchart shown in Figure 13. More specifically, after verification that speed control operation is in the control mode (step 490), absolute speed error v_e is compared to preselected error Δ_e in step 492. When speed error v_e is less than preselected error Δ_e , and vehicle speed v is within a high speed range (step 494), gain constant k_p is generated as a function of speed error v_e during step 498 (i.e., $k_p = f_1'(v_e)$). Similarly, integral gain k_I is also generated as a function of speed error v_e during step 498 (i.e., $k_I = f_1'(v_e)$). In this particular example, the functional relationship is linear as shown in Figure 14.

Continuing with the description of operation when the absolute value of speed error v_e is less than Δ_e , three separate functional relationships are generated for gain value k_p , dependent upon whether vehicle speed v is in a high range (see steps 494 and 498 where $k_p = f_1'(v_e)$ as described above), or a mid-range (see steps 500 and 502 where $k_p = f_2(v_e)$), or a low range (see steps 504 and 506 where $k_p = f_3(v_e)$). Stated another way, the relationship between gain value and speed error is decreased for lower speed ranges such that:

$$f_1(v_e) > f_2(v_e) > f_3(v_e).$$

Substantially similar operations are performed for integral gain value k_I . More specifically, at high

24

speed ranges $k_I = f_1'(v_e)$ as shown in steps 494 and 498. At mid-speed ranges $k_I = f_2'(v_e)$ as shown in steps 500 and 502. And low speed ranges $k_I = f_3'(v_e)$ as shown in steps 504 and 506.

Continuing with Figures 13 and 14, variable gain operation is now described when the absolute value of speed error v_e is greater than the preselected error e (step 492). The functional relationship between gain value k_p and speed error v_e is preselected as one of three linear relationships (d_1 , d_2 , or d_3) dependent upon whether vehicle speed v is in a high range, mid-range, or low range, respectively. More specifically, when vehicle speed v is in the high range (step 514), gain $k_p = d_1(v_e)$ as shown in step 518. When vehicle speed v is in a mid-range, $k_p = d_2(v_e)$ as shown in steps 520 and 522. And, when vehicle speed v is in a low range (step 524) $k_p = d_3(v_e)$ as shown in step 526.

Stated another way, the functional relationship, which is linear in this example, between gain k_p and speed error v_e is increased when vehicle speed changes from the high range to the mid-range and then to the low range. That is,

$$d_1(v_e) > d_2(v_e) > d_3(v_e).$$

Similar process steps are followed to generate gain k_I as a function of speed error v_e . Again, the relationship in this example is linear, and the linear relationship is increased inversely as a function of vehicle speed range. That is, $k_I = d_1'(v_e)$ in the high speed range, $k_I = d_2'(v_e)$ in the mid-speed range, and $k_I = d_3'(v_e)$ in the low speed range where:

$$d_1'(v_e) > d_2'(v_e) > d_3'(v_e).$$

The operation and advantages of the embodiment shown in Figure 13 may be better understood by discussing the graphical illustration of operation presented in

25

Figure 14. Amplitude of gain k_p is plotted against speed error v_e . Although this particular example illustrates gain k_p at a high speed range, those skilled in the art will recognise its teaching is applicable to all three speed ranges and also to gain k_I .

5 Figure 14 shows a first linear relationship (labelled as f_1) between gain k_p and speed error v_e until speed error v_e reaches predetermined speed error e . At such time, the linear relationship between gain k_p and speed error v_e is increased (labelled as d_1). An
10 advantage obtained from the illustrated embodiment is low gain amplitude at small speed errors and substantially higher gain amplitude at high speed errors. Thus, when speed errors are relatively small such as when cruising down a super highway, speed control response is relatively
15 stable and the hunting inherent in some prior systems is avoided. On the other hand, when speed errors increase beyond a preselected value such as when encountering a road grade, the gain amplitude of the speed control system is substantially increased such that speed undershoot
20 (such as when encountering a hill) or speed overshoot (such as when cresting a hill) are thereby avoided. The gain relationship at positive or negative speed errors is also alterable to compensate for variations in vehicle response to positive or negative speed errors. Thus,
25 stable operation is achieved while providing a system which rapidly corrects for alterations in road surface.

GAIN CONTROL - RESUME MODE

 An embodiment having variable gain operation
30 which is utilised to advantage during an alteration in desired speed is now described with reference to Figures 15 and 16. Such alterations in desired speed occur, for example, during the Resume Mode, ACCEL Mode, Coast Mode, and Tap-Up Mode (i.e., incrementing desired speed
35 dependent upon the number of times the SET/ACCEL switch as been tapped). The particular example presented in Figures 15 and 16 relates to the Resume Mode, although the

teachings of gain control provided herein is applicable to any desired speed alteration.

It is also noted that the gain operation described herein presents an alternative to a particular aspect of the Resume Mode of operation previously described with reference to Figures 10A-10B, 11A-11C, and 12A-12C. In the previously described Resume Mode of operation, desired speed m_s was incremented at a plurality of preselected rates to asymptotically converge upon reference speed r_s . In the particular example now presented in Figures 15 and 16, a single rate is utilised and the gain values (k_p , k_I , and k_q) are varied to achieve an asymptotic approach. Other aspects of resume operation, however, such as initialising and reinitialising the integrator, storage location remain substantially the same.

Referring specifically to Figure 15, after resume mode operation is detected in process step 550, vehicle speed v is checked to whether it is within predetermined range Δ_k of resume or reference speed r_s during step 552. When vehicle speed is less than range Δ_k from reference speed r_s , gain constants k_{p1} , k_{I1} , and k_{q1} are read from memory for respective gain values k_p , k_I , and k_q as shown in step 554. These gain values are greater than the gain values which will be described below such that more rapid convergence of speed control operation towards reference speed r_s is provided after initiation of the Resume Mode of operation. Accordingly, an advantage is obtained of minimising any droop in vehicle speed which may otherwise occur upon initiation of the Resume Mode or other speed alteration modes of operation.

Continuing with Figure 15, when vehicle speed v is within range Δ_k of reference speed r_s (step 552), and speed error v_e is positive (i.e., vehicle speed v is less than desired speed m_s as determined in step 556) gain values k_{p2} , k_{I2} , and k_{q2} are read from memory during step 558. The gain constants subscripted with 2 are less than those gain constants subscripted with 1. Accordingly,

27

when the vehicle speed is within range Δ_k from reference speed r_s , vehicle speed converges more gradually towards the reference speed.

When vehicle speed v is within range Δ_k of reference speed r_s , and speed error v_e is negative, gain constants k_{p3} , k_{I3} , and k_{q3} are read from memory during step 562. The gain constants subscripted with 3 are less than the gain constants subscripted with 1. Accordingly, when resume or reference speed r_s is being approached and vehicle speed v is overshooting desired speed m_s (such as when travelling on a down grade) relatively small gain constants are utilised for convergence upon reference speed r_s with minimal or substantially no overshoot.

The above described operation may be better understood by referring to an example of resume operation presented graphically in Figure 16. In this particular example, resume operation commences at time t_1 . For clarity, previously described resume operation such as initialising the integrator with a best guess throttle position turning stepper motor 50 to the best guess position and reinitialising the integrator upon reaching reference speed r_s are not repeated herein.

Between times t_1 and t_2 in the example presented in Figure 16, vehicle speed v is less than range Δ_k from reference speed r_s . Accordingly, gain constants subscript with 1 such as k_{p1} are utilised by speed control system 10. During the interval between times t_2 and t_3 , vehicle speed v is within range Δ_k and also less than desired speed m_s . Accordingly, gain constants subscripted with 2 such as k_{p2} are utilised to more gradually converge upon reference speed r_s .

After time t_3 , vehicle speed v is shown greater than m_s (i.e., speed error v_e is negative) so that gain constants subscripted with 3 are utilised. In such circumstance, an indication of speed overshoot is provided indicating that either the vehicle is on a down grade or speed control system 10 had previously over compensated. Gain constants subscripted with 3 will slow down the

28

convergence towards reference speed r_s thereby minimising or eliminating any speed overshoot.

In accordance with the above operation, rapid convergence is provided at the initiation of a speed alteration such as during initiation of the Resume Mode.

- 5 When within a predetermined range, convergence is slowed and slowed further when any indication of overshoot is provided. An advantage is thereby provided of rapid yet smooth convergence to reference speed r_s .

CLAIMS

1. A speed control system controlling the engine throttle to maintain vehicle speed at a desired speed
5 comprising:

difference means for generating an error signal by comparing the vehicle speed to the desired speed;

correction means for providing a correction signal related to said error signal and multiplying said
10 correction signal by an adjustable gain value;

gain adjusting means for providing said adjustable gain value with an amplitude functionally related to amplitude of said error signal; and

actuating means for actuating the engine throttle
15 in relation to said product of said correction signal times said gain value.

2. A speed control system as claimed in claim 1, wherein said gain adjusting means provides said
20 adjustable gain value with an amplitude linearly related to said error signal amplitude.

3. A control system as claimed in claim 1, wherein said correction means provides said correction
25 signal by integrating said error signal.

4. A speed control system controlling the engine throttle to maintain vehicle speed at a desired speed comprising:

30 a comparator for comparing the vehicle speed to the desired speed to generate an error signal;

correction means for providing a correction signal related to said error signal and multiplying said correction signal by a variable gain value;

35 gain providing means for providing said variable gain value with a variable amplitude having a first functional relationship to said error signal amplitude, said gain providing means providing said variable gain

30

value with a second functional relationship when said error signal amplitude exceeds a predetermined amplitude; and

actuation means for actuating the engine throttle in relation to said product of said correction signal times said variable gain value.

5 5. A speed control system as claimed in claim 4 wherein said gain providing means provides said variable gain amplitude with said first functional relationship which is linearly related to said error signal amplitude.

6. A speed control system as claimed in claim 5, wherein said gain providing means provides said variable gain amplitude with said second functional relationship which is linearly related to said error signal amplitude.

7. A speed control system claimed in claim 4, wherein said gain providing means provides said second functional relationship with greater sensitivity to said speed error signal than said first functional relationship.

8. A speed control system controlling the engine throttle to maintain vehicle speed at a desired speed comprising:

comparison means for generating an error signal by comparing the vehicle speed to the desired speed;

correction means for providing a plurality of correction signals each related to said error signal and multiplying each of said correction signals by one of an equal plurality of corresponding gain values;

gain providing means for providing each of said variable gain values with a variable amplitude having a first linear relationship to said error signal amplitude, said gain providing means providing said variable gain value with a second linear relationship when said error signal amplitude exceeds a preselected amplitude;

3)

summing means for generating a control signal by summing each of said products of one of said correction signals times one of said corresponding gain values; and

actuation means for actuating the engine throttle
5 in relation to said control signal.

9. A speed control system as claimed in claim 8, wherein said correction means provides said second linear relationship with greater sensitivity than said first
10 linear relationship.

10. A speed control system as claimed in claim 8, wherein said correction means provides a first correction signal by multiplying said error signal by a
15 first one of said gain values.

11. A speed control system as claimed in claim 10, wherein said correction means provides a second correction signal by integrating said error signal and
20 multiplying said integral by a second one of said gain value.

12. A speed control method controlling the engine throttle to maintain vehicle speed at a desired
25 speed, comprising the steps of:

comparing the vehicle speed to the desired speed to generate an error signal;

generating a correction signal related to said error signal and multiplying said correction signal by a
30 variable gain value;

providing said variable gain value with a variable amplitude having a first functional relationship to said error signal amplitude and a second functional relationship to said error signal when said error signal
35 amplitude exceeds a predetermined amplitude; and

actuating the engine throttle in relation to said product of said correction signal times said variable gain value.

32

13. A speed control method as claimed in claim 12 wherein said gain providing step provides said variable gain amplitude with said first functional relationship which is linearly related to said error signal amplitude.

5

14. A speed control method as claimed in claim 12, wherein said gain providing step provides said variable gain amplitude with said second functional relationship which is linearly related to said error

10 signal amplitude.

15. A method as claimed in claim 12, wherein said gain providing step provides said second functional relationship with greater sensitivity to said speed error

15 signal than said first functional relationship.

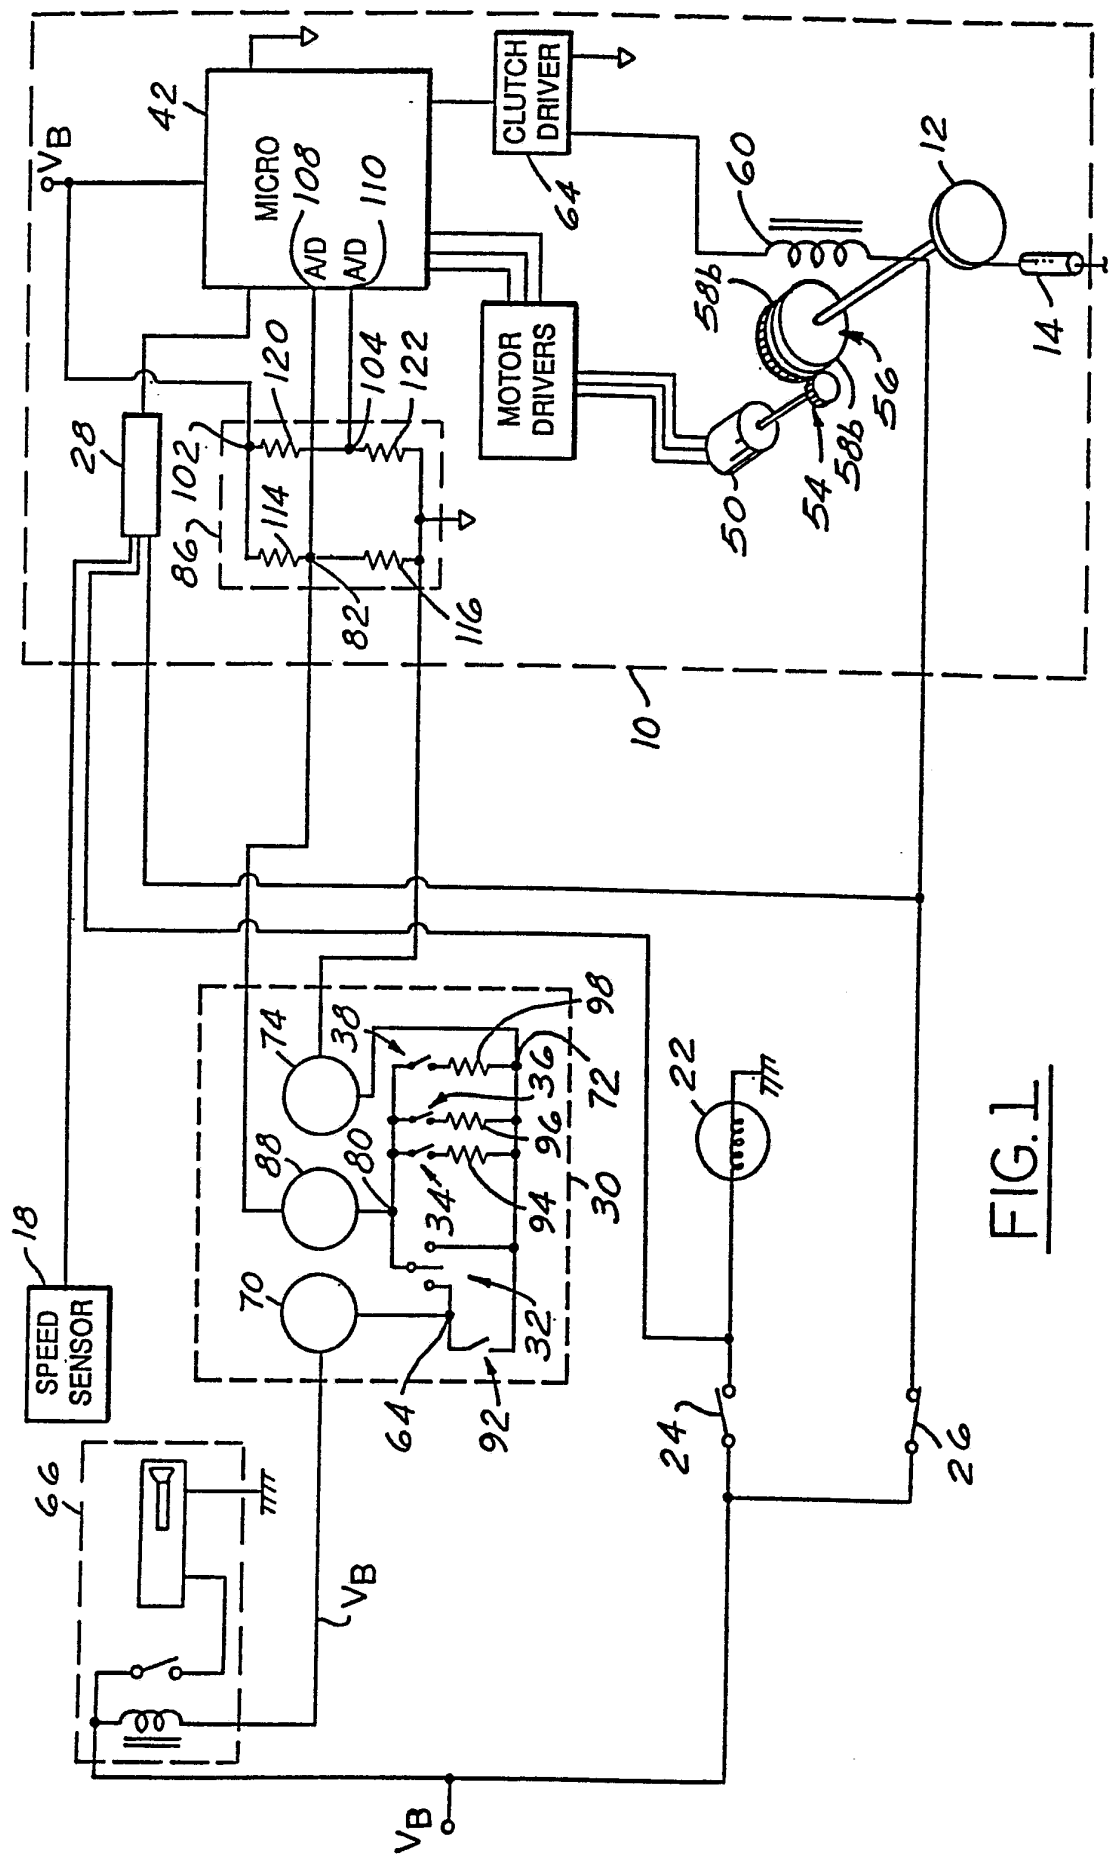
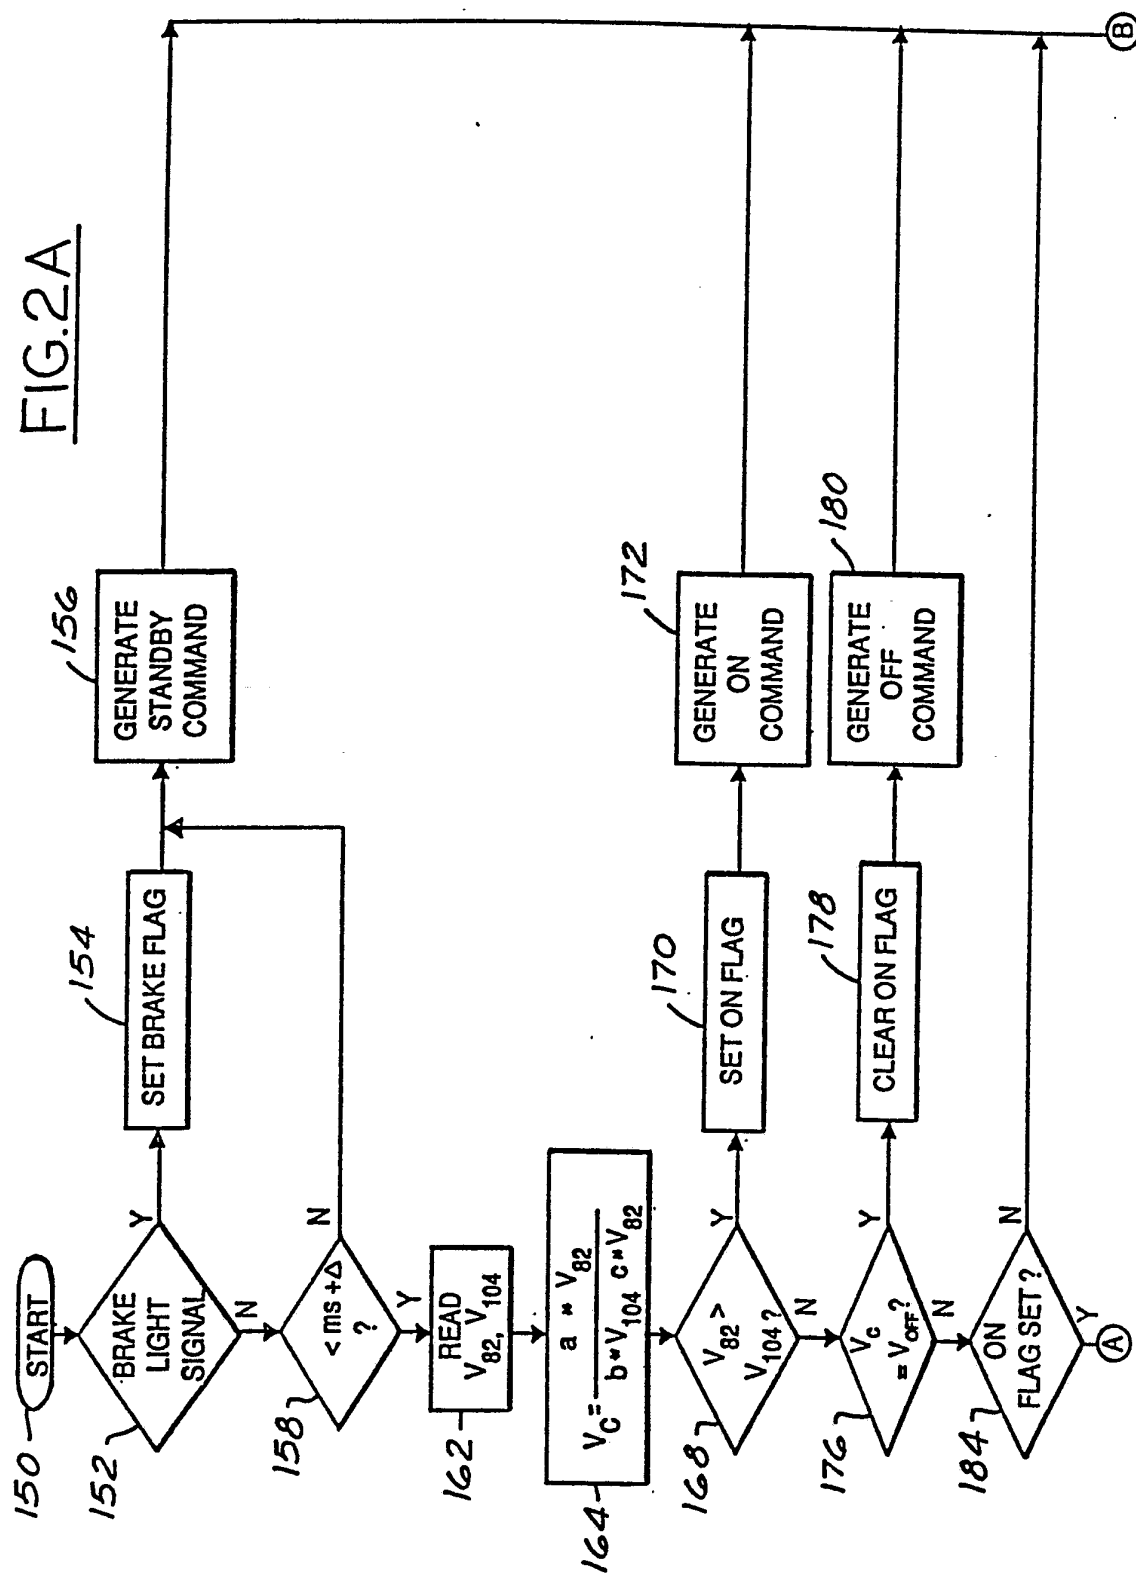


FIG. 1

FIG. 2A



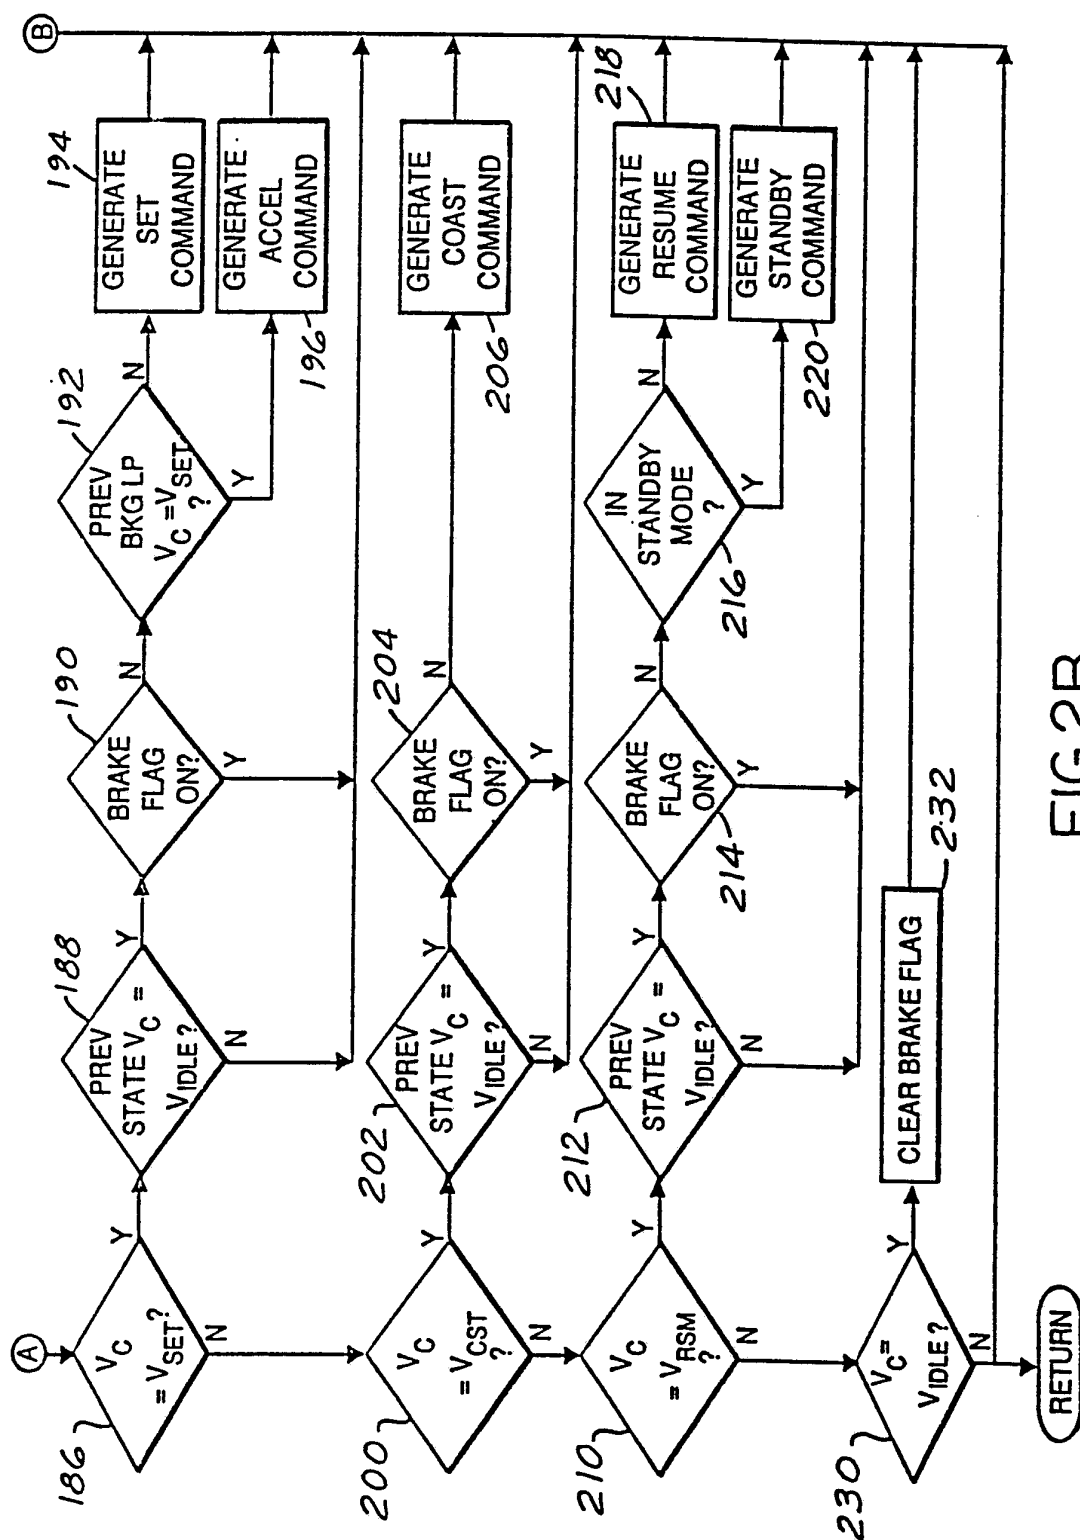
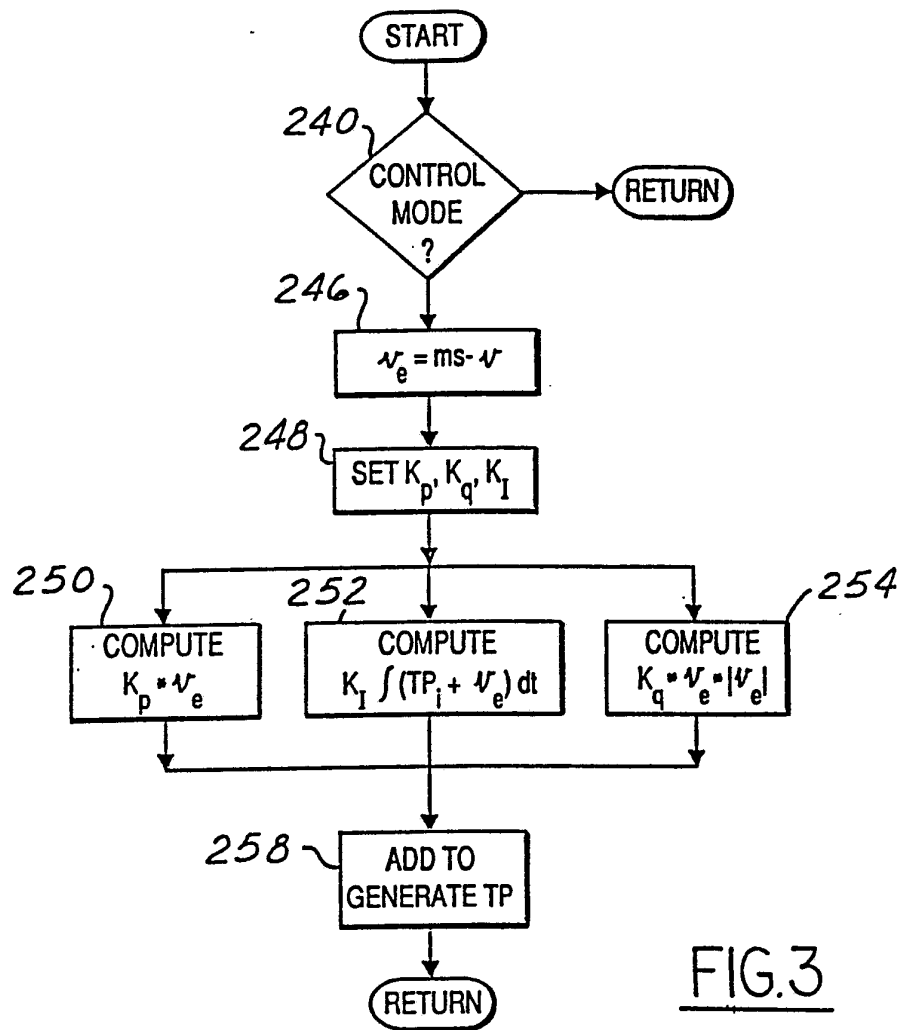
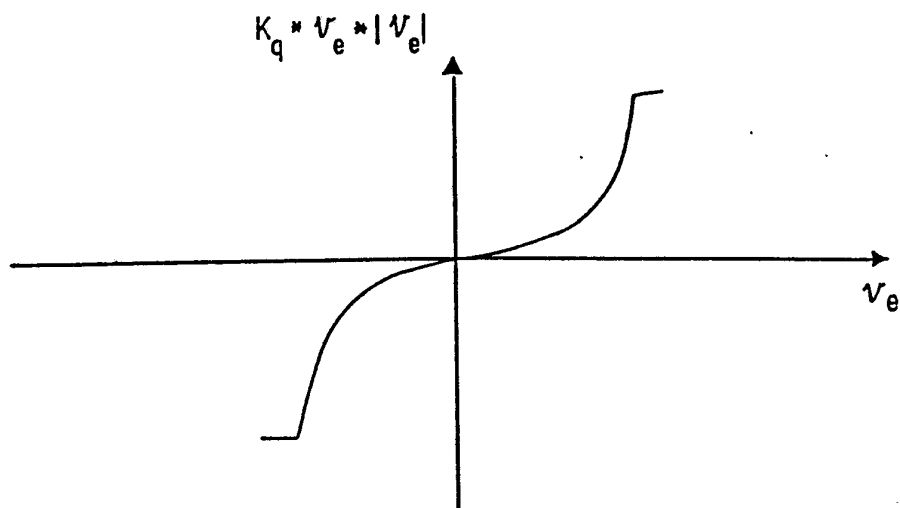
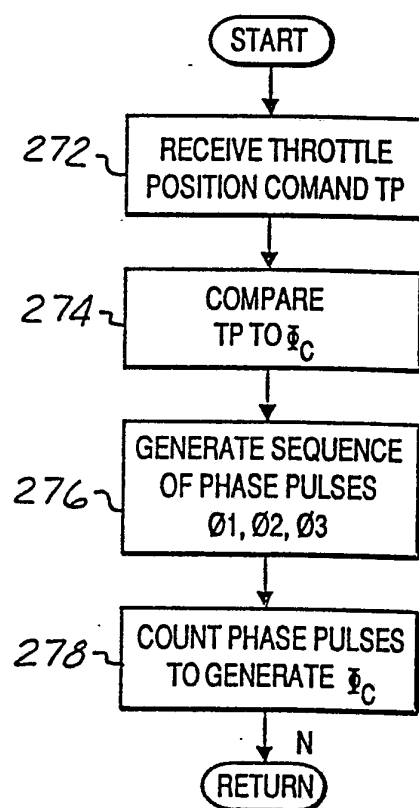
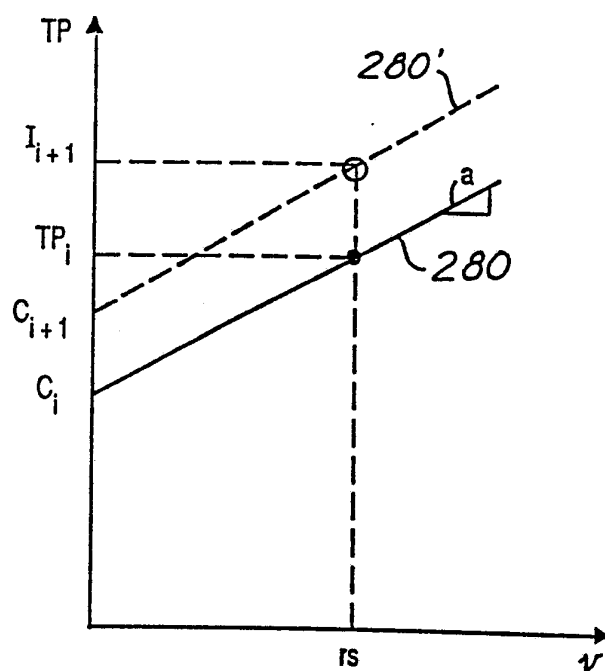


FIG. 2B


4 / 15

FIG.4

5 / 15

FIG. 5FIG. 7

6 / 15

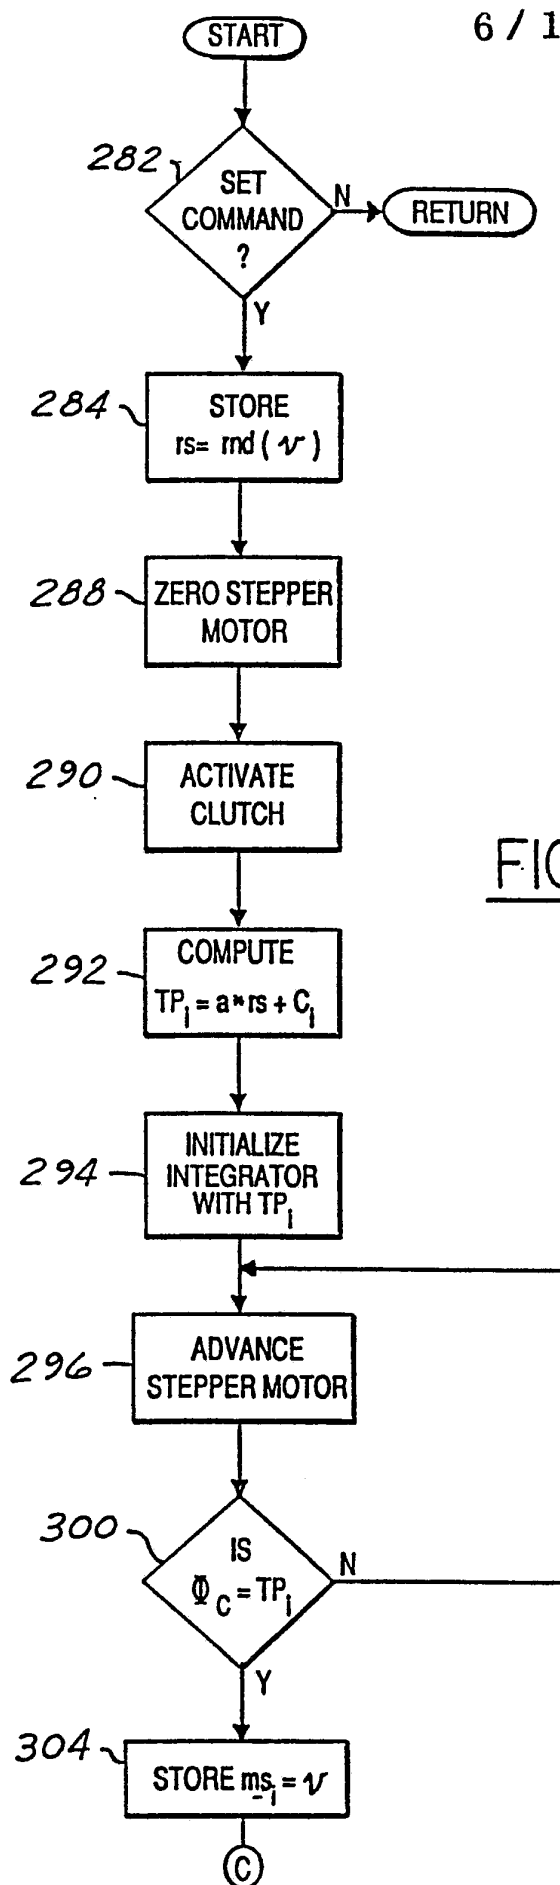

7 / 15

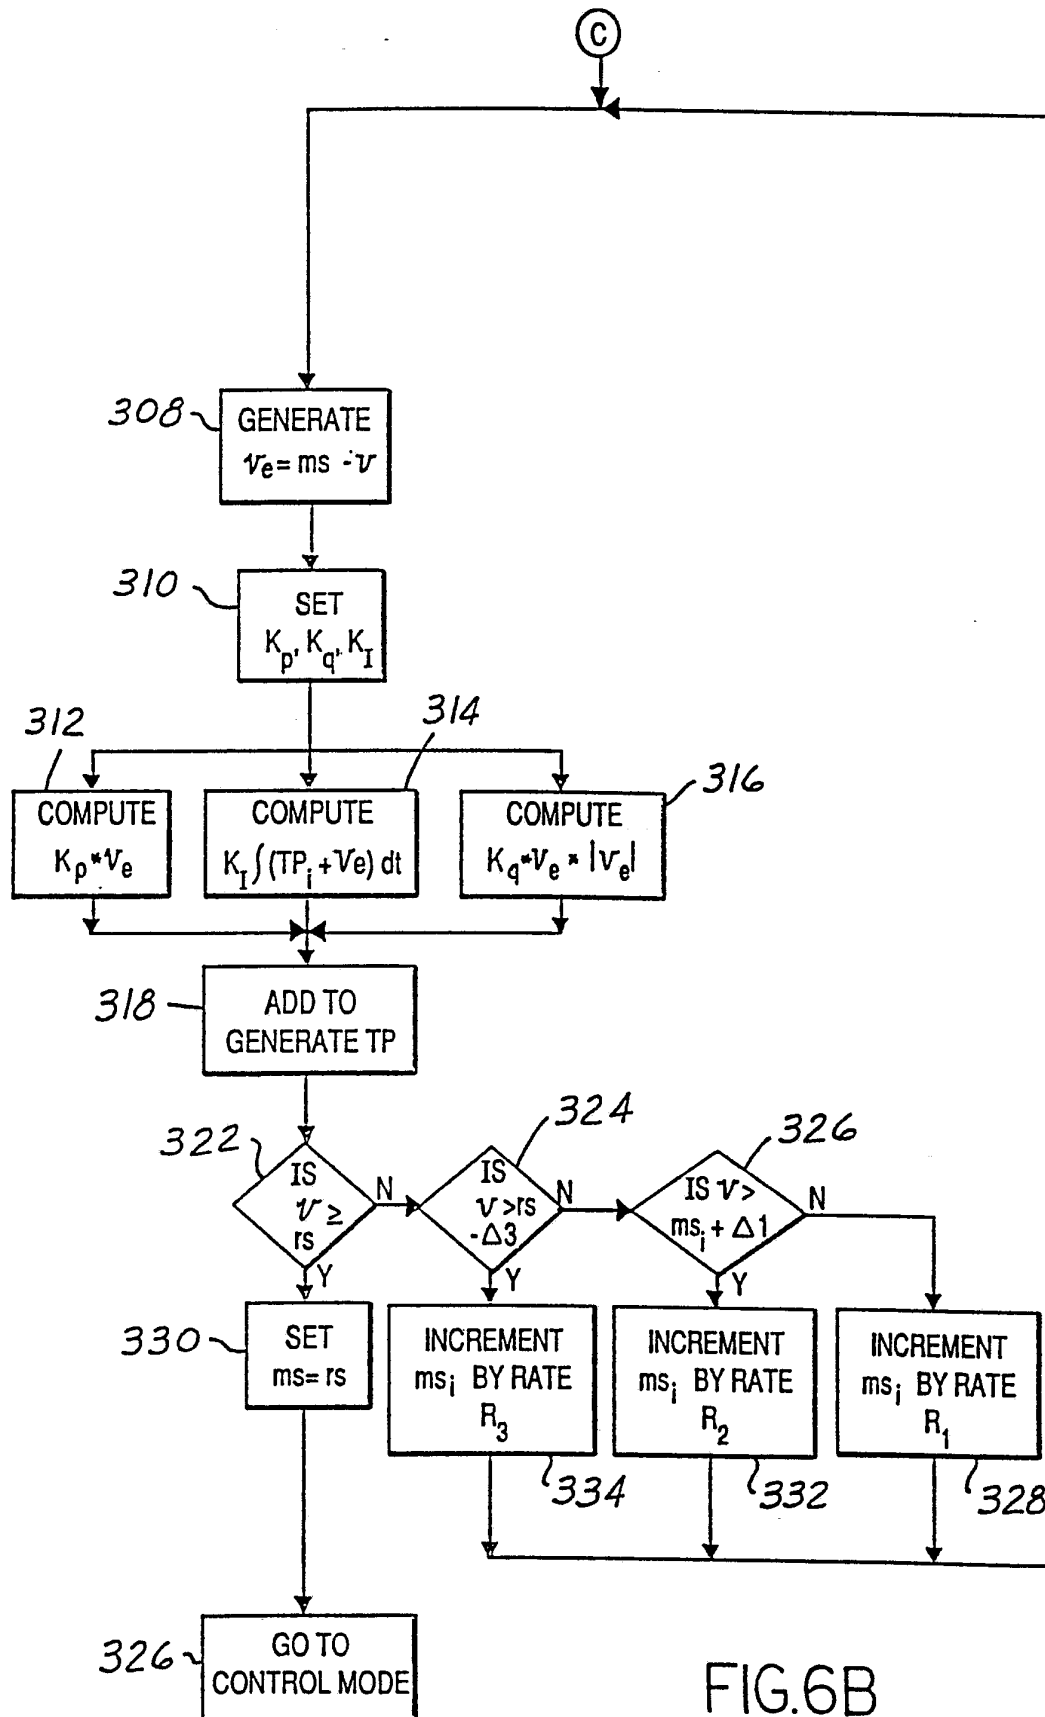


FIG. 6B

8 / 15

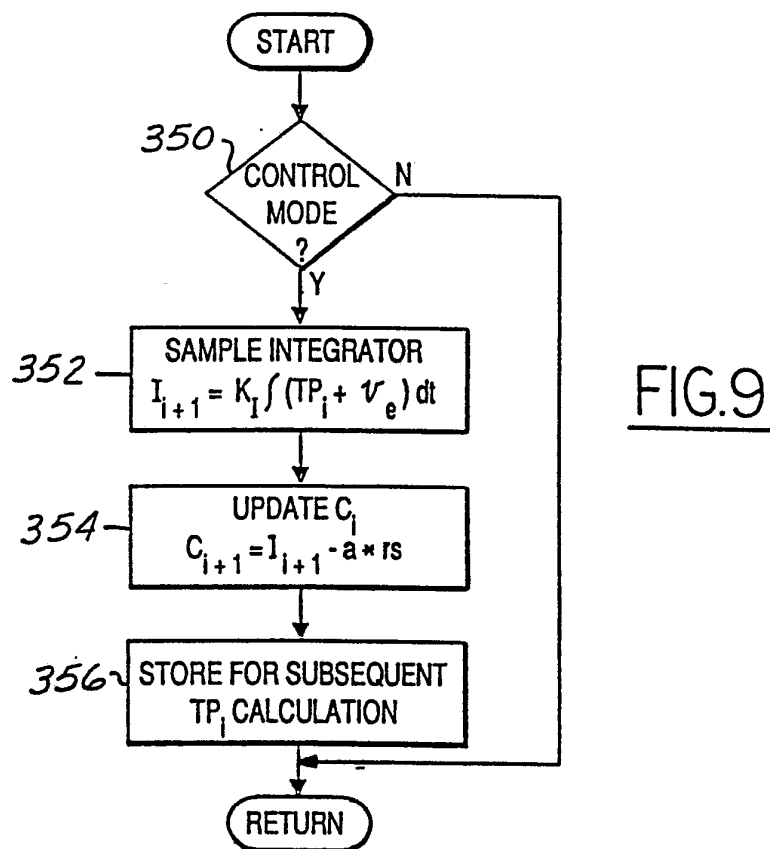
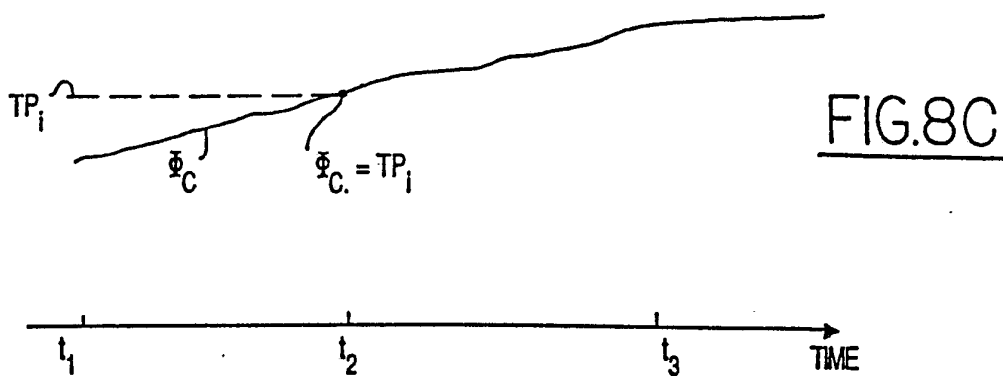
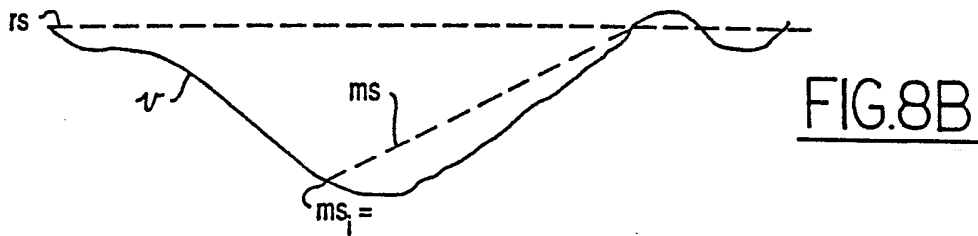

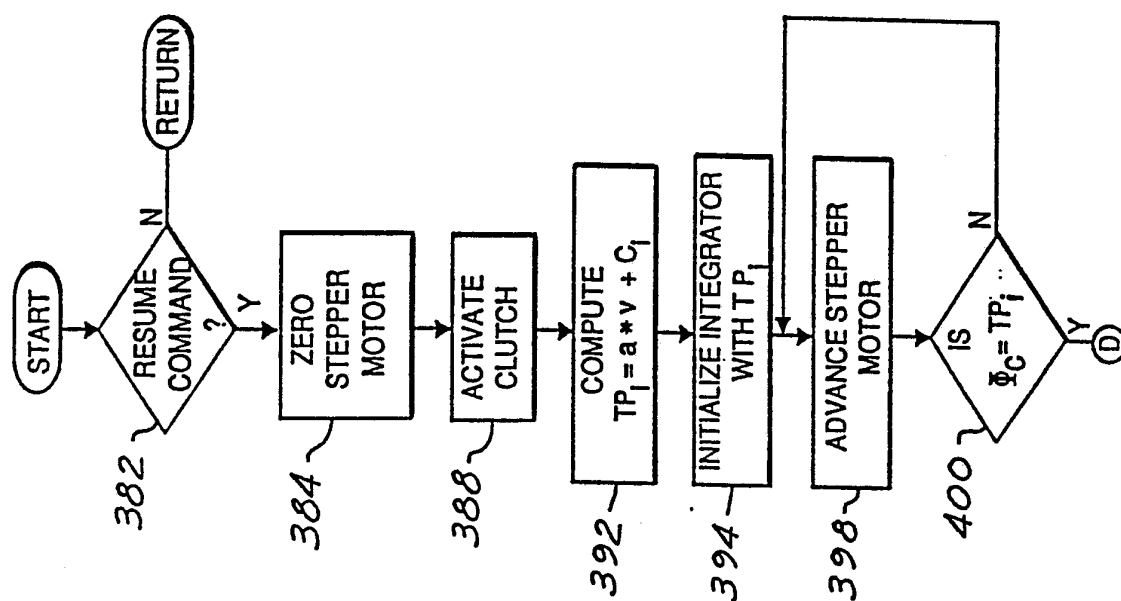

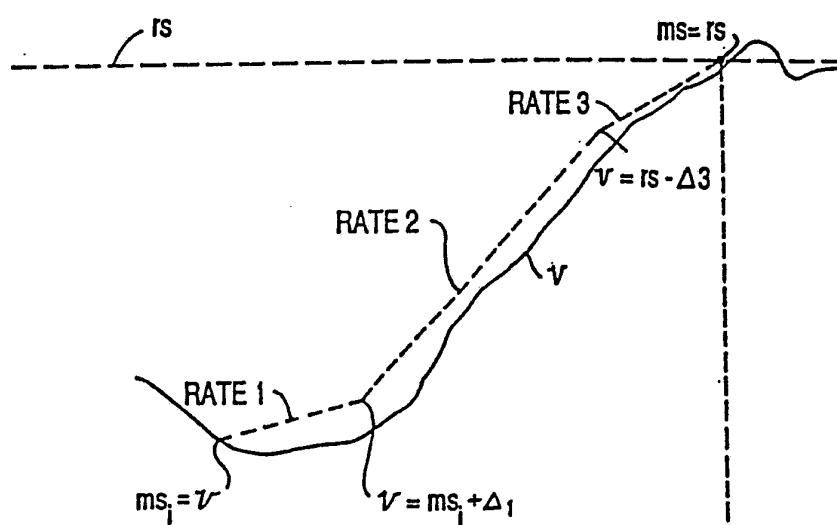
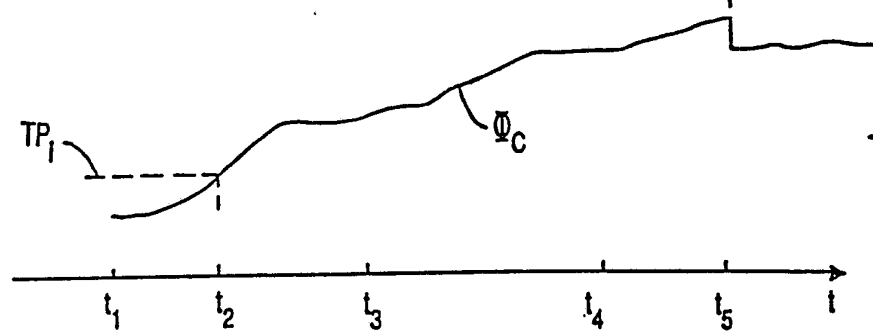


FIG. 10A

11 / 15

FIG. IIAFIG. IIBFIG. IIC

12 / 15



FIG. 12A

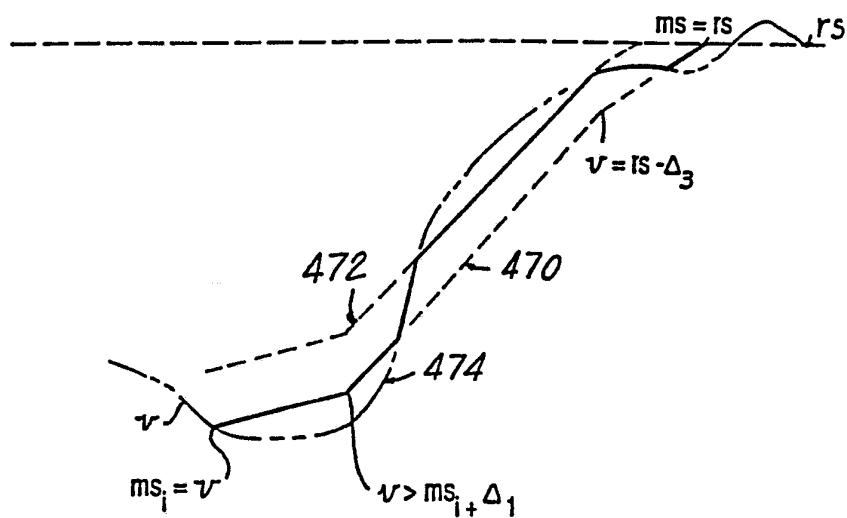


FIG. 12B

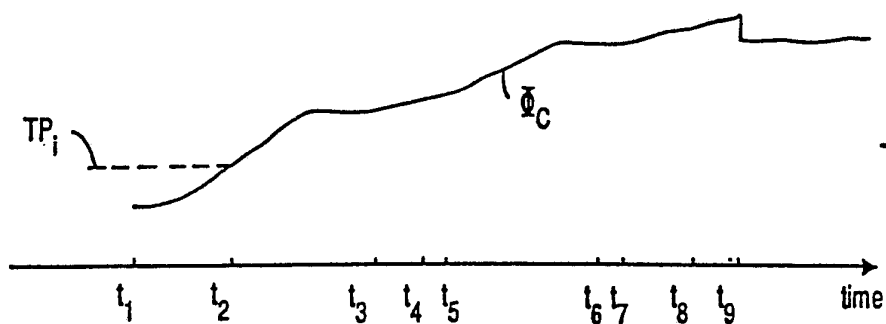


FIG. 12C

13 / 15

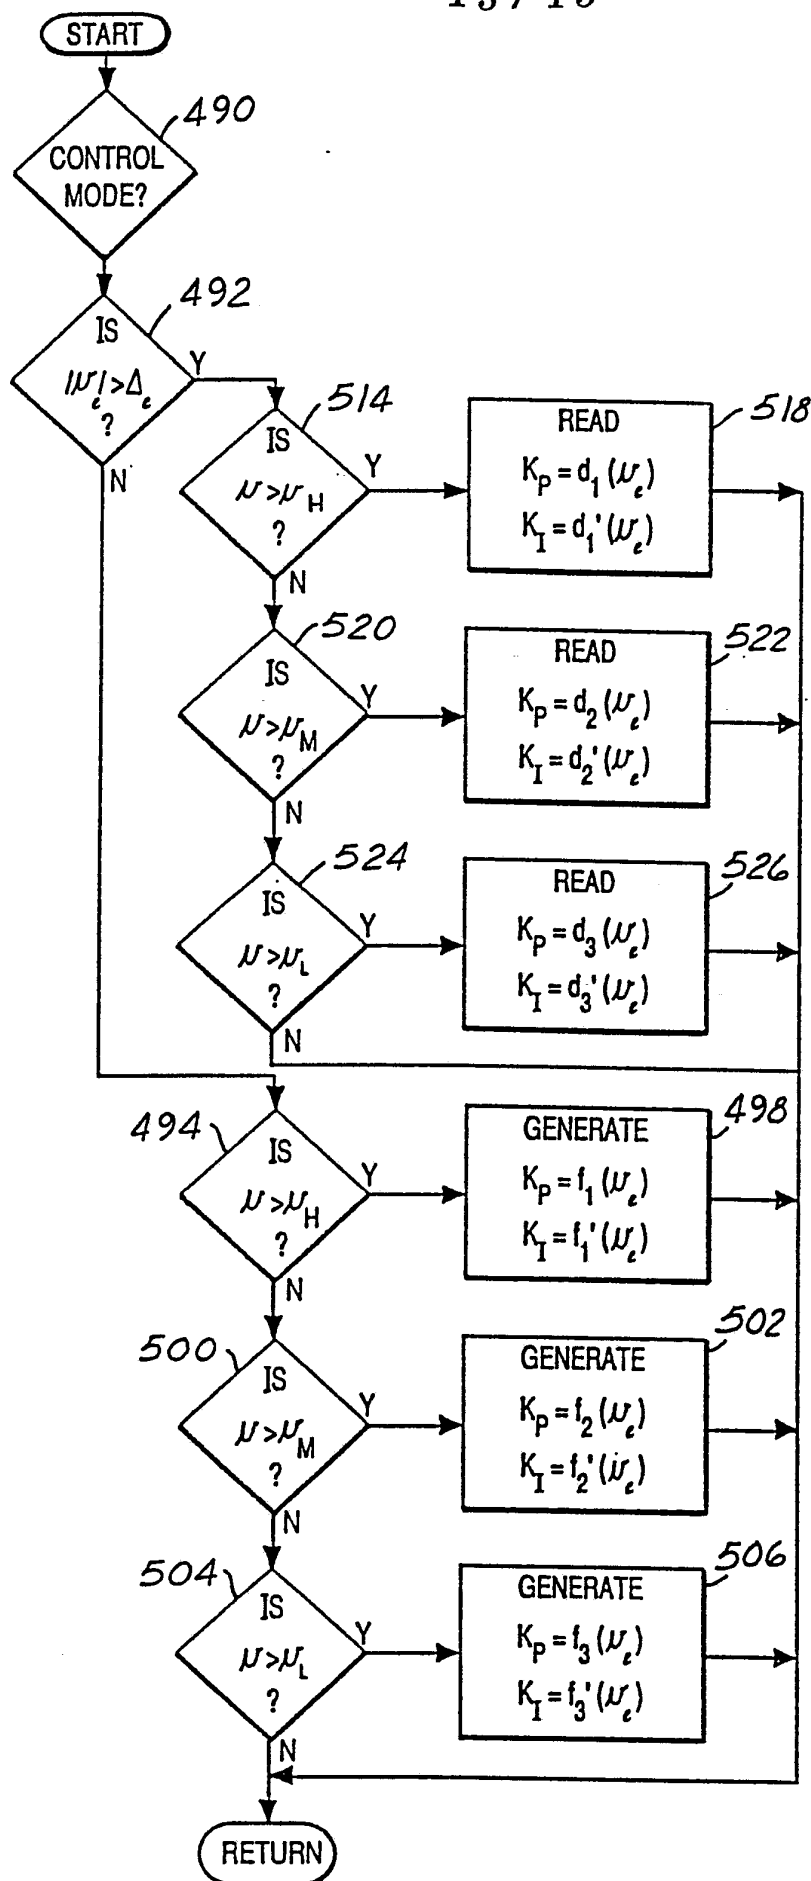


FIG. 13

14 / 15

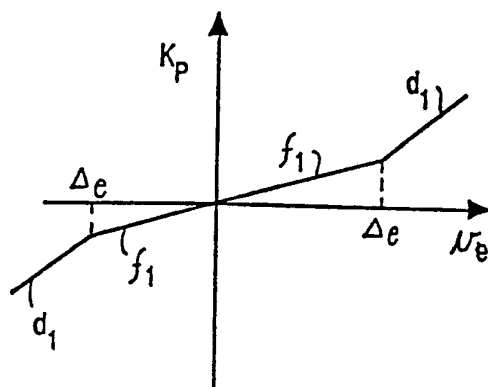


FIG. 14

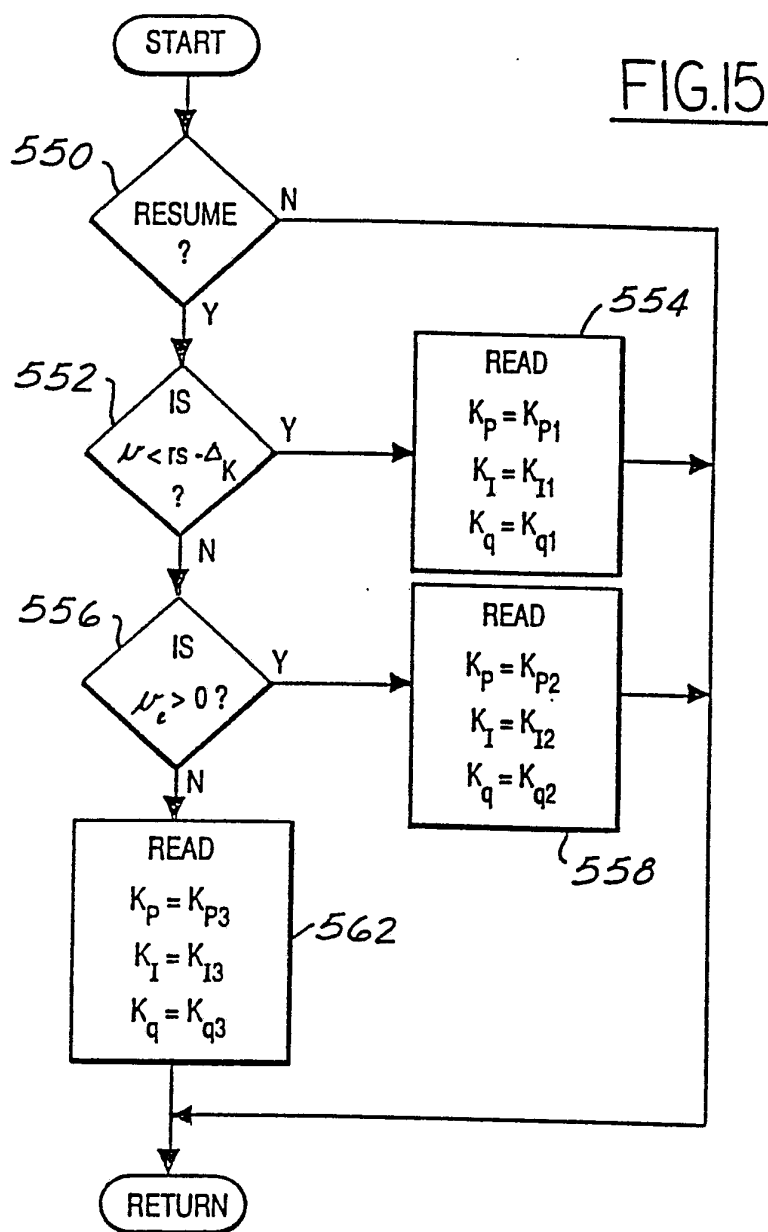
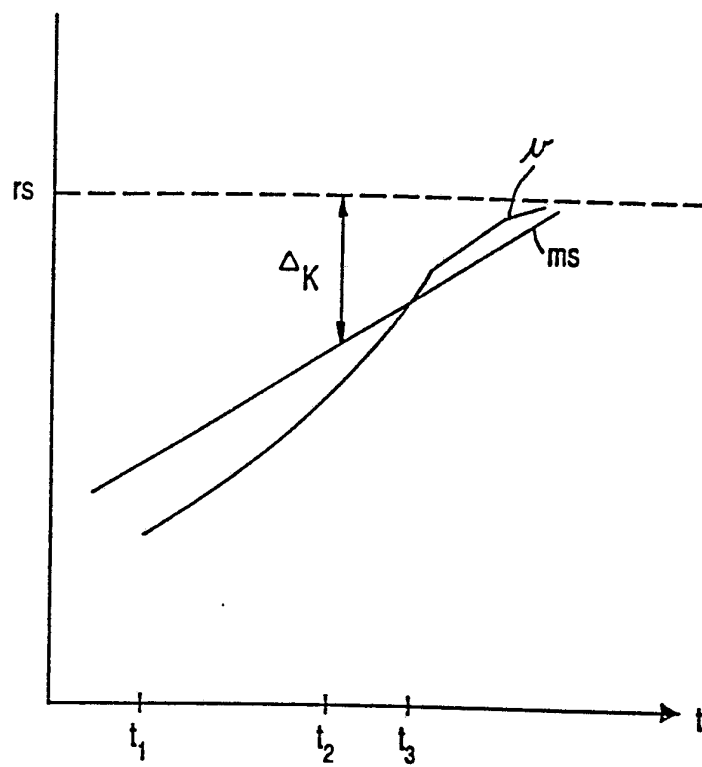


FIG. 15

15 / 15

FIG.16

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 92/01720

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁴ According to International Patent Classification (IPC) or to both National Classification and IPC IPC ⁵ : B 60 K 31/00																				
II. FIELDS SEARCHED Minimum Documentation Searched ⁷ <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 50%; text-align: left; border-bottom: 1px solid black;">Classification System</th> <th style="width: 50%; text-align: left; border-bottom: 1px solid black;">Classification Symbols</th> </tr> <tr> <td style="border-bottom: 1px solid black;">IPC⁵</td> <td style="border-bottom: 1px solid black;">B 60 K</td> </tr> </table> Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁶			Classification System	Classification Symbols	IPC ⁵	B 60 K														
Classification System	Classification Symbols																			
IPC ⁵	B 60 K																			
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁸ <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%; text-align: left; padding: 5px;">Category ⁹</th> <th style="width: 70%; text-align: left; padding: 5px;">Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²</th> <th style="width: 20%; text-align: left; padding: 5px;">Relevant to Claim No. ¹³</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">X</td> <td style="padding: 5px;">DE, A1, 3 841 386 (MAZDA MOTOR CORPORATION) 29 June 1989 (29.06.89), see abstract; claim 1. --</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1, 4, 8, 12</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">X</td> <td style="padding: 5px;">US, A, 4 098 242 (ANDERSON) 04 July 1978 (04.07.78), see abstract; claims 1-3. --</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1, 4, 8, 12</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">US, A, 4 856 609 (NAITO) 15 August 1989 (15.08.89), see abstract. --</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1, 4, 8, 12</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">US, A, 4 803 637 (TADA et al.) 07 February 1989 (07.02.89), see abstract. --</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1, 4, 8, 12</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">US, A, 3 885 644 (SEIDLER et al.) 27 May 1975</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1, 4, 8, 12</td> </tr> </tbody> </table>			Category ⁹	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³	X	DE, A1, 3 841 386 (MAZDA MOTOR CORPORATION) 29 June 1989 (29.06.89), see abstract; claim 1. --	1, 4, 8, 12	X	US, A, 4 098 242 (ANDERSON) 04 July 1978 (04.07.78), see abstract; claims 1-3. --	1, 4, 8, 12	A	US, A, 4 856 609 (NAITO) 15 August 1989 (15.08.89), see abstract. --	1, 4, 8, 12	A	US, A, 4 803 637 (TADA et al.) 07 February 1989 (07.02.89), see abstract. --	1, 4, 8, 12	A	US, A, 3 885 644 (SEIDLER et al.) 27 May 1975	1, 4, 8, 12
Category ⁹	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³																		
X	DE, A1, 3 841 386 (MAZDA MOTOR CORPORATION) 29 June 1989 (29.06.89), see abstract; claim 1. --	1, 4, 8, 12																		
X	US, A, 4 098 242 (ANDERSON) 04 July 1978 (04.07.78), see abstract; claims 1-3. --	1, 4, 8, 12																		
A	US, A, 4 856 609 (NAITO) 15 August 1989 (15.08.89), see abstract. --	1, 4, 8, 12																		
A	US, A, 4 803 637 (TADA et al.) 07 February 1989 (07.02.89), see abstract. --	1, 4, 8, 12																		
A	US, A, 3 885 644 (SEIDLER et al.) 27 May 1975	1, 4, 8, 12																		
¹⁰ Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "Z" document member of the same patent family																				
IV. CERTIFICATION <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; padding: 5px;"> Date of the Actual Completion of the International Search 23 October 1992 </td> <td style="width: 50%; padding: 5px;"> Date of Mailing of this International Search Report 13 NOV 1992 </td> </tr> <tr> <td style="width: 50%; padding: 5px;"> International Searching Authority EUROPEAN PATENT OFFICE </td> <td style="width: 50%; padding: 5px;"> Signature of Authorized Officer HENGL </td> </tr> </table>			Date of the Actual Completion of the International Search 23 October 1992	Date of Mailing of this International Search Report 13 NOV 1992	International Searching Authority EUROPEAN PATENT OFFICE	Signature of Authorized Officer HENGL														
Date of the Actual Completion of the International Search 23 October 1992	Date of Mailing of this International Search Report 13 NOV 1992																			
International Searching Authority EUROPEAN PATENT OFFICE	Signature of Authorized Officer HENGL																			

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	(27.05.75), see abstract. -- US, A, 4 094 378 (SCHEYING et al.) 13 June 1978 (13.06.78), see abstract. ----	1, 4, 8, 12

ANHANG

zum internationalen Recherchen-
bericht über die internationale
Patentanmeldung Nr.

ANNEX

to the International Search
Report to the International Patent
Application No.

ANNEXE

au rapport de recherche inter-
national relatif à la demande de brevet
international n°

PCT/EP 92/01720 SAE 62596

In diesem Anhang sind die Mitglieder
der Patentfamilien der im obenge-
nannten internationalen Recherchenbericht
angeführten Patentdokumente angegeben.
Diese Angaben dienen nur zur Unter-
richtung und erfolgen ohne Gewähr.

This Annex lists the patent family
members relating to the patent documents
cited in the above-mentioned inter-
national search report. The Office is
in no way liable for these particulars
which are given merely for the purpose
of information.

La présente annexe indique les
membres de la famille de brevets
relatifs aux documents de brevets cités
dans le rapport de recherche inter-
national visée ci-dessus. Les renseigne-
ments fournis sont donnés à titre indica-
tif et n'engagent pas la responsabilité
de l'Office.

In Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
DE A1 3841386	29-06-89	JP A2 1153344	15-06-89
US A 4098242	04-07-78	CA A1 1112741	17-11-81
		DD C 131682	12-07-78
		DE A1 2722405	29-12-77
		FR A1 2355324	13-01-78
		FR B3 2355324	20-06-80
		GB A 1560962	13-02-80
		JP A2 52156288	26-12-77
		PL O 198888	30-01-78
		SE A 7706987	18-12-77
US A 4856609	15-08-89	JP A2 63028735	06-02-88
		WO A1 9007439	12-07-90
US A 4803637	07-02-89	JP A2 63188532	04-08-88
		JP A2 63025146	02-02-88
US A 3885644	27-05-75	BR A 7409925	25-05-76
		CA A1 1023036	20-12-77
		DE A1 2458387	19-06-75
		JP A2 50089787	18-07-75
		JP B4 53007593	18-03-78
US A 4094378	13-06-78	AT A 5945/76	15-06-78
		AT B 348353	12-02-79
		DE A1 2537415	03-03-77
		DE C2 2537415	19-05-82
		FR A1 2321397	18-03-77
		FR B3 2321397	18-05-79
		GB A 1541267	28-02-79