United States Patent [19]

Wycoff

[11] E **Re. 28,739**

[45] **Reissued Mar. 16, 1976**

[54] **TONE CONTROL CIRCUIT HAVING A FREQUENCY CONTROLLABLE FILTER**

[76] Inventor: **Keith H. Wycoff,** 1205 N. Tyler St., Lexington, Nebr. 68850

[22] Filed: **June 11, 1973**

[21] Appl. No.: **368,946**

Related U.S. Patent Documents

Reissue of:

[64] Patent No.: **3,597,690**
Issued: **Aug. 3, 1971**
Appl. No.: **666,645**
Filed: **Sept. 11, 1967**

[52] **U.S. Cl.** ..... **325/55;** 325/64; 340/171 PF

[51] **Int. Cl.²** **H04B 1/04**

[58] **Field of Search** ..... 325/55, 64, 390, 392, 466, 325/478; 340/170, 171 R, 171 A, 171 PF, 311, 312; 343/225, 228

[56] **References Cited**

UNITED STATES PATENTS

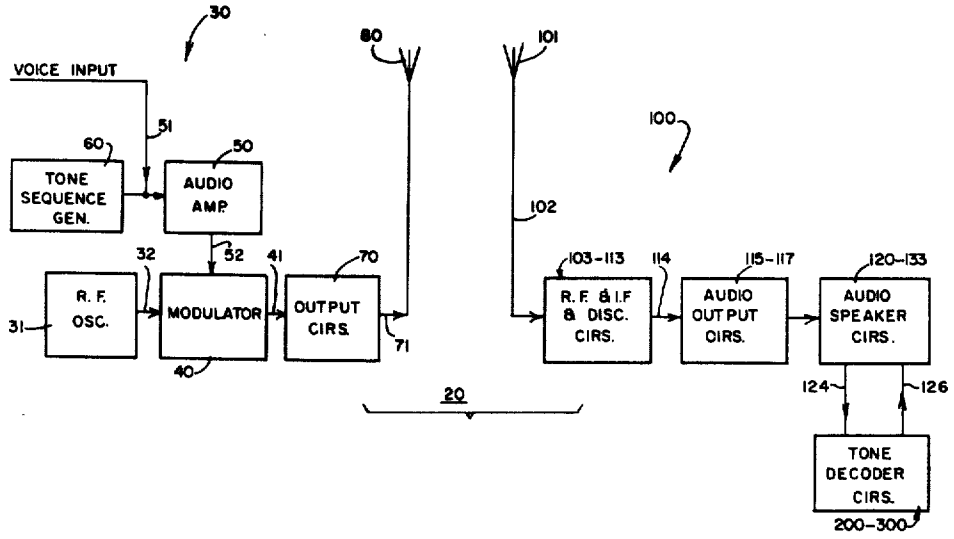
2,523,914	9/1950	Molnar	325/64
2,524,782	10/1950	Ferrar et al.	325/64 X
2,531,416	11/1950	Ferrar	325/392 X
3,304,501	2/1967	Ruthenberg	325/64 X
3,336,533	8/1967	Glasser	325/64
3,418,577	12/1968	Fischer	325/64 X
3,670,242	6/1972	McGarvey	340/171

Primary Examiner—Benedict V. Safourek
Attorney, Agent, or Firm—Prangley, Dithmar, Vogel, Sandler & Stotland

[57] **ABSTRACT**

A tone control circuit is in a receiver adapted to respond to a sequence of control tones alternately selected from a first group of tones in a first band of frequencies and a second group of tones in a second band of frequencies, wherein the two bands are separated by an intermediate band and wherein the time duration of the gap between adjacent tones in the sequence of tones is substantially zero, the tone control circuit including a filter device which is tuned to the frequencies of the control tones as they are received, a plurality of AND circuits corresponding in number to the control tones and respectively having one input coupled to the filter device and another input coupled to the preceding AND circuit so that each AND circuit is operative to produce an output only in the presence of a tone being passed by the filter and an output signal from the preceding AND circuit, the filter device being tuneable either manually or electronically via the outlet signals from the AND circuits.

65 Claims, 9 Drawing Figures



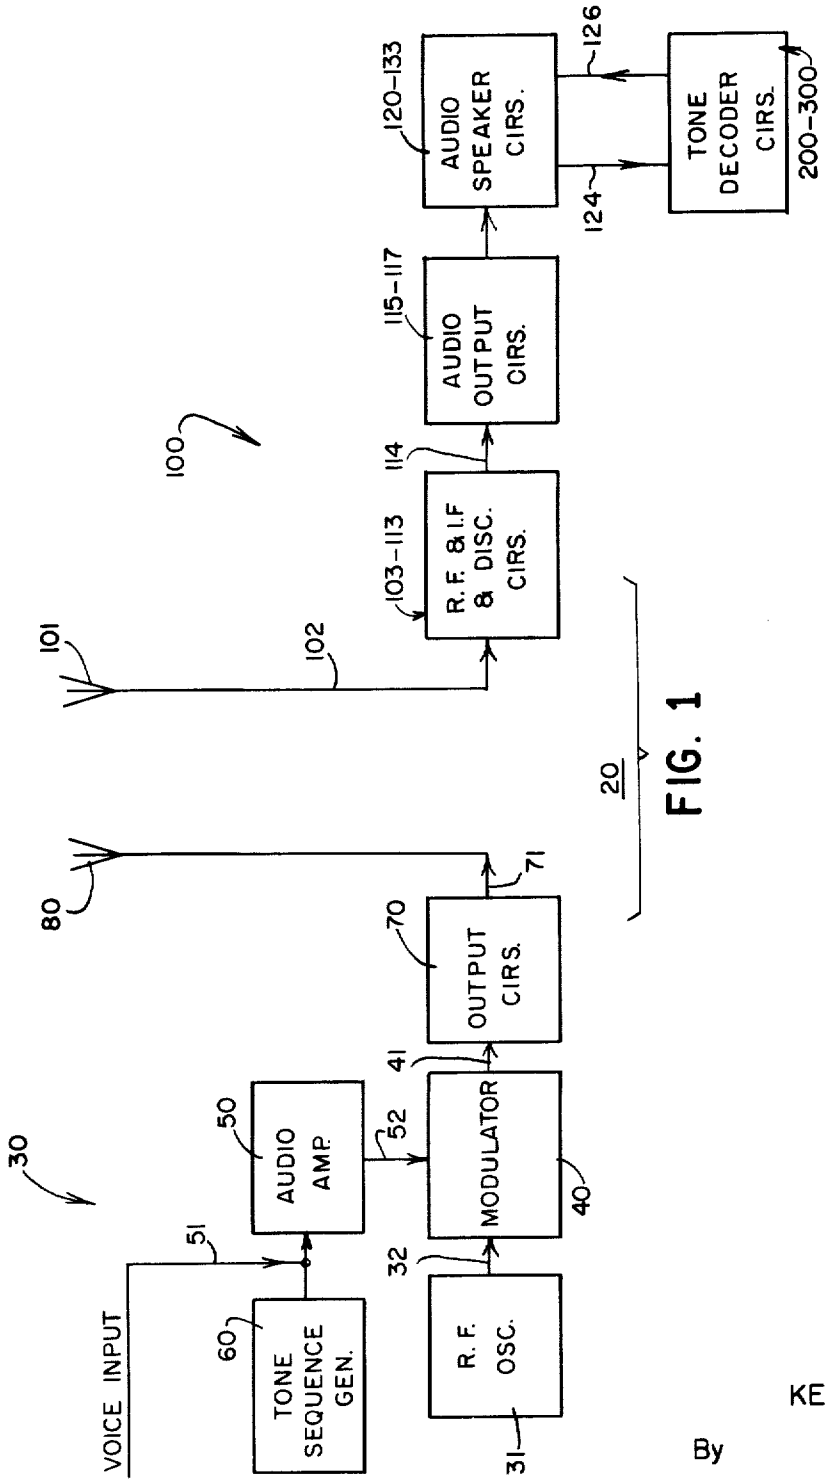


FIG. 1

Inventor
KEITH H. WYCOFF

By

Brangley, Baird, Clayton, Miller & Vogel.
Attys.

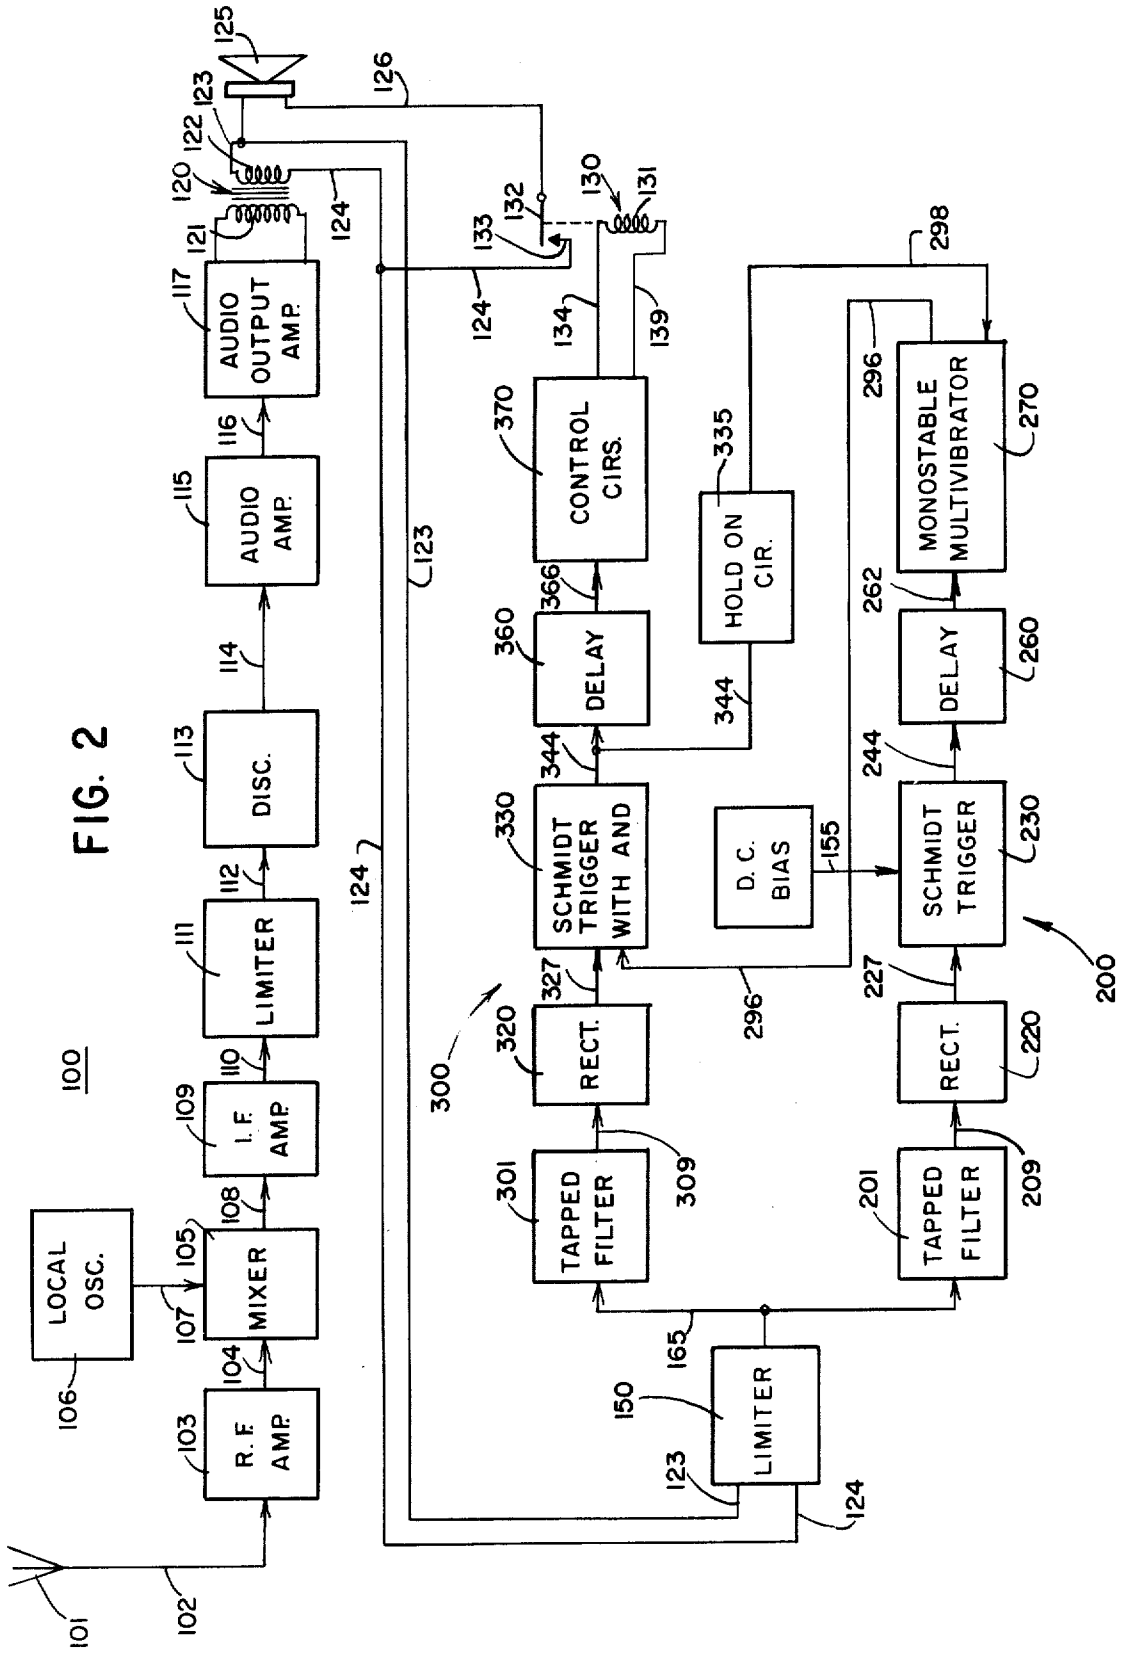
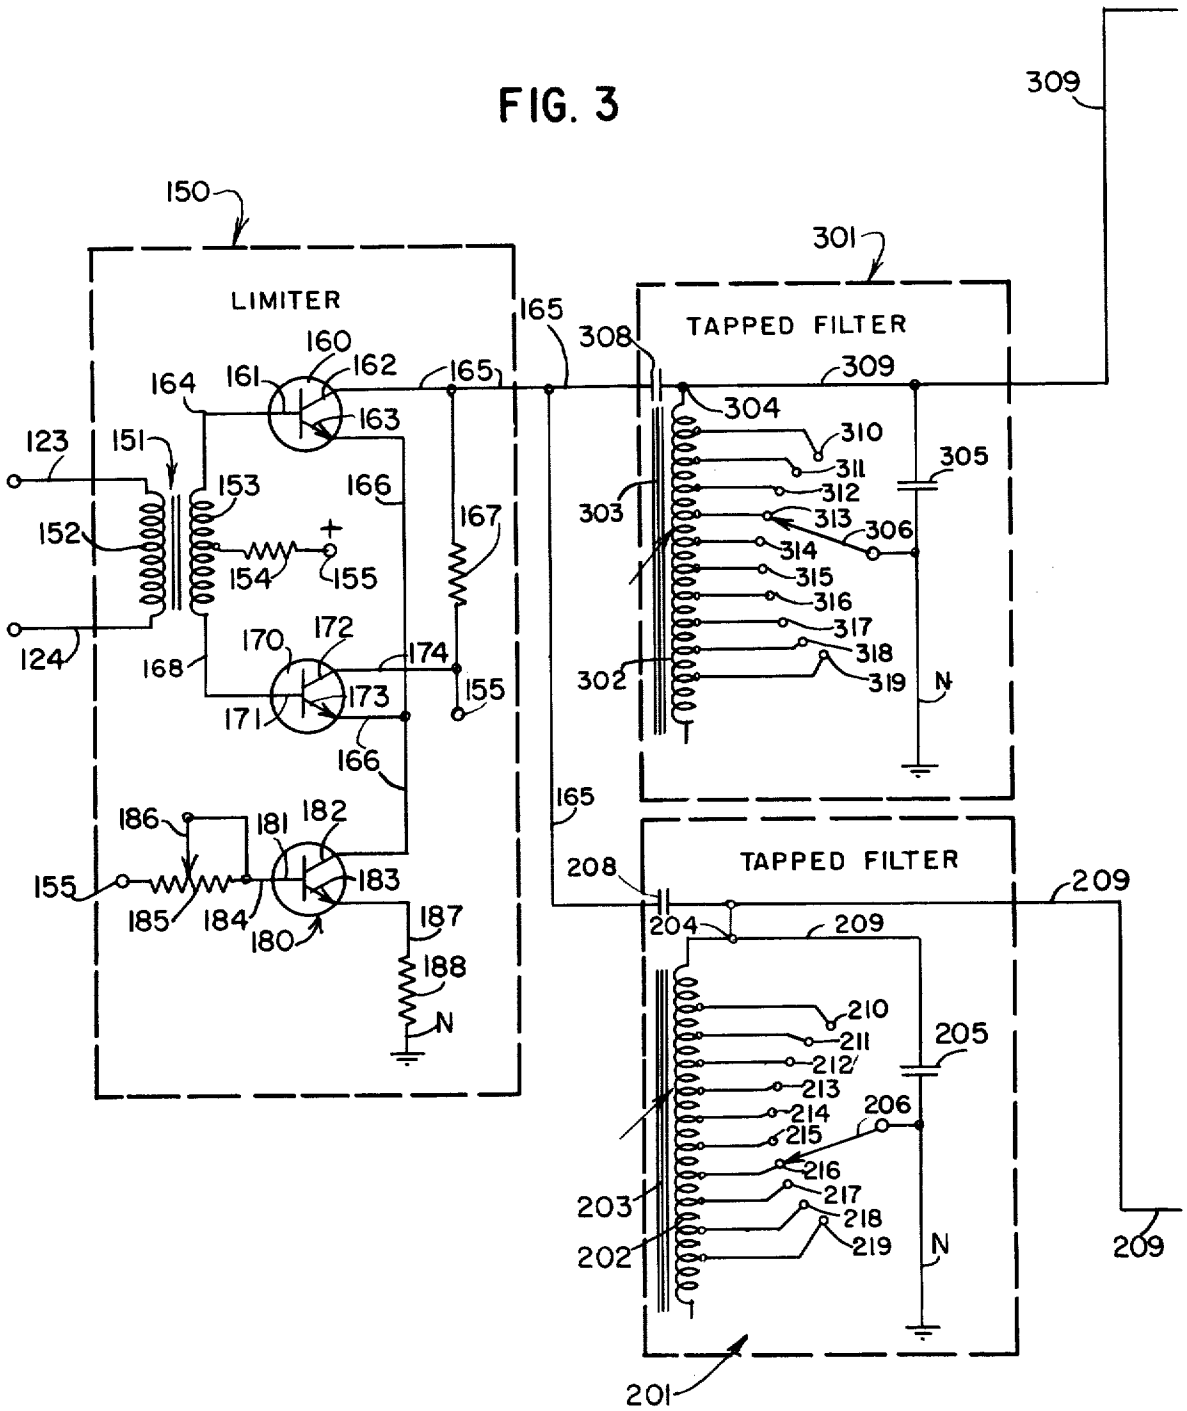

100
101
102
R.F. AMP
103
104
MIXER
105
107
LOCAL OSC.
106
108
I.F. AMP
109
110
LIMITER
111
112
DISC.
113
114
AUDIO AMP.
115
116
AUDIO OUTPUT AMP.
117
120
121
122
123
125
126
124
133
132
130
131
134
139
CONTROL CIRS.
370
HOLD ON CIR.
335
DELAY
360
366
SCHMIDT TRIGGER WITH AND
330
344
D.C. BIAS
155
RECT.
320
327
TAPPED FILTER
301
309
300
LIMITER
150
165
296
298
MONOSTABLE MULTIVIBRATOR
270
DELAY
260
262
SCHMIDT TRIGGER
230
244
RECT.
220
227
TAPPED FILTER
201
209
200

FIG. 2

FIG. 3


150
LIMITER
160
161
162
164
163
165
123
151
153
166
167
152
154
155
124
168
170
172
174
171
173
186
181
182
183
185
184
180
187
188
N
165
308
TAPPED FILTER
301
309
304
310
311
312
313
306
314
315
316
317
318
319
305
303
302
N
208
TAPPED FILTER
204
209
210
211
212
213
214
215
216
217
218
219
205
206
203
202
N
201

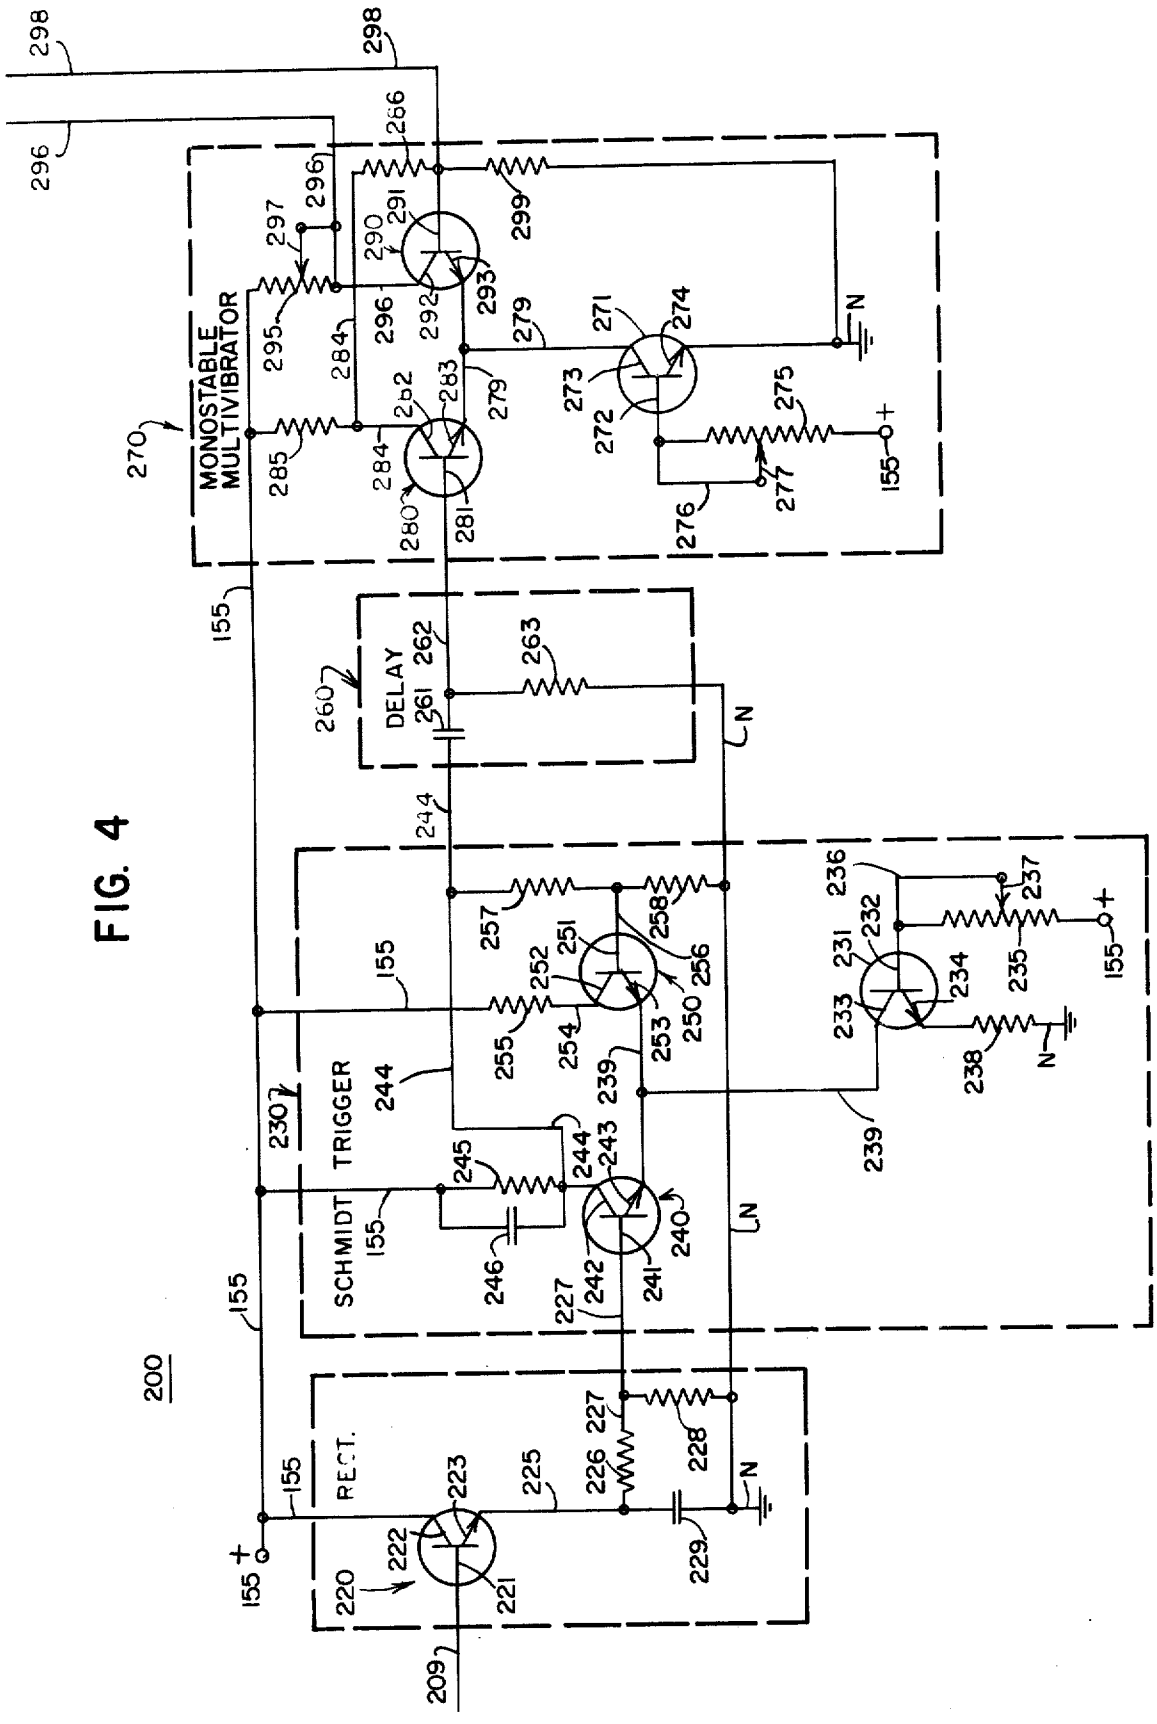

MONOSTABLE MULTIVIBRATOR
DELAY
SCHMIDT TRIGGER
RECT.
200
209
220
221
222
223
225
226
227
228
229
230
240
241
242
243
244
245
246
250
251
252
253
254
255
256
257
258
260
261
262
263
270
271
272
273
274
275
276
277
279
280
281
283
284
285
290
291
292
293
295
296
297
298
299
231
232
233
234
235
236
237
238
239
N
155

FIG. 4

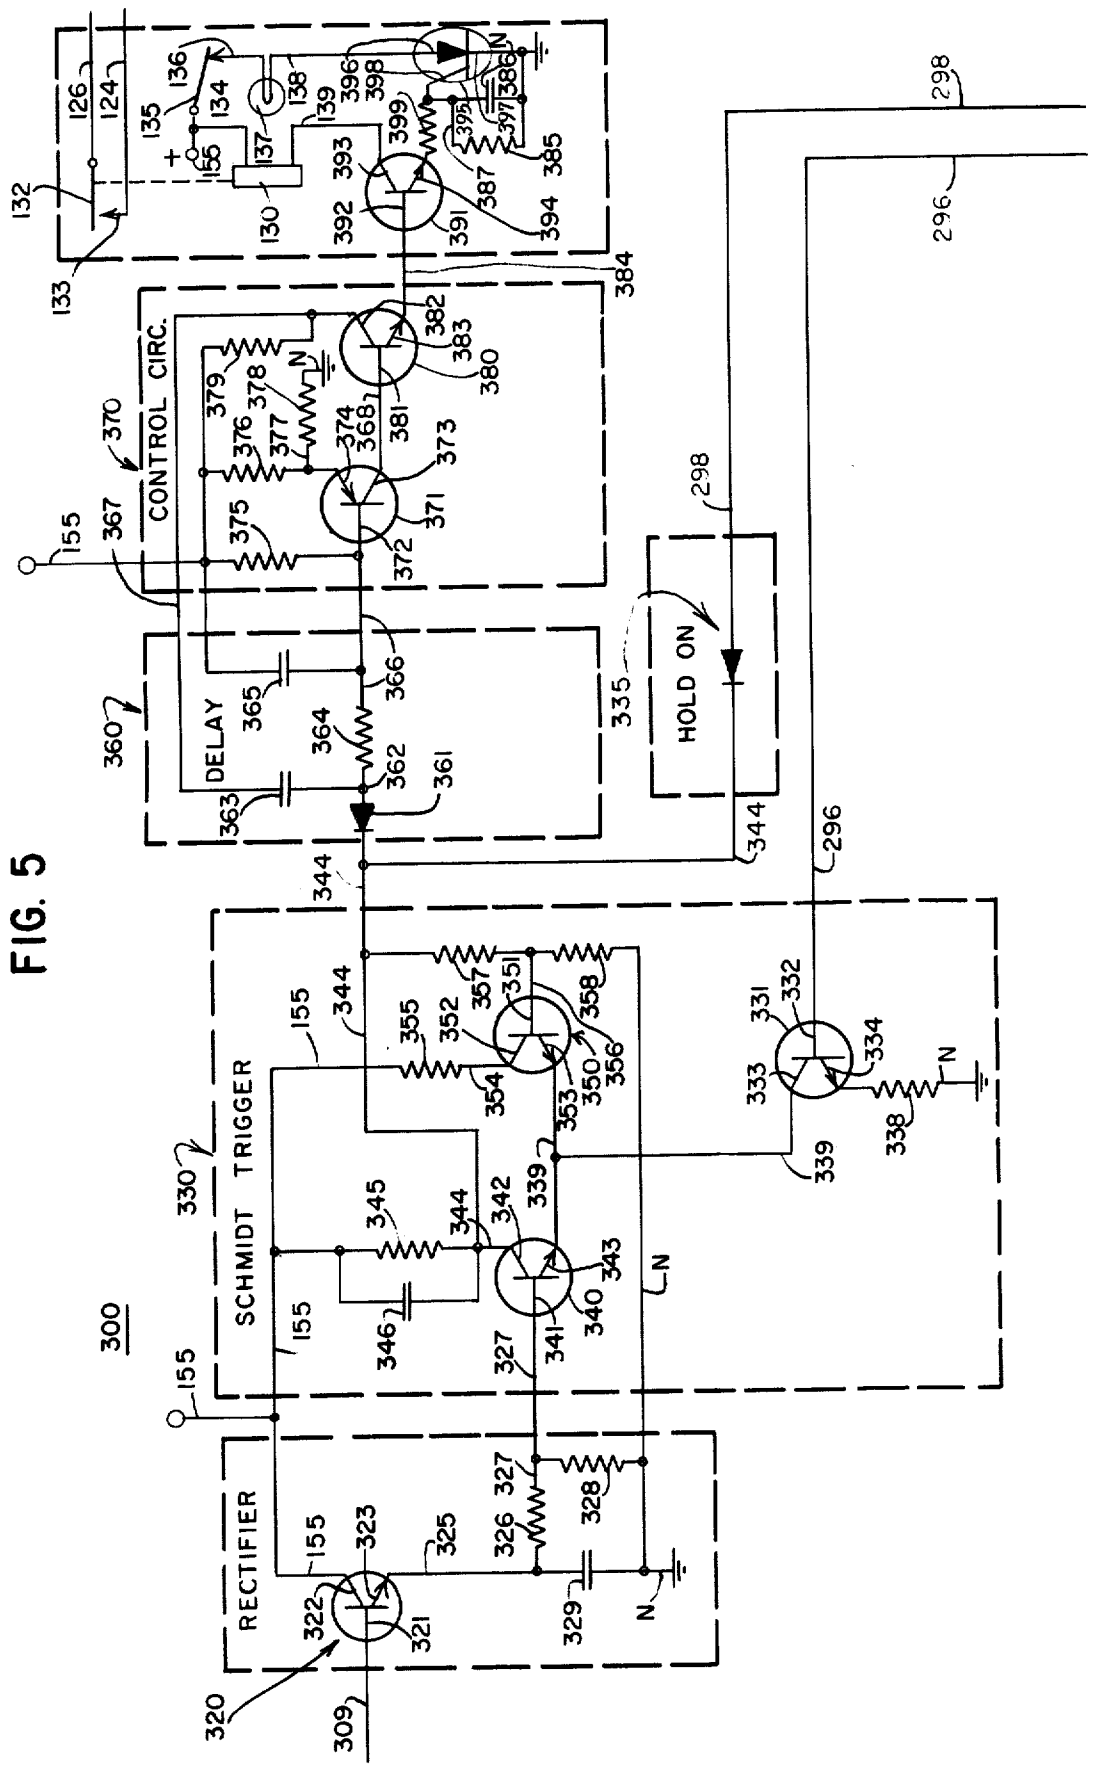

CONTROL CIRC.
DELAY
HOLD ON
SCHMIDT TRIGGER
RECTIFIER
300
298
296
155
N

FIG. 5

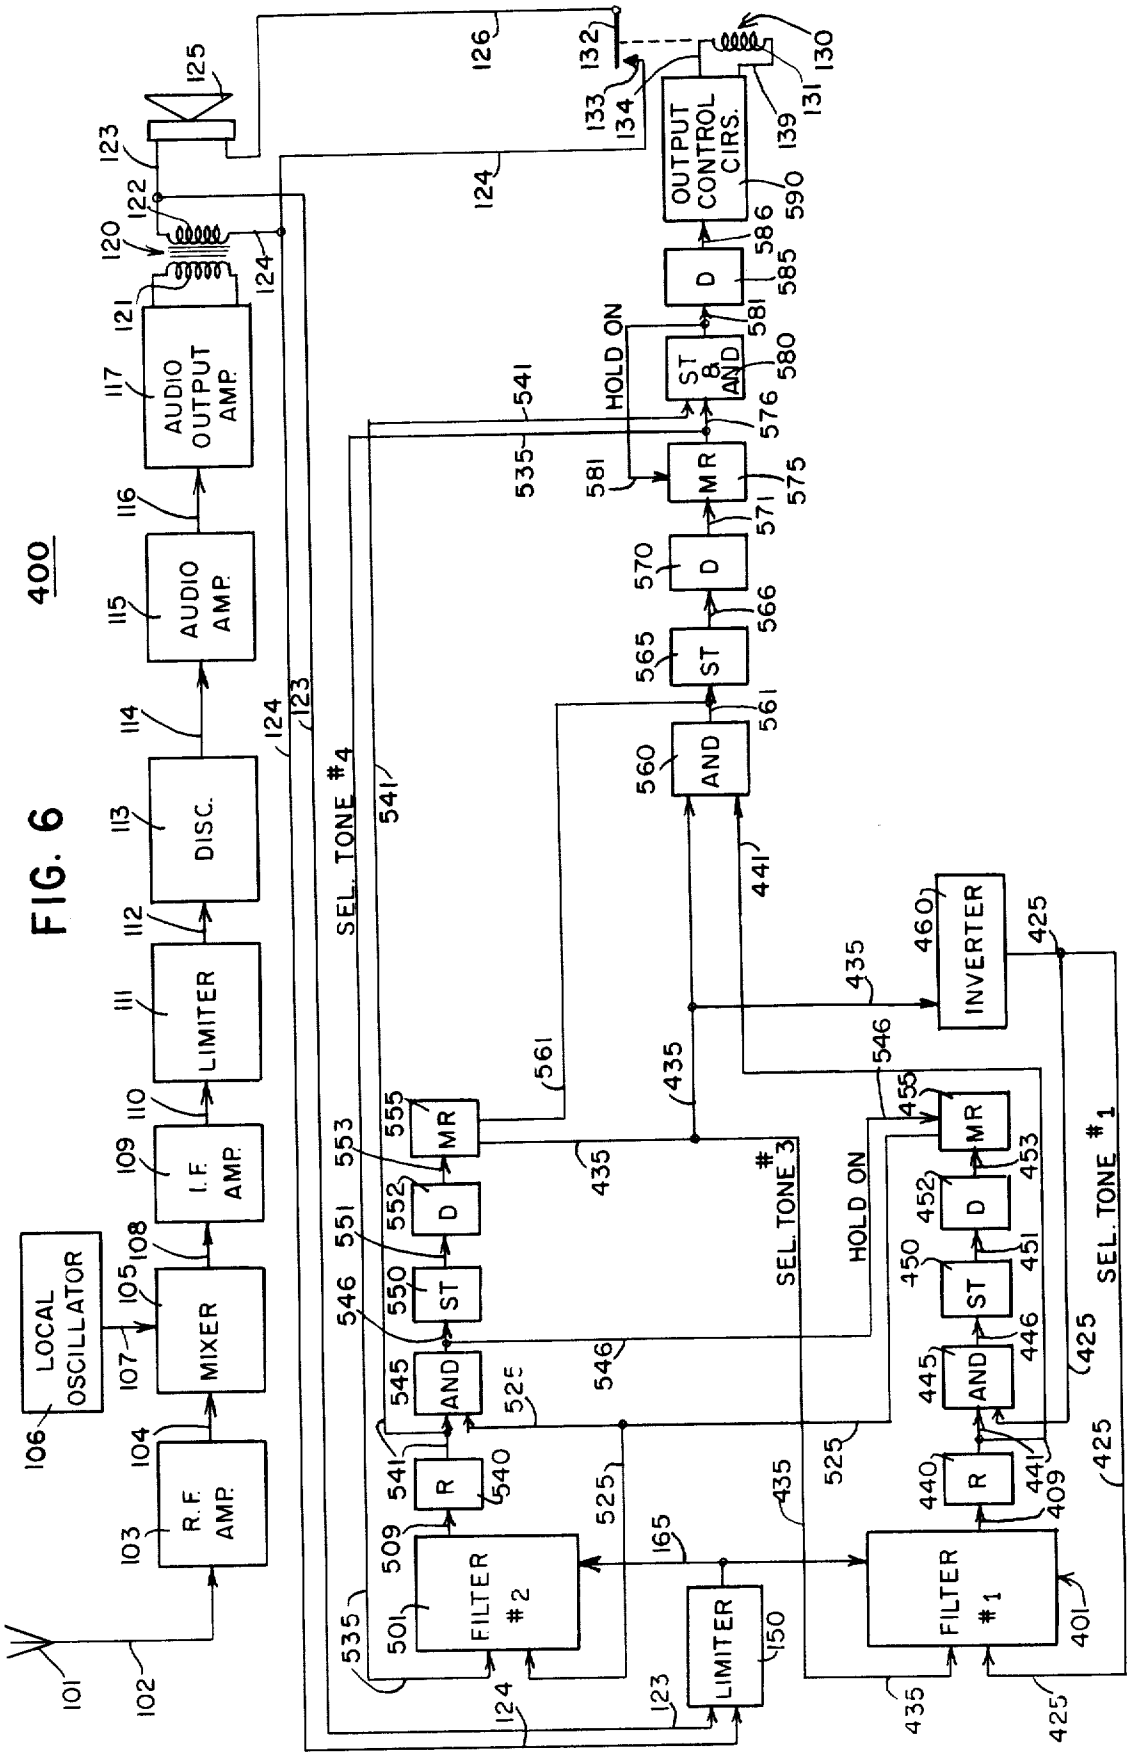

400
101
102
R.F. AMP.
103
104
MIXER
105
107
LOCAL OSCILLATOR
106
I.F. AMP.
108
109
110
LIMITER
111
112
DISC.
113
114
AUDIO AMP.
115
116
AUDIO OUTPUT AMP.
117
120
121
122
123
125
124
126
132
133
134
130
131
139
OUTPUT CONTROL CIRS.
590
586
585
D
581
ST & AND
580
HOLD ON
576
575
MR
571
570
D
566
ST
565
AND
560
561
441
SEL. TONE #4
541
535
501
FILTER #2
509
R
540
541
545
AND
525
546
550
ST
551
552
D
553
555
MR
561
435
SEL. TONE #3
HOLD ON
546
455
MR
453
D
452
451
ST
450
446
AND
445
525
435
440
R
441
409
FILTER #1
401
425
SEL. TONE #1
425
INVERTER
460
435
165
LIMITER
150
123
124

FIG. 6

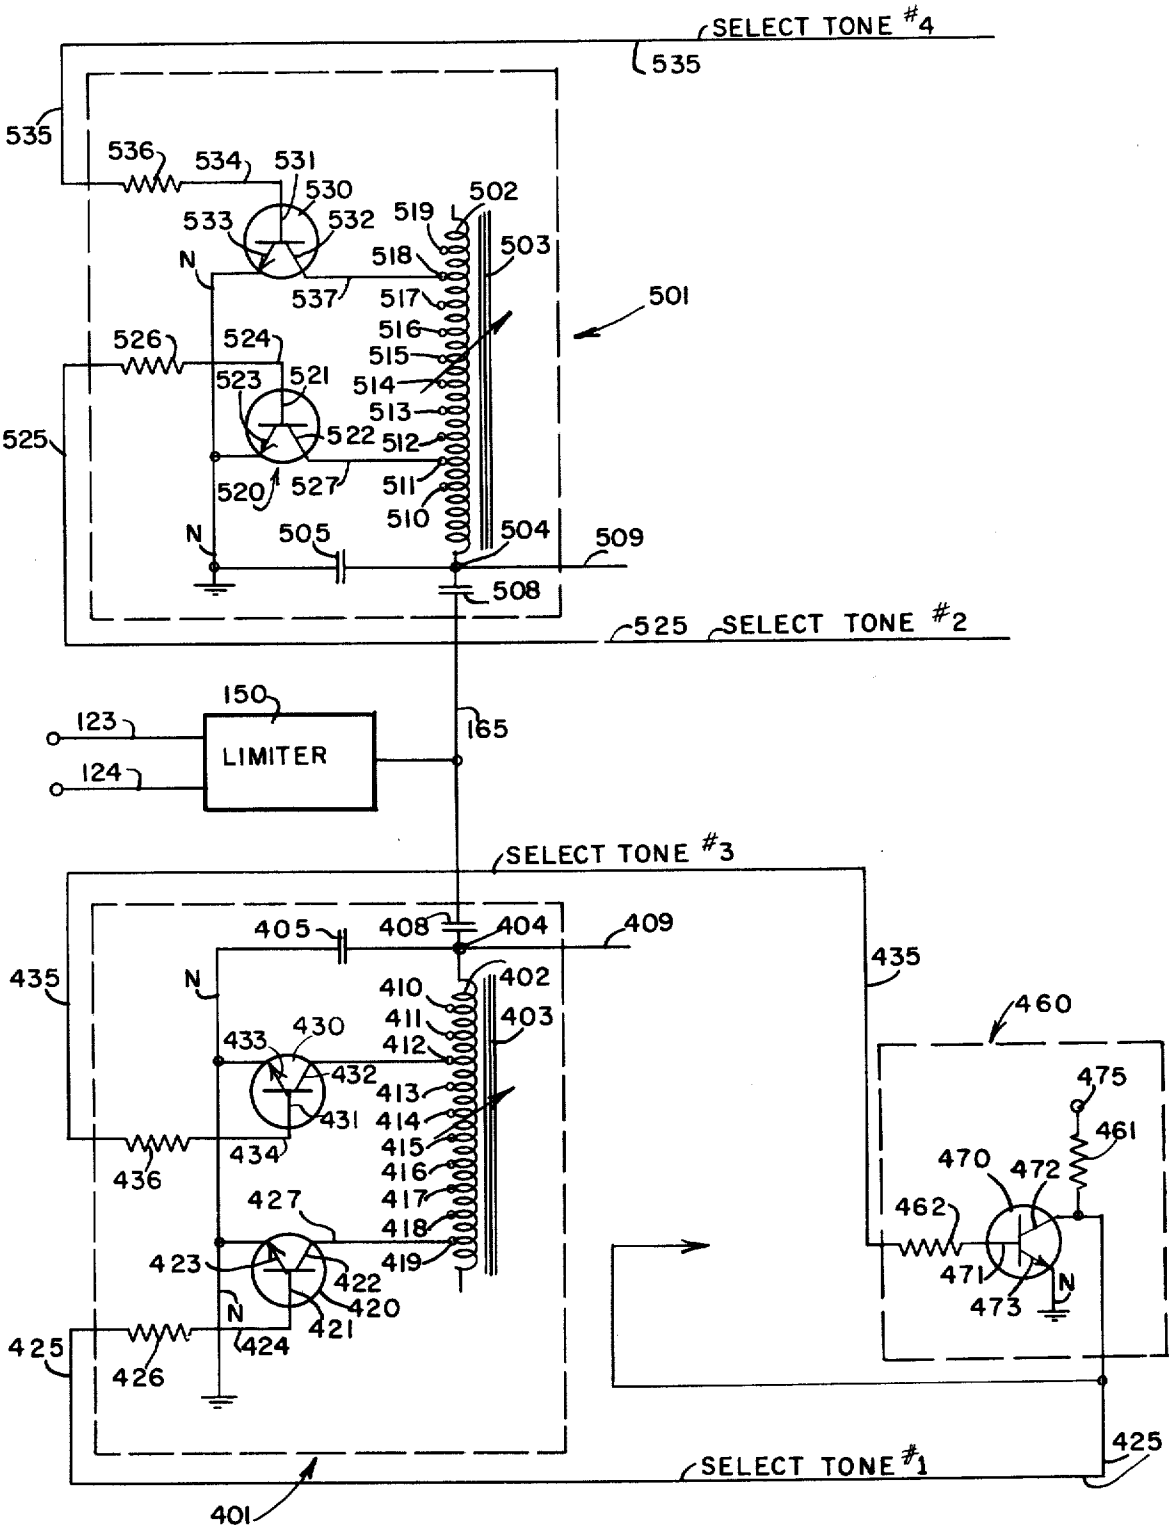
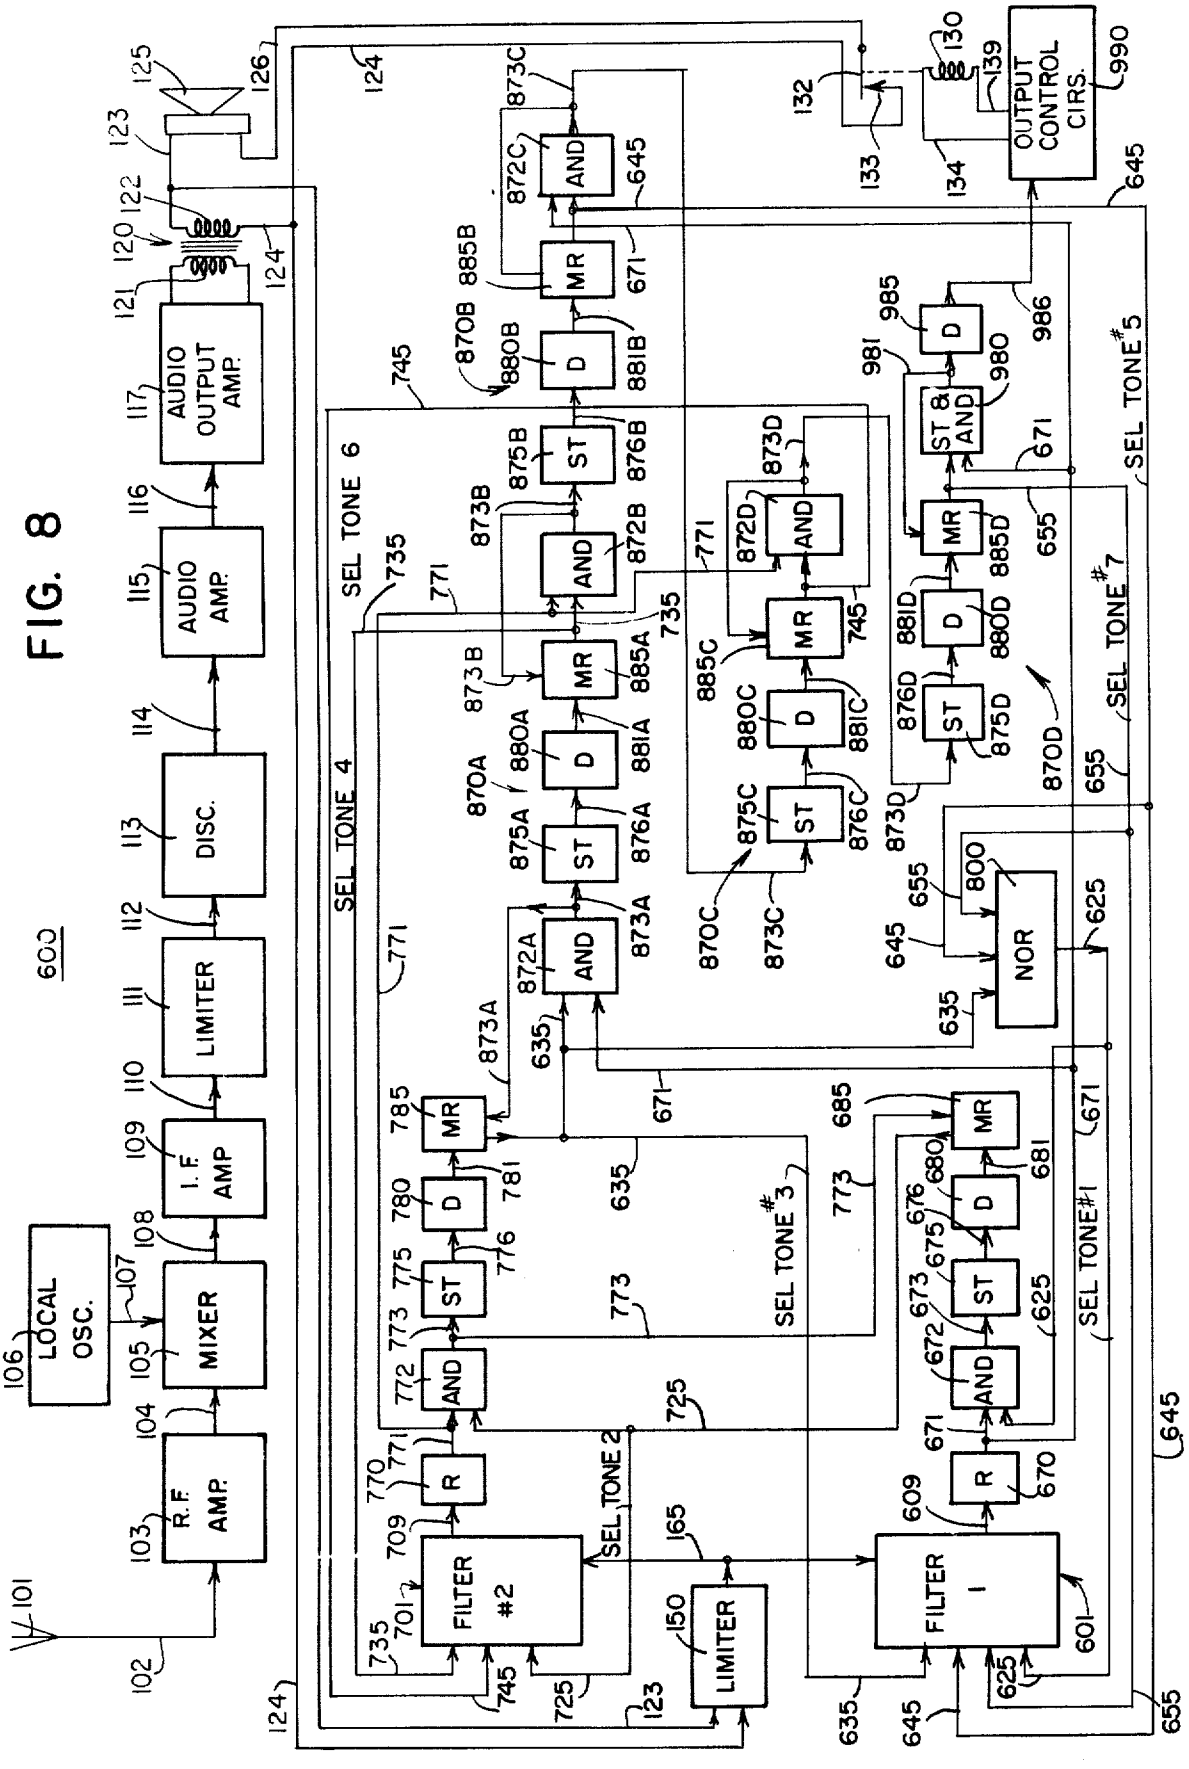

SELECT TONE #4
535
501
525
SELECT TONE #2
150
LIMITER
123
124
165
SELECT TONE #3
435
460
SELECT TONE #1
425
401
536
534
531
530
533
532
519
502
503
518
537
517
516
515
514
513
512
511
510
504
509
505
508
526
524
523
521
522
520
527
N
410
411
412
413
414
415
416
417
418
419
402
403
405
408
404
409
433
430
432
431
434
436
427
423
422
420
421
424
426
475
461
470
472
462
471
473

FIG. 7

FIG. 8


600
101
102
103
R.F. AMP.
104
105
MIXER
106
LOCAL OSC.
107
108
109
I.F. AMP
110
111
LIMITER
112
113
DISC.
114
115
AUDIO AMP.
116
117
AUDIO OUTPUT AMP.
120
121
122
123
124
125
126
130
132
133
134
139
OUTPUT CONTROL CIRS.
990
FILTER #2
FILTER 1
LIMITER
R
AND
ST
D
MR
NOR
ST & AND
SEL TONE 2
SEL TONE #3
SEL TONE 4
SEL TONE 6
SEL TONE #1
SEL TONE #5
SEL TONE #7
165
150
601
609
635
645
655
671
685
725
735
745
771
773
800
980
981
985
986

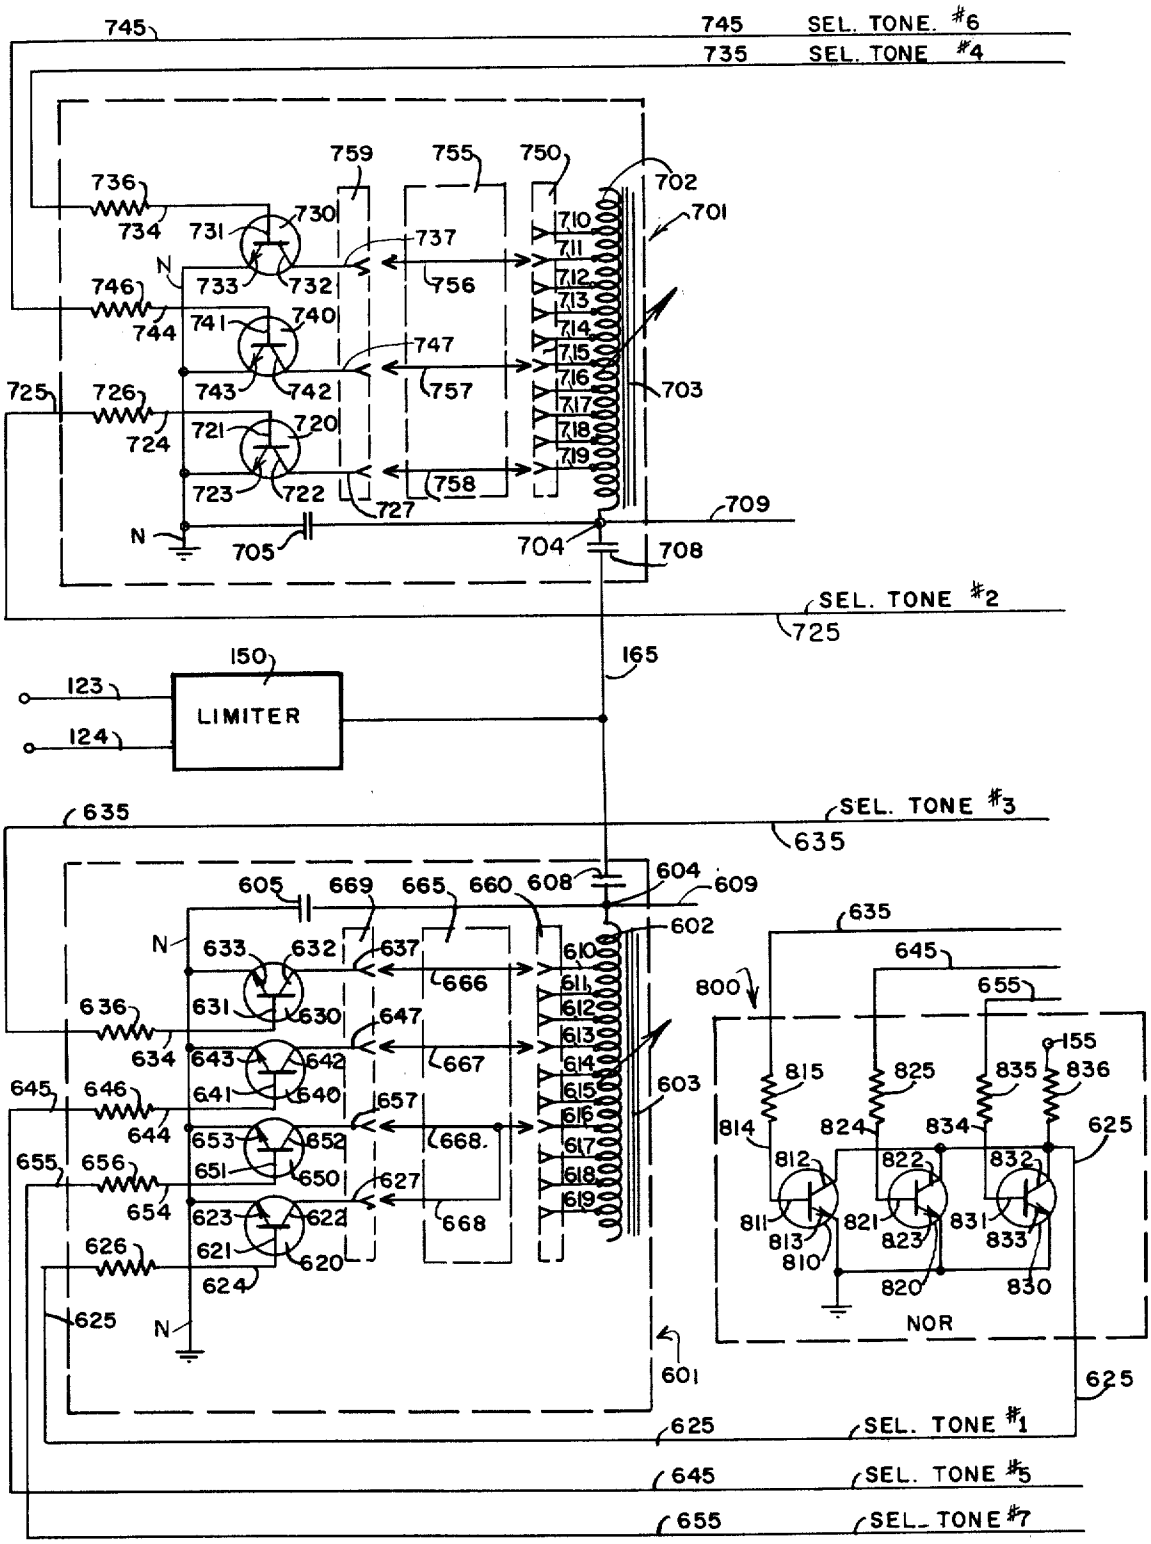

745
745 SEL. TONE #6
735 SEL. TONE #4
759
755
750
736
734
731
730
737
N
733
732
756
746
744
741
740
747
725
726
743
742
757
724
721
720
723
722
758
727
709
N
705
704
708
SEL. TONE #2
725
150
165
123
124
LIMITER
635
SEL. TONE #3
635
605
669
665
660
608
604
609
602
633
632
637
610
666
631
630
647
636
634
643
642
667
641
640
645
646
644
657
653
652
668.
651
650
655
656
654
627
623
622
668
621
620
626
624
625
N
601
635
645
655
800
155
815
825
835
836
814
824
834
625
812
822
832
811
821
831
813
823
833
810
820
830
NOR
625
625
SEL. TONE #1
645
SEL. TONE #5
655
SEL. TONE #7

FIG. 9

TONE CONTROL CIRCUIT HAVING A FREQUENCY CONTROLLABLE FILTER

Matter enclosed in heavy brackets [ ] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue.

The present invention relates to communication systems, and particularly to communication systems for selectively transmitting intelligence from a transmitter to at least one selected receiver.

It is an important object of the present invention to provide in a communication system for selectively transmitting intelligence from a transmitter to at least one selected receiver, the combination comprising a transmitter including a tone-generating circuit for generating tones selected from a first group of tones in a first band of frequencies and for generating tones selected from a second group of tones in a second band of frequencies separate and distinct from the first band of frequencies, the tone-generating circuit generating a sequence of tones alternately selected from from the first and second groups of tones, a transmitter output circuit coupled to the tone-generating circuit for transmitting signals corresponding to the sequence of tones and corresponding to the intelligence to be transmitted, a receiver including an input circuit for receiving the signals from the transmitter, a detecting circuit coupled to the input circuit for detecting the sequence of tones and the intelligence of the signals, a translating circuit coupled to the detecting circuit for translating the intelligence into a useable form, an output control circuit coupled to the translating circuit and effective in a first condition thereof to render the translating circuit inoperative and effective in a second condition thereof to render the translating circuit operative, first and second tone control circuits, the first tone control circuit being coupled to the detecting circuit and to the second tone control circuit and responsive to the application of tones from the first group of tones to provide first control signals to the second control circuit, the second tone control circuit being coupled to the detecting circuit and to the first tone control circuit and responsive to the application of the tones from the second group of tones to provide second control signals to the first tone control circuit, and means for applying an output control signal from the tone control circuits to the output control circuit upon the application of the last tone in the sequence of tones for actuating the output control circuit from the first condition thereof to the second condition thereof, thereby to render the translating circuit operative.

In connection with the foregoing object, it is another object of the invention to provide a communication system of the type set forth wherein the control tones are in the audio range of frequency, each band of frequencies containing at least 10 separate tones with each tone separated from the adjacent tones by about 3⅓ percent of the frequency thereof with instantaneous switching between adjacent tones in the sequence.

Another object of the invention is to provide a communication system of the type set forth wherein the transmitter produces a carrier signal upon which the intelligence and the control tones are applied by modulation, the preferred type of modulation being frequency modulation.

Yet another object of the invention is to provide a communication system of the type set forth wherein each tone in the sequence of tones has a time duration substantially not greater than about 40 milliseconds, and the spacing between adjacent tones in the sequence of tones each has a time duration as short as possible, whereby to provide for rapid receiver turn-on with freedom from false operation.

Still another object of the invention is to provide an improved receiver for use in a communication system of the type set forth.

In connection with the foregoing object, another object of the invention is to provide an improved receiver of the type set forth having therein two tone control circuits each having a tapped filter therein adjustable to a selected one of a plurality of positions respectively corresponding to a selected tone in one of the groups of tones so that upon the application of the selected tone thereto, an output is derived therefrom.

Yet a further object of the invention is to provide an improved receiver of the type set forth wherein the tapped filter has a plurality of connections thereon, the appropriate connection being electronically established thereby to select the response frequency of the tapped filter.

Still another object is to provide an improved communication system compatible with a numbering system (or alphanumeric designation) wherein there will be a large shift in frequency between any pair of successive digits or letters regardless of the number or letter to be selected, all while requiring only a relatively narrow total frequency spectrum.

A still further object of the invention is to provide a receiver of the type set forth wherein the taps selected on the tapped filters, and therefore the frequency of response of the filter, are selected and determined by the connectors interconnecting the tapped filter and the other circuit components of the receiver.

A further object of the invention is to provide an improved tapped filter for use in the receiver of the present invention.

Further features of the invention pertain to the particular arrangement of the elements of the communication system, the receiver therefor, and the components circuits and elements thereof, whereby the above-outlined and additional operating features thereof are attained.

The invention, both as to its organization and method of operation, together with further objects and advantages thereof will best be understood by reference to the following specification taken in connection with the accompanying drawings, in which:

FIG. 1 is a schematic diagram of a communication system made in accordance with and embodying the principles of the present invention, the transmitter and the receiver embodying the system being illustrated in block form;

FIG. 2 is a more detailed schematic and block diagram of the receiver forming a part of the communication system of FIG. 1;

FIGS. 3, 4 and 5, taken together, comprise a schematic electrical diagram of the tone control circuits forming a part of the receiver of FIG. 2;

FIG. 6 is a schematic block diagram of a second form of a receiver made in accordance with and embodying the principles of the present invention;

FIG. 7 is a schematic electrical diagram of the filters and inverter forming a part of the receiver illustrated in FIG. 6;

FIG. 8 is a schematic block diagram of a third form of a receiver made in accordance with and embodying the principles of the present invention; and

FIG. 9 is a schematic electrical diagram of the filters and the NOR circuit forming a part of the receiver of FIG. 8.

The principles of the present invention are equally applicable to communication systems utilizing wire lines, modulated supersonic signals, AM radio signals, and FM radio signals. For illustrative purposes, there is shown in the drawings a communication system employing FM radio signals. Those skilled in the art will readily understand that the various principles to be described hereinafter in conjunction with the system employing FM radio signals can be readily adjusted to the other types of communication systems using other forms of transmission such as those set forth above.

Referring to FIG. 1 of the drawings, there is shown a mobile FM radio communication system made in accordance with and embodying the principles of the present invention, the system being generally designated by the numeral **20.** The system **20** includes an FM transmitter **30** and an FM receiver **100,** it being understood that the transmitter **30** and/or the receiver **100** may be either fixed or mobile, each operating system typically containing both a transmitter **30** and a receiver **100.**

The transmitter **100** includes the usual RF oscillator **31,** the output of which is applied via the conductor **32** to a modulator **40,** the modulator **40** serving to impress audio signals upon the RF carrier provided by the oscillator **31** by means of frequency modulation. One of the audio inputs to the modulator **40** is derived from a voice input appearing on a conductor **51** which is applied through an audio amplifier **50** to a conductor **52** serving as an audio input to the modulator **40.** There also is provided a tone sequence generator **60,** the output of which is connected to the conductor **51** and is applied through the audio amplifier **50** and through the conductor **52** as a second input to the modulator **40.** The output of the modulator **40** appears on the conductor **41** which is coupled to the output circuits **70** where power amplification is effected, the output from the circuits appearing on the conductor **71** that is coupled to a transmitting antenna **80,** all in the usual construction and arrangement.

The tone sequence generator **60** is of the type that can generate a sequence of tones, for example, a sequence of two tones, three tones, ...seven tones, etc., the tone sequence being preferably generated automatically after being encoded therein. Furthermore, alternate tones in the tone sequence are selected from two different groups of tones in two different bands of audio frequencies. For example, the first, third, fifth, etc. tones would be selected from a first group of tones in a first band of frequencies, while the second, fourth, sixth, etc. tones in the sequence of tones would be selected from a second group of tones in a second band of frequencies separate and distinct from the first band of frequencies. Preferably the two bands of frequencies are separated by a substantial frequency gap from each other. In an illustrative example of a typical system providing 10 tones in each group of tones, the first group of tones would have the following frequencies providing 10 different channels: **1177, 1219, 1261, 1306, 1352, 1400, 1449, 1500, 1533** and **1608;** while the second group of tones would have the following frequencies providing 10 different channels: **1980, 2049, 2121, 2196, 2274, 2354, 2437, 2523, 2612** and **2704.** It will be noted that each tone is spaced from the adjacent tones in an amount equal to approximately 3⅓ percent of the frequency thereof, while there are five tones missing between the two groups of tones, thus constituting the frequency gap between the nearest adjacent tones in the two groups of tones. In a typical illustration, the odd-numbered tones in the sequence of tones would be selected from the first group of frequencies, while the even-numbered tones in the sequence of tones would be selected from the second group of frequencies. Selecting one tone from each group of tones to provide a two-tone sequence permits 100 different codes, while choosing four tones from one group of tones and three tones from the other group of tones to provide seven tones can provide 10 million different codes. If the frequency groups are reversed in sequence an additional 100, or 10 million codes can similarly be provided for 227-tone sequences. In the tone sequence generator **60,** each tone may, for example, have a time duration of 15 to 100 milliseconds, a typical time duration being 30 milliseconds, for a seven-tone sequence or 75 milliseconds for a two-tone sequence, while the time gap between adjacent tones in the sequence should be as short as possible; as a consequence, for a seven-tone sequence, response times as low as 100 milliseconds are available, all while providing greater security against false activation, as will be explained more fully hereinafter.

The transmissions from the transmitter **30** are adapted to be received by the receiver **100** and more particularly by the antenna **101** thereof which is connected by a conductor **102** to the usual RF and IF and detecting circuits **103–113.** The output from the circuits **103–113** appears on a conductor **114** which applies an input to the audio output circuit **115–117** that in turn have the output connected as the input to audio speaker circuits **120–133.** In accordance with the present invention, no output is obtained from the audio speaker circuits **120–133** unless the tone decoder circuits **200–300** are first operated by a suitable tone sequence, the input to the tone decoder circuits being on a conductor **124** and the output therefrom being on a conductor **126.**

There is illustrated in FIG. 2 of the drawings, a more complete diagram of the radio receiver **100** forming a part of the communication system of the present invention. The carrier signal from the transmitter **30** is picked up on the antenna **101** and is conveyed by the conductor **102** to the input of a radio frequency amplifier **103.** The output of the radio frequency amplifier **103** is supplied by a conductor **104** as one of the inputs to the mixer **105,** the usual local oscillator **106** being provided and having the output thereof connected by a conductor **107** as a second input to the mixer **105.** The intermediate frequency which is the output of the mixer **105** is applied by a conductor **108** as the input to the IF amplifier **109,** the output of which is transmitted by the conductor **110** to the input of a limiter **111.** The output of the limiter **111** appears on a conductor **112** and is the input to the discriminator **113,** the output of the discriminator **113** being an audio frequency signal appearing on the conductor **114.** The audio signal on the conductor **114** is amplified by an audio amplifier **115** and is then conveyed by a conductor **116** to an

audio output amplifier **117**. The output from the amplifier **117** is applied to an output transformer **120**, and specifically to the primary winding **121** thereof, a secondary winding **122** being provided having one terminal connected by a conductor **123** to one of the input terminals of a loudspeaker **125**, and the other terminal being connected to a conductor **124**. The conductors **123** and **124** are also connected as an input to the limiter **150** which provides a signal for a first tone control circuit **200** and a second tone control circuit **300**. Before there is any output derived from the loud speaker **125**, the tone control circuits **200–300** must be activated by a proper sequence of control tones, the output then being applied to a control relay **130** including a coil **131** to which are connected the conductors **134** and **139**, respectively. The armature of the relay **130** controls a movable switch contact **132** which cooperates with a fixed switch contact **133** connected to the conductor **124**. A conductor **126** interconnects the other input terminal of the loud speaker **125** and the switch contact **132**. A proper output from the tone control circuits **200–300** operates the relay **130** to close the contacts **132–133** thereby to connect the loudspeaker **125** across the output terminals of the transformer secondary winding **122**, thus to provide an audio output from the receiver **100**.

The first tone control circuit **200** has an input thereto a first control tone as the output of the limiter **150** that appears on the conductor **165**, the input being a series of pulses of essentially square wave form that are applied as an input to a tapped filter **201**, the output of the tapped filter **201** being a sinusoidal wave form appearing on a conductor **209**, provided that the frequency of the input pulse is that to which the tapped filter **201** is tuned. The conductor **209** connects to a rectifier **220** which serves to rectify the input and to provide a DC output voltage on a conductor **227** that is connected as one input to a Schmidt trigger circuit **230**. Another input to the Schmidt trigger **230** is a suitable bias from a DC voltage that is applied on a conductor **155**. The output of the Schmidt trigger **230** is connected by a conductor **244** to a delay circuit **260**, and if the DC voltage on the conductor **244** persists for a predetermined period of time, an output is derived from the delay circuit **260** upon cessation of the first control tone. The output of the circuit **260** appears on a conductor **262** that is connected to the input of the monostable multivibrator **270**. The multivibrator **270** is effective to produce an output pulse on a conductor **296** which is applied as one of the inputs to the second tone control circuit **300**.

The second tone and control circuit **300** has as one of the inputs thereto a second control tone as the output of the limiter **150** that appears on the conductor **165**, this input being a series of pulses of essentially square waveform that are applied as an input to a tapped filter **301**, the output of the tapped filter **301** being a sinusoidal wave form appearing on a conductor **309**, provided that the frequency of the input pulses is that to which the tapped filter **301** is tuned. The conductor **309** connects to a rectifier **320** which serves to rectify the input and to provide a DC voltage on a conductor **327** that is connected as one input to a Schmidt trigger circuit **330**. Another input to the Schmidt trigger circuit **330** is the pulse on the conductor **296** from the monostable multivibrator **270** described above. The output of the Schmidt trigger **330** is connected by a conductor **344** to a delay circuit **360**, and if the control voltage on the conductor **344** persists for a predetermined period of time, an output is derived from the delay circuit **360** on a conductor **366** that is connected as the input to the control circuits **370** that is sufficient to control **370**. The output of the control circuits **370** appears on the conductors **134** and **139** that apply an energizing potential to the relay **130** to connect the loudspeaker **125** to the audio output of the receiver **100** after the proper sequence of tones has been received. There further is provided a holding circuit **335** that has the input connected to the conductor **344** and has the output connected by a conductor **298** as one of the inputs to the monostable multivibrator **270**.

Referring to FIG. **3** of the drawings, there is illustrated in detail of portion of the tone control circuits, and specifically the limiter **150** and the two tapped filters **201** and **301**. The output from the audio output amplifier **117** is coupled via the output transformer **120** and the conductors **123–124** to the input of the limiter **150**, and specifically to the input terminals of a transformer **151**. More specifically the transformer **151** has a primary winding **152** and a secondary winding **153**, the terminal of the primary winding **152** being connected respectively to the conductors **123–124**. The secondary winding **153** is center tapped and has connected to the center-tap one terminal of a limiting resistor **154**, the other terminal of the resistor **154** being connected to the conductor **155**. It will be understood that the +DC source circuit of which the conductor **155** is the output terminal provides a fixed DC voltage of for example 12 volts positive, the value of the voltage being regulated to a stable value as by a Zener diode, for example.

The upper terminal of the secondary winding **153** is connected as an input to a transistor **160**, and particularly to the base **161** thereof, the collector **162** being connected as an output to a conductor **165** and through a resistor **167** to the +12-volt DC conductor **155**; and the emitter **163** is connected to a conductor **166**. The lower terminal of the secondary winding **153** is connected by a conductor **168** has an input to a second transistor **170**, and specifically to the base **171** thereof. The collector **172** is connected by a conductor **174** to the +12-volt DC conductor **155**, while the emitter **173** is connected to the conductor **166**. There also is provided in the limiter **150** a bias circuit in the form of a transistor **180**, the base **181** of the transistor **180** being connected by a conductor **184** to one terminal of a potentiometer **185**, the other terminal of the potentiometer **185** being connected to the +12-volt conductor **155**, the potentiometer being provided with the usual arm **186** having one end connected to the conductor **184** and the other end contacting an adjusted point on the resistive member of the potentiometer **185**. The collector **182** is connected to the conductor **166**, while the emitter **183** is connected by a conductor **187** to one terminal of a resistor **188**, the other terminal of the resistor **188** being grounded as at N.

The output from the limiter **150** is a train of essentially square waves appearing on the conductor **165**, the train of square waves being coupled to the filter **201** and **301** by the conductor **165**.

Considering now the construction of the tapped filter **201**, there is provided an input capacitor **208** and an inductor in the form of a coil **202** having associated therewith a magnetic core **203**, at least a portion of the core **203** being movable and adjustable, whereby the inductor **202** can be slug tuned. The inductor **202** has

an input terminal **204** that is connected by a conductor **209** to one terminal of a capacitor **205**, the other terminal of the capacitor **205** being grounded as at N, the output being on the conductor **209**. As illustrated, the inductor **202** has a plurality of taps thereon, and specifically 10 taps that are connected to contacts numbered **210** through **219**. Associated with the contacts is a movable contact arm **206** which is also grounded via the conductor N. The series of resonance impedance of the filter **201** can be readily changed by moving the contact arm **206** from one contact to another, whereby to change the frequency at which the parallel circuit consisting of the tapped coil **202** and the capacitor **205** become series resonant with the capacitor **208**. At resonance the output from the filter **201** will be a maximum and the output will be sinusoidal.

The construction of the tapped filter **301** is identical to that of the tapped filter **201**, whereby like reference numerals in the 300 series have been applied to like parts thereof, and in the interest of brevity, no further description of the tapped filter **301** will be given, except to point out that the output therefrom is a sinusoidal wave on the conductor **309**, and that the output will be a maximum when the audio input pulse rate is at the frequency to which the output filter **301** is tuned.

Referring to FIG. **4** of the drawings, there is illustrated the details of the construction of the remainder of the first tone control circuit **200**. The sine wave on the conductor **209** is applied as an input to the rectifier **220**, the rectifier **220** more specifically being a transistor having a base **221** to which the conductor **209** is connected. The collector **222** of the transistor **220** is connected to the +12-volt DC conductor **155**, while the emitter **223** is connected by a conductor **225** to a voltage divider network including resistors **226** and **228** connected in series to ground potential as at N, the adjacent terminals of the resistors **226–228** being connected by a conductor **227**. A filtering capacitor **229** is connected between the conductor **225** and the ground potential and in parallel with the series resistors **226–228**.

The output from the rectifier **220** is a DC voltage appearing on the conductor **227** which is applied as one of the inputs to the Schmidt trigger circuit **230**, and specifically to a transistor **240** therein, the base **241** of the transistor **240** being connected to the conductor **227**. The collector **242** of the transistor **240** is connected via a conductor **244** and a resistor **245** to the +DC conductor **155**, a capacitor **246** being provided in parallel with the resistor **245**; while the emitter **243** is connected by a conductor **239** to a bias transistor **231** and to another transistor **250**.

The bias transistor **231** has the base **232** thereof connected by a potentiometer **235** to the +DC conductor **155**, the potentiometer **235** being provided with a movable contact **237** having one terminal thereof connected by a conductor **236** to the base **232** and having the other terminal thereof in sliding adjusted engagement with the resistive element of the potentiometer **235**. The collector **235** is connected to the conductor **239**, while the emitter **234** is connected through a resistor **238** to ground potential as at N.

The transistor **250** has a base **251** that is connected by a conductor **256** to one terminal of a resistor **257** and to one terminal of a resistor **258**, the other terminal of the resistor **257** being connected to the conductor **244**, while the other terminal of the resistor **258** is connected to ground potential as at N. The collector **252** of the transistor **250** is connected via a conductor **254** and a resistor **255** to the +DC conductor **155**, while the emitter **253** is connected to the conductor **239**.

The output from the Schmidt trigger circuit **230** is a DC voltage appearing on the conductor **244** that provides an input to the delay circuit **260** which comprises a capacitor **261** and a resistor **263** interconnected by a conductor **262**. More specifically, one terminal of the capacitor **261** is connected to the conductor **244** and the other terminal thereof is connected to the conductor **262**, and one terminal of the resistor **263** is connected to the conductor **262** and the other terminal thereof is connected to ground potential as at N.

The output from the delay circuit **260** is a voltage pulse appearing on the conductor **262** that is applied as one of the inputs to the monostable multivibrator **270**, and specifically to the input transistor **280** thereof. The transistor **280** has the base **281** thereof connected to the conductor **262**, has the collector **282** thereof connected via a conductor **284** and a resistor **285** to the +DC conductor **155**, and has the emitter **283** thereof connected to a conductor.

A bias transistor **271** is provided to apply suitable bias to the transistor **280** and a second transistor **290** in the monostable multivibrator **270**. The transistor **271** has a base **272** that is connected through a potentiometer **275** to the +DC conductor **155**, the potentiometer **275** having a movable contact **277** bearing against the resistive element thereof, which contact **277** is connected by a conductor **276** to the base of **272**. The transistor **271** also has a collector **273** connected to the conductor **279** and an emitter **274** connected to the ground conductor N.

The transistor **290** has the base **291** thereof connected to a conductor **298** that is in turn connected to the adjacent terminals of resistors **286** and **299**, the other terminal of the resistor **286** being connected to the conductor **284** and the other terminal of the resistor **299** being connected to the grounded conductor N; the transistor **290** also has a collector **292** connected via a conductor **296** and a potentiometer **295** to the +DC conductor **155**, and an emitter **293** connected to the conductor **279**. The potentiometer **295** is provided with the usual contact arm **297** in sliding contact with the resistive element of the potentiometer **295**, the contact arm **297** being connected to the conductor **296**. The output from the monostable multivibrator **270** appears on the conductor **296** as a positive going voltage pulse upon the removal of the first control tone from the receiver **100** provided the first tone has been present for a period longer than a minimum delay period determined by the time constants of delay circuit **260**.

Referring next to FIG. **5** of the drawings, there is illustrated in detail the remaining portions of the tone control circuit **300**. The sinusoidal wave form corresponding to the selected second tone appears on the conductor **309** and is applied as an input to the rectifier **320**, the rectifier **320** being in the form of a transistor having a base **321** to which the conductor **309** is connected. The transistor **320** further has a collector **322** being connected to the +DC conductor **155**, and an emitter **323** connected via a conductor **325**, a resistor **326**, a conductor **327** and a resistor **328** to the grounded conductor N, a capacitor **329** being connected in parallel with the resistors **326** and **328**.

The output from the rectifier **320** appearing on the conductor **327** as +DC voltage that is applied as an input to the Schmidt trigger circuit **330** including a bias transistor **331** and a pair of transistors **340** and **350**. The bias transistor **331** has a base **332** to which is connected the conductor **296** carrying the output from the monostable multivibrator **270**. The transistor **331** has a collector **333** connected to a conductor **339** and an emitter **334** connected by a resistor **338** to the grounded conductor N.

The transistor **340** has a base **341** to which is connected the conductor **327** carrying the DC tone rectifier output as an input to the Schmidt trigger circuit **330**. The transistor **340** has a collector **342** that is connected via a conductor **344** and a resistor **345** to the +DC conductor **155**, a capacitor **346** being connected in parallel with the resistor **345**; and an emitter **343** that is connected to the conductor **339**.

The transistor **350** has a base **351** that is connected by a conductor **356** to adjacent terminals of two resistors **357** and **358**, the other terminal of the resistor **357** being connected to the conductor **344** and the other terminal of the resistor **358** being connected to the grounded conductor N. The transistor **350** also has a collector **352** connected via a conductor **354** and a resistor **355** to the +DC conductor **155** and an emitter **353** connected to the conductor **339**.

The output from the Schmidt trigger circuit **330** appears on the conductor **344** as a negative going voltage, the output being applied to the HOLD ON circuit **355** and the delay circuit **360**. As illustrated, the HOLD ON circuit **355** is in the form of a diode having one terminal connected to the conductor **344** and the other terminal connected to the conductor **348** to provide a holding potential for the monostable multivibrator **270**.

The input to the delay circuit **360** is applied to one terminal of the diode **361**. The other terminal of the diode **361** is connected by a conductor **362** to one terminal of a charging capacitor **363**, and one terminal of a resistor **364**, the other terminal of resistor **364** being connected by a conductor **366** to one terminal of a capacitor **365**, the other terminal of the capacitor **365** being connected to the +DC conductor **155**.

The control circuit **370** contains two transistors **371** and **380**, the transistor **371** being of the PNP type, whereas all of the other transistors described heretofore, and including transistor **380**, are of the NPN type. The transistor **371** has a base **372** to which is connected the conductor **366**, the base **372** also being connected through a resistor **375** to the +DC conductor **155**. The collector of the transistor **371** is connected by a conductor **368** to the base **381** of the transistor **380**, and the emitter **374** of the transistor **372** is connected by a conductor **377** to the adjacent terminals of a pair of resistors **376** and **378**, the other terminal of the resistor **376** being connected to the +DC conductor **155** and the other terminal of the resistor **378** being connected to the grounded conductor N. The collector **382** of the transistor **380** is also connected to the +DC conductor **155** through a resistor **379** and is connected by the conductor **367** to one terminal of the capacitor **363**. The emitter **383** of the transistor **381** is connected by a conductor **384** as the input to a transistor **391**.

The conductor **384** more specifically connects to the base **392** of the transistor **391**, the transistor **391** controlling the conduction of current through the control relay **130** that has been described above, the conductor **139** being connected to the collector **393** of the transistor **391**. The emitter **394** of the transistor **391** is connected to ground potential via a resistor **399**, a conductor **387**, and a resistor **385**, a capacitor **386** being connected in parallel to the resistor **385**. The other connection for the relay **130**, namely the connector **134**, is connected to the +DC conductor **155**. Arranged in parallel with the relay **130** is a "push to reset light" **137** having one terminal connected by a conductor **136** through a switch **135** to the +DC conductor **155**, and having the other terminal connected via a conductor **138** to one of the power terminals of a silicon-controlled rectifier (SCR) **395**, specifically to the power terminals **396** thereof, the other power terminal **397** being grounded. A control terminal **398** is provided for the SCR **395** and is connected to the conductor **397**.

Considering now the operation of the receiver **100**, in order to obtain an output from the loudspeaker **125**, a two-tone sequence of control tones must be applied to the receiver **100**, each tone preferably having a time duration of at least about 15 milliseconds without any gap therebetween. Furthermore, the first tone received must be that to which the tapped filter **201** is tuned, and the second tone received must be that to which the tapped filter **301** is tuned. Upon the reception of the first tone, an audio signal corresponding to the first tone is applied along the conductors **123–124** as an input to the limiter **150**. The transistors **160–170** provide in essence a differential amplifier, the total current that can flow through the transistors **160–170** being that which flows through the transistor **180** which is in turn controlled by the setting of the potentiometer **185**. The potentiometer **185** is adjusted so that the current through the transistor **180** is not sufficient to allow one of the transistor **160–170** to be driven to saturation when the other is nonconducting. The incoming control tone on the conductors **123–124** alternately increases the conduction of one of the transistors **160–170** and decreases to cut off the conduction of the other, the conduction through the conducting transistor **160–170** being limited by the conduction through the transistor **180**. Therefore the output on the conductor **165** is a square wave whenever the amplitude of the incoming audio signal is more than a certain minimum determined by the gain of the limiter **150** and the adjustment of limiting level by the potentiometer **175**. Assuming that the amplitude of the first control tone appearing at the input of the limiter **150** is sufficient to cause limiting a square wave output is provided on the conductor **165**. It is pointed out that once the limiter **150** operates, the filter control band width will be constant if the limiter is symmetrical, i.e., if the circuits for the transistors **160** and **170** are balanced and symmetrical. An important feature of the limiter **150** resides in the fact that with a carefully controlled DC bias potential on the conductor **155** such as that provided by a Zener diode supply, there is no change of the band width as a result of a change in the amplitude of the incoming tone control signal, since above limiting, the voltage level to the output tone filters will be constant. When the amplitude of the incoming signal is below the limiting level, the band width will narrow; however this narrowing portion will be very small. By adjusting the limiting level of the limiting amplifier **150** by means of the slider **186**, the maximum band width can be readily adjusted.

The series of square wave pulses on the conductor **165** are then applied to the tapped filters **201** and **301** and assuming that the control **206** is positioned so as to

be at resonance for the first tone voltage, the output at the conductor **209** will be a sinusoidal wave having a frequency equal to that of the first control tone. It is pointed out that the tapped filter **201** responds to the selected one of the 10 tones in the first group of tones that are all disposed in a first band of frequencies extending from 1,177 cycles per second to 1,608 cycles per second, while the tapped filter **301** responds to the elected one of the ten tones in the second group of tones that are disposed in a second band of frequencies extending from 1,980 cycles per second to 2,704 cycles per second. It is further pointed out that when the band width for a single tone is adjusted as a percentage of its resonant frequency by slug tuning of the inductors **202** or **302**, as the case may be, the percentage of band width remains constant for all other taps. This results from the fact that the frequency of an LC circuit varies directly with the number of turns on the coil and because the Q also varies in a fashion such as to hold the band width as a constant percentage of the particular frequency selected. This results in substantial savings in manufacturing costs since a single frequency or band width adjustment adjusts the band width for all frequencies. Stating the matter in another way, in the resonant circuit such as the tapped filter **201**, when the capacitance of the capacitors **208** and **205** are held constant and the inductance of the inductor **202** is varied, by the tap selection, the Q varies proportionately to the number of effective turns used in the inductor **202**, the resonant frequency varies inversely as the number of effective turns in the inductor **202**, and the Q varies proportionately to the frequency. If the resonant frequency is varied by changing the number of effective turns on the inductor **202**, the circuit Q will remain constant at resonance for each selected frequency, i.e., if the turns are doubled, the resonant frequency will be halved while the Q will be doubled by the turns increase at the same frequency but halved by the frequency change, thereby to leave the Q unchanged. The voltage as a percentage of the peak voltage gives a band width which is a predetermined percentage of the resonant frequency for any given Q. If Q is held constant, as explained above, the band width will remain a constant percentage of the resonant frequency as the resonant frequency is varied, for example +2 percent preferred channel separation is that wherein the spacing between adjacent frequencies is a uniform percentage of resonance, the 3⅛ percent spacing, for example referred to previously.

The sinusoidal wave corresponding in frequency to the first control tone is applied along the chamber **209** as the input to the rectifier **220**, and there appears as the output from the rectifier **220** a positive going voltage on the conductor **227** that is applied as an input to the Schmidt trigger circuit **230**.

Before the application of the input along the conductor **227** to the Schmidt trigger circuit **230**, the bias transistor **231** is conducting to establish a bias on the emitters of the transistor **240** and **250**, the amount of bias being adjustable by means of the potentiometer **235**, whereby the potentiometer **235** serves as the band width adjustment for the first control tone. Initially the transistor **240** is nonconducting and the transistor **250** is conducting. Upon the application of the positive voltage along the conductor **227** to the base of the transistor **240**, the transistor **240** begins to conduct and quickly drives the transistor **250** to a nonconducting condition, the potential on the conductor **244** that is applied to the base **251** of the transistor **250** rapidly dropping. After a suitable time delay as determined by the time constant characteristics provided by the capacitor **261** and the resistor **263** and upon cessation of the first tone, an input is applied to the monostable multivibrator **270** along the conductor **262**.

Prior to the application of the first control tone to the first control circuit **200**, the biasing transistor **271** is conducting in an amount determined by the adjustment of the potentiometer **275** and applies a bias along the conductor **279** which serves to render the transistor **280** nonconducting and the transistor **290** conducting. Upon the application of the first control tone to the receiver **100** the voltage on the conductor **244** drops as explained above and the capacitor **261** begins to charge at a rate determined by the value of the capacitor **261** and the resistor **263**. If the charge time of the capacitor **261** is sufficient, when the potential on the transistor **244** returns to the high potential of the capacitor **261** it will supply a voltage to the base **281** of the transistor **280** that will exceed the voltage at the collector **273** of the transistor **271**. In other words, the transistor **281** is rendered conducting by a positive pulse from the delay circuit **260** which exceeds the potential on the conductor **279** that is established by the adjustment of the potentiometer **275**, and at the same time the transistor **290** is rendered nonconducting, thereby to provide a positive pulse output on the conductor **296**, the potential on the conductor **296** rising to the DC voltage on the conductor **155** (less any voltage drop in the potentiometer **295** caused by condution of the second tone circuit **300**).

The initial low bias on the conductor **296** is applied to the base **332** of the transistor **331** of the Schmidt trigger circuit **330** of the second control circuit **300**, thereby to render the transistor **331** nonconducting which in turn renders the transistor **340** nonconducting and the transistor **350** nonconducting, whereby the output of the second tone control circuit is blocked prior to the reception of the first control tone and for so long as the first control tone persists. Upon the removal of the first control tone from the input to the first tone control circuit **200**, the conditions described above in the first control circuit are essentially reversed, whereby the high positive potential on the conductor **296** rapidly rises as the transistor **290** is blocked and the adjustment of the potentiometer **295** in effect adjusts the band width of the second tone control circuit **300**.

Upon the removal of the first control tone and the accompanying rise in potential on the conductor **296**, the transistor **331** begins to conduct, the transistor **340** is continued in a nonconducting condition, while the transistor **350** begins to conduct. Now the second tone control circuit **300** is ready to receive the second control tone.

Assuming now that a proper second control tone is applied to the receiver **100** and passes through the limiter **150** and the tapped filter **301**, there is provided on the conductor **309** a sinusoidal wave form having the frequency of the second control tone. This input is applied to the rectifier **320** thereby to produce a positive going output on the conductor **327** that is applied to the base of the transistor **340** in the Schmidt trigger circuit **330**.

As has been described heretofore, at this point in the operation of the system, the transistor **340** is nonconducting while the transistor **350** is conducting, whereby

upon the application of the positive going voltage along the conductor **327** to the base **341** of the transistor **340**, the transistor **340** is rendered conductive. Upon heavy conduction of the transistor **340**, the heretofore relatively high potential on the conductor **344** rapidly drops and this drop in potential in the form of a negative going voltage is applied to the base of the transistor **350** to render the transistor **350** nonconducting, and the signal is also applied as an input to the delay circuit **360**. The capacitors **363** and **365** now begin to charge and after a predetermined time as determined by the time constant characteristics of the delay circuit **360** (for example 40 milliseconds), a potential is reached on the conductor **366** which will render the transistor **371** conductive to provide a positive going pulse on the conductor **368**. The transistor **380** acts as a current amplifier and amplifies the positive going pulse applied to the base thereof and in turn applies a positive going pulse to the base of the transistor **391**. The output from the transistor **391** is a positive going pulse that is applied to the gate **398** of the SCR **395**, thereby to cause heavy conduction thereof to light the indicating light **137**. Heavy conduction of the transistor **391** also operates the relay **130** to close the switch contacts **132–133**, thus to apply the output of the transformer **120** to the loudspeaker **125** via the conductors **123** and **126**. The relay **130** will be energized for a short period determined by the time which the transistor **391** is conducting. The relay **130** and the lamp **137** could be interchanged in their connection in the circuit if desired, depending upon the control requirements. The relay **130** could be used for any control purpose desired. Once the SCR **395** is conducting, it will remain conducting until the switch **135** is opened, and such conduction will maintain the light **137** in the energized condition.

It is further pointed out that upon receiving the second control tone so as to provide the negative going voltage on the conductor **344**, a pulse is transmitted via the holding circuit **395** and the conductor **298** to the monostable vibrator **270** to hold the multivibrator **270** in a condition such that the Schmidt trigger circuit **330** will continue to be held in a condition to transmit the signals generated by the second control tone. In this manner it will be appreciated that the Schmidt trigger **330** also serves as an AND circuit wherein the output from the first tone control circuit **200** must be applied thereto before the application of the second control tone output from the rectifier **320** is effective.

Further the feedback of the HOLD ON voltage permits the second tone to continue for as long as desired, so long as it appears soon enough after the first tone period to cause the hold on voltage to be generated, thereby controlling the multivibrator **270** in the "on" condition. The multivibrator **270** may, for example, be on for only 15 or 20 milliseconds in the absence of a HOLD ON voltage. During this period, control tone two must be applied, and the filter output must rise to a voltage sufficient to produce the HOLD ON voltage.

An important feature of the tone control circuit of the receiver **100** resides in the freedom from falsing, i.e., the freedom from operation by false and spurious signals that may be applied as an input thereto. The freedom from falsing results from several factors. First, by utilizing the tone filter circuitry (including the limiter **150**, the tapped filters **201–301**, the rectifiers **220–330**) having the characteristics as described; there positively can be no response to signals that lie out of the filter band pass, regardless of the false signal duration or intensity. Second, by requiring that subsequent tones in a tone sequence be spaced apart in frequency by several tone channels, together with requiring substantially instantaneous switching between successive tones, a signal of smoothly varying pitch such as might be produced by a heterodyne circuit, a siren near a microphone or like source, cannot actuate the tone control circuits, this resulting from the fact that the tone control circuits require a sudden jump or change in frequency between successive tones.

It is further pointed out that the described tone control circuit is readily adaptable to and compatible with a decimal numbering system, at 10 different frequencies in each group of tones corresponding to and representing the 10 different digits, with successive tones being selected alternately from the two groups of tones. If only 10 frequencies were utilized (rather than the 20 frequencies of the present system), to represent the 10 digits, i.e., with no change or jumping between bands of frequencies on successive digits, it would not be possible to utilize codes such as 22, 55, etc., in two-tone sequence systems. Although it has been suggested that an 11th tone be utilized as a repeat tone in such sequence, the frequency spectrum utilized if five channels are to separate adjacent tones would be substantially greater than that required for the present system, and the circuitry would be substantially more complicated. It is pointed out that utilizing this present system wherein alternate tones are selected from two groups of tones wherein the groups are separate at a minimum gap of five tones, only a 25-channel spectrum is required to produce any pair of digits in sequence while still maintaining a minimum gap of five channels therebetween.

Referring now to FIG. **6** of the drawings, there is illustrated a second embodiment of the present invention wherein a sequence of four tones is required to actuate the receiver, the receiver being designated by the numeral **400** and being illustrated in schematic and block diagram form. The receiver **400** utilizes the input circuits and components from the antenna **101** through the limiter **150** and onto the conductor **165**, from the receiver **100**, whereby the same reference numerals have been applied to these components and the description thereof will not be here repeated in the interest of brevity.

The output of the limiter **150** on the conductor **165** is fed to two-tone control circuits, the lower tone control circuit including a special tapped filter **401** identified by the legend FILTER # 1 of a construction to be described hereinafter, the input to the filter **401** being a series of square waves and the output thereof appearing on a conductor **409** in the form of a sinusoidal wave having a frequency of the selected control tone. The conductor **409** connects to a rectifier **440** which serves to rectify the input thereto and which has the same construction as the rectifier **220** described above. The output from the rectifier **440** is a positive voltage that is supplied along a conductor **441** as one of the inputs to an AND circuit **445**. The output from the AND circuit **445** appears on a conductor **446** that is connected to the input of a Schmidt trigger circuit **450**, the AND circuit **445** and the Schmidt trigger circuit **450** having the construction of the Schmidt trigger circuit **330** described above. The output from the Schmidt trigger circuit **450** is connected by a conductor **451** to a delay circuit **452** of the same construction as the delay circuit

260, and the output from the delay circuit 452 is connected by a conductor 453 as one input to a monostable multivibrator 455 of the construction described above with respect to the monostable multivibrator 270. The output from the multivibrator 455 appears on a conductor 525 that connects into the upper tone control channel. Also associated with the lower tone control channel is an inverter 460 having an input thereto from a conductor 435 and having an output on a conductor 425 that connects as an input to the filter 401, and to provide the second input to the AND circuit 445.

The upper tone control channel includes a special tapped filter 501 identified as FILTER # 2 also to be described more fully hereinafter, one of the inputs to the filter 501 being from the conductor 525 and another being from the conductor 165. The output from the filter 501 appears on a conductor 509 connected to a rectifier 540 of the same construction as the rectifier 320 described above. The output from the rectifier 540 is on a conductor 541 that supplies one input to an AND circuit 545, the output of which appears on a conductor 546 connected as an input to a Schmidt trigger circuit 550; the AND circuit 545 and the Schmidt trigger circuit 550 together having the construction of the Schmidt trigger circuit 330 desccribed above. The output from the Schmidt trigger circuit 550 appears on a conductor 551 and is supplied as an input to a delay circuit 552 having the construction of the delay circuit 260 described above. The output from the delay circuit 550 appears on a conductor 553 and is an input to a monostable multivibrator 555 having a construction like the monostable multivibrator 270.

The outputs on the conductors 435 and 441 are applied as inputs to an AND circuit 560, the output from the AND circuit 560 being on the conductor 561 that is connected to a Schmidt trigger circuit 565 of the construction of the Schmidt trigger circuit 330 described above. The conductor 561 also connects to the monostable multivibrator 555, and the conductor 475 also connects to the Schmidt trigger circuit 565. The output from the Schmidt trigger circuit 565 appears on the conductor 566 and is applied to a delay circuit 570 having the construction of the delay circuit 260 described above, the output from the delay circuit 570 being on the conductor 571 connected to a monostable multivibrator 575. The monostable multivibrator 575 is of the same construction as the monostable multivibrator 270 and is connected by a conductor 576 to a combination Schmidt trigger and AND circuit 580, of the construction of the circuit 330, the output of which is connected to a delay circuit 585 of the construction of the delay circuit 260, the output of the delay circuit 585 being on a conductor 586 connected to an output control circuit 590 having the same construction and arrangement as the control circuits 370 described above. The conductor 576 also connects via a conductor 535 as an input to the filter 501, the conductor 541 is also connected as an input to the AND circuit 580 and a HOLD ON circuit is provided interconnecting the conductor 581 and a monostable multivibrator 575.

Referring now to FIG. 7 of the drawings, there are illustrated the further details of the filters 401 and 501 and the inverter 460. As illustrated, the filter 401 includes an inductor in the form of a coil 402 having associated therewith a magnetic core 403, at least a portion of the core 403 being movable and adjustable, whereby the inductor 402 can be slug tuned. The inductor 402 has an input terminal 404 that is connected by a conductor 409 to one terminal of a capacitor 405, and through a capacitor 408 to the conductor 165, the other terminal of the capacitor 405 being grounded as at N, the output from the filter 401 appearing on the conductor 409. The inductor 402 has a plurality of taps thereon, and specifically 10 taps that are identified by the numerals 410 through 419. Associated with selected ones of the taps are two transistors 420 and 430. More specifically, the transistor 420 has a base 421 that is connected to one terminal of a resistor 426 by means of a conductor 404, the other terminal of the resistor 426 being connected to the conductor 425. The transistor 420 has a collector 422 that is connected to the tap 419 on the inductor 402, while the emitter 423 is connected to ground potential.

The transistor 430 has a base 431 that is connected to one terminal of a resistor 436, the other terminal of the resistor 436 being connected to the conductor 435. The transistor 430 has a collector 432 that is connected to the tap 412 on the inductor 402, while the emitter 433 is connected to ground potential.

The tapped filter 501 includes an inductor in the form of a coil 502 having associated therewith a magnetic core 503, at least a portion of the core 503 being movable and adjustable whereby the inductor 502 can be slug tuned. The inductor 502 has an input terminal 504 that is connected by a conductor 509 to one terminal of a capacitor 505 and through a capacitor 508 to the conductor 165, the other terminal of the capacitor 505 being grounded as at N, the output from the filter 501 appearing on the conductor 509. The inductor 502 has a plurality of taps thereon, and specifically, 10 taps that are identified by the numerals 510 through 519. Associated with the selected ones of the taps are two transistors 520 and 530. More specifically, the transistor 520 has a base 521 that is connected by a conductor 524 to one terminal of a resistor 526, the other terminal of the resistor 526 being connected to the conductor 525. The transistor 520 has a collector 522 that is connected to the tap 511 on the inductor 502, while the emitter 523 is connected to ground potential.

The transistor 530 has a base 531 that is connected to one terminal of the resistor 536, the other terminal of the resistor 536 being connected to the conductor 535. The transistor 530 has a collector 532 that is connected to the tap 518 on the inductor 502, while the emitter 533 is connected to ground potential.

Associated with the tone control circuits is the inverter 460 that is also illustrated in detail in FIG. 7, the inverter being in the form of a transistor 470 having a base 471 connected through a resistor 462 to the conductor 435. The transistor 470 further has its emitter 473 grounded and the collector 472 is connected to the conductor 425 and through a resistor 461 to the +DC conductor 155.

Considering now the operation of the receiver 400, in order to obtain an output from the loudspeaker 125, a four tone sequence of the proper selected control tones must be applied to the receiver 400, each tone preferably having a time duration of at least about 40 milliseconds and adjacent tones having substantially no gaps therebetween. Furthermore, the first and third tones received must be those to which the filter 401 is tuned when the transistors 420 and 430, respectively, are conducting, and the second and fourth tones received must be those to which the filter 501 is tuned when the transistors 520 and 530, respectively, are conducting.

Upon the reception of the first tone, an audio signal corresponding to the first tone is applied along the conductors 123–124 as an input to the limiter 150, and there appears on the conductor 165 a series of square wave forms. The transistor 470 in the inverter 460 is off at this time so as to allow the transistor 420 to be conducting and thus to tune the filter 401 for reception of the first control tone. Accordingly, the output on the conductor 165 is developed across the resonance circuit and the output of filter 401 as a sinusoidal wave form appears on the conductor 409. The sinusoidal wave form on the conductor 409 is rectified by the rectifier 440 and is applied as one of the positive inputs to the AND CIRCUIT 445, the other required positive input being applied along the conductor 425.

The output of the AND circuit 445 is a positive voltage which triggers the Schmidt trigger 450, thus to cause a negative going voltage to be applied along the conductor 451 to the delay circuit 452 which after a predetermined time interval cause a trigger pulse to be applied on removal of tone to the monostable multivibrator 455. Upon the removal of the first tone from the receiver 400, a positive output is derived from the multivibrator 455 that is applied along the conductor 525 to select the second tone in the filter 501 by rendering the transistor 520 conductive in the filter 501 and also to provide one of the necessary positive inputs to the AND circuit 545.

Assuming that the second control tone in the sequence is now received, the filter 501 is resonant to the input frequency and thereby develops a sinusoidal wave form at conductor 509 of the second control tone frequency thereon which is applied to the rectifier 540. The output from the rectifier 540 is a positive voltage that provides the second required positive input to the AND circuit 545, thereby to cause an output therefrom that is applied to the Schmidt trigger circuit 550. The output from the AND circuit 545 is fed back along the conductor 546 to the multivibrator 455 to hold it in the active condition for the duration of the second tone, regardless of the time duration of the second tone. The output from the AND circuit 545 also trips the Schmidt trigger circuit 550 and the output is applied to the delay circuit 552, whereby if the output from the Schmidt trigger circuit persists for the predetermined delay period, the multivibrator 555 will provide an output on the interruption of the second control tone. The output of the multivibrator 555 is applied along the conductor 435 to select the proper tone No. 3 in the filter 401 by rendering the transistor 430 conductive, and the output for the multivibrator 555 is also applied along the conductor 435 as a positive input to the AND circuit 560 and to the inverter 460. The inverter 460 now conducts so as to cause the transistor 420 to cease conduction and thus effectively to remove the connection thereof in the filter 401, and at the same time positive voltage is removed from the conductor 425 to the AND circuit 445 preventing it from operating.

If the proper third control tone is now received on the conductor 165, the filter 401 will pass the third control tone to the rectifier 440 which will now apply the third control tone as a positive input to the AND circuit 445 (there being no output from circuit 445 since there is now no input on conductor 425) and also to provide a second input to the AND circuit 560, whereby a potential is applied along the conductor 561 to the multivibrator 555 to hold it in the active conduction so long as the third tone is received.

Output of the AND circuit 560 is also applied to the Schmidt trigger circuit 565, the output of which is supplied along the conductor 566 through the delay circuit 570 and the conductor 571 to the multivibrator 575. Provided that the third tone persists for a time interval, determined by the delay circuit 570, upon the release or removal of the third tone, the multivibrator 575 causes an output pulse to appear on the output conductor 576 which is fed back to select the proper filter for tone No. 4 along the conductor 535, and this signal is also applied as one of the positive inputs to the AND circuit 580.

Assuming that the proper fourth tone in the sequence of tones is now received, there will be an output from the filter 501 and the rectifier 540 which is applied along the conductor 541 as a second positive input to the AND circuit 580, thereby to provide an output therefrom that is fed via the conductor 581, the delay circuit 585 and the conductor 586 to the output control circuits 590, whereby the circuits 590 are energized if the time duration of the fourth tone is longer than the delay provided by the delay circuit 585. It is noted that a HOLD ON potential is applied from the output of the AND circuit of the conductor 580 along the conductor 581 to the multivibrator 575 to hold it in the active condition so long as the fourth tone is received. The output signal on the conductor 586 is operative to cause operation of the circuits 590 in the same manner as the control circuits 370 described above, thereby to energize the relay 130 and to connect the loudspeaker 125 to the output of the transformer 120.

It is further pointed out that in the receiver 100 of FIG. 2 a fixed bias has been applied to the first Schmidt trigger circuit, which circuit is so designed that a full output is obtained therefrom whenever the fixed voltage bias is exceeded. If the fixed voltage bias is not exceeded, the circuit is completely inoperative. The limiter 150 provides a square wave as an input to the filters, which square wave is of constant amplitude, whereby there is a constant output voltage from the filters for any given tone frequency. These features provide a constant frequency bandwidth for the limited signal, i.e., the upper and lower frequency that will trip the Schmidt trigger circuit is predetermined by the interrelationship between the filter curve, the limiting level, and the DC bias level. As explained above, the limiting or bias level can be varied to alter the response bandwidth. On all other Schmidt triggers the bias is supplied by the monostable multivibrator feeding its AND input when it is triggered to the "on" condition. These are each shown with a potentiometer similar to 295 in FIG. 4.

Referring now to FIGS. 8 and 9 of the drawings, there is illustrated a third embodiment of the present invention wherein a sequence of 7 tones is required to actuate the receiver, the receiver being designated by the numeral 600 and being illustrated in schematic and block diagram form in FIG. 8. The receiver 600 utilizes the input circuits and components from the antenna 101 through the limiter 150 and onto the conductor 165 from the receiver 100, whereby the same reference numerals have been applied to these components and the description thereof will not be here repeated in the interest of brevity.

The output of the limiter 150 on the conductor 165 is fed to two-tone control circuits, the lower tone control circuit including a special tapped filter 601 identified by the legend FILTER # 1 of a construction to be

described hereinafter, the input to the filter **601** being a series of square waves and the output thereof appearing on a conductor **609** in the form of a sinusoidal wave having the frequency of the selected control tone. The conductor **609** connects to a rectifier **670** which serves to rectify the input thereto and which has the same construction as the rectifier **220** above. The output from the rectifier **670** is a positive voltage that is supplied along a conductor **671** as one of the inputs to an AND circuit **672**. The output from the AND circuit **672** appears on a conductor **673** that is connected to the input of a Schmidt trigger circuit **675**, the AND circuit **672** and the Schmidt trigger circuit **675** together having the construction of the Schmidt trigger circuit **330** described above. The output from the Schmidt trigger circuit **675** is connected by a conductor **676** to a delay circuit **680** of the same construction as the delay circuit **260**, and the output from the delay circuit **680** is connected by a conductor **681** as one input to a monostable multivibrator **685** of the construction described above with respect to the monostable multivibrator **270**. The output from the multivibrator **675** appears on a conductor **725** that connects into the upper tone control channel.

The upper tone control channel includes a special tapped filter **701** identified as FILTER # **2**, also to be described more fully hereinafter, one of the inputs to the filter being from the conductor **165** and other inputs being from the conductors **725**, **735** and **745**, to be described more fully hereinafter. The output from the filter **701** appears on the conductor **709** connected to a rectifier **770** of the same construction as the rectifier **320** described above. The output from the rectifier **770** is on a conductor **771** that supplies one input to an AND circuit **772**, the output of which appears on a conductor **773** connected as an input to a Schmidt trigger circuit **775**; the AND circuit **772** and the Schmidt trigger circuit **775** together having the construction of the Schmidt trigger circuit **330** described above. The output from the Schmidt trigger circuit **775** appears on a conductor **776** and is supplied as an input to a delay circuit **780** having the construction of the delay circuit **260** described above. The output from the delay circuit **780** appears on a conductor **781** and is an input to a monostable multivibrator **775** having a construction like the monostable vibrator **270**.

The output from the monostable multivibrator **785** appears on a conductor **635** and is applied as an input to the filter **601** and as an input to a NOR circuit **800**. Other inputs to the NOR circuit **800** are applied by the conductors **645** and **655**, while the output from the NOR circuit **800** appears on the conductor **625**.

The outputs on the conductors **635** and **671** are applied as inputs to the first of four tone selecting and responding circuit **870**, each of which includes an AND circuit **872**, a Schmidt trigger circuit **875**, a delay circuit **880** and a monostable multivibrator **885**, the AND circuit **872** in combination with the Schmidt trigger circuit **875** having the construction of the Schmidt trigger **330**, the delay circuit **880** having the construction of the delay circuit **260** and the monostable multivibrator **885** having the construction of the multivibrator **270**, all described heretofore.

More specifically, the inputs on the conductors **635** and **671** are applied as inputs to such a tone selecting and responding circuit **870A** including an AND circuit **872A**. The output from the AND circuit **872A** appears on a conductor **873A** which is connected to the input of a Schmidt trigger circuit **875A**, and also as an input to the monostable multivibrator **785**. The output from the Schmidt trigger circuit **875A** is connected by a conductor **876A** to a delay circuit **880A**, the output of which is applied along a conductor **881A** as an input to a monostable multivibrator **885A**. The output of the monostable multivibrator **885A**, which is also the output of the tone selecting and responding circuit **870A**, is applied along the conductor **735** as a tone-selecting signal to the filter **701** and as an input to the next tone selecting and responding circuit **870B**.

The tone selecting and responding circuit **870B** has the same essential construction and arrangement as the tone selecting and responding circuit **870A**, and therefore in the interest of brevity will not be repeated, it being pointed out that one of the outputs therefrom appears on a conductor **873B** which is a HOLD ON circuit for the multivibrator **885A**, and the output from the circuit **870B** appears on the conductor **645** and is applied as a tone-selecting signal to the filter **601** and as the input to the next tone selecting and responding circuit **870C**.

The tone selecting and responding circuit **870C** likewise has the same essential construction and arrangement as the circuit **870A**, and therefore will not be described in detail, except to point out that one of the outputs therefrom is along the conductor **837C** to the multivibrator **885B** serves as a HOLD ON signal therefor, and the output from the circuit **870C** appears on the conductor **745** and is applied as the signal to the filter **701** to select control tone No. **6**.

The output from the circuit **870C** is applied also as an input to the circuit **870D** which has the same essential construction and arrangement as the circuit **870A**, it merely being pointed out that one of the outputs thereof is a HOLD ON signal appearing on the conductor **873D** which is applied to the multivibrator **885C**, the output of the circuit **870D** appearing on the conductor **655** and being applied as a signal to the filter **601** to select the control tone No. **7**.

The output of the circuit **870D** is also applied as one of the inputs to a combination Schmidt trigger and AND circuit **980** of the construction of the circuit **330** described above, the signal on the conductor **671** also being applied thereto. The output from the circuit **980** is applied along a conductor **981** to a delay circuit **985** of the same construction as the delay circuit **260**, the output of the circuit **980** also being applied to the multivibrator **885D** as a HOLD ON signal therefor. The output of the delay circuit **985** is applied along a conductor **986** to an output control circuit **990** having a same construction and arrangement as the control circuits **370** described above.

Referring now to FIG. **9** of the drawings, there are illustrated the further details of the filter **601** and **701** and of the NOR circuit **800**. As illustrated, the filter **601** includes an inductor in the form of a coil **602** having associated therewith a magnetic core **603**, at least a portion of the core **603** being movable and adjustable, whereby the inductor **602** can be slug tuned. The inductor **602** has an input terminal **604** that is connected by a conductor **609** to an output terminal **607** and through a capacitor **608** to the conductor **165**, the other terminal of the capacitor **605** being grounded as at N, the output from the filter **601** appearing on the conductor **609**. The inductor **602** has a plurality of taps thereon, and specifically 10 taps that are identified by the numerals **610** through **619**, each of the taps as

illustrated being connected by a suitable conductor to a male terminous in a plug **660**. Associated with selected ones of the taps are four transistors **620, 630, 640** and **650**. More specifically, the transistor **620** has a base **621** that is connected to one terminal of the resistor **626** by means of a conductor **624**, the other terminal of the resistor **626** being connected to the conductor **625**. The transistor **620** has a collector **622** which is connected by a conductor **627** to a male terminous in a connector **669**. The emitter **623** is connected to ground potential.

The transistors **630, 640** and **650** each have the same construction and arrangement as the transistor **620** whereby the various parts thereof and the circuit elements connected thereto have had applied thereto like reference numerals in the corresponding series of numerals. In order to connect the several collectors to selected ones of the taps on the inductor **602**, a connector **605** has been provided having selected connections **666, 667** and **668** which selectively interconnect certain of the male termini on the connector **660** to selected male termini on the connector **669**. As illustrated, the conductor **666** connects the collector **632** to the tap **610**; the conductor **667** connects the connector **662** to the tap **616**; and the conductor **668** connects both the collector **622** and the collector **652** to the same tap **616**.

The tapped filter **701** includes an inductor in the form of a coil **702** having associated therewith a magnetic core **703**, at least a portion of the core **703** being movable and adjustable, whereby the conductor **702** can be slug tuned. The conductor **702** has an input terminal **704** that is connected by a conductor **709** to one terminal of a capacitor **705** and through a capacitor **708** to the conductor **165**, the other terminal of the capacitor **705** being grounded as at N, the output from the filter **701** appearing on the conductor **709**. The inductor **702** has a plurality of taps thereon, and specifically 10 taps that are identified by the numerals **710** through **719**, each of the taps being connected to a male terminous in a connector **750**. Associated with selected ones of the taps are three transistors **720, 730** and **740**. The transistor **720** has a base **721** that is connected by a conductor **724** to one terminal of a resistor **726**, the other terminal of the resistor **726** being connected to the conductor **725**. The transistor **720** has a collector **722** that is connected by a conductor **727** to a male terminous in a connector **759** and has an emitter **723** connected to ground potential.

The transistors **730** and **740** have the same construction and essentially the same circuit connections as the transistor **720**, and accordingly, in the interest of brevity, like reference numerals have been applied to like parts thereof in the appropriate number series. It is pointed out that each of the collectors terminates in a male terminous in the connector **759**. In order to connect the several collectors to the required tap on the inductor **702**, a connector **755** has been provided having conductors **756, 757** and **758** therein arranged to connect selected ones of the male termini in the connector **750** and **759**. More specifically, the conductor **756** connects the collector **732** to the tap **711**; the conductor **757** connects the collector **740** to the tap **715**; and the conductor **758** connects the collector **722** to the tap **719**.

From the above, it will be seen that by suitable selection of connections within the conductors **665** and **755**, any one of the taps on the inductors **602** and **702**, respectively, can be connected to any one of the tone-selecting transistors associated in the respective filters **601** or **701**. In other words, selection of the desired tap is made by a simple wire connection, whereby the selection of the desired tone frequency in a tone sequence is effected entirely by the conductors or jumper wires **666, 667**, etc. which connect the two connectors **660–669** and **750–759**, respectively. Thus the provision of two tapped coils and the connectors suitably wired as explained above will permit the selection of any one of 20 million tone combinations in a seven-digit tone control circuit of the type illustrated by the receiver **600**. It will be appreciated that the connection arrangement may be provided in the tapped filters in the receivers **100** and **400**, thereby to permit like simple selection of the desired code by means of replacing only the connector such as the connectors **665** and **755** described above.

Associated with the tone control circuits, and useful in selecting the proper tone to be passed by the filters **601** and **701**, is the NOR circuit **800**, the NOR circuit as illustrated including three transistors **810, 820** and **830**. The transistor **810** has a base **811** that is connected by a conductor **814** to one terminal of a resistor **815**, the other terminal of the resistor **815** being connected to the conductor **635** which is the third tone selector conductor. The transistor **810** also has a collector **812** connected to the conductor **625** which is the first tone selector conductor, and has an emitter **813** that is grounded as at N. The transistor **820** has a base **821** connected by a conductor **824** to one terminal of the resistor **825**, the other terminal of the resistor **825** being connected to the resistor **815** which is the fifth tone selector conductor. The transistor **820** also has a collector **822** connected to the conductor **625** and an emitter **823** connected to ground potential. The transistor **830** has a base **831** connected by a conductor **834** to one terminal of a resistor **835**, the other terminal of the resistor **835** being connected to the resistor **655** which is the seventh tone selector conductor. The transistor **830** also has a collector **822** connected to the conductor **625** and an emitter **833** connected to ground potential. It also is pointed out that the conductor **625** is connected by a resistor **836** to the +12-volt DC conductor **155**.

Considering now the operation of the receiver **600**, in order to obtain an output from the loud speaker **125**, a seven-tone sequence of the proper selected control tones must be applied to the receiver **600**, each tone preferably having a time duration of at least about 25 milliseconds and adjacent tones having substantially no gaps therebetween. Furthermore, the first and third and fifth and seventh tones received must be those to which the filter **601** is tuned when the transistors **620, 630, 640** and **650**, respectively, are conducting; and the second and fourth and sixth tones received must be those to which the filter **701** is tuned when the transistors **720, 730** and **740**, respectively, are conducting. Upon the reception of the first tone, an audio signal corresponding to the first tone is applied along the conductors **123–124** as an input to the limiter **150**, and there appears on the conductor **165** a series of square wave forms. The transistors in the NOR circuit **800** are all nonconducting, whereby a high potential is applied from the conductor **155** via the resistor **836** and the conductor **625** to the base **621** of the transistor **620** to the base **621** of the transistor **620**. As a result, the transistor **620** is conducting thereby to connect the

associated tap **619** as the effective tap on the inductor **602** in the filter **601.** Assuming that the first control tone is of the proper frequency as selected by the transistor **620,** an output is developed on the conductor **609** [, an output is developed on the conductor **609**] in a form of sinusoidal wave of the frequency of the first control tone. The sinusoidal wave on the conductor **609** is rectified by the rectifier **670** and is applied as one of the positive inputs to the AND circuit **672,** the other required positive input being applied from the conductor **625** as explained above.

The output of the AND circuit **672** is a positive voltage which triggers the Schmidt trigger circuit **675,** thus to cause a negative going voltage to be applied along the conductors **676** to the delay circuit **680,** which after a predetermined time interval is in condition such that the cessation of the first control tone causes a trigger pulse to be applied to the monostable multivibrator **685.** Upon the removal or cessation of the first tone, positive output is thus derived from the multivibrator **685** that is applied along the conductor **725** to select the second tone in the filter **701** by rendering the transistor **720** conductive, and also to provide one of the necessary positive inputs to the AND circuit **772.**

Assuming that the second control tone in the sequence is now received and the filter **701** is resonant thereat, there is developed a sinusoidal wave form on the conductor **709** having a frequency corresponding to that of the second control tone, which ouput is then applied to the rectifier **770.** The output from the rectifier **770** is a positive voltage that is applied along the conductor **771** as the second required input to the AND circuit **772,** thereby to provide an output from the AND circuit **772.** The output of the AND circuit **772** is applied along the conductor **773** to the multivibrator **685** to hold it in the active condition for the duration of the second tone, regardless of the time duration of the second tone, and the output is also applied to the Schmidt trigger circuit **775** to cause an output therefrom to appear on the conductor **776** that is applied to the delay circuit **780.** Assuming that the second control tone persists for a time that exceeds the delay time of the circuit **780,** then upon cessation of the second control tone, the multivibrator **785** is triggered to provide an output on the conductor **635.** The positive going output on the conductor **635** is applied to the base of the transistor **630** in the filter **601,** thus to select the filtering frequency for the third control tone, and the output is also applied as one of the two required inputs to the AND circuit **872A** in the tone selecting and responding circuit **870A.** Furthermore, the output from the multivibrator **785** is applied to the NOR circuit **800,** and specifically to the base of the transistor **810** therein, thus to cause the heavy conduction thereof and to drop the potential on the conductor **625,** thereby effectively to remove the transistor **620** by causing the transistor to become nonconductive, thus leaving only the transistor **630** and that portion of the inductor **602** associated therewith as active elements in the filter **601.**

The circuit is now in condition for the reception of the third control tone, which if applied at this time and at the proper frequency causes a sinusoidal output of a corresponding frequency on the conductor **609.** The sinusoidal wave for the third tone on the conductor **609** is supplied to the rectifier **670** where it is rectified to provide a positive going voltage on the conductor **671.** Although the positive going voltage on the conductor **671** is applied to the AND circuit **672,** there is no output from the AND circuit **672** at this time because the second required positive potential thereto has been removed from the conductor **625** by the operation of the NOR circuit as described above. The positive going voltage on the conductor **671** is however applied as an input to the AND circuit **872A,** thus to provide a second positive input thereto which causes an output therefrom to appear on the conductor **873A.** The output on the conductor **873A** is applied to the multivibrator **785** as a HOLD ON potential to hold the multivibrator **785** active so long as the third control tone persists. The output on the conductor **873A** is also applied to the Schmidt trigger **875A** which applies the output therefrom to the delay circuit **880A.** Assuming that the third control tone persists for a time interval greater than the time duration of the delay from **880A,** then upon cessation of the third control tone, the multivibrator **885A** is tripped to provide an output on the conductor **735A.** The output on the conductor **735A** is a positive going voltage that is applied as an input to the filter **701,** and specifically to the base of the transistor **730** to ready the filter **701** for reception of the fourth control tone. It is further noted that the multivibrator **685** at this time has assumed its normal condition, whereby to remove the positive potential from the base of the transistor **720,** thus to remove this connection to the inductor **702,** thus leaving the selection by the transistor **730** as the only connection to the inductor **702.**

The circuit is now in condition for reception of the fourth control tone which is applied from the limiter **150** as a square wave on the conductor **165** to the filter **701.** Assuming that the fourth tone is of the frequency selected by rendering the transistor **730** conducting, an output will be obtained on the conductor **709** that will be a sinusoidal wave having the frequency of the fourth control tone. This sinusoidal wave will be applied along the conductor **709** to the rectifier **770** and the output therefrom will be a positive going voltage applied to the conductor **771.** Although this positive going voltage is applied to the AND circuit **772,** there will be no output therefrom since the second required output from the multivibrator **685** is now missing. The positive going voltage on the conductor **771** will be applied as a second input to the AND circuit **872B,** the first positive input being from the multivibrator **885A** as described above. There now is an output from the AND circuit **872B** which appears on the conductor **873B,** this output being applied back to the multivibrator **885A** as a HOLD ON potential therefor in order to render this circuit active so long as the fourth tone is being received. The conduction from the AND circuit **872B** also is applied to the Schmidt trigger circuit **875B,** the output of which is applied to the delay circuit **880B.** If the fourth tone persists for a time duration that exceeds the delay time of the circuit **880B,** then upon the cessation of the fourth tone, the multivibrator **885B** is tripped to provide a positive going output therefrom on the conductor **645.** The output on the conductor **645** is applied to the filter **601,** and specifically to the base of the transistor **640** to select tone No. **5,** and is applied to the NOR circuit **800,** and specifically to the base of the transistor **820** to cause conduction thereof so as to be sure that the transistor **620** is nonconducting, the transistor **630** being rendered nonconducting by the return of the multivibrator **785** to the normal condition thereof, whereby the only active connection in the filter **602** is that provided by the transistor **640** which

selects the frequency of the fifth control tone. The output on the conductor **645** is also applied as one of the positive inputs to the circuit **872C** forming a part of the tone selecting and responding circuit **870C.**

Assuming that the fifth control tone of proper frequency is now received, it will be applied along the conductor **165** to the filter **601** that will provide an output on the conductor **609** in the form of a sinusoidal wave having a frequency of the fifth control tone. This output is rectified by the rectifier **670** to provide a positive voltage on the conductor **671,** the AND circuits **672** and **872A** not responding at this time since neither has the second positive voltage applied thereto. The positive going output is also applied as the second required input to the AND circuit **872C** so as to provide an output therefrom on the conductor **873C.** This output is applied to the multivibrator **885B** to hold it in the active condition so long as the fifth tone is received, and is also applied as the input to the Schmidt trigger circuit **875C,** which circuit operates to provide an input to the delay circuit **880C.** Assuming that the fifth tone persists for a time duration greater than the time delay of the circuit **880C,** then upon cessation of the fifth control tone, the multivibrator **885C** operates to provide a positive going voltage on the output conductor **745.** The positive going voltage on the conductor **745** is applied to the filter **701,** and specifically, to the base of the transistor **740** to render the transistor **740** conductive, and thus to select the frequency for the sixth control tone. It is noted at this time that the multivibrator **885A** has returned to its normal condition whereby to remove the potential from the conductor **735** so as to render the transistor **730** nonconducting. The output on the conductor **745** is also applied as one of the positive inputs to the AND circuit **872D** forming a part of the tone selecting and responding circuit **870D.**

Assuming that the sixth control tone of the proper frequency is now received, an output is applied along the conductor **165** to the filter **701** and there is derived therefrom a sine wave on the conductor **709** having a frequency corresponding to that of the sixth control tone. This sine wave is rectified by the rectifier **770** and applied to the conductor **771,** the only AND circuit now in condition to act therefrom being the AND circuit **872D** that now provides an output on the conductor **873D** that is applied to the Schmidt trigger circuit **875D,** the output from the Schmidt trigger circuit **875D** being applied to the delay circuit **880D.** It also is pointed out that the output on the conductor **873D** is applied as a HOLD ON potential to the multivibrator **885C** so that it is held in the active condition so long as the sixth control tone is received. Assuming that the sixth control tone persists for a time duration that exceeds the time delay of the circuit **880D,** upon cessation of the sixth control tone the multivibrator **885D** operates to provide a positive voltage on the conductor **655.** The positive voltage on the conductor **655** is applied to the filter **601,** specifically to the base of the transistor **650** to render it conducting, and is also applied to the NOR circuit **800** to ensure that the transistor **620** is rendered nonconducting by causing the transistor **830** to conduct. As a consequence, the only active connection in the filter **601** is that provided by the conducting transistor **650.** The positive going signal on the conductor **655** is also applied as one of the positive required inputs to the combined Schmidt trigger and the AND circuit **980.**

Assuming that the seventh control tone of the proper frequency is now received, an output is provided on the conductor **165** that is applied to the filter **601.** Since the transistor **650** is now conducting to select the proper seventh control tone frequency, a sine wave output is obtained on the conductor **609** having a frequency corresponding to that of the seventh control tone. This output is rectified by the rectifier **670** to provide a positive voltage on the conductor **671.** The only AND circuit now in condition to be activated by the application of the positive voltage from the conductor **671** is that in the combination Schmidt trigger and AND circuit **690** which is now operated to provide an output therefrom on the conductor **981.** The output on the conductor **981** is applied as the HOLD ON potential for the multivibrator **885D,** thereby to hold this circuit in the active condition so long as the seventh tone persists. The output on the conductor **981** is also applied to the delay circuit **985.** If the seventh tone persists for a time interval that exceeds the time delay of the circuit **985,** the delay circuit **985** operates to provide an output signal on the conductor **986** which will cause operation of the output control circuit **990.** The output signal on the conductor **986** is operative to cause operation of the circuit **990** in the same manner as the control circuit **370** described above, thereby to energize the relay **130** and to connect the loud speaker **125** to the output of the transformer **120.**

From the above, it will be seen that there has been provided an improved selective calling communication system and improved components therefor which will fulfill all of the objects and advantages set forth above.

Although there have been illustrated and described certain preferred embodiments of the invention, it is to be understood that various changes and modifications can be made therein without departing from the spirit and scope of the invention, and it is intended that all such changes and modifications be covered as fall within the scope of the appended claims.

What I claim is:

[1. A communication system comprising a transmitter including a tone-generating circuit for generating tones selected from a first group of tones in a first band of frequencies and for generating tones selected from a second group of tones in a second band of frequencies separate and distinct from said first band of frequencies, said first band of frequencies being separated from second band of frequencies by a substantial intermediate band of frequencies, said tone-generating circuit generating a sequence of tones alternately selected from said first and second groups of tones, the time duration of the gap between adjacent tones being substantially zero, a transmitter output circuit coupled to said tone-generating circuit for transmitting signals corresponding to the sequence of tones a receiver including an input circuit for receiving the signals from said transmitter, a first tone control circuit, a second tone control circuit, said first tone control circuit being coupled to said input circuit and to said second tone control circuit and responsive to the application of tones from said first group of tones to said input circuit to provide first control signals to said second tone control circuit, said second tone control circuit being coupled to said input circuit and to said first tone control circuit and responsive to the application of the tones from said second group of tones to said input circuit to provide second control signals to said first tone control circuit, one of said tone control circuits furnishing an

output control signal in response to the application of the last tone in the sequence of tones, and an output signal utilization circuit coupled to said one tone control circuit for utilizing said output control signal therefrom.]

[2. The communication system, set forth in claim 1, wherein certain of the tones in said second band of frequencies are harmonics of certain tones in said first band of frequencies.]

[3. The communication system set forth in claim 1, wherein said first band of frequencies and said second band of frequencies are in the audio range of frequencies.]

[4. The communication system set forth in claim 1, wherein each of said band of frequencies contains at least ten separate tones with each tone being separated from adjacent tones by about 3⅓ percent of the frequency thereof.]

[5. The communication system set forth in claim 1, wherein the frequency of a tone is slightly greater than 1.035 times the frequency of the next lower tone.]

[6. The communication system set forth in claim 1, wherein said transmitter includes a generator for generating a carrier signal that is modulated by the control tones.]

[7. The communication system set forth in claim 6, wherein the control tones are applied to the carrier signal by frequency modulation.]

[8. The communication system set forth in claim 1, wherein said sequence of tones comprises one tone selected from said first groupo of tones and having a time duration not substantially greater than 40 milliseconds and one tone selected from said second group of tones and having a time duration of at least not substantially greater than 40 milliseconds.]

[9. The communication system set forth in claim 1, wherein said sequence of tones comprises two tones selected from said first group of tones having a time duration not substantially greater than 40 milliseconds and two tones selected from said second group of tones each having a time duration of not substantially greater than 40 milliseconds.]

[10. The communication system set forth in claim 1, wherein said sequence of tones comprises four tones selected from said first group of tones and each having a time duration not substantially greater than 40 milliseconds and three tones selected from said second group of tones each having a time duration of not substantially greater than 40 milliseconds.]

11. In a communication system for selectively transmitting signals including a sequence of control tones alternately selected from a first group of tones in a first band of frequencies and from a second group of tones in a second band of frequencies separate and distinct from said first band of frequencies, a receiver comprising an input circuit for receiving the signals from an associated transmitter, a first tone control circuit, a second tone control circuit, means coupling said first tone control circuit to said input circuit and to said second tone control circuit, said first tone control circuit having a first tapped filter therein adjustable to a selected one of a plurality of positions respectively corresponding to a selected tone in said first group of tones so that upon the application of the selected tone to said input circuit there is produced first control signals that are applied to said second tone control circuit means coupling said second tone control circuit to said input circuit and to said first tone control circuit, said second tone control circuit having a second tapped filter therein adjustable to a selected one of a plurality of positions respectively corresponding to a selected tone in said second group of tones so that upon the application of the selected tone to said input circuit there is produced second control signals that are applied to said first tone control circuit, one of said tone control circuits furnishing an output control signal in response to the application of the last tone in the sequence of tones, an output signal utilization circuit coupled to said one tone control circuit for utilizing said output control signal therefrom.

12. The receiver set forth in claim 11, wherein said first tapped filter is adjustable to pass a selected tone in a first band of frequencies and said second tapped filter is adjustable to pass a selected tone in a second band of frequencies, said first band of frequencies being separated from said second band of frequencies by a substantial intermediate band of frequencies.

13. The receiver set forth in claim 11, wherein said first and second tapped filters are adjustable to pass tones that are in an audio range of frequencies.

14. The receiver set forth in claim 11, wherein each of said tapped filters is adjustable to pass a selected one of at least ten separate tones, each tone being separated from the adjacent tones by about 3⅓ percent of the frequency thereof.

15. The receiver set forth in claim 11, and further comprising a holding circuit interconnecting said first and second tone control circuits so as to accommodate tone duration of any length longer than a delay period provided the time gap between adjacent tones in the sequence of tones is substantially zero.

16. The receiver set forth in claim 11, wherein said first tapped filter has a connection to only one of the taps thereon and said second tapped filter has a connection to only a signal tap thereon, whereby said receiver is responsive to a sequence of two selected tones.

17. The receiver set forth in claim 11, wherein said first tapped filter has connections to two of the taps thereon corresponding to two tones in said first group of tones, and said second tapped filter has connections to two gaps thereon corresponding to two tones selected from said second group of tones, whereby said receiver is responsive to a sequence of four control tones.

18. The receiver set forth in claim 11, wherein said first tapped filter has connections to four of the taps thereon corresponding to four tones selected from said first group of tones, and said second tapped filter has connections to three taps thereon corresponding to three tones selected from said second group of tones, whereby said receiver is responsive to a sequence of seven selected tones.

19. The receiver set forth in claim 11, wherein the selection of connections to the taps on said tapped filters is made mechanically.

20. The receiver set forth in claim 11, wherein the connection to the selected tap on said tapped filter is made electronically.

21. The receiver set forth in claim 11, wherein the selection of the tones to which the receiver is responsive is made by the connectors which connect said tapped filters to the tone receiver components.

22. A communication receiver for responding to a sequence of first and second control tones, said receiver comprising an input circuit for receiving the

control tones, a first filter coupled to said input circuit and tuned to the frequency of the first control tone and providing a signal which has an amplitude dependent upon the frequency of the control tone applied thereto, a first electronic switching device coupled to said first filter and responsive to a signal from said first filter exceeding the threshold of said first switching device to provide a DC voltage of fixed value independent of the amount by which the amplitude of the signal from said first filter exceeds said threshold level, a first delay circuit coupled to said first electronic switching device and operative to produce at its output a first control signal only when the first control tone has persisted for a predetermined fixed duration, a second filter coupled to said input circuit and tuned to the frequency of the second control tone and providing a signal which has an amplitude dependent upon the frequency of the control tone applied thereto, a second electronic switching device coupled to said first delay circuit and to said second filter and responsive to both said first control signal and to a signal exceeding the threshold level of said second switching device to provide a DC voltage of fixed value and independent of the amount by which the amplitude of the signal from said second filter exceeds said threshold level, a second delay circuit coupled to said second electronic switching device and operative to produce at its output a second control signal only when the second control tone has persisted for a predetermined fixed duration, and a control signal utilization circuit coupled to said second delay circuit for utilizing said second control signal.

23. The communication receiver set forth in claim **22**, wherein each of said electronic switching devices is a transistor means having its base coupled to the associated filter and having its collector and emitter coupled to the associated delay circuit.

24. The communication receiver set forth in claim **22**, wherein each of said delay circuits includes a capacitor and resistor coupled in series across the output of the associated electronic switching device, and the output of each delay circuit is the junction of the resistor and capacitor.

25. A tone control circuit for use in a communication receiver including an input circuit which provides a sequence of control tones and including an output signal utilization circuit, said tone control circuit comprising filter means coupled to the input circuit and having a plurality of control inputs for receiving one at a time signals selectively to tune said filter means to predetermined frequencies, a plurality of AND circuits corresponding in number to the number of control tones in the sequence of control tones and each having first and second inputs and an output, control means for providing at the output thereof a control signal during reception of the first control tone in the sequence of control tones, the output of said control means being coupled to one of the control inputs of said filter means and to the first input of the first of said AND circuits, said filter means being responsive to the application of the control signal from said control means to be turned to the frequency of said first control tone, means coupling the output of said filter means to the second input of each of said AND circuits, said first AND circuit being responsive to the application thereto of both the control signal from said control means and said first control tone for producing at the output thereof an output signal, the output of said first AND circuit and the output of each succeeding AND circuit being coupled respectively to the first input of the next succeeding AND circuit, means coupling the outputs of said AND circuits respectively to the control inputs of said filter means, means coupled to said control means for removing the control signal therefrom after termination of said first control tone, said second AND circuit and each succeeding AND circuit being responsive to the application thereto of both the output signal from the next preceding AND circuit and the associated control tone in the sequence of control tones from said filter means for producing at the output thereof an output signal, said filter means sequentially being tuned to the frequencies of the control tones as they are received by the input circuit in accordance with the sequential application of said output signals to said control inputs, and means coupling the output of the last of said AND circuits to the output signal utilization circuit of the receiver.

26. The tone control circuit set forth in claim **25**, and further comprising a plurality of delay circuits corresponding in number to the number of control tones in the sequence of control tones and coupled respectively between said AND circuits, the last of said delay circuits being coupled between the last of said AND circuits and said output signal utilization circuit, each of said delay circuits being operative to produce an output signal only when the associated control tone has persisted for a predetermined duration.

27. A tone control circuit for use in a communication receiver including an input circuit which provides a sequence of control tones and including an output signal utilization circuit, said tone control circuit comprising first filter means coupled to the input circuit and having a plurality of control inputs for receiving one at a time signals selectively to tune said first filter means to predetermined frequencies, second filter means coupled to the input circuit and having a plurality of control inputs for receiving one at a time signals selectively to tune said second filter means to predetermined frequencies, a plurality of AND circuits corresponding in number to the number of control tones in the sequence of control tones and each having first and second inputs and an output, control means for providing at the output thereof a control signal during reception of the first control tone in the sequence of control tones, the output of said control means being coupled to one of the control inputs of said first filter means and to the first input of the first of said AND circuits, said first filter means being responsive to the application of the control signal from said control means to be tuned to the frequency of said first control tone, means coupling the output of said first filter means to the second input of said first AND circuit and to the second input of each succeeding odd-numbered AND circuit, means coupling the output of said second filter means to the second input of said second AND circuit and to the second input of each succeeding even-numbered AND circuit, said first AND circuit being responsive to the application thereto of both the control signal from said control means and said first control tone for producing at the output thereof an output signal, the output of said first AND circuit and the output of each succeeding AND circuit being coupled respectively to the first input of the next succeeding AND circuit, means coupling the outputs respectively of said first AND circuit and of each succeeding odd-numbered AND circuit respectively to the control inputs of said second filter means, means coupling the outputs respectively of said

second AND circuit and of each succeeding even-numbered AND circuit respectively to the control inputs of said first filter means, means coupled to said control means for removing the control signal therefrom after termination of said first control tone, said second AND circuit and each succeeding AND circuit being responsive to the application thereto of both the output signal from the next preceding AND circuit and the associated control tone in the sequence of control tones from the associated filter means for producing at the output thereof an output signal, said first and second filter means alternately being tuned to the frequencies of the control tones as they are received by said input circuit by the sequential application to said control inputs of said output signals, and means coupling the output of the last of said AND circuits to the output signal utilization circuit of the receiver.

28. The tone control circuit set forth in **27** and further comprising a first rectifier circuit coupled between said first filter means and the second input of each odd-numbered AND circuit, and a second rectifier circuit coupled between said second filter means and the second input of each even-numbered AND circuit.

29. The tone control circuit set forth in claim **27**, wherein the output of said third AND circuit and the output of each succeeding odd-numbered AND circuit is coupled to said control means for removing the control signal therefrom at least during the presence of said third control tone and during the presence of each succeeding odd-numbered control tone.

30. A tone control circuit for use in a communication receiver including an input circuit which provides a sequence of control tones and including a DC voltage utilization circuit, said tone control circuit comprising filter means coupled to the input circuit and having a plurality of control inputs for receiving one at a time signals selectively to tune said filter means to predetermined frequencies, a plurality of AND circuits corresponding in number to the number of control tones in the sequence of control tones and each having first and second inputs and an output, control means for providing at the output thereof a control signal during reception of the first control tone in the sequence of control tones, the output of said control means being coupled to one of the control inputs of said filter means and to the first input of the first of said AND circuits, said filter means being responsive to the application of the control signal from said control means to be tuned to the frequency of said first control tone, means coupling the output of said filter means to the second input of each of said AND circuit, said first AND circuit being responsive to the application thereto of both the control signal from said control means and said first control tone for producing at the output thereof an output signal, a plurality of electronic switching circuits corresponding in number to the number of control tones in the sequence of control tones and each having an input and output, the output of said first AND circuit being coupled to the input of the first of said electronic switching circuits and the output of each succeeding one of said AND circuits being respectively coupled to the input of the next succeeding one of said electronic switching circuits, the output of said first electronic switching circuit being coupled to the first input of [said first AND circuit] *the second one of said AND circuits* and the output of each succeeding one of said electronic switching circuits being coupled respectively to the first input of the next succeeding one of said AND circuits means coupling the outputs of said electronic switching circuits respectively to the control inputs of said filter means, said first electronic switching circuit being responsive to the application thereto of the output signal from said first AND circuit for producing at the output thereof a DC voltage, means coupled to said control means for removing the control signal therefrom after termination of said first control tone, said second AND circuit and each succeeding AND circuit being responsive to the application thereto of both the DC voltage from the next preceding electronic switching circuit and the associated control tone in the sequence of control tones from said filter means for producing at the output thereof an output signal, said second electronic switching circuit and each succeeding electronics switching circuit being responsive to the application thereto of the output signal from the next preceding AND circuit for producing at the output thereof a DC voltage, said filter means sequentially being tuned to the frequencies of the control tones as they are received by the input circuit in accordance with the sequential application of said DC voltages to said control inputs, and means coupling the output of the last of said electronic switching circuits to the DC voltage utilization circuit of the receiver.

31. A tone control circuit for use in a communication receiver including an input circuit which provides a sequence of control tones and including a DC voltage utilization circuit, said tone control circuit comprising filter means coupled to the input circuit and having a plurality of control inputs for receiving one at a time signals selectively to tune said filter means respectively to predetermined frequencies, a plurality of AND circuits corresponding in number to the number of control tones in the sequence of control tones and each having first and second inputs and an output, control means for providing at the output thereof a control signal during reception of the first control tone in the sequence of control tones, the output of said control means being coupled to one of the control inputs of said filter means and to the first input of the first of said AND circuits, said filter means being responsive to the application of the control signal from said control means to be tuned to the frequency of said first control tone, means coupling the output of said filter means to the second input of each of said [first] AND circuits, said first AND circuit being responsive to the applications thereto of both the control signal from said control means and said first control tone for producing at the output thereof an output signal, a plurality of electronic switching circuits corresponding in number to the number of control tones in the sequence of control tones and each having an input and output, the output of said first AND circuit being coupled to the input of the first of said electronic switching circuits and the output of each succeeding one of said AND circuits being respectively coupled to the input of the next succeeding one of said electronic switching circuits, the output of said first electronic switching circuit being coupled to the first input of [said first AND circuit] *the second one of said AND circuits* and the output of each succeeding one of said electronic switching circuits being coupled respectively to the first input of the next succeeding one of said AND circuits, means coupling the outputs of said electronic switching circuits respectively to the control inputs of said filter means, said first electronic switching circuit being responsive to the application thereto of the output signal from said

first AND circuit for producing at the output thereof a DC voltage, means coupled to said control means for removing the control signal therefrom after termination of said first control tone, said second AND circuit and each succeeding AND circuit being responsive to the application thereto of both the DC voltage from the next preceding electronic switching circuit and the associated control tone in the sequence of control tones from said filter means for producing at the output thereof [and] *an* output signal, said second electronic switching circuit and each succeeding electronic switching circuit being responsive to the application thereto of the output signal from the next preceding AND circuit for producing at the output thereof a DC voltage, the output of said second AND circuit and the output of each succeeding one of said AND circuits being coupled respectively to an input of the next preceding one of said electronic switching circuits to enable each of said electronic switching circuits to continue to produce said DC voltage as long as the associated control tone is being applied to the next succeeding one of said AND circuits, said filter means sequentially being tuned to the frequencies of the control tones as they are received by said input circuit in accordance with the sequential application of said output signals to said control inputs, and means coupling the output of the last of said electronic switching circuits to the DC voltage utilization circuit of the receiver.

32. A tone control circuit for use in a communication receiver including an input circuit which provides a sequence of control tones and including an output signal utilization circuit, said tone control circuit comprising first filter means coupled to the input circuit and including a first frequency, determining element having a plurality of inputs thereto, a plurality of electronic switching devices coupled respectively to the inputs of said first frequency-determining element, second filter means coupled to the input circuit and including a second frequency-determining element having a plurality of inputs thereto, a plurality of electronic switching devices coupled respectively to the inputs of said second frequency-determining element, each of said electronic switching devices being closed by the application thereto of a signal to couple in circuit a portion of the associated frequency-determining element and thereby tune the associated filter means to a predetermined frequency, a plurality of AND circuits corresponding in number to the number of control tones in the sequence of control tones and each having first and second inputs and an output, control means for providing at the output thereof a control signal during reception of the first control tone in the sequence of control tones, the output of said control means being coupled to one of the control inputs of said first filter means and to the first input of the first of said AND circuits, said first filter means being responsive to the application of the control signal from said control means to be tuned to the frequency of said first control tone, means coupling the output of said first filter means to the second input of said first AND circuit and to the second input of each succeeding odd-numbered AND circuit, means coupling the output of said second filter means to the second input of said second AND circuit and to the second input of each succeeding even-numbered AND circuit, said first AND circuit being responsive to the application thereto of both the control signal from said control means and said first control tone for producing at the output thereof an output signal, the output of said first AND circuit and the output of each succeeding AND circuit being coupled respectively to the first input of the next succeeding AND circuits, means coupling the outputs respectively of said first AND circuit and of each succeeding odd-numbered AND circuit respectively to the control inputs of said second filter means, means coupling the outputs respectively of said second AND circuit and of each succeeding even-numbered AND circuit respectively to the control inputs of said first filter means, means coupled to said control means for removing the control signal therefrom after termination of said first control tone, said second AND circuit and each succeeding AND circuit being responsive to the application thereto of both the output signal from the next preceding AND circuit and the associated control tone in the sequence of control tones from the associated filter means for producing at the output thereof an output signal, said first and second filter means alternately being tuned to the frequencies of the control tones as they are received by said input circuit by the sequential application to said control inputs of said output signals, and means coupling the output of the last of said AND circuits to the output signal utilization circuit of the receiver.

33. The tone control circuit set forth in claim **32**, wherein each of said frequency-determining elements is a tapped inductor.

34. In a communication receiver for receiving signals including intelligence and a sequence of control tones, a receiver comprising an input circuit which provides the signals including the intelligence and the sequence of control tones, a translating circuit coupled to said input circuit for translating the intelligence into useful form, an output control circuit coupled to said translating circuit and effective in a first condition thereof to render said translating circuit inoperative and effective in a second condition thereof to render said translating circuit operative, filter means coupled to the input circuit and having a plurality of control inputs for receiving one at a time signals selectively to tune said filter means respectively to predetermined frequencies, a plurality of AND circuits corresponding in number to the number of control tones in the sequence of control tones and each having first and second inputs and an output, control means for providing at the output thereof a control signal during reception *of the* first control tone in the sequence of control tones, the output of said control means being coupled to one of the control inputs of said filter means and to the first input of the first of said AND circuits, said filter means being responsive to the application of the control signal from said control means to be tuned to the frequency of said first control tone, means coupling the output of said filter means to the second input of each of said AND circuits, said first AND circuit being responsive to the application thereto of both the control signal from said control means and said first control tone for producing at the output thereof an output signal, the output of said first AND circuit and the output of each succeeding AND circuit being coupled respectively to the first input of the next succeeding AND circuit, means coupling the outputs of said AND circuits respectively to the control inputs of said filter means, means coupled to said control means for removing the control signal therefrom after termination of said first control tone, said second AND circuit and each succeeding AND circuit being responsive to the application thereto of

both the output signal from the next preceding AND circuit and the associated control tone in the sequence of control tones from said filter means for producing at the output thereof an output signal, said filter means sequentially being tuned to the frequencies of the control tones as they are received by said input circuit in accordance with the sequential application of said output signals to said control inputs, and means for applying the output signal from the last of said AND circuits to said output control circuit for actuating said output control circuit from the first condition thereof to the second condition thereof so as to render said translating circuit operative.

35. A communication system comprising a transmitter including a tone-generating circuit for generating tones selected from a first group of tones in a first band of frequencies and for generating tones selected from a second group of tones in a second band of frequencies separate and distinct from said first band of frequencies, said tone-generating circuit generating a sequence of control tones alternately selected from said first and second groups of tones, and a transmitter output circuit coupled to said tone-generating circuit for transmitting signals corresponding to the sequence of control tones to be transmitted; and a receiver including an input circuit for receiving the signals from said transmitter, filter means coupled to the input circuit and having a plurality of control inputs for receiving one at a time signals selectively to tune said filter means to predetermined frequencies, a plurality of AND circuits corresponding in number to the number of control tones in the sequence of control tones and each having first and second inputs and an output, control means for providing at the output thereof a control signal during reception of the first control tone in the sequence of control tones, the output of said control means being coupled to one of the control inputs of said filter means and to the first input of the first of said AND circuits, said filter means being responsive to the application of the control signal from said control means to be tuned to the frequency of said first control tone, means coupling the output of said filter means to the second input of each of said AND circuits, said first AND circuit being responsive to the application thereto of both the control signal from said control means and said first control tone for producing at the output thereof an input signal, the output of said first AND circuit and the output of each succeeding AND circuit being coupled respectively to the first input of the next succeeding AND circuit, means coupling the outputs of said AND circuits respectively to the control inputs of said filter means, means coupled to said control means for removing the control signal therefrom after termination of said first control tone, said second AND circuit and each succeeding AND circuit being responsive to the application thereto of both the output signal from the next preceding AND circuit and the associated control tone in the sequence of control tones from said filter means for producing at the output thereof an output signal, said filter means sequentially being tuned to the frequencies of the control tones as they are received by said input circuit in accordance with the sequential application of said output signals to said control inputs, and an output signal utilization circuit coupled to the output of the last of said AND circuit for utilizing the output signal therefrom.

36. A tone control circuit for use in a communication receiver including an input circuit which provides a control tone and including an output signal utilization circuit, said tone control circuit comprising filter means coupled to the input circuit and including a first frequency-determining element having a plurality of taps thereon and a second frequency-determining element, a connector plug including first and second and third portions, said first portion having a plurality of terminals thereon fixedly coupled respectively to the taps on said first frequency-determining element, said second portion having a terminal fixedly coupled to said second frequency-determining element, said third portion having a plurality of first terminals respectively matable with the terminals in said [first] *second* portion and having a second terminal matable with the terminal in said [second] *first* portion, means associated with said third portion connecting said first terminal to a selected one of said second terminals, whereby mating said third portions with said first and second portions operates to connect a selected section of said first frequency-determining element in circuit with said second frequency-determining element and thereby tune said filter means to the frequency of the control tone, an output circuit coupled to said filter means and responsive to the control tone being coupled therethrough to provide an output signal, and means coupling the output of said output circuit to the output signal utilization circuit of the receiver.

37. The tone control circuit set forth in claim **36**, wherein said first frequency-determining element is an inductor and said second frequency-determining element is a capacitor.

38. The tone control circuit set forth in claim **36**, wherein said first frequency-determining element is an inductor and said second frequency-determining element is a capacitor, one terminal of said capacitor being fixedly coupled to one terminal of said inductor and said connector plug being operative to connect the other terminal of said capacitor to a tap on said inductor so as to define a parallel resonant circuit.

39. A tone control circuit for use in a communication receiver including an input circuit which provides a sequence of control tones and including an output signal utilization circuit, said tone control circuit comprising filter means coupled to the input circuit and including a first frequency-determining element having a plurality of taps thereon and a second frequency-determining element, a set of electronic switching devices each having a control input and one terminal coupled to said second frequency-determining element, a connector plug including first and second and third portions, said first [section] *portion* having a plurality of terminals thereon fixedly coupled respectively to the taps on said first frequency-determining element, said second portion having a corresponding set of terminals respectively fixedly coupled to the other terminals of said electronic switching devices, said third portion having a plurality of first terminals respectively matable with the terminals in said first portion and a set of second terminals respectively matable with the terminals of said [first] *second* portion, means associated with said third portion for connecting selected ones of said first terminals respectively to selected ones of said second terminals, whereby mating said third portion with said first and second portions enables said electronic switching devices respectively to couple selected sections of said [second] *first* frequency-determining element in circuit with said [first] *second* frequency-determining element, an

output circuit having an input coupled to said filter means and having a plurality of outputs respectively coupled to the control inputs of said electronic switching devices, said electronic switching devices sequentially being closed by the application of signals from said output circuit to said control inputs sequentially to tune said filter means to the frequencies of the control tones as they are received by the input circuit, and means coupling the output which is responsive to the last tone in the sequence of control tones to the output signal utilization circuit of the receiver.

40. The tone control circuit set forth in claim **39**, wherein each of said electronic switching devices is a transistor means having a base which is said control input and a pair of output electrodes in the form of a collector and an emitter, one of said output electrodes being coupled to the associated tap and the other of said output electrodes being coupled to said second frequency determining element.

41. A selective receiver for indicating the presence of a predetermined tone grouping in tone encoded paging signals comprising electric filter means sequentially tunable to pass individual tones of said grouping in a predetermined order, means for detecting said tone encoded signals and coupling same to the input of said filter means, sequence detector means coupled to the output of said filter means and arranged to cause said filter means to pass sequentially in said predetermined order the tones of said grouping upon the prior passage of preceding tones of said tone grouping, and indicator means responsive only to the passage through said filter means of the last of the tones of said grouping for indicating said receiver is being paged.

42. A selective receiver as in claim 41 wherein said sequence detector means includes counter means responsive to the output of said filter means for counting the number of tones passed through said filter means and for actuating said indicator means when a number corresponding to the number of tones in said tone grouping is counted.

43. A selective receiver as in claim 41 wherein said filter means is controllable to selectively pass distinct individual tones, and further including sequence control means responsive to said sequence detector means for controlling said filter means to sequentially pass tones in said predetermined order.

44. A selective receiver as in claim 43 wherein said sequence control means is coupled to said filter means to quiescently tune said filter means to pass the first tone of said predetermined order and wherein said sequence detector means includes counter means responsive to the output of said filter means for counting the number of tones passed and for actuating said indicator means when all tones of said grouping are counted.

45. A selective receiver as in claim 44 wherein said counter means includes monostable multivibrator means and register means, each coupled to the output of said filter means, said monostable multivibrator means being responsive to at least the first tone passed through said filter means for operating said sequence control means and causing said filter means to tune to the second tone in said grouping, and said register means being arranged to be nonresponsive to said first tone pulse and to count the remaining tones in said sequence.

46. A selective receiver as in claim 45 wherein said counter means includes gate means coupled to the outputs of said filter means and of said monostable multivibrator means for rendering said register means nonresponsive to said first tone of said predetermined order and responsive to all succeeding tones of said grouping.

47. A selective receiver according to claim 41 wherein said sequence control means includes means for successively connecting said filter means to different impedance terminals for causing said filter means to pass different tones and means for separately changing the impedance applied to each terminal for changing the coding of said receiver.

48. A selective receiver according to claim 41 wherein said sequence detector means is responsive to the prior passage of a tone by said electric filter means to connect said electric filter means to a different tuning impedance terminal in said predetermined order and wherein said sequence detector means further includes an impedance device capable of providing at each of several connecting points, greater in number than said tuning impedance terminals, a different impedance and connection means for selectively connecting each of said tuning impedance terminals to different ones of said connection points.

49. A selective receiver for indicating the presence of a predetermined frequency grouping in frequency encoded paging signals comprising: electric filter means controllable to selectively pass individual frequencies of said grouping, means for detecting said frequency encoded signals and coupling same to the input of said filter means, sequence control means coupled to said filter means for tuning same to sequentially pass frequencies in a predetermined order, sequence detector means connected to the output of said filter means for detecting the passage of the frequencies in said grouping, and indicator means responsive only to the last output of said sequence detector means for indicating said receiver is being paged, said sequence control means being coupled to the output of said filter means for operation in response to the outputs thereat.

50. A selective receiver as in claim 49 wherein said sequence control means is preset to cause said filter means to pass the first frequency in said predetermined order and to pass successively the succeeding frequencies in said predetermined order upon the passage of their preceding frequency.

51. A selective receiver as in claim 50 wherein said sequence control means is constructed to return to its preset condition after at least one subsequent frequency of a detected encoded frequency grouping fails to pass through said filter means.

52. A selective receiver as in claim 50 wherein said sequence control means is operable in response to said sequence detector means to cause said sequential tuning of said filter means.

53. A selective receiver as in claim 52 wherein said sequence detector means includes counter means responsive to the output of said filter means for counting the number of distinct frequencies passed and for actuating said indicator means.

54. A selective receiver as in claim 53 wherein said sequence control means is reset by said counter means.

55. A selective receiver as in claim 54 wherein said sequence control means is operable to cause said sequential tuning of said filter means in response to said counter means.

56. A selective receiver as in claim 55 wherein said counter means includes monostable multivibrator means and register means, said monostable multivibrator means being responsive to at least the first frequency output of said filter means, for operating said sequence control means and causing said filter means to tune to the second

frquency of said predetermined order, and said counter circuit being arranged to be nonresponsive to said first frequency and to count the remaining frequencies of said predetermined order.

57. A selective receiver as in claim 56 wherein said sequence control circuit is controlled and reset by both said monostable multivibrator means and said counter circuit means.

58. A selective receiver for indicating the presence of a predetermined tone grouping in tone encoded paging signals comprising: active electric filter means arranged to have its bandpass range tunable in accordance with external circuit means, a plurality of external circuit means each arranged to be separately coupled to said active filter and to tune its bandpass range to pass different tones of said grouping, means for detecting said tone encoded signals and for coupling same to the input of said active filter means, sequence control means arranged to sequentially connect each of said plurality external circuit means to said active filter to cause said active filter to sequentially pass tones in a predetermined order, sequence detector means connected to the output of said active filter means for detecting the passage of the tones in said grouping in said predetermined order and indicator means responsive only to the last output of said sequence detector means for indicating that said receiver is being paged.

59. A selective receiver as in claim 58 wherein said active filter means is constructed to have its bandpass range varied in response to externally connected impedance means, and wherein each of said external circuit means comprises impedance means for tuning said active filter means to pass a distinct tone of said tone grouping.

60. A selective receiver as in claim 59 wherein said paging signals are sequential tone encoded signals and said predetermined order is the order in which said tones occur in said grouping and wherein said sequence control means comprises switch means for individually coupling each of said impedance means to said active filter means in a sequential manner to pass tones in the sequence which the tones occur in said grouping.

61. A selective receiver as in claim 60 wherein said switch means is coupled to the output of said active filter means and are operable in response thereto.

62. A selective receiver as in claim 61 wherein said switch means is preset to cause said active filter means to pass the first tone of said grouping and to pass the succeeding tones of said grouping upon the passage of the preceding tones of said grouping.

63. A selective receiver as in claim 62 wherein said switch means is constructed to return to its preset condition after at least one subsequent tone of a detected tone encoded grouping fails to pass through said filter means.

64. A selective receiver as in claim 60 wherein said switch means is coupled to said sequence detector means and is operable in response thereto to cause said sequential tuning of said filter means.

65. A selective receiver as in claim 64 wherein said sequence detector means includes counter means responsive to the output of said active filter means for actuating said indicator means.

66. A selective receiver as in claim 65 wherein said switch means is coupled to said counter means to be controlled and reset thereby.

67. A selective receiver as in claim 66 wherein said counter means includes monostable multivibrator means and register means, said monostable multivibrator means being responsive to at least the first tone output of said active filter means, for operating said sequence control means and for causing said active filter means to tune to the second tone in said grouping, and said register means being arranged to be nonresponsive to said first tone pulse and to count the remaining tones in said grouping.

68. A selective receiver as in claim 67 wherein said switch means is coupled to said monostable multivibrator means and is arranged to switch from its preset condition to cause said active filter means to pass the second tone of said grouping and wherein said switch means is coupled to said register means to cause said active filter means to pass the remaining tones in said grouping.

69. A method of receiving and indicating the presence of a predetermined tone grouping in tone encoded paging signals comprising detecting said tone encoded paging signals, passing said tone encoded signals through an electric filter arranged to pass only the first tone of said grouping, thereafter sequentially retuning said filter to pass the remaining tones in said grouping in the sequence in which they are arranged in said grouping, and causing an output indication only upon the passage of all of said tones in said grouping through said filter.

70. A method of receiving and indicating the presence of a predetermined tone grouping as in claim 69 including the step of counting the number of tones passed through said filter and causing said indication upon the counting of the total number of tones in said grouping.

71. A method of receiving and indicating the presence of a predetermined tone grouping as in claim 69 wherein said filter comprises an active filter arranged to have its bandpass range tuned in accordance with a plurality externally connected circuit means, and wherein the sequential retuning of said active filter is carried out by sequentially connecting each of said plurality of circuit means to said active filter to cause said filter to pass tones in the sequence in which they occur in said grouping.

72. A decoder for determining the presence of an n tone grouping in tone encoded paging signals, wherein n corresponds to the number of tones in said grouping, comprising: an active electric filter arranged to have its bandpass tuned in accordance with external impedance means, n impedance means each arranged to tune said active filter to pass separately the different tones of said tone grouping, n switch means for coupling each of said plurality of impedance means to said active filter, and gate means arranged to operate said n switch means in response to the output of said active filter to cause said active filter to sequentially pass tones in the sequence in which the tones are arranged in said grouping, counter means coupled to the output of said active filter for counting the tones passed through said active filter and providing an actuating output only upon the passage through said active filter of n tones whereby presence of an actuating output at said counter means indicates presence of said predetermined tone grouping.

73. A decoder as in claim 72 and wherein said n switch means are sequentially operated in response to said counter means.

74. A decoder as in claim 72 wherein said n tone grouping is made up of tones selected from m tones and wherein said n impedance means are selected from a group of m impedance means each arranged to tune said active filter to pass a different one of said m tones and connector means for separately connecting selected ones of said m impedance means to said n switch means, said selected impedance means being arranged to tune said active filter to pass separately the different tones of said tone grouping.

75. A selective receiver for indicating the presence of a predetermined modulation grouping in modulation encoded paging signals comprising: modulation selection means sequentially adjustable to pass individual tones of said grouping in a predetermined order, means for detecting said modulation encoded signals and coupling same to the input of said modulation selection means, sequence detector means coupled to the output of said modulation

selection means and arranged to cause said modulation selection means to pass sequentially in said predetermined order the modulations of said grouping upon the prior passage of preceding modulations of said grouping, and indicator means responsive to the passage through said modulation selection means of all the modulations of said grouping for indicating said receiver is being paged.

* * * * *

UNITED STATES PATENT OFFICE

CERTIFICATE OF CORRECTION

PATENT NO. : Re. 28,739

DATED : March 16, 1976

INVENTOR(S) : Keith H. Wycoff

It is certified that error appears in the above-identified patent and that said Letters Patent are hereby corrected as shown below:

Column 4, line 1, "1533" should be --1553--.
Column 5, line 52, "and" should be deleted.
Column 6, line 15, "of" first occurrence should be --a--;
line 61, "filter" should be --filters--.
Column 7, line 60, "235" second occurrence should be --233--.
Column 10, line 68, "control" should be --contact--.
Column 11, line 51, "chamber" should be --conductor--.
Column 12, line 31, "condution" should be --conduction--.
Column 15, line 26, "desccribed" should be --described--.
Column 17, line 67, "conduc-"should be --condi- --.
Column 20, line 27, "837C" should be --873C--.
Column 21, line 19, "605" should be --665--.
Column 36, line 13, the brackets should be deleted;
"*second*" should be deleted;
line 15, the brackets should be deleted;
"*first*" should be deleted;
line 16, brackets should be placed around "*first*";
--*second*-- should be inserted after "first";
line 17, brackets should be placed around "second";
--*first*-- should be inserted after "second".
Column 38, line 3, "*41*" should be --*43*--.
Column 39, line 1, "*frquency*" should be --*frequency*--.

Signed and Sealed this

Nineteenth Day of October 1976

[SEAL]

Attest:

RUTH C. MASON
Attesting Officer

C. MARSHALL DANN
Commissioner of Patents and Trademarks