PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 :
B24B 7/12, 29/00 // 7/28, 9/00

A1

(11) International Publication Number: **WO 99/22905**

(43) International Publication Date: 14 May 1999 (14.05.99)

(21) International Application Number: PCT/DK98/00472

(22) International Filing Date: 30 October 1998 (30.10.98)

(30) Priority Data:
PA 1997 01245 3 November 1997 (03.11.97) DK

(71) Applicant *(for all designated States except US)*: HH PATENT A/S [DK/DK]; Grødevej 14, DK–6823 Ansager (DK).


(72) Inventor; and
(75) Inventor/Applicant *(for US only)*: HUNDEBØL, Keld, Otting [DK/DK]; Grødevej 14, DK–6823 Ansager (DK).

(74) Agent: LARSEN & BIRKEHOLM A/S; Skandinavisk Patentbureau, Banegårdspladsen 1, P.O. Box 362, DK–1570 Copenhagen V (DK).

(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: METHOD FOR SANDING SURFACES ON ITEMS

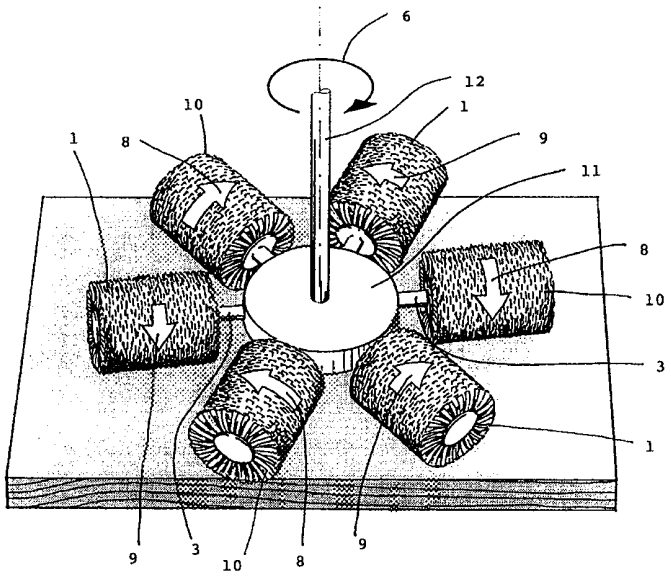

(57) Abstract

With sanding or sanding machines with rotating sanding tools comprising sanding segments which are rotated in mutually opposite directions, according to the invention a more uniform sanding result and uniform wear on the tools is achieved with a method whereby the tools (10) which are rotated in the direction like a roller are rotated slightly faster than are the tools (1) which are rotated in the opposite direction. The necessary increase in speed has shown to be around 7 %, since the individual segments under the increased influence of the centrifugal force will thus obtain the same sanding pressure and herewith a uniform sanding effect for all of the sanding tools regardless of their direction of rotation in relation to the item.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	**ES**	Spain	**LS**	Lesotho	**SI**	Slovenia
AM	Armenia	**FI**	Finland	**LT**	Lithuania	**SK**	Slovakia
AT	Austria	**FR**	France	**LU**	Luxembourg	**SN**	Senegal
AU	Australia	**GA**	Gabon	**LV**	Latvia	**SZ**	Swaziland
AZ	Azerbaijan	**GB**	United Kingdom	**MC**	Monaco	**TD**	Chad
BA	Bosnia and Herzegovina	**GE**	Georgia	**MD**	Republic of Moldova	**TG**	Togo
BB	Barbados	**GH**	Ghana	**MG**	Madagascar	**TJ**	Tajikistan
BE	Belgium	**GN**	Guinea	**MK**	The former Yugoslav Republic of Macedonia	**TM**	Turkmenistan
BF	Burkina Faso	**GR**	Greece			**TR**	Turkey
BG	Bulgaria	**HU**	Hungary	**ML**	Mali	**TT**	Trinidad and Tobago
BJ	Benin	**IE**	Ireland	**MN**	Mongolia	**UA**	Ukraine
BR	Brazil	**IL**	Israel	**MR**	Mauritania	**UG**	Uganda
BY	Belarus	**IS**	Iceland	**MW**	Malawi	**US**	United States of America
CA	Canada	**IT**	Italy	**MX**	Mexico	**UZ**	Uzbekistan
CF	Central African Republic	**JP**	Japan	**NE**	Niger	**VN**	Viet Nam
CG	Congo	**KE**	Kenya	**NL**	Netherlands	**YU**	Yugoslavia
CH	Switzerland	**KG**	Kyrgyzstan	**NO**	Norway	**ZW**	Zimbabwe
CI	Côte d'Ivoire	**KP**	Democratic People's Republic of Korea	**NZ**	New Zealand		
CM	Cameroon			**PL**	Poland		
CN	China	**KR**	Republic of Korea	**PT**	Portugal		
CU	Cuba	**KZ**	Kazakstan	**RO**	Romania		
CZ	Czech Republic	**LC**	Saint Lucia	**RU**	Russian Federation		
DE	Germany	**LI**	Liechtenstein	**SD**	Sudan		
DK	Denmark	**LK**	Sri Lanka	**SE**	Sweden		
EE	Estonia	**LR**	Liberia	**SG**	Singapore		

METHOD FOR SANDING SURFACES ON ITEMS

Prior art technique

The invention concerns a method for the sanding of surfaces on items by means of tools which consist of sanding segments which extend radially from a core in the formation of a cylindrical sanding tool, said tool being rotated around an axis of rotation which extends substantially parallel with the surface on the item, so that under the influence of centrifugal force the individual sanding segments exert a sanding pressure against the surface of the item, and where there are mounted several of such tools which are rotated in mutually opposite directions while at the same time being moved in relation to the item, or where the item is moved in relation to the sanding tools.

The sanding of surfaces by means of such tools is used especially for the processing of wooden items whose surfaces must be smooth.

Similarly, in connection with lacquered surfaces, the sanding can be used with advantage as intermediate sanding between lacquer applications.

Moreover, the method can be used for the cleaning of metal surfaces, where the sanding also serves to deburr the edges so that both an effective and uniform deburring is achieved.

Finally, the method can be used for items of plastic where, for example, the surface must be ground with the object of removing fraze and/or for subsequent surface treatment.

Machines are known for the execution of such a method. For example, from the description of DK Patent 156.703, a machine is known for the sanding of wooden items, and which is provided with six sanding rollers in

a tool which rotates in such a manner that adjacent rollers are rotated in opposite directions during the turning of the tool over the item.

The individual rollers are rotated at the same speed, i.e. the rollers which rotate clockwise and the rollers which rotate counter-clockwise during the turning of the tool over the item all rotate at the same speed.

However, there hereby arises a small difference in the sanding effect of the individual sanding elements, the reason being that because of the differences in the relative speeds, the individual sanding segments will have different contact pressure, sanding pressure, against the surface of the item.

The sanding elements on the tools rotating in the manner like a roller will namely be fed a little slower over the item, and herewith have a relatively lower sanding effect than the corresponding sanding elements on the tools which rotate in the opposite direction, in that the relative sanding speed of these is higher and the sanding effect therefore greater than that of the tools which rotate like a roller.

This difference in effect results not only in a non-uniform sanding of the surface, but also a non-uniform wear on the sanding elements.

From DK 9300243 Y6 there is known a pass-through sanding machine with sanding tools which have variable speeds of rotation. The object of this is to be able to mount sanding tools successively with different sanding aggressiveness, in that the speed of the individual tools can be set in accordance with their aggressiveness.

The object of the invention

It is the object of the invention to remedy the disadvantages and drawbacks of the known methods, and this is achieved according to the invention when the sanding tool which moves in the rolling direction over the item is rotated more quickly than the tool which moves in the opposite direction over the item is rotated.

According to the invention, by simply rotating the tools which rotate in the direction like a roller faster than the tools which are rotated in the opposite direction, there can hereby be achieved a completely uniform sanding effect by all of the sanding segments regardless of their direction of rotation.

In a surprisingly simple manner, there is hereby achieved a completely perfect sanding result, completely without any variation in the sanding by the individual sanding tools, and with a completely uniform wear on the sanding elements as a result.

Moreover, a uniform physical loading of the item on the belt is achieved, in that there will be uniform side effects on the item from both the tools which rotate like a roller and those which rotate in the opposite direction.

To this can be added that in step with the wear, the speed of rotation of the sanding tools can gradually be increased to compensate for the reduced sanding effect while avoiding the hitherto-known simultaneous increase in non-uniformity in the sanding, which occurs particularly due to the increased heating-up of the sanding tools which rotate in the opposite direction. This is especially important for the sanding of metal plate, where variations in temperature will give rise to tensions and deformations in the metal plate.

As disclosed in claim 2, by letting the tools which rotate in the direction like a roller rotate 13% faster than the tools rotating in the opposite direction, theoretically a completely uniform sanding pressure is achieved for both types of sanding tools, but since the centrifugal force plays a role at the relatively high speeds of rotation, an increase of only 7% in the speed of the tools rotating in the rolling direction has shown to provide the most uniform sanding result, and herewith a correspondingly uniform wear on the sanding elements.

Due to the progressiveness of the centrifugal force, the increase in rotation of 7% will correspond to the theoretical compensation of 13% for achieving a uniform sanding force or sanding pressure.

The drawing

The invention will be described in more detail in the following section with reference to the drawing, where

fig. 1 is a perspective view of a sanding tool during operation,

fig. 2 shows a sanding tool rotating in the direction like a roller seen from the outside, and

fig. 3 shows a sanding tool rotating in the opposite direction, similarly seen from the outside, both during operation.

Description of the method

In fig. 1 there is shown an example of a sanding tool which partly comprises three cylindrical sanding tools 10 which are rotated counter-clockwise seen from the outside end, and as shown in fig. 2, and partly three

sanding tools 1 which are rotated clockwise seen from the outside end, and as shown in fig. 3.

The sanding tools can consist of disks cut from sheet material and which are provided with incisions extending radially outwards for the formation of segmented sanding elements 2. The individual sanding disks are provided with a hole around the centre axis so that they can be mounted on an axle 3 by being pushed on to said axle and tightened to form a sanding tool 1, 10

The six rotation axles 3 are housed in a drive 11 mounted on a turning shaft 12 which can turn the drive 11, and therewith the tools 1, 10, around over the item 4 in a turning movement which extends parallel to the surface of the item.

When the tools 1, 10 are thus turned, as indicated by the arrow 6, the individual axles 3 with the tools 1, 10 are rotated so that the three tools 10 are rotated in the direction like a roller, as indicated by the arrow 8, while the remaining tools 1 are rotated in the opposite direction, as indicated by the arrow 9.

During the sanding, the individual tools 1, 10 are rotated on their axles 3 while at the same time they are turned over the item 4 by the shaft 12 in a turning movement 6.

In order for the whole of the item to be swept by the tools, it can be moved in relation to the tools, e.g. on a not-shown transport plane, or the tools can be moved over the item. Alternatively, this can be effected by a combination of movements, i.e. where both the item and the tools are moved in relation to one another.

In order to achieve a perfect sanding result, according to the invention the three tools 10 rotating in the rolling direction must be rotated slightly faster than the three tools 1 rotating in the opposite direction. This is indicated in the drawing by means of arrows 8 and 9, the length of which indicates the difference in the speed of rotation.

An example of such a sanding tool can have an outer tool diameter of 300 mm, a speed of rotation of 1,000 rpm in the oppositely directed rotation, and a speed of rotation of 1,070 rpm in the rolling direction, i.e. a 7% increase in speed in relation to the speed in the opposite direction.

The theoretical difference between the relative speeds of the tools in the rolling direction and the opposite direction over the item is 13%, but because of the increased influence of the centrifugal force on the sanding segments during the increase in speed, it is thus only necessary to increase the speed of rotation by 7%. There is thus hereby achieved the same relative sanding speed and herewith sanding pressure over the item for all of the segments on the tools.

The difference is shown in figs. 2 and 3, and it is seen that the tool 10 rotating in the rolling direction rotates slightly faster than the tool 1 rotating in the opposite direction, whereby this resulting sanding effect becomes uniform due to the uniform sanding movements of the individual sanding elements.

There is hereby achieved a uniform sanding result, in that at no time will there be any variation on the surface 5 of the item 4.

Further to this improvement in the sanding result, a uniform wear on the sanding elements 2 will also be achieved, the reason being that these are now loaded to the same degree by the uniform sanding effect. The lifetime of the tools thus becomes the same for all of the tools, and the changing of

the sanding disks on all of the tools can therefore be effected at the same time.

It is naturally an advantage that the sanding tools can be replaced at the same time, and not when only half of them are worn down.

Since the load on the items is more uniform, the securing effect on the conveyor can be reduced to the average load, whereby the consumption of power by the vacuum conveyor can be considerably reduced.

Moreover, the uniform wear on the sanding elements will enable the sanding effect to be adjusted, which will result in a uniform result, and will not like the known methods give rise to an increased sanding effect for the tools rotating in the opposite direction with a subsequent non-uniform heating-up.

The method is described in connection with a sanding tool as shown in fig. 1, but the same method can be executed with sanding machines of other constructions, merely providing that they comprise tools which are rotated in different directions. It is thus possible for the sanding result for all such sanding tools to be improved by changing the speed at which their tools are rotated.

CLAIMS

1. Method for the sanding of the surface on items by means of sanding tools which consist of sanding segments extending radially from a core in the formation of a cylindrical sanding tool, said sanding tool being rotated around an axis of rotation which extends substantially parallel with the surface on the item, so that under the influence of the centrifugal force the individual sanding segments exert a sanding pressure against the item surface, and where there are mounted several such sanding tools which are rotated in mutually opposite directions while at the same time being moved in relation to the item, or the item is moved in relation to the sanding tools, **characterized** in that the sanding tool (10), which is moved (7) while rotating in the direction like a roller over the item (4), is rotated faster (8) than is the sanding tool (1) which is moved (7) while rotating in the opposite direction (9) over the item (4).

2. Method according to claim 1, **characterized** in that to compensate for the difference in sanding pressure, the speed of rotation (8) of the tool (10) rotating in the direction like a roller is at a maximum 13% and preferably 7% higher than the speed of rotation (9) for the tool (1) rotating in the opposite direction.

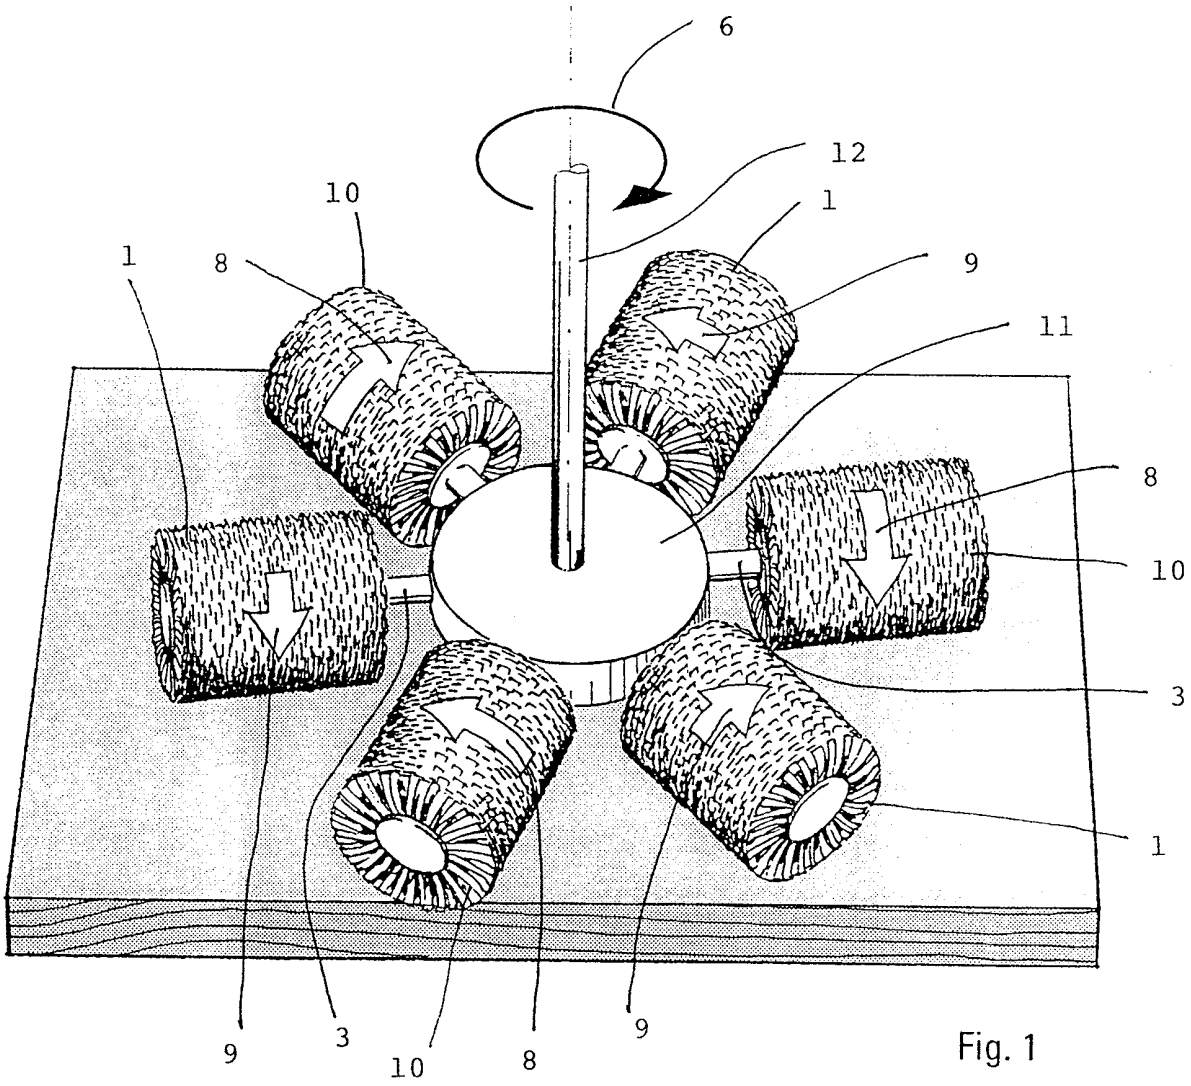


Fig. 1

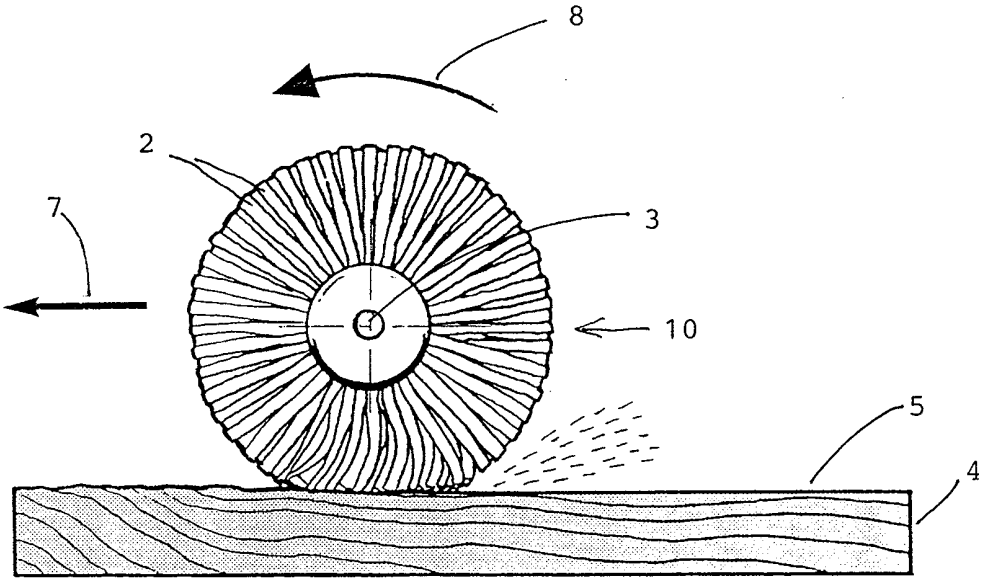


Fig. 2

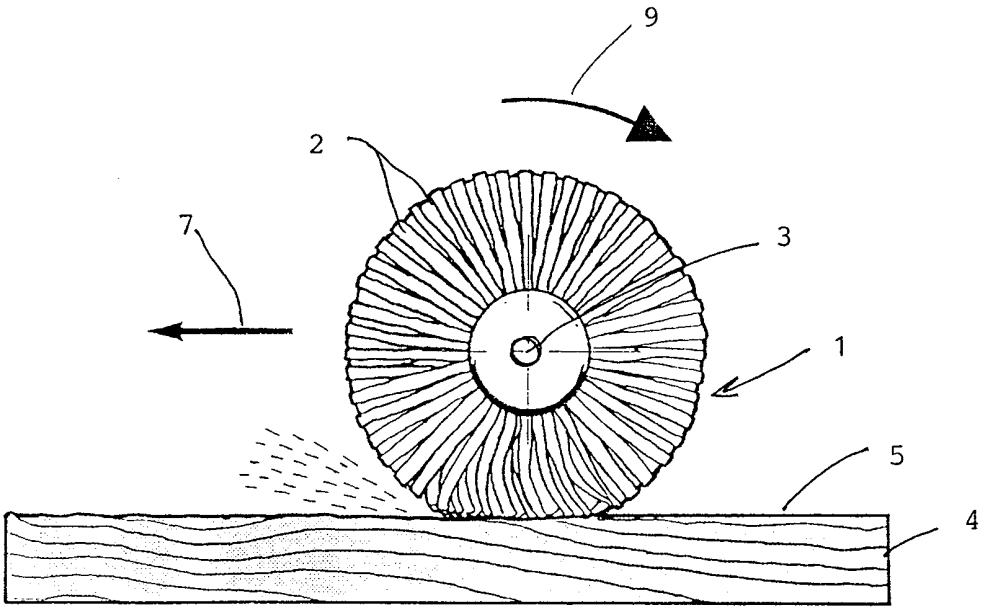


Fig. 3

INTERNATIONAL SEARCH REPORT

Inte. ational application No.
PCT/DK 98/00472

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B24B 7/12, B24B 29/00 // B24B 7/28, B24B 9/00
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B24B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0458727 A1 (HH PATENT A/S), 27 November 1991 (27.11.91), figure 3 --	1
A	EP 0471641 A2 (PANWOOD LTD), 19 February 1992 (19.02.92), figures 1,7 --	1
A	WO 9427781 A1 (KILDE, BJARNE), 8 December 1994 (08.12.94), figure 3, abstract --	1
A	GB 2141648 A (UDVIKLINGSCENTRET HANSEN & HUNDEBOL A/S (DENMARK)), 3 January 1985 (03.01.85) --	1

[X] Further documents are listed in the continuation of Box C. [X] See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" erlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
4 March 1999	08 -03- 1999
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Anders Brinkman Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/DK 98/00472

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4646473 A (HUNDEBOL), 3 March 1987 (03.03.87) -- US 5131292 A (HUNDEBOL), 21 July 1992 (21.07.92) -- --------	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/02/99

International application No.
PCT/DK 98/00472

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0458727 A1	27/11/91	SE 0458727 T3	
		AT 109389 T	15/08/94
		AU 640027 B	12/08/93
		AU 7988191 A	10/12/91
		CA 2083053 A	23/11/91
		DE 9116648 U	29/04/93
		DE 69103209 D,T	24/11/94
		DK 127190 A	23/11/91
		DK 165549 B,C	14/12/92
		ES 2057831 T	16/10/94
		FI 95106 B,C	15/09/95
		FI 925303 A	20/11/92
		NO 179822 B,C	16/09/96
		PL 167137 B	31/07/95
		RU 2051019 C	27/12/95
		US 5274962 A	04/01/94
		US 5291689 A	08/03/94
		US 5601481 A	11/02/97
		WO 9117863 A	28/11/91
EP 0471641 A2	19/02/92	NONE	
WO 9427781 A1	08/12/94	AU 4559393 A	14/02/94
		AU 6794094 A	20/12/94
		DE 4493442 T	27/03/97
		DK 127295 A	14/11/95
		DK 9300243 Y	25/06/93
		FI 955536 A	16/11/95
		NO 954641 A	17/11/95
		SE 9504000 A	13/11/95
		US 5733180 A	31/03/98
GB 2141648 A	03/01/85	AT 147484 A	15/04/89
		AT 389267 B	10/11/89
		CA 1231530 A	19/01/88
		CH 668024 A,B	30/11/88
		DE 3416629 A,C	15/11/84
		DE 8413700 U	29/10/87
		DK 156703 A,B,C	21/01/91
		DK 210883 A	11/05/83
		FI 76945 B,C	30/09/88
		FI 841799 A	12/11/84
		FR 2545747 A	16/11/84
		JP 1834116 C	29/03/94
		JP 59209752 A	28/11/84
		NL 189179 C	01/02/93
		NL 8401505 A	03/12/84
		SE 449827 B,C	25/05/87
		SE 8402513 A	12/11/84
		SU 1491324 A	30/06/89
		US RE34014 E	04/08/92
US 4646473 A	03/03/87	US RE34014 E	04/08/92

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/02/99

International application No.
PCT/DK 98/00472

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5131292 A	21/07/92	AT 110606 T	15/09/94
		AU 645950 B	27/01/94
		AU 7987291 A	10/12/91
		DE 69103676 D,T	22/12/94
		DK 127090 A	23/11/91
		DK 164969 B,C	21/09/92
		EP 0458728 A,B	27/11/91
		SE 0458728 T3	
		FI 925302 A	20/11/92
		PL 165514 B	30/12/94
		WO 9118224 A	28/11/91