

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
25 January 2001 (25.01.2001)

PCT

(10) International Publication Number
WO 01/05871 A1

(51) International Patent Classification⁷: C08G 65/22, 65/18, 18/50, 18/38

(21) International Application Number: PCT/US00/19097

(22) International Filing Date: 13 July 2000 (13.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/144,375 16 July 1999 (16.07.1999) US
Not furnished 13 July 2000 (13.07.2000) US

(71) Applicant (for all designated States except US): AERO-JET-GENERAL CORPORATION [US/US]; Building 05025, Dept. 5261, P.O. Box 13222, Sacramento, CA 95813-6000 (US).


(72) Inventors; and
(75) Inventors/Applicants (for US only): MALIK, Aslam, A. [US/US]; 3001 Oakwood Road, Cameron Park, CA 95682 (US). ARCHIBALD, Thomas, G. [US/US]; 4155 Natoma Avenue, Fair Oaks, CA 95628 (US). CARLSON, Roland, P. [US/US]; 99 Cable Circle, #18, Folsom, CA 95630 (US). WYNNE, Kenneth, J. [US/US]; 6342 Villa Lane, Falls Church, VA 22044 (US). KRESGE, Edward, N. [US/US]; Parlin Lane, Watchung, NJ 07060 (US).

(74) Agents: GARRETT-WACKOWSKI, Eugenia et al.; Townsend and Townsend and Crew LLP, Two Embarcadero Center, 8th floor, San Francisco, CA 94111-3834 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,

[Continued on next page]

(54) Title: AMORPHOUS POLYETHER GLYCOLS BASED ON BIS-SUBSTITUTED OXETANE MONOMERS

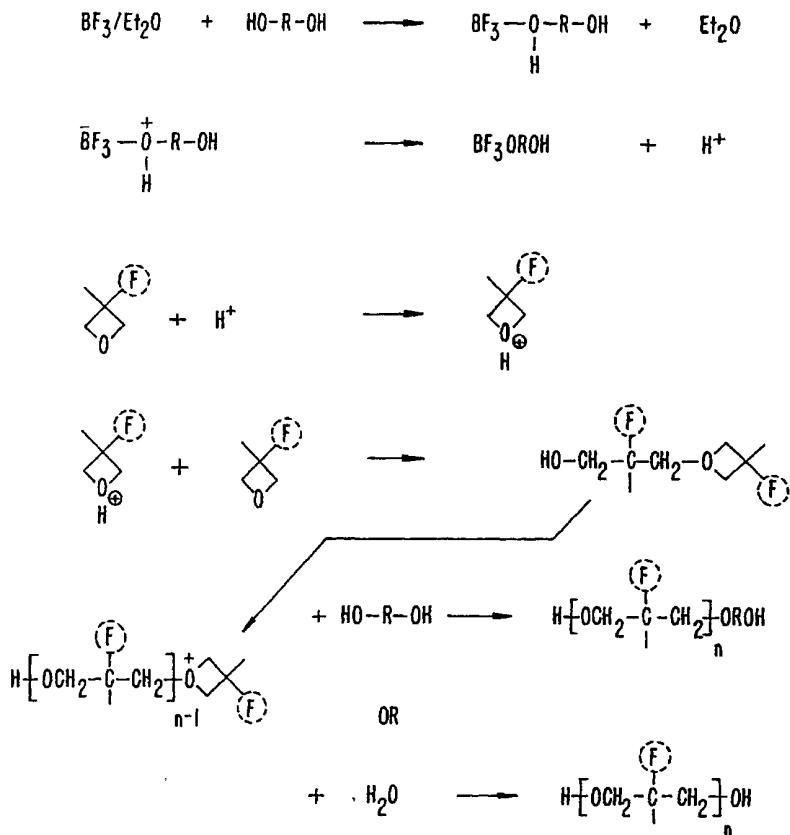

(57) Abstract: This invention is directed to mono- and bis-substituted oxetane monomers having fluorinated alkoxymethylene side chains, hydroxy-terminated prepolymers derived from these mono- and bis-substituted oxetane monomers and tetrahydrofuran (THF), and polymers produced from these prepolymers, as well as the synthesis processes associated with each, and the use of the monomers, prepolymers and ultimate polymers, both directly and as components of numerous compositions.

WO 01/05871 A1



NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- *With international search report.*
- *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

AMORPHOUS POLYETHER GLYCOLS BASED ON BIS-SUBSTITUTED OXETANE MONOMERS

FIELD OF INVENTION

The present invention relates generally to amorphous polyether glycols based on bis-substituted oxetane monomers. More particularly, the present invention relates to hydroxy-terminated prepolymer compositions and to the polymers derived therefrom, oxetane monomers having bis-substituted pendant fluorinated 5 alkoxyethylene groups as the prepolymer precursors, methods for preparing the precursor monomers and methods for polymerizing the prepolymers to form fluorinated elastomers. The hydroxyterminated prepolymers have a polyether backbone and are useful, *inter alia*, for the preparation of elastomers, thermoset plastics and coatings. 10 These compositions exhibit hydrophobic properties, very low surface energies, low glass transition temperatures, low dielectric constants, high abrasion resistance and tear strength, low coefficient of friction, high adhesion and low refractive indices.

BACKGROUND OF THE INVENTION

Fluorinated polymers enjoy widespread use as hydrophobic, oleophobic 15 coatings. These materials exhibit excellent environmental stability, high hydrophobicity, low surface energy and a low coefficient of friction, and are used in a number of applications ranging from nonstick frying pans to optical fiber cladding. Most fluoropolymers, however, are plastics that are difficult to process, difficult to apply and are unsuitable as coatings for flexible substrates due to their high rigidity. One example 20 of a widely used fluorinated material is TEFLONTM, a polytetrafluoroethylene. TEFLONTM is difficult to process in that it is a rigid solid that must be sintered and machined into its final configuration. Commercial application of TEFLONTM as a coating is complicated by its poor adhesion to substrates and its inability to form a continuous film. As TEFLONTM is insoluble, application of a TEFLONTM film involves 25 spreading a thin film of powdered TEFLONTM onto the surface to be coated and, thereafter, the powdered TEFLONTM is sintered in place resulting in either an incomplete film or a film having many voids. As TEFLONTM is a hard inflexible plastic, a further limitation is that the substrate surface must be rigid, otherwise the TEFLONTM will either crack or peel off.

A limited number of commercial fluoropolymers, such as Viton, possess elastomeric properties. However, these materials have relatively high surface energies (as compared to TEFLONTM), poor abrasion resistance and tear strength, and their glass transition temperatures are still high enough (greater than 0°C for Viton) to significantly limit their use in low-temperature environments.

Accordingly, there is a need for fluoroelastomers having hydrophobic properties, surface energies and coefficients of friction at least equivalent to the fluorinated plastics (such as TEFLONTM). Further, such fluoroelastomers must have high adhesion, high abrasion resistance and tear strength, low index of refraction and low glass transition temperatures so that they are suitable for any foreseeably low temperature environmental use. In addition, there is a need for fluoroelastomers that are easily produced in high yields and easy to use.

The most important criteria in the development of release (*i.e.*, nonstick), high lubricity coatings is the minimization of the free surface energy of the coating. Free surface energy is a measure of the wettability of the coating and defines certain critical properties, such as hydrophobicity and adhesive characteristics of the material. For most polymeric surfaces, the surface energy can be expressed in terms of the critical surface tension of wetting γ_C . For example, the surface energy of TEFLONTM (represented by γ_C) is 18.5 ergs/cm², whereas that of polyethylene is 31 ergs/cm². Consequently, coatings derived from TEFLONTM are more hydrophobic and nonstick than those derived from polyethylene. A substantial amount of work has been done by the coating industry to develop coatings having surface energies lower than or comparable to TEFLONTM, while at the same time exhibiting superior adhesion characteristics.

The literature teaches that in order to prepare coatings having the desirable low surface energy, the surface of the coating must be dominated by -CF₃ groups. Groups such as -CF₂-H and -CFH₂ increase the surface energy of the material. The importance of the number of fluorine atoms in the terminal group (*i.e.*, the group present on the surface) was demonstrated by Zisman, *et al.*, *J. Phys. Chem.*, 57:622 (1953); Zisman, *et al.*, *J. Colloid Sci.*, 58:236 (1954); and Pittman, *et al.*, *J. Polymer Sci.*, 6:1729 (1968). It was found that materials with terminal -CF₃ groups exhibited surface energies in the neighborhood of 6 ergs/cm², whereas similar materials with terminal -CF₂H groups exhibited values in the neighborhood of 15 ergs/cm², *i.e.*, more than twice the value for the material with terminal -CF₃ groups. TEFLONTM incorporates the fluorine moieties on

the polymer backbone and does not contain pendant $-CF_3$ groups. Consequently, TEFLONTM does not exhibit surface energies as low as polymers having terminal perfluorinated alkyl side chains.

A critical requirement in the production of an elastomer is that the 5 elastomer have large zones, or "soft segments," where little or no crosslinking occurs and where the polymer conformation is such that there is little or no compaction of the polymer as a result of crystallization. Intermediate of these soft zones are "hard blocks," where there may be significant hydrogen bonding, crosslinking and compaction of the polymer. It is this alternating soft block and hard block that give the polymer its 10 elastomeric properties. The longer the soft segment, the more elastic the elastomer.

Falk, *et al.* (U.S. Patent No. 5,097,048) disclose the synthesis of bis-substituted oxetane monomers having perfluoro-terminated alkyl group side chains from bis-haloalkyl oxetanes, the glycols having perfluoro-terminated alkyl group side chains derived therefrom, including related thiol and amine linked glycols and dimer diols. Most 15 of the fluorinated side chains are attached to the glycol unit by a thio, an amine or a sulfonamide linkage. Only a few examples describe glycols having perfluoro-terminated alkoxyethylene side chains; however, such glycols are crystalline materials.

Falk, *et al.* (EP 03 48 350) report that their process yields perfluoro-terminated alkoxyethylene neopentyl glycols composed of a mixture of (1) 20 approximately 64% of a bis-substituted perfluoro-terminated alkyl neopentyl glycol, and (2) approximately 36% of a mono-substituted perfluoro-terminated alkyl neopentyl glycol product with a pendant chloromethyl group. Evidently, the mono-substituted product results from incomplete substitution of the second chloride on the bis-chloroalkyl oxetane starting material. Consequently, as noted from the Zisman and Pittman work described 25 above, the presence of the $-CH_2Cl$ as a side chain significantly increases the surface energy of the coatings made from these polymers, thereby reducing the hydrophobicity and oleophobicity of the coatings.

Falk, *et al.* (U.S. Pat. No. 5,045,624) teaches preparation of dimers with 30 fluorinated side chains having thio linkages, but not of dimers with fluorinated ether side chains. This is because the synthesis route used by Falk, *et al.* for preparing dimers with thio linkages cannot be used for the synthesis of dimers with ether linkages. In other words, Falk, *et al.* do not teach preparation of long chain polyethers with fluorinated ether side chains.

Falk, *et al.* (U.S. Patent No. 4,898,981) teaches incorporation of their bis-substituted glycols into various foams and coatings to impart the desired hydrophobicity and oleophobicity. Classic polyurethane chemistry shows that while a plastic may form by reaction of Falk's glycols with diisocyanates, elastomers cannot form since there is no 5 long chain soft segment. Such a soft segment is needed for the formation of an elastomer. Since the compounds of Falk, *et al.* are only one or two monomer units long, they are clearly too short to function as a soft segment for the formation of a polyurethane elastomer. In Falk, *et al.*, the fluorinated glycol and isocyanate segments alternate, with the fluorinated glycol segments, being nearly the same size as the isocyanate segments. It 10 is well known to those of skill in the art that such a polymer structure will not yield elastomers.

None of the Falk, *et al.* references teach or show a homoprepolymer or coprepolymer made from bis-perfluoro-terminated alkoxyethylene oxetanes, nor polyurethanes derived therefrom or from the corresponding glycols. All of their 15 polyurethanes are made directly from the thiol-linked monomers and dimers and not via a prepolymer intermediate. In the examples provided in Falk, *et al.* (U.S. Patent No. 5,045,624), particularly where the perfluoro-terminated side chains are large and for all of the dimers, all have thiol linkages, *i.e.*, no ether side chains are shown. The polyurethanes disclosed by Falk, *et al.* (U.S. Patent No. 4,898,981) are made from the 20 perfluoro-terminated alkylthio neopentyl glycol. However, Falk, *et al.* (U.S. Patent No. 5,097,048) in Example 12, show a polyether prepolymer prepared from a bis-substituted perfluoroalkylthio oxetane. The prepolymer obtained was a white waxy solid, clearly not an elastomer. No characterization as to the nature of the end groups, polydispersity, equivalent weights, etc. of the waxy solid was given. Absent such a characterization, it is 25 unknown whether the material of Falk, *et al.* may be further reacted with an isocyanate to produce a polyurethane polymer. No examples of the preparation of a polymer from any prepolymer is given.

Vakhlamova (*Chem. Abst.* 89:110440p) teaches the synthesis of oxetane compounds substituted at the number 3 carbon of the oxetane with -CH₂O-CH₂-CF₂-CF₂-H groups. The terminal alkyl portion of this substituent is thus: -CF₂CF₂-H, wherein the terminal or omega carbon bears a hydrogen atom. As discussed above, the Zisman and Pittman work shows that the presence of the hydrogen significantly increases the surface energy of the polymer derived from these monomers. Falk, *et al.* (U.S. Patent No. 30 5,097,048) also recognizes that surface energy increases with the hydrogen atom on the

terminal carbon by stating that “fluoroalkyl compounds which are terminally branched or contain omega-hydrogen atoms do not exhibit efficient oil repellency.” Further, Vakhlamova focuses on the bis-substituted monomer as he hydrolyzes the monomer and then polymerizes the resultant monomeric glycol.

5 A characteristic of the polymers formed from the polymerization of the bis-substituted oxetanes of Falk, *et al.*, and the other proponents of bis-substituted oxetanes is that the resulting products are crystalline solids. The bis-side chains are highly ordered and symmetric. Consequently, they pack efficiently to form a crystalline structure. For example, a prepolymer prepared from 3,3-bis-(chloromethyl)oxetane is a
10 crystalline solid that melts in the neighborhood of 220°C. This significantly affects the commercial use of these polymers since either or both mixing and elevated temperatures will be required in order to dissolve or melt the Falk, *et al.* polymer for further polymerization or application.

As such, to date, the polymerization of the bis-substituted perfluorinated
15 alkoxyethylene oxetanes has not resulted in useful materials. The polymers derived from the bis-substituted perfluoroalkylthiol oxetanes are waxy solids and will not function as a soft segment in the preparation of commercially useful elastomers and coatings. Further, the ability of a bis-substituted oxetane monomer to homopolymerize appears to be dependent upon the nature of the side chain at the 3-carbon with no
20 assurance that polymerization will occur, the difficulty of polymerization apparently being due to the steric interference by the side chains. Polymerization, and the products of polymerization, of the bis-substituted monomer accordingly are unpredictable and inconsistent.

U.S. Patent Nos. 5,654,450, 5,668,251, 5,650,483, 5,668,250 and
25 5,703,194, all of which have issued to Malik, *et al.*, disclose fluorinated elastomers and a production strategy therefor, beginning with a premonomer production process that is easy and inexpensive, to produce an asymmetrical mono-haloalkyl methyl oxetane premonomer, which upon further reaction produces an oxetane monomer having a single fluorinated side chain, which mono-substituted fluorinated monomer is capable of
30 homopolymerization and copolymerization to produce an essentially non-crosslinked soft segment, difunctional, linear, asymmetric prepolymer for further reaction to produce fluorinated elastomers and thermoset plastics, resins and coatings having hydrophobic properties, low surface energy, very low glass transition temperatures, low dielectric


constants, high abrasion resistance and tear strength, high adhesion and low refractive indices.

The contributions of U.S. Patent Nos. 5,654,450, 5,668,251, 5,650,483, 5,668,250 and 5,703,194 have resulted in very useful fluorinated elastomers and methods 5 for their preparation. However, it would be advantageous if bis-substituted fluorinated oxetane monomers could be homopolymerized and copolymerized to produce essentially non-crosslinked, difunctional, linear, asymmetric prepolymers that, in turn, could be further reacted to produce fluorinated elastomers and thermoset plastics, resins and 10 coatings having useful properties, a goal which researchers have not yet achieved despite great efforts in this area. The present invention achieves this and other goals.

SUMMARY OF THE INVENTION



Prior to the present invention, the use of bis-substituted fluorinated oxetane monomers (*i.e.*, bis-substituted FOX monomers) in the synthesis of fluoroelastomers has been limited due to the highly crystalline nature of the polymer 15 formed from these symmetrical monomers. However, it has been discovered that this problem can be overcome by copolymerizing the bis-substituted fluorinated oxetane monomers with mono-substituted fluorinated oxetane monomers and/or nonfluorinated oxetane monomers, such as tetrahydofuran (“THF”), to produce amorphous polyether glycols. Such glycols can be incorporated into a polymer matrix to produce an elastomer 20 which, in turn, can be used for a variety of applications including, for example, anti-graffiti coatings, wall paper coatings, automotive coatings, fouling release coatings for ship hulls, pyrotechnic applications, etc. In addition to lowering the cost of the raw materials, the present invention provides materials having higher amounts of fluorine at the surface, thereby increasing the performance characteristics of poly(FOX) coatings.

25 As such, in one aspect, the present invention provides hydroxy-terminated polyether prepolymers having asymmetric, alkoxyethylene side chains with terminal perfluorinated alkyl groups. In one embodiment, the prepolymers comprise a monomeric unit having the following general formula:

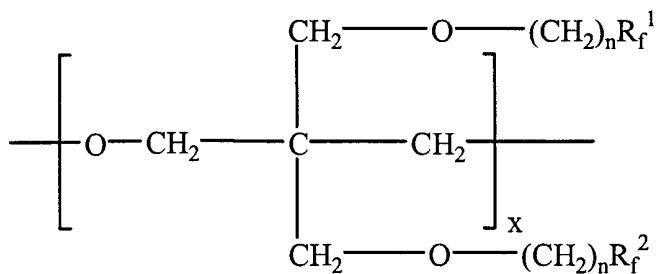

In the above formula, each n is independently selected and is 1 to 3; R_f^1 and R_f^2 are independently selected from the group consisting of linear perfluorinated alkyls, linear perfluorinated isoalkyls, branched chain perfluorinated alkyols, branched perfluorinated isoalkyls, the perfluorinated alkyls and isoalkyls having from 1 to about 20 carbon atoms, and oxaperfluorinated polyethers having from 4 to about 60 carbon atoms; and x is 1 to about 250 and, more preferably, 2 to about 100. It is noted that R_f^1 and R_f^2 are selected so that they are different and have a more or less random placement along the prepolymer chain.


10 In another embodiment, the prepolymers comprise a mixture of monomeric units have the following general formulae:

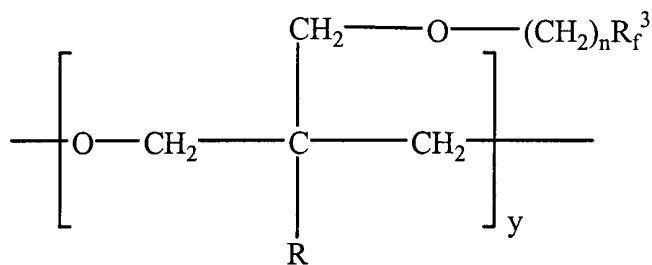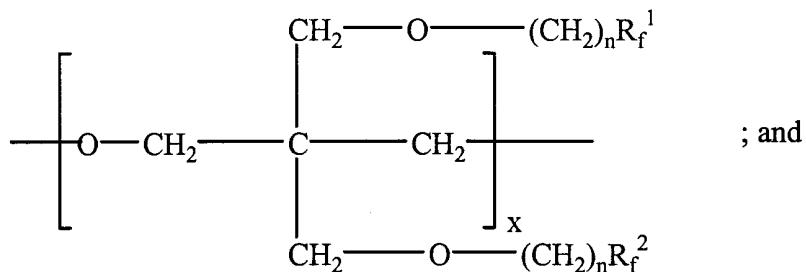

In the above formula, each n is independently selected and is 1 to 3; R is selected from the group consisting of methyl and ethyl; R_f^1 , R_f^2 and R_f^3 are independently selected from the group consisting of linear fluorinated alkyls, linear fluorinated isoalkyls, branched chain fluorinated alkyls, branched fluorinated isoalkyls, the fluorinated alkyls and isoalkyls having from 1 to 20 carbon atoms, and oxaperfluorinated polyethers having from 4 to about 60 carbon atoms; x is about 1 to about 250 and, more preferably, 2 to about 100; and y is about 1 to about 250 and, more preferably, 2 to about 100. Typically,


the ratio of di- to mono-substituted monomers, *i.e.*, the ratio of x to y, is from about 95:5 to about 5:95, more preferably about 70:30 and, even more preferably, about 50:50, with a DP of about 1 to about 250 and, more preferably, of about 5 to about 100.

In another aspect, the present invention provides a hydroxy-terminated 5 polyether coprepolymer having alkoxyethylene side chains with terminal perfluorinated alkyl groups and a backbone composed of FOX monomer segments and of tetrahydrofuran (THF) segments. In one embodiment, the FOX/THF coprepolymer comprises a mixture of monomeric units having the following general formulae:

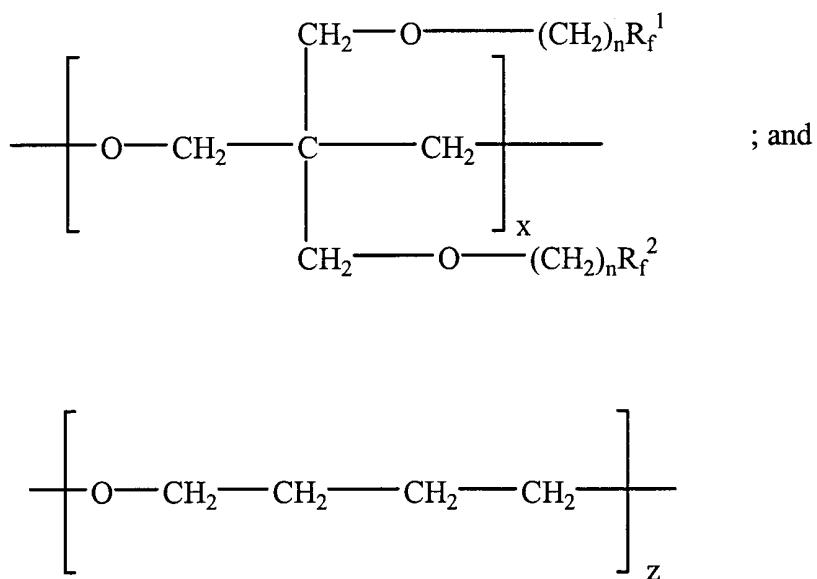

10 In the above formulae, n is independently selected and is 1 to 3; R_f^1 and R_f^2 are independently selected from the group consisting of linear perfluorinated alkyl groups having 1-20 carbons, branched perfluorinated alkyl groups having 1-20 carbons and oxaperfluorinated polyethers having from about 4-60 carbons; x is about 1 to about 250 and, more preferably, 2 to about 100; and z is about 1 to about 250 and, more preferably, 15 1 to 100. Typically, the ratio of di- to mono-substituted monomers, *i.e.*, the ratio of x to z, is from about 1:99 to about 99:1, with a DP of about 1 to about 250 and, more preferably, of about 5 to about 100. Moreover, typically, the molecular weight (M_n) of the FOX/THF coprepolymer ranges from about 2,000 to about 50,000 and, more preferably, from about 2,000 to about 15,000; and the T_g is less than -20°C.



20 In another embodiment, the FOX/THF coprepolymer of the present invention comprise a mixture of monomeric units having the following general formulae:

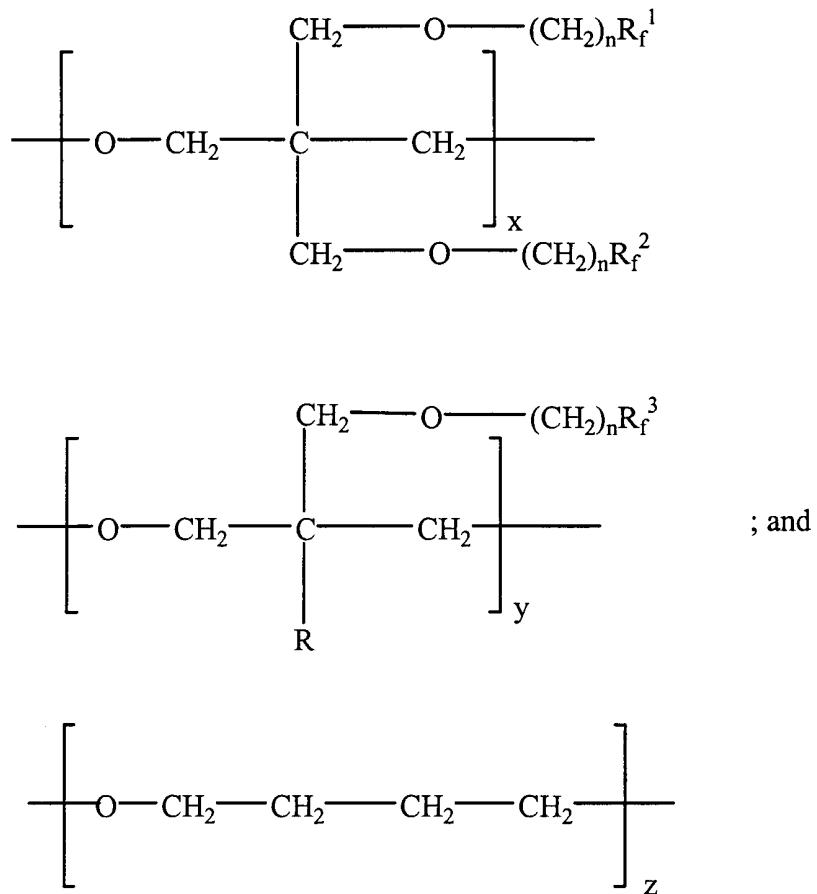


In the above formulae, each n is independently selected and is 1 to 3; R is selected from the group consisting of methyl and ethyl; R_f^1 , R_f^2 and R_f^3 are independently selected from the group consisting of linear perfluorinated alkyl groups having 1-20 carbons, branched perfluorinated alkyl groups having 1-20 carbons and oxaperfluorinated polyethers having from about 4-60 carbons; x is 1 to about 250 and, more preferably, 2 to about 100; y is 1 to about 250 and, more preferably, 2 to about 100; and z is 1 to about 250 and, more preferably, 1 to about 100. Typically, such FOX/THF copolymers have a DP of about 1 to about 250 Moreover, typically, the molecular weight (M_n) of the FOX/THF copolymers ranges from about 2,000 to about 50,000 and, more preferably, from about 2,000 to about 15,000; and the T_g is less than -20°C.

The foregoing prepolymers and copolymers can be used, *inter alia*, as components in coating compositions, resins, lubricants and oils, which impart hydrophobic properties, low surface energies, low coefficient of friction, very low glass transition temperatures, low dielectric constants, high abrasion resistance and tear strength, high adhesion and low refractive indices to such coating, resins, lubricants and oils.


In another aspect, the present invention provides fluorinated elastomers and thermoset plastics having fluorinated alkoxyethylene side chains and having good hydrophobic properties, low surface energies, very low glass transition temperatures, low dielectric constants, high abrasion resistance and tear strength, high adhesion and low refractive indices. In one embodiment, the fluorine-containing thermoplastic polyurethane elastomer of this invention comprises a mixture of monomeric units having the following general formulae:

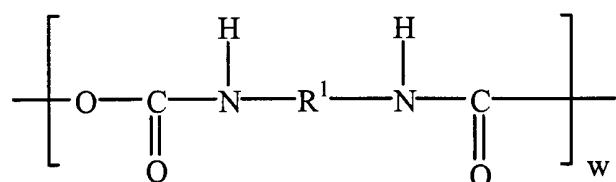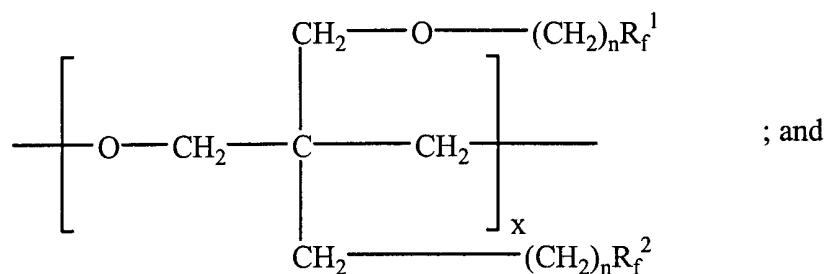

In the above formula, n is independently selected and is 1 to 3; R_f^1 and R_f^2 are independently selected from the group consisting of linear and branched perfluorinated alkyls having 1-20 carbon atoms, and oxaperfluorinated polyethers having from about 4-20 carbon atoms; R^1 is a divalent hydrocarbyl radical; x is 1 to about 250 and, more preferably, 2 to about 100; and w is 1 to about 50 and, more preferably, 1 to about 5. It is noted that R_f^1 and R_f^2 are selected such that they are different. Examples of suitable divalent hydrocarbyl radicals include, but are not limited to, the following structures:

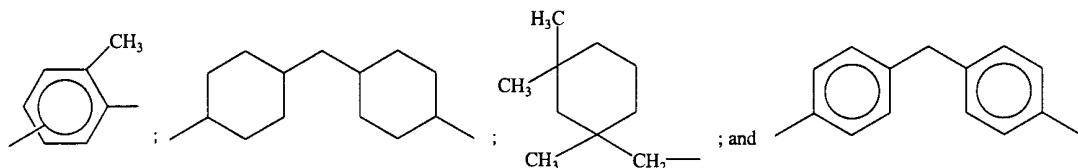

In another embodiment, the fluorine-containing thermoplastic polyurethane elastomer of this invention comprises a mixture of monomeric units having
20 the following general formulae:

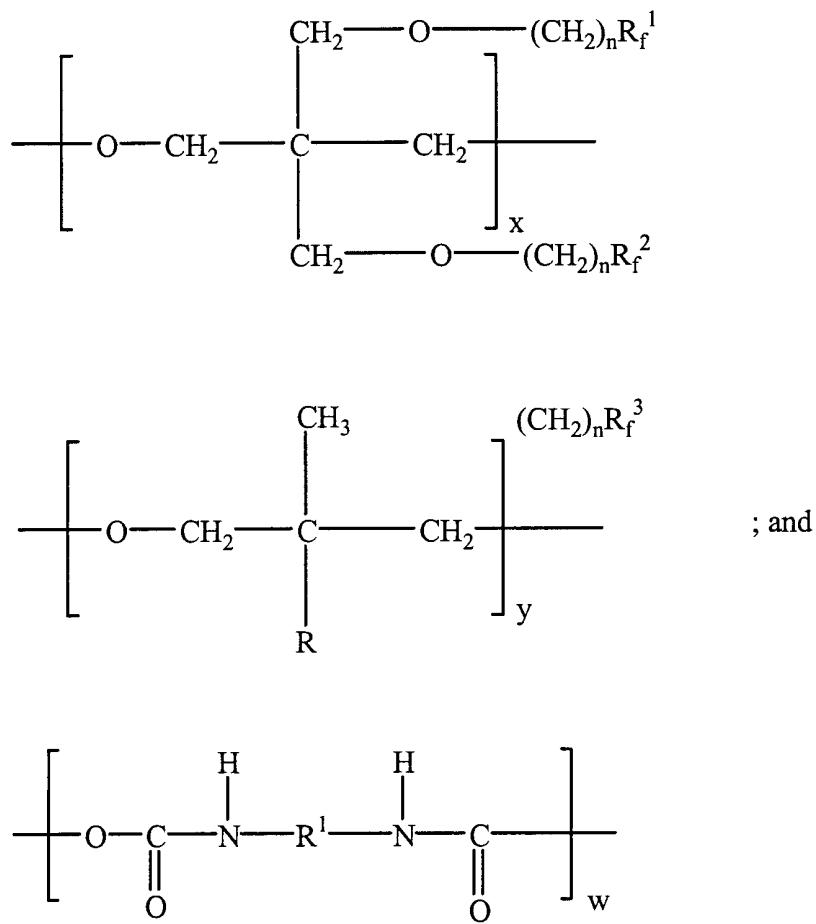

In the above formula, n is independently selected and is 1 to 3; R is selected from the group consisting of methyl and ethyl; R_f^1 , R_f^2 and R_f^3 are independently selected from the group consisting of linear and branched perfluorinated alkyls having 1-20 carbon atoms, and oxaperfluorinated polyethers having from about 4-20 carbon atoms; R^1 is a divalent hydrocarbyl radical; x is 1 to about 250 and, more preferably, 2 to about 100; y is 1 to about 250 and, more preferably, 2 to about 100; and w is 1 to about 50 and, more preferably, 1 to about 5.

The fluorinated elastomers and plastics of the present invention are useful as fouling and ice release coatings, drag reduction coatings, moisture barrier coatings; catheters; artificial prosthesis components, such as joints, hearts, and valves; contact lenses; intraocular lenses; films, paints; adhesives; nontransfer cosmetics; water repellent coatings; oil/stain resistant coatings; incendiary binders; lubricants, and the like.

In addition, the present invention provides the synthesis processes
15 associated with the monomers, prepolymers and polymer compositions, and the use of the
monomers, prepolymers and ultimate polymers, both directly and as components of
numerous compositions.

Other features, objects and advantages of the invention and its preferred embodiments will become apparent from the detailed description which follows.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a summary of the polymerization reaction of FOX monomers by 5 cationic ring-opening reaction.

DEFINITIONS

“Aprotic Solvent,” as used herein, refers to a solvent that does not donate a proton.

“BrMMO,” as used herein, refers to 3-bromomethyl-3-methyloxetane.

10 “Contact Angle,” as used herein, refers to the obtuse or internal angle between the surface of a liquid and the surface of an object in contact with the liquid. A high contact angle corresponds to high hydrophobicity.

15 “FOX Copolymerization,” as used herein refers to the reaction of a FOX monomer with either a different FOX monomer or a nonfluorinated monomer to produce a FOX coprepolymer.

“DSC,” as used herein, is the acronym for a differential scanning calorimeter, a device used for determining a compounds glass transition temperature.

20 “Elastomer,” as used herein, refers to a polymeric material, such as rubber, which can be stretched under low stress to at least twice its original length and, upon immediate release of the stress, will return with force to its approximate original length.

“FOX,” as used herein, is the acronym for Fluorinated OXetane. As used in the disclosure of this invention the term “FOX” is normally preceded by a number; e.g., 3-FOX, 7-FOX, etc. The numerical designation indicates the number of fluorine moieties on the single fluorinated side chain on the 3-carbon of the FOX monomer.

25 “GLC,” as used herein, is the acronym for gas-liquid chromatography. A device and method used as a separation technique to determine purity and percent conversion of the starting materials.

“GPC,” as used herein, is the acronym for gel permeation chromatography. A device and method used to determine molecular weight.

30 “HMMO,” as used herein, is the acronym for 3-hydroxymethyl-3-methyloxetane, an intermediate in the production of the arylsulfonate oxetane premonomer.

“FOX Homopolymerization,” as used herein, refers to the reaction of a FOX monomer with itself to produce a FOX homopolymer.

“Hydrophobicity,” as used herein, refers to the degree to which a substance lacks an affinity for, or repels, or fails to absorb water.

5 “Lewis Acid,” as used herein, refers to a substance that can accept an electron pair from a base. For example, AlCl₃ and BF₃ are Lewis acids.

10 “Mono-substituted Oxetane,” as used herein, refers broadly to a non-bis substituted oxetane compound. More specifically, it refers to the premonomers (e.g., 3-halomethyl-3-methyloxetane) and FOX monomers of this invention where the 3-carbon of the oxetane ring is substituted with only one fluorinated side chain and the other 3-carbon side group is a nonfluorinated moiety, e.g., a methyl or ethyl group.

15 “Bis-substituted Oxetane,” as used herein, refers broadly to a non-mono substituted oxetane compound. More specifically, it refers to the premonomers (e.g., 3,3-bis-halomethyloxetane) and FOX monomers of this invention where the 3-carbon of the oxetane ring is substituted with two fluorinated side chains. It is important to note that the two fluorinated side chains can be the same or different.

“FOX Monomer,” as used herein, refers to a mono-substituted or bis-substituted fluorinated oxetane or FOX.

20 “Phase Transfer Catalyst,” as used herein, refers to a catalyst that effectuates or mediates reactions in a dual-phase heterogeneous reaction mixture.

“FOX Premonomer,” as used herein, refers to the 3-haloalkane-3-methyloxetane compounds or the 3,3-bis-haloalkaneoxetane compounds that, upon reaction with fluorinated alkoxides, yields the FOX monomers of this invention.

25 “FOX Prepolymer,” as used herein, refers to a hydroxy terminated, polyether oligomer comprising from about 1 to about 250 FOX or FOX/THF monomer units which, upon reaction with a polyisocyanate, will yield polyurethane elastomers.

“Tetrahydrofuran,” as used herein, refers to the commercially available 5-membered cyclic ether, which is abbreviated THF.

30 “TME,” as used herein, is the acronym for 1,1,1-tris(hydroxymethyl)ethane, the starting material for the BrMMO premonomer synthesis.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

A. GENERAL OVERVIEW

This invention is directed to mono- and bis-substituted oxetanes monomers having fluorinated alkoxyethylene side chains, hydroxy-terminated prepolymers derived from these monomers and tetrahydrofuran (THF), and polymers produced from these prepolymers, as well as the synthesis processes associated with each, and the use of the monomers, prepolymers and ultimate polymers, both directly and as components of numerous compositions.

The monomers, polyether hydroxy-terminated prepolymers and resulting compositions thereof are particularly useful for the preparation of polyurethane elastomers, thermoset plastics and coatings that exhibit a wide variety of useful properties including, *inter alia*, hydrophobic properties, low surface energies, low glass transition temperatures, low dielectric constants, high abrasion resistance and tear strength, low coefficients of friction, high adhesion and low refractive indices. More particularly, examples of the ways in which the incorporation of fluorine into a polymer can alter the properties of the resulting polymer are set forth below.

1. Thermal stability is increased, thereby extending the upper use temperature of the polymer and allowing these materials to be processed at higher temperatures without degradation and, thus, making them suitable for use in environments where other hydrocarbon based polymers cannot be used.
2. Surface energy is decreased, thereby improving the release characteristics of the polymer making it suitable for use as backings for adhesive tapes, as release coatings for molds, as fouling release coatings for ship hulls, and the like.
- 25 3. Refractive index of the resulting polymer is reduced, thereby making it useful for optical applications, such as contact lenses, intraocular lenses, coatings for optical instruments, cladding for optical fibers, and the like.
4. Coefficient of friction is reduced, thereby improving the lubricity of the coating making it useful in applications such as vehicle seals, windshield wipers, drag reducing coatings for sail boats, airplanes, etc.
- 30 5. Hydrophobicity is increased, thereby improving water repellency and moisture barrier characteristics making the polymer useful for encapsulating electronic devices and as moisture barrier films and coatings, rain erosion coatings, anticorrosion coatings, etc.
- 35 6. Oleophobicity is increased, thereby making the polymer oil repellent and, thus, useful as a stain resistant coating for garments and carpets.

7. Flammability is decreased, thereby improving flame retardency, for example, on garments coated with the polymer.
8. Environmental stability of the polymer is improved, thereby making the polymer more stable when exposed to ultraviolet light and moisture.

5 As a result of the above beneficial properties, a major application of the polymers of the present invention is for nonstick coatings as a result of the fact that the adhesion properties of the polymers of this invention are better than TEFLONTM, the surface energy is lower, application is easier, and the applied film is flexible with good abrasion resistance and tear strength, thereby permitting application to both flexible and

10 rigid surfaces. Example of suitable applications include, but are not limited to, anti-fouling coatings, ice release coatings, flexible optical fiber cladding, conduit and aqueduct coatings or linings, surface coatings, anti-graffiti coatings, automotive top-coat compositions (*e.g.*, car wax), particularly at low temperatures due to low glass transition temperatures on the order of - 40°C to - 50°C. The low index of refraction and good

15 oxygen permeability, coupled with the optical clarity of some of the elastomers produced from the prepolymers, make them useful for contact lenses and intraocular lenses. Of course, other uses for elastomers are well known to those of skill in the art, and the improved properties of the elastomers of this invention permit an even wider range of uses.

20 Bis-substituted, either symmetrically or asymmetrically substituted, are used to produce homo- or copolymers characterized as non-crosslinked, asymmetrical, hydroxy-terminated, linear oligomers having from about 10 to about 500 carbons and, more preferably, from about 20 to about 200 carbons, *i.e.*, FOX prepolymers. These prepolymers are crucial to the production of fluorinated elastomers in that they

25 substantially retain their integrity in subsequent polymerizing reactions (*e.g.*, reactions with diisocyanates or polyisocyanates) to provide the soft segment blocks of the resulting polymers which, in combination with the hard blocks formed during polymerization, produce good elastomers. Although prior to the present invention there was no showing of copolymerization of the bis-substituted FOX monomers with either mono-substituted

30 FOX monomers or other cyclic ethers to produce prepolymers containing soft segment required for production of elastomers, the processes of the present invention readily polymerize bis-substituted FOX monomers with both mono-substituted FOX monomers and other cyclic ethers. The reaction mechanism of the processes of the present invention

produce prepolymers from mono- and bis-substituted FOX monomers and other cyclic ethers (e.g., THF) in high yields.

Although the copolymers composed of bis-substituted/mono-substituted FOX comonomers and of FOX/THF comonomers contain fewer fluorine 5 moieties than bis-substituted prepolymers, they surprisingly produce polymers that have similar surface energies to a polymer derived from prepolymers having two fluorinated side chains. Further, even though the FOX/THF prepolymers of the present invention contain less fluorine than the FOX prepolymers of the present invention, the elastomers produced from the FOX/THF prepolymers surprisingly exhibit surface and physical 10 properties comparable to the elastomers produced from the FOX prepolymers.


In addition, a polymerization process has been discovered that virtually eliminates the formation of undesirable by-products. The presence of nonfunctional or monofunctional materials in the prepolymers result in coatings with poor mechanical and surface properties. Consequently, these coatings have limited commercial value.

15 Nonfunctional materials, mainly cyclic tetramers and trimers, are formed during the ring opening polymerization from chain "back-biting." Monofunctional materials, on the other hand, are formed due to counter-ion terminations, such as diethyl ether and fluoride ion terminations. The processes of this invention are unique in their lack of by-product production. Using the methods of the present invention, production of cyclic tetramers 20 and monofunctional prepolymers are virtually eliminated.

B. MONOMERS


1. Preparation of Mono- and Bis-Substituted FOX Monomers

The mono- and bis-substituted fluorinated alkyloxy-3-methyloxetane monomers of this invention have the following general formula:

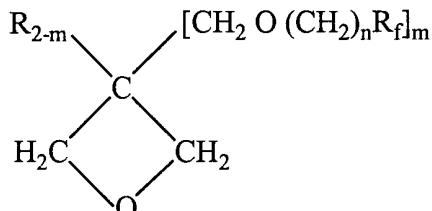


In the above formula, n is 1 to 3, m is 1 (for mono-substituted) or 2 (for bis-substituted), R is methyl or ethyl, and R_f is a linear or branched chain fluorinated alkyl and isoalkyl having from 1 to 20 carbons, or an oxaperfluorinated polyether having from 4 to about 60 carbons.

The FOX monomers of this invention are obtained by reaction of aryl sulfonate derivatives of 3-hydroxymethyl-3-methyloxetanes (arylsulfonate-MO), 3,3-hydroxymethyloxetanes (arylsulfonate-BO) or the reaction of mono-substituted 3-haloalkyl-3-methyloxetanes or bis-substituted 3,3-(haloalkyl)oxetanes with fluorinated alkoxides in the presence of a polar aprotic solvent:

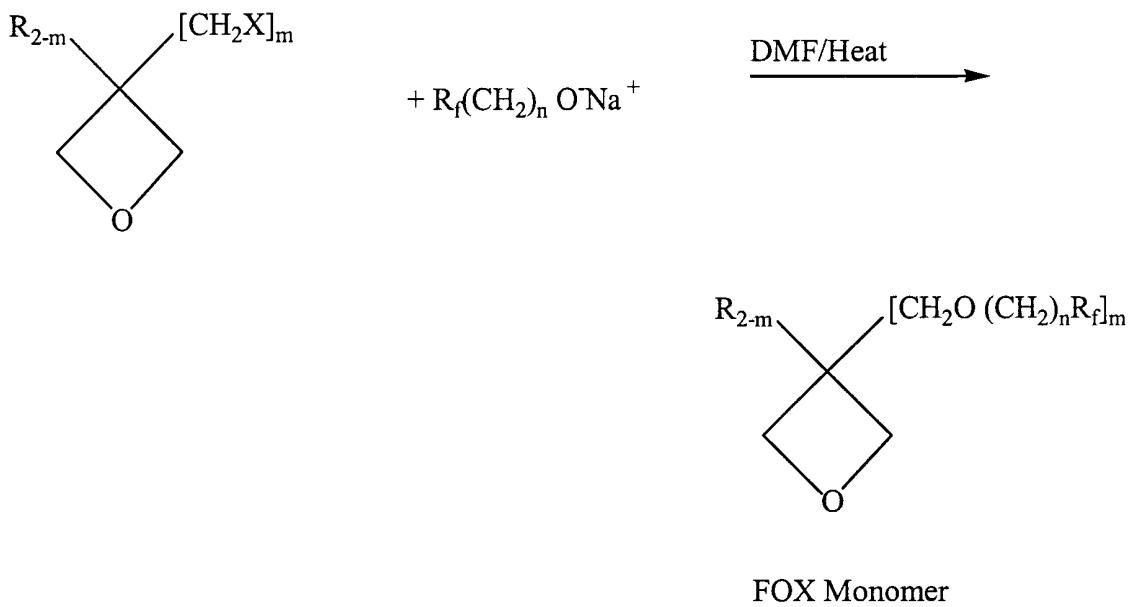


In the above formula, R_f is linear or branched chain perfluorinated alkyl or isoalkyl having from 1 to 20 carbons, or an oxaperfluorinated polyether having from 4 to about 60 carbons; and $X = Br, Cl, I$ or an aryl sulfonate. Examples of suitable R_f groups include, but are not limited to, $-CF_3, -C_2F_5, -C_3F_7$ and $-C_7F_{15}$. It is noted that the numeric FOX designation is determined by the number of fluorine atoms in the terminal perfluoroalkyl group of the side chain.

The aryl sulfonate derivatives of the hydroxyalkyloxetanes have the general formula:

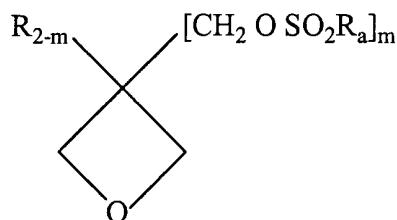

In the above formula, m is 1 (for mono-substituted) or 2 (for bis-substituted), R_a is a monocyclic aryl having from C₆ to C₁₀ carbons, e.g., benzyl, toyl, xylyl, mesityl or an alkyl, such as -CH₃ or -CF₃. The preferred sulfonates are toluene sulfonates, e.g., p-toluene sulfonate derivatives of 3-hydroxymethyl-3-methyloxetane (HMMO) or 3,3-hydroxymethyloxetane (BHMO).




5 The fluorinated alkoxides are obtained by the reaction of fluorinated alcohols with sodium hydride in a suitable solvent such as dimethylformamide:



The fluorinated alcohols which can be used have the general formula:



In the above formula, n is 1 to 3; and R_f is a linear or branched chain fluorinated alkyl or isoalkyl having from 1 to 20 carbons, or an oxaperfluorinated polyether having from 4 to about 60 carbons. Examples of suitable fluorinated alcohols include, but are not limited to, trifluoroethanol, heptafluorobutanol, pentadecafluoroctanol, tridecafluoroctanol, and 15 the like. Other useful alcohols include fluorinated alcohols having the following formulas:



In the above formulae, n is 1 to about 3, and x is 1 to about 20.

20 Although sodium hydride is the preferred base for this reaction, other bases, such as potassium hydride, potassium t-butoxide, calcium hydride, sodium hydroxide, potassium hydroxide, NaNH₂, n-butyl lithium and lithium diisopropylamide, can also be used. Moreover, although the preferred solvent for the formation of the alkoxide from these alcohols is dimethylformamide (DMF), other solvents, such as dimethylacetamide, DMSO and hexamethylene phosphoramide (HMPA), can also be 25 used.


The displacement reaction can be conducted at a temperature ranging from about 25°C to about 150°C and, more preferably, at a temperature ranging from about 75°C to about 85°C. At lower temperatures, the rate of displacement is slowed down

considerably and, thus, is only marginally useful for commercial scale-up. At higher temperatures, *i.e.*, greater than 120°C, the rate of displacement is extremely fast. However, at these higher temperatures, other side reactions, such as hydrolysis reactions, dominate. Thus, the preferred reaction temperature is less than 120°C.

5 It is noted that mono-substituted FOX monomers can advantageously be derived from the premonomer 3-bromomethyl-3-methyloxetane (“BrMMO”). The preparation of BrMMO and the use of this premonomer to prepare mono-substituted FOX monomers are disclosed in U.S. Patent No. 5,654,450, which issued to Malik, *et al.* on August 5, 1997, the teachings of which are incorporated herein by reference.

10 2. *Preferred Process for Synthesis of FOX Monomers*

A preferred process for preparing FOX monomers in high yields has been discovered that eliminates the use of organic solvents and strong bases, such as NaH. The elimination of organic solvents reduces hazardous waste generation and air emissions of volatile organic compounds. The process steps are as follows:

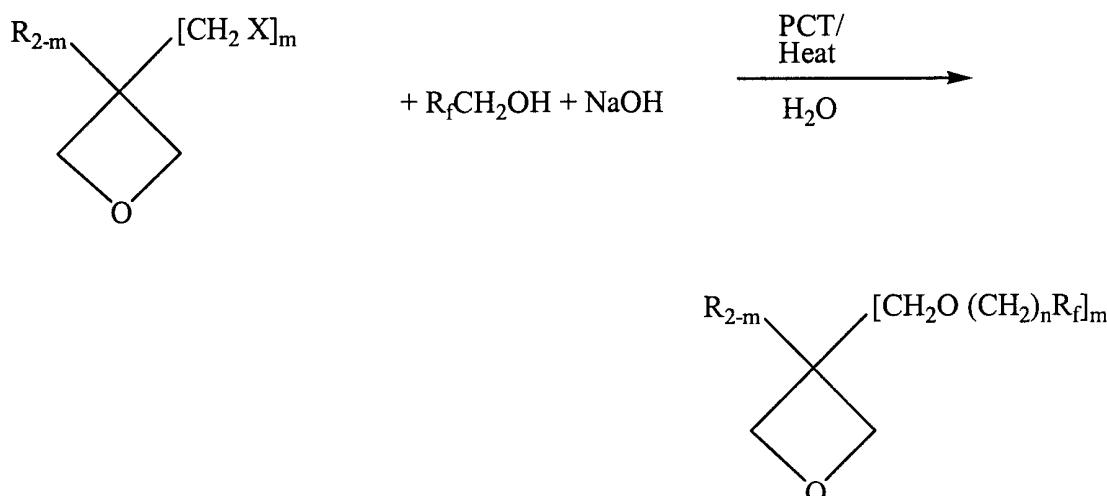

15

FOX Monomer

In the above reaction scheme, R_f is a linear or branched chain perfluorinated alkyl or isoalkyl having from 1 to 20 carbons, or an oxaperfluorinated polyether having from 4 to about 60 carbons; and X = Br, Cl or I.

20 In this process, a mixture of 3-haloalkyl-3-methyloxetane (for mono-substituted FOX monomers) or 3,3-(haloalky)oxetane (for bis-substituted FOX monomers), fluoroalcohol, a base, such as sodium hydroxide or potassium hydroxide, and a phase transfer catalyst are heated in an aqueous medium at a temperature of about 80° to about 85°C until GLC analysis reveals complete consumption of the starting materials.

Upon completion of the reaction, the product is recovered by separation and distillation of the organic phase. The organic phase contains most of the FOX monomer. The recovered FOX monomer is polymer grade and has a purity normally in excess of 99%. Isolated yields are high and range from about 80% to about 90% for the purified FOX monomer. Yields prior to separation and purification exceed 90% for the crude product.

5 A variety of bases can be used in the above process. Examples of suitable bases include, but are not limited to, sodium hydroxide, potassium hydroxide, calcium hydroxide, magnesium hydroxide, tetrabutylammonium hydroxide, etc. In a presently preferred embodiment, sodium hydroxide and potassium hydroxide are used because they 10 are readily available in large quantities and are relatively inexpensive.

Phase transfer catalysts function by transferring the counterion so that it is more soluble in the organic phase. A variety of phase transfer catalysts can be used in this process. Examples of suitable phase transfer catalysts include, but are not limited to, tetramethylammonium bromide, tetraethylammonium bromide, tetramethylammonium 15 iodide, cetyltributylammonium bromide, crown ethers, glycols, and the like. In a preferred embodiment, tetrabutylammonium bromide is the phase transfer catalyst used due to its relatively low cost and good solubility in both organic and aqueous mediums.

20 The above reaction can be conducted at temperatures as low as 50°C and as high as 120°C. However, at low temperatures, the rate of displacement is slowed and competing side reactions, such as hydrolysis, start to dominate. At higher temperatures, the rate of displacement is extremely fast, requiring specialized equipment that can handle pressure, thereby making the process uneconomical and unattractive for commercial scale-up.

C. PREPOLYMERS

25 The present invention provides the following types of prepolymers: homo-prepolymers where the prepolymer is assembled from only asymmetrically bis-substituted FOX monomer; coprepolymers where the prepolymer is assembled from a mixture of symmetrically bis-substituted FOX monomers and asymmetrically bis-substituted FOX monomers; coprepolymers where the prepolymer is assembled from a mixture of bis- 30 substituted FOX monomers (either symmetrically, asymmetrically substituted or a mixture thereof) and mono-substituted FOX monomers (or a mixture thereof); coprepolymers where the prepolymer is assembled from a mixture of bis-substituted FOX monomers (either symmetrically, asymmetrically substituted or a mixture thereof) and

tetrahydrofuran (THF); copolymers where the prepolymer is assembled from a mixture of bis-substituted FOX monomers (either symmetrically substituted, asymmetrically substituted or a mixture thereof) and mono-substituted FOX monomers (or a mixture thereof) and THF.

5 One of the main applications of the hydroxy-terminated FOX prepolymers is in the development of hydrophobic, nonstick, low friction materials. The most important criterion in preparation of these materials is the minimization of the surface energy, which is a measure of the wettability of the material and defines critical properties, such as its hydrophobicity and adhesive characteristics.

10 In order to prepare materials with low surface energies, it is critical that the fluoroalkyl groups be present in the side chain and that the terminal carbon of the fluoroalkyl groups be perfluorinated. The importance of having fluorine in the side chain, rather than in the polymer backbone, is demonstrated by comparing the surface energies of fluorinated polyacrylates and polytetrafluoroethylene (TEFLONTM). The surface 15 energy of TEFLONTM, which contains fluorine in the polymer backbone, is 18.5 ergs/cm². By comparison, the surface energy of polyfluoroacrylates, which contain fluorine in the side chains, is between 10-12 ergs/cm². Also, fluoroalkyl groups that contain hydrogen or halogen (*i.e.*, Cl, Br, I, etc.) on the terminal carbon have considerably higher surface energies than those with the -CF₃ groups. The dependence of surface 20 energy on the surface constitution of typical organic materials is illustrated in Table 1.

TABLE 1
SURFACE ENERGIES OF ORGANIC MATERIALS


SURFACE CONSTITUTION	ERGS/CM ² @ 20°C
-CF ₃ Close Packed	6
-CF ₂ H	15
-CF ₂ -	18
-CH ₃	22
-CH ₂ -	31
-CH ₂ CHCl-	39
Polyester	43

It has now been discovered that placing the fluorine in the side chain, rather than on the backbone as in TEFLONTM, improves surface lubricity, and the resulting prepolymer/elastomer exhibits a surface energy lower than a polymer having

fluorine just in the backbone. There is, however, a trade-off between having the fluorine on the side chain and having the fluorine on the backbone. More particularly, while an increase in lubricity is achieved by incorporating a fluorinated side chain, there is a reduction in thermal stability as compared to a polymer having fluorine only on the 5 backbone, *e.g.*, as in TEFLONTM.


I. Hydroxy-Terminated FOX Homo- and Copolymers

As discussed above, the present invention provides the following types of hydroxy-terminated FOX homo- and copolymers: homoprepolymers where the prepolymer is assembled from only asymmetrically bis-substituted FOX monomer; 10 copolymers where the prepolymer is assembled from a mixture of symmetrically bis-substituted FOX monomers and asymmetrically bis-substituted FOX monomers; and copolymers where the prepolymer is assembled from a mixture of bis-substituted FOX monomers (either symmetrically, asymmetrically substituted or a mixture thereof) and mono-substituted FOX monomers (or a mixture thereof). As such, in one embodiment, 15 the prepolymer comprise a monomeric unit having the following general formula:

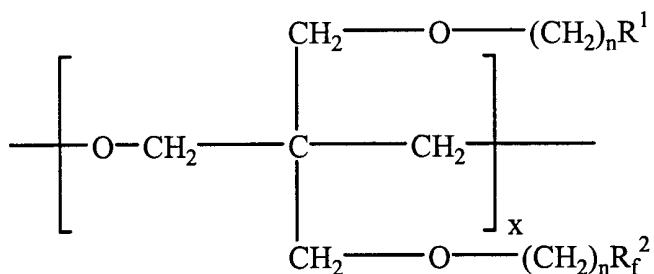

In the above formula, each n is independently selected and is 1 to 3; R_f^1 and R_f^2 are independently selected from the group consisting of linear perfluorinated alkyls, linear perfluorinated isoalkyls, branched chain perfluorinated alkyls, branched perfluorinated 20 isoalkyls, the perfluorinated alkyls and isoalkyls having from 1 to about 20 carbon atoms, and oxaperfluorinated polyethers having from 4 to about 60 carbon atoms; and x is 1 to about 250 and, more preferably, 2 to about 100. It is noted that R_f^1 and R_f^2 are selected so that they are different.

In another embodiment, the prepolymer comprise a mixture of 25 monomeric units have the following general formulae:

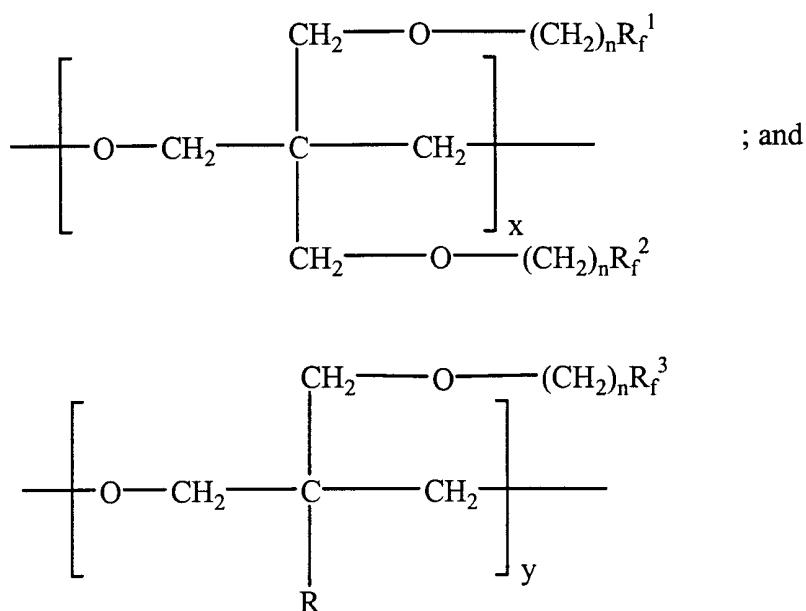

In the above formula, each n is independently selected and is 1 to 3; R is selected from the group consisting of methyl and ethyl; and R_f^1 , R_f^2 and R_f^3 are independently selected from the group consisting of linear fluorinated alkyls, linear fluorinated isoalkyls,

5 branched chain fluorinated alkyls, branched fluorinated isoalkyls, the fluorinated alkyls and isoalkyls having from 1 to 20 carbon atoms, and oxaperfluorinated polyethers having from 4 to about 60 carbon atoms; x is 1 to about 250 and, more preferably, 2 to about 100; and y is 1 to about 250 and, more preferably, 2 to about 100.

10 In addition to providing hydroxy-terminated FOX homo- and copolymers, the present invention provides a method of making the FOX homo- and copolymers. Generally, the method of making the FOX homo- and copolymers includes the steps of:

- 15 1) charging a reactor with a catalyst, an initiator and a solvent;
- 2) adding a solution of FOX monomer(s) in an appropriate organic solvent at a temperature between - 20°C and + 60°C;
- 3) reacting the FOX monomer(s) with the catalyst/initiator solution;
- 4) quenching the reaction; and
- 5) separating the FOX prepolymer by precipitation in methanol.

20 The polymerization reaction can be a homopolymerization reaction or a co-polymerization reaction in which a mixture of two or more of the above-mentioned oxetane monomers is added to the polymerization zone. A particularly useful co-polymerization is a block polymerization in which the comonomers are sequentially

added in selected proportions to obtain block copolymers of controlled block sizes and properties.

In accordance with the present invention, solution polymerization can be conducted at a solids concentration of about 5% to about 85% and, more preferably, at a 5 solids concentration of about 50 to about 60% solids. The polymerization reaction is conducted in the presence of a suitable inert solvent and, preferably, a halogenated C₁ to C₅ hydrocarbon. Examples of suitable solvents include, but are not limited to, methylene chloride, carbon tetrachloride, chloroform, trichloroethylene, chlorobenzene, ethyl bromide, dichloroethane, fluorinated solvents, etc. In a preferred embodiment, methylene 10 chloride or a mixture of methylene chloride and FreonTM is employed. Other solvents, such as sulfur dioxide, hexanes, petroleum ether, toluene, dioxane and xylene, can also be used.

The FOX monomers readily polymerize in the presence of a Lewis acid catalyst, *i.e.*, a compounds capable of accepting a pair of electrons, and a polymerization 15 initiator. Suitable Lewis acid catalysts include, but are not limited to, complexes of boron trifluoride, phosphorus pentafluoride, antimony pentafluoride, zinc chloride, aluminum bromide, and the like. In a preferred embodiment, the Lewis acid catalyst is boron trifluoride tetrahydrofuranate, *i.e.*, a BF₃•THF complex. The polymerization initiator is 20 preferably a polyhydroxy aliphatic compound. Examples of suitable polymerization initiators include, but are not limited to, alkyl and isoalkyl polyols having from about 2 to about 5 carbon atoms and from about 2 to about 4 hydroxyls. Such compounds include, for instance, ethylene glycol, butane-1,4-diol, propylene glycol, isobutane-1,3-diol, pentane-1,5-diol, pentaerythritol, trimethylolpropane, and the like. In a presently 25 preferred embodiment, butane-1,4-diol is the polymerization initiator used.

The catalyst and initiator are preferably mixed for about 5 to about 10 25 minutes in the solvent prior to the addition of the FOX monomers. The ratio of catalyst to initiator can range from about 1:1 to about 1:5 mol/mol and, more preferably, from about 1:1 to about 1:2 mol/mol. An example of a preferred catalyst, initiator and solvent system is BF₃•THF, butane-1,4-diol and methylene chloride. The ratio of the monomer to the 30 catalyst ranges from about 5:1 mol/mol to about 300:1 mol/mol and, more preferably, from about 10:1 mol/mol to about 50:1 mol/mol.

In a typical example, the catalyst and the initiator are mixed in a solvent prior to the addition of the FOX monomer(s). As oxetane monomers possess relatively high strain energy and undergo exothermic, ring-opening polymerizations, the FOX

monomer(s) is added slowly over a period of time to control the reaction temperature and to avoid run-away reactions. The progress of the reaction is monitored by ^1H NMR and when greater than about 95% of the FOX monomer is consumed, the reaction is quenched with water. The prepolymer is purified, for example, by precipitation in methanol.

5 The molecular weight of the prepolymer can be controlled by varying the monomer/initiator ratio. Generally, lower monomer/initiator ratios favor the formation of lower molecular weight prepolymers. The ratio of monomer to initiator can range from about 5:1 mol/mol to about 300:1 mol/mol, more preferably, from about 10:1 mol/mol to about 100:1 mol/mol and, more preferably, from about 5:1 mol/mol.

10 The reaction temperature can be varied from about - 20° to about + 60°C.

In a preferred embodiment, the reaction temperature is about + 5°C. At higher temperatures, formation of monofunctional materials, mainly -CH₂F terminated materials, is observed. Monofunctional materials can act as chain terminators, thereby limiting the molecular weight of the final polymer as well as increasing the polydispersity. This, in turn, can result in polymers having poor mechanical and physical properties.

15 Cyclic oligomers are normally formed as by-products in the synthesis of polyether prepolymers. Such materials are nonfunctional and, thus, reduce the usefulness of the prepolymers. Moreover, these materials can leach out of the polymer matrix, thereby drastically affecting the surface and mechanical properties of the polymer.

20 Prepolymers prepared by homopolymerization of FOX monomers contain approximately 2-7% cyclic tetramer.

However, the formation of cyclic oligomers can be controlled somewhat by the choice of catalyst employed. For instance, the BF₃•etherate catalyst results in about 10% to 15% of monofunctional material and about 6% to 7% cyclic tetramer by-product.

25 In contrast, BF₃•THF, the preferred catalyst used in the methods of the present invention, results in less than 7% of the cyclic tetramer byproduct and eliminates the formation of the monofunctional materials. In turn, this increases the functionality of the prepolymer and leads to polymers having excellent mechanical, surface, and physical properties.

30 The polymerization of FOX monomers occurs by cationic ring-opening reaction, a possible mechanism for which is presented in FIG. 1. Polymerization is initiated by the proton donated by the initiator, and the protonated oxetane ring undergoes propagation with other oxetanes to generate the polymer chain. The growing polymer chain is then terminated with either an alcohol or water to give the hydroxy-terminated

polyether prepolymers of this invention. It should be noted that the prepolymers of this invention are mixtures of prepolymers resulting from both alcohol and water terminations.

5 The prepolymers of this invention are amorphous, low-viscosity oils that are easy to process. The inherent viscosity of the prepolymers are between 0.05 and 0.08 dL/g. The number of average molecular weights of the prepolymers, as determined by gel permeation chromatography, are between 1,000 and 30,000. The polydispersity, a measure of the spread or "Q" of the molecular distribution, is very low, *i.e.*, on the order of less than 5 and typically between 1.1-2.0. The prepolymers exhibit unimodal 10 molecular weight distribution, and typically contain only about 2-7% cyclic tetramer.

It should be noted that molecular weights reported in this invention are expressed relative to well-characterized polystyrene standards. The equivalent weight of the prepolymers was determined by ^1H NMR employing TFAA end group analysis and were between 2,500 and 9,000. The glass transition temperature (T_g) of the prepolymers, 15 as determined by DSC analysis, was between - 38°C and - 45°C.

20 The structural analysis of the homo- and copolymers of this invention was conducted with ^1H , ^{13}C and ^{19}F NMR spectroscopy. ^1H NMR analysis revealed the presence of a trimethyleneoxide-based polyether backbone. ^1H NMR analysis also indicated that when $\text{BF}_3\text{-etherate}$ is used as the catalyst, substantial amounts of mono- 25 functional material with $-\text{CH}_2\text{F}$ and $-\text{OCH}_2\text{CH}_3$ end-groups is formed. However, when $\text{BF}_3\text{-THF}$ is used as the catalyst, formation of mono-functional material is not observed. ^1H NMR was also used to establish the ratio of the monomers in the copolymer and the identity of the end groups. ^{19}F NMR analysis confirmed the presence of fluoroalkyl side chains and the absence of materials with $-\text{CH}_2\text{F}$ end groups and other impurities, such as Freon, HF and the BF_3 catalyst.

30 The prepolymers of the present invention are oils that can be used as lubricants or as additives for a variety of applications. For example, these materials can be used as additives in cosmetics to impart water repellency and release characteristics. In addition, these materials can be used as additives in engine oils to reduce engine wear and improve performance. The principal application, however, is in the preparation of fluorinated polymers which, in turn, can be used for diverse applications ranging from car wax to materials for medical and dental applications, such as prosthetics and catheter linings.

2. *Hydroxy-Terminated FOX/THF Copolymers*

In another embodiment, the present invention provides hydroxy-terminated FOX/THF copolymers. It has been discovered that the fluorinated oxetanes of this invention can be copolymerized with THF to provide a FOX/THF copolymer having 5 very unique and unexpected characteristics. Such copolymers are a new class of fluorine containing, hydroxy-terminated, polyether prepolymers that, when cured with polyisocyanates, provide tough polyurethane elastomers that are characterized by low glass transition temperatures and low surface energies. Moreover, these elastomers can be incorporated into coatings that exhibit high abrasion resistance and a low coefficient of 10 friction. Combinations of these properties make the polymers derived from these fluorinated copolymers extremely attractive for a variety of applications including, but not limited to, anti-fouling (*i.e.*, release) coatings; ice release coatings; corrosion resistant coatings, automotive top coats (*e.g.*, car wax), windshield wipers; belt strips; various household goods; seals and gaskets; encapsulants for electronic devices; oil and dirt 15 resistance coatings; and numerous medical/dental applications.



Tetrahydrofuran (THF) is a five-membered cyclic ether that is commercially available and is known to polymerize or copolymerize with cationic catalysts, but not with anionic catalysts. Attempts to copolymerize THF with cyclic ethers and, in particular, oxetanes are unpredictable. Polymerization occurs, but the 20 products are often not random copolymers. Due to the vast differences in ring-opening polymerizability between THF and oxetanes, it is more likely that the product is a block copolymer, rather than a random copolymer. Poly(THF) (PTHF) is a semicrystalline polymer that melts at about 50°C, and when employed as the soft segment in urethane elastomers, is likely to crystallize at low temperatures, thereby causing problems with 25 physical properties, such as poor flexibility, incomplete or little recovery after elongation, poor modulus, and the like. In a block or nonrandom copolymer, similar problems can occur since THF blocks can crystallize and form semicrystalline polymers.

In the FOX/THF random copolymer of this invention, THF and oxetane segments are more or less randomly spaced along the polymer backbone, thereby leading 30 to products that are amorphous oils. The more or less random nature of the FOX/THF copolymers of the present invention prevents backbone tacticity or any other form of regularity that lends itself to ordering and, in turn, crystallinity. Hydroxy-terminated

polyether prepolymers that are low in crystallinity, preferably amorphous, are particularly suitable as the soft segments for urethane elastomers.


In this invention, the FOX monomers (either bis-substituted or a mixture of bis- and mono-substituted FOX monomers) can be copolymerized with tetrahydrofuran to give FOX/THF copolymers. Copolymerization of FOX monomers with THF not only reduces the cost of fluorinated prepolymers by using less of the relatively more expensive FOX monomers, but also provides prepolymers with superior properties. The copolymers of this invention are random copolymers and are ideal as soft segments for urethane elastomers. Moreover, these FOX/THF copolymers are amorphous oils that are easy to process. Also, the use of THF as a coreactant allows the polymerization to be conducted in bulk and eliminates the use of ozone depleting solvents, such as FreonsTM.

In one embodiment, the FOX/THF coprepolymer comprises a mixture of monomeric units having the following general formulae:

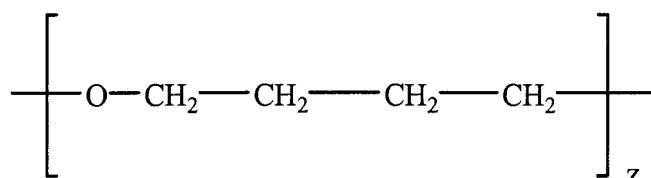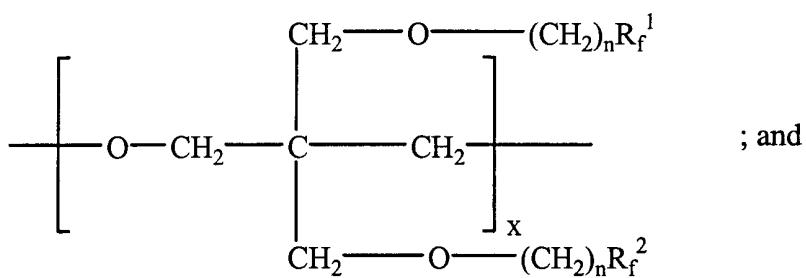

15 In the above formula, n is independently selected and is 1 to 3; R_f^1 and R_f^2 are independently selected from the group consisting of linear perfluorinated alkyl groups having 1-20 carbons, branched perfluorinated alkyl groups having 1-20 carbons and oxaperfluorinated polyethers having from about 4-60 carbons; x is 1 to about 250 and, more preferably, 2 to about 100; and z is 1 to about 250 and, more preferably, 1 to about 100. Typically, the molecular weight (M_n) of the FOX/THF copolymers ranges from about 2,000 to about 50,000 and, more preferably, from about 2,000 to about 15,000; and the T_g is less than about - 20°.

In another embodiment, the FOX/THF copolymers of the present invention comprise a mixture of monomeric units having the following general formulae:

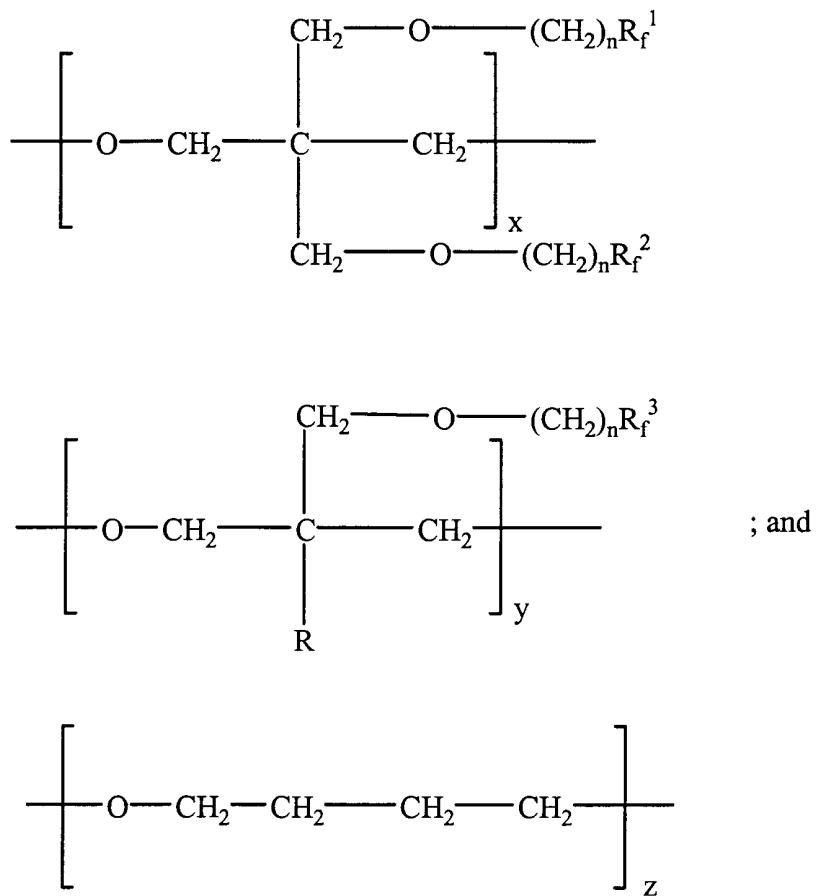

In the above formula, each n is independently selected and is 1 to 3; R is selected from the group consisting of methyl and ethyl; R_f^1 , R_f^2 and R_f^3 are independently selected from the group consisting of linear perfluorinated alkyl groups having 1-20 carbons, branched perfluorinated alkyl groups having 1-20 carbons and oxaperfluorinated polyethers having from about 4-60 carbons; x is 1 to about 250 and, more preferably, 2 to about 100; y is about 1 to about 250 and, more preferably, 2 to about 100; and z is 1 to about 250 and, more preferably, 1 to about 100. Typically, the molecular weight (M_n) of the FOX/THF copolymers ranges from about 2,000 to about 50,000 and, more preferably, from about 10 2,000 to about 15,000; and the T_g is less than about - 20°C.

Unexpectedly, the resulting copolymers of this invention are more or less random. The more or less random sequence of the copolymers, together with the presence of the asymmetric FOX segment, results in a low-viscosity oil that significantly facilitates processing and the commercial application of the product. Moreover, the 15 surface energy of the FOX/THF copolymers, as cured polymers, is lower than that of polytetrafluoroethylene (TEFLON™). This lower surface energy is thought to be due to the presence of the fluorine in the side chains of the polymer, rather than in the backbone of the polymer. Even though the amount of fluorine in the FOX/THF copolymer has

been reduced by the introduction of the THF segments, it has thus far been determined that when the FOX/THF copolymer contains up to about 65% THF, no significant reduction in surface energy is observed in polyurethane elastomers as compared to the elastomers prepared from the mono-substituted FOX monomers.

5 The random nature of the copolymer sequence is wholly unexpected and is achieved with the novel reaction conditions outlined below. The more or less randomness results in an amorphous, low-viscosity oil. The benefits of a liquid prepolymer over a crystalline prepolymer include, for example, easier processing and mixing with reactants (*e.g.*, diisocyanates, crosslinkers, chain extenders, etc.).

10 As such, in another embodiment, the present invention provides a semi-batch method of making FOX/THF copolymers. Generally, the method of making the FOX/THF copolymers of the present invention includes the following steps:

- 1) premixing THF in an appropriate organic solvent, the THF and solvent temperature being between about - 20°C and about + 60°C;
- 15 2) adding a catalyst;
- 3) adding an initiator;
- 4) adding at a controlled rate a FOX monomer(s), the temperature of the FOX monomer(s) being between about - 20°C and about + 60°C;
- 5) quenching the reaction; and
- 20 6) separating the FOX/THF prepolymer by precipitation in methanol.

Importantly, when the copolymer ratio of FOX to THF ranges from about 60:40 mol/mol to about 35:65 mol/mol, no organic solvent is required and the prepolymer can be made by the addition of FOX to neat THF. The absence of solvent offers significant advantages to manufacturers with respect to the environmental costs 25 associated with the storage, handling and disposal of hazardous materials, as well as the lower manufacturing costs and enhanced public perception (*i.e.*, a “green” product). Further, the presence of the hydrocarbon segment, *i.e.*, the THF segment, improves solubility of the FOX/THF copolymers in hydrocarbons.

Solution polymerization can be conducted at a solids concentration 30 ranging from about 5% to about 85% and, more preferably, from about 50% to about 60% solids. The copolymerization is conducted either in an inert solvent, such as methylene chloride, FreonTM 113 or mixtures thereof, or in neat THF. Other solvents suitable for use in this process include, but are not limited to, carbon tetrachloride, chloroform,

trichloroethylene, chlorobenzene, ethyl bromide, dichloroethane, fluorinated solvents, sulfur dioxide, hexanes, petroleum ether, toluene, trifluorotoluene, trifluorochlorotoluene, dioxane, xylene, etc. In a preferred embodiment, the solvent is methylene chloride or a mixture of methylene chloride and FreonTM. The fact that FOX/THF copolymers can be 5 prepared in the absence of a solvent is beneficial in the view of full-scale production, since environmental regulations highly restrict the emission of solvents, especially halogenated solvents, into the atmosphere.

The catalyst and the initiator are similar to those used in the homo- or co-polymerization of FOX monomers. Suitable catalysts are Lewis acids, *i.e.*, compounds 10 capable of accepting a pair of electrons. Examples of Lewis acids include, but are not limited to, complexes of boron trifluoride, phosphorous pentafluoride, SnCl₄, antimony pentafluoride, etc. Suitable initiators include water and aliphatic alcohols containing 2 to 5 carbons and 1 to 4 hydroxy groups. Suitable aliphatic alcohols include, but are not limited to, trifluoroethanol, methanol, 1,4-butanediol, trimethylolpropane, pentaerythritol, 15 etc.

In a typical example, the catalyst and the initiator are mixed in a solvent prior to the addition of the monomer. THF is a five-membered cyclic ether with low strain energy, and does not readily homopolymerize under the reaction conditions of temperature and monomer concentration employed. Thus, THF can be added in one shot 20 to the reaction mixture. On the other hand, oxetane monomers possess relatively high strain energy and undergo exothermic, ring-opening polymerizations. Thus, the FOX monomers are added slowly over a period of time to control the reaction temperature and to avoid run-away reactions. The progress of the reaction is monitored by ¹H NMR and when greater than 95% of FOX monomer is consumed, the reaction is quenched with 25 water. The prepolymer is purified, for example, by precipitation in methanol.

As previously described, the molecular weight of the FOX/THF copolymers can be controlled by varying the monomer/initiator ratio. Generally, lower monomer/initiator ratios favor the formation of lower molecular weight copolymers. The ratio of monomer to initiator can range from about 5:1 mol/mol to 30 300:1 mol/mol. In a presently preferred embodiment, the ratio of monomer to initiator employed is about 5:1 mol/mol to 100:1 mol/mol. The temperature can range from about -20°C to +60°C, with the presently preferred temperature being about +5°C. At higher temperatures, formation of monofunctional materials, mainly -CH₂F terminated materials,

is observed. If the reaction is carried out at about +5°C, the formation of -CH₂F terminal groups, which are unreactive and reduce the functionality of the prepolymer (by formation of the monofunctional product) and lead to polyurethanes with poor mechanical properties, is eliminated.

5 In contrast to the FOX homo- and co-prepolymers, the formation of large amounts of cyclic oligomers is not observed in the copolymerization of FOX monomers with greater than 10 mole% THF. It is postulated that the incorporation of THF into the growing polymer chain changes the number of carbon atoms between oxygen atoms in the polymer chain and does not allow the chain to bite back and form a
10 thermodynamically stable, 16-membered cyclic ether. This result is especially important in the development of coatings, where discharge of any chemicals from candidate coatings is not acceptable.

15 The FOX/THF copolymers of this invention are amorphous, low-viscosity oils that are easy to process. FOX/THF copolymers are slightly more viscous than FOX homopolymers. ¹H NMR analysis of FOX/THF copolymers indicates that both monomers are incorporated into the copolymer, and that the THF segment is primarily present in the middle of two FOX segments, and not as an end group.

20 The ratio of the two monomers in the copolymer is established by comparing the area under the peaks corresponding to THF (about 1.6 ppm) and the FOX monomers segments. ¹H NMR analysis also indicates that FOX/THF copolymers are not contaminated with monofunctional materials (-CH₂F terminated) or other impurities. The presence of multiple peaks in the quartenary carbon region of ¹³C NMR, corresponding to the carbon bearing the fluoroalkyl side chain, reveals that the above prepolymers are
25 nearly random copolymers with little, if any, block structure. ¹⁹F NMR analysis confirms the presence of the fluoroalkyl side chain and the absence of -CH₂F end groups, HF and BF₃ catalyst. It is important to note that these materials do not contain THF block sequences long enough to crystallize, which could lead to materials with poor flexibility.

30 The number of average molecular weights of FOX/THF copolymers, as determined by GPC, were between 10,000 and 14,000, whereas M_w/M_n were between 1.1 and 2.5. The copolymers exhibit unimodal molecular weight distributions, and are typically free of cyclic oligomers. It should be noted that the formation of a random copolymer between bis-substituted FOX monomers and THF monomers is unexpected.

The copolymers described above are oils that can be used as lubricants or as additives for a variety of applications. For example, the copolymers can be used as additives to improve the performance of commercial engine oils or as lubricants for industrial equipment. The major use of FOX/THF copolymers, however, is in the 5 development of fluorinated polyether urethane elastomers as described herein.


D. POLYMERS

The hydroxy-terminated prepolymers of this invention can be used for the synthesis of a variety of polymers, such as polyurethanes, polyesters, polycarbonates, polyacrylates, etc. In addition, the FOX prepolymers of this invention can be used to 10 synthesize novel fluorinated elastomers, thermosets and thermoplastics.


1. *Polyurethanes from FOX Homo-/Copolymers*

The preparation of fluorinated polyurethane elastomers begins with the FOX prepolymers of this invention. As previously described, these prepolymers are amorphous, low-viscosity oils that are easy to process. Moreover, these materials are 15 difunctional and possess terminal primary hydroxy groups that react readily with isocyanates to form high molecular weight polyurethane elastomers. Typically, the prepolymer is reacted with an equivalent amount of a polyisocyanate in the presence of a catalyst and a crosslinking agent to form a three-dimensional, polymer network. The process involves mixing the components, casting them in a mold, degassing and curing 20 the mixture at an elevated temperature. Alternatively, the FOX prepolymer is reacted with excess diisocyanate and the resulting isocyanate-capped prepolymer is reacted with a crosslinking agent to form a thermoset. If desired, the isocyanate-capped prepolymer can be reacted with a low molecular weight diol or diamine, *i.e.*, a chain extender, to form a linear, thermoplastic polyurethane elastomer.


25 In one embodiment, the fluorine-containing thermoplastic polyurethane elastomer of this invention comprises a mixture of monomeric units having the following general formulae:

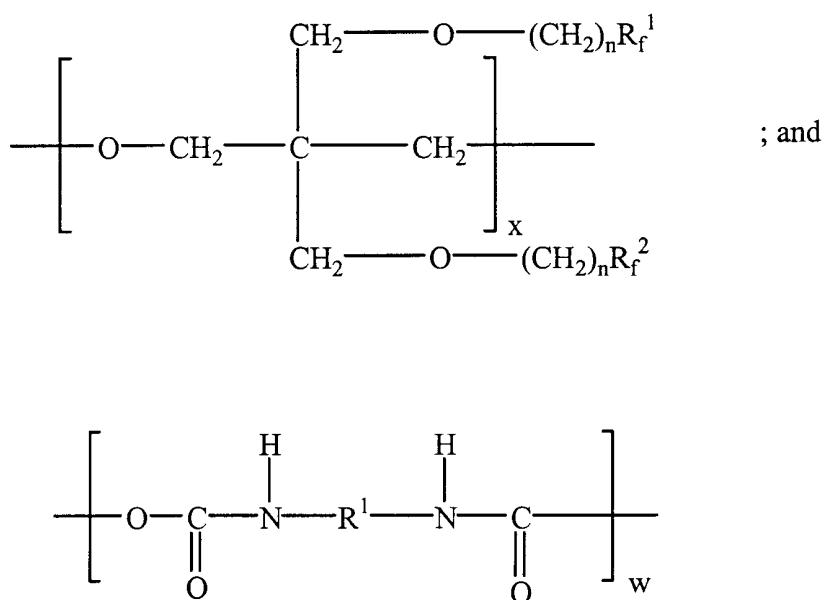

In the above formula, n is independently selected and is 1 to 3; R_f^1 and R_f^2 are independently selected from the group consisting of linear and branched perfluorinated alkyls having 1-20 carbon atoms, and oxaperfluorinated polyethers having from about 4-20 carbon atoms; R^1 is a divalent hydrocarbyl radical; x is 1 to about 250 and, more preferably, 2 to about 100; and w is 1 to about 50 and, more preferably, 1 to about 5. It is noted that R_f^1 and R_f^2 are selected such that they are different. Examples of suitable divalent hydrocarbyl radicals include, but are not limited to, the following structures:

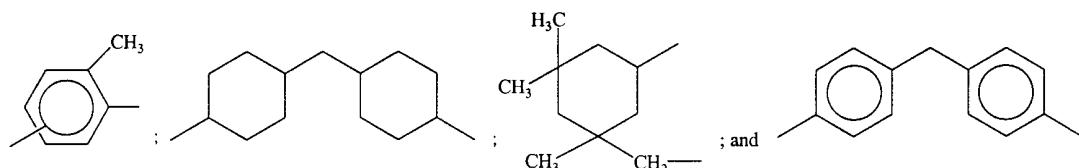

10 In another embodiment, the fluorine-containing thermoplastic polyurethane elastomer of this invention comprises a mixture of monomeric units having the following general formulae:

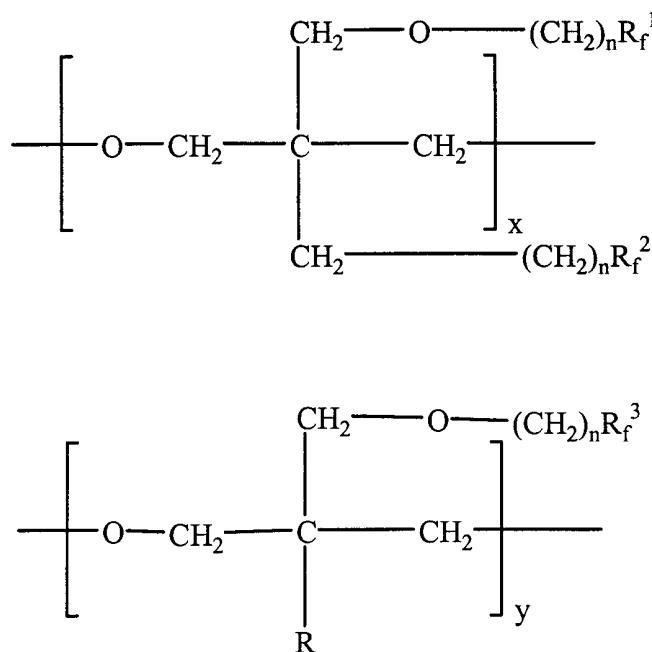

In the above formula, n is independently selected and is 1 to 3; R is selected from the group consisting of methyl and ethyl; R_f^1 , R_f^2 and R_f^3 are independently selected from the group consisting of linear and branched perfluorinated alkyls having 1-20 carbon atoms,

5 and oxaperfluorinated polyethers having from about 4-20 carbon atoms; R^1 is a divalent hydrocarbyl radical; x is 1 to about 250 and, more preferably, 2 to about 100; y is 1 to about 250 and, more preferably, 2 to about 100; and w is 1 to about 50 and, more preferably, 1 to about 5.

The resulting polyurethanes are tack-free, opaque and generally insoluble 10 in organic solvents and have glass transition temperatures between about - 40°C and about - 47°C. Contact angle measurements of between 110° and 145° with distilled water and surface energy measurements of 13.8-15.2 ergs/cm² indicate that the surface wettability and nonadhesive characteristics of the elastomers of this invention are greater than those measured for TEFILONTM (110° contact angle and 18.5 ergs/cm² surface 15 energy). It has generally been found that as the size of the side chain on the FOX polymers increases, hydrophobicity increases as well.

The polyurethanes of this invention exhibit the following novel set of characteristics:

- 1) Elastomeric properties;
- 2) More hydrophobic and nonstick than TEFLONTM;
- 5 3) Processable into thin coatings or bulk articles;
- 4) Flexible down to about - 50°C;
- 5) Bondable to a variety of substrates; and
- 6) Useful ambient temperature range from about - 50°C to about 240°C

The glass transition temperature (T_g) is the temperature at which the 10 polymer is transformed from a brittle glass to a flexible elastomer. Thus, it dictates the lower use temperature of the elastomer. The glass transition temperatures of non-plasticized FOX polyurethanes, as measured with a differential scanning calorimeter (DSC), are between - 40°C and - 47°C. Normally, a plasticizer is used to impart 15 flexibility and to lower the glass transition temperature of the polymers. If desired, fluorinated plasticizers, such as Fomblin, Alfunox and Kel-F oils, can be used to improve the low-temperature flexibility of the FOX polyurethane elastomers of the present invention.

The contact angle is the obtuse angle of a water droplet on the polymer 20 surface and reflects the wettability of the polymer surface. A water droplet does not spread on a hydrophobic surface and will exhibit a high contact angle, indicating non-wetting characteristics of the polymer surface. The static contact angle of FOX polyurethanes with doubly distilled water were measured with a Goniometer, and were found to be between 110° and 145°. In sharp contrast, TEFLONTM exhibits a contact 25 angle of 110°. Surface energy is also an important measure of wettability of the polymer surface and defines critical properties, such as hydrophobicity and adhesive characteristics. Materials with low surface energies are difficult to wet and, thus, exhibit excellent release characteristics. TEFLONTM, for example, exhibits a surface energy of 18.5 ergs/cm², and is widely used in the preparation of nonstick cooking utensils. Surface 30 energies of common polymers are listed in Table 2. The surface energy values of the polymers of the present invention are considerably lower than that of TEFLONTM and other commercial polymers, indicating that FOX polyurethanes have superior release characteristics to TEFLONTM. This makes the cured elastomer of the present invention

more suited than TEFLON™ for those applications where lower wettability and enhanced release characteristics are desired in a coating material.

TABLE 2
SURFACE ENERGIES OF COMMERCIAL POLYMERS

Material	SURFACE (ergs/cm ²)
TEFLON™	18.5
Polydimethylsiloxanes	24
Polyethylene	31
Polytrichlorofluoroethylene	31
Polystyrene	33-35
Poly(methylmethacrylate)	33-34
Nylon 66	46

In another embodiment, the present invention provides methods for making the polyurethane elastomers of the present invention. In one embodiment, the 5 method includes the steps of:

- 1) premixing a FOX prepolymer with a polyisocyanate at a temperature between about 25°C and about 100°C;
- 2) adding a catalyst;
- 3) adding from about 0% to about 15% wt/wt of a crosslinking agent;
- 10 4) mixing the components;
- 5) casting the components into a mold;
- 6) degassing the cast compound; and
- 7) curing the compound mixture at a temperature of between about 17°C and about 150°C.

15 Normally, molar equivalent amounts of the FOX prepolymer, polyisocyanate and crosslinking agent are used. However, where the FOX prepolymer is added to an excess of polyisocyanate, an isocyanate-capped prepolymer is produced that can be further reacted with a crosslinking agent to produce a thermoset polyurethane elastomer. Alternatively, the isocyanate-capped prepolymer can be reacted with a low 20 molecular weight chain extender, such as a diol or diamine, to prepare linear thermoplastic polyurethane elastomers.

Polyisocyanates suitable for use in the synthesis of the FOX polyurethanes of the present invention include, but are not limited to, hexamethylene diisocyanate (HDI), isopherone diisocyanate (IPDI), methylene diphenylisocyanate (MDI), saturated MDI (Des-W), polymeric MDI, which are available from Dow Chemical Co. under the 5 trademark ISONATE, a line of low-functionality isocyanates, toluene diisocyanate (TDI), polymeric HDI, which are available from Mobay Corporation, a Bayer Company, under the trademarks DESMODUR N-100, a solvent-free, aliphatic polyisocyanate resin basin based on hexamethylene diisocyanate, and DESMODUR N-3200, an aliphatic polyisocyanate resin based on hexamethylene diisocyanate, cyclohexylene-1,4-diisocyanate, and 2,2,4-trimethylhexmethylene diisocyanate. The NCO:OH ratio can 10 range from about 1.1 to about 0.9 and, more preferably, NCO:OH ratio is about 1.02.

The crosslinking agents normally used are low molecular weight polyols or polyamines. Examples of suitable crosslinking agents include, but are not limited to, trimethylolpropane, pentaerythritol, ISONOL® 93, trimethylolethane, triethanolamine, 15 Jeffamines, 1,4-butanediamine, xylene diamine, diethylenetriamine, methylene dianiline, diethanolamine, etc. In preferred embodiments, trimethylolpropane, ISONOL® 93, methylene dianiline and Jeffamines are the crosslinking agents employed. The mechanical properties of the elastomers can be altered by varying the amount of crosslinking agent. Generally, increasing the amount of crosslinking agent in a 20 polyurethane formulation leads to materials with higher modulus and improved chemical and abrasion resistance. The amount of crosslinking agent can be varied from about 0 to about 15% by weight and, more preferably, from about 1.5% to about 5% by weight.

Catalysts suitable for use in the present invention include, but are not limited to, triethylamine, triethylene diamine, triphenyl bismuth, chromium 25 acetylacetone, lead octonate, ferric acetylacetone, tin octanoate, dibutyltin dilaurate, and the like. In a preferred embodiment, the catalyst is dibutyltin dilaurate. It should be noted that the catalyst is added primarily to increase the rate of the reaction and, if desired, the reaction can be conducted in the absence of the catalyst. The catalyst concentration can range from about 0.001 to about 1% by wt. and, more preferably, from 30 about 0.1% and 0.2% by wt.

Bulk materials are prepared by casting the above formulation in a mold, degassing the mixture, and then curing the mixture at a temperature ranging from about 20°C to about 150°C for about 3 to about 36 hours. In a presently preferred embodiment,

the cure temperature is about 65°C. It is noted that the above formulation can be cured at room temperature by increasing the amount of catalyst to about 0.5%. The cure is also dependent on the thickness of the sample and the type of crosslinking agent employed.

Thin samples cure within about 3 hours at 65°C, whereas 1/8 inch thick sample can take

5 between about 8 to about 16 hours to cure. A thin-film is prepared by diluting the above formulation with THF, spreading the mixture over the substrate with, for example, a Doctor's blade, and then curing the coated substrate in an oven at 65°C. Alternatively, the substrate can be dip coated or spray coated and cured in an oven at 65°C. In addition, amine-based crosslinking agents promote faster cures than polyols.

10 The mechanical properties of the polyurethanes prepared from FOX prepolymers indicate that they are true elastomers (*i.e.*, > 100% recoverable elongation).

Moreover, the FOX polyurethanes of the present invention exhibit surprisingly good adhesion to a variety of substrates including, but not limited to, stainless steel, aluminum, graphite, EPDM rubber, glass and wood. In a typical process, the substrate is coated with

15 the polyurethane formulation, placed in an oven, and cured. It is noted that no special

treatment or primer is required to bond fluorinated polyurethane to the substrate. The

good bonding characteristics of the FOX polyurethanes of the present invention are attributed to the presence of the polar urethane groups in the polymer backbone that, in contrast to fluoroalkyl groups, orient towards the high energy surface. A well-adhering

20 coating should, therefore, contain chemical groups that will contribute to enhance the

polarity of the coating and bring it into the range of the substrate. A system containing both dipole-dipole and hydrogen-bond contributions is preferred over a system containing only one such contribution because of its broader compatibility. During application, the system must be sufficiently fluid in order to encourage rapid spreading, uniform coating

25 and good wetting. Since TEFLON™ has the fluorines symmetrically bonded to the polymer backbone, there is no dipole or hydrogen bonding which will allow the polymer to bond to a substrate surface. Consequently, a TEFLON™ coating will not exhibit good adhesion or peel strength with its underlying substrate.

The thermal stability of the FOX polyurethanes is determined by

30 thermogravimetric analysis (TGA). The FOX polyurethanes of the present invention

exhibit 0% wt. loss in air to 260°C, and an onset of major thermal degradation in air at




275°C. As such, the FOX polyurethanes should not be exposed to temperatures in excess of 250°C.

The above results indicate that the polyurethanes prepared from the FOX prepolymers of the present invention are more hydrophobic and nonstick than TEFLONTM. In sharp contrast to TEFLONTM, FOX polyurethanes are tough elastomers that can be processed into either thin coatings or bulk articles. Moreover, these materials 5 are flexible at low temperatures and can be used at temperatures as low as - 50°C. Also, these materials can be bonded to a variety of substrates, and can be used at temperatures ranging from about -50°C to about 250°C. As such, this invention provides novel materials that can be bonded strongly to a variety of substrates and, at the same time, provide a surface that is more hydrophobic and nonstick than TEFLONTM. Materials 10 having this combination of properties are extremely useful as processable, low-surface-energy elastomers.

2. *Polyurethanes from FOX/THF Copolymers*





The FOX/THF copolymers of the present invention can also be used to produce polyurethane elastomers having useful properties. Polyurethanes prepared from 15 FOX/THF copolymers exhibit better adhesion, higher abrasion resistance and superior mechanical properties than those derived from FOX homo- or copolymers. Moreover, the key properties of FOX polyurethanes are not affected by incorporation of THF into the polymer structure. That is, polyurethanes prepared from FOX/THF copolymers still exhibit low glass transition temperatures, low coefficients of friction, and low- 20 surface-energy properties that are similar to those of polyurethanes derived from FOX homo- or copolymers.

As such, in one embodiment, the present invention a fluorinated thermoset polyurethane elastomer having random FOX/THF segments and comprising a mixture of monomeric units having the general formulae:

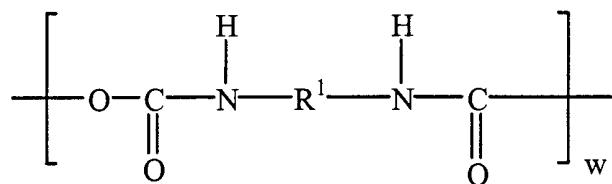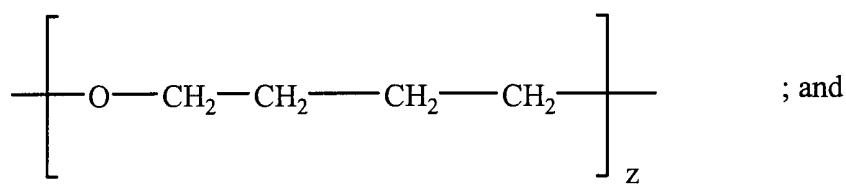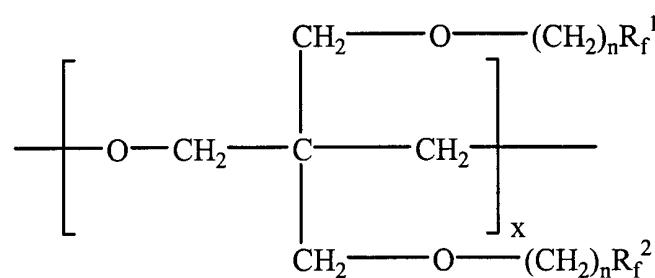

In the above formula, n is independently selected and is 1 to 3; R_f^1 and R_f^2 are independently selected from the group consisting of linear and branched perfluorinated alkyls having 1-20 carbon atoms, and oxaperfluorinated polyethers having from about 4-5 20 carbon atoms; R^1 is a divalent hydrocarbyl radical; x is 1 to about 250 and, more preferably, 2 to about 100; z is 1 to about 250 and, more preferably, 1 to about 100; and w is 1 to about 50 and, more preferably, 1 to about 5.

10 In another embodiment, the present invention provides a fluorinated thermoset polyurethane elastomer comprising a mixture of monomeric units having the general formulae:

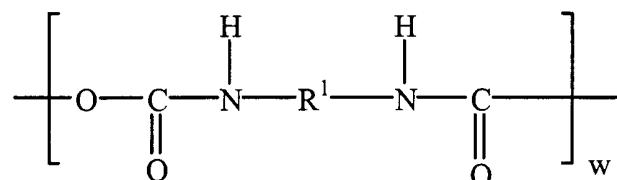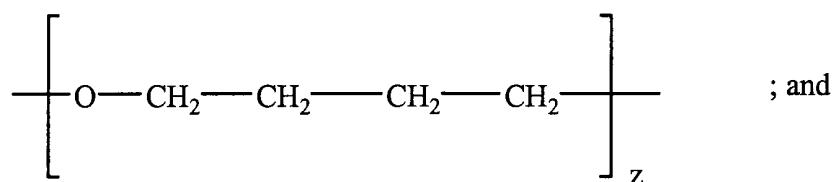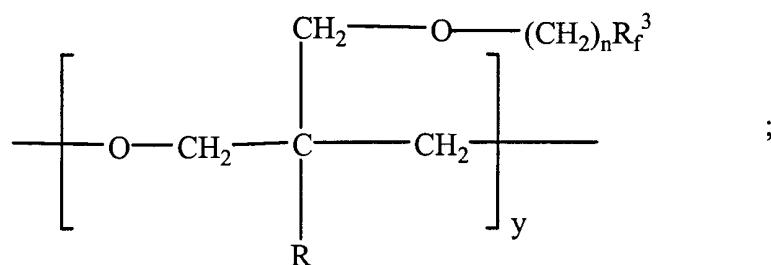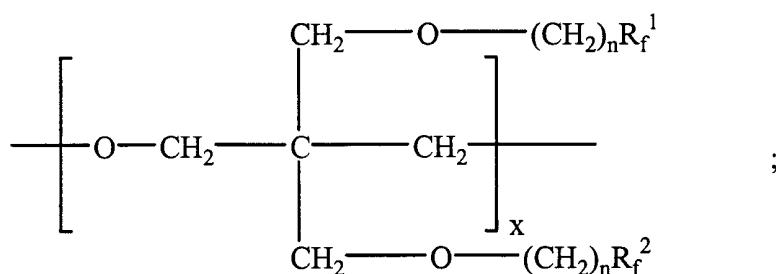

In the above formula, n is independently selected and is 1 to 3; R is selected from the group consisting of methyl and ethyl; R_f^1 , R_f^2 and R_f^3 are independently selected from the group consisting of linear and branched perfluorinated alkyls having 1-20 carbon atoms, and oxaperfluorinated polyethers having from about 4-20 carbon atoms; R^1 is a divalent hydrocarbyl radical; x is 1 to about 250 and, more preferably, 2 to about 100; y is 1 to about 250 and, more preferably, 2 to about 100; z is 1 to about 250 and, more preferably, 1 to about 100; and w is 1 to about 50 and, more preferably, 1 to about 5.

The FOX/THF copolymers described in this invention are difunctional and have terminal hydroxy groups. The hydroxy groups are primary hydroxy groups and, thus, they readily react with isocyanates to form high molecular weight polyurethane elastomers. In a typical reaction, the copolymer is reacted with an equivalent amount

of polyisocyanate in the presence of a catalyst and a crosslinking agent to form a three-dimensional polymer network. If the functionality of the polyisocyanate is 2, then a crosslinking agent is needed to form a crosslinked network. However, if the functionality of the polyisocyanate is greater than 2, then no crosslinking agent is required. In some 5 instances, additional crosslinking agent is added to improve the chemical and abrasion resistance of the polymer. The crosslinking agent normally used is a low molecular weight polyol or polyamine.

Polyisocyanates suitable for use in the synthesis of the FOX polyurethanes of the present invention include, but are not limited to, hexamethylene diisocyanate 10 (HDI), isopherone diisocyanate (IPDI), methylene diphenylisocyanate (MDI), saturated MDI (Des-W), polymeric MDI, which are available from Dow Chemical Co. under the trademark ISONATE, a line of low-functionality isocyanates, toluene diisocyanate (TDI), polymeric HDI, which are available from Mobay Corporation, a Bayer Company, under the trademarks DESMODUR N-100, a solvent-free, aliphatic polyisocyanate resin basin 15 based on hexamethylene diisocyanate, and DESMODUR N-3200, an aliphatic polyisocyanate resin based on hexamethylene diisocyanate, cyclohexylene-1,4-diisocyanate, and 2,2,4-trimethylhexmethylene diisocyanate. The NCO:OH ratio can range from about 1.1 to about 0.9 and, more preferably, the NCO:OH ratio is about 1.02.

The crosslinking agents normally used are low molecular weight polyols 20 or polyamines. Examples of suitable crosslinking agents include, but are not limited to, trimethylolpropane, pentaerythritol, ISONOL® 93, trimethylolethane, triethanolamine, Jeffamines, 1,4-butanediamine, xylene diamine, diethylenetriamine, methylene dianiline, diethanolamine, etc. In preferred embodiments, trimethylolpropane, ISONOL® 93, methylene dianiline and Jeffamines are the crosslinking agents employed. The 25 mechanical properties of the elastomers can be altered by varying the amount of crosslinking agent. Generally, increasing the amount of crosslinking agent in a polyurethane formulation leads to materials with higher modulus and improved chemical and abrasion resistance. The amount of crosslinking agent can be varied from about 0 to about 15% by weight and, more preferably, from about 1.5% to about 5% by weight.

Catalysts suitable for use in the present invention include, but are not 30 limited to, triethylamine, triethylene diamine, triphenyl bismuth, chromium acetylacetone, lead octonate, ferric acetylacetone, tin octanoate, dibutyltin dilaurate and the like. In a preferred embodiment, the catalyst is dibutyltin dilaurate. It should be

noted that the catalyst is added primarily to increase the rate of the reaction and, if desired, the reaction can be conducted in the absence of the catalyst. The catalyst concentration can range from about 0.001 to about 1% by wt. and, more preferably, from about 0.1% and 0.2% by wt.

5 As with the polyurethanes prepared from the FOX prepolymers, bulk materials are prepared by casting the above formulation in a mold, degassing the mixture, and then curing the mixture at a temperature ranging from about 20°C to about 150°C for about 3 to about 36 hours. In a presently preferred embodiment, the cure temperature is about 65°C. It is noted that the above formulation can be cured at room temperature by
10 increasing the amount of catalyst to about 0.5%. The cure is also dependent on the thickness of the sample and the type of crosslinking agent employed. Thin samples cure within about 3 hours at 65°C, whereas 1/8 inch thick sample can take between about 8 to about 16 hours to cure. A thin-film is prepared by diluting the above formulation with THF, spreading the mixture over the substrate with, for example, a Doctor's blade, and
15 then curing the coated substrate in an oven at 65°C. Alternatively, the substrate can be dip coated or spray coated and cured in an oven at 65°C. In addition, amine-based crosslinking agents promote faster cures than polyols.

In general, polyurethanes prepared from FOX/THF coprepolymer are tack-free, opaque elastomers. They exhibit glass transition temperatures of less than
20 about - 20°C, and typically have static contact angles with water between about 108° and about 126°. These materials are insoluble in common organic solvents, such as methanol, toluene, hexanes, carbon tetrachloride, methyl ethylketone and kerosene, but swell in THF and FreonTM 113. Such materials exhibit good to excellent adhesion to a variety of substrates, such as stainless steel (SS 304), graphite, EPDM rubber, aluminum and glass.
25 Typically, the substrate is cleaned with water and acetone and then dried in an oven prior to use. Bonding is achieved by curing the mixture of prepolymer, crosslinking agent, polyisocyanate and catalyst directly on the substrate.

The studies carried out with respect to these polyurethanes indicate that the copolymerization of FOX monomers with THF not only reduces the cost of
30 manufacturing fluorinated prepolymers, but also provides material with superior properties. Moreover, FOX/THF polyurethanes exhibit better adhesion and superior mechanical properties than FOX polyurethanes, while retaining the key properties of

FOX polyurethanes, *i.e.*, low glass transition temperature, high adhesion, processibility, high hydrophobicity, low coefficient of friction, low surface energy, etc.

As a result of their unique combination of properties, polyurethanes prepared from FOX/THF copolymers are useful as fouling release coatings; as 5 abrasion resistant, low friction coatings for glass-run window channels, belts and windshield wipers; as bushing, gaskets, and engine mounts; as encapsulants for electronic devices; as binders for propellants and flares; as artificial joints; as dental materials; and as coatings for automotive, marine and industrial applications. The preferred applications are fouling release coatings, coatings for window channels, and binders for propellants 10 and flares.

The invention will be described in greater detail by way of specific examples. The following examples are offered for illustrative purposes, and are not intended to limit the invention in any manner. Those of skill in the art will readily recognize a variety of noncritical parameters which can be changed or modified to yield 15 essentially the same results.

EXAMPLES

A. EXPERIMENTAL SECTION

NMR analysis was performed on a Bruker MSL-300 spectrometer at 300 MHz in deuterochloroform solution with proton and carbon shifts in ppm relative to 20 tetramethylsilane and fluorine shifts relative to fluorotrichloromethane. IR analysis by diffuse reflectance was performed on a Nicolet SX-5 spectrometer on KBr. Thermal analysis was performed on a Dupont DSC 9100 Analyzer.

B. MONOMERS

EXAMPLE I

25 This example relates to the preparation and properties of 3,3-bis-(2,2,2-trifluoroethoxymethyl)oxetane (B6-FOX) using two different procedures.

i. Procedure A

Sodium hydride (50% dispersion in mineral oil, 18.4 g, 0.383 mol) was washed with hexanes (2 x) and was suspended in DMF (200 mL). Then trifluoroethanol 30 (38.3 g, 0.383 mol) was added dropwise over 45 min while hydrogen gas was evolved. The mixture was stirred for 30 min and a solution of 3,3-bis-(hydroxymethyl)oxetane di-*p*-toluenesulfonate (30.0 g, 0.073 mol) in DMF (50 mL) was added. The mixture was

heated to 75°C for 64 h when ¹H NMR analysis of an aliquot showed that the starting sulfonate had been consumed. The mixture was poured into water and extracted with methylene chloride (2 x). The combined organic extracts were washed with brine, 2% aqueous HCl, water, dried (MgSO₄), and evaporated to give 17.5 g (100%) of 3,3-bis-
5 (2,2,2-trifluoroethoxymethyl)oxetane as an oil containing DMF (<1%). The oil was purified by bulb-to-bulb distillation at 42-48°C (0.1 mm) to give 15.6 g (79%) of analytically pure B6-FOX, colorless oil: IR (KBr) 2960-2880, 1360-1080, 995, 840 cm⁻¹; ¹H NMR δ 3.87 (s 4H), 3.87 (q, J = 8.8 Hz, 4H), 4.46 (s, 4 H); ¹³C NMR δ 43.69, 68.62 (q, J = 35 Hz), 73.15, 75.59, 123.87 (q, J = 275 Hz); ¹⁹F NMR δ -74.6(s). Anal. Calcd, 10 for C₉H₁₂F₆O₃: C, 38.31; H, 4.29; F, 40.40. Found: C, 38.30; H, 4.30; F, 40.19.

ii *Procedure B*

A 2 L round-bottom flask fitted with a mechanical stirrer, condenser and a thermometer was charged with 3,3-bis-(bromomethyl)oxetane (300 g, 1.2 mol), trifluoroethanol (284 g, 2.8 mol), tetrabutylammonium bromide (39.9 g, 0.12 mol) and water (265 mL). The mixture was heated to 85°C and a 50% aqueous potassium hydroxide solution (672 g, 5.1 mol) was added via an addition funnel over a period of 3 h. The progress of the reaction was monitored by GLC and when greater than 99% of 3,3-bis-(bromomethyl)oxetane was consumed, the reaction mixture was cooled to room temperature and diluted with water (500 mL). The organic phase was separated and 15 washed with 2% aqueous potassium hydroxide solution (500 mL) and water (500 mL). The crude product was then distilled under reduced pressure (bp = 103°C/5 mm/Hg) to give 278 g (80%) of greater than 99% pure (GLC) 3,3-bis-(2,2,2-trifluoroethoxymethyl)oxetane, a colorless oil. Spectral analysis revealed that the product prepared by this process was identical with B6-FOX monomer prepared by Procedure A. 20

25

EXAMPLE II

This example relates to the preparation and properties of 3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-3-methyloxetane (B14-FOX).

A 12 L, round-bottom flask fitted with a mechanical stirrer and a reflux condenser was charged with 3,3-bis-(bromomethyloxetane) (678 g, 2.8 moles), 30 2,2,3,3,4,4,4-heptafluorobutane-1-ol (1165 g, 5.82 moles), tetrabutylammonium bromide (55.4 g, 0.17 moles), and water (1200 mL). The mixture was heated to 85°C and a solution of 50% aq. sodium hydroxide (640 g, 8.0 moles) was slowly added over a period

of 4 h. The resulting mixture was then heated at about 100°C for 16 h, at which point GLC analysis revealed that greater than 95% of the starting oxetane was consumed. The mixture was cooled to room temperature and the organic layer was separated. The organic layer was then washed with water (2 x 1000 mL), dried (MgSO_4), filtered and fractionally distilled under reduced pressure. The first fraction, boiling at 27°C/2 mm/Hg, consisted of unreacted heptafluorobutanol and was recycled. The second fraction boiling at 110°C/1 mm/Hg, was the desired product, *i.e.*, B14-FOX (776 g, 83%). The product was greater than 99% pure as determined by GLC area % analysis, ^1H NMR and ^{13}C NMR. ^1H NMR δ 3.86 (s, 4 H), 3.93 (t, J = 23.2 Hz, 4 H), 4.44 (s, 4 H); ^{13}C NMR δ 43.84, 68.03, 73.51, 77.61, 115.39, 115.84, 119.6; ^{19}F NMR δ -81.61, -121.0, -128.2.

A sample of this material was purified by column chromatography to provide pure poly(B14-FOX) glycol. The crude mixture (10 g) of poly(B14-FOX) glycol and cyclic oligomers was filtered through a short silica gel plug using hexane and ethyl acetate as eluents. The desired poly(B14-FOX) glycol was present in the ethyl acetate fraction and was isolated in 42% yield by evaporating the solvent under reduced pressure. The product, a white wax, was found by GPC analysis to contain < 0.5% cyclic material: GPC: M_w = 9,047, PD = 1.34; ^1H NMR ($\text{CDCl}_3/\text{F}^{113}/\text{TFAA}$): δ 3.39 (s, 4H), 3.59 (s, 4H), 3.87 (t, 13.5 Hz, 4H), and 4.40 (s, $-\text{CH}_2\text{OCOCF}_3$); ^{13}C NMR: δ 46.4, 68.5 (t), 70.1 and 72.1 (signals from carbon bearing fluorines are not included).

20

EXAMPLE III

This example relates to the preparation and properties of 3,3-bis-(2,2,3,3,4,4,5,5,6,6,7,7,7-pentadecafluoroctyloxymethyl)oxetane (B30-FOX).

A mixture of 3,3-bis-(chloromethyl)oxetane (3.0 g, 19.4 mmol), pentadecafluoroctan-1-ol (16 g, 40 mmol), tetrabutylammonium bromide (13.2 g, 40 mmol), water (35 mL), and 50% aq. sodium hydroxide (3.5 g, 44 mmol) was heated at 100°C for 48 h. The reaction mixture was diluted with FreonTM 113 (10 mL) and the organic phase was separated. The organic phase was then washed with water, dried (MgSO_4), filtered and stripped of solvent under reduced pressure to give 16.1 g of the crude product. Kugelrohr distillation of the crude product under reduced pressure (120-125/0.2 mm/Hg) provided 13.8 g (82%) of B30-FOX, an oil; ^1H NMR δ 3.87 (s, 4 H), 3.93 (t, J = 23.8 Hz, 4 H), 4.44 (s, 4 H).

EXAMPLE IV

This example relates to the preparation and properties of 3,3-bis-(3,3,4,4,5,5,6,6,7,7,8,8,8-tridecafluoroctyloxymethyl)oxetane (B26-FOX).

A mixture of 3,3-bis-(iodomethyl)oxetane (4.3 g, 12.7 mmol),

5 3,3,4,4,5,5,7,7,8,8,8-tridecafluoroctan-1-ol (9.1 g, 25 mmol), tetrabutylammonium bromide (0.54 g, 1.7 mmol) water (7.5 mL) and 50% sodium hydroxide (4.9 g, 61.2 mmol) was heated at 100°C for 16 h. The reaction mixture was diluted with a 1:1 mixture of Freon™ 113 and methylene chloride and the organic phase was separated and washed with water. The organic phase was then dried, filtered and stripped of solvent under 10 reduced pressure to give 11 g of a yellowish brown oil. This oil was then distilled under reduced pressure as follows: fraction #1 (2.1 g), distilling at 85°C/0.8 mm/Hg, was unreacted alcohol; fraction #2, distilling at 140°C/0.5 mm/Hg, was the desired product, *i.e.*, B26-FOX (6.5 g, 76%), an oil: ¹H NMR (CDCl₃): δ 2.85 (m, 4 H), 3.55 (m, 4 H), 3.80 (s, 4H), 4.40 (s, 4 H).

15

EXAMPLE V

This example illustrates the preparation and properties of mixed 3,3-bis-substituted oxetane monomers.

A 12 L, round-bottom flask fitted with a mechanical stirrer and a reflux condenser was charged with 3,3-bis-(bromomethyloxetane) (683.2 g, 2.8 moles), 20 2,2,3,3,4,4-heptafluorobutan-1-ol (580 g, 2.9 moles), trifluoroethanol (290 g, 2.9 moles), tetrabutylammonium bromide (55 g, 0.17 moles) and 1.2 L of water. The mixture was heated to 85°C and a solution of 50% aq. sodium hydroxide (320 g, 4 moles) was slowly added over a period of 4 h (6 moles). The resulting mixture was then heated at about 100°C for 16 h, and then cooled to room temperature when the organic layer was 25 separated. The organic phase was then washed with water (2 x 1000 mL), dried (MgSO₄), filtered and distilled under reduced pressure. Low boiling fractions were unreacted fluoroalcohols, while the remaining higher boiling fraction consisting of a mixture of 3,3-bis-substituted oxetanes: B6-FOX, B14-FOX and 3-(2,2,2-trifluoroethoxymethyl),3-(2,2,3,3,4,4-heptafluorobutoxymethyl)oxetane (M6-14-FOX).

30

C. PRE-POLYMERS

The first two examples illustrate that homopolymerization of bis-substituted oxetane monomers provide polyether glycols that are crystalline with melting

points greater than 20°C. It should be noted that polyether glycols produced by this process are contaminated with significant amounts of cyclic materials. Since cyclic materials can reduce the crystallinity of the polyether glycol via plasticization, complete removal of cyclic material is warranted prior to melting point determinations. Removal 5 of cyclic materials can be achieved by chromatography.

1. *Crystalline Polymers*

EXAMPLE I

This example illustrates the preparation and properties of poly[3,3-bis-(2,2,2-trifluoroethoxymethyl)oxetane] (poly(B6-FOX) glycol).

10 A 5 L round-bottom flask fitted with a mechanical stirrer, thermometer and an additional funnel was charged with a solution of trifluoroethanol (5.8 g, 0.058 mol) and boron trifluoride etherate (11.4 g, 0.81 mol) in methylene chloride (900 mL). The mixture was stirred at ambient temperature for 15 min and a solution of 3,3-bis-(2,2,2-trifluoroethoxymethyl)oxetane (1146 g, 4.1 mmol) in methylene chloride (485 mL) was 15 added over a period of about 2.5 hours. The resulting mixture was then stirred at ambient temperature for 16 h at which time ¹H NMR analysis of an aliquot indicated that the starting oxetane had been consumed. The reaction was quenched with water and the organic layer was washed with brine and 2 % aqueous HCl. Evaporation of the solvent under reduced pressure afforded 1053 g (91%) of poly[3,3-bis-(2,2,2-trifluoroethoxymethyl)]oxetane, a white waxy solid: DSC: mp 71.7°C (ΔH = 26.35 Joules/g), decomposition > 210°C; GPC (THF): M_w = 27,000, polydispersity index (PDI) = 2.2; ¹H NMR 1.60 (m), 2.46 (s), 3.36 (s, 4 H), 3.58 (s, 4 H), 3.79 (q, 4 H); ¹³C NMR 20 45.49, 68.25 (q, J = 33 Hz), 69.20, 70.97, 123.81 (q, J = 280 Hz).

EXAMPLE II

25 This example illustrates the preparation and properties of poly[3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane] (Poly(B14-FOX) glycol).

In a manner similar to that described above, a solution of 3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane (252 g, 523 mmol) in FreonTM 113 (75 mL) was added to a mixture of boron trifluoride etherate (1 g, 7.0 mmol) and 30 trifluoroethanol (0.5 g, 5.0 mmol) in methylene chloride (175 mL) at ambient temperature. The resulting mixture was stirred at ambient for 46 hours, at which time ¹H NMR analysis revealed that greater than 95% of starting oxetane monomer was

consumed. The reaction was quenched with water and the prepolymer was precipitated into methanol to give, after drying, 221 g of a colorless oil. GPC analysis revealed that the oil was a mixture of about 70% poly(B14-FOX) glycol and 30% cyclic materials.

EXAMPLE III

5 This example illustrates the preparation and properties of 3,3-bis-(1,1,2,2-tetrahydroperfluoroctylthiomethyl)-3-bromo-1-propanol (see, U.S. Patent No. 5,097,048).

10 3,3-bis-(1,1,2,2-tetrahydroperfluoro-octylthiomethyl)oxetane (7.0 g, 0.0083 mol) was charged to a three-necked flask with hydrobromic acid (48%, 3.190.018 mol) and toluene (20.0 g). The reaction was heated at 100°C under nitrogen with stirring for 4 h. The water/toluene azeotrope was then removed at 110°C. The solvent was then removed under vacuum to yield a thick brown liquid which is 99% pure by GLC. NMR showed proton resonances at 1.80 ppm, 1 proton, (-OH), 2.2-2.6 ppm, 4 protons, (2 X R₂CH₂); 2.7-2.9 ppm, 8 protons, (2 X CH₂SCH₂); 3.53 ppm, 2 protons, (CH₂Br); 3.65 ppm, protons, (CH₂OH). Analysis for CH₂₁H₁₇OS₂F₂₆Br: Calculated: C, 27.3%; H, 1.9%, Br, 8.7%, F, 53.5%, 7.0%; Found: C, 27.1%, H, 1.7%, Br, 9.1%, F, 51.5%, S, 7.1%.

2. Non-Crystalline Polymers

20 Examples I-VI illustrate the core of this invention, *i.e.*, that is the crystalline nature of the bis-substituted oxetane homopolymers can be reduced by copolymerization of the bis-substituted oxetane monomers with either a mono-substituted oxetane monomer, an asymmetrically substituted oxetane monomer or a nonfluorinated cyclic ether, such as THF. The resulting copolymers are amorphous, as indicated by the absence of crystallinity in DSC, and thus can be used as soft blocks in preparation of 25 elastomers.

30 The copolymerization can be conducted in methylene chloride or in THF (in which case THF functions as a reactive solvent). The molecular weight of the copolymer is controlled by controlling the monomer:initiator ratio. For example, a monomer:initiator ratio of 20 should theoretically lead to a polyether glycol with a degree of polymerization (DP) of 20. The initiator used in this process is butanediol; however, water and variety of other alcohols have also been used successfully as initiators. Since water also functions very efficiently as an initiator and is difficult to remove completely,

it is important to consider water as an initiator along with butanediol in molecular weight calculation. The amount of water in the monomer and solvents is easily measured by the Karl Fisher analysis. By proper molecular weight control, macro diols having between 20 and 400 chemical bonds along the main polyether backbone are obtained that are useful
5 for preparing elastomers.

The mole ratio of FOX and THF segments in the coprepolymer is easily established by ¹H NMR analysis. However, it is somewhat more difficult to determine the ratio of two FOX comonomers in the coprepolymer by ¹H NMR. However, this ratio can be established by the use of quantitative ¹³C NMR. Igated experiments allow ¹³C-
10 signals to be integrated reliably.

As described above, a preferred catalyst used in preparation of glycols is BF₃•THF, as the use of this catalyst allows for the preparation of difunctional materials. Moreover, a wide variety of initiators can be used. Such, initiators include, but are not limited to, water and those described above. In addition, a wide variety of solvents can be
15 used. Suitable solvents include, but are not limited to, THF, chlorinated solvents, fluorinated solvents, toluene, heptane, tetrahydropyran, vertrel (decafluoropentane which is commercially available from DuPont), trifluorotoluene, p-chlorotrifluorotoluene, esters, and the like. In a presently preferred embodiment, THF is used as the solvent, thereby eliminating the use of methylene chloride. Again, however, both chlorinated and
20 fluorinated solvents can be used for the polymerization reaction. Preferred temperatures for carrying out the polymerization reactions range from about 25°C to about 70°C, with higher temperatures tending to speed up the polymerization reaction.

EXAMPLE I

This example illustrates the preparation and properties of a 70:30
25 coprepolymer of 3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane and tetrahydrofuran [poly(B14-FOX/THF) (70:30) glycol].

A solution of butane-1,4-diol (328 mg, 3.64 mmol) and boron trifluoride tetrahydrofuranate (152 mg, 1.08 mmol) in tetrahydrofuran (3.1 g, 43 mmol) was stirred at 15°C for 5 min, under nitrogen, in a dry polymerization flask. Then, 3,3-bis-
30 (2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane (20.0 g, 41.5 mmol) was added, and the resulting mixture was stirred at 15°C for 24 h, at which time ¹H NMR analysis of an aliquot indicated that the starting reagents were essentially unreacted. The solution was warmed to 65°C for 3 h, at which time ¹H NMR analysis of an aliquot indicated that the

oxtane monomer was consumed. The reaction mixture was quenched with water, and the organic layer was separated and added to an equal volume of methanol. The methanol was decanted and the residual oil was dried *in vacuo* at ambient temperature to give 20.5 g (88%) of the title coprepolymer, an oil. GPC analysis revealed that the oil contained 5 less than 2% cyclic materials. The equivalent weight of this material, as determined by ¹H NMR TFAA end group analysis, was 2,879. (It is noted that in the foregoing analysis, the sample is dissolved in deuteriochloroform in an NMR tube and is treated with excess triflyoroacetic anhydride. The trifluoroacetate of the end groups is formed *in situ*. The -CH₂- group next to the alcohol is moved 0.5 ppm down field away from the alcohol and 10 can be integrated against the -CH₂- groups of the ether backbone to determine the equivalent weight.) The material was characterized as follows: DSC: T_g = -51°C, no other transitions observed; GPC: M_w = 6600, polydispersity index (PDI) = 1.7; ¹H NMR analysis showed the oil was a 71:29 mole % mixture of B14-FOX and THF co-monomers.

15

EXAMPLE II

This example illustrates the preparation and properties of a 90:10 coprepolymer of 3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane and tetrahydrofuran having a medium molecular weight [poly(B14-FOX/THF) (91:9) glycol].

20 A solution of 1,4-butanediol (79 mg, 0.87 mmol) and boron trifluoride tetrahydrofuranate (0.27 g, 1.9 mmol) in methylene chloride (20 mL) was stirred at ambient temperature for 5 min, under nitrogen, in a dry polymerization flask. Next, a solution of 3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane (83.4 g, 173 mmol) and tetrahydrofuran (2.5 g, 34.7 mmol) in FreonTM 113 (20 mL) was added and the resulting mixture was stirred at ambient temperature for 2 days. The progress of the 25 reaction was monitored by ¹H NMR and, on completion, the reaction mixture was quenched with water. The organic phase was separated and washed with water and added to an equal volume of methanol. The methanol layer was decanted and the residual oil was dried *in vacuo* at 35°C to give 72.6 g of the title coprepolymer, an oil. ¹H NMR analysis of the oil revealed that it was a 91:9 mole% mixture of two comonomers, 3,3-bis- 30 (2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane and tetrahydrofuran, respectively. The equivalent weight of the coprepolymer, as determined by ¹H NMR TFAA end group analysis, was found to be 14,950. GPC: M_w = 12,493, polydispersity index (PDI) = 1.24,

< 0.5% cyclic tetramer; DSC: $T_g = -53^\circ\text{C}$. The coprepolymer was a colorless oil that did not crystallize on storage at -20°C for about 2 months.

EXAMPLE III

This example illustrates the preparation and properties of a 90:10 coprepolymer of 3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane and tetrahydrofuran having a low molecular weight [poly(B14-FOX/THF) (90:10) glycol].

A solution of 1,4-butanediol (1.92 g, 21.3 mmol) and boron trifluoride tetrahydrofuranate (0.93 g, 6.6 mmol) in methylene chloride (4 mL) was stirred at ambient temperature for 5 min, under nitrogen, in a dry polymerization flask. Next, a solution of 3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane (100 g, 207 mmol) in FreonTM 113 (20 mL) was added and the resulting mixture was stirred at ambient temperature for 2 days. The progress of the reaction was monitored by ^1H NMR and, on completion, the reaction mixture was quenched with water. The organic phase was separated, washed with water, dried (MgSO_4), filtered and stripped of solvent under reduced pressure to give 114.9 g (97%) of the title coprepolymer, an oil. ^1H NMR analysis of the oil revealed it was a 91:9 mole% mixture of two cocomonomers, 3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane and THF, respectively. The equivalent weight of the coprepolymer, as determined by ^1H NMR TFAA end group analysis, was 1,950: GPC: $M_w = 4175$, polydispersity index (PDI) = 1.24; DSC: $T_g = -53^\circ\text{C}$. The coprepolymer was an oil and did not crystallize when stored at -20°C for about 5 weeks.

EXAMPLE IV

This example illustrates the preparation and properties of a 50:50 coprepolymer of 3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane and 3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-3-methyloxetane [poly(B14/7-FOX) (50:50) glycol].

A solution of butane-1,4-diol (791 mg, 8.8 mmol) and boron trifluoride tetrahydrofuranate (373 mg, 2.66 mmol) in methylene chloride (40 mL) was stirred at ambient temperature for 5 min, under nitrogen, in a dry polymerization flask. Then, 3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-3-methyloxetane (21.5 g, 75.7 mmol) and 3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane (35.6 g, 73.8 mmol) in FreonTM 113 (20 g) was added in bulk, and the resultant mixture was stirred for 64 h at ambient temperature, at which time ^1H NMR analysis of an aliquot indicated that the starting

reagents were essentially consumed. The mixture was quenched with an equal volume of water containing 10% sodium bicarbonate. The organic layer was separated and washed sequentially with aqueous sodium bicarbonate, water and saturated brine solution. The residue was evaporated *in vacuo* at 50°C to give a colorless oil. The oil was stirred for 16 h with hexane (75 mL), the hexane layer was decanted and the oil dried *in vacuo* at 50°C to give 45 g (79%) of poly(B14/7-FOX) (50:50) glycol, an oil. ^{13}C NMR analysis (Igated) revealed that the oil was a 50:50 mole% mixture of B14-FOX and 7-FOX comonomers. The equivalent weight of the coprepolymer, as determined by ^1H NMR TFAA analysis, was 2,650. The coprepolymer was characterized as follows: DSC: T_g - 51°C; GPC: M_w = 5,673 polydispersity index (PDI) = 1.7, ^{13}C NMR: quaternary carbons observed at 41.41 and 46.05; ^{19}F NMR: -82.02, -121.37, and -128.52.

The coprepolymer was an oil that did not crystallize on extended storage (about 2 months) at -20°C. DSC analysis also revealed that other than glass transition temperature (-52°C), no other transitions were observed in the temperature range of -80 to 150°C.

EXAMPLE V

This example illustrates the preparation and properties of a 80:20 coprepolymer of 3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane and 3-heptafluorobutoxymethyl-3-methyloxetane [poly(B14/7-FOX) (80:20) glycol].

A solution of 1,4-butanediol (0.55 g, 6.1 mmol) and boron trifluoride tetrahydrofuranate (0.26 g, 1.85 mmol) in methylene chloride (30 mL) was stirred at ambient temperature for 5 min, under nitrogen, in a dry polymerization flask. Next, a solution of 3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane (40.0 g, 82.9 mmol) and 3-heptafluorobutoxymethyl-3-methyloxetane (5.9 g, 20.7 mmol) in FreonTM 113 (10.5 mL) was added and the resulting mixture was stirred at ambient temperature for 4 days and at 35°C for 16 h. The progress of the reaction was monitored by ^1H NMR and, on completion, the reaction mixture was quenched with water. The organic phase was separated and washed with equal volumes of water, dried (MgSO_4), filtered, and stripped of solvent under reduced pressure to provide 42.4 (91%) of the title coprepolymer, an oil: DSC: T_g -40°C, no other transitions observed; GPC: M_w = 4,200, polydispersity index (PDI) = 1.25; ^1H NMR (TFAA analysis): equivalent weight = 2,050. The ratio of the two comonomers, 3,3-bis-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-3-methyloxetane and

3-heptafluoro-butoxymethyl)-3-methyloxetane, was determined to be 79:21 mole% by ^{13}C NMR (Igated) analysis.

EXAMPLE VI

This example illustrates the preparation and properties of a 80:20 coprepolymer of 3,3-bis-(2,2,2-trifluoroethoxymethyl)oxetane and 3-trifluoroethoxymethyl-3-methyloxetane [poly(B6/3-FOX) glycol].

A solution of 1,4-butanediol (5.5 g, 61 mmoles) and boron trifluoride tetrahydrofuranate (2.5 g, 18.6 mmoles) in methylene chloride (150 mL) was stirred at ambient temperature for 15 mins. Next, a solution of 3,3-bis(2,2,2-trifluoroethoxymethyl)oxetane (227 g, 805 mmol) and 3-trifluoroethoxymethyl-3-methyloxetane (38.3 g, 208 mmol) in FreonTM 113 (30 mL) was added, and the resulting mixture was stirred at ambient temperature for 1 day and at reflux for 2 days. The progress of the reaction was monitored by ^1H NMR and, on completion, the reaction mixture was quenched with water. The organic phase was separated and washed with water, dried (MgSO_4), filtered and stripped of solvent under reduced pressure to give 253 g (95%) of the title coprepolymer, a colorless oil. The ratio of two co-monomeric units, 3,3-bis(2,2,2-trifluoroethoxymethyl)oxetane and 3-trifluoroethoxymethyl-3-methyloxetane, was determined to be 82:18 mole% by ^{13}C NMR (Igated) analysis. The equivalent weight, as determined by ^1H NMR TFAA analysis, was found to be 2,164.

EXAMPLE VII

This example illustrates the preparation and polymerization of a 70:30 coprepolymer of M6-14-FOX and tetrahydrofuran [poly(M6-14-FOX/THF) (70:30) glycol].

A solution of butane-1,4-diol (3.6 mmol) and boron trifluoroide tetrahydrofuranate (1.08 mmol) in 3.1 g of tetrahydrofuran was stirred at 15°C for 5 min, under dry nitrogen, in a polymerization flask. M6-14-FOX (20.0 g) was added to the mixture and stirred at 15°C for 2.5 h, then heated to 65°C for 3 h. ^1H NMR analysis of an aliquot indicated that the monomers were consumed. The reaction was quenched with an excess of water, the organic layer was separated and the coprepolymer separated by addition of an equal volume of methanol. After separating the methanol, the residual polymer oil was vacuum dried. GPC analysis revealed less than 2% cyclic materials. The equivalent weight of the glycol, as determined by ^1H NMR TFAA end group

analysis, was 3,000. The material exhibited a T_g of -52°C and no other transitions. GPC showed a polydispersity index (PDI) of 1.8.

3. *Exemplar Copolymers*

Using the methods described herein, bis-substituted FOX monomers were 5 copolymerized with mono-substituted FOX monomers and THF. Exemplar copolymers are set forth in Table 3.

Table 3. Copolymerization of Bis-substituted oxetane monomers

Monomer A	Monomer B	Feed A:B Ratio (mole)	Mole Ratio (A:B) in Copolymer	M_w (GPC)	Yield
B14-FOX	THF	46:54	71:29	6,600	88%
B14-FOX	THF	69:31	91:9	12,493	85%
B14-FOX	THF	88:12	91:9	4,175	97%
B14-FOX	7-FOX	80:20	80:20	4,100	91%
B14-FOX	7-FOX	50:50	50:50	5,673	79%

The properties and characteristics of the various copolymers were studied. As set forth in Table 4, both the copolymers formed from bis- and mono-10 substituted FOX monomers and from bis-substituted FOX monomers and THF are non-crystalline, *i.e.*, they are amorphous oils.

Table 4. Poly(FOX) Glycols Based on Bis-Substituted Oxetanes

	B6-FOX	B14-FOX	B14/7-FOX	B14/7-FOX	B14/THF	B14/THF	B14/THF
Ratio of Comonomers	100	100	50:50	80:20	71:29	91:9	91:9
Physical State	Wax	Wax	Oil	Oil	Oil	Oil	Oil
Eq. Wt. (NMR)	-	-	2,650	2,052		1,950	7,474
GPC: M_w	27,071	9,047	5,673	4,175		3,811	12,493
M_w/M_n	2.2	1.4	1.73	1.25		1.27	1.24
DCA: θ_{adv}	104.0	-	-	-	-	-	-
θ_{rec}	89.3	-	-	-	-	-	-
DSC mp °C	71.7°C		ND*	ND*	ND*	ND*	ND*
ΔH_m	26.3 J/gm		ND*	ND*	ND*	ND*	ND*
T _g °C	-39		-52	-49	-51	-53	-53

* Not Determined.

D. POLYURETHANES

EXAMPLE I

5 This example illustrates the preparation and properties of a thermoplastic polyurethane prepared from poly(B14/7-FOX) (50:50) glycol.

A 50 mL three-necked flask was dried under argon and charged with poly(B14/7-FOX) (50:50) glycol (3.42 g, 1.28 mmol, equivalent weight 2650), IPDI (464 mg, 4.05 mmol), LV-33/T12 catalyst in THF (62 mg), and THF (5 mL). The mixture was 10 heated to reflux for 3.5 h, and then 1,4-butanediol (BDO) (111 mg, 2.47 m equiv) dissolved in THF (0.5 mL) and DMAC (1.5 mL) was added. The heating was continued for 3 h and the mixture was cooled to ambient temperature. The solution was used to dip coat glass slides. The slides were dried in an oven at 65°C to give a smooth, colorless, tack-free coating. The coatings were analyzed by DCA and were found to exhibit an 15 advancing contact angle of 127 degree and a receding contact angle of 41 degrees with water. The polyurethane was isolated by precipitating the polymer solution in methanol and collecting the precipitated material by filtration. The filtered material was dried in a

vacuum oven at 40°C for 16 h to give 3.72 g (86%) of the title polymer, a tack-free elastomer: GPC: $M_w = 25,532$, polydispersity index (PDI) = 3.1; DSC: $T_g = -47^\circ\text{C}$.

EXAMPLE II

5 This example illustrates the preparation and properties of a thermoplastic polyurethane prepared from poly(M6-14-FOX/THF) (70:30) glycol.

A 100 mL three-necked flask was dried under argon and charged with 38.76 mmol of MDI and 10 mL DMAc. The mixture was heated to 60°C and a solution of poly(M6-14-FOX/THF) (70:30) glycol (3.1 mmol) and dibutyltin dilaurate catalyst (48 mg) dissolved in 10 mL of THF was added. After reacting at 60°C for 2 h, 10 34.86 mmol of 1,4 butanediol in 1 mL THF was added. 10 mL DMAc was added and the reaction was continued for 20 h at 65°C. After cooling to room temperature, 400 mL methanol was added to precipitate the polymer which was collected and dried. The polyurethane elastomer was dissolved as a 10 wt. % solution in DMAc and used to coat various substrates to give elastomeric tack-free castings. GPC analysis gave a M_w of 15 about 85,000 and a polydispersity index (PDI) of 2.4. DSC showed a T_g at -50°C and melting point of the hard segment at 200°C to 230°C. DCA(H₂O): $\theta_{\text{adv}} = 120$ deg, $\theta_{\text{rec}} = 68$ deg.

The increase in M_w as measured by GPC from $M_w = 5,600$ to 25,500 shows that there is hydroxyl functionality on at least 85% of the chain ends.

EXAMPLE III

20 This example illustrates the preparation and properties of a thermoplastic polyurethane prepared from poly(B14/7-FOX) (80:20) glycol.

A 100 mL three-necked flask was dried under argon and charged with MDI (4.923 g, 38.76 mmol) and DMAc (10 mL). The mixture was heated to 65°C and a 25 solution of 80:20 poly(B14/7-FOX) glycol (6.4 g, 3.1 mmol, equivalent weight 2,052) and dibutyltin dilaurate catalyst (48 mg) dissolved in THF (10 mL) was added. The mixture was heated at 65°C for 1.5 h and treated with a solution of 1,4-butanediol (1.571 g, 34.86 mmol) in THF (1.0 mL). DMAc was added and the resulting mixture was heated at 65°C for 20 h. The reaction mixture was cooled to ambient temperature and 30 added to methanol (400 mL). The precipitated polymer was collected by filtration and dried in a vacuum oven at 40°C/30 mm/Hg/16 h to give 10.9 g (85%) of the title polyurethane, a white elastomer. The polyurethane elastomer was dissolved in DMAc

(10% wt.) and the resulting lacquer was used for coating applications. Substrates, such as wood, glass, leather, rubber (EPDM rubber), fiber glass, stainless steel (304 and 316 SS), aluminum and fabrics, were coated with this solution and placed in an oven at 65° for 16 h. The resulting coatings were tack-free and elastomeric. The polyurethane was 5 characterized as follows: DCA (H₂O): $\theta_{adv} = 116$ deg, $\theta_{rec} = 68$ deg; Surface Energy: 11.7 dynes/cm; GPC: $M_w = 83,657$, polydispersity index (PDI) = 2.34; DSC: $T_g = -47^\circ\text{C}$, melting endotherms at 208 and 225°C.

The increase in M_w as measured by GPC from $M_w = 4,200$ to 84,000 shows that there is hydroxyl functionality on at least 95% of the chain ends.

10

EXAMPLE IV

This example illustrates the preparation of a thermoset polyurethane elastomer prepared from poly(B14/7-Fox) (80:20) glycol.

Poly(B14/7-Fox) (80:20) glycol (12.8 g, 6.2 meq, equivalent weight = 2,052) was mixed with ISONOL-93 (1.08 g, 12.4 meq), and dibutyltin dilaurate (2 mg) in 15 a beaker at 60 °C. Des-W (2.60 g, 19.8 meq) was added and the mixing was continued at 60 °C for 15 mins, after which the contents were transferred into a TEFLON™ mold. The mold was placed in a vacuum oven and degassed (100 °C at 29 inch vacuum for 30 mins). The mixture was then cured at 65 °C for 46 h to give a tack free elastomer.

EXAMPLE V

This example illustrates the preparation of a thermoset polyurethane elastomer prepared from poly(B14/7-FOX) (50:50) glycol.

Poly(B14/7-FOX) (50:50) glycol (13.68 g, 5.16 meq, equivalent weight = 2,650) was mixed with ISONOL-93 (0.90 g, 10.3 meq), and dibutyltin dilaurate (3 mg) in a beaker at 60°C. Des-W (2.13 g, 16.2 meq) was added and the mixing was continued at 25 65°C for 10 mins, after which the contents were transferred into a TEFLON™ mold. The mold was placed in a vacuum oven and degassed (100°C at 29 inch vacuum for 30 mins). The mixture was then cured at 65 °C for 36 h to give a tack-free elastomer.

EXAMPLE VI

This example illustrates the preparation and preparation of a thermoset polyurethane elastomer from poly(B14-FOX/THF) (90:10) glycol.

A 500 mL round-bottom three-necked flask was dried and assembled under argon with a condenser, thermacouple probe and magnetic stirring. The apparatus was charged sequentially with anhydrous dichloromethane (80 mL), 1,4-butanediol (1.9196 g, 21.3 mmol), boron trifluoride tetrahydrofuranate (0.9289 g, 6.64 mmol), and 3,3-bis(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane (118.20 g, 0.245 mol) in FreonTM 113 (40 mL). The solution was stirred at ambient temperature for 48 h at which time proton NMR analysis indicated that 95% of the monomer had been consumed. The reaction was quenched with aqueous sodium carbonate (50 mL), separated, and the organic phase was washed with aqueous hydrochloric acid (10%, 2 x 75 mL), water and brine. The organic solution was dried with magnesium sulfate and evaporated *in vacuo* to give 111.8 g (95%) of the prepolymer as a clear liquid. The crude polymer was found to have a molecular weight of 4,050 and M_w/M_n of 1.25 by GPC and to contain less than 10% of low molecular weight oligomers. Proton NMR analysis showed the ratio of oxetane to tetrahydrofuran was 9.6 mole%. The equivalent weight was 1,948. 1H NMR 1.67 (s, 0.04 H), 1.85 (m, 0.03 H), 2.2 (m, 0.03 H), 3.44 (s, 4 H), 3.63 (m, 4 H), 3.88 (m, 4 H).

20

EXAMPLE VII

This example illustrates exemplar properties of the polyurethanes of the present invention. More particularly, Table 5 sets forth the properties of the polyurethanes prepared from the copolymers of the present invention.

Table 5. Polyurethanes from copolymers

	B14/7-FOX	B14/7-FOX	B14/THF
Ratio of comonomers	50:50	80:20	91:9
Curative	IPDI/BDO	MDI/BDO	MDI/BDO
State	Elastomer	Elastomer	Elastomer
% Hard Segment	15%	50%	50%
GPC: M_w	25,532	83,657	22,656
M_w/M_n	3.1	2.34	2.36
DCA: θ_{adv}	126	116.2	115.9
θ_{rec}	41	67.5	68.4
Surface Energy	9.8 dynes/cm	11.7 dynes/cm	—
DSC T_g °C	-47	-47 & +105.4	-51 & +113
MP °C	ND*	208 and 225	188
ΔH_m (J/g)	ND*	36.1	ND*

* Not Determined.

E. STRUCTURE

Table 6 sets forth the ^{13}C NMR comparison of homo- and copolymers prepared using mono- and bis-substituted oxetanes. In addition, the copolymer of 7-FOX and B14-FOX was subjected to quantitative carbon (^{13}C) NMR spectroscopy using Igated decoupling techniques (see, Table 7). The quaternary carbons at 41.41 bearing one fluorinated group and a methyl group and at 46.05 due to the bis-fluorinated substituants were integrated and found to correspond to a ratio of 50.6 to 49.4. This is the correct ratio based on the monomer feeds for the copolymer. The signals from the quaternary carbons in the copolymers also appear as triads as expected for a random copolymer in which each one of two dissimilar monomers may appear adjacent to either similar to dissimilar monomers in the polymer backbone resulting from arrangements of AAB, BAB or AAA.

Table 6. ¹³C NMR Comparison of Homo- and Copolymers of Mono- and Bis-substituted Oxetanes

Prepolymer	Quaternary	-CH ₃	-CH ₂ -Rf	Other
Carbons				
Poly-7-FOX	41.77	17.22	68.68	74.30, 75.95
Poly B14-FOX	46.24	-	68.45	70.0, 71.95
Copoly 7/B14-FOX	41.41 & 46.05	17.04	68.30	Many peaks


Table 7. Igated ¹³C NMR Experiments of B14- and 7-FOX Copolymers

Copolymer	Wt. % of Monomers in Feed	Wt. % Found in Product by Igated ¹³ C NMR
B14/7-FOX	50:50	50.6:49.4
B14/7-FOX	80:20	79.4:20.6

It is to be understood that the above description is intended to be
 5 illustrative and not restrictive. Many embodiments will be apparent to those of skill in the
 art upon reading the above description. The scope of the invention should, therefore, be
 determined not with reference to the above description, but should instead be determined
 with reference to the appended claims, along with the full scope of equivalents to which
 such claims are entitled. The disclosures of all articles and references, including patent
 10 applications and publications, are incorporated herein by reference for all purposes.

WHAT IS CLAIMED IS:

1 1. A hydroxy-terminated FOX prepolymer comprising a monomeric
2 unit having the general formula:

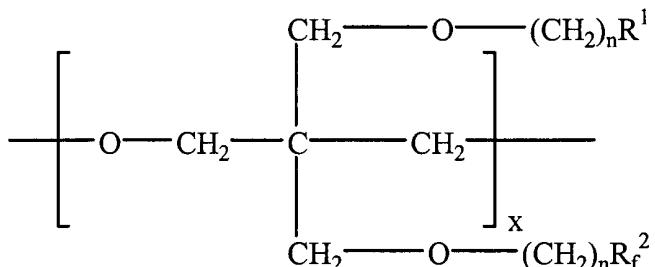

3 wherein:

5 each n is independently selected and is 1 to 3;

6 R_f^1 and R_f^2 are independently selected from the group consisting of linear
7 perfluorinated alkyls, linear perfluorinated isoalkyls, branched chain perfluorinated
8 alkyols, branched perfluorinated isoalkyls, said perfluorinated alkyls and isoalkyls having
9 from 1 to about 20 carbon atoms, and oxaperfluorinated polyethers having from 4 to
10 about 60 carbon atoms; and

11 x is 1 to about 250;

12 with the proviso that R_f^1 and R_f^2 are different.

1 2. A hydroxy-terminated FOX prepolymer in accordance with
2 claim 1, wherein R_f^1 and R_f^2 are both linear perfluorinated alkyls.

1 3. A hydroxy-terminated FOX prepolymer in accordance with claim
2 2, wherein said FOX prepolymer is poly(3-(2,2,2-trifluoroethoxymethyl)-3-(2,2,3,3,4,-
3 4,4-heptafluorobutoxymethyl)oxetane).

1 4. A hydroxy-terminated FOX prepolymer in accordance with claim
2 2, wherein said FOX prepolymer is poly(3-(2,2,2-trifluoroethoxymethyl)-3-(3,3,4,4,5,5,-
3 6,6,7,7,8,8-trifluorooctyloxymethyl)oxetane).



1 5. A hydroxy-terminated FOX prepolymer in accordance with
2 claim 2, wherein said FOX prepolymer is poly(3-(2,2,3,3,4,4,4-heptafluorobutoxy-
3 methyl)-3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluorooctyloxymethyl)oxetane).

1 6. A hydroxy-terminated FOX prepolymer in accordance with
 2 claim 2, wherein said FOX prepolymer is poly(3-(2,2,2-trifluoroethoxymethyl)-3-
 3 (3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10,10-heptadecafluorodecyloxymethyl)oxetane).

1 7. A hydroxy-terminated FOX prepolymer in accordance with
 2 claim 2, wherein said FOX prepolymer is poly(3-(2,2,3,3,4,4,4-heptafluorobutoxy-
 3 methyl)-3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10,11,11,12,12,12-heneicosfluorododecyloxy-
 4 methyl)oxetane).

1 8. A hydroxy-terminated FOX prepolymer in accordance with
 2 claim 2, wherein x is from about 10 to about 50.

1 9. A hydroxy-terminated FOX copolymer comprising a mixture of
 2 monomeric units having the general formulae:

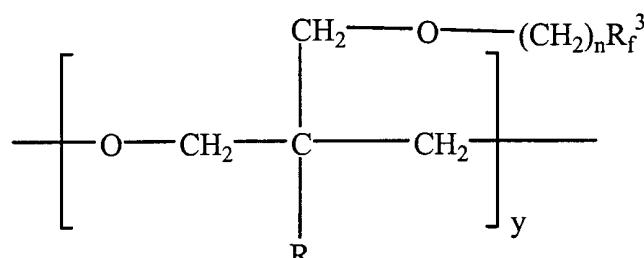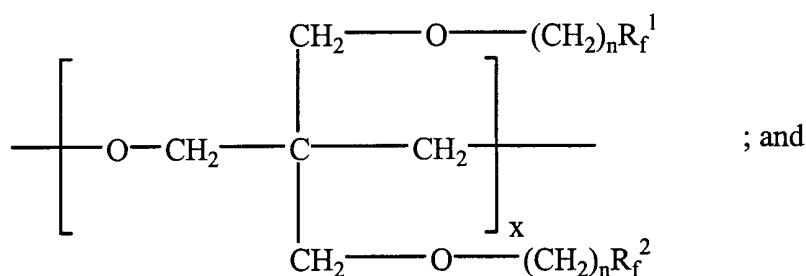

3
 4 wherein:

5 each n is independently selected and is 1 to 3;

6 R is selected from the group consisting of methyl and ethyl;

7 R_f^1 , R_f^2 and R_f^3 are independently selected from the group consisting of
 8 linear fluorinated alkyls, linear fluorinated isoalkyls, branched chain fluorinated alkyls,
 9 branched fluorinated isoalkyls, said fluorinated alkyls and isoalkyls having from 1 to 20
 10 carbon atoms, and oxaperfluorinated polyethers having from 4 to about 60 carbon atoms;

11 x is 1 to about 250; and

12 y is 1 to about 250.

1 10. A hydroxy-terminated FOX prepolymer in accordance with
2 claim 9, wherein R_f¹, R_f² and R_f³ are linear perfluorinated alkyls.

1 11. A hydroxy-terminated FOX coprepolymer in accordance with
2 claim 9, wherein R_f¹ and R_f² are the same.

1 12. A hydroxy-terminated FOX coprepolymer in accordance with
2 claim 9, wherein R_f¹ and R_f² are different.

1 13. A hydroxy-terminated FOX coprepolymer in accordance with
2 claim 9, wherein said hydroxy-terminated FOX coprepolymer is produced from the
3 polymerization of at least one bis-substituted FOX monomer selected from the group
4 consisting of 3,3-(2,2,2-trifluoroethoxymethyl)oxetane, 3,3-(2,2,3,3,4,4,4-heptafluoro-
5 butoxymethyl)oxetane, 3,3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluoroctyloxy-
6 methyl)oxetane, 3,3-(3,3,4,4,5,5,6,6,7,7,8,8,8-trideca-fluoroctyloxymethyl)oxetane,
7 3,3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10,10-heptadecafluorodecyloxymethyl)oxetane,
8 3,3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10,11,11,12,12,12-heneicosfluorododecyloxy-
9 methyl)oxetane, 3-(2,2,2-trifluoroethoxymethyl)-3-(2,2,3,3,4,4,4-heptafluorobutoxy-
10 methyl)oxetane and 3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-3-(2,2,3,3,4,4,5,5,6,6,7,-
11 7,8,8,8-pentadecafluoroctyloxymethyl)oxetane, with at least one mono-substituted FOX
12 monomer selected from the group consisting of 3-(2,2,2-trifluoroethoxy-
13 methyl)-3-methyloxetane, 3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-3-methyloxetane,
14 3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluoroctyloxymethyl)-3-methyloxetane,
15 3-(3,3,4,4,5,5,6,6,7,7,8,8,8-tridecafluoroctyloxymethyl)-3-methyloxetane,
16 3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10-heptadecafluorodecyloxy-
17 methyl)-3-methyloxetane, and 3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,-10,10,11,11,12,12,12-
18 heneicosfluorododecyloxymethyl)-3-methyloxetane.

1 14. A hydroxy-terminated FOX coprepolymer in accordance with
2 claim 13, wherein said bis-substituted FOX monomer is 3,3-(2,2,3,3,4,4,4-heptafluoro-
3 butoxymethyl)oxetane, and said mono-substituted FOX monomer is 3-(2,2,3,3,4,4,4-
4 heptafluorobutoxymethyl)-3-methyloxetane.



1 15. A hydroxy-terminated FOX coprepolymer in accordance with
2 claim 13, wherein said bis-substituted FOX monomer is 3,3-(2,2,3,3,4,4,4-heptafluoro-

3 butoxymethyl)oxetane, and said mono-substituted FOX monomer is 3-(2,2,2-trifluoro-
4 ethoxymethyl)-3-methyloxetane.

1 16. A hydroxy-terminated FOX copolymer in accordance with
2 claim 13, wherein said bis-substituted FOX monomer is 3,3-(2,2,2-trifluoroethoxy-
3 methyl)oxetane, and said mono-substituted FOX monomer is 3-(2,2,2-trifluoroethoxy-
4 methyl)-3-methyloxetane.

1 17. A hydroxy-terminated FOX copolymer in accordance with
2 claim 9, wherein the ratio of said bis-substituted FOX monomer to said mono-substituted
3 FOX monomer is in the range of from about 50:50 to about 95:5.

1 18. A hydroxy-terminated FOX/THF copolymer comprising a
2 mixture of monomeric units having the general formulae:

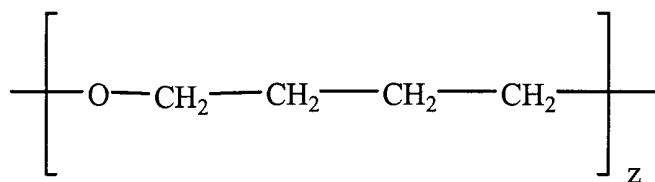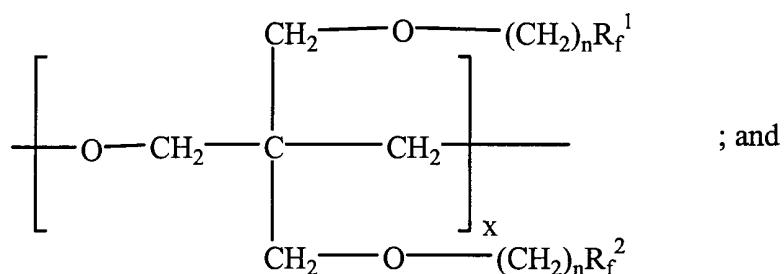

3 wherein:

4 5 n is independently selected and is 1 to 3;

6 R_f^1 and R_f^2 are independently selected from the group consisting of linear
7 perfluorinated alkyl groups having 1-20 carbons, branched perfluorinated alkyl groups
8 having 1-20 carbons and oxaperfluorinated polyethers having from about 4-60 carbons;

9 x is 1-250; and

10 z is 1-250.

1 19. A FOX/THF prepolymer in accordance with claim 18, wherein R_f^1
2 and R_f^2 are linear perfluorinated alkyls.

1 20. A FOX/THF coprepolymer in accordance with claim 18, wherein
2 R_f¹ and R_f² are the same.

1 21. A FOX/THF coprepolymer coprepolymer in accordance with claim
2 18, wherein R_f¹ and R_f² are different.

1 22. A FOX/THF coprepolymer in accordance with claim 18 having a
2 polydispersity in the range of 1.1 to 2.5, and ranging in number average molecular weight
3 from about 2,000 to 15,000.

1 23. A FOX/THF coprepolymer in accordance with claim 18, wherein
2 said FOX/THF coprepolymer is produced from the polymerization of tetrahydrofuran
3 with at least one bis-substituted FOX monomer selected from the group consisting of
4 3,3-(2,2,2-trifluoroethoxymethyl)oxetane, 3,3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-
5 oxetane, 3,3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8, 8-pentadecafluoroctyloxymethyl)oxetane,
6 3,3-(3,3,4,4,5,5,6,6,7,7,8,8,8-tridecafluoroctyloxymethyl)oxetane, 3,3-(3,3,4,4,5,5,6,
7 6,7,7,8,8,9,9,10,10,10-heptadecafluorodecyloxymethyl)oxetane, 3,3-(3,3,4,4,5,5,6,6,7,-
8 7,8,8,9,9,10,10,11,11,12,12-heneicosfluorododecyloxymethyl)oxetane, 3-(2,2,2-tri-
9 fluoroethoxymethyl)-3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane and 3-(2,2,3,3,4,-
10 4,4-heptafluorobutoxymethyl)-3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluoroctyloxy-
11 methyl)oxetane




1 24. A FOX/THF coprepolymer in accordance with claim 23, wherein
2 said bis-substituted FOX monomer is 3,3-(2,2,2-trifluoroethoxymethyl)oxetane.

1 25. A FOX/THF coprepolymer in accordance with claim 23, wherein
2 said bis-substituted FOX monomer is 3,3-(2,2,3,3,4,4,4-heptafluorobutoxy-
3 methyl)oxetane.

1 26. A FOX/THF coprepolymer in accordance with claim 23, wherein
2 said bis-substituted FOX monomer is 3-(2,2,2-trifluoroethoxymethyl)-3-(2,2,3,3,4,4,4-
3 heptafluorobutoxymethyl)oxetane.

1 27. A FOX/THF coprepolymer in accordance with claim 18, wherein
2 the ratio of FOX monomer to THF monomer is in the range of from about 1:99 to about
3 99:1.

1 28. A hydroxy-terminated FOX/THF coprepolymer comprising a
 2 mixture of monomeric units having the general formulae:

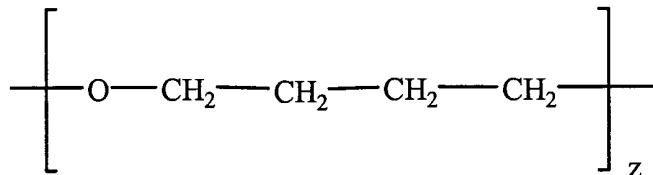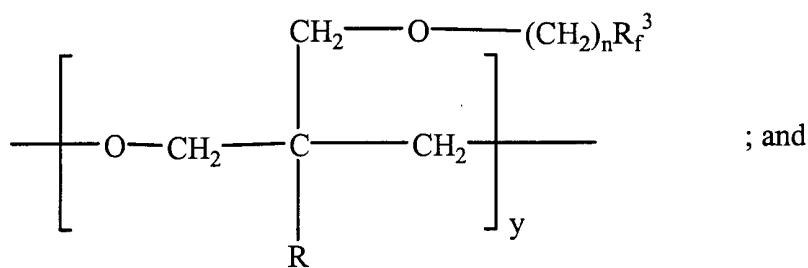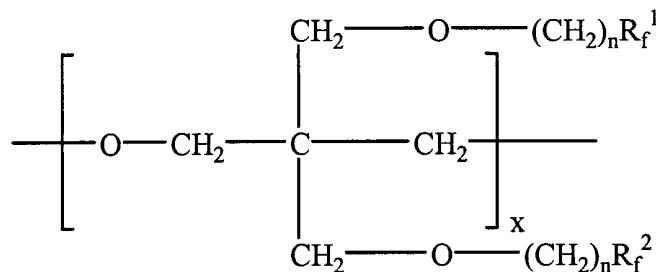

3 wherein:

4 5 each n is independently selected and is 1 to 3;

6 R is selected from the group consisting of methyl and ethyl;

7 R_f¹, R_f² and R_f³ are independently selected from the group consisting of
 8 linear perfluorinated alkyl groups having 1-20 carbons, branched perfluorinated alkyl
 9 groups having 1-20 carbons and oxaperfluorinated polyethers having from about 4-60
 10 carbons;

11 x is 1-250;

12 y is 1-250; and

13 z is 1-250.

1 29. A FOX/THF prepolymer in accordance with claim 28, wherein R_f¹,
 2 R_f² and R_f³ are linear perfluorinated alkyls.

1 30. A FOX/THF coprepolymer in accordance with claim **28**, wherein
2 R_f¹ and R_f² are the same.

1 31. A FOX/THF coprepolymer coprepolymer in accordance with claim
2 **28**, wherein R_f¹ and R_f² are different.

1 32. A FOX/THF coprepolymer in accordance with claim **28** having a
2 polydispersity in the range of 1.1 to 2.5, and ranging in number average molecular weight
3 from about 2,000 to 15,000.

1 33. A FOX/THF coprepolymer in accordance with claim **28**, wherein
2 said FOX/THF coprepolymer is produced from the polymerization of tetrahydrofuran
3 with at least one bis-substituted FOX monomer selected from the group consisting of
4 3,3-(2,2,2-trifluoroethoxymethyl)oxetane, 3,3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-
5 oxetane, 3,3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluorooctyloxymethyl)oxetane,
6 3,3-(3,3,4,4,5,5,6,6,7,7,8,8,8-tridecafluorooctyloxymethyl)oxetane, 3,3-(3,3,4,4,5,5,6,
7 6,7,7,8,8,9,9,10,10-heptadecafluorodecyloxymethyl)oxetane, 3,3-(3,3,4,4,5,5,6,6,7,-
8 7,8,8,9,9,10,10,11,11,12,12-heneicosfluorododecyloxymethyl)oxetane, 3-(2,2,2-tri-
9 fluoroethoxymethyl)-3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane and 3-(2,2,3,3,4,-
10 4,4-heptafluorobutoxymethyl)-3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluorooctyloxy-
11 methyl)oxetane, and at least one mono-substituted FOX monomer selected from the
12 group consisting of selected from the group consisting of 3-(2,2,2-trifluoroethoxy-
13 methyl)-3-methyloxetane, 3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-3-methyloxetane,
14 3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluorooctyloxymethyl)-3-methyloxetane,
15 3-(3,3,4,4,5,5,6,6,7,7,8,8,8-tridecafluorooctyloxymethyl)-3-methyloxetane, 3-(3,3,4,4,-
16 5,5,6,6,7,7,8,8,9,9,10,10,10-heptadecafluorodecyloxymethyl)-3-methyloxetane, and
17 3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10,11,11,12,12-heneicosfluorododecyloxy-
18 methyl)-3-methyloxetane.

1 34. A FOX/THF coprepolymer in accordance with claim **33**, wherein
2 said bis-substituted FOX monomer is 3,3-(2,2,2-trifluoroethoxymethyl)oxetane.

1 35. A FOX/THF coprepolymer in accordance with claim **33**, wherein
2 said bis-substituted FOX monomer is 3,3-(2,2,3,3,4,4,4-heptafluorobutoxy-
3 methyl)oxetane.



1 36. A FOX/THF coprepolymer in accordance with claim 33, wherein
2 said bis-substituted FOX monomer is 3-(2,2,2-trifluoroethoxymethyl)-3-(2,2,3,3,4,4,4-
3 heptafluorobutoxymethyl)oxetane.

1 37. A FOX/THF coprepolymer in accordance with claim 33, wherein
2 said mono-substituted FOX monomer is 3-(2,2,3,3,4,4,4-heptafluorobutoxy-
3 methyl)-3-methyloxetane.

1 38. A FOX/THF coprepolymer in accordance with claim 33, wherein
2 said mono-substituted FOX monomer is 3-(2,2,2-trifluoroethoxymethyl)-3-methyl-
3 oxetane.

1 39. A FOX/THF coprepolymer in accordance with claim 28, wherein
2 the ratio of FOX monomer to THF monomer is in the range of from about 1:99 to about
3 99:1.

1 40. A fluorinated polyurethane elastomer comprising a mixture of
2 monomeric units having the general formulae:

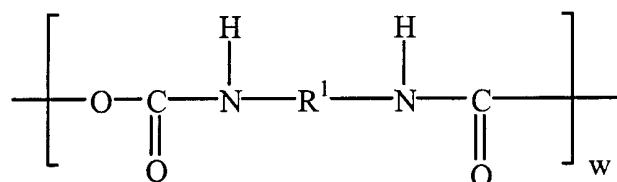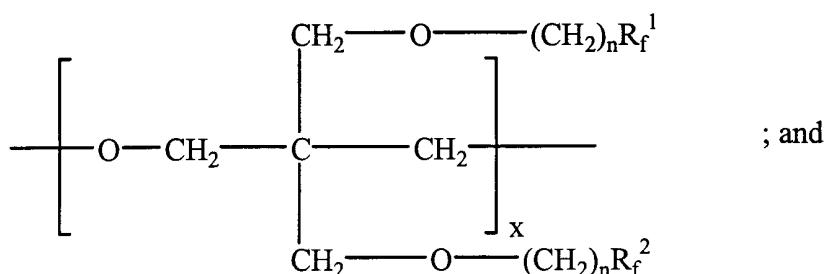

4 wherein:

5 n is independently selected and is 1 to 3;

6 R_f^1 and R_f^2 are independently selected from the group consisting of linear
7 and branched perfluorinated alkyls having 1-20 carbon atoms, and oxaperfluorinated
8 polyethers having from about 4-20 carbon atoms;

9 R¹ is a divalent hydrocarbyl radical;
10 x is 1-250; and
11 w is 1-50;
12 with the proviso that R_f¹ and R_f² are different.

1 41. A fluorinated polyurethane elastomer in accordance with claim 40,
2 wherein R_f¹ and R_f² are linear perfluorinated alkyls.

1 42. A fluorinated polyurethane elastomer in accordance with claim 40,
2 wherein said isocyanate segment is selected from the group consisting of hexamethylene
3 diisocyanate (HDI), isopherone diisocyanate (IPDI), 4,4-methylene diphenylisocyanate
4 (MDI), polymeric MDI (Isonates), toluene diisocyanates, saturated MDI (HMDI),
5 polymeric HDI (N-100 and N-3200), trimethylhexane diisocyanate and mixtures thereof.

1 43. A fluorinated polyurethane elastomer in accordance with claim 40,
2 wherein the fluorinated polyether segment is produced from at least one bis-substituted
3 FOX monomer selected from the group consisting of 3-(2,2,2-trifluoroethoxymethyl)-3-
4 (2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane, 3-(2,2,2-trifluoroethoxymethyl)-3-
5 (3,3,4,4,5,5,6,6,7,7,8,8,8-trifluoroctyloxymethyl)oxetane, 3-(2,2,3,3,4,4,4-heptafluoro-
6 butoxymethyl)-3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluoroctyloxymethyl)oxetane,
7 3-(2,2,2-trifluoroethoxymethyl)-3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10,10-heptadecafluoro-
8 decyloxymethyl)oxetane and 3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-3-(3,3,4,4,5,5,-
9 6,6,7,7,8,8,9,9,10,10,11,11,12,12,12-heneicosafluorododecyloxymethyl)oxetane.

1 44. A fluorinated polyurethane elastomer in accordance with claim 43,
2 wherein said bis-substituted FOX monomer is 3-(2,2,2-trifluoroethoxymethyl)-3-
3 (2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane 3,3-(2,2,2-trifluoroethoxymethyl)-
4 oxetane.




1 45. A fluorinated polyurethane elastomer in accordance with claim 43,
2 wherein said bis-substituted FOX monomer is 3-(2,2,2-trifluoroethoxymethyl)-3-
3 (3,3,4,4,5,5,6,6,7,7,8,8,8-trifluoroctyloxymethyl)oxetane.

1 46. A fluorinated polyurethane elastomer in accordance with claim 43,
2 wherein said bis-substituted FOX monomer is 3-(2,2,3,3,4,4,4-heptafluorobutoxy-
3 methyl)-3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluoroctyloxymethyl)oxetane.

1 47. A fluorinated polyurethane elastomer in accordance with claim 40,
 2 wherein said fluorinated polyurethane elastomer is a fluorinated thermoset polyurethane
 3 elastomer.

1 48. A fluorinated polyurethane elastomer in accordance with claim 40,
 2 wherein said fluorinated polyurethane elastomer is a fluorinated thermoplastic poly-
 3 urethane elastomer.

1 49. A fluorinated polyurethane elastomer comprising a mixture of
 2 monomeric units having the general formulae:

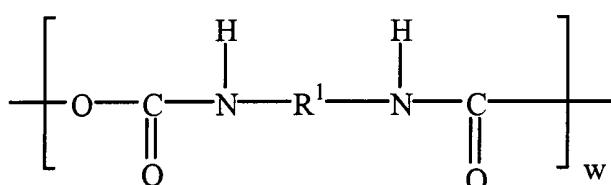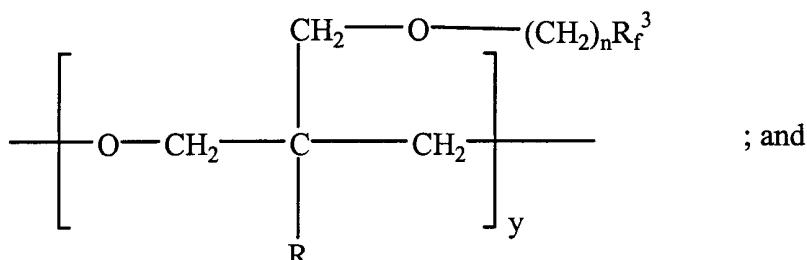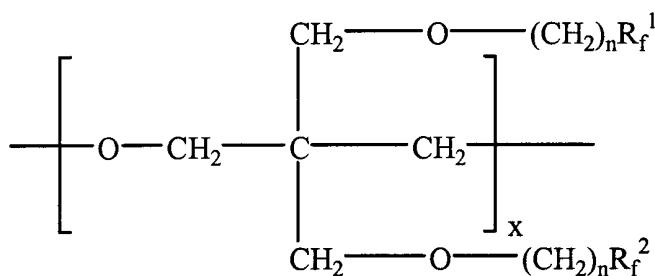

4 wherein:

5 n is independently selected and is 1 to 3;

6 R is selected from the group consisting of methyl and ethyl;

7 R_f¹, R_f² and R_f³ are independently selected from the group consisting of
 8 linear and branched perfluorinated alkyls having 1-20 carbon atoms, and
 9 oxaperfluorinated polyethers having from about 4-20 carbon atoms;

10 R¹ is a divalent hydrocarbyl radical;

11 x is 1-250;
12 y is 1-250; and
13 w is 1-100.

1 50. A fluorinated polyurethane elastomer in accordance with claim 49,
2 wherein said fluorinated polyurethane elastomer is a fluorinated thermoset polyurethane
3 elastomer.

1 51. A fluorinated polyurethane elastomer in accordance with claim 49,
2 wherein said fluorinated polyurethane elastomer is a fluorinated thermoplastic
3 polyurethane elastomer.

1 52. A fluorinated polyurethane elastomer in accordance with claim 49,
2 wherein R_f¹, R_f² and R_f³ are linear perfluorinated alkyls.

1 53. A fluorinated polyurethane elastomer in accordance with claim 49,
2 wherein R_f¹ and R_f² are the same.

1 54. A fluorinated polyurethane elastomer in accordance with claim 49,
2 wherein R_f¹ and R_f² are different.

1 55. A fluorinated polyurethane elastomer in accordance with claim 49,
2 wherein said isocyanate segment is selected from the group consisting of hexamethylene
3 diisocyanate (HDI), isopherone diisocyanate (IPDI), 4,4-methylene diphenylisocyanate
4 (MDI), polymeric MDI (Isonates), toluene diisocyanates, saturated MDI (HMDI),
5 polymeric HDI (N-100 and N-3200), trimethylhexane diisocyanate and mixtures thereof.

1 56. A fluorinated polyurethane elastomer in accordance with claim 49,
2 wherein said bis-substituted FOX monomer is selected from the group consisting of
3 3,3-(2,2,2-trifluoroethoxymethyl)oxetane, 3,3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-
4 oxetane, 3,3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluorooctyloxymethyl)oxetane,
5 3,3-(3,3,4,4,5,5,6,6,7,7,8,8,8-trideca-fluorooctyloxymethyl)oxetane, 3,3-(3,3,4,4,5,5,6,
6 6,7,7,8,8,9,9,10,10,10-heptadecafluorodecyloxymethyl)oxetane, 3,3-(3,3,4,4,5,5,6,6,-
7 7,7,8,8,9,9,10,10,11,11,12,12,12-heneicosafuorododecyloxymethyl)oxetane, 3-
8 (2,2,2-trifluoroethoxymethyl)-3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane,




9 3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-
10 pentadecafluoroctyloxymethyl)oxetane and mixture thereof.

1 57. A fluorinated polyurethane elastomer in accordance with claim 49,
2 wherein said mono-substituted FOX monomer selected from the group consisting of
3 3-(2,2,2-trifluoroethoxymethyl)-3-methyloxetane, 3-(2,2,3,3,4,4,4-heptafluorobutoxy-
4 methyl)-3-methyloxetane, 3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluoroctyloxy-
5 methyl)-3-methyloxetane, 3-(3,3,4,4,5,5,6,6,7,7,8,8,8-tridecafluoroctyloxymethyl)-3-
6 methyloxetane, 3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10,10-heptadecafluorododecyloxy-
7 methyl)-3-methyloxetane, 3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10,11,11,12,12,12-
8 heneicosafuorododecyloxymethyl)-3-methyloxetane and mixtures thereof.

1 58. A fluorinated polyurethane elastomer in accordance with claim 56,
2 wherein said bis-substituted FOX monomer is selected from the group consisting of
3 3,3-(2,2,2-trifluoroethoxymethyl)oxetane, 3,3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-
4 oxetane, 3,3-(3,3,4,4,5,5,6,6,7,7,8,8,8-tridecafluoroctyloxymethyl)oxetane and 3-
5 (2,2,2-trifluoroethoxymethyl)-3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane.

1 59. A fluorinated thermoset polyurethane elastomer in accordance with
2 claim 57, wherein said mono-substituted FOX monomer is selected from the group
3 consisting of 3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-3-methyloxetane,
4 3-(2,2,2-trifluoroethoxymethyl)-3-methyloxetane and 3-(2,2,2-trifluoroethoxy-
5 methyl)-3-methyloxetane.

1 60. A fluorinated polyurethane elastomer having FOX/THF segments
2 and comprising a mixture of monomeric units having the general formulae:

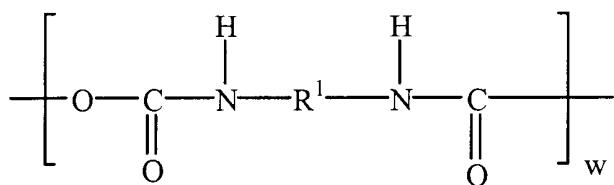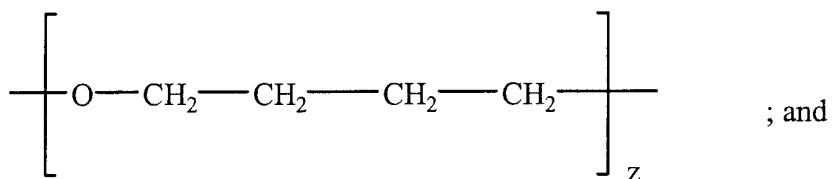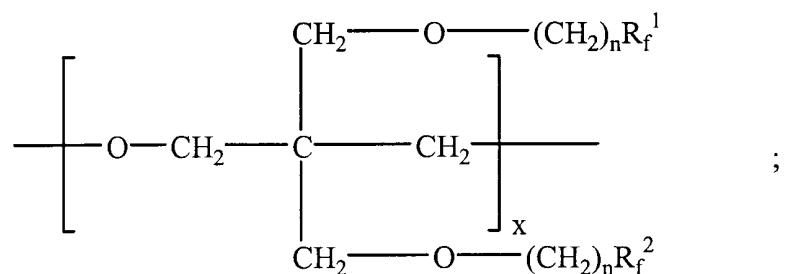

4 wherein:

5 n is independently selected and is 1 to 3;

6 R_f^1 and R_f^2 are independently selected from the group consisting of linear
7 and branched perfluorinated alkyls having 1-20 carbon atoms, and oxaperfluorinated
8 polyethers having from about 4-20 carbon atoms;

9 R¹ is a divalent hydrocarbyl radical;

10 x is 1-250;

11 z is 1-250; and

12 w is 1-250.

1 61. A fluorinated polyurethane elastomer in accordance with claim 60,
2 wherein said fluorinated polyurethane elastomer is a fluorinated thermoset polyurethane
3 elastomer.

1 62. A fluorinated polyurethane elastomer in accordance with claim 60,
2 wherein said fluorinated polyurethane elastomer is a fluorinated thermoplastic poly-
3 urethane elastomer.

1 63. A fluorinated polyurethane elastomer in accordance with claim 60,
2 wherein said isocyanate segment is selected from the group consisting of hexamethylene
3 diisocyanate (HDI), isophorone diisocyanate (IPDI), 4,4'-methylene diphenylisocyanate
4 (MDI), polymeric MDI, toluene diisocyanates, saturated MDI (HMDI), polymeric HDI
5 (N-100 and N-3200), trimethylhexane diisocyanate and mixtures thereof trimethylhexane
6 diisocyanate and mixtures thereof.

1 64. A fluorinated polyurethane elastomer in accordance with claim 60,
2 further comprising a crosslinking agent or a chain extender selected from the group
3 consisting of low molecular weight polyols and polyamines.

1 65. A fluorinated polyurethane elastomer in accordance with claim 64,
2 wherein said cross-linking agents is selected from the group consisting of trimethylol-
3 propane, pentaerythritol, ISONOL 93, trimethylolethane, triethanolamine, Jeffamines,
4 1,4-butanediamine, xylene diamine, diethylenetriamine, methylene dianiline and
5 diethanol- amine.





1 66. A fluorinated polyurethane elastomer in accordance with claim 64,
2 wherein said chain extender is selected from the group consisting of 1,4-butane diol, 1,3-
3 propane diol and benzene dimethanol.

1 67. A fluorinated polyurethane elastomer in accordance with claim 60,
2 wherein said fluorinated polyether segment is produced from at least one bis-substituted
3 FOX monomer selected from the group consisting of 3,3-(2,2,2-trifluoro-
4 ethoxymethyl)oxetane, 3,3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane, 3,3-(2,2,3,-
5 3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluorooctyloxymethyl)oxetane, 3,3-(3,3,4,4,5,5,6,6,7,-
6 7,8,8,8-trideca-fluorooctyloxymethyl)oxetane, 3,3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10,-
7 10-heptadecafluorodecyloxymethyl)oxetane, 3,3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10,11,-
8 11,12,12,12-heneicosfluorododecyloxymethyl)oxetane, 3-(2,2,2-trifluoroethoxymethyl)-
9 3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane and 3-(2,2,3,3,4,4,4-heptafluoro-
10 butoxymethyl)- 3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8, 8-pentadecafluorooctyloxymethyl)oxetane.

1 68. A fluorinated polyurethane elastomer in accordance with claim 67,
2 wherein said bis-substituted FOX monomer is selected from the group consisting of
3 3,3-(2,2,2-trifluoroethoxymethyl)oxetane, 3,3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-

4 oxetane, 3,3-(3,3,4,4,5,5,6,6,7,7,8,8,8,8-trideca-fluoroctyloxymethyl)oxetane and 3-
5 (2,2,2-trifluoroethoxymethyl)-3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane.

1 69. A fluorinated polyurethane elastomer comprising a mixture of
2 monomeric units having the general formulae:

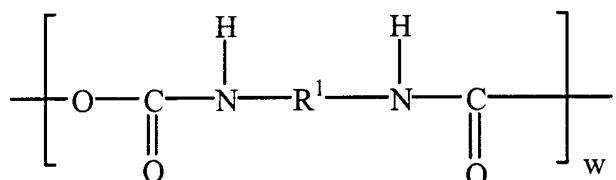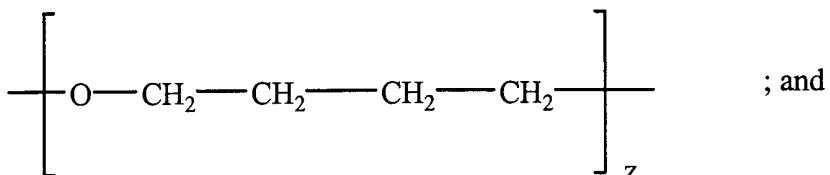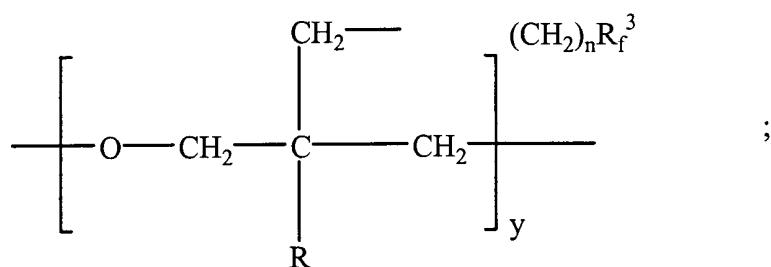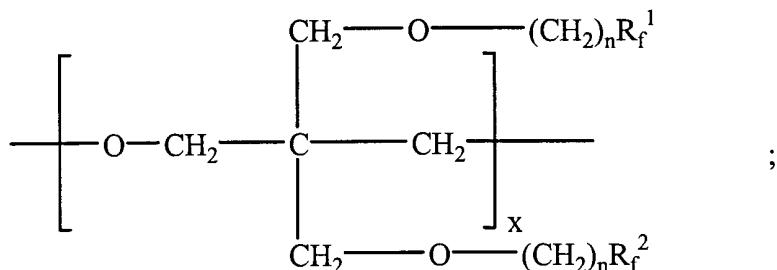

4 wherein:

5 n is independently selected and is 1 to 3;

6 R is selected from the group consisting of methyl and ethyl;

7 R_f^1 , R_f^2 and R_f^3 are independently selected from the group consisting of

8 linear and branched perfluorinated alkyls having 1-20 carbon atoms, and

9 oxaperfluorinated polyethers having from about 4-20 carbon atoms;

10 R¹ is a divalent hydrocarbyl radical;

11 x is 1-250;
12 y is 1-250;
13 z is 1-250; and
14 w is 1-50.

1 70. A fluorinated polyurethane elastomer in accordance with claim 69,
2 wherein said fluorinated polyurethane elastomer is a fluorinated thermoset polyurethane
3 elastomer.

1 71. A fluorinated polyurethane elastomer in accordance with claim 69,
2 wherein said fluorinated polyurethane elastomer is a fluorinated thermoplastic
3 polyurethane elastomer.

1 72. A fluorinated polyurethane elastomer in accordance with claim 69,
2 wherein said isocyanate segment is selected from the group consisting of hexamethylene
3 diisocyanate (HDI), isophorone diisocyanate (IPDI), 4,4-methylene diphenylisocyanate
4 (MDI), polymeric MDI (Isonates), toluene diisocyanates, saturated MDI (HMDI),
5 polymeric HDI (N-100 and N-3200), trimethylhexane diisocyanate and mixtures thereof.

1 73. A fluorinated polyurethane elastomer in accordance with claim 69,
2 further comprising a crosslinking agent or a chain-extender selected from the group
3 consisting of low molecular weight polyols and polyamines.

1 74. A fluorinated polyurethane elastomer in accordance with claim 73,
2 wherein said crosslinking agents is selected from the group consisting of
3 trimethylolpropane, pentaerythritol, ISONOL 93, trimethylolethane, triethanolamine,
4 Jeffamines, 1,4-butanediamine, xylene diamine, diethylenetriamine, methylene dianiline
5 and diethanolamine.

1 75. A fluorinated polyurethane elastomer in accordance with claim 73,
2 wherein said chain extender is selected from the group consisting of 1,4-butane diol, 1,3-
3 propane diol and benzene dimethanol.

1 76. A fluorinated polyurethane elastomer in accordance with claim 73,
2 wherein said bis-substituted FOX monomer is selected from the group consisting of
3 3,3-(2,2,2-trifluoroethoxymethyl)oxetane, 3,3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-


4 oxetane, 3,3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluoroctyloxymethyl)oxetane,
 5 3,3-(3,3,4,4,5,5,6,6,7,7,8,8,8-tridecafluoroctyloxymethyl)oxetane, 3,3-(3,3,4,4,5,5,6,
 6 6,7,7,8,8,9,9,10,10,10-heptadecafluorodecyloxymethyl)oxetane, 3,3-(3,3,4,4,5,5,6,6,-
 7 7,7,8,8,9,9,10,10,11,11,12,12-heneicosafuorododecyloxymethyl)oxetane, 3-
 8 (2,2,2-trifluoroethoxymethyl)-3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane, and
 9 3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)- 3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8, 8-
 10 pentadecafluoroctyloxymethyl)oxetane and mixtures thereof.

1 77. A fluorinated polyurethane elastomer in accordance with claim 69,
 2 wherein said mono-substituted FOX monomer is selected from the group consisting of
 3 3-(2,2,2-trifluoroethoxymethyl)-3-methyloxetane, 3-(2,2,3,3,4,4,4-heptafluorobutoxy-
 4 methyl)-3-methyloxetane, 3-(2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-pentadecafluoroctyloxy-
 5 methyl)-3-methyloxetane, 3-(3,3,4,4,5,5,6,6,7,7,8,8,8-tridecafluoroctyloxymethyl)-3-
 6 methyloxetane, 3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10,10-heptadecafluorodecyloxy-
 7 methyl)-3-methyloxetane, 3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,-10,10,11,11,12,12,12-
 8 heneicosafuorododecyloxymethyl)-3-methyloxetane and mixtures thereof.

1 78. A fluorinated polyurethane elastomer in accordance with claim 76,
 2 wherein said bis-substituted FOX monomer is selected from the group consisting of
 3 3,3-(2,2,2-trifluoroethoxymethyl)oxetane, 3,3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-
 4 oxetane, 3,3-(3,3,4,4,5,5,6,6,7,7,8,8,8-tridecafluoroctyloxymethyl)oxetane and 3-
 5 (2,2,2-trifluoroethoxymethyl)-3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)oxetane.

1 79. A fluorinated polyurethane elastomer in accordance with claim 77,
 2 wherein said mono-substituted FOX monomer is selected from the group consisting of
 3 3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-3-methyloxetane, 3-(2,2,2-trifluoroethoxy-
 4 methyl)-3-methyloxetane and 3-(2,2,2-trifluoroethoxymethyl)-3-methyloxetane.

1 80. A bis-substituted fluorinated oxetane monomer, said bis-substituted
 2 fluorinated oxetane monomer having the general formula:

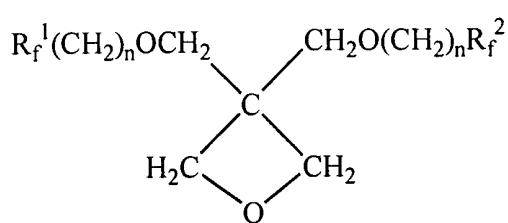

5 wherein:

6 each n is independently selected and is 1 to 3; and

7 R_f^1 and R_f^2 are independently selected from the group consisting of linear
8 perfluorinated alkyl, linear perfluorinated isoalkyl, branched chain perfluorinated alkyl,
9 branched chain perfluorinated isoalkyl, and oxaperfluorinated polyether having from 4 to
10 about 60 carbons, said linear and branched alkyls and isoalkyls having from 1 to 20
11 carbons;

12 with the proviso that R_f^1 and R_f^2 are different.

1 81. A bis-substituted fluorinated oxetane monomer in accordance with
2 claim 80, wherein R_f^1 and R_f^2 are both linear perfluorinated alkyls.

1 82. A bis-substituted fluorinated oxetane monomer in accordance with
2 claim 81, wherein said bis-substituted fluorinated oxetane monomer is selected from the
3 group consisting of 3-(2,2,2-trifluoroethoxymethyl)-3-(2,2,3,3,4,4,4-heptafluorobutoxy-
4 methyl)oxetane, 3-(2,2,2-trifluoroethoxymethyl)-3-(3,3,4,4,5,5,6,6,7,7,8,8,8-trifluoro-
5 octyloxymethyl)oxetane, 3-(2,2,3,3,4,4,4-heptafluorobutoxymethyl)-3-(2,2,3,3,4,4,5,5,-
6 6,6,7,7,8,8,8-pentadecafluoroctyloxymethyl)oxetane, 3-(2,2,2-trifluoroethoxymethyl)-3-
7 (3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10,10-heptadecafluorodecyloxymethyl)oxetane and 3-
8 (2,2,3,3,4,4,4-heptafluorobutoxymethyl)-3-(3,3,4,4,5,5,6,6,7,7,8,8,9,9,10,10,11,11,12,-
9 12,12-heneicosfluorodecyloxymethyl)oxetane.

1/1

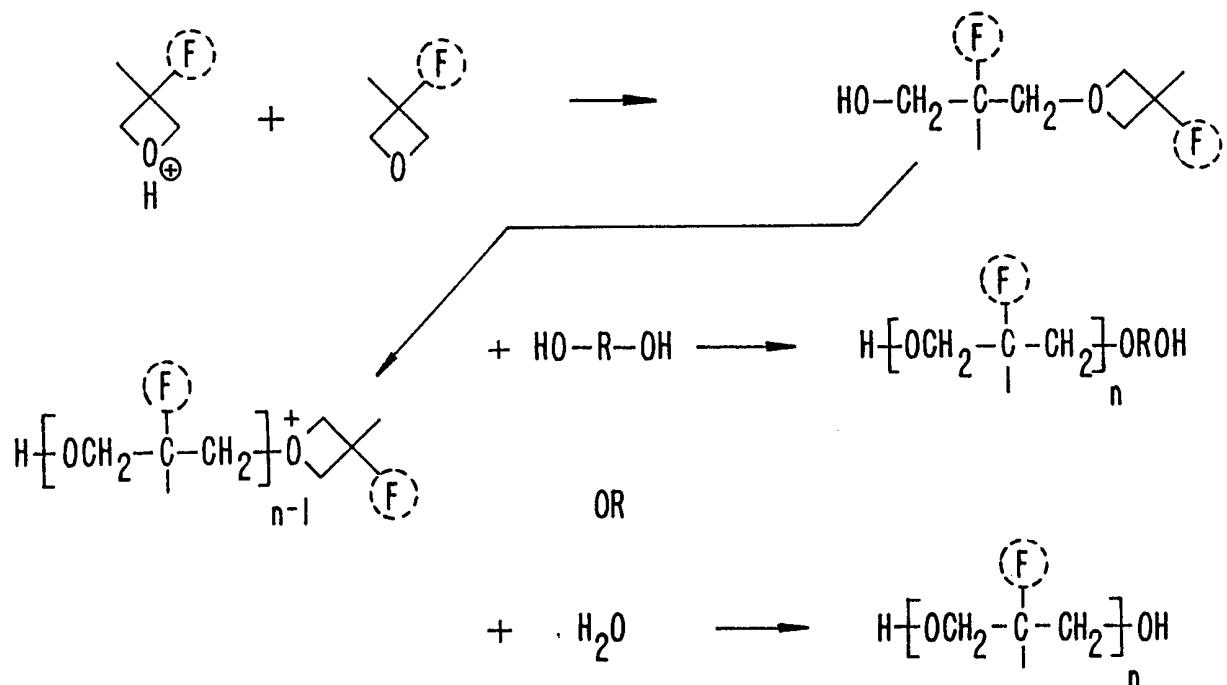



FIG. 1.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/19097

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C08G65/22 C08G65/18 C08G18/50 C08G18/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	WO 00 46270 A (OMNOVA SOLUTIONS INC) 10 August 2000 (2000-08-10) claims 1,2 page 6, line 17 ---	1-8, 18-27
X	EP 0 430 887 A (CIBA GEIGY AG) 5 June 1991 (1991-06-05) cited in the application examples 3,4 page 6, line 36 – line 38 ---	18-20,22
A	DE 43 23 307 A (AEROJET GENERAL CO) 27 January 1994 (1994-01-27) claims 1-42 --- -/-	1-82



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

2 November 2000

Date of mailing of the international search report

13/11/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

O'Sullivan, T

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 00/19097

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 348 350 A (CIBA GEIGY AG) 27 December 1989 (1989-12-27) cited in the application claims 1,7 -----	1-82
A	US 5 703 194 A (MALIK ASLAM A ET AL) 30 December 1997 (1997-12-30) claims 1-3 -----	1-82

INTERNATIONAL SEARCH REPORT

information on patent family members

Inte onal Application No

PCT/US 00/19097

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
WO 0046270	A 10-08-2000	WO 9945079	A	10-09-1999
EP 0430887	A 05-06-1991	US 5097048	A	17-03-1992
		AT 167673	T	15-07-1998
		AU 6701990	A	06-06-1991
		BR 9006052	A	24-09-1991
		DE 69032440	D	30-07-1998
		DE 69032440	T	04-02-1999
		DK 430887	T	26-10-1998
		ES 2118717	T	01-10-1998
		JP 3038496	B	08-05-2000
		JP 3190866	A	20-08-1991
		PT 96007	A, B	13-09-1991
		US 5097067	A	17-03-1992
		US 5145996	A	08-09-1992
		US 5200493	A	06-04-1993
DE 4323307	A 27-01-1994	FR 2694297	A	04-02-1994
		GB 2269816	A, B	23-02-1994
		JP 6263867	A	20-09-1994
		US 5807977	A	15-09-1998
		US 6037483	A	14-03-2000
		US 5668250	A	16-09-1997
		US 5703194	A	30-12-1997
		US 5668251	A	16-09-1997
		US 5650483	A	22-07-1997
		US 5654450	A	05-08-1997
		CA 2100218	A	11-01-1994
EP 0348350	A 27-12-1989	US 4898981	A	06-02-1990
		CA 1338174	A	19-03-1996
		DE 68904479	D	04-03-1993
		DE 68904479	T	29-07-1993
		JP 2097586	A	10-04-1990
		US 4946992	A	07-08-1990
		US 5045624	A	03-09-1991
US 5703194	A 30-12-1997	US 5807977	A	15-09-1998
		CA 2210204	A	18-07-1996
		EP 0811004	A	10-12-1997
		JP 11500422	T	12-01-1999
		WO 9621657	A	18-07-1996
		US 6037483	A	14-03-2000
		US 5668250	A	16-09-1997
		US 5668251	A	16-09-1997
		US 5650483	A	22-07-1997
		US 5654450	A	05-08-1997
		DE 4323307	A	27-01-1994
		FR 2694297	A	04-02-1994
		GB 2269816	A, B	23-02-1994
		JP 6263867	A	20-09-1994
		CA 2100218	A	11-01-1994