



(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/US2010/022110(22) International Filing Date:
26 January 2010 (26.01.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/367,883 9 February 2009 (09.02.2009) US
61/150,958 9 February 2009 (09.02.2009) US(71) Applicant (for all designated States except US): **ANALOG DEVICES, INC.** [US/US]; One Technology Way, Norwood, Massachusetts 02062-9106 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **LYDEN, Colin** [IE/IE]; The Cove, Baltimore, County Cork (IE). **MURPHY, Mark** [IE/IE]; Aherinagh Beg, Kilmore, County Clare (IE). **CALPE-MARAVILLA, Javier** [ES/ES]; Plaza cabanilles, 4, 7, E-Spain 46680 Algemesi (ES). **ENGLISH, Eoin** [IE/IE]; Kilroe House, Ballynagally, Pallasgreen, County Limerick (IE). **O'CONNOR, Denis** [IE/IE]; Nadd, Banteer, County Cork (IE). **VINEREANU, Tudor** [RO/IE]; 6 Keyzers Court, Frenches Quay, County Cork(IE). **CAHILL, Alan** [IE/IE]; 5 Cuan Glas, Bishop O'Donnell Rd., Co. Galway, Galway, Co. Galway (IE). **Sean, Brennan** [IE/IE]; 14 Park Avenue, Adare, Co. Limerick (IE).(74) Agents: **KENYON & KENYON LLP** et al.; 1500 K Street, N.W., Suite 700, Washington, District of Columbia 20005-1257 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,

[Continued on next page]

(54) Title: CONTROL TECHNIQUES FOR MOTOR DRIVEN SYSTEMS

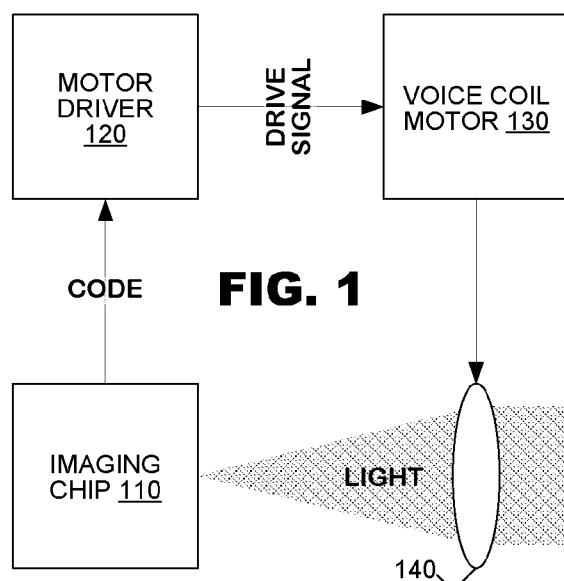**FIG. 1**

(57) Abstract: Embodiments of the present invention provide a motor-driven mechanical system with a detection system to measure properties of a back channel and derive oscillatory characteristics of the mechanical system. Uses of the detection system may include calculating the resonant frequency of the mechanical system and a threshold drive D_{TH} required to move the mechanical system from the starting mechanical stop position. System manufacturers often do not know the resonant frequency and D_{TH} of their mechanical systems precisely. Therefore, the calculation of the specific mechanical system's resonant frequency and D_{TH} rather than depending on the manufacturer's expected values improves precision in the mechanical system use. The backchannel calculations may be used either to replace or to improve corresponding pre-programmed values.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

CONTROL TECHNIQUES FOR MOTOR DRIVEN SYSTEMS

RELATED APPLICATION

[01] This application claims the benefit of priority from United States provisional application "Control Protocols for Motor-Driven Mechanical Systems", serial number 61/150,958, filed February 9, 2009 the disclosure of which is incorporated herein by reference in its entirety.

[02] This application is a continuation-in-part and claims priority to co-pending applications "Control Techniques for Motor Driven Systems" having serial numbers 12/367,883 and 12/367,938, both filed on February 9, 2009, the disclosures of which are incorporated herein by reference in their entirety.

BACKGROUND

[03] The present invention relates to motor control and control of motor driven systems. In particular, it relates to control of motor driven systems that minimize ringing or 'bounce' in the mechanical systems that are under motor control.

[04] Motor driven translational systems are commonplace in modern electrical devices. They are used when it is necessary to move a mechanical system within a predetermined range of motion under electrical control. Common examples can include autofocus systems for digital cameras, video recorders, portable devices having such functionality (e.g., mobile phones, personal digital assistants and hand-held gaming systems) and laser drivers for optical disc readers. In such systems, a motor driver integrated circuit generates a multi-value drive signal to a motor which, in turn, drives a mechanical system (e.g. a lens assembly, in the case of an auto-focus system). The motor driver generates the drive signal in response to an externally supplied codeword. The code word often is a digital value that identifies a location within the mechanical system's range of motion to which the motor should move the mechanical system. Thus, the range of motion is divided into a predetermined number of addressable locations (called "points" herein) according to the number of code words allocated to the range of motion. The drive signal is an electrical signal that is applied directly to the motor to cause the mechanical system to move as required.

[05] Although the types and configurations of the mechanical systems typically vary, many mechanical systems can be modeled as a mass coupled to a spring. When a motor moves the mass according to the drive signal, the motion generates other forces within the system which

can cause the mass to oscillate around the new location at some resonant frequency (f_R). For example, resonant frequencies of approximately 110 Hz have been observed in consumer electronic products. Such oscillation typically diminishes over time but it can impair performance of the device in its intended function by, for example, extending the amount of time that a camera lens system takes to focus an image or the time a disk reader takes to move to a selected track.

[06] FIG. 1 is a simplified block diagram of a motor-driven system commonly used in lens drivers. The system includes an imaging chip 110, a motor driver 120, a voice coil motor 130 and a lens 140. The motor driver generates a drive signal to the voice coil motor in response to a code provided by the imaging chip. In turn, the voice coil motor moves the lens within its range of motion. Movement of the lens changes the way the lens focuses incoming light on a surface of the imaging chip, which can be detected and used to generate new codes to the motor driver. FIG. 2 is a frequency plot of possible response of the system of FIG. 1, illustrating a resonant frequency at frequency f_R .

[07] FIG. 3 illustrates two drive signals generated by conventional motor drivers. A first drive signal is a step function, that changes from a first state to a second state as a discontinuous jump (FIG 3(a)). The second illustrated drive signal is a ramp function that changes from the first state to the second state at a fixed rate of change (FIG 3(b)). Both types of drive signals, however, cause the ringing behavior that impairs performance as noted above. FIG. 4, for example, illustrates ringing observed in one such mechanical system.

[08] The inventors have observed that the ringing behavior of such motor-driven systems unnecessarily extends the settling times of such mechanical systems and degrades performance. Accordingly, there is a need in the art for such motor-driven systems that can be driven according to a digital codeword and avoids the oscillatory behavior noted in these systems.

BRIEF DESCRIPTION OF THE DRAWINGS

[09] FIG. 1 is a block diagram of an exemplary mechanical system suitable for use with the present invention.

[10] FIG. 2 is a graph of frequency response of an exemplary mechanical system and oscillation that may occur during activation.

- [11]** FIG. 3 illustrates conventional drive signals for mechanical systems.
- [12]** FIG. 4 illustrates response of a mechanical system observed under a unitary step drive signal.
- [13]** FIG. 5 illustrates a drive signal according to an embodiment of the present invention.
- [14]** FIG. 6 is a graph illustrating height and position of the drive signal of FIG. 5.
- [15]** FIG. 7 is a graph illustrating energy distribution by frequency of a drive signal of the present invention.
- [16]** FIG. 8 illustrates response of a mechanical system observed under a drive signal such as shown in FIG. 5.
- [17]** FIG. 9 is a block diagram of a system according to an embodiment of the present invention.
- [18]** FIG. 10 is a graph illustrating energy distribution by frequency of another drive signal of the present invention.
- [19]** FIG. 11 is a block diagram of a system according to an embodiment of the present invention.
- [20]** FIG. 12 is a graph illustrating other exemplary drive signals according to an embodiment of the present invention.
- [21]** FIG. 13 is a simplified block diagram of a drive signal generator according to an embodiment of the present invention.
- [22]** FIG. 14 is a graph illustrating another exemplary drive signal according to an embodiment of the present invention.
- [23]** FIG. 15 is a graph illustrating a frequency response of an exemplary filtering system.
- [24]** FIG. 16 is a simplified block diagram of a drive signal generator according to another embodiment of the present invention.
- [25]** FIG. 17 is a simplified block diagram of a drive signal generator according to another embodiment of the present invention.
- [26]** FIG. 18 is an exemplary graph illustrating typical displacement of a mechanical system (after settling) versus an applied drive signal.

- [27]** FIG. 19 is a graph illustrating an exemplary drive signal according to a further embodiment of the present invention.
- [28]** FIG. 20 is a block diagram of another mechanical system suitable for use with the present invention
- [29]** FIG. 21 is a simplified diagram of a MEMS switch system according to an embodiment of the present invention.
- [30]** FIG. 22 is a simplified diagram of a MEMS mirror control system according to an embodiment of the present invention.
- [31]** FIG. 23 is a simplified diagram of a haptic control system according to an embodiment of the present invention.
- [32]** FIG. 24 is a simplified diagram of a disk reader according to an embodiment of the present invention.
- [33]** FIG. 25 is a simplified block diagram of a drive signal generator according to another embodiment of the present invention.
- [34]** Fig. 26 is a graph illustrating exemplary drive signals according to an embodiment of the present invention.
- [35]** FIG. 27 is a simplified diagram of motor-driven system suitable for use with the present invention.
- [36]** FIG. 28 is a simplified block diagram of a drive signal generator according to another embodiment of the present invention.
- [37]** FIG. 29 shows a simplified process flow for determining a resonant frequency.
- [38]** FIG. 30 illustrates response of a mechanical system observed under a test drive signal.
- [39]** FIG. 31 shows a simplified process flow for updating a resonant frequency.
- [40]** FIG. 32(a) shows a simplified process flow for adjusting a resonant frequency.
- [41]** FIG. 32(b) shows a simplified process flow for adjusting a resonant frequency.
- [42]** FIG. 33 is a simplified block diagram of a drive signal generator according to another embodiment of the present invention.
- [43]** FIG. 34 shows a simplified process flow for determining a threshold voltage.

[44] FIG. 35 illustrates response of a mechanical system observed under test unit step drive signals.

DETAILED DESCRIPTION

[45] Embodiments of the present invention provide a drive signal for a motor-driven mechanical system whose frequency distribution has zero (or near zero) energy at the expected resonant frequency of the mechanical system. The drive signal may be provided in a series of steps according to a selected row of Pascal's triangle, wherein the number of steps equals the number of entries from the selected row of Pascal's triangle, each step has a step size corresponding to a respective entry of the selected row of Pascal's triangle, and the steps are spaced from each other according to a time constant determined by an expected resonant frequency of the mechanical system. Alternatively, the stepped drive signal may be provided as a series of uniform steps according to a selected row of Pascal's triangle, in which the steps are spaced into a number of intervals corresponding to the number of entries from the selected row of Pascal's triangle and each interval includes a number of steps corresponding to a respective entry from the selected row of Pascal's triangle. These techniques not only generate a drive signal with substantially no energy at the expected resonant frequency, they provide a zero-energy "notch" of sufficient width to tolerate systems in which the actual resonant frequency differs from the expected resonant frequencies. The motor driver may also include a detection system to measure properties of a back channel and derive oscillatory characteristics of the mechanical system. Uses of the detection system may include calculating the resonant frequency of the mechanical system and a threshold drive D_{TH} required to move the mechanical system from the starting mechanical stop position. The back channel calculations may be used either to replace or to improve corresponding pre-programmed values.

[46] FIG. 5 is a graph illustrating an exemplary drive signal according to an embodiment of the present invention. The drive signal is a multi-stage step function that changes at times corresponding to a time constant:

$$t_c \cong \frac{1}{2f_R}. \quad \text{Eq. 1}$$

This translates to a drive signal with two steps, a first step at time t_0 , having an amplitude corresponding to approximately one half the level needed to traverse a distance separating a old position (P_{OLD}) from a new position (P_{NEW}) ($\Delta P = P_{NEW} - P_{OLD}$). A second step may occur at time

$t_0 + t_c$, having an amplitude corresponding to the rest of the distance needed to be traversed. FIG. 6 illustrates differential response of the drive signal of FIG. 5.

[47] FIG. 7 is a graph illustrating energy distribution of the drive signal of FIG. 5 by frequency. As shown, the drive signal has non-zero energy distribution at frequencies both above and below the resonant frequency f_R . At the resonant frequency f_R , the drive signal has zero energy. This energy distribution minimizes energy imparted to the mechanical system in the resonant region and, therefore, avoids oscillation that may occur in such systems.

[48] FIG. 7 also illustrates energy distribution that may occur in a drive signal generated from a unitary step function (phantom). In this graph, the system has non-zero energy at the resonant frequency f_R , which causes energy to be imparted to the mechanical system at this frequency. This non-zero energy component at the resonant frequency f_R is believed to contribute to the prolonged oscillation effect observed by the inventors.

[49] FIG. 8 is a graph that illustrates response of a mechanical system when driven by a drive signal having a shape as shown in FIG. 5 (case (a)). The mechanical system starts at a position P_{OLD} and moves to a position P_{NEW} . Activation pulses are applied at times t_0 and t_0+t_c . In this example, P_{OLD} corresponds to 27 μm (digital code 50) and P_{NEW} correspond to 170 μm (digital code 295), t_0 corresponds to $t=0$ and t_c corresponds to 3.7 ms.

[50] FIG. 8 compares the mechanical system's response under the drive signal proposed herein (case (a)) against the response observed when driven by a drive signal according to a unitary step function (case (b)). Whereas in case (a) the mechanical system has settled on the new position P_{NEW} after about 4 ms, the same mechanical system exhibits prolonged oscillation in case (b). Even after 30 ms, the mechanical system continues to oscillate about the P_{NEW} position. Accordingly, the drive signal of FIG. 5 provides substantially faster settling times than conventional drive signals.

[51] FIG. 9 is a block diagram of a system 900 according to an embodiment of the present invention. As shown, the system may include registers 910-930 for storage of data representing the old and new positions and the expected resonant frequency of the mechanical system. The system 900 may include a subtractor 940 to calculate ΔP from P_{NEW} and P_{OLD} . The system 900 further may include a step generator 950 that receives a system clock and generates pulses to an accumulator 960 according to timing determined from Eq. 1. The step generator 950 may generate pulses, for example, as shown in FIG. 6, having amplitudes each corresponding to

approximately one half the total distance to be traversed by the mechanical system. The accumulator 960 may sum the aggregate value of pulses generated by the step generator 950 and output the aggregate value to a multiplier 970 that also receives the ΔP value from the subtractor. Thus, the multiplier 970 generates a signal corresponding to the multi-step increments shown in FIG. 5. The output of the multiplier 970 may be input to an adder 980 that also receives the P_{OLD} value from register 910. Thus, the adder 980 may generate a time varying output signal sufficient to drive a mechanical system from a first position to a second position with minimal settling time.

[52] When the mechanical system completes its translation from the old position to the new position, the old position may be updated. In the system illustrated in FIG. 9, after the step generator 950 generates its final step to the accumulator, it also may generate a transfer signal to registers 910 and 920 to cause the old position register 910 to be updated with data from the new position register 920.

[53] The drive signal of FIG. 5 works well if the resonant frequency f_R of the mechanical system matches the 'notch' of the drive signal precisely (e.g. within $\pm 3\%$). Unfortunately, system manufacturers often do not know the resonant frequency of their mechanical systems precisely. Moreover, particularly in consumer devices where system components must be made inexpensively, the resonant frequency can vary across different manufacturing lots of a common product. Thus, although a motor driver might be designed to provide a notch at an expected resonant frequency f_{RE} , there can be a substantial difference between the expected resonant frequency and the actual resonant frequency of the mechanical system (f_{RM}).

[54] To accommodate such uses, the principles of the present invention may be expanded to expand the frequency notch to allow greater tolerance in the resonant frequencies used with such systems. One such expansion includes providing multiple layers of filtering to 'widen' the notch. FIG. 10 is a graph showing the expected effects of multiple layers of filtering. Four such layers of filtering are illustrated. Each such additional layer of filtering expands a "notch" of frequencies for which there is zero energy imparted to the system. Although each layer of filtering diminishes the aggregate amount of energy imparted to the system and, therefore, may cause slower movement by the mechanical system, such filtering may be advantageous to overall system operation by reducing settling times for mechanical systems even when the resonant frequency of such systems cannot be predicted with precision.

[55] FIG. 11 illustrates a simplified block diagram of a system 1100 according to another embodiment of the present invention. The system includes a drive signal generator 1110 and one or more notch limit filters 1120.1-1120.N provided in series. A first filter 1120.1 in the system 1100 may accept a drive signal from the drive signal generator 1110. Each of the N filters ($N \geq 1$) may filter its input signal at an expected resonant frequency (f_{RE}). Because the filters are provided in cascade, the multiple filters may operate collectively to provide a filtered drive signal having a notch that is wider than would occur from a single filter system. Alternatively, the additional notches may be placed at different frequencies around the expected single resonant frequency in order to widen the filter's attenuation band.

[56] In the time domain, the additional levels of filtering provide a step response as follows:

TIME	0	T_c	$2T_c$	$3T_c$	$4T_c$
1 Stages	1	1			
2 Stages	1	2	1		
3 Stages	1	3	3	1	
4 Stages	1	4	6	4	1

Table 1

The output drive signals follow the step responses as shown in Table 1 after having been normalized (the steps are scaled so their sum equals 1). For example, with respect to a three-stage system, the step responses would be set to 1/8, 3/8, 3/8 and 1/8 at each of the times noted in Table 1. Drive signals are generated from a sum of the step responses over time. Thus, the drive signals of Table 1 may generate waveforms having the shape shown in FIG. 12.

[57] The progression shown in Table 1 matches the progression of Pascal's Triangle. In an embodiment, an arbitrary N stage filter may be employed by using a progression taken from a corresponding N^{th} row of Pascal's Triangle. An arbitrary number of stages may be used as desired to protect against uncertainty in the expected resonant frequency of the mechanical system. Although any number of stages may be used, higher numbers of stages involve increased settling times and therefore the number of stages should be chosen with care.

[58] FIG. 13 is a block diagram of a signal generator 1300 according to an embodiment of the present invention. The signal generator 1300 may include a pair of registers 1310, 1320 to store data representing the estimated resonant frequency and the current position P_{OLD} of the mechanical system. A timing engine 1330 and a tap register 1340 may generate an output corresponding to an appropriate step pattern such as those illustrated in Table 1. Specifically,

the timing engine 1330 may clock the tap register 1340 at a rate corresponding to time intervals t_c determined by the stored estimated resonant frequency. The tap register 1340 may store data representing the normalized values of Pascal's triangle. Based on a control signal (N select) identifying the row of Pascal's triangle to be applied, the tap register 1340 sequentially may output step values corresponding to each entry in the row on each cycle of the t_c clock.

[59] A multiply accumulate (MAC) unit 1350 may receive data representing the new position P_{NEW} , the old position P_{OLD} and the step pattern data from the tap register 1340. Mathematically, the MAC 1340 may generate a digital drive code as:

$$\text{Drive}(t) = P_{OLD} + (P_{NEW} - P_{OLD}) \cdot \sum \text{step}(t), \text{ where}$$

$\text{step}(t)$ represents the step response of the selected pattern and t varies across all t_c intervals that are relevant for the selected pattern. A digital-to-analog converter (DAC) 1360 may generate an analog drive output signal from the MAC's digital output. The output signal may be generated as current or voltage.

[60] The solution of FIG. 13 provides a wider notch as desired over the embodiment of FIG. 9 but does so at increased complexity. Normalized values of each row of Pascal's triangle must be stored in memory at the tap register or calculated dynamically. Such complexity may be avoided in another embodiment of the present invention in which timing misalignment is applied to the step graphs.

[61] Consider the step response shown in Table 1. The response of any stage N (say $n=3$) is the sum of a prior stage N-1 and a replica of the same (stage N-1) delayed by a time constant t_c . For example:

NO STAGES	TIME CONSTANT				
	0	T_c	$2T_c$	$3T_c$	$4T_c$
1	1	1			
	↓	↘	↓	↘	
2	1	2	1		
	↓	↘	↓	↘	↓
3	1	3	3	1	
	↓	↘	↓	↘	↓
4	1	4	6	4	1

Table 2

In an embodiment, the system generates step response patterns that represent replica signals that are misaligned with respect to each other slightly in time (shown as Δt in Table 3 below). The step response patterns may be represented as follows:

N	t ₀	t _c				2t _c						3t _c				4t _c
		+0	+ Δt	+2 Δt	+3 Δt	+0	+ Δt	+2 Δt	+3 Δt	+4 Δt	+5 Δt	+0	+ Δt	+2 Δt	+3 Δt	
1	1	1														
2	1	1	1			1										
3	1	1	1	1		1	1	1				1				1
4	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Table 3

The step patterns may generate a drive signal such as shown in the example of FIG. 14. In the example illustrated, N=4.

[62] In practice, the Δt time intervals may be provided by a system clock within the motor driver, which may be much faster than the t_c time interval calculated from the expected resonant frequency f_R . FIG. 14 is not drawn to scale. In one embodiment, some coefficients may be swapped with each other in order to widen the attenuation band. Coefficient swapping may reduce the requirements of small t_c time intervals. Δt , for example, may be set to $1/4t_c$ or $1/8t_c$ when coefficient swapping is utilized.

[63] A time domain embodiment may include a cascade of unequally distributed notches provided by a convolution of N filters, each filter corresponding to the first row of Pascal's triangle. The filters may be tuned to present notches around the nominal resonance frequency. The filters may also be convolved using a common time base as defined by a minimum common multiplier of their time constant t_c .

[64] One example may include 4 filters whose responses are {1 00000 1} {1 000000 1} {1 0000000 1} and {1 000000000 1}. When the 4 filters are convolved with a time base of approximately 30 times the resonance period, a 32-tap filter with coefficients {1 0 0 0 0 0 1 1 1 0 1 0 0 1 1 1 1 0 0 1 0 1 1 1 0 0 0 0 0 1} results. FIG. 15 illustrates the frequency response of the example 32-tap filter for a 140 Hz nominal resonance frequency.

[65] FIG. 16 illustrates a drive signal generator 1600 according to another embodiment of the present invention. The drive signal generator may include a pair of registers 1610, 1620 to store data representing the estimated resonant frequency of the mechanical system and a current position of the mechanical position (P_{OLD}). The drive signal generator may include a tap

register 1630 that stores distributed step patterns such as those shown in Table 3. In response to each iteration of a system clock (corresponding to Δt), the tap register 1630 may shift out a single bit of the step pattern. The tap register may include buffer bits (zeroes) corresponding to time intervals separating each time constant t_c . The shifted bits may be output to an accumulator 1640 which computes a running sum of pulses over time.

- [66]** A subtractor 1650 may calculate ΔP from the old and new positions ($\Delta P = P_{NEW} - P_{OLD}$). A divider may divide the ΔP by a factor $1/2^N$, which may be implemented with a simple bit shift, where N represents the row of Pascal's triangle currently in use. A multiplier 1670 and adder 1680 complete generation of the drive signal which, mathematically, may be represented as:

$$Drive(t) = P_{OLD} + \frac{1}{2^N} (P_{NEW} - P_{OLD}) \bullet \sum \text{step}(t).$$

In this embodiment, the $\text{step}(t)$ term again represents pulses from the tap register. In this embodiment, however, the tap register need not store normalized step values. Instead, the tap register may store single bit values (1s) at each of the Δt positions for which incremental contribution is required (see, Table 3). Within each of the N rows, the single bit steps sum to 2^N . In this embodiment, the divider 1660 accomplishes normalization while permitting a simple implementation of the tap register. The DAC may generate an analog signal, either voltage or current, from the codeword output by the adder 1680.

- [67]** While FIG. 16 illustrates the tap register 1630 being clocked by a system clock, the tap register alternatively may be clocked by a timing generator (not shown), that becomes active during a time period defined by each time constant t_c and, when active, clocks the tap register at a rate of Δt . When each burst of pulses concludes, the timing generator may be deactivated until the next t_c interval occurs. This second embodiment permits the size of the tap register to be made smaller but increases complexity of the clocking system.

- [68]** FIG. 17 illustrates a drive signal generator 1700 according to another embodiment of the present invention. The drive signal generator may include a pair of registers 1710, 1720 to store data representing the estimated resonant frequency of the mechanical system and a current position of the mechanical position (P_{OLD}). The drive signal generator may include a tap register 1730 that stores distributed step patterns such as those shown in Table 3. In response to each iteration of a system clock (corresponding to Δt), the tap register 1730 may shift out a single bit of the step pattern. The tap register may include buffer bits (zeroes) corresponding to

time intervals separating each time constant t_c . The shifted bits may be output to an accumulator 1740.

[69] In this embodiment, the P_{OLD} value may be preloaded into the accumulator 1740. A subtractor 1750 may calculate ΔP from the old and new positions ($\Delta P = P_{NEW} - P_{OLD}$). Value register 1760 may use N bit shifting to divide ΔP by 2^N in order to calculate step sizes. The calculated step size may be stored in the value register 1760. Accumulator 1740, which is initialized with the old position value, may be updated with the addition of the content value contained in the value register 1760 each time the tap register 1730 shifts a bit with a value of one. The DAC 1780 may generate an analog signal, either voltage or current, from the codeword output by the accumulator 1740.

[70] The embodiments of FIG. 16 and 17 are advantageous because they provide for simpler implementation than the embodiment of Table 1 & FIG. 13. The step responses of the FIG. 14/Table 3 embodiment are uniform and, therefore, there is no need to develop fractional step response values as discussed with respect to Table 1. As with the FIG. 13 embodiment, the FIG. 16 and FIG. 17 embodiments also contribute to a wider notch as compared to the FIG. 5 embodiment.

[71] Many mechanical systems do not move from the starting mechanical stop position immediately upon application of a drive signal. There usually are spring forces or other inertial forces that are not overcome until the amplitude of the drive signal reaches some threshold value D_{TH} (FIG. 18). The threshold value often is unknown and may vary from manufacturing lot to manufacturing lot. Furthermore, the threshold value may vary according to the mechanical system orientation.

[72] To improve response times, when moving from a start position corresponding to a mechanical stop position, embodiments of the present invention may advance the drive signal to a value corresponding to the threshold drive signal D_{TH} (FIG. 19) and calculate ΔP as a difference between D_{TH} and the drive signal level sufficient to move the mechanical system to the destination position. When applying a drive signal to such a system, the drive signal may include the D_{TH} level applied immediately from the motor drive and a time-varying component corresponding to a stepped drive signal of one of the foregoing embodiments (FIGS. 5, 12 and/or 14) provided atop the D_{TH} level. The threshold drive D_{TH} may be estimated in a "blind"

fashion (e.g. based on expected properties of the mechanical systems, which may or may not be true). Alternatively, the threshold value may be programmed into the system via a register.

[73] The principles of the present invention find application in a variety of electrically-controlled mechanical systems. As discussed above, they may be used to control lens assemblies in auto-focus applications for cameras and video recorders such as shown in FIG. 1. It is expected that systems using the drive signals discussed herein will achieve improved performance because the lens assemblies will settle at new locations faster than may occur in systems with conventional drive signals. Accordingly, cameras and video recorders will generate focused image data faster than previously achieved, which we generate greater throughput.

[74] FIG. 20 illustrates another system 2000 according to an embodiment of the present invention. The system 2000 of FIG. 20 illustrates a lens control system with multiple dimensions of movement. This system, as with FIG. 1, may include an imaging chip 2010, a motor driver 2020, various motors 2030-2050 and a lens 2060. Each motor 2030-2050 may drive the lens in a multi-dimensional space. For example, as shown in FIG. 20, an auto focus motor 2030 may move the lens laterally with respect to the imaging chip 2010, which causes light to be focused in a light-sensitive surface 2010.1 of the chip 2010. A pitch motor 2040 may rotate the lens through a first rotational axis to control orientation of the lens 2060 in a first spatial dimension. A yaw motor 2050 may rotate the lens through a second rotational axis, perpendicular to the first rotational axis, to control orientation of the lens 2060 in another spatial dimension.

[75] In the embodiment of FIG. 20, the imaging chip 2010 may include processing units to perform auto-focus control 2010.1, motion detections 2010.2 and optical image stabilization (OIS) 2010.3. These units may generate codewords for each of the drive motors 2030-2050, which may be output to the motor driver 2020 on an output line. In the embodiment shown in FIG. 20, the codewords may be output to the motor driver 2020 in a multiplexed fashion. The motor driver 2020 may include motor drive units 2020.1-2020.3 to generate analog drive signals for each of the drive motors 2030-2050. The analog drive signals may be generated according to the foregoing embodiments discussed herein. As with the case of a one dimensional lens driver, it is expected that a multi-dimensional lens driver that is driven as shown in the foregoing embodiments will achieve faster settling times than lens drivers driven according to conventional drive signals.

[76] The principles of the present invention find application in other systems, for example, MEMS-based switches as shown in FIG. 21. Such systems may include a switch member 2110 that moves under control of a control signal between an open position and a closed position. When closed, a movable 'beam' portion 2120 of the switch member 2110 is placed in contact with an output terminal 2130. The control signal is applied to the switch member 2110 through a control terminal 2140 that imparts electrostatic forces upon the switch member 2110 to move it from a normally open position to the closed position. In this regard, the operation of a MEMS switch is known.

[77] According to an embodiment, a MEMS control system may include a switch driver 2150 that, responsive to an actuating control signal, generates a drive signal to the MEMS-switch having a shape such as shown in FIGS. 5, 12 or 14. MEMS switches will possess from which an expected resonant frequency and, by extension, the time constant t_c may be derived. The switch driver 2150 may apply steps having an aggregate amplitude sufficient to move the beam 2120 toward the output terminal 2130. At the conclusion of a final time constant, the switch driver 2150 may apply a final step to halt the beam 2120 at the closed position with minimal oscillation.

[78] The principles of the present invention also may find application in optical MEMS systems, such as shown in FIG. 22. There, an optical transmitter 2210 and optical receiver 2220 are provided in a common optical path. A MEMS mirror 2230 may be provided along the optical path, which may translate from a first position to a second position under control of a drive signal. In a default state, for example, the MEMS mirror 2230 may be positioned out of the optical path between the transmitter 2210 and the receiver 2220. In an activated state, however, the MEMS mirror 2230 may move to obscure the optical path, which causes the transmitted beam of light to be blocked from reaching the receiver 2220.

[79] According to an embodiment, a MEMS control system may include a mirror driver 2240 that, responsive to an actuating control signal, generates a drive signal to the MEMS-mirror 2230 to cause it to move from a default position to an activated position. The mirror 2230 may possess a mass from which an expected resonant frequency and, by extension, the time constant t_c may be derived. The mirror driver 2240 may apply steps having an aggregate amplitude sufficient to move the mirror 2230 toward the activated position. At the conclusion of

a final time constant, the mirror driver 2240 may apply a final step to halt the mirror 2230 at the activated position with minimal oscillation.

[80] The optical system 2200 optionally may include a second receiver 2250 provided along a second optical path that is formed when the mirror 2230 moves to the activated position. In this embodiment, the system 2200 may provide a routing capability for optical signals received by the optical system 2200.

[81] The principles of the present invention may find application in touch sensitive sensor devices that use tactile or haptic feedback to confirm receipt of data. Haptic devices provide feedback that simulates the "click" of a mechanical button or other tactile feedback. Shown in FIG. 23, such devices 2300 may include a touch screen panel 2310 to capture data from an input device, commonly an operator's finger, a stylus or other object. The touch screen panel 2310 generates data to a touch screen controller 2320 that processes the panel data to derive a screen position on which the operator entered data. To provide the haptic feedback, the touch screen controller 2320 may generate a digital codeword to a motor driver, which generates a drive signal to a haptic motor controller 2330. The haptic motor controller 2330 may generate a drive signal to a haptic effect motor 2340 which imparts a force upon a mechanical device within the touch screen panel 2310 that generates the tactile feedback.

[82] According to an embodiment, the motor driver 2330 may generate a drive signal to the haptic effect motor 2340 according to a shape such as shown in FIGS. 12 or 14. The haptic effect motor 2340 and associated mechanical components of the touch screen device may possess a mass from which an expected resonant frequency and, by extension, the time constant t_c may be derived. The motor driver 2330 may apply a series of steps according to a selected row of Pascal's triangle or any embodiments of the present invention described herein. Owing to a varying mass being controlled due to user interaction, the steps may originate from a deeper row (e.g., the 4th row or deeper) of Pascal's triangle than for other applications. It is expected that the stepped pulse drive signal will generate tactile feedback within the touch screen device that begins and concludes sharply and, therefore, provide feedback sensations that strongly mimic mechanical devices.

[83] The principles of the present invention also may find application in optical or magnetic disk readers, which may include swing arms or sled based readers. One common structure for disk readers is illustrated in FIG. 24, which illustrates a motor-driven swing arm 2410 provided

over a disk surface 2420. The swing arm may include a motor coil 2430 mounted thereon which, when drive signals are supplied to it, generates magnetic flux that interacts with magnets (now shown) to move the swing arm across a range of motion. In this manner, a read head 2440 provided on the swing arm can address an identified track of information from the disk and read information.

[84] According to an embodiment, a disk reader control system may include a motor driver 2450 that, responsive to a codeword, generates a drive signal to the motor coil 2430 having a shape such as shown in FIGS. 5, 12 or 14. Swing arms (and sleds) may possess inertia from which an expected resonant frequency f_R and, by extension, the time constant t_C may be derived. The motor driver 2450 may apply steps having an aggregate amplitude sufficient to move the disk reader to a new position. At the conclusion of a final time constant, the motor driver 2450 may apply a final step to halt the reader at the addressed position with minimal oscillation.

[85] According to an embodiment, a drive signal generator 2500 of FIG. 25 may produce ramp-based motor drive signals with a fixed drive window. In prior motor driver systems, ramp signals are provided with a constant rate of change. In these "slope" ramp signal systems, the time to drive a mechanical system to a desired location is dependant on the distance to be traversed. For example, it would take twice as long to deliver a ramp signal corresponding to a movement 100 points as it would to deliver a ramp signal corresponding to a movement of 50 points. However, "slope" ramp signals require notch filtering and have varied frequency responses. A ramp based motor drive signal with a fixed drive window, on the other hand, may operate with linear filtering and have a constant frequency response.

[86] The drive signal generator 2500 may include an input code register 2510 to store code representing a new position that is to be traversed. The drive signal generator 2500 may include an old code register 2520 to store code representing an old or current position of the mechanical system. A subtractor 2530 may calculate the separation distance between the old and new positions by subtracting the new position code from the old position code.

[87] The drive signal generator 2500 may also include a ramp modulator 2540, clocked at a step clock rate, to generate a step response signal based on the separation distance. The step response may correspond to the individual steps in a particular drive signal. Furthermore, the drive signal generator 2500 may include an accumulator 2550 to generate a digital drive signal

in response to the step response signal. The accumulator 2550 may be initialized with a value corresponding to the old code that was maintained from a prior operation. DAC 2560 may generate an analog drive signal from the digital drive signal.

[88] FIG. 26 illustrates examples of ramp-based motor drive signals with a fixed drive window. The signals may cause the mechanical system to reach its desired destination within a predetermined time t_p , regardless of the separation distance. For example, FIG. 26 shows drive signals for full-range distance, half-range distance, and quarter-range distance traversal that operate for same predetermined time t_p . The predetermined time t_p may be set corresponding to a time the mechanical system takes to traverse a full range displacement at 1 point/cycle. The number of steps taken to reach the desired destination may vary depending on the distance to be traversed. The steps may be distributed across time hence certain steps may 'not be taken.' For example, half-range displacement may have 50% of steps not taken as compared to the steps taken for full-range displacement. Quarter-range displacement, for example, may have 75% of steps not taken as compared to the steps taken for full-range displacement. Other ratios may cause corresponding ratios of step cycles but may also generate irregular patterns.

[89] Drive signal generator 2500 may be used cooperatively with other embodiments described herein. For example, a motor driver system may operate in several modes with one mode being ramp based drive signal with fixed drive window mode.

[90] According to an embodiment, the motor-driven system 2700 may include a feedback system as shown in Fig. 27. The feedback system may be a detection system for a back channel, a hall effect sensor, or other suitable feedback devices. The motor-driven system may include a control chip 2710 that sends a code to instruct the motor driver 2720 to drive the mechanical structure 2730. The mechanical structure 2750 may include a motor 2730 and mechanical system 2740. The motor driver may transmit a drive signal to the motor 2730 via a signal line connecting the motor driver 2720 and the motor 2730. The motor 2730, responsive to the drive signal, moves the mechanical system 2740, which may cause oscillations or ringing behavior in the mechanical structure 2740. The oscillations may be captured by a feedback system. The oscillations induce an electrical signal in the signal line that extends between the motor 2730 and motor driver 2720. The back channel may be on the same signal line the drive signal is transmitted or may be on a separate signal line.

[91] The back channel detection system may calculate the resonant frequency, f_R , of the mechanical system. System manufacturers often do not know the resonant frequency of their mechanical systems precisely. Moreover, particularly in consumer devices where system components must be made inexpensively, the resonant frequency can vary across different manufacturing lots of a common product. Therefore, the calculation of the mechanical system's actual resonant frequency rather than depending on the manufacturer's expected resonant frequency improves precision in the mechanical system during use and reduces settling time because of stop band width reduction.

[92] Fig. 28 illustrates an embodiment of a drive signal generator 2800 that may be incorporated in a motor driver to calculate the actual resonant frequency of the mechanical system. The drive signal generator 2800 may include an accumulator 2820 to generate a digital test drive signal, digital-to-analog converter (DAC) 2830 to generate an analog test drive output signal from the accumulator's digital output, which is then applied to the motor of the mechanical structure, a back channel sensor 2840 to capture a back channel electrical signal; a processing unit 2850 to calculate the actual resonant frequency; and a register 2810 that stores the calculated resonant frequency. The analog signal may be generated as current or voltage.

[93] Fig. 29 is a flow diagram of a method 2900 to determine the actual resonant frequency of the mechanical system according to an embodiment of the present system. The method may include generating a test drive signal (block 2910). The test drive signal may be a unit step drive signal that has a value that is sufficient to drive the mechanical system to an intermediate position within the mechanical system's range of motion. The drive signal may be generated according to a unit step function, a ramp function, or other function that possesses non-zero energy over a broad range of candidate resonant frequencies of the mechanical system. The motor, responsive to the test drive signal, may move the mechanical system and should induce oscillatory behavior therein. The oscillations may induce an electrical signal in the back channel of the motor. The method may capture the back channel signal in the back channel sensor (block 2940). The method may generate data samples from the captured back channel signal (block 2950). From the data samples, the method may calculate the actual resonant frequency of the mechanical system (block 2960). The process may further include storing the calculated resonant frequency in the f_R register (block 2970). The stored resonant frequency may then be used to generate drive signals during run time as discussed in the foregoing embodiments.

[94] Fig. 30 shows an example of a test drive signal in Fig. 30 (a) and the corresponding movement of the mechanical system in Fig. 30 (b). The test drive signal in Fig. 30 (a) is a unit step drive signal that corresponds to the mid-point within the mechanical system's range of movement. The drive signal is applied to the motor, which causes motion in the mechanical system. The displacement of the mechanical system responsive to the mid-point drive signal is shown Fig. 30 (b). The ringing effect is seen in the beginning of the displacement graph where the mechanical system's displacement first acts with an oscillatory behavior before settling to its corresponding displacement value. The oscillatory behavior induces an electrical signal in the back channel with the same resonant frequency as the oscillations in the mechanical system.

[95] Resonant frequency may also be calculated in a searching/adaptive process. Fig. 31 is a flow diagram of a method 3100 to adaptively adjust a stored resonant frequency value of the mechanical system according to an embodiment. The method may include applying a drive signal (block 3110). A nominal value for f_R may be stored in a register at this time. The nominal value for f_R may be the last f_R value calculated. The drive signal may be a test drive signal or a drive signal applied in normal operation. If the drive signal is a test drive signal, it may be a unit step drive signal that has a value that is sufficient to drive the mechanical system to an intermediate position within the mechanical system's range of motion. The drive signal may be generated according to a unit step function, a ramp function, or other function that possesses non-zero energy over a broad range of candidate resonant frequencies of the mechanical system. The motor, responsive to the drive signal, may move the mechanical system and should induce oscillatory behavior therein. The method may estimate a magnitude of the oscillations, M (block 3120). According to M , the method may adjust f_R (block 3130). The adjustment may depend on factors such as mechanical system orientation and step size. The method may further include storing the calculated resonant frequency in the f_R register. The stored resonant frequency may then be used to generate drive signals during run time as discussed in the foregoing embodiments.

[96] Fig. 32(a) is a flow diagram of method 3200 to calculate the f_R adjustment according to an embodiment. The method may include estimating a frequency region of the oscillations, F_E (block 3201). F_E may have a tolerance, such as $\pm 10\%$; therefore, a precise measurement is not needed. The method may compare the stored f_R and F_E , to check whether the stored f_R is located within F_E , below F_E , or above F_E (block 3202). If the stored f_R is located within F_E , the method may maintain the stored f_R (block 3203). If the stored f_R is below F_E , the method may

increase the stored f_R by a predetermined amount (3204). If the stored f_R is above F_E , the method may decrease the stored f_R by a predetermined amount (block 3205). The method may further include storing the adjusted f_R in the f_R register.

[97] Fig. 32(b) is a flow diagram of method 3250 to calculate the f_R adjustment according to another embodiment. The method may include assigning a preferred sign (+ or -) for a f_R adjustment (block 3251). The preferred sign may be assigned based on prior patterns or operation of the mechanical system. The method may detect whether the mechanical system's performance has degraded, by comparing a current oscillation magnitude to a previous oscillation magnitude (block 3252). The oscillation magnitude increasing over time indicates that the performance has degraded. If the current oscillation magnitude is greater than the previous oscillation magnitude, the method may change the preferred sign and adjust f_R a predetermined amount according to the newly assigned sign (block 3253). The method may further store the changed sign as the preferred sign for the next iteration. If the oscillation magnitude is not greater than the previous oscillation magnitude, the method may maintain the preferred sign and adjust f_R a predetermined amount according to the preferred sign (block 3254). The predetermined amount changes to f_R may be set to relatively small amounts because large variations in resonant frequency are not expected. Accordingly, method 3250 may track and adjust f_R continuously.

[98] According to an embodiment, the back channel detection system may calculate the D_{TH} required to move the mechanical system from the starting mechanical stop position. Again, system manufacturers often do not know the D_{TH} of their mechanical systems precisely. Moreover, particularly in consumer devices where system components must be made inexpensively, the D_{TH} can vary across different manufacturing lots of a common product. Therefore, the calculation of the mechanical system's actual D_{TH} rather than depending on the manufacturer's expected D_{TH} improves precision in the mechanical system during use.

[99] Fig. 33 illustrates an embodiment of a drive signal generator 3300 that may be incorporated in a motor driver to calculate the actual D_{TH} of the mechanical system. The drive signal generator 3300 operates in an initialization mode of the motor driver. It may include an accumulator 3320 to generate a digital test drive signal, a digital-to-analog converter (DAC) 3330 to generate an analog test drive output signal based on the accumulator's digital output, which is applied to the motor of the mechanical structure, a back channel sensor 3340 to

capture a back channel electrical signal, a processing unit 3350 to calculate the actual D_{TH} value or instruct the accumulator 3320 to generate another digital test drive signal, and a D_{TH} register 3330 to store the calculated D_{TH} value. The analog signal may be generated as current or voltage.

[100] According to an embodiment of the present invention, the drive signal generator may further include a position sensor 3360 to store the position and orientation of the mechanical system. The position sensor 3360 may be coupled to the accumulator 3320. D_{TH} may be sensitive to the mechanical system's orientation. For example, a lens mechanical system may have a lower D_{TH} when facing downwards because gravity's assisting force downwards, and conversely, a lens mechanical system may have a higher D_{TH} when facing upwards because gravity's opposing force downwards. The position sensor 3360 may be an inclinometer, a gyroscope, or any suitable position detection device.

[101] Fig. 34 is a flow diagram of a method 3400 to determine the D_{TH} of the mechanical system according to an embodiment of the present system. The method 3400 may perform an iterative process to determine D_{TH} . The process may generate a test drive signal using a current estimate of D_{TH} stored in the D_{TH} register (block 3420). The test drive signal maybe generated according to a unit step function. In a first iteration, the D_{TH} estimate may be a preprogrammed value but thereafter it may be set by a previous iteration. According to an embodiment, the test drive signal may be generated when a change in orientation is detected. The test drive signal may also be generated according to a detected orientation of the mechanical system. The test drive signal may be applied to the motor of the mechanical system. If the value of the test drive signal is equal to or higher than the actual D_{TH} , the motor should move the mechanical system, which produces oscillations in the mechanical system. The oscillations may induce an electrical signal in the back channel. However, if the value of the test drive signal is lower than the actual D_{TH} , the mechanical system does not move and, consequently, no back channel signal is induced.

[102] The method 3400 may monitor the back channel for oscillations (block 3430) and determines if a back channel signal is present. If a back channel signal is not observed, the method 3400 increases the test drive signal for another iteration (block 3440). The method may repeat. If the back channel signal is observed, the processing unit checks if the current D_{TH} value is within a predetermined level of precision (block 3450). This check may be done,

for example, by determining if the value of D_{TH} has been changed a predetermined number of times in the process. If the current D_{TH} estimate is not within a level of precision, the method decreases the test drive signal (block 3440). The method may repeat.

[103] If the D_{TH} value is known to be within the level of precision, the processing unit stores the current D_{TH} value in the D_{TH} register as a final estimate (block 3470). Thereafter, the method may conclude. The stored D_{TH} value may then be used in any embodiment of the present invention that uses expected D_{TH} value. Additionally, a feedback driven search method may be implemented to improve convergence speed by calculating the amplitude of the unit step functions based on the measured parameters of the back channel responsive to previous drive signals.

[104] Fig. 35 shows an example of a test drive signals in Fig. 35 (a) and the corresponding movements of the mechanical system in Fig. 35 (b). The 1st Step Value test drive signal in Fig. 35 (a) is a unit step drive signal that corresponds to the estimated D_{TH} value. The drive signal is applied to the motor, which causes motion in the mechanical system. The displacement of the mechanical system responsive to the 1st Step Value test drive signal is shown Fig. 35 (b). The ringing effect is seen in the beginning of the displacement graph where the mechanical system's displacement first acts with an oscillatory behavior before settling to its corresponding displacement value. The oscillatory behavior induces an electrical signal in the back channel with the same resonant frequency as the oscillations in the mechanical system. The 2nd Step Value test drive signal, which is lower in magnitude than the 1st Step Value test drive signal, does not cause the motor to be driven so no movement in the mechanical system hence no oscillatory behavior as shown in Fig. 35. Therefore, the 2nd Step Value test drive signal was lower than the actual D_{TH} . The process would continue by generating a 3rd Step Value (not shown) in between the 1st and 2nd Step Value and monitoring for oscillatory behavior iteratively until a D_{TH} value is determined within the level of precision.

[105] Both the resonant frequency, f_R , and D_{TH} value may be determined in an initialization mode. The initialization mode may be triggered when the mechanical system is first turned on, or every time the mechanical system is turned on, or at other predetermined times. The f_R and D_{TH} value calculating processes may also be performed concurrently or successively in the same initialization mode or in different initialization modes. If both processes are performed concurrently, the same test drive signal may be used for both processes with the processing

unit calculating both actual f_R and D_{TH} value using the same back channel signal. If both processes are performed successively, the processes may be performed in either order. Additionally, D_{TH} value may be modified when an orientation change is detected according to a function or look-up-table (LUT).

[106] Several embodiments of the present invention are specifically illustrated and described herein. However, it will be appreciated that modifications and variations of the present invention are covered by the above teachings and within the purview of the appended claims without departing from the spirit and intended scope of the invention. Additionally, it will be appreciated that the signals illustrated above represent idealized forms of drive signals with instantaneous response; in practice, some amount of slew can be expected from a motor driver in actual operating conditions. Such effects have been omitted from the foregoing discussion so as not to obscure the principles of the present invention.

WE CLAIM:

1. A method for driving a motor-driven mechanical system using a calculated mechanical system specific resonant frequency, comprising:
 - applying a test drive signal to a motor of a mechanical system to cause oscillatory behavior in the mechanical system;
 - capturing a back channel electrical signal induced by the motor from the oscillatory behavior;
 - calculating a resonant frequency of the mechanical system from the captured electrical signal; and
 - storing the calculated resonant frequency in a register, the resonant frequency to be used in a run time mode.
2. The method of claim 1, further comprising:
 - applying a drive signal to the motor of the mechanical system in the run time mode, the drive signal having substantially zero energy at the calculated resonant frequency.
3. The method of claim 1, wherein the motor is a lens driver motor.
4. A drive signal generator, comprising:
 - a test signal generator having an output for connection to a motor of a mechanical system;
 - a back channel sensor to capture an electrical signal induced by the motor from oscillatory behavior in the mechanical system;
 - a processor to calculate a resonant frequency of the mechanical system from the captured electrical signal; and
 - a register to store the calculated resonant frequency.
5. The drive signal generator of claim 4, wherein the accumulator generates a drive signal in a run time operation mode, the drive signal having substantially zero energy at the stored resonant frequency.
6. The drive signal generator of claim 4, further comprising a digital to analog converter to generate an analog representation of the test drive signal.

7. A system comprising;
 - a mechanical structure having a drive motor;
 - a drive signal generator coupled to the drive motor, comprising:
 - an initialization circuit, operable in an initialization mode to generate a test drive signal to cause oscillatory behavior in the mechanical structure;
 - a back channel sensor to capture an electrical signal induced by the motor from the oscillatory behavior;
 - a processing unit to calculate a resonant frequency of the mechanical structure from the captured electrical signal; and
 - a drive circuit, operable in a run time mode, including a register to store the calculated resonant frequency.
8. The system of claim 7, wherein the drive circuit is further operable to generate a drive signal in the run time mode, the drive signal having substantially zero energy at the stored resonant frequency.
9. The system of claim 7, wherein the drive signal generator further comprising a digital to analog converter to generate an analog representation of the test drive signal.
10. A method for driving a motor-driven mechanical system using a calculated mechanical system specific threshold value, D_{TH} , comprising:
 - iteratively:
 - applying a drive signal at a current step value to the motor;
 - monitoring a signal line from the motor for a back channel electrical signal induced by movement of the mechanical system; and
 - if the back channel signal indicates movement of the mechanical system, adjusting the step value for another iteration;
 - when a step value is applied that causes no oscillation in the mechanical system, storing the step value as the threshold value D_{TH} , the D_{TH} to be used in a run time mode.
11. The method of claim 10, further comprising:
 - applying a drive signal to the motor in a run time mode using the stored D_{TH} .

12. The method of claim 10, wherein the method is triggered by an orientation change in the mechanical system.
13. The method of claim 10, further comprising:
 - detecting the mechanical system's orientation; and
 - adjusting D_{TH} based on the orientation.
14. The method of claim 13, wherein the adjusting is according to a function or look-up-table.
15. A drive signal generator, comprising:
 - an initialization circuit to generate a test drive signal at a current value to be applied to a motor;
 - a back channel sensor to monitor an electrical signal induced by the motor due to movement of a mechanical system;
 - a processor to perform an iterative operation including monitoring the back channel and adjusting the test drive signal value until a threshold value D_{TH} is determined; and
 - a register to store the determined D_{TH} value.
16. The drive signal generator of claim 15, further comprising a drive circuit to generate drive signal in a run time mode using the stored D_{TH} .
17. The drive signal generator of claim 15, further comprising a digital to analog converter to generate an analog representation of the drive signal.
18. The drive signal generator of claim 15, further comprising a position sensor to detect the mechanical system's orientation.
19. A system comprising:
 - a mechanical structure having a drive motor; and
 - a drive signal generator coupled to the drive motor, comprising:
 - an initialization circuit, operable in an initialization mode to generate a test drive signal at a current value to be applied to the drive motor;
 - a back channel sensor to monitor an electrical signal induced by the motor due to movement of the mechanical structure;

a processing unit to perform an iterative operation including monitoring the back channel and adjusting the test drive signal value until a threshold value D_{TH} is determined; and

a drive circuit, operable in a run time mode, including a register to store determined D_{TH} value.

20. The system of claim 19, wherein the drive circuit is further operable to generate a drive signal in the run time mode using the stored D_{TH} .

21. The system of claim 19, wherein the drive signal generator further comprising a digital to analog converter to generate an analog representation of the test drive signal.

22. The system of claim 19, wherein the drive signal generator further comprising a position sensor to detect the mechanical system's orientation.

23. A system comprising:

a mechanical structure having a drive motor; and

a back channel detection system, comprising:

an initialization circuit, operable in an initialization mode to applying a test drive signal to the drive motor;

a back channel sensor to monitor a signal line from the drive motor for an electrical signal induced by the drive motor due to movement of the mechanical structure;

a processing unit to calculate a characteristic value of the mechanical structure from the monitored back channel electrical signal; and

a drive circuit, operable in a run time mode, including a register to store the calculated characteristic value.

24. A method for driving a motor-driven mechanical system, comprising:

applying a drive signal to a motor of a mechanical system to cause oscillatory behavior in the mechanical system;



capturing a magnitude estimate of the oscillatory behavior;

adjusting a resonant frequency of the mechanical system based on the magnitude estimate; and


storing the adjusted resonant frequency in a register.




25. The method of claim 24 wherein the drive signal is a test drive signal.



26. The method of claim 24 wherein the drive signal is a normal operation drive signal.
27. A drive signal generator, comprising:
- a driver circuit to generate a drive signal to be applied to a motor;
 - a feedback circuit to capture oscillations caused by the motor due to movement of a mechanical system;
 - a processor to adjust a resonant frequency according to the captured oscillations; and
 - a register to store the resonant frequency.

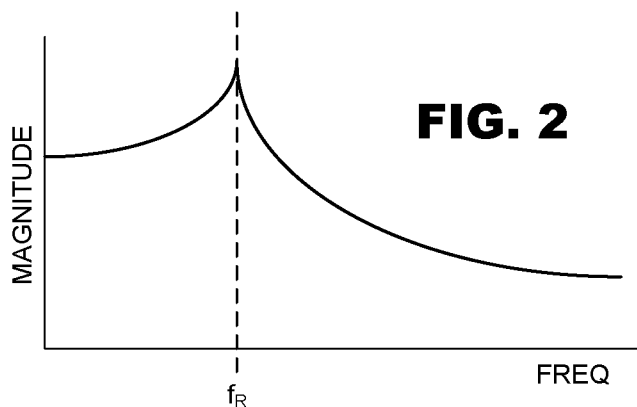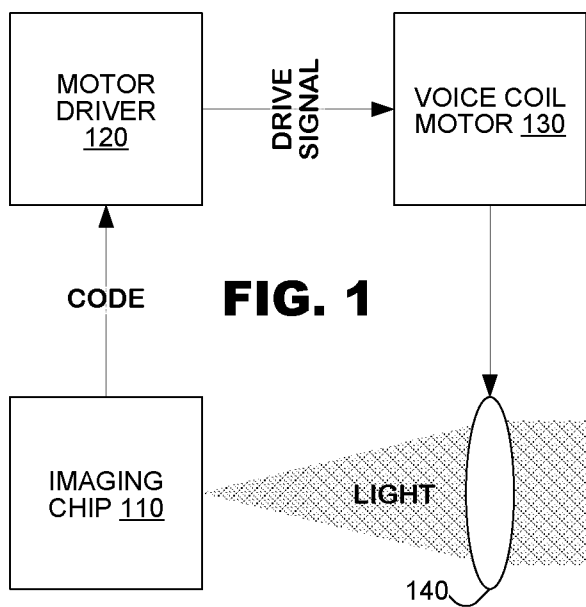

RESPONSE OF
MECHANICAL SYSTEM

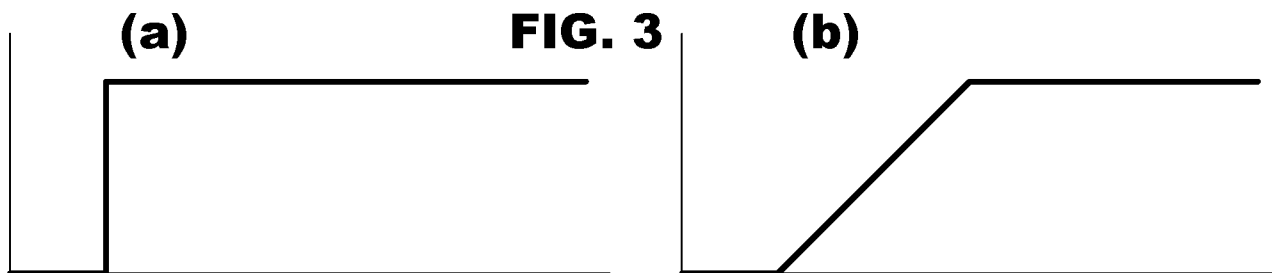

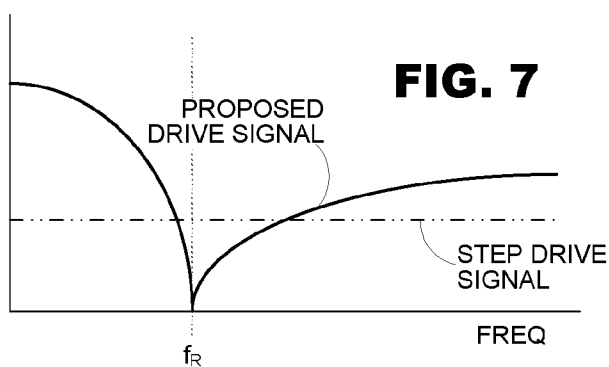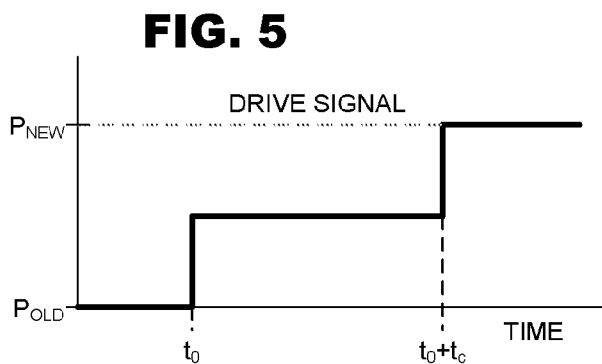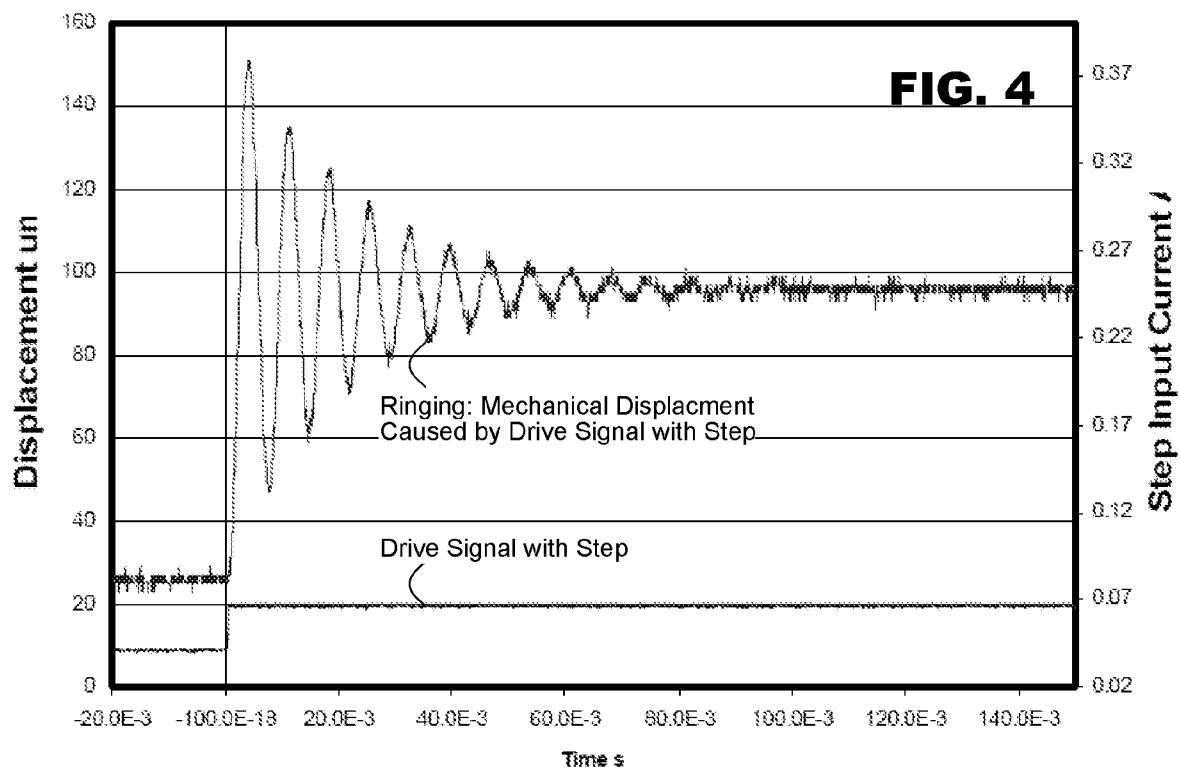

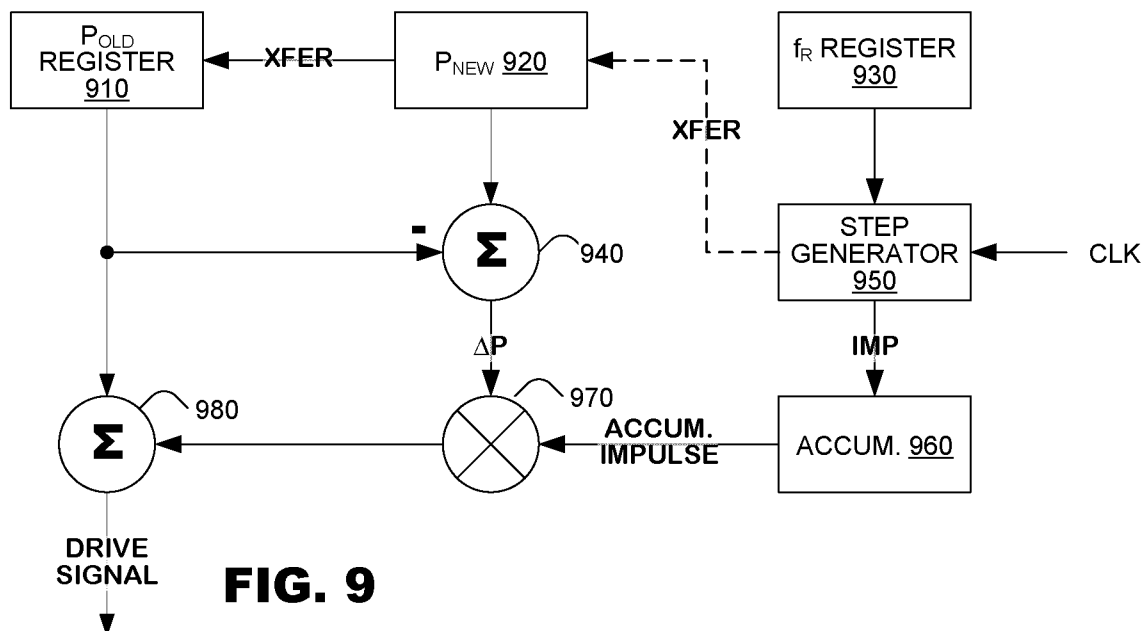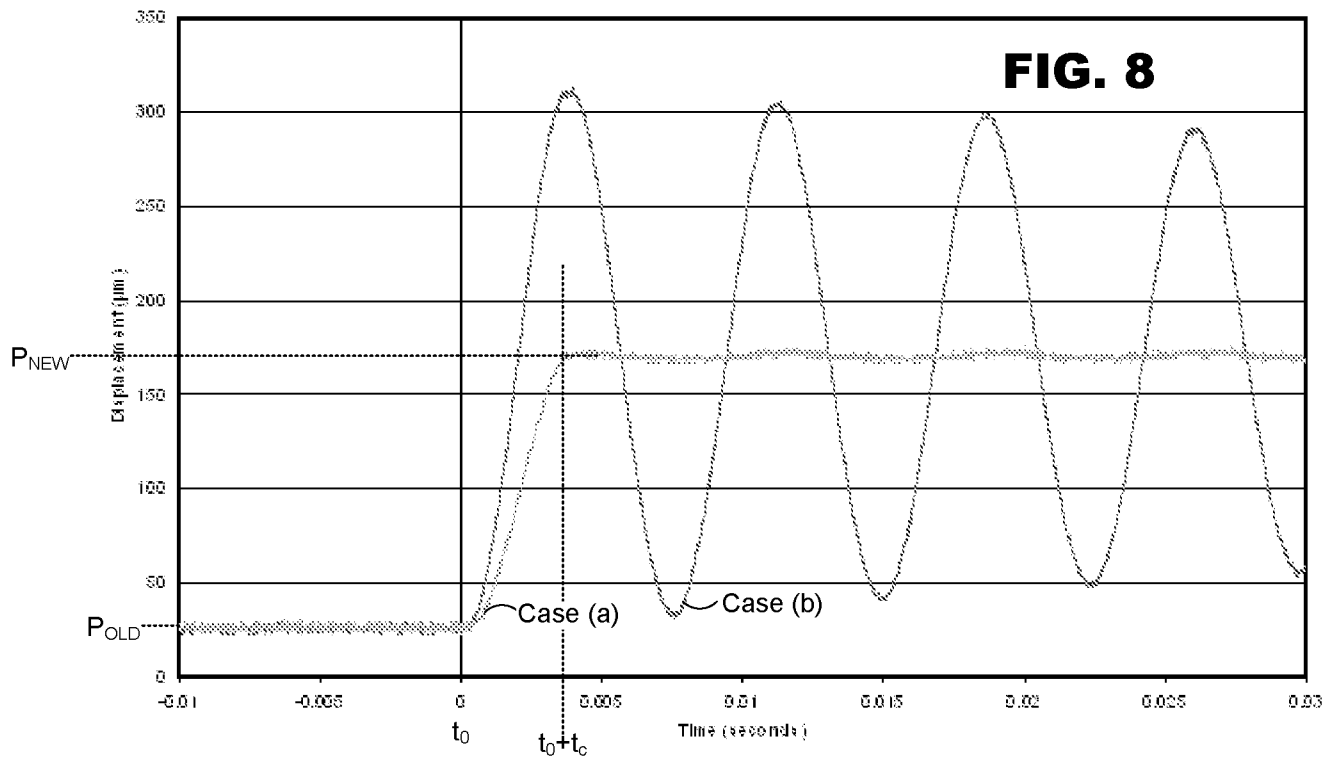

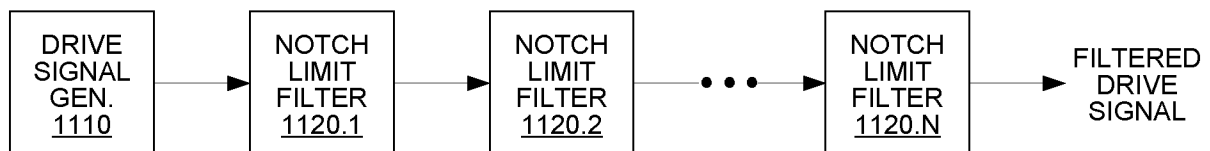
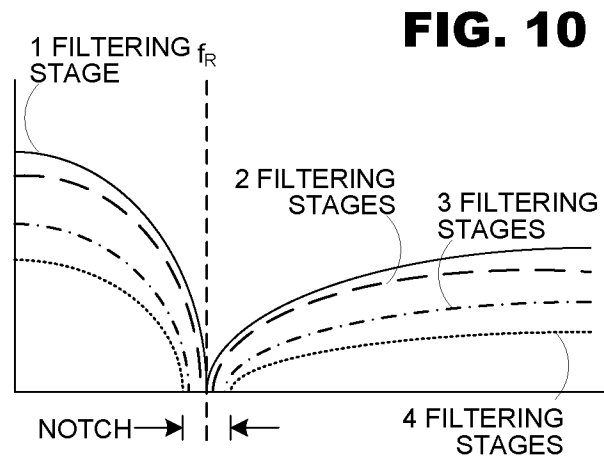
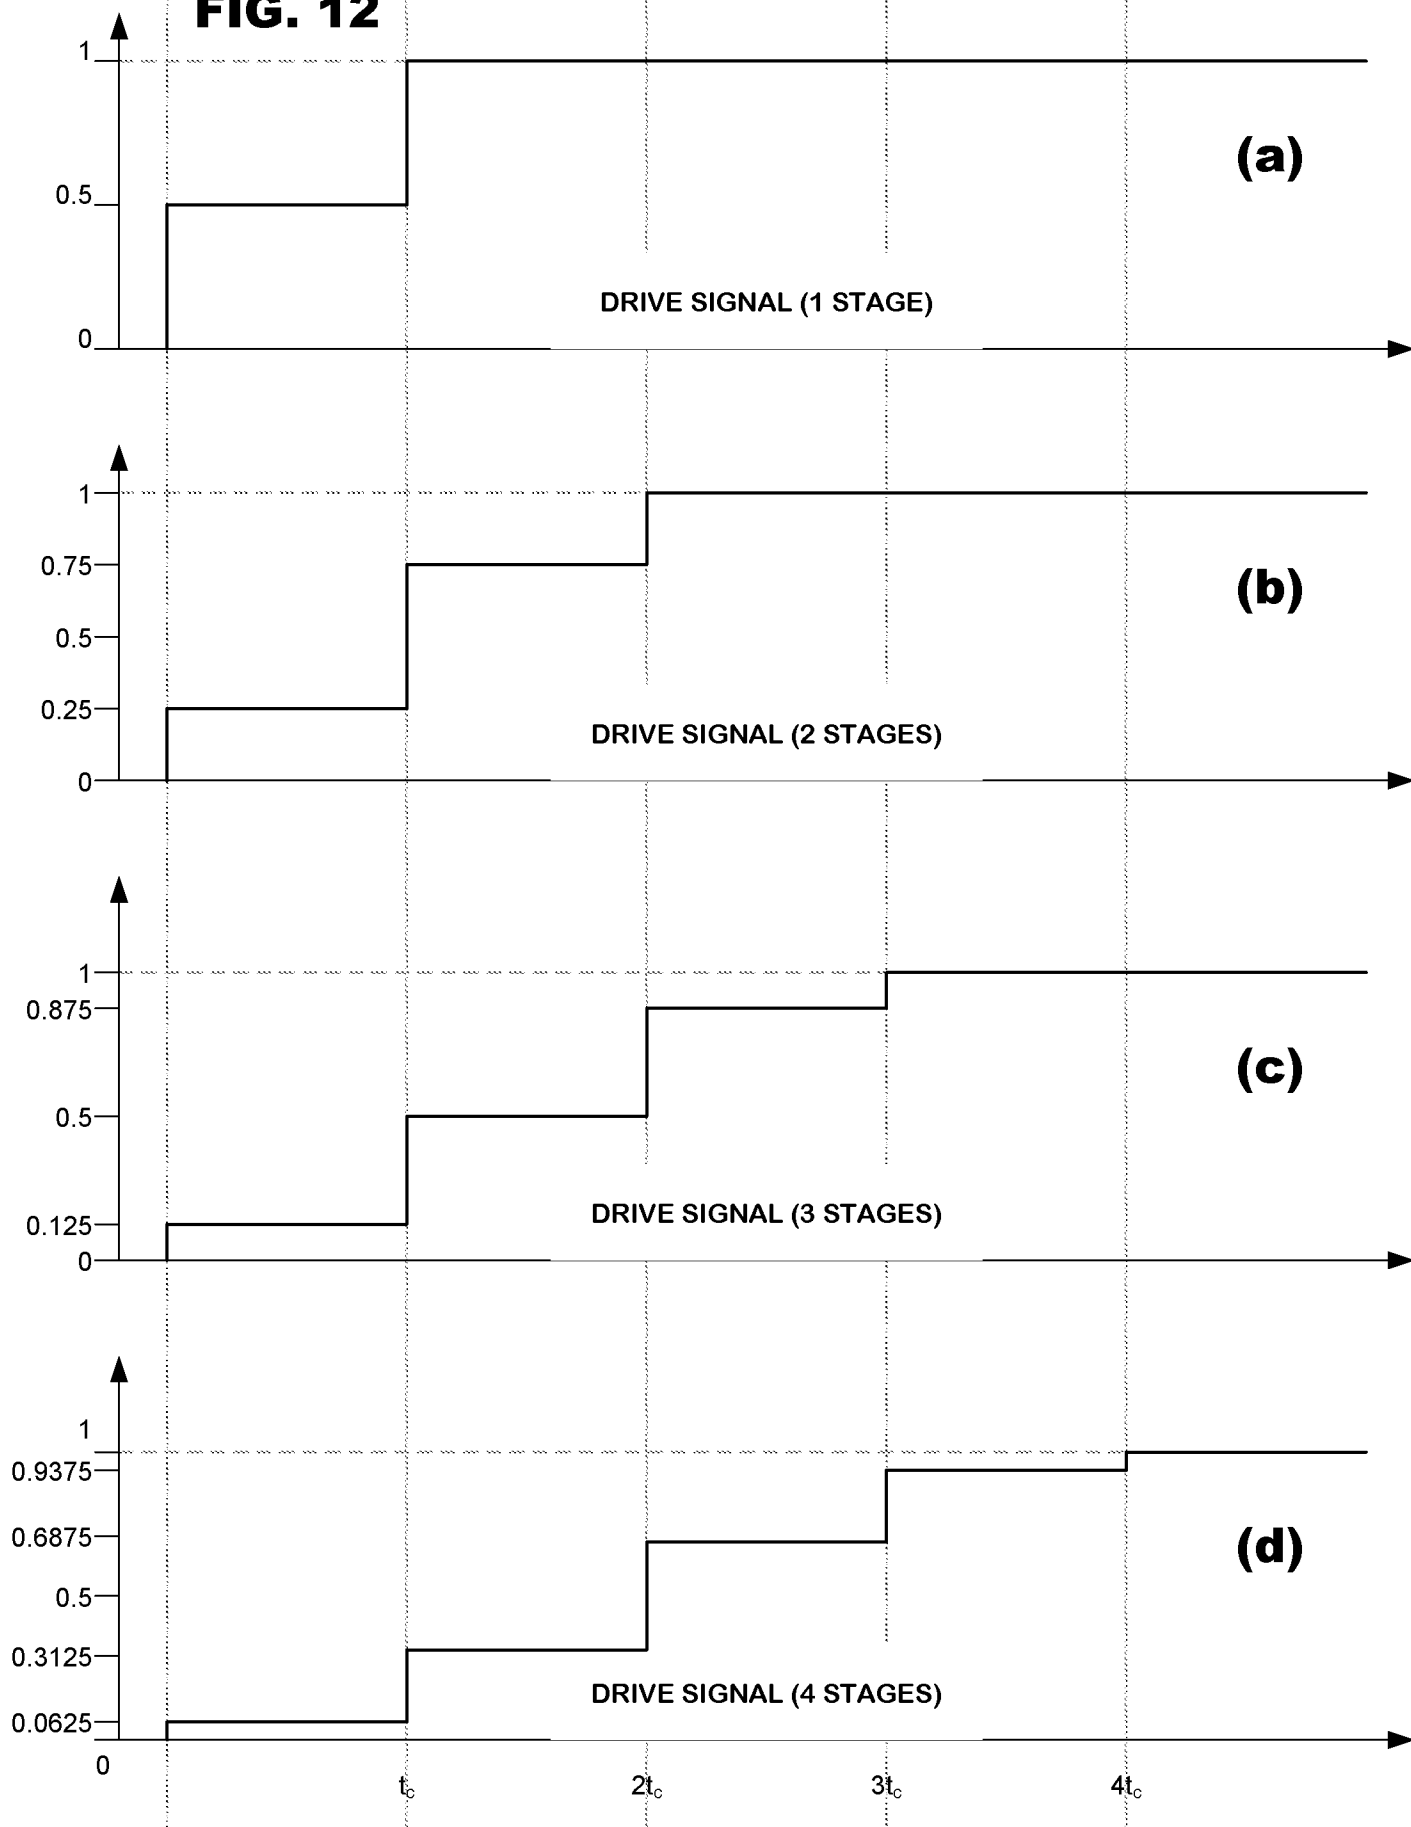
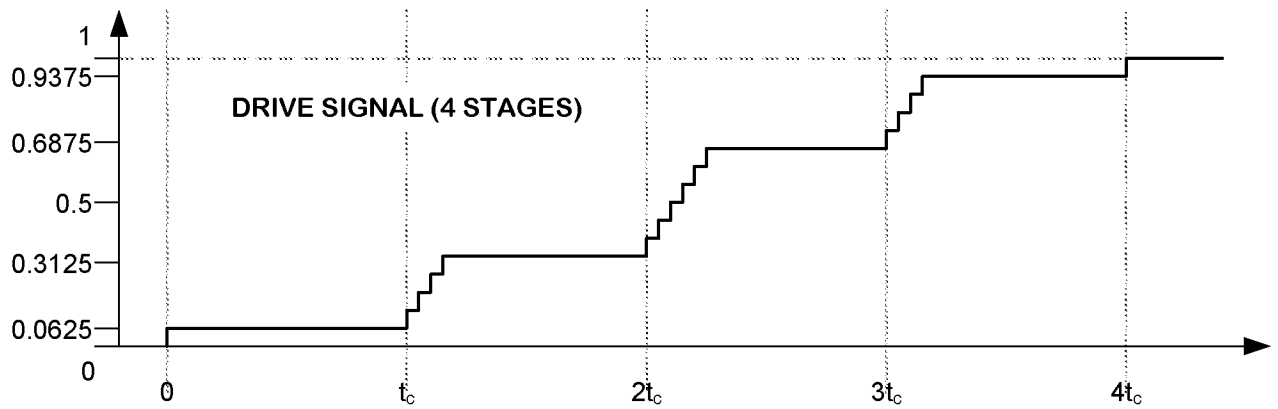
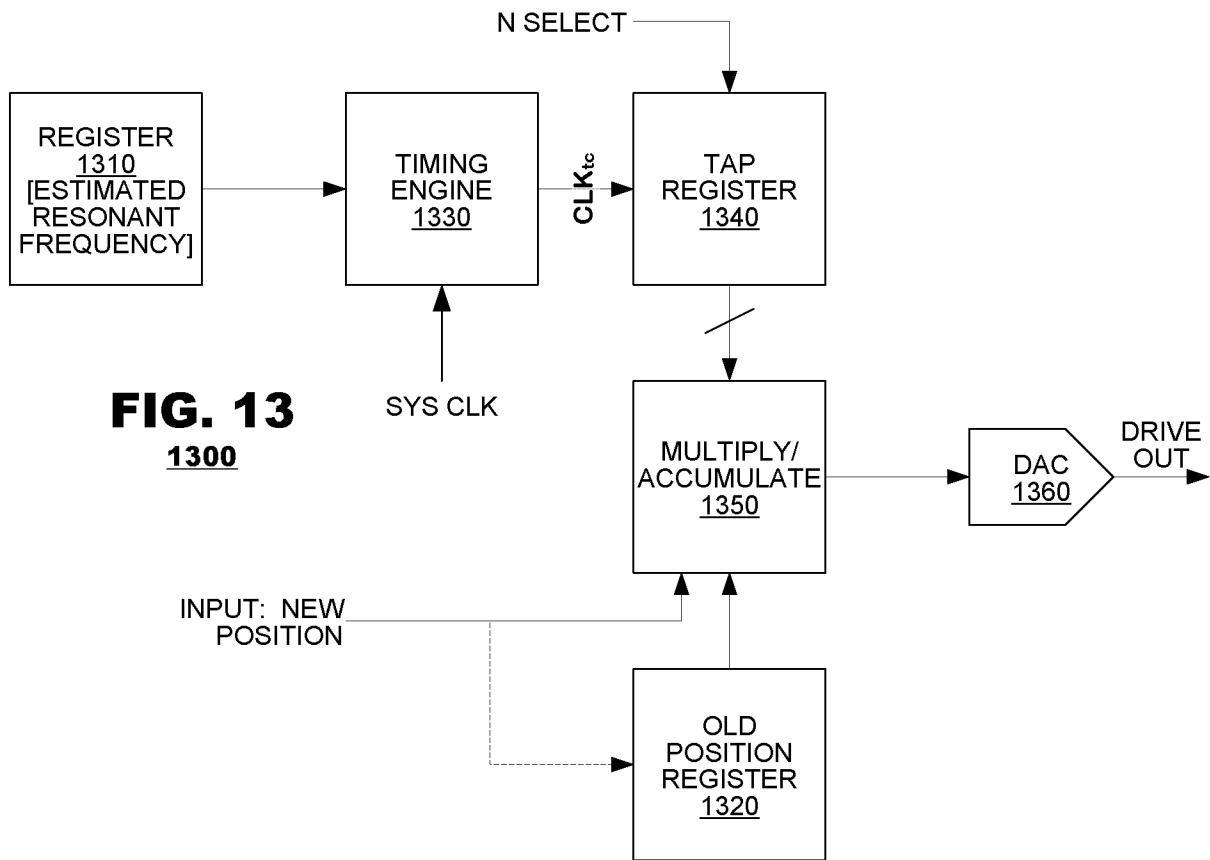
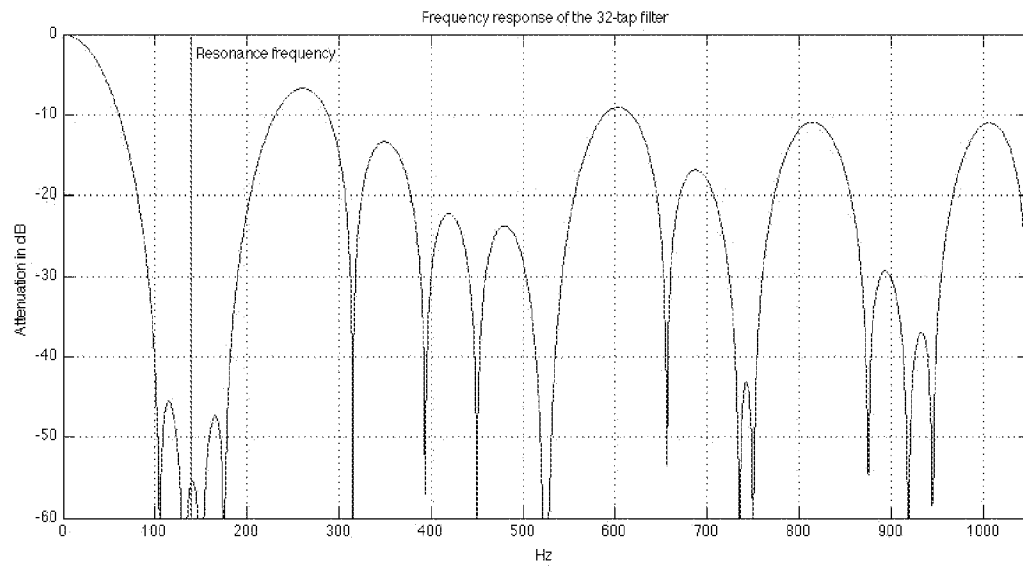
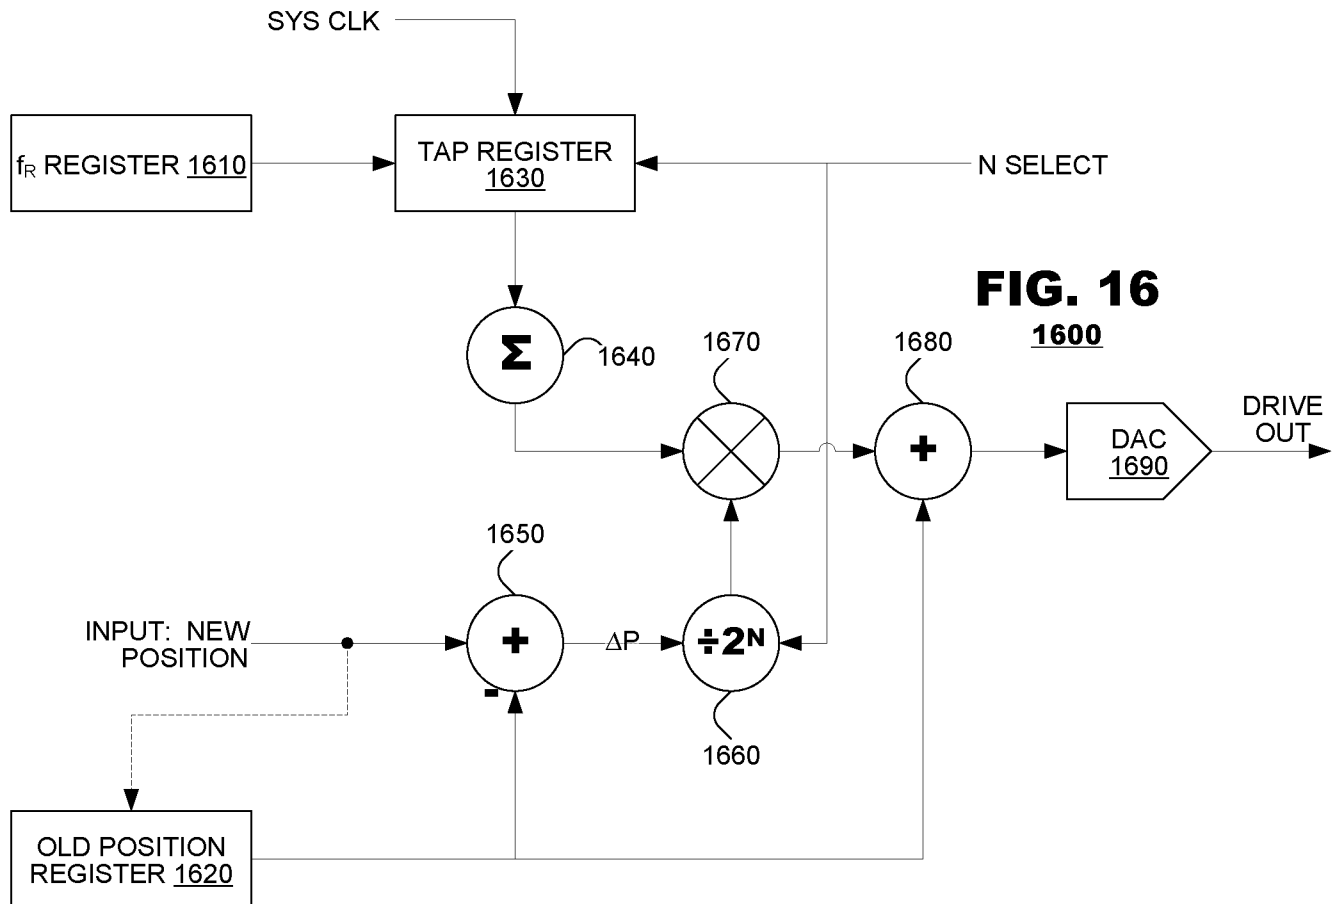
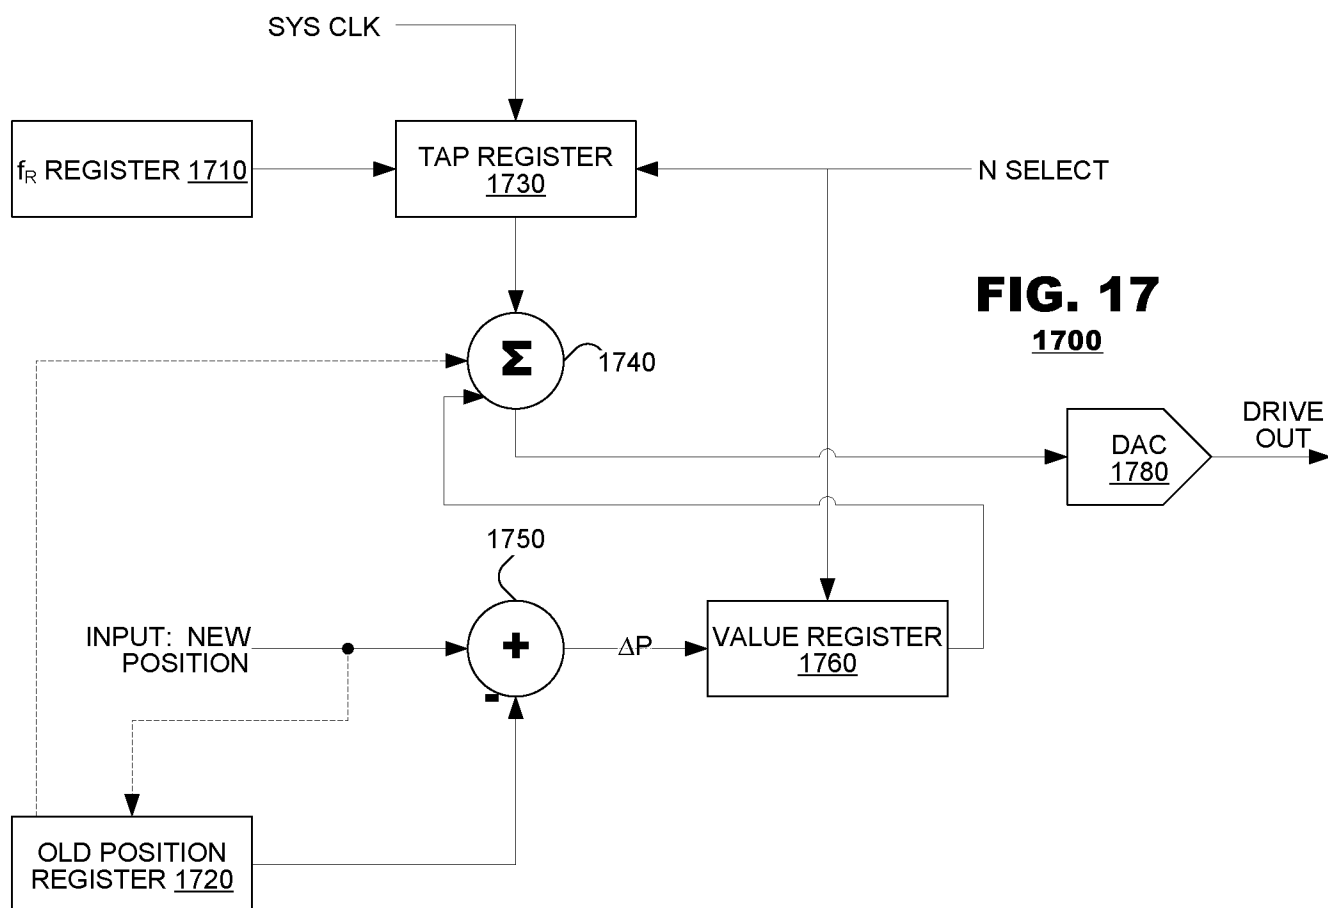




FIG. 12



**FIG. 15**





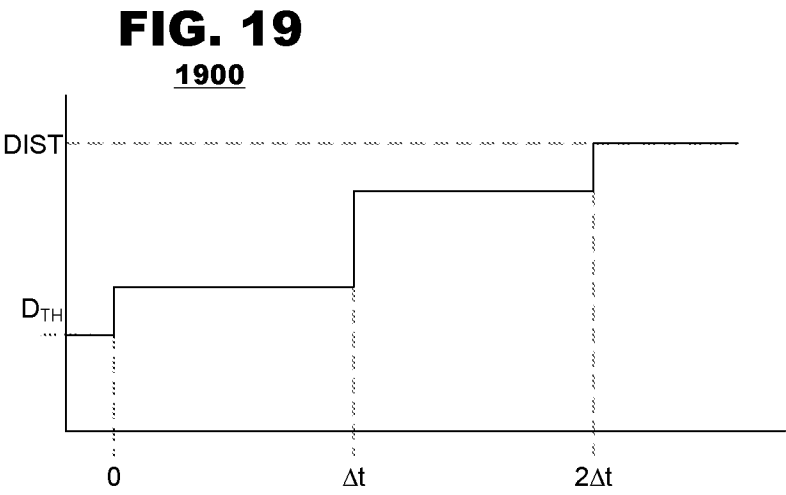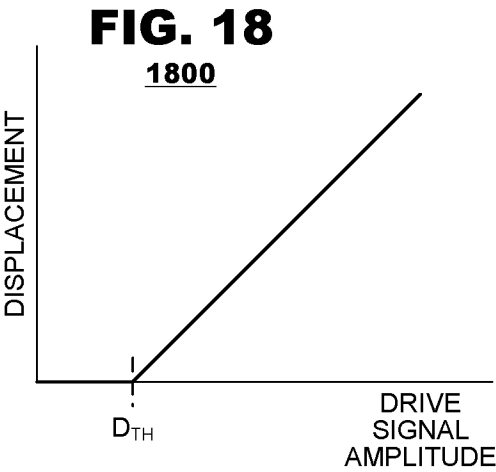

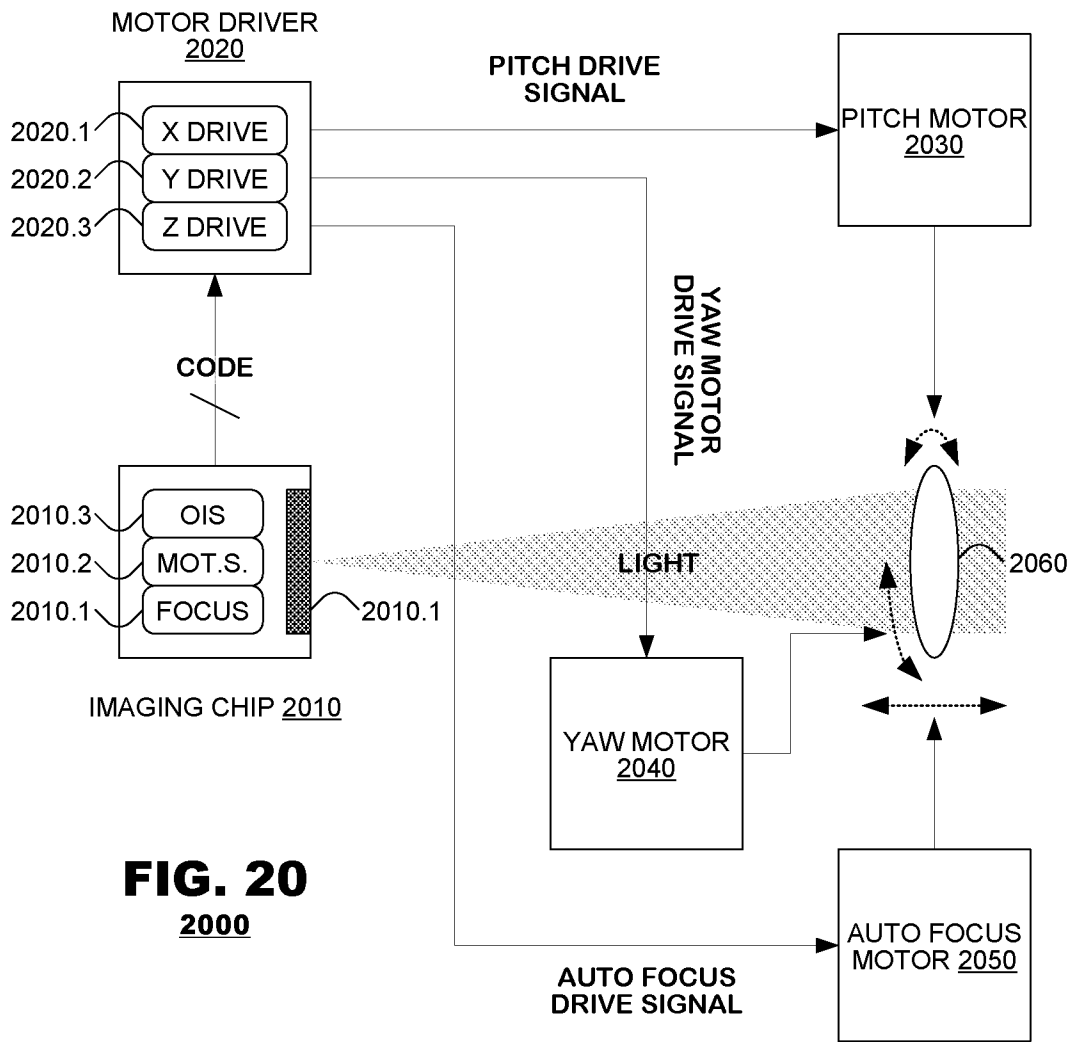


FIG. 20
2000

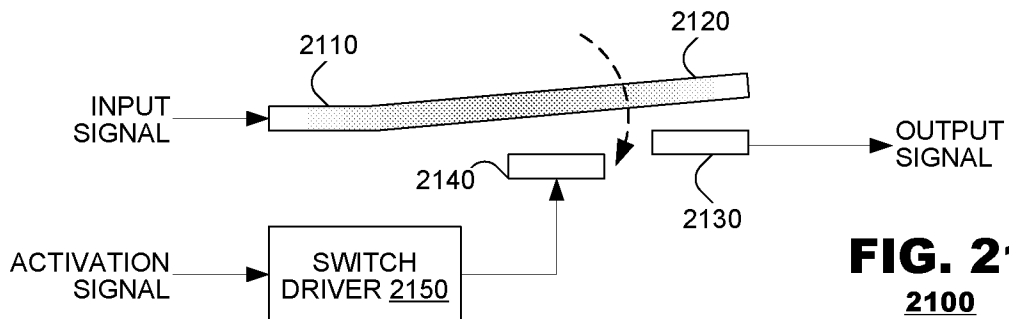
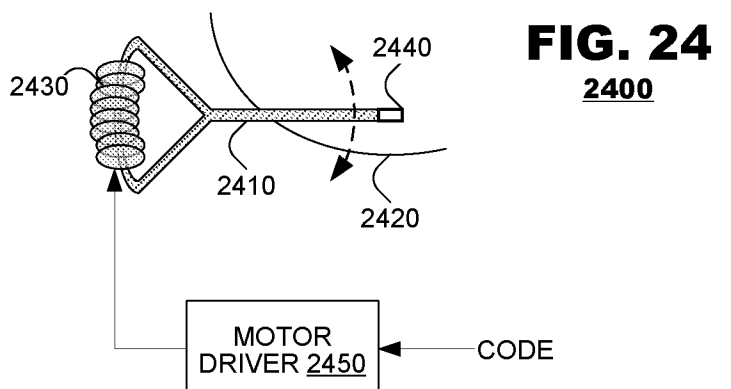
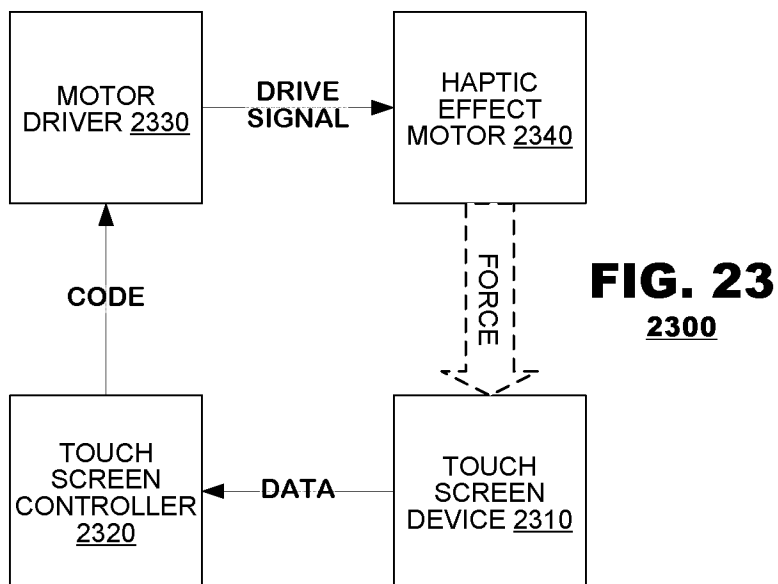
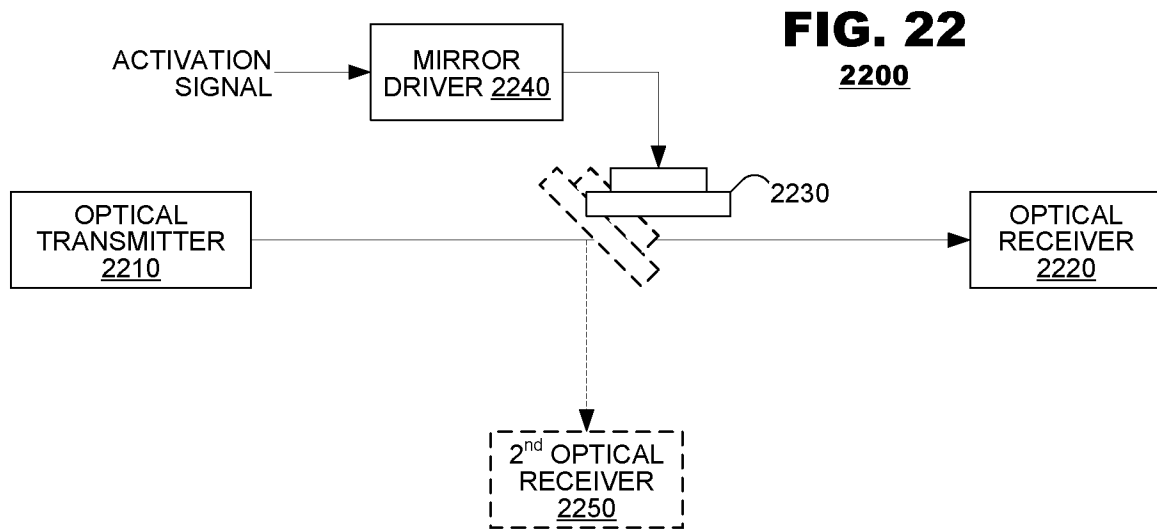


FIG. 21
2100



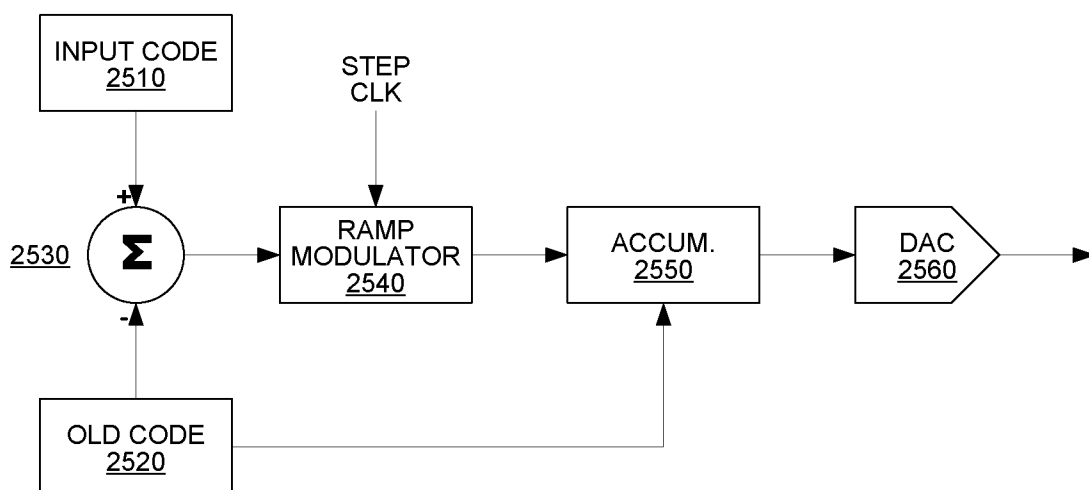


FIG. 25
2500

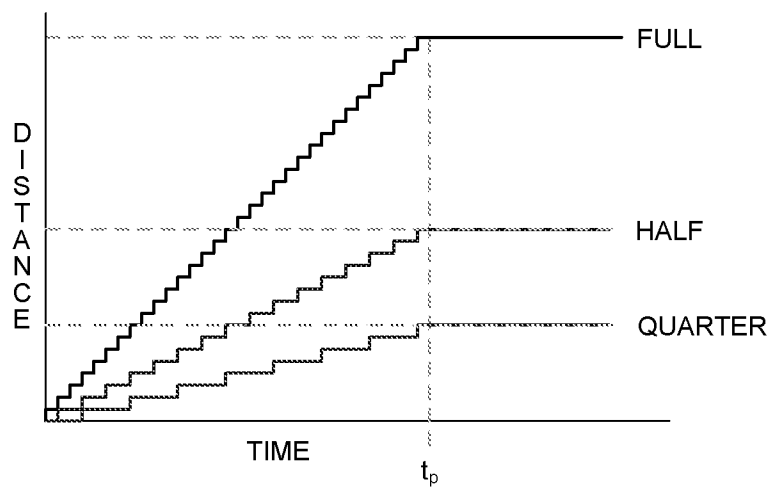


FIG. 26

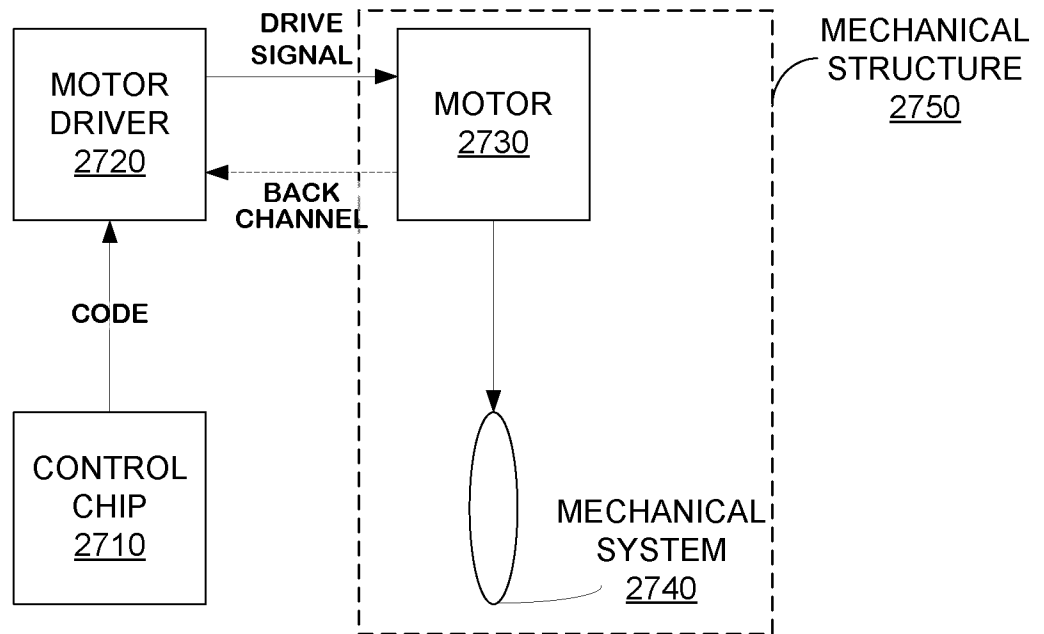


FIG. 27
2700

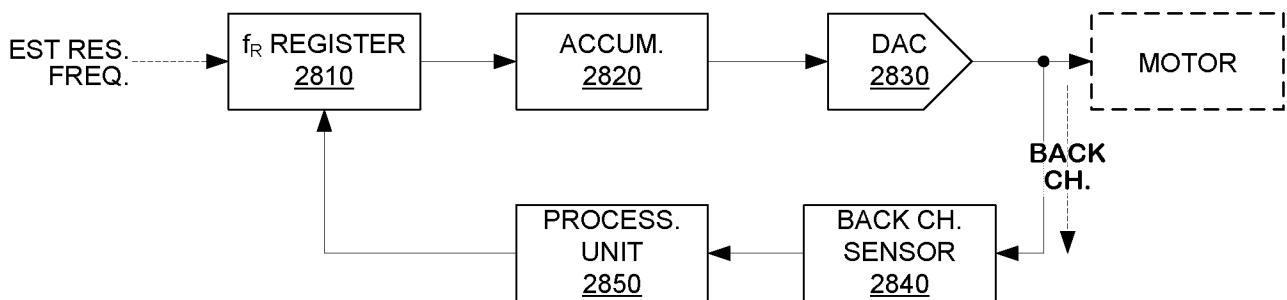


FIG. 28
2800

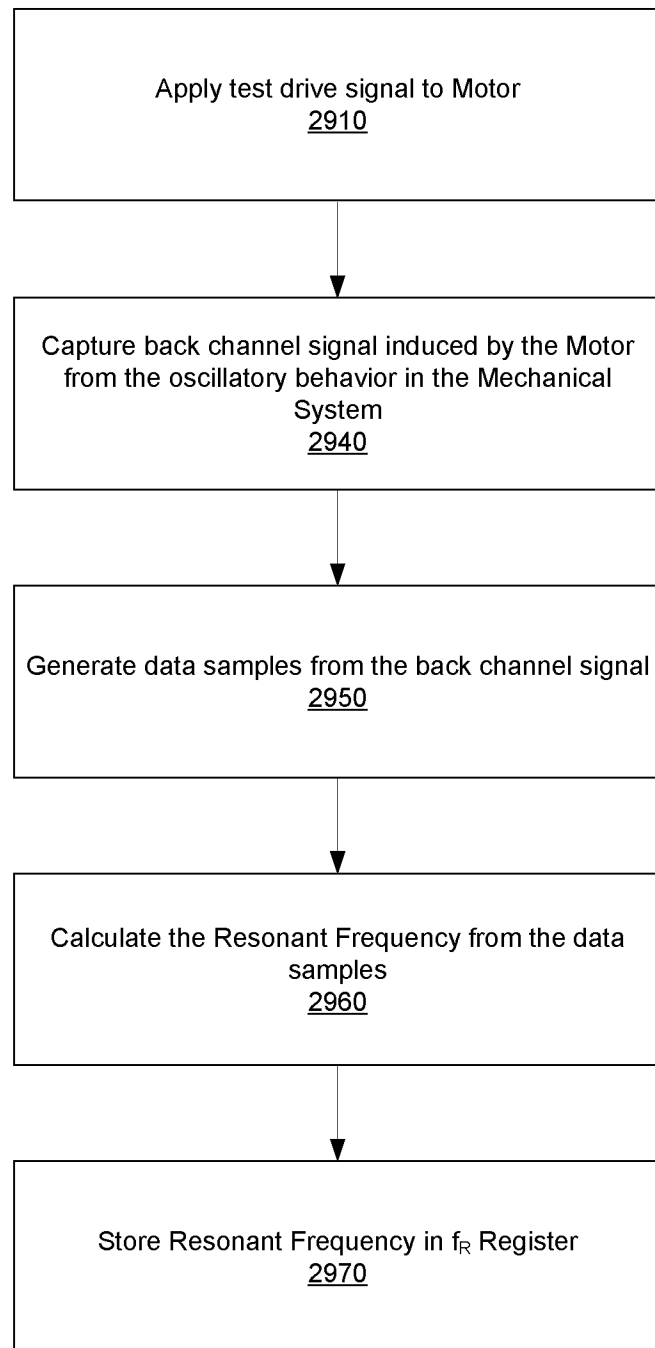
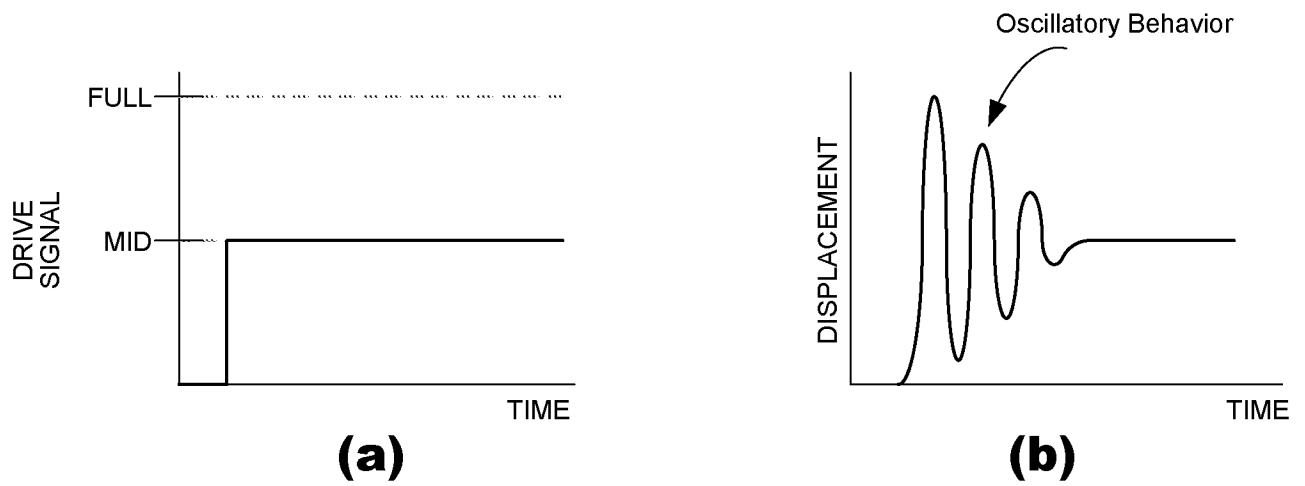
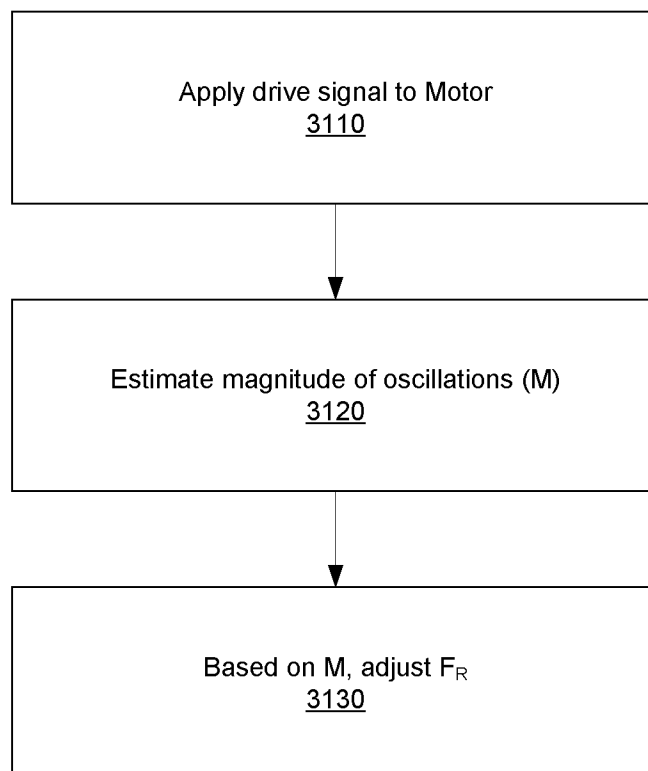
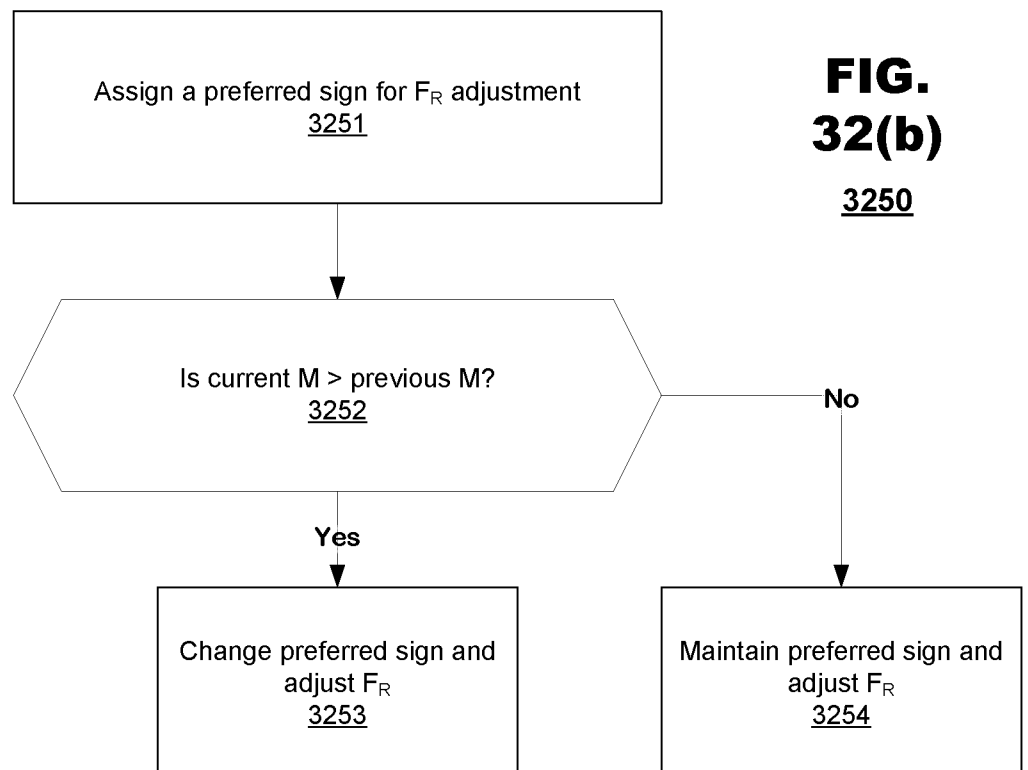
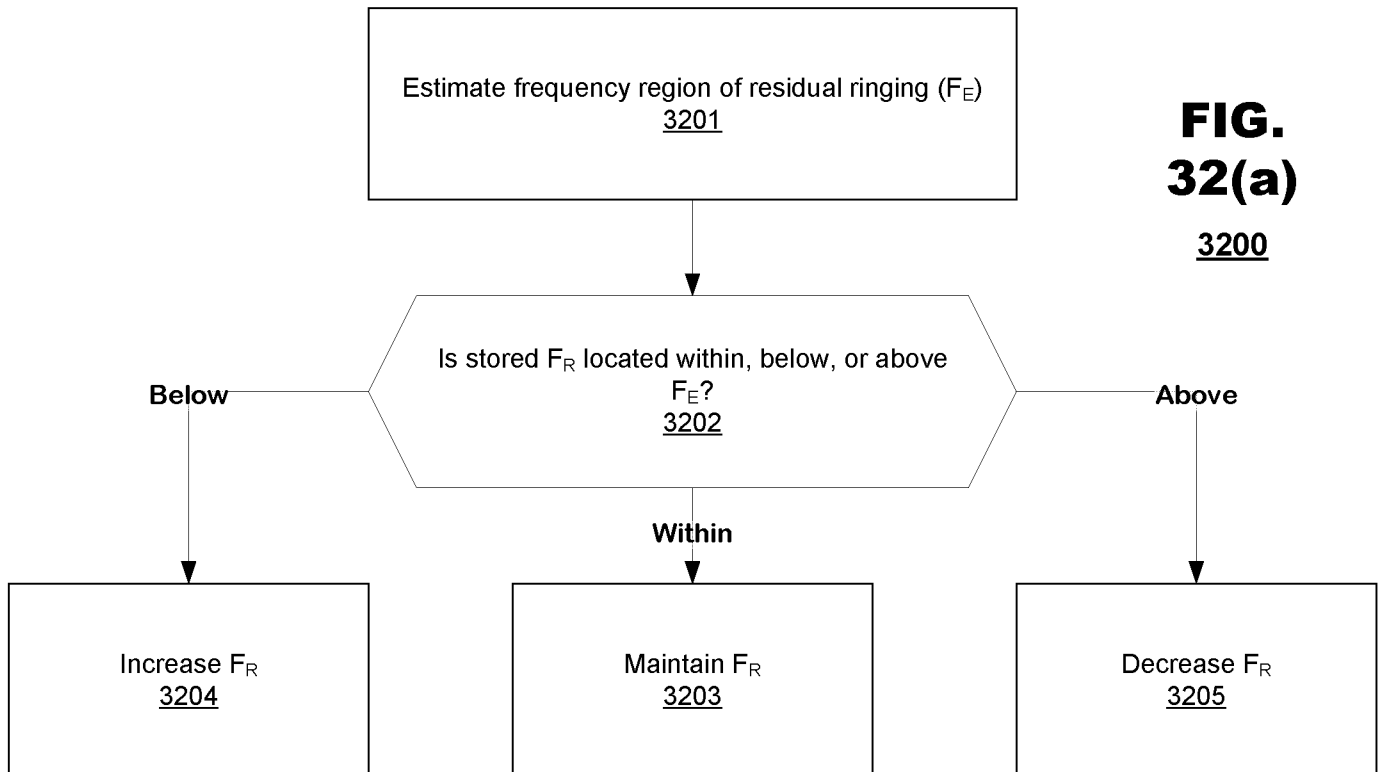


FIG. 29
2900

**FIG. 30****FIG. 31**
3100



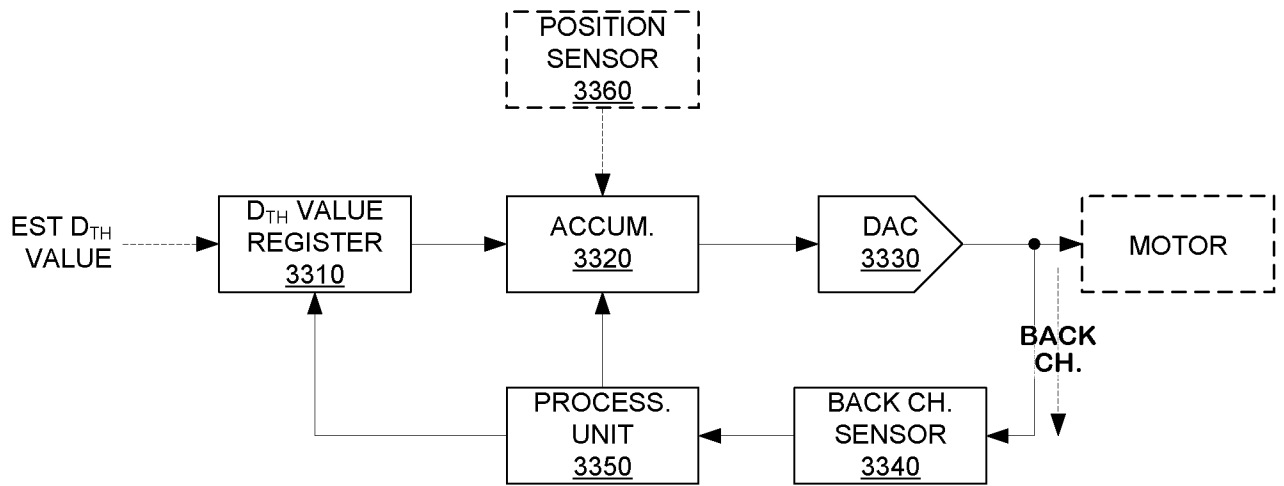
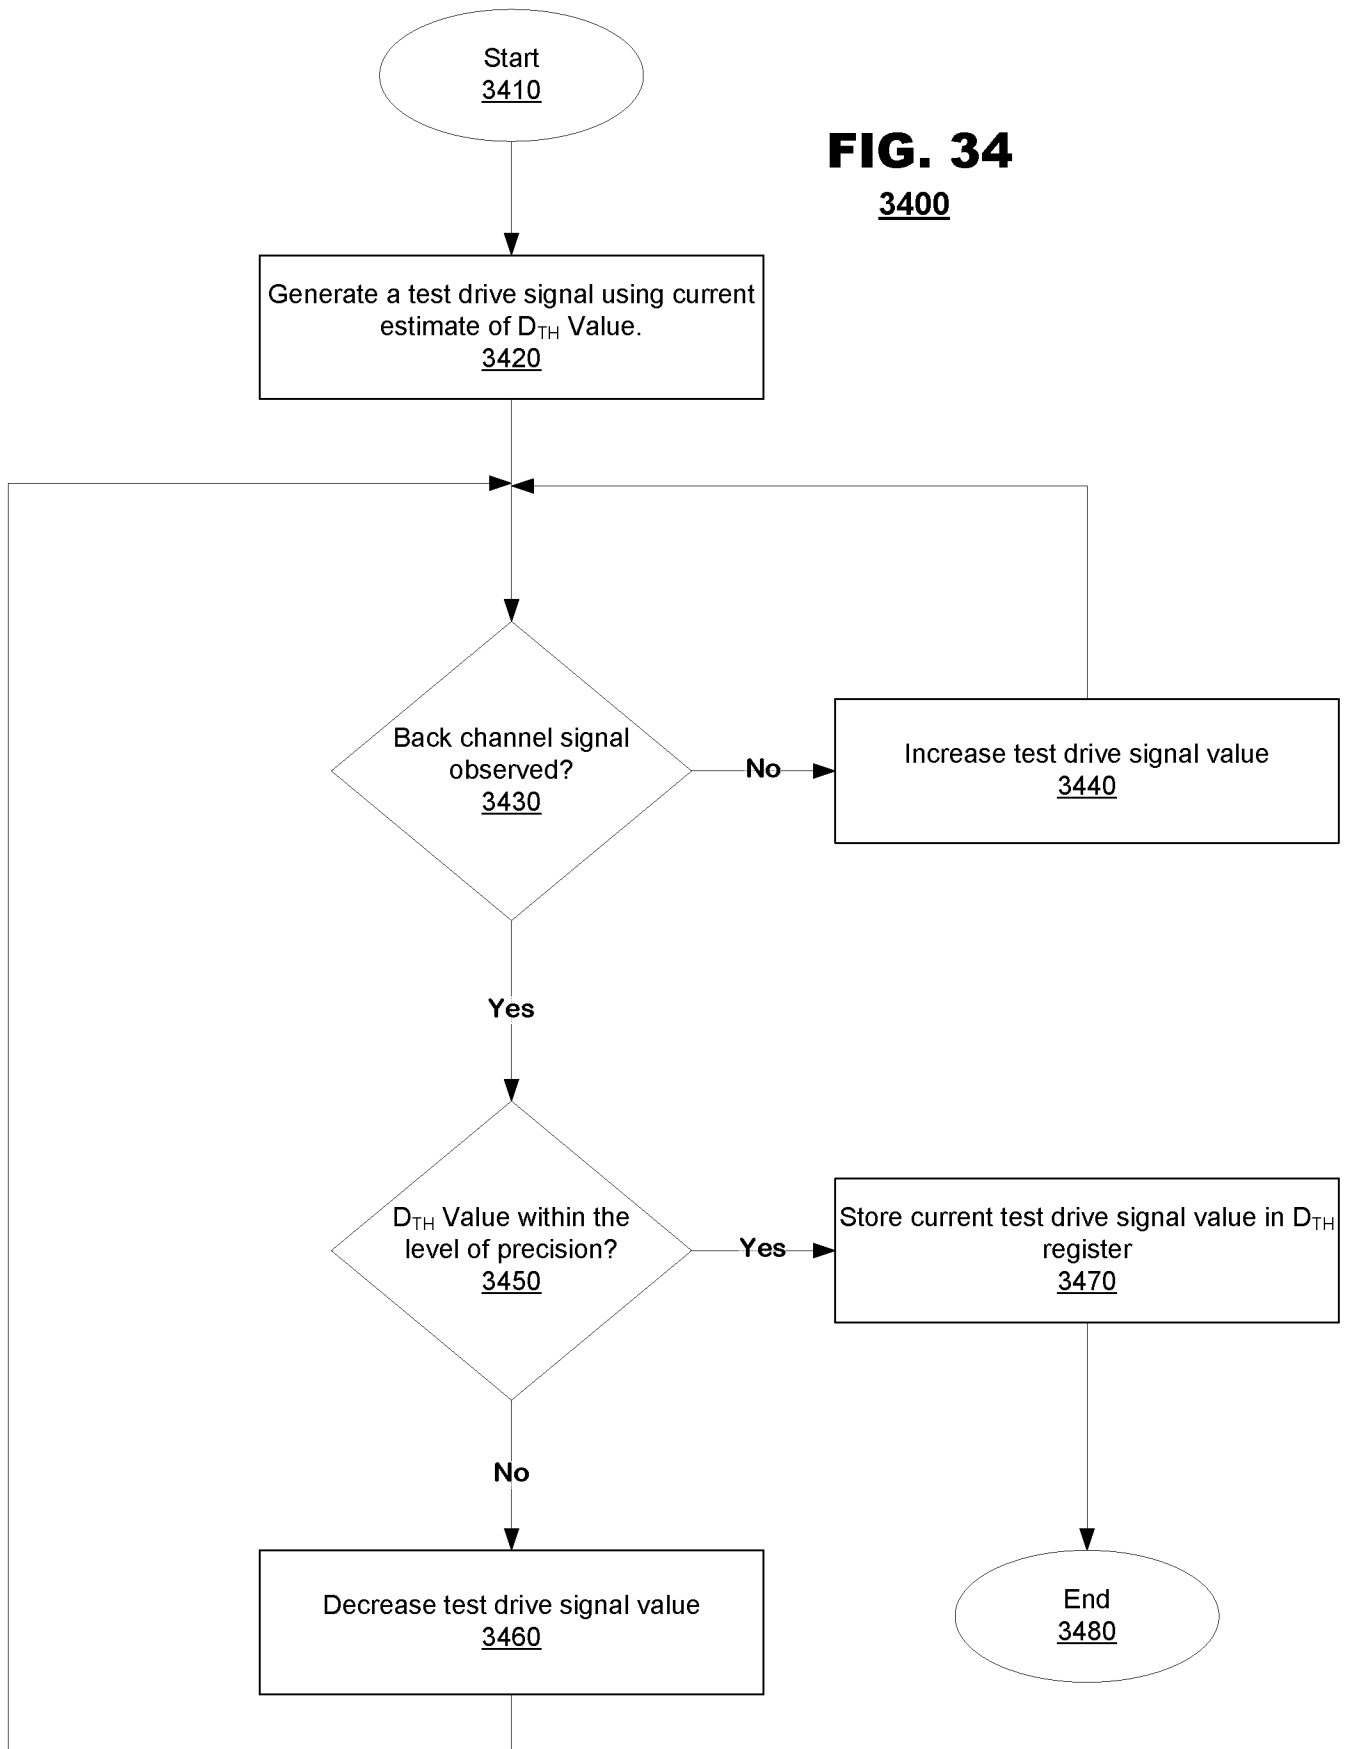
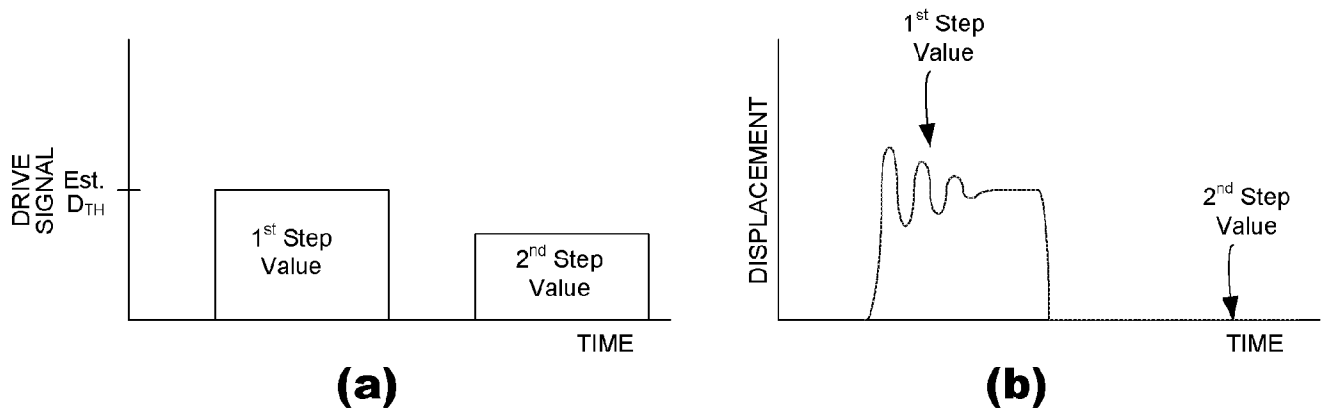


FIG. 33

3300

FIG. 34
3400

**FIG. 35**