



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2488918 C 2011/02/01

(11)(21) **2 488 918**

(12) **BREVET CANADIEN**
CANADIAN PATENT

(13) **C**

(22) Date de dépôt/Filing Date: 1995/08/01
(41) Mise à la disp. pub./Open to Public Insp.: 1996/02/22
(45) Date de délivrance/Issue Date: 2011/02/01
(62) Demande originale/Original Application: 2 171 009
(30) Priorité/Priority: 1994/08/10 (US288,413)


(51) Cl.Int./Int.Cl. *G10L 19/14* (2006.01),
G10L 19/04 (2006.01)

(72) Inventeurs/Inventors:
DEJACO, ANDREW P., US;
GARDNER, WILLIAM R., US

(73) Propriétaire/Owner:
QUALCOMM INCORPORATED, US

(74) Agent: SMART & BIGGAR

(54) Titre : PROCEDE ET APPAREIL DE SELECTION D'UN TAUX DE CODAGE DANS UN VOCODEUR A TAUX VARIABLE
(54) Title: METHOD AND APPARATUS FOR SELECTING AN ENCODING RATE IN A VARIABLE RATE VOCODER

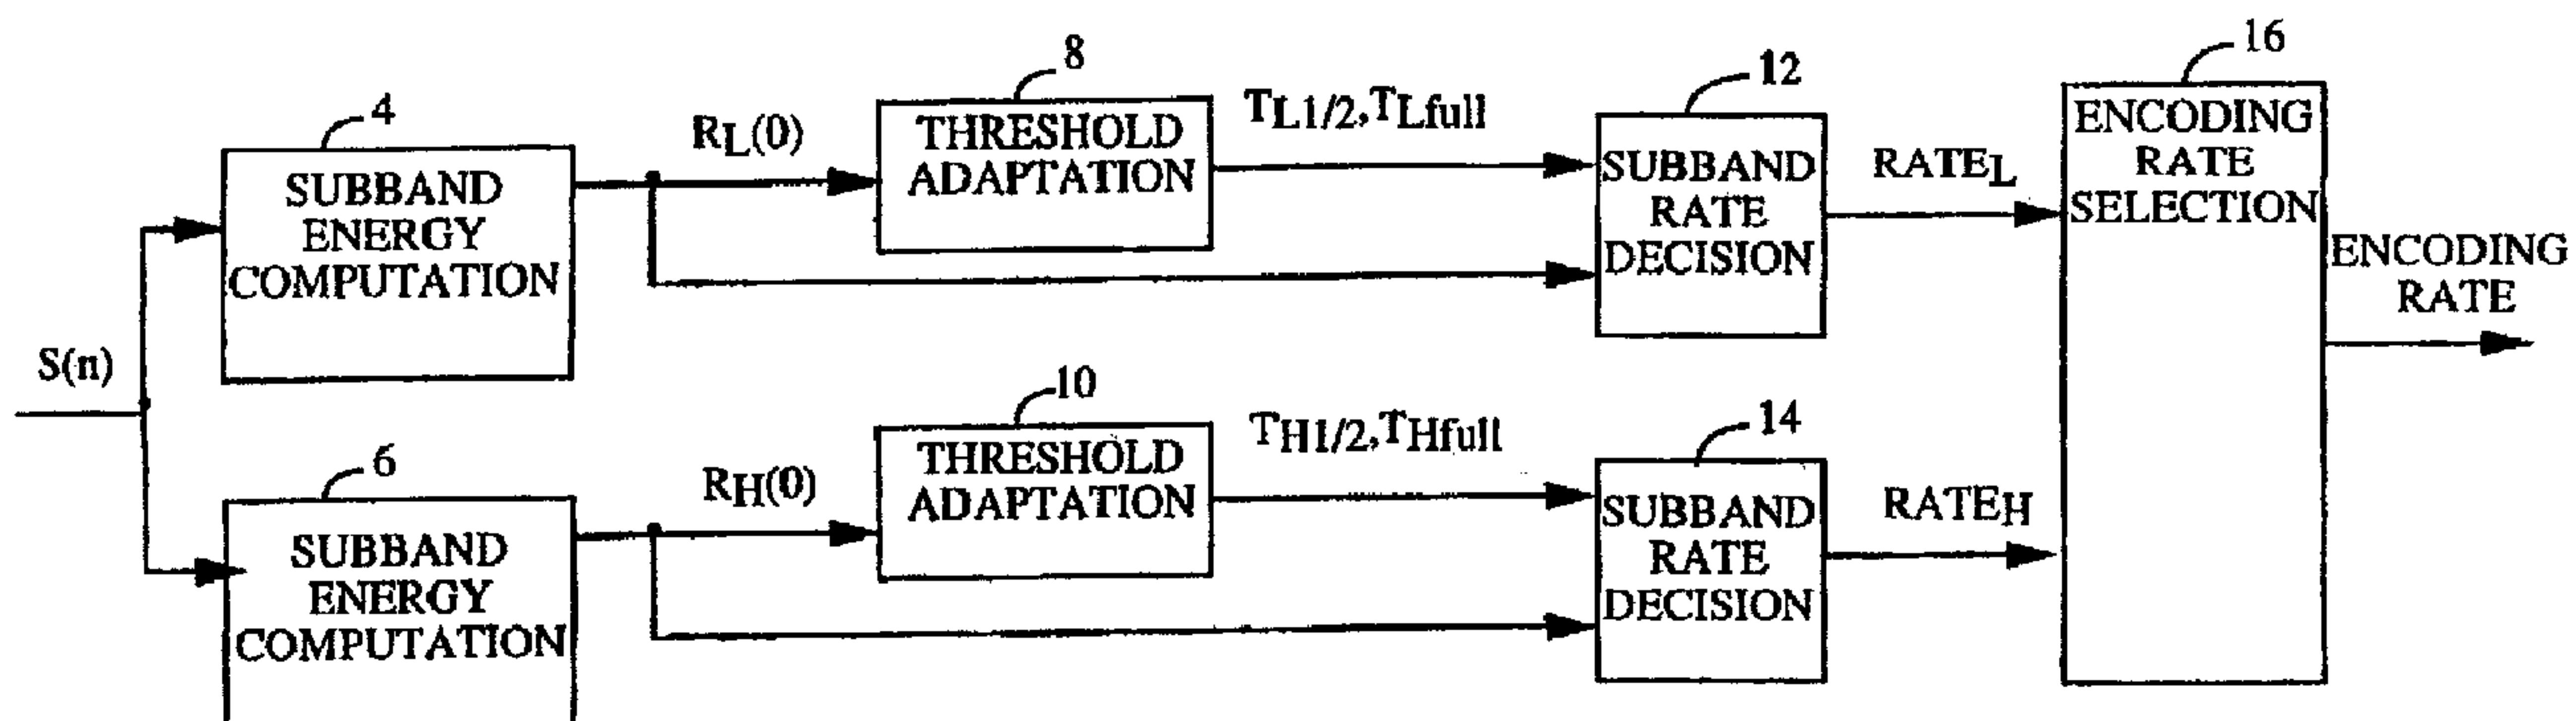

(57) Abrégé/Abstract:

The present invention provides a method by which to reduce the probability of coding low energy unvoiced speech as background noise. An encoding rate is determined by dividing the input signal into subbands using digital subband filters (4) and (6) and comparing the energy in those bands to a set of thresholds in subband rate decision elements (12) and (14) and then examining those comparisons in an encoding rate selector (16). By this method, unvoiced speech can be distinguished from background noise. The present invention, also, provides a means for setting the threshold levels using the signal to noise ratio of the input signal, and the present invention provides a method for coding music through a variable rate vocoder by examining the periodicity of the input signal to distinguish the music from background noise.

[QCPA155]

ABSTRACT

The present invention provides a method by which to reduce the probability of coding low energy unvoiced speech as background noise. An encoding rate is determined by dividing the input signal into subbands using digital subband filters (4) and (6) and comparing the energy in those bands to a set of thresholds in subband rate decision elements (12) and (14) and then examining those comparisons in an encoding rate selector (16). By this method, unvoiced speech can be distinguished from background noise. The present invention, also, provides a means for setting the threshold levels using the signal to noise ratio of the input signal, and the present invention provides a method for coding music through a variable rate vocoder by examining the periodicity of the input signal to distinguish the music from background noise.

74769-48E

METHOD AND APPARATUS FOR SELECTING AN ENCODING RATE IN A VARIABLE RATE VOCODER

BACKGROUND OF THE INVENTION

5

I. Field of the Invention

The present invention relates to vocoders. More particularly, the present invention relates to a novel and improved method for determining 10 speech encoding rate in a variable rate vocoder.

II. Description of the Related Art

Variable rate speech compression systems typically use some form of 15 rate determination algorithm before encoding begins. The rate determination algorithm assigns a higher bit rate encoding scheme to segments of the audio signal in which speech is present and a lower rate encoding scheme for silent segments. In this way a lower average bit rate will be achieved while the voice quality of the reconstructed speech will 20 remain high. Thus to operate efficiently a variable rate speech coder requires a robust rate determination algorithm that can distinguish speech from silence in a variety of background noise environments.

One such variable rate speech compression system or variable rate 25 vocoder is disclosed in copending U.S. Patent No. 5,414,796 filed June 11, 1991, entitled "Variable Rate Vocoder" and assigned to the assignee of the present invention. In this particular implementation of a variable rate vocoder, input speech is encoded using Code Excited Linear Predictive Coding (CELP) techniques at one of several rates as determined by the level 30 of speech activity. The level of speech activity is determined from the energy in the input audio samples which may contain background noise in addition to voiced speech. In order for the vocoder to provide high quality voice encoding over varying levels of background noise, an adaptively adjusting threshold technique is required to compensate for the affect of 35 background noise on the rate decision algorithm.

Vocoders are typically used in communication devices such as 40 cellular telephones or personal communication devices to provide digital signal compression of an analog audio signal that is converted to digital form for transmission. In a mobile environment in which a cellular telephone or personal communication device may be used, high levels of

74769-48E

background noise energy make it difficult for the rate determination algorithm to distinguish low energy unvoiced sounds from background noise silence using a signal energy based rate determination algorithm. Thus unvoiced sounds frequently get encoded at lower bit rates and the 5 voice quality becomes degraded as consonants such as "s","x","ch","sh","t", etc. are lost in the reconstructed speech.

Vocoders that base rate decisions solely on the energy of background noise fail to take into account the signal strength relative to the background noise in setting threshold values. A vocoder that bases its threshold levels 10 solely on background noise tends to compress the threshold levels together when the background noise rises. If the signal level were to remain fixed this is the correct approach to setting the threshold levels, however, were the signal level to rise with the background noise level, then compressing the threshold levels is not an optimal solution. An alternative method for 15 setting threshold levels that takes into account signal strength is needed in variable rate vocoders.

A final problem that remains arises during the playing of music through background noise energy based rate decision vocoders. When people speak, they must pause to breathe which allows the threshold levels 20 to reset to the proper background noise level. However, in transmission of music through a vocoder, such as arises in music-on-hold conditions, no pauses occur and the threshold levels will continue rising until the music starts to be coded at a rate less than full rate. In such a condition the variable rate coder has confused music with background noise.

25

SUMMARY OF THE INVENTION

The present invention relates to a novel and improved method and apparatus for determining an encoding rate in a variable rate vocoder. It is a 30 first objective of some embodiments of the present invention to provide a method by which to reduce the probability of coding low energy unvoiced speech as background noise. In some embodiments of the present invention, the input signal is filtered into a high frequency component and a low frequency component. The filtered components of the input signal are then individually analyzed to detect the 35 presence of speech. Because unvoiced speech has a high frequency component its strength relative to a high frequency band is more distinct from the background noise in that band than it is compared to the background noise over the entire frequency band.

74769-48E

A second objective of the present invention is to provide a means by which to set the threshold levels that takes into account signal energy as well as background noise energy. In the present invention, the setting of voice detection thresholds is based upon an estimate of the signal to noise ratio (SNR) of the

5 input signal. In the exemplary embodiment, the signal energy is estimated as the maximum signal energy during times of active speech and the background noise energy is estimated as the minimum signal energy during times of silence.

A third objective of the present invention is to provide a method for coding music passing through a variable rate vocoder. In the exemplary

10 embodiment, the rate selection apparatus detects a number of consecutive frames over which the threshold levels have risen and checks for periodicity over that number of frames. If the input signal is periodic this would indicate the presence of music. If the presence of music is detected then the thresholds are set at levels such that the signal is coded at full rate.

15 According to one aspect of the present invention, there is provided a method of adding hangover frames to a plurality of frames encoded by a vocoder, the method comprising: detecting that a predefined number of successive frames has been encoded at a full rate; determining that a next successive frame should be encoded at a second rate that is less than the full rate; and selecting,

20 responsive to the detecting and determining, a number of successive hangover frames beginning with said next successive frame to be encoded at the second rate, the number being a function of a signal-to-noise ratio determined from an input signal to be encoded.

According to another aspect of the present invention, there is

25 provided an apparatus for adding hangover frames to a plurality of frames encoded by a vocoder, the apparatus comprising: means for detecting that a predefined number of successive frames has been encoded at a full rate; means for determining that a next successive frame should be encoded at a second rate that is less than the full rate; and means for selecting, in response to the detecting

30 means and the determining means, a number of successive hangover frames beginning with said next successive frame to be encoded at the second rate, the

74769-48E

3a

number being a function of a signal-to-noise ratio determined from an input signal to be encoded.

According to still another aspect of the present invention, there is provided an apparatus for adding hangover frames to a plurality of frames encoded by a vocoder, the apparatus comprising an encoding rate selection element configured to: detect that a predefined number of successive frames has been encoded at a full rate; determine that a next successive frame should be encoded at a second rate that is less than the full rate; and select, in response to detecting the predefined number of successive frames and determining the encoding rate of the next successive frame, a number of successive hangover frames beginning with said next successive frame to be encoded at the second rate, the number being a function of a signal-to-noise ratio determined from an input signal to be encoded.

BRIEF DESCRIPTION OF THE DRAWINGS

15 The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

Figure 1 is a block diagram of the present invention.

20 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figure 1 the input signal, $S(n)$, is provided to subband energy computation element 4 and subband energy computation element 6. The input signal $S(n)$ is comprised of an audio signal and background noise. The audio signal is typically speech, but it may also be music. In the exemplary embodiment, $S(n)$ is provided in twenty millisecond frames of 160 samples each. In the exemplary embodiment, input signal $S(n)$ has frequency components from 0 kHz to 4 kHz, which is approximately the bandwidth of a human speech signal.

74769-48E

3b

In the exemplary embodiment, the 4 kHz input signal, $S(n)$, is filtered into two separate subbands. The two separate subbands lie between 0 and 2 kHz and 2 kHz and 4 kHz respectively. In an exemplary embodiment, the input signal may be divided into subbands by subband filters, the design of

74769-48E

which are well known in the art.

5 The impulse responses of the subband filters are denoted $h_L(n)$, for the lowpass filter, and $h_H(n)$, for the highpass filter. The energy of the resulting subband components of the signal can be computed to give the values $R_L(0)$ and $R_H(0)$, simply by summing the squares of the subband filter output samples, as is well known in the art.

10 In a preferred embodiment, when input signal $S(n)$ is provided to subband energy computation element 4, the energy value of the low frequency component of the input frame, $R_L(0)$, is computed as:

$$R_L(0) = R_S(0) \cdot R_{hL}(0) + 2 \cdot \sum_{i=1}^{L-1} R_S(i) \cdot R_{hL}(i), \quad (1)$$

15 where L is the number taps in the lowpass filter with impulse response $h_L(n)$,
where $R_S(i)$ is the autocorrelation function of the input signal, $S(n)$, given by the equation:

20

$$R_S(i) = \sum_{n=1}^N S(n) \cdot S(n-i), \quad \text{for } i \in [0, L-1] \quad (2)$$

where N is the number of samples in the frame,
and where R_{hL} is the autocorrelation function of the lowpass filter $h_L(n)$
25 given by:

$$R_{hL}(i) = \sum_{n=0}^{L-1} h_L(n) \cdot h_L(n-i). \quad \text{for } i \in [0, L-1] \quad (3)$$

= 0 else

30 The high frequency energy, $R_H(0)$, is computed in a similar fashion in subband energy computation element 6.
The values of the autocorrelation function of the subband filters can be computed ahead of time to reduce the computational load. In addition, some of the computed values of $R_S(i)$ are used in other computations in the

74769-48E

5

coding of the input signal, $S(n)$, which further reduces the net computational burden of the encoding rate selection method of the present invention. For example, the derivation of LPC filter tap values requires the computation of a set of input signal autocorrelation coefficients.

5 The computation of LPC filter tap values is well known in the art and is detailed in the abovementioned U.S. Patent No. 5,414,796. If one were to code the speech with a method requiring a ten tap LPC filter only the values of $R_S(i)$ for i values from 11 to $L-1$ need to be computed, in addition to those that are used in the coding of the signal, because $R_S(i)$ for i values 10 from 0 to 10 are used in computing the LPC filter tap values. In the exemplary embodiment, the subband filters have 17 taps, $L=17$.

Subband energy computation element 4 provides the computed value of $R_L(0)$ to subband rate decision element 12, and subband energy computation element 6 provides the computed value of $R_H(0)$ to subband rate decision element 14. Rate decision element 12 compares the value of $R_L(0)$ against two predetermined threshold values $T_{L1/2}$ and T_{Lfull} and assigns a suggested encoding rate, $RATE_L$, in accordance with the comparison. The rate assignment is conducted as follows:

20	$RATE_L = \text{eighth rate}$	$R_L(0) \leq T_{L1/2}$	(4)
	$RATE_L = \text{half rate}$	$T_{L1/2} < R_L(0) \leq T_{Lfull}$	(5)
	$RATE_L = \text{full rate}$	$R_L(0) > T_{Lfull}$	(6)

Subband rate decision element 14 operates in a similar fashion and selects a suggest encoding rate, $RATE_H$, in accordance with the high frequency energy value $R_H(0)$ and based upon a different set of threshold values $T_{H1/2}$ and T_{Hfull} . Subband rate decision element 12 provides its suggested encoding rate, $RATE_L$, to encoding rate selection element 16, and subband rate decision element 14 provides its suggested encoding rate, $RATE_H$, to 30 encoding rate selection element 16. In the exemplary embodiment, encoding rate selection element 16 selects the higher of the two suggest rates and provides the higher rate as the selected ENCODING RATE.

Subband energy computation element 4 also provides the low frequency energy value, $R_L(0)$, to threshold adaptation element 8, where the 35 threshold values $T_{L1/2}$ and T_{Lfull} for the next input frame are computed. Similarly, subband energy computation element 6 provides the high frequency energy value, $R_H(0)$, to threshold adaptation element 10, where the threshold values $T_{H1/2}$ and T_{Hfull} for the next input frame are computed.

74769-48E

Threshold adaptation element 8 receives the low frequency energy value, $R_L(0)$, and determines whether $S(n)$ contains background noise or audio signal. In an exemplary implementation, the method by which threshold adaptation element 8 determines if an audio signal is present is by

5 examining the normalized autocorrelation function NACF, which is given by the equation:

$$NACF = \max_T \frac{\sum_{n=0}^{N-1} e(n) \cdot e(n-T)}{\frac{1}{2} \left[\sum_{n=0}^{N-1} e^2(n) + \sum_{n=0}^{N-1} e^2(n-T) \right]}, \quad (7)$$

10 where $e(n)$ is the formant residual signal that results from filtering the input signal, $S(n)$, by an LPC filter.

The design of and filtering of a signal by an LPC filter is well known in the art and is detailed in aforementioned U.S. Patent No. 5,414,796.

15 The input signal, $S(n)$ is filtered by the LPC filter to remove interaction of the formants. NACF is compared against a threshold value to determine if an audio signal is present. If NACF is greater than a predetermined threshold value, it indicates that the input frame has a periodic characteristic indicative of the presence of an audio signal such as speech or

20 music. Note that while parts of speech and music are not periodic and will exhibit low values of NACF, background noise typically never displays any periodicity and nearly always exhibits low values of NACF.

If it is determined that $S(n)$ contains background noise, the value of NACF is less than a threshold value $TH1$, then the value $R_L(0)$ is used to

25 update the value of the current background noise estimate BGN_L . In the exemplary embodiment, $TH1$ is 0.35. $R_L(0)$ is compared against the current value of background noise estimate BGN_L . If $R_L(0)$ is less than BGN_L , then the background noise estimate BGN_L is set equal to $R_L(0)$ regardless of the value of NACF.

30 The background noise estimate BGN_L is only increased when NACF is less than threshold value $TH1$. If $R_L(0)$ is greater than BGN_L and NACF is less than $TH1$, then the background noise energy BGN_L is set $\alpha_1 \cdot BGN_L$, where α_1 is a number greater than 1. In the exemplary embodiment, α_1 is equal to 1.03. BGN_L will continue to increase as long as NACF is less than

35 threshold value $TH1$ and $R_L(0)$ is greater than the current value of BGN_L .

74769-48E

until BGN_L reaches a predetermined maximum value BGN_{max} at which point the background noise estimate BGN_L is set to BGN_{max} .

If an audio signal is detected, signified by the value of NACF exceeding a second threshold value $TH2$, then the signal energy estimate, 5 S_L , is updated. In the exemplary embodiment, $TH2$ is set to 0.5. The value of $R_L(0)$ is compared against a current lowpass signal energy estimate, S_L . If $R_L(0)$ is greater than the current value of S_L , then S_L is set equal to $R_L(0)$. If $R_L(0)$ is less than the current value of S_L , then S_L is set equal to $\alpha_2 \cdot S_L$, again only if NACF is greater than $TH2$. In the exemplary embodiment, α_2 is set 10 to 0.96.

Threshold adaptation element 8 then computes a signal to noise ratio estimate in accordance with equation 8 below:

$$SNR_L = 10 \cdot \log \left[\frac{S_L}{BGN_L} \right]. \quad (8)$$

15

Threshold adaptation element 8 then determines an index of the quantized signal to noise ratio $ISNR_L$ in accordance with equation 9-12 below:

$$20 \quad ISNR_L = \text{nint} \left[\frac{SNR_L - 20}{5} \right], \quad \text{for } 20 < SNR_L < 55, \quad (9)$$

$$= 0, \quad \text{for } SNR_L \leq 20, \quad (10)$$

$$= 7 \quad \text{for } SNR_L \geq 55.$$

25 where nint is a function that rounds the fractional value to the nearest integer.

Threshold adaptation element 8, then selects or computes two scaling factors, $k_{L1/2}$ and k_{Lfull} , in accordance with the signal to noise ratio index, 30 $ISNR_L$. An exemplary scaling value lookup table is provided in table 1 below:

TABLE 1

ISNR _L	K _{L1/2}	K _{Lfull}
0	7.0	9.0
1	7.0	12.6
2	8.0	17.0
3	8.6	18.5
4	8.9	19.4
5	9.4	20.9
6	11.0	25.5
7	15.8	39.8

These two values are used to compute the threshold values for rate selection in accordance with the equations below:

5

$$T_{L1/2} = K_{L1/2} \cdot BGN_L \text{ and} \quad (11)$$

$$T_{Lfull} = K_{Lfull} \cdot BGN_L, \quad (12)$$

where $T_{L1/2}$ is low frequency half rate threshold value and
10 T_{Lfull} is the low frequency full rate threshold value.

Threshold adaptation element 8 provides the adapted threshold values $T_{L1/2}$ and T_{Lfull} to rate decision element 12. Threshold adaptation element 10 operates in a similar fashion and provides the threshold values $T_{H1/2}$ 15 and T_{Hfull} to subband rate decision element 14.

The initial value of the audio signal energy estimate S , where S can be S_L or S_H , is set as follows. The initial signal energy estimate, S_{INIT} , is set to -18.0 dBm0, where 3.17 dBm0 denotes the signal strength of a full sine wave, which in the exemplary embodiment is a digital sine wave with an 20 amplitude range from -8031 to 8031. S_{INIT} is used until it is determined that an acoustic signal is present.

The method by which an acoustic signal is initially detected is to compare the NACF value against a threshold, when the NACF exceeds the threshold for a predetermined number consecutive frames, then an acoustic 25 signal is determined to be present. In the exemplary embodiment, NACF must exceed the threshold for ten consecutive frames. After this condition is met the signal energy estimate, S , is set to the maximum signal energy in the preceding ten frames.

The initial value of the background noise estimate BGN_L is initially 30 set to BGN_{max} . As soon as a subband frame energy is received that is less

than BGN_{max} , the background noise estimate is reset to the value of the received subband energy level, and generation of the background noise BGN_L estimate proceeds as described earlier.

In a preferred embodiment a hangover condition is actuated when 5 following a series of full rate speech frames, a frame of a lower rate is detected. In the exemplary embodiment, when four consecutive speech frames are encoded at full rate followed by a frame where ENCODING RATE is set to a rate less than full rate and the computed signal to noise ratios are less than a predetermined minimum SNR, the 10 ENCODING RATE for that frame is set to full rate. In the exemplary embodiment the predetermined minimum SNR is 27.5 dBas defined in equation 8.

In the preferred embodiment, the number of hangover frames is a function of the signal to noise ratio. In the exemplary embodiment, the 15 number of hangover frames is determined as follows:

$$\#hangover\ frames = 1 \quad 22.5 < SNR < 27.5, \quad (13)$$

$$\#hangover\ frames = 2 \quad SNR \leq 22.5, \quad (14)$$

$$\#hangover\ frames = 0 \quad SNR \geq 27.5. \quad (15)$$

20

The present invention also provides a method with which to detect the presence of music, which as described before lacks the pauses which allow the background noise measures to reset. The method for detecting the presence of music assumes that music is not present at the start of the call. 25 This allows the encoding rate selection apparatus of the present invention to properly estimate and initial background noise energy, BGN_{init} . Because music unlike background noise has a periodic characteristic, the present invention examines the value of NACF to distinguish music from background noise. The music detection method of the present invention 30 computes an average NACF in accordance with the equation below:

$$NACF_{AVE} = \frac{1}{T} \sum_{i=1}^T NACF(i), \quad (16)$$

where NACF is defined in equation 7, and

35 where T is the number of consecutive frames in which the estimated value of the background noise has been increasing from an initial background noise estimate BGN_{INIT} .

74769-48E

10

If the background noise BGN has been increasing for the predetermined number of frames T and NACFAVE exceeds a predetermined threshold, then music is detected and the background noise 5 BGN is reset to BGNinit. It should be noted that to be effective the value T must be set low enough that the encoding rate doesn't drop below full rate. Therefore the value of T should be set as a function of the acoustic signal and BGNinit.

The previous description of the preferred embodiments is provided 10 to enable any person skilled in the art to make or use the present invention. The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the 15 embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

74769-48E

11

CLAIMS:

1. A method of adding hangover frames to a plurality of frames encoded by a vocoder, the method comprising:
 - 5 detecting that a predefined number of successive frames has been encoded at a full rate;
 - 10 determining that a next successive frame should be encoded at a second rate that is less than the full rate; and
 - 15 selecting, responsive to the detecting and determining, a number of successive hangover frames beginning with said next successive frame to be encoded at the second rate, the number being a function of a signal-to-noise ratio determined from an input signal to be encoded.
2. The method of claim 1, wherein the detecting comprises detecting that a predefined number of successive frames has been encoded at a maximum supportable rate.
- 15 3. The method of claim 1, wherein the detecting comprises detecting that a predefined number of successive frames has been encoded at a rate intended for encoding frames classified as containing substantially active speech.
4. The method of claim 1, wherein the determining comprises determining that a next successive frame should be encoded at a minimum supportable rate.
- 20 5. The method of claim 1, wherein the determining comprises determining that a next successive frame should be encoded at a rate intended for encoding frames classified as containing substantially background noise or silence.
- 25 6. The method of claim 1, further comprising generating an estimate of a background noise level.
7. The method of claim 6, further comprising computing said signal-to-noise ratio based upon the estimate of a background noise level.

74769-48E

12

8. An apparatus for adding hangover frames to a plurality of frames encoded by a vocoder, the apparatus comprising:

means for detecting that a predefined number of successive frames has been encoded at a full rate;

5 means for determining that a next successive frame should be encoded at a second rate that is less than the full rate; and

means for selecting, in response to the detecting means and the determining means, a number of successive hangover frames beginning with said next successive frame to be encoded at the second rate, the number being a 10 function of a signal-to-noise ratio determined from an input signal to be encoded.

9. The apparatus of claim 8, wherein the means for detecting comprises means for detecting that a predefined number of successive frames has been encoded at a maximum supportable rate.

10. The apparatus of claim 8, wherein the means for detecting 15 comprises means for detecting that a predefined number of successive frames has been encoded at a rate intended for encoding frames classified as containing substantially active speech.

11. The apparatus of claim 8, wherein the means for determining comprises means for determining that a next successive frame should be encoded 20 at a minimum supportable rate.

12. The apparatus of claim 8, wherein the means for determining comprises means for determining that a next successive frame should be encoded at a rate intended for encoding frames classified as containing substantially background noise or silence.

25 13. The apparatus of claim 8, further comprising means for generating an estimate of a background noise level.

14. The apparatus of claim 13, further comprising means for computing said signal-to-noise ratio based upon the estimate of a background noise level.

74769-48E

15. The apparatus of claim 8 for adding hangover frames to a plurality of frames encoded by a vocoder, the apparatus further comprising: an encoding rate selection element, which in turn comprises said means for detecting, said means for determining and said means for selecting.
- 5 16. The apparatus of claim 15, wherein the encoding rate selection element is further configured to detect that a predefined number of successive frames has been encoded at a maximum supportable rate.
- 10 17. The apparatus of claim 15, wherein the encoding rate selection element is further configured to detect that a predefined number of successive frames has been encoded at a rate intended for encoding frames classified as containing substantially active speech.
18. The apparatus of claim 15, wherein the encoding rate selection element is further configured to determine that a next successive frame should be encoded at a minimum supportable rate.
- 15 19. The apparatus of claim 15, wherein the encoding rate selection element is further configured to determine that a next successive frame should be encoded at a rate intended for encoding frames classified as containing substantially background noise or silence.
- 20 20. The apparatus of claim 15, further comprising a threshold adaptation element coupled to the encoding rate selection element and configured to generate an estimate of a background noise level.
- 25 21. The apparatus of claim 20, further comprising an energy computation element coupled to the threshold adaptation element and configured to generate an estimate of a frame energy level, the threshold adaptation element being further configured to receive the estimate of a frame energy level from the energy computation element and compute said signal-to-noise ratio based upon the estimate of a frame energy level and the estimate of a background noise level.

74769-48E

22. An apparatus for adding hangover frames to a plurality of frames encoded by a vocoder, the apparatus comprising an encoding rate selection element configured to:

detect that a predefined number of successive frames has been

5 encoded at a full rate;

determine that a next successive frame should be encoded at a second rate that is less than the full rate; and

10 select, in response to detecting the predefined number of successive frames and determining the encoding rate of the next successive frame, a number of successive hangover frames beginning with said next successive frame to be encoded at the second rate, the number being a function of a signal-to-noise ratio determined from an input signal to be encoded.

23. The apparatus of claim 22, wherein the encoding rate selection element is further configured to detect that a predefined number of successive 15 frames has been encoded at a maximum supportable rate.

24. The apparatus of claim 22, wherein the encoding rate selection element is further configured to detect that a predefined number of successive frames has been encoded at a rate intended for encoding frames classified as containing substantially active speech.

20 25. The apparatus of claim 22, wherein the encoding rate selection element is further configured to determine that a next successive frame should be encoded at a minimum supportable rate.

26. The apparatus of claim 22, wherein the encoding rate selection element is further configured to determine that a next successive frame should be 25 encoded at a rate intended for encoding frames classified as containing substantially background noise or silence.

27. The apparatus of claim 22, further comprising a threshold adaptation element coupled to the encoding rate selection element and configured to generate an estimate of a background noise level.

74769-48E

15

28. The apparatus of claim 27, further comprising an energy computation element coupled to the threshold adaptation element and configured to generate an estimate of a frame energy level, the threshold adaptation element being further configured to receive the estimate of a frame energy level from the

5 energy computation element and compute said signal-to-noise ratio based upon the estimate of a frame energy level and the estimate of a background noise level.

SMART & BIGGAR

OTTAWA, CANADA

PATENT AGENTS

U.S. Patent

Apr. 21, 1998

5,742,734

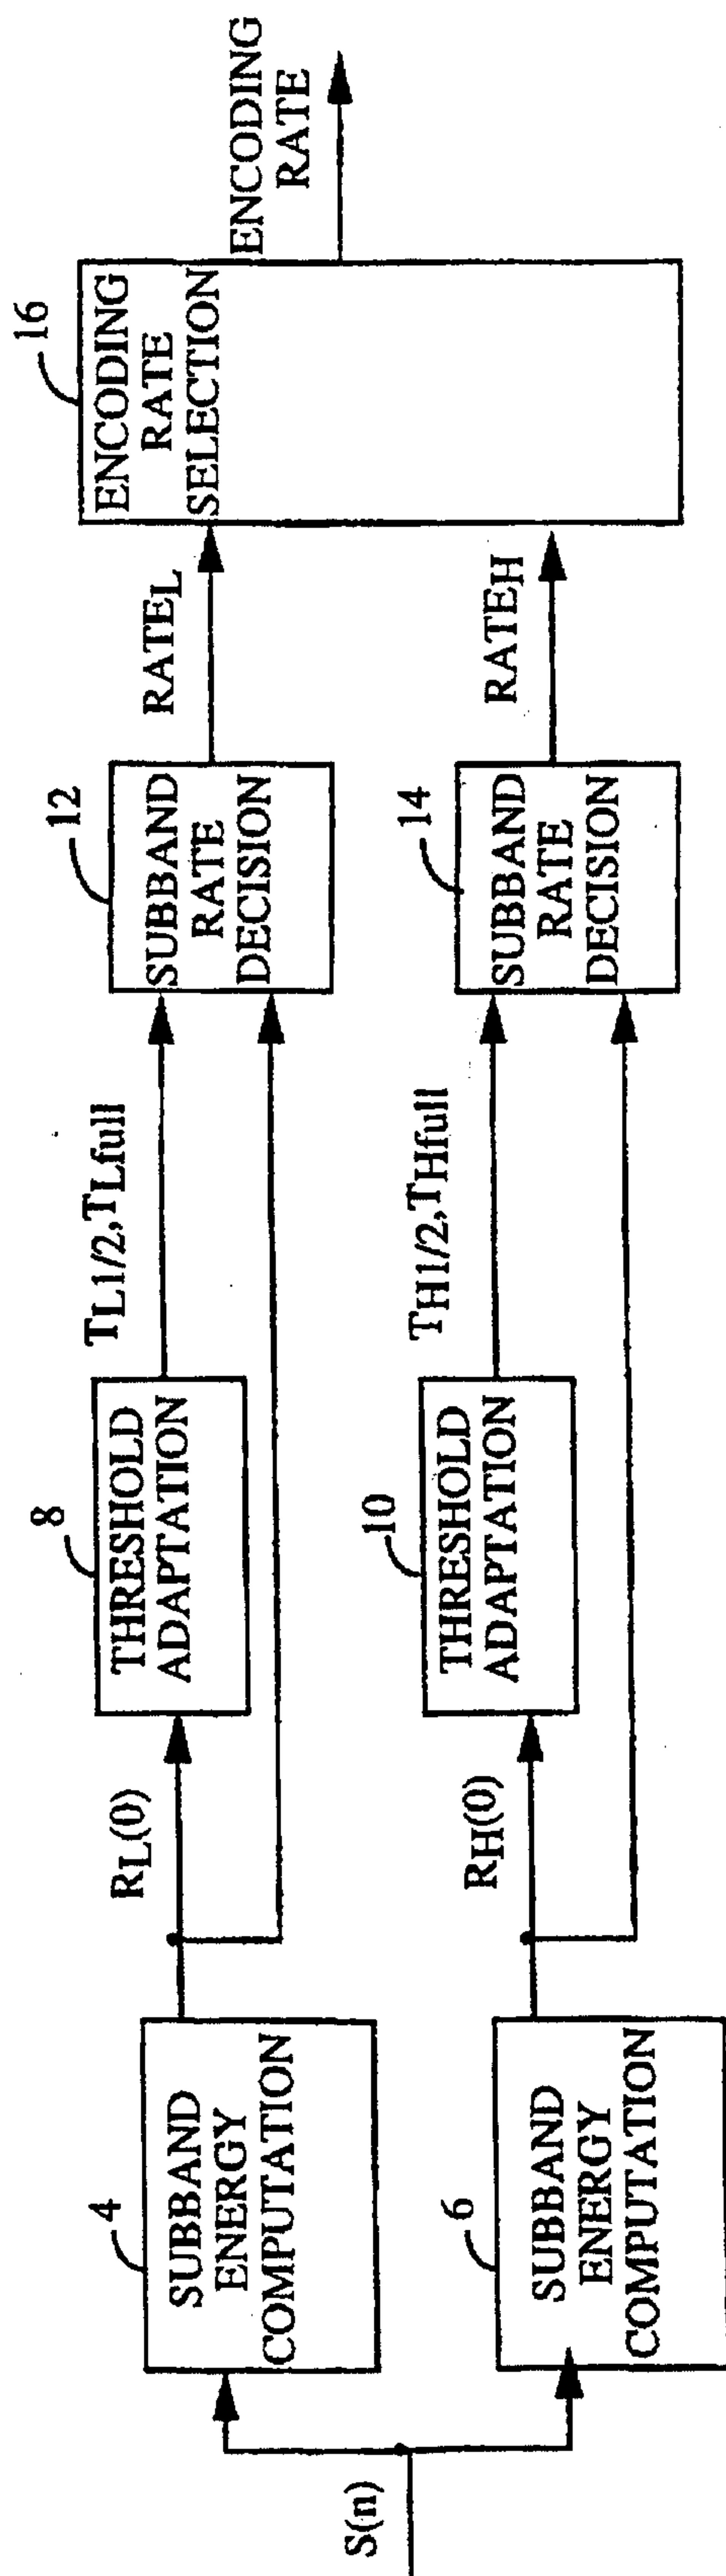


FIG. 1

