

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 September 2006 (21.09.2006)

PCT

(10) International Publication Number
WO 2006/099403 A2

(51) International Patent Classification:
H01Q 3/26 (2006.01)

(21) International Application Number:
PCT/US2006/009095

(22) International Filing Date: 13 March 2006 (13.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/660,598 11 March 2005 (11.03.2005) US
11/233,307 22 September 2005 (22.09.2005) US
11/373,367 10 March 2006 (10.03.2006) US

(71) Applicant (for all designated States except US): **INTER-DIGITAL TECHNOLOGY CORPORATION** [US/US];
300 Delaware Avenue, Suite 527, Wilmington, DE 19801 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GOLDBERG,**

Steven, J. [US/US]; 1017 Chiswell Drive, Downingtown, Pennsylvania 19335 (US). **BRIANCON, Alain, Charles, Louis** [US/US]; 19328 Cissel Manor Drive, Poolesville, Maryland 20837 (US).


(74) Agents: **TAYLOR, Michael, W.** et al.; Allen, Dyer, Doppelt, Milbrath & Gilchrist, P.A., 255 S. Orange Avenue, Suite 1401, P.O. Box 3791, Orlando, Florida 32802-3791 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: COMMUNICATIONS DEVICE WITH ADAPTIVE DECODING AND ASSOCIATED METHODS

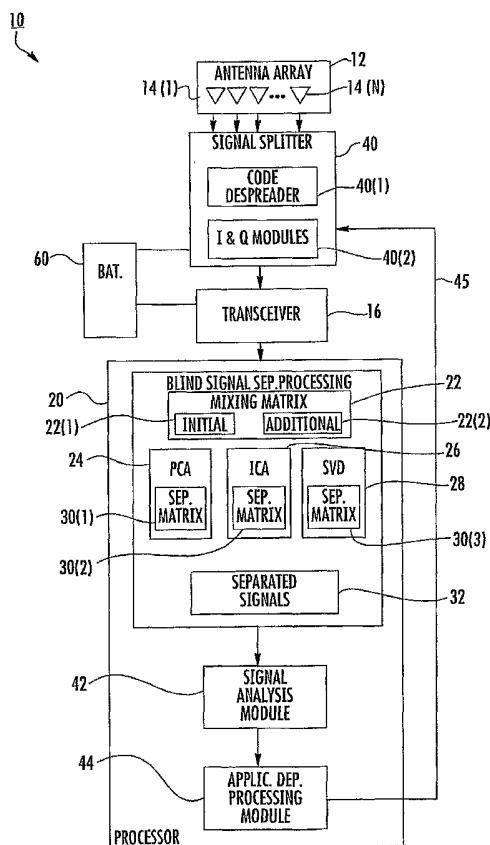

(57) Abstract: In a communications device operating with a blind signal separation (BSS) processor, an initial mixing matrix is formed based upon the different summations of the source signals received by the antenna array. The initial mixing matrix is evaluated to determine a minimum rank that is necessary for at least one source signal to be useable after having been separated from the initial mixing matrix and decoded. An additional mixing matrix is then formed, and also includes the different summations of the source signals. If the rank of the additional mixing matrix is less than the minimum rank associated with the initial mixing matrix, then the source signals are modified so that the rank of the additional mixing matrix is increased.



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*

**COMMUNICATIONS DEVICE WITH ADAPTIVE
DECODING AND ASSOCIATED METHODS**

Field of the Invention

[0001] The present invention relates to the field of signal processing, and more particularly, to decoding signals in a communications device using blind signal separation techniques.

Background of the Invention

[0002] Blind signal separation (BSS) techniques involve recovering source signals from a composite signal, wherein the composite signal includes a mixture of the source signals. The separation is "blind" because it is often performed with limited information about the signals, the sources of the signals, and the effects that the propagation channel has on the signals.

[0003] Blind source separation is particularly applicable to cellular and personal wireless communications devices, where many frequency bands have become cluttered with numerous radio frequency emitters, often co-existing in the same spectrum. The problem of co-channel emitters is expected to only worsen in years to come with the development of low power, unlicensed wireless technologies such as Bluetooth and other personal area networks.

[0004] Three commonly used blind signal separation techniques are principal component analysis (PCA),

- 2 -

independent component analysis (ICA) and singular value decomposition (SVD). PCA involves first and second moment statistics of the source signals, and is used when the signal-to-noise ratios of the source signals are high. Otherwise, ICA is used which involves the third and fourth moment statistics of the source signals. ICA is often preceded by a whitening process which improves the condition number of the mixing matrix. PCA is often the choice for such preprocessing. As an alternative, SVD may be used to separate a source signal from the mixture of source signals based upon their eigenvalues.

[0005] While these three are the most often encountered processing means, it should be recognized that there are many variations, combinations, and related means that are all within the scope of the basic processing approach. This includes using processing which is semi-blind, meaning that some knowledge of the signals is exploited to enhance the overall processing.

[0006] Regardless of the blind signal separation technique that is applied, an antenna array comprising a plurality of antenna elements is typically used to receive different mixtures of the source signals from the various signal sources. Each antenna element outputs a mixture of the source signals, which is ideally a unique sum of the source signals. The unique sums of signals are used to populate a mixing matrix. The appropriate signal separation technique is then applied to the mixing matrix for separating desired source signals from the mixture of source signals.

[0007] In general, the rank of the mixing matrix determines the number of the most significant signals

- 3 -

that will be separated, while the rest of the signals are treated as noise. This value therefore needs to be at a minimum inclusive of the signals to be decoded. A possibly higher minimum may be necessary to decrease the noise component so that the signal to noise ratio allows an acceptable decoding error rate.

[0008] Typically, the size of the mixing matrix remains fixed based upon a function of the number of antenna elements receiving linearly independent summations of the source signals. When separating and decoding a desired signal from the different summations of the source signals, the size of the mixing matrix may be adequate, over-determined or under-determined. Over-determined means that the mixing matrix is larger than what is necessary for adequately separating and decoding the desired signal. Under-determined means that the mixing matrix is less than what is necessary for adequately separating and decoding the desired signal. Over/under-determination of the mixing matrix has a negative effect on optimizing processing, power drain and communication link attributes for the communications device.

Summary of the Invention

[0009] In view of the foregoing background, it is therefore an object of the present invention to vary the size of a mixing matrix when decoding signals in a communications device to avoid over/under-determination of the mixing matrix.

[0010] In addition, the subset of the possible means to create the mixing matrix will be chosen to provide adequate results, taking into account the tradeoffs

- 4 -

between such adequacy and the implementation constraints in the processing environment.

[0011] This and other objects, features, and advantages in accordance with the present invention are provided by a method for decoding signals in a communications device comprising an antenna array, a transceiver coupled to the antenna array, and a processor coupled to the transceiver. The method comprises receiving source signals at the antenna array, with the antenna array comprising N antenna elements for receiving N different summations of the source signals, and providing the N different summations of the source signals to the transceiver.

[0012] The method may further comprise evaluating the N different summations of the source signals in the processor by forming an initial mixing matrix comprising the N different summations of the source signals, the initial mixing matrix having a dimension equal to or less than N, and separating at least one desired source signal from the initial mixing matrix. While the antenna array provides N sums, it is possible that they may not all be linearly independent. As a result, the rank of the mixing would be less than N. The evaluation may further comprise decoding the at least one desired source signal after the separating, and determining a minimum rank of the initial mixing matrix necessary for the at least one source signal to be useable after the decoding.

[0013] The method may further comprise forming an additional mixing matrix comprising the N different summations of the source signals. If the rank of the additional mixing matrix is less than the minimum rank associated with the initial mixing matrix, then the

- 5 -

source signals are modified so that the rank of the additional mixing matrix is increased.

[0014] By increasing the rank of the additional mixing matrix, the decoding of the received signals is adjusted so that processing, power drain and communication link attributes are optimized for the communications device. Preserving electrical power is particularly important when the communications device is operating off of a battery.

[0015] The N different summations of the source signals used for the additional mixing matrix may be the same as the N different summations of the source signals used for the initial mixing matrix, except time delayed. Alternatively, the N different summations of the source signals used for the additional mixing matrix may be different than the N different summations of the source signals used for the initial mixing matrix.

[0016] The communications device may further comprise a signal splitter between the antenna array and the transceiver. The modifying may comprise splitting the source signals so that the rank of the additional mixing matrix is increased. The signal splitter may be a code despreaders and/or in-phase (I) and quadrature (Q) modules between the antenna array and the transceiver. The code despreaders and the I and Q modules may be used individually or collectively to increase the rank of the additional mixing matrix so that it is at least equal to the minimum rank associated with the initial mixing matrix.

[0017] The code despreaders decodes the N different summations of the source signals, with each one of the N different summations including k codes for providing

- 6 -

k different summations of the source signals associated therewith. The additional mixing matrix comprises kN different summations of the source signals so that a rank of kN is provided.

[0018] The I and Q modules separate each one of the N different summations of the source signals into I and Q component sets. The additional mixing matrix comprises 2N different summations of the source signals so that a rank of 2N is provided.

[0019] However, if the rank of the additional mixing matrix is greater than the minimum rank associated with the initial mixing matrix, then the method may further comprise modifying the source signals so that the rank of the additional mixing matrix is decreased. The modifying may comprise not including at least one of the N different summations of the source signals when forming the additional mixing matrix. By decreasing the rank of the additional mixing matrix, the decoding of the received signals is adjusted so that processing, power drain and communication link attributes are also optimized for the communications device.

[0020] The method may further comprise determining if the N different summations of the source signals are stationary relative to the communications device. The term stationary implies the defining characteristics of the signals, such as its moments. Such characteristics are often affected by relative motion of the transmit sources and the communications device. The processing for separating desired source signals from the additional mixing matrix may be based on a stationary biased processing such as principal component analysis (PCA) if the source signals are stationary, or non-stationary biased processing such as non-stationary PCA

- 7 -

if some subset of the received signals are not stationary.

[0021] The type of processing used for separating the at least one desired source signal from the initial mixing matrix is used for separating the at least one desired source signal from the additional mixing matrix. The type of processing may comprise at least one of PCA, non-stationary PCA, independent component analysis (ICA) and single value decomposition (SVD).

[0022] The method may further comprise determining a bit error rate in the at least one desired source signal after the decoding of the initial mixing matrix; and providing feedback via the transceiver to a transmitter transmitting the at least one desired source signal for adjusting encoding of the at least one desired source signal at the transmitter.

[0023] Another aspect of the present invention is to provide a communications device as defined above for decoding signals.

Brief Description of the Drawings

[0024] FIG. 1 is a block diagram of a communications device in accordance with the present invention.

[0025] FIG. 2 is a detailed flowchart for creating a mixing matrix in accordance with the present invention.

[0026] FIG. 3 is a flowchart for exploiting the mixing matrix created with the flowchart in FIG. 2.

Detailed Description of the Preferred Embodiments

[0027] The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may,

- 8 -

however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

[0028] A communications device **10** with adaptive decoding will now be discussed in reference to FIG. 1. An antenna array **12** receives a linear combination (mixture) of source signals from one or more signal sources. The signal sources typically provide desired signals, undesired signals and unknown noise sources.

[0029] The antenna array **12** comprises a plurality of antenna elements **14**, with each antenna element receiving a different summation of the source signals. The antenna elements **14** include a first antenna element **14(1)** through an Nth antenna element **14(N)**.

[0030] In one embodiment, the N antenna elements **14(1)-14(N)** comprise N active antenna elements so that the antenna array **12** forms a phased array. In another embodiment, the N antenna elements **14(1)-14(N)** may comprise at least one active antenna element, and up to N-1 passive antenna elements so that the antenna array **12** forms a switched beam antenna. In yet another embodiment, the antenna array **12** may comprise N active antenna elements, with at least 2 of the antenna elements having different polarizations.

[0031] The antenna elements **14** thus provide N ideally different summations of the source signals to a transceiver **16**. However, not all the N different sums may be linearly independent, resulting in the number of useable linearly independent sums being less than N. A

- 9 -

processor 20 is downstream to the transceiver 16. Even though the processor 20 is illustrated separate from the transceiver 16, the processor may be included within the transceiver. The different summations of the source signals received by the transceiver 16 are used to populate a mixing matrix 22. The mixing matrix 22 is then processed by one or more blind signal separation processing modules 24, 26 and 28 within the processor 20 to determine a separation matrix 30 for separating the source signals in the mixing matrix. The separated signals are represented by reference 32.

[0032] The separated signals 32 then undergo signal analysis by a signal analysis module 42 to determine which signals are of interest and which signals are interferers. An application dependent processing module 44 processes the signals output from the signal analysis module 42, which includes demodulating and decoding the signals provided thereto. The application dependent processing module 44 also determines what is the minimum rank of the mixing matrix 22 that is necessary for providing an adequate result when decoding the received summation signals.

[0033] The decision on which signals are of interest may not always involve the final signal to be decoded. For instance, the application may call for identifying interferers and subtracting them from the different summations of the received source signals, and then feeding the reduced signal to a waveform decoder. In this case, the signals of interest are the ones that ultimately end up being rejected.

[0034] A signal splitter 40 is coupled between the transceiver 16 and the processor 20. The signal splitter 40 is used to adaptively control the

- 10 -

processing capability of the processor **20** by optimizing the size of the mixing matrix **22**. This is accomplished by splitting the N different summations of the source signals. The illustrated signal splitter **40** comprises a code despreader **40 (1)** and in-phase (I) and quadrature (Q) modules **40 (2)**.

[0035] To begin decoding signals in the communications device **10**, source signals are received at the antenna array **12**, with N different summations of the source signals being received since there are N antenna elements. The N different summations of the source signals are provided through the signal splitter **40** to the transceiver **16**, without splitting the signals.

[0036] Next, the processor **20** evaluates the N different summations of the source signals by forming an initial mixing matrix **22 (1)** comprising the N different summations of the source signals. The initial mixing matrix **22 (1)** has a rank equal to N. The source signals are separated **32** from the initial mixing matrix **22 (1)**. The separated signals **32** then undergo signal analysis by the signal analysis module **42** to determine which signals are of interest and which signals are interferers. The signals of interest are then demodulated and decoded in the application dependent processing module **44**.

[0037] The processor **20** forms an additional mixing matrix **22 (2)** comprising the N different summations of the source signals. If the rank of the additional mixing matrix **22 (2)** is less than the minimum rank associated with the initial mixing matrix **22 (1)**, then a feedback signal **45** is output by the application dependent processing module **44** to the signal splitter

- 11 -

so that the source signals can be split for increasing the rank of the additional mixing matrix.

[0038] As an example, if the number of summation signals received by the antenna elements **14(1)-14(N)** is N , where $N = 5$, the row dimension of the initial mixing matrix **22(1)** is also 5. However, if evaluation of the 5 different summations of the source signals indicates that one of the summations of the source signals is not linear independent, then the rank of the mixing matrix is 4, and therefore only 4 signals may be separated. If the desired signal is not in this separable set, then the rank of the mixing matrix needs to be increased by other means. The application dependent processing module **44** determines this situation, sets a higher minimum rank for the mixing matrix and instructs the mixing matrix creation processing to build such a matrix given the determined antenna array limitation(s).

[0039] A higher rank matrix is helpful for reducing the noise, which increases the signal-to-noise ratio of the desired signals, which in turn reduces the error rate. Reduced noise may be used to increase the transmit data rate, reduce the error correction encoding, or improve the overall reliability of the link. Also, shifting the burden of matrix filling to the receiver can also reduce the load on the transmitters, which can be exploited if there is a control loop between the two. Conversely, in some implementations the transmitter may be less resource constricted than the receiver and it can be instructed to perform adjustments which lowers the burden on the receiver.

- 12 -

[0040] The feedback signal **45** sent back to the signal splitter **40** indicates that the code despreaders **40(1)** is to be used for splitting the 4 different summations of the source signals of the antenna array usable element subset. To use the code despreaders **40(1)**, the modulation of the source signals need to be spread spectrum signals, such as CDMA signals.

[0041] The code despreaders **40(1)** decodes the 4 different summations of the source signals, with each one of the 4 different summations including k codes for providing k different summations of the source signals associated therewith. If $k = 2$, then the additional mixing matrix comprises $2 * 4$ (i.e., kN) different summations of the source signals so that a rank of 8 is provided.

[0042] As an illustration, in case a rank of 8 was still less than the minimum rank associated with the initial mixing matrix **22(1)**, then the I and Q modules **40(2)** separate each one of the 8 (i.e., kN) different summations of the source signals into I and Q component sets so that a rank of **16** (i.e., $2kN$) is provided.

[0043] In lieu of using the code despreaders **40(1)** first, the I and Q modules **40(2)** may be used first. Also, if the received signals are not spread spectrum signals or if only 1 code is used by the spread spectrum signals, i.e., $k = 1$, then the code despreaders **40(1)** is not used.

[0044] The size of the initial mixing matrix **22(1)** is either adequate, over-determined or undetermined. Over-determined means that the initial mixing matrix **22(1)** is larger than what is necessary for decoding the received summation signals. Under-determined means

- 13 -

that the initial mixing matrix **22(1)** is too small for adequately decoding the received summation signals.

[0045] In both the over/under-determined cases, the processing capability of the processor **20** is not optimized. In the over-determined case, excess processing power is used, which in turn, consumes more electrical power. This is important when the communications device **10** is operating from a battery **60**. In the under-determined case, processing is inadequate since the decoded signals may not be sufficient for use, i.e., the resulting bit error rate is too high.

[0046] If the rank of the additional mixing matrix **22(2)** is greater than the minimum rank associated with the initial mixing matrix **22(1)**, then the source signals are modified so that the rank of the additional mixing matrix is decreased. The modifying comprises not including at least one of the N different summations of the source signals when forming the additional mixing matrix. This may also be a function of the signal splitter **40** based upon the feedback signal **45**.

[0047] Referring back to the processor **20**, the PCA module **24** operates based on the first and second moments of the different summations of the received source signals, whereas the ICA module **26** operates based on the third and fourth moments of the same signals. The SVD module **28** performs signal separation based on the eigenvalues of the different summations of the received source signals.

[0048] The correlation processing initially performed by the PCA module **24** determines an initial separation matrix **30(1)** for the different summations of

- 14 -

the source signals, and the ICA module **26** then determines an enhanced separation matrix **30(2)** for separating the source signals in the mixing matrix **22**. If the signals are separated by the SVD module **28**, a separation matrix **30(3)** is also determined for separating the different summations of the received source signals in the mixing matrix **22**.

[0049] The processor **20** also determines if the N different summations of the source signals are stationary relative to the communications device **10**. The processing for separating desired source signals from the additional mixing matrix **20(2)** is based on principal component analysis (PCA) if the source signals are stationary, or non-stationary PCA if the source signals are not stationary.

[0050] The type of processing used for separating the desired source signals from the initial mixing matrix **22(1)** is used for separating the desired source signals from the additional mixing matrix **22(2)**. The type of processing comprises at least one of principal component analysis (PCA), non-stationary PCA and independent component analysis (PCA).

[0051] As part of the application dependent processing module **44**, a bit error rate in the desired source signals is determined after the decoding of the initial mixing matrix **22(1)**. Feedback is provided via the transceiver **16** to a transmitter transmitting the desired source signals for adjusting the encoding of the desired source signals at the transmitter.

[0052] The error correction encoding determines the error rates that can be tolerated in the raw decoded streams. Since the raw error rate is also a function of the subset of the matrix fill options, there is a

- 15 -

tradeoff between these settings. A feedback and control loop between the encoder and decoder can be used to choose the optimum mutual settings. The encoding can be changed based on the stationary degree of the signal relative to the decoder.

[0053] The most robust operations require the additional mixing to be recalculated for every symbol. Often, however, the coherence time exceeds the number of symbols, such that measurements are only needed at a rate slightly faster than the coherence time. Reducing the additional mixing matrix determination occurrences will save power and processor overhead.

[0054] Monitoring the changes in the matrix from one occurrence to another is used to determine how often the decoding matrix must be recalculated. In wide band systems the subchannels often have individual coherence times. Each subchannel can have its own decoding matrix and associated measurement rate. This eliminates the need to recalculate one very large decoding matrix at the fastest necessary rate. In general the sum of measurements for the sub-decoding matrixes will be less than for the use of one large one.

[0055] Referring now to FIG. 2, a detailed flowchart for creating the mixing matrix **22** will now be discussed. For purposes of simplifying the illustration, the antenna array only comprises 2 antenna elements. From the start **100**, all numeric values are set to 0, and all logic values are initialized at Block **102**. An example logic value is the number of antenna elements **14** selected to provide summation signals to the transceiver **16**. A determination is made at Block **104** as to whether both

- 16 -

antenna ports are above the sensitivity of the transceiver **16**.

[0056] If the decision to Block **104** is YES, then a decision is made at Block **106** for determining if both of the antenna elements are receiving linearly independent signal sums. If YES, the rank of the mixing matrix is set to 2 at Block **108**.

[0057] If the decision to Block **104** had been NO, then the rank of the mixing matrix is set to 1 in Block **110**. A decision is then made in Block **112** for determining if antenna A is better than antenna B. If YES, then antenna A is selected in Block **114**. If NO, then antenna B is selected in Block **116**.

[0058] In Block **118**, a decision is made to see if the rank is greater than the minimum rank required for obtaining a useable result. The minimum rank is initially determined by evaluating the N different summations of the source signals as received by the antenna array **12**. A mixing matrix **22** is formed comprising up to the N different summations of the source signals. In this case the rank equals 2. At least one desired source signal is separated from the mixing matrix **22**. The at least one separated signal is decoded, and a decision is made concerning whether that current size of the mixing matrix is adequate, over-determined or undetermined based upon the at least one decoded signal.

[0059] If the decision in Block **118** is YES, then the mixing matrix is built based upon the current settings, as indicated by Block **120**. If the decision in Block **118** is NO, then the flowchart steps through a sequence of steps for selecting a first option for increasing the rank of the mixing matrix, and if the first option

- 17 -

is not sufficient for increasing the rank, then a next option is applied and so on up to an Xth available option.

[0060] For example, a decision is made in Block **122** with respect to spreading codes being available. If the source signals are spread spectrum type signals and more than 1 spreading code is used, then the rank is set to kN in Block **124**. The new rank is compared to the minimum required rank in Block **126**. If the decision in Block **126** is YES, then the mixing matrix **22** is built based upon the current settings, as indicated by Block **120**.

[0061] If the decision in Block **126** is NO, then a decision is made in Block **128** with respect to I and Q modules being available. Each one of the kN signals is split into I and Q components so that the now becomes $2kN$ at Block **130**. The new rank is compared to the minimum required rank in Block **132**. If the decision in Block **132** is YES, then the mixing matrix **22** is built based upon the current settings, as indicated by Block **120**.

[0062] If the decision in Block **132** is NO, then a decision is made in Block **134** with respect to another option being available. This option does not have to be another signal splitter option. Instead, the Nth option may address antenna techniques such as polarization, elevation and signal path selection techniques. As above, the new rank is compared to the minimum required rank in Block **136**. If the decision in Block **136** is YES, then the mixing matrix **22** is built based upon the current settings, as indicated by Block **120**. If no, then a rank deficient flag is set in Block **140** and the mixing matrix **22** is built anyway based upon

- 18 -

the current settings, as indicated by Block **120**. The flowchart exits at Block **142**.

[0063] In general, the decoding matrix will not vary much from one calculation to the next. The prior values can therefore be used as seeds to provide an iterative determination of the solution, which will be less processor intense than determination from scratch. When the matrix is large to be begin with, iterative decoding will usually be faster even when the solution is determined from an unknown state. This is a well know method to solve large rank, fairly full matrices.

[0064] While a key means of separating the signals as outlined herein ICA, there are other methodologies such as subspace analysis and PCA. Due to the nature of the signals being decoded, the degree and type of interference, and the nature of the channels encountered by the various signals, one means of extracting the signals of interest versus suppressing the interfering signals may be of a superior nature for processing or power conservation. Analysis of the nature of the signals and the results obtained during prior decoding sessions will aid in determining the appropriate approach for a given decoding sessions.

[0065] A flow chart illustrating a particular decision tree and processing blocks that can be used to implement the blind signal separation processing is provided in FIG. 3. It can reduce processing and power loading, and choose an adequate processing approach while taking into account the stationary degree of the signal relative to the communications device **10**. Of particular interest is ICA decoding, since in many implementations it is preceded by PCA decoding. The PCA

- 19 -

coding in turn may be selected based on the stationary characteristics of the signals.

[0066] A flowchart for exploiting the mixing matrix created with the flowchart in FIG. 2 will now be discussed in FIG. 3. From the start (Block **200**), a determination is made at Block **202** on whether or not the historical and present data indicate preprocessing is required on the mixing matrix. For instance, if the signal-to-noise ratio is high for the signals, then preprocessing is not required. If the decision is NO, the decoding is attempted without preprocessing in Block **204**. A decision is made in Block **206** to determine if the decoding attempt is successful. If YES, then the signal separation approach is recorded in Block **208**.

[0067] If the decoding attempt was not successful, then a decision is made in Block **210** concerning whether signal characteristics indicate a prior preprocessing approach is still valid. If YES, then the prior approach is chosen in Block **212**. There are 1 to X approaches to choose from.

[0068] For the first approach, a decision is made in Block **214** concerning whether the signals are stationary. If YES, then PCA processing is performed in Block **216**. The decision in Block **220** determines if adequate signal separation is obtained. If NO, then non-stationary PCA processing is performed in Block **218**, and the decision in Block **220** determines if adequate signal separation is obtained. If the decision made in Block **220** is YES to indicate that the signal separation is successful, then the decoding approach is recorded in Block **208**.

- 20 -

[0069] If the decision made in Block **220** is NO, then PCA data is used to perform a statistical phase of ICA in Block **222**, and the path loops back to Block **224**. If the signal separation approach in Block **224** is successful, then the approach is recorded in Block **208**. If the signal separation approach in Block **224** is not successful, then another one of the N approaches is chosen in Block **226** and the steps through Blocks **214** through **220** are repeated. Block **228** insures that the same approach is not selected twice. The flowchart exits at Block **230**.

[0070] Many variations on the logical flow are possible. For instance the only processing techniques available may be ICA and PCA optimized for non-stationary signals (NS-PCA). This would collapse the flow diagram to not using any preprocessing, preprocessing with only PCA, or utilizing the full ICA processing. It will be recognized by someone skilled in the art that variations on the general processing tree are still within the scope of this invention.

[0071] Whether or not the signals are stationary relative to the communications device **10** can be determined by a number of means. As previously mentioned, examination of the received signal summations can reveal the condition. If the communications device **10** is communicating principally with a fixed infrastructure and can determine or be told if it is moving, the signals may be classified as stationary or not dependant on the velocity of its movement. Another option would be for the other end of the communication link to tell the device the nature of its movement. This could be either because it knows its

- 21 -

own movement, or has the ability to determine the other end's movement.

[0072] Since relative movement is the primary concern, a signal source moving relative to the reference plan in concert with the receive is stationary for in regards to signal reception. An example would be a train with an access point. A device communicating with it on the train would detect a stationary signal, while fixed infrastructure sources not on the train would be non-stationary.

[0073] Testing a number of different techniques may not always be practical, since time to do so may cause excessive delays (i.e., processing limitations), and the power consumed by attempting less powerful techniques unsuccessfully may exceed the power consumed by directly using the most robust technique. The use of ICA is particularly attractive since it can initially use PCA processing which when inadequate is not wasted, and the results are utilized in the full ICA processing.

[0074] In summary, the rank of the additional mixing matrix **22 (2)** determines the number of the most significant signals that will be separated, while the rest of the signals are treated as noise. This value therefore needs to be at a minimum inclusive of the signals to be decoded. A possibly higher minimum may be necessary to decrease the noise component so that the signal-to-noise ratio allows an acceptable decoding error rate. It should also be noted that dependent on the decoding methodology the signals being separated may not always include the ultimate signals of interest. For instance, removal of noise from the

- 22 -

aggregate, and presentation of the cleaned-up aggregate to a classical decoder may be adequate.

[0075] If the options to fill the additional mixing matrix **22(2)** exceed the rank necessary for operation, the signal splitter **40** can reduce the number of options being utilized. Some selections from the available set may be more desirable than others, and the optimum selection can allow for a lower matrix rank. This set can be determined by examination of the signals from the various options in comparison with the other options, by trial and error techniques (e.g., comparisons of results with each particular option used and not used), or by historical tracking of conditions and results. Examination of the received signals can also ascertain as to their stationary degree. Which method or combination of method used can also be determined based on effectiveness given known conditions and historical evidence.

[0076] Many modifications and other embodiments of the invention will come to the mind of one skilled in the art having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is understood that the invention is not to be limited to the specific embodiments disclosed, and that modifications and embodiments are intended to be included within the scope of the appended claims.

- 23 -

THAT WHICH IS CLAIMED IS:

1. A method for decoding signals in a communications device comprising an antenna array, a transceiver coupled to the antenna array, and a processor coupled to the transceiver, the method comprising;

receiving source signals at the antenna array, the antenna array comprising N antenna elements for receiving N different summations of the source signals;

providing the N different summations of the source signals to the transceiver;

evaluating the N different summations of the source signals in the processor by

forming an initial mixing matrix comprising the N different summations of the source signals, the initial mixing matrix having a rank equal to or less than N,

separating at least one desired source signal from the initial mixing matrix,

decoding the at least one desired source signal after the separating,

determining a minimum rank of the initial mixing matrix necessary for the at least one source signal to be useable after the decoding; and

forming an additional mixing matrix comprising the N different summations of the source signals, and if the rank of the additional mixing matrix is less than the minimum rank associated with the initial mixing matrix, then modifying the source

- 24 -

signals so that the rank of the additional mixing matrix is increased.

2. A method according to Claim 1 wherein the N different summations of the source signals used for the additional mixing matrix are the same as the N different summations of the source signals used for the initial mixing matrix, except time delayed.

3. A method according to Claim 1 wherein the N different summations of the source signals used for the additional mixing matrix are different than the N different summations of the source signals used for the initial mixing matrix.

4. A method according to Claim 1 wherein the communications device further comprises a signal splitter between the antenna array and the transceiver; and wherein the modifying comprises splitting the source signals so that the rank of the additional mixing matrix is increased.

5. A method according to Claim 4 wherein the signal splitter comprises a code despreader for decoding the N different summations of the source signals, each one of the N different summations including k codes for providing k different summations of the source signals associated therewith, the additional mixing matrix comprising kN different summations of the source signals so that a rank of kN is provided.

- 25 -

6. A method according to Claim 5 wherein the signal splitter further comprises in-phase (I) and quadrature (Q) modules downstream from the code despreaders, and if the rank of kN is less than the minimum rank associated with the initial mixing matrix, then the I and Q modules separate each one of the kN different summations of the source signals into I and Q component sets so that a rank of $2kN$ is provided.

7. A method according to Claim 6 wherein if the rank of $2kN$ is less than the minimum rank associated with the initial mixing matrix, then a rank deficient flag is set in the processor.

8. A method according to Claim 4 wherein the signal splitter comprises in-phase (I) and quadrature (Q) modules for separating each one of the N different summations of the source signals into I and Q component sets, the additional mixing matrix comprising $2N$ different summations of the source signals so that a rank of $2N$ is provided.

9. A method according to Claim 1 wherein if the rank of the additional mixing matrix is greater than the minimum rank associated with the initial mixing matrix, then modifying the source signals so that the rank of the additional mixing matrix is decreased.

10. A method according to Claim 9 wherein the modifying comprises not including at least one of the N different summations of the source signals when forming the additional mixing matrix.

- 26 -

11. A method according to Claim 1 wherein the N antenna elements comprise N active antenna elements so that the antenna array forms a phased array.

12. A method according to Claim 1 wherein the N antenna elements comprise N active antenna elements, with at least two of the active antenna elements having different polarizations.

13. A method according to Claim 1 wherein the N antenna elements comprise at least one active antenna element, and up to N-1 passive antenna elements so that the antenna array forms a switched beam antenna.

14. A method according to Claim 1 wherein the processing for separating desired source signals from the additional mixing matrix is based on at least one of principal component analysis (PCA) and independent component analysis (ICA).

15. A method according to Claim 1 wherein the processing for separating desired source signals from the additional mixing matrix is based on single value decomposition (SVD).

16. A method according to Claim 1 further comprising determining if the N different summations of the source signals are stationary relative to the communications device; and wherein the processing for separating desired source signals from the additional

- 27 -

mixing matrix is based on a stationary processing procedure if the received signals are stationary, or a non-stationary processing procedure if the received signals are not stationary.

17. A method according to Claim 16 wherein the processing for separating the desired source signals from the additional mixing matrix is based on principal component analysis (PCA) if the source signals are stationary, or non-stationary PCA if the source signals are not stationary.

18. A method according to Claim 1 wherein the type of processing used for separating the at least one desired source signal from the initial mixing matrix is used for separating the at least one desired source signal from the additional mixing matrix, the type of processing comprising at least one of principal component analysis (PCA), non-stationary PCA and independent component analysis (PCA).

19. A method according to Claim 1 further comprising:

determining a bit error rate in the at least one desired source signal after the decoding of the initial mixing matrix; and

providing feedback via the transceiver to a transmitter transmitting the at least one desired source signal for adjusting the encoding of the at least one desired source signal at the transmitter.

20. A communications device comprising:

- 28 -

an antenna array for receiving source signals, said antenna array comprising N antenna elements for receiving N different summations of the source signals;

a transceiver coupled to said antenna array for receiving the N different summations of the source signals; and

a processor coupled to said transceiver for evaluating the N different summations of the source signals by

forming an initial mixing matrix comprising the N different summations of the source signals, the initial mixing matrix having a rank equal to or less than N,

separating at least one desired source signal from the initial mixing matrix,

decoding the at least one desired source signal after the separating,

determining a minimum rank of the initial mixing matrix necessary for the at least one source signal to be useable after the decoding; and

said processor forming an additional mixing matrix comprising the N different summations of the source signals, and if the rank of the additional mixing matrix is less than the minimum rank associated with the initial mixing matrix, then modifying the source signals so that the rank of the additional mixing matrix is increased.

21. A communications device according to Claim 20 wherein the N different summations of the source signals used for the additional mixing matrix

- 29 -

are the same as the N different summations of the source signals used for the initial mixing matrix, except time delayed.

22. A communications device according to Claim 20 wherein the N different summations of the source signals used for the additional mixing matrix are different than the N different summations of the source signals used for the initial mixing matrix.

23. A communications device according to Claim 20 further comprises a signal splitter between said antenna array and said transceiver; and wherein the modifying comprises splitting the source signals so that the rank of the additional mixing matrix is increased.

24. A communications device according to Claim 23 wherein said signal splitter comprises a code despreader for decoding the N different summations of the source signals, each one of the N different summations including k codes for providing k different summations of the source signals associated therewith, the additional mixing matrix comprising kN different summations of the source signals so that a rank of kN is provided.

25. A communications device according to Claim 24 wherein said signal splitter further comprises in-phase (I) and quadrature (Q) modules downstream from said code despreader, and if the rank of kN is less than the minimum rank associated with the initial mixing matrix, then said I and Q modules separate each

- 30 -

one of the kN different summations of the source signals into I and Q component sets so that a rank of $2kN$ is provided.

26. A communications device according to Claim 25 wherein if the rank of $2kN$ is less than the minimum rank associated with the initial mixing matrix, then a rank deficient flag is set in said processor.

27. A communications device according to Claim 23 wherein said signal splitter comprises in-phase (I) and quadrature (Q) modules for separating each one of the N different summations of the source signals into I and Q component sets, the additional mixing matrix comprising $2N$ different summations of the source signals so that a rank of $2N$ is provided.

28. A communications device according to Claim 20 wherein if the rank of the additional mixing matrix is greater than the minimum rank associated with the initial mixing matrix, then the source signals are modified so that the rank of the additional mixing matrix is decreased.

29. A communications device according to Claim 28 wherein the modifying comprises not including at least one of the N different summations of the source signals when forming the additional mixing matrix.

30. A communications device according to Claim 20 wherein the N antenna elements comprise N

- 31 -

active antenna elements so that said antenna array forms a phased array.

31. A communications device according to Claim 20 wherein the N antenna elements comprise N active antenna elements, with at least 2 of the antenna elements having different polarizations.

32. A communications device according to Claim 20 wherein the N antenna elements comprise at least one active antenna element, and up to N-1 passive antenna elements so that said antenna array forms a switched beam antenna.

33. A communications device according to Claim 20 wherein the processing performed by said processor for separating desired source signals from the additional mixing matrix is based on at least one of principal component analysis (PCA) and independent component analysis (ICA).

34. A communications device according to Claim 20 wherein the processing performed by said processor for separating desired source signals from the additional mixing matrix is based on single value decomposition (SVD).

35. A communications device according to Claim 20 wherein said processor further determines if the N different summations of the source signals are stationary relative to said transceiver; and wherein the processing for separating desired source signals from the additional mixing matrix is based on a

- 32 -

stationary processing procedure if the received signals are stationary, or a non-stationary processing procedure if the received signals are not stationary.

36. A communications device according to Claim 35 wherein the processing performed by said processor for separating desired source signals from the additional mixing matrix is based principal component analysis (PCA) if the source signals are stationary, or non-stationary PCA if the source signals are not stationary.

37. A communications device according to Claim 20 wherein the type of processing used by said processor for separating the at least one desired source signal from the initial mixing matrix is used for separating the at least one desired source signal from the additional mixing matrix, the type of processing comprising at least one of principal component analysis (PCA), non-stationary PCA and independent component analysis (PCA).

38. A communications device according to Claim 20 wherein said processor determines a bit error rate in the at least one desired source signal after the decoding of the initial mixing matrix, and provides feedback via said transceiver to a transmitter transmitting the at least one desired source signal for adjusting the encoding of the at least one desired source signal at the transmitter.

1/3

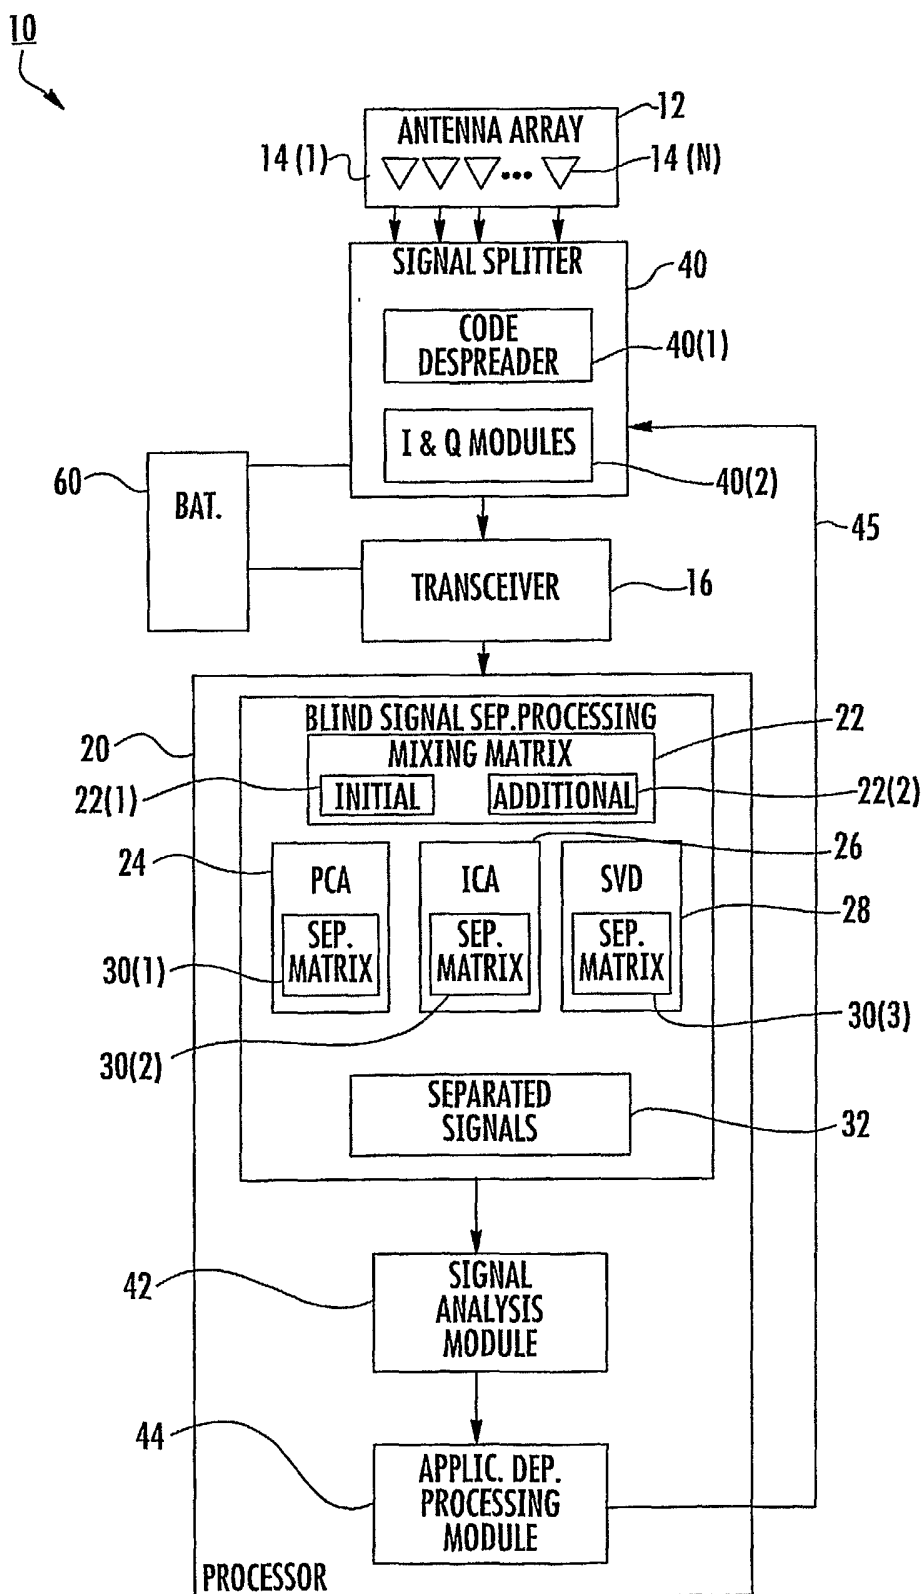


FIG. 1

2/3

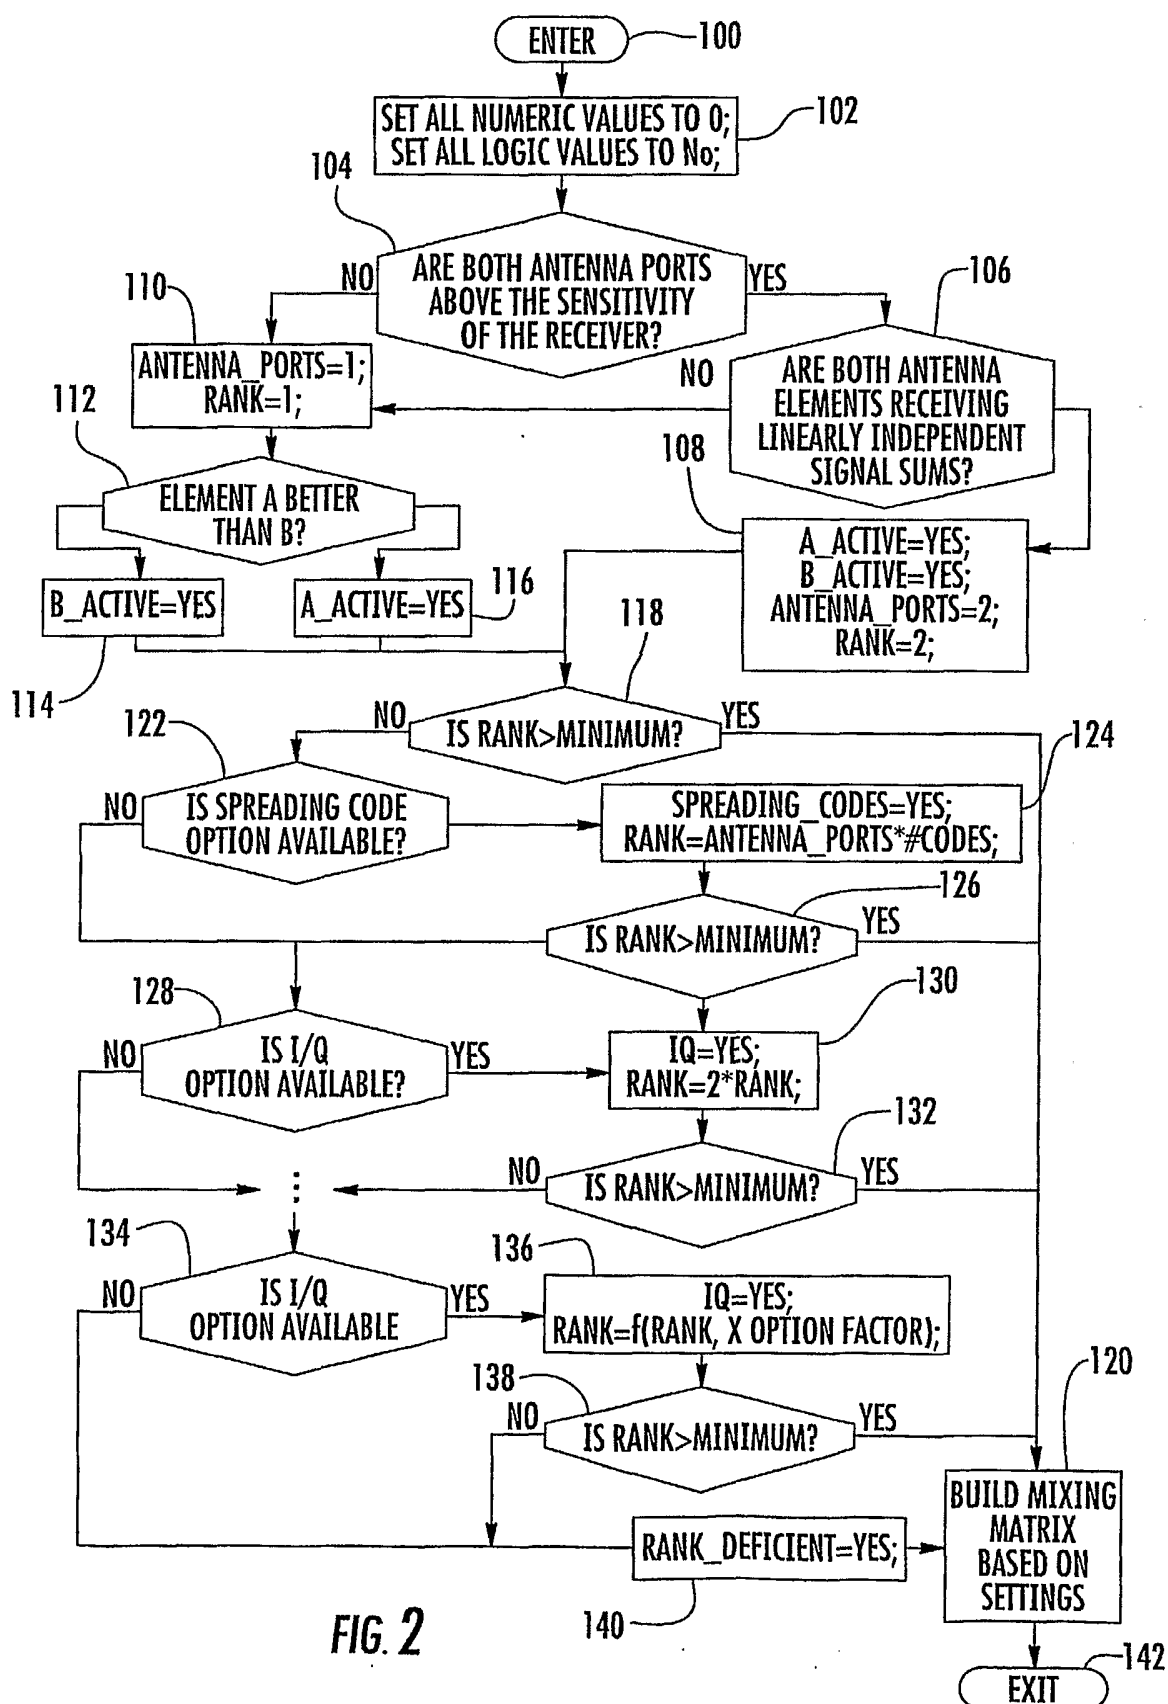


FIG. 2

3/3

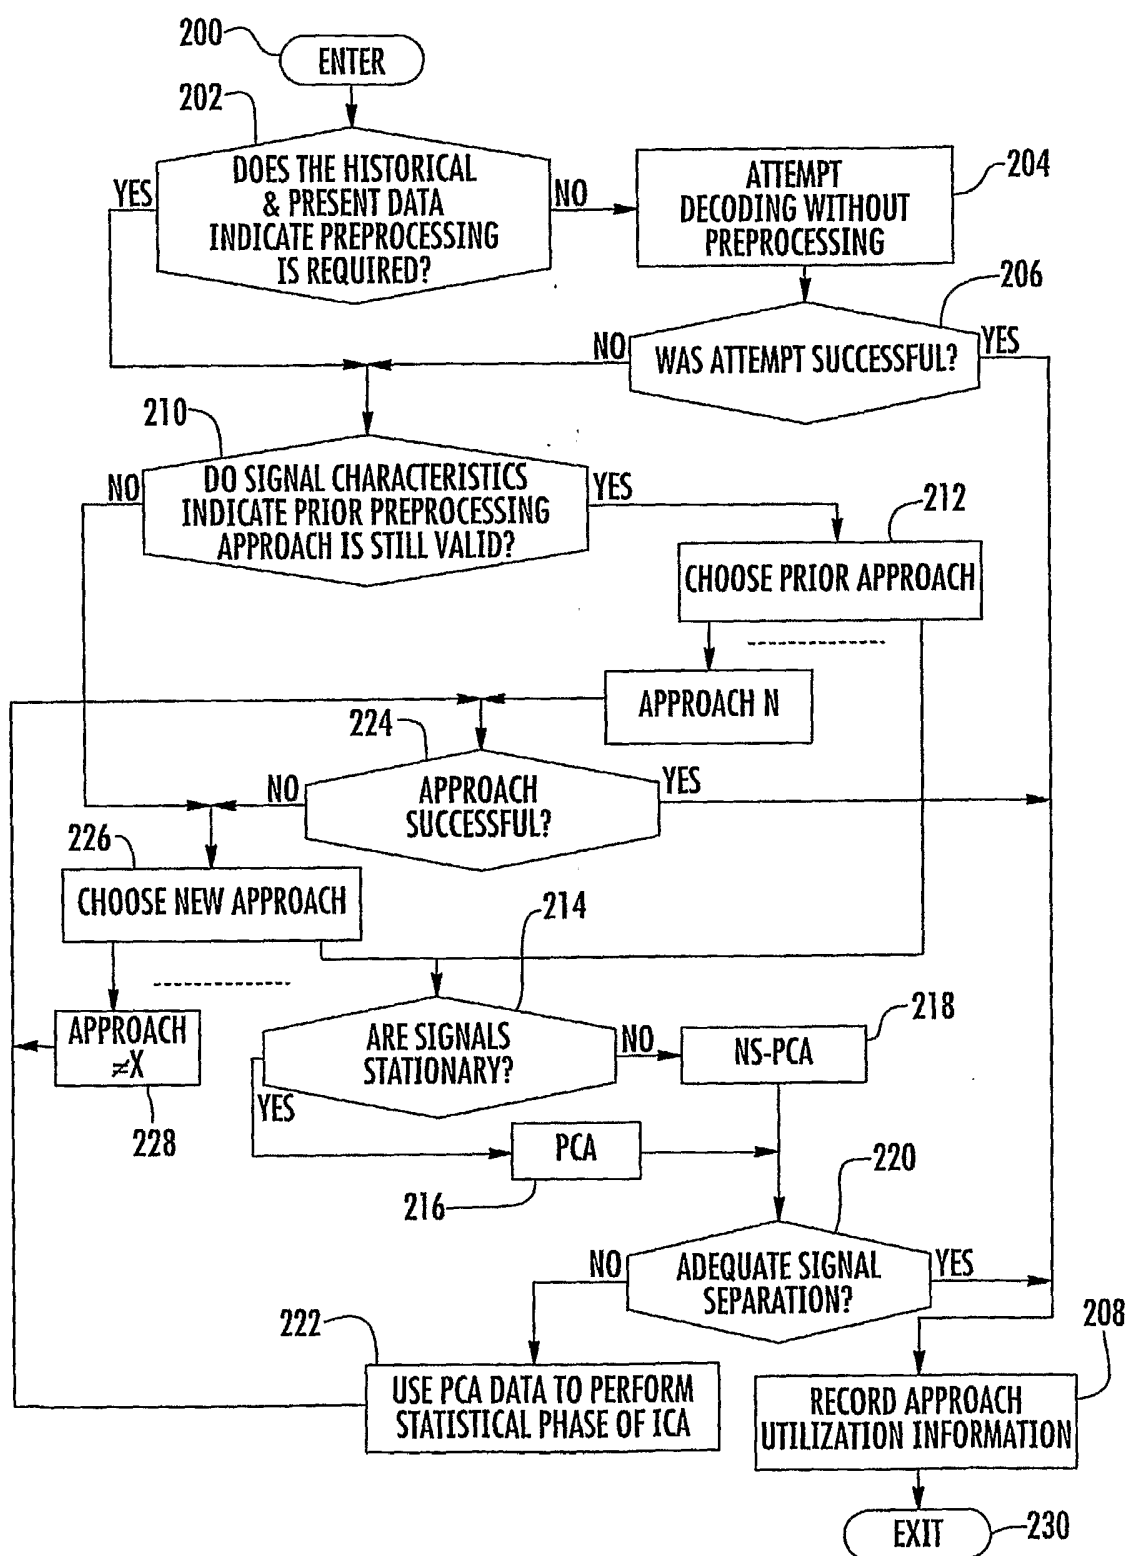


FIG. 3