

(19)



(11)

EP 2 095 957 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.09.2009 Bulletin 2009/36

(51) Int Cl.:
B41J 2/175^(2006.01)

(21) Application number: **08003697.3**

(22) Date of filing: **28.02.2008**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
 HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
 RO SE SI SK TR**
 Designated Extension States:
AL BA MK RS

(72) Inventor: **Kanbe, Tomohiro**
Mizuho-ku
Nagoya-shi
Aichi 467-8562 (JP)

(74) Representative: **Kuhnen & Wacker**
Patent- und Rechtsanwaltsbüro
Prinz-Ludwig-Strasse 40A
85354 Freising (DE)

(71) Applicant: **Brother Kogyo Kabushiki Kaisha**
Nagoya-shi, Aichi-ken 467-8561 (JP)

(54) **Ink cartridge**

(57) An ink cartridge includes: a frame having a first opening on at least one side face thereof; a film closing the first opening; an ink chamber defined by the frame

and the film; and a second opening through which ink is supplied from an interior of the ink chamber to an exterior of the ink chamber. The film includes projections formed on a surface of the film.

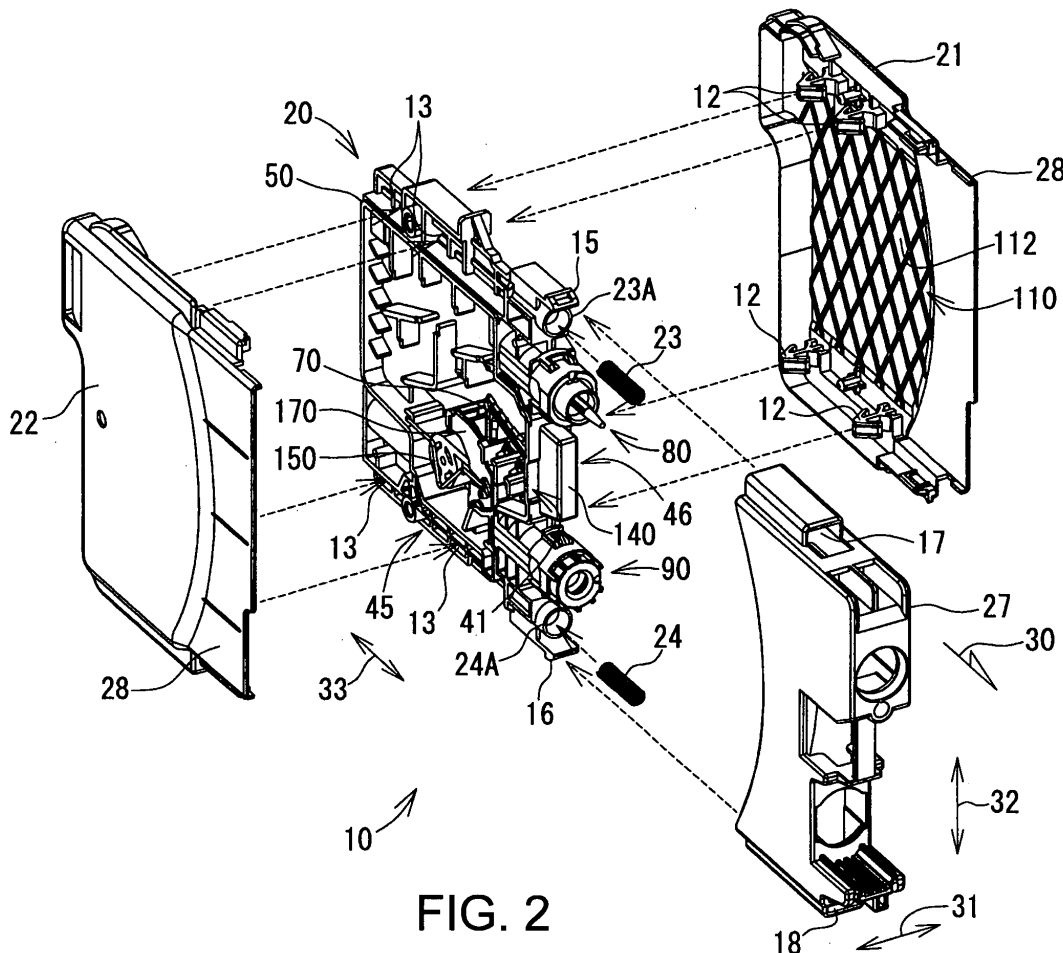


FIG. 2

EP 2 095 957 A1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates generally to an ink cartridge comprising a film which defines at least a portion of an ink chamber.

2. Description of Related Art

[0002] A known ink cartridge is configured to be mounted to and removed from an inkjet recoding apparatus. The known ink cartridge has an ink chamber configured to store ink, and when the ink cartridge is mounted to the inkjet recording apparatus, ink is supplied from the ink chamber to the inkjet recording apparatus. The ink chamber is defined by a frame and a pair of films adhered to opposite side faces of the frame. Such a known ink cartridge is described in JP-A-2007-144808 for example.

[0003] The frame has a substantially flat, hexahedron shape having six faces. The frame has openings formed through two opposing faces which have the largest area among the six faces, and the openings are covered and closed by a corresponding one of the films adhered to the frame. The frame also includes an ink supply opening configured to supply ink from the interior of the ink chamber to the exterior of the ink chamber, and an air intake opening configured to draw air into the ink chamber. When the ink cartridge is mounted to the inkjet recording apparatus, ink in the ink chamber is supplied to the inkjet recording apparatus through the ink supply opening, and air flows into the ink chamber through the air intake opening.

[0004] Ink droplets may adhere to an inner wall surface of the frame when ink is gradually consumed. The ink cartridge may have walls or ribs extending in the gravitational direction, and ink droplets may be guided downward along the walls or the ribs. Nevertheless, when at least a portion of ink chamber is defined by films, it is difficult to provide walls, ribs, or the like on the inner surfaces of the films. Consequently, ink droplets adhering to the inner surfaces of the films do not run downward, and a substantial amount of ink may remain on the inner surfaces of the films.

SUMMARY OF THE INVENTION

[0005] Therefore, a need has arisen for an ink cartridge which overcomes these and other shortcomings of the related art. A technical advantage of the present invention is that ink may be consumed efficiently.

[0006] According to the present invention, an ink cartridge comprises a frame having a first opening on at least one side face thereof; a film closing the first opening; an ink chamber defined by the frame and the film; and a second opening through which ink is supplied from an

interior of the ink chamber to an exterior of the ink chamber. The film comprises projections formed on a surface of the film. With this configuration, ink droplets on the film run downward in the ink chamber along the projections. Such ink may be supplied to the exterior of the ink chamber through the second opening, and therefore ink may be consumed efficiently.

[0007] The projections may extend in a direction intersecting a horizontal direction in a state in which the film is arranged substantially in a vertical direction. With this configuration, the ink droplets on the film run downward along the direction intersecting the horizontal direction.

[0008] The projections may be arranged substantially over an entire area of the film. With this configuration, ink droplets run downward from the entire area of the film.

[0009] The projections may be arranged to align in the horizontal direction on the film. The projections may project toward the ink chamber.

[0010] The ink cartridge may further comprise a cover member which covers the film and comprises rib members protruding toward the film, wherein the projections are formed by plastic deformation of the film caused by the rib members. With this configuration, the projections can be formed on the film easily.

[0011] The projecting may be formed so as to extend from a portion adjacent to an upper end of the first opening to a portion adjacent to a lower end of the first opening. With this configuration, ink droplets positioned adjacent to the upper end of the first opening run downward to the position adjacent to the lower end of the first opening.

[0012] The ink cartridge may further comprise a movable member pivotably provided in the ink chamber.

[0013] The film may be formed of a multilayer synthetic resin film and a layer on the side of the ink chamber is formed of the same material as the frame.

With this configuration, the film can be adhered to the frame easily.

[0014] A center line of the second opening may be perpendicular to a plane on which the second opening is formed. The projections may comprise a first projection, and a second projection. The first projection and the second projection are raised with respect to a flat surface of the film. The first projection has a width and a length which is greater than the width of the first projection, and a distance between a first end of the first projection and a second end of the first projection corresponds to the length of the first projection. The second projection has a width and a length which is greater than the width of the second projection, and a distance between a first end of the second projection and a second end of the second projection corresponds to the length of the second projection. A line intersecting a peak of the first end of the first projection and a peak of the second end of the first projection is slanted or non-perpendicular with respect to the center line of the second opening, and a line intersecting a peak of the first end of the second projection and a peak of the second end of the second projection is slanted or non-perpendicular with respect to the center

line of the second opening.

[0015] When the second opening is formed through a side face of the frame, the line intersecting the peak of the first end of the first projection and the peak of the second end of the first projection is slanted with respect to the center line of the second opening, and the line intersecting the peak of the first end of the second projection and the peak of the second end of the second projection is slanted with respect to the center line of the second opening. When the second opening is formed through a bottom face of the frame, the line intersecting the peak of the first end of the first projection and the peak of the second end of the first projection is non-perpendicular with respect to the center line of the second opening, and the line intersecting the peak of the first end of the second projection and the peak of the second end of the second projection is non-perpendicular with respect to the center line of the second opening. With this configuration, ink droplets on the film run downward in the ink chamber along the first projection and the second projection and collect at a position adjacent to the second opening. Such ink may be supplied to the exterior of the ink chamber through the second opening, and therefore ink may be consumed efficiently.

[0016] The first projection and the second projection may extend substantially from a first end of the ink chamber to a second end of the ink chamber. With this configuration, ink droplets on the film positioned adjacent to the first end of the ink chamber run downward to a position adjacent to the second end of the ink chamber along the first projection and the second projection. Therefore, ink may be consumed more efficiently.

[0017] A portion of the projections may be positioned adjacent to a first end of the ink chamber and distal to a second end of the ink chamber, and another portion of the projections may be positioned adjacent to the second end of the ink chamber and distal to the first end of the ink chamber. Yet another portion of the projections may be positioned substantially at a center of the ink chamber. With these configurations, ink droplets on the film positioned adjacent to the first end of ink chamber, the second end of the ink chamber, or the center of the ink chamber run downward along the projections.

[0018] The first projection and the second projection may be raised to extend into the ink chamber.

[0019] The ink cartridge further may comprise a cover member configured to cover the film, and the cover member may comprise a plurality of rib members extending toward the film.

[0020] A distance from a base of the first projection to a peak of the first projection may be substantially the same as a distance from a base of the second projection to a peak of the second projection.

[0021] Other objects, features, and advantages of embodiments of the present invention will be apparent to persons of ordinary skill in the art from the following description of preferred embodiments with reference to the accompanying drawings.

BRIEF DESCRIPTION OF DRAWINGS

[0022] For a more complete understanding of the present invention, the needs satisfied thereby, and the objects, features, and advantages thereof, reference now is made to the following description taken in connection with the accompanying drawings.

[0023] Figs. 1(A) and 1(B) are a front-face perspective view and a rear-face perspective view of an ink cartridge, respectively, according to an embodiment of the present invention.

[0024] Fig. 2 is an exploded, perspective view of the ink cartridge of Figs. 1(A) and 1(B).

[0025] Figs. 3(A) and 3(B) are side views of the ink cartridge of Figs. 1(A) and 1(B), respectively, in which a movable member, such as a slider, is in a second position and a first position, respectively.

[0026] Fig. 4 is a perspective view of a container body, according to an embodiment of the present invention

[0027] Fig. 5 is a side view of the container body of Fig. 4.

[0028] Fig. 6 is an exploded, perspective view of container body of Fig. 4, in which the container body comprises a pair of films.

[0029] Fig. 7 is a perspective view of a pivotable member, according to an embodiment of the present invention.

[0030] Fig. 8 is a side view of a first cover member, according to an embodiment of the present invention, in which an inner wall surface of the first cover member is depicted.

[0031] Fig. 9 is a perspective view of a packaging arrangement, according to an embodiment of the present invention.

[0032] Fig. 10 is a perspective view of a film, according to an embodiment of the present invention, in which projections are formed on the film.

[0033] Fig. 11 is a side view of a first cover member, according to another embodiment of the present invention, in which an inner wall surface of the first cover member is depicted.

[0034] Fig. 12 is a side view of a first cover member, according to yet another embodiment of the present invention, in which an inner wall surface of the first cover member is depicted.

[0035] Fig. 13 is a side view of a first cover member, according to still another embodiment of the present invention, in which an inner wall surface of the first cover member is depicted.

DETAILED DESCRIPTION OF EMBODIMENTS

[0036] Embodiments of the present invention and their features and technical advantages may be understood by referring to Figs. 1(A)-13, like numerals being used for like corresponding portions in the various drawings.

[0037] Referring to Figs. 1(A) and 1(B), an ink cartridge 10, according to an embodiment of the present invention,

is depicted. An image recording apparatus (not shown), e.g., an inkjet printer uses ink cartridge 10 to form an image on a recording medium (not shown), e.g., paper. The ink cartridge 10 is configured to be mounted to and removed from a cartridge storage section (not shown) of the image recording apparatus. The ink cartridge 10 is mounted to the cartridge storage section by inserting ink cartridge 10 in a direction indicated by an arrow 30 in Fig. 1. After the ink cartridge 10 is mounted in the cartridge storage section, ink stored in the ink cartridge 10 is supplied to a recording head (not shown) of the image recording apparatus.

[0038] The ink cartridge 10 has a substantially flat, hexahedron shape. A width of the ink cartridge 10, as indicated by an arrow 31, is relatively short, and each of a height of the ink cartridge 10, as indicated by an arrow 32, and a depth of the ink cartridge 10, as indicated by an arrow 33, is greater than the width of the ink cartridge 10.

[0039] Referring to Figs. 1(A)-3(B), the ink cartridge 10 comprises a container body 20, a housing 26, a movable member, e.g., a slider 27, and at least one resilient member, e.g., a pair of coil springs 23 and 24. The housing 26 and the slider 27 encloses the container body 20.

[0040] The housing 26 is configured to protect the container body 20. Substantially the entirety of the container body 20 other than a front face 41 of the container body 20 is covered by the housing 26. The housing 26 comprises a first cover member 21 and a second cover member 22 configured to sandwich the container body 20 from the right and left in Fig. 2, respectively. In an embodiment, a pair of films 65 is covered by the first cover member 21 and the second cover member 22.

[0041] The first cover member 21 is attached to a right side face 46 of the container body 20. The first cover member 21 comprises a plurality of engaging claws 12 extending from an inner wall surface thereof, and the container body 20 comprises a plurality of engaging grooves 13 formed therein. The plurality of engaging claws 12 are fitted into the plurality of engaging grooves 13, respectively, such that the right side face 46 of the container body 20 is covered by the first cover member 21. Similarly, the second cover member 22 is attached to a left side face 45 of the container body 20. The second cover member 22 comprises a plurality of engaging claws (not shown) extending from an inner wall surface thereof, and the plurality of engaging claws are fitted in the plurality of engaging grooves 13, respectively, such that the left side face 45 of the container body 20 is covered by the second cover member 22.

[0042] The container body 20 comprises an air communication valve mechanism 80, and an ink supply valve mechanism 90 positioned at the front face 41 thereof. The slider 27 is configured to protect the air communication valve mechanism 80 and the ink supply valve mechanism 90. The slider 27 is coupled to the container body 20 by the coil springs 23 and 24 positioned therebetween, and is configured to move relative to the container body

20. An end of the coil spring 23 is received in a spring receiver 23A formed in an upper portion of the front face 41 of the container body 20, and an end of the coil spring 24 is received in a spring receiver 24A formed in a lower portion of the front face 41 of the container body 20. Engaging claws 15 and 16 extending from the front face 41 above the spring receiver 23A and below the spring receiver 24A, respectively, are fitted in engaging holes 17 and 18 formed through the slider 27, respectively, such that the slider 27 covers the front face 41 of the container body 20 and a front portion 28 of the housing 26.

[0043] The slider 27 is configured to contact and slide on the front portion 28 of the housing 26 between a first position and a second position in the depth direction, as indicated by the arrow 33, when coil springs 23 and 24 expand and contract. When the slider 27 is at the second position, as depicted in Fig. 3(A), the slider 27 is positioned closer to the front face 41 of the container body 20 than when the slider 27 is in the first position, and when the slider 27 is at the first position, as depicted in Fig. 3(B), the slider 27 is positioned further from the front face 41 of the container body 20 than when the slider 27 is in the second position. When a predetermined amount of force greater than a biasing force of the coil springs 23 and 24 is applied to the slider 27, the slider 27 moves from the first position to the second position. When the slider 27 is in the second position, the ink supply valve mechanism 90 extends outside the slider 27 via an opening formed through the slider 27. When the predetermined amount of force is released from the slider 27, the slider 27 subsequently moves from the second position to the first position, and the ink supply valve mechanism 90 is positioned within the slider 27.

[0044] Referring to Figs. 4-7, the container body 20 has a substantially flat, hexahedron shape having the front face 41, a rear face 42 opposite the front face 41, a top face 43, a bottom face 44 opposite top face 43, the left side face 45, and the right side face 46 opposite the left side face 45. Each of the top face 43 and the bottom face 44 is connected to the front face 41 and the rear face 42, and each of the left side face 45 and the right side face 46 is connected to the front face 41, the rear face 42, the top face 43, and the bottom face 44. Moreover, the area of the left side face 45 and the area of the right side face 46 each are greater than each of the area of the front face 41, the area of the rear face 42, the area of the top face 43, and the area of the bottom face 44.

[0045] The container body 20 comprises a frame 50, a pivotable member 70, a supporting block 170, a protecting member 150, the air communication valve mechanism 80, the ink supply valve mechanism 90, and the pair of films 65. The frame 50 defines the six faces 41-46 of the container body 20, such that the six faces 41-46 of the container body 20 correspond to six faces of the frame 50.

[0046] The frame 50 comprises a translucent resin material, e.g., a transparent material or a semi-transparent material, and light passes therethrough. In this embodi-

ment, the frame 50 is manufactured by injection-molding polypropylene. Alternatively, the frame 50 may be manufactured by injection-molding polyacetal, nylon, polyethylene, or the like.

[0047] The frame 50 comprises an outer peripheral wall 51 and a plurality of inner walls or a plurality of inner ribs 52. The inner walls or inner ribs 52 are positioned inside the outer peripheral wall 51. The outer peripheral wall 51 and the inner walls or inner ribs 52 are integral, and define the frame 50. The outer peripheral wall 51 and the inner walls or inner ribs 52 extend from the left side face 45 to the right side face 46 of the frame 50. The outer peripheral wall 51 has a substantially square or rectangular perimeter extending along the front face 41, the top face 43, the rear face 42, and the bottom surface 44 defining a space in the interior thereof. Accordingly, openings 57 are formed on the left side face 45 and the right side face 46, respectively, of the frame 50, such that the left side face 45 and the right side face 46 of the frame 50 are opened.

[0048] The pair of films 65, e.g., translucent films, is connected to, e.g., adhered to, the side faces 45 and 46, respectively, of the frame 50 via an adhesion method, e.g., a thermal adhesion method. More specifically, the pair of films 65 is adhered to both ends of the outer peripheral wall 51 in the width direction 31. The openings 57 are covered and closed by the pair of films 65, such that the frame 50 and the pair of films 65 define an ink chamber 100 configured to store ink therein. Alternatively, a container-shaped frame which is opened only on the right side face 46 may be used instead of the frame 50. In this case, the ink chamber 100 is defined by the film 65 adhered to the right side face 46 of the container-shaped frame.

[0049] The frame 50 comprises a partitioning plate 53 extending from the outer peripheral wall 51, which partitions an upper space of the ink chamber 100 at the center in the width direction 31. The inner walls or inner ribs 52 extend from the outer peripheral wall 51 or the partitioning plate 53. The pair of films 65 also is adhered to the inner walls or inner ribs 52 at both ends thereof in the width direction 31. Consequently, the inner walls or inner ribs 52 restrict the ability of the pair of films 65, the first cover member 21, and/or the second cover member 22 to move inward, such that the inner walls or inner ribs 52 limit an amount of deformation of the pair of films 65. A lower portion of the ink chamber 100, e.g., a space 102 below the partitioning panel 53, is not be partitioned in the width direction 31 and extends from the left side face 45 to the right side face 46, such that the pivotable member 70 and the supporting block 170 are positioned therein.

[0050] In an embodiment, each of the pair of films 65 comprises a plurality of layered, synthetic resin films. For example, each of the pair of films 65 comprises three layers. The innermost layer is formed of a polypropylene, which is the same material as the frame 50. The innermost layer of the pair of films 65 is adhered to the frame 50. The outermost layer is formed of a polyethylene

terephthalate, and the layer sandwiched by the innermost layer and the outermost layer is formed of a nylon. In another embodiment, each of the pair of films 65 may be formed of a metal foil sandwiched by synthetic resins. In yet another embodiment, each of the pair of films 65 may be formed of a pulp, a metal, or a natural resin.

[0051] The frame 50 comprises a rib 74 positioned at a right-side face 46 side of the outer peripheral wall 51, such that the rib 74 is positioned adjacent to a corner between the front face 41 and the bottom face 44. A cylindrical tube 67 extends from the rib 74 towards the left side face 45. A shaft 77 having a column shape has a first end fitted into the cylindrical tube 67, and a second end which is supported by the supporting block 170. The shaft 77 extends through a shaft hole 78 formed through the pivotable member 70.

[0052] The frame 50 comprises a cylindrical ink introduction chamber 105 formed in the rear face 42 of the frame 50 adjacent to the lower end of the rear face 42. The ink introduction chamber 105 extends from the rear face 42 towards the ink chamber 100. The ink introduction chamber 105 is configured to be in fluid communication with the ink chamber 100. Ink is introduced into the ink chamber 100 through the ink introduction chamber 105 during the manufacturing process of the ink cartridge 10.

[0053] The frame 50 comprises a translucent portion 140 positioned at the front face 41 and extending away from the ink chamber 100. An amount of ink stored in the ink chamber 100 can be optically or visually detected via the translucent portion 140. The translucent portion 140 is integral with frame 50, and is formed of the same material as frame 50, e.g., the translucent portion 140 is formed of a translucent resin material which allows light to pass therethrough.

[0054] The translucent portion 140 projects outward from a center portion of front face 41 of the frame 50 away from the ink chamber 100. The translucent portion 140 comprises five rectangular walls and have a substantially a hollow box shape. For example, the translucent portion 140 comprises a front wall 140A, a pair of side walls 140B, a top wall 140C, and a bottom wall 140D. The front wall 140A extends parallel to the front face 41 and is separated from the front face 41 by a predetermined distance. The pair of side walls 140B are connected to the front face 41 and the front wall 140A, the top wall 140C is connected to top ends of the front wall 140A and the side walls 140B, and the bottom wall 140D is connected to bottom ends of the front wall 140A and the side walls 140B. Moreover, the width of the front wall 140A is less than the width of the front face 41. The translucent portion 140 is configured to receive light emitted from an optical sensor, e.g., a photo interrupter. When ink cartridge 10 is mounted to the image forming apparatus, a light emitting portion of a photo interrupter faces one of the side walls 140B and a light receiving portion of the photo interrupter faces the other of the side walls 140B. The light emitted from the light emitting portion of the photo interrupter may pass through the side walls

140B and reach the light receiving portion of the photo interrupter.

[0055] The translucent portion 140 has an inner space 142 formed therein, which is defined by the front wall 140A, the side walls 140B, the top wall 140C, and the bottom wall 140D of the translucent portion 140. The inner space 142 is configured to be in fluid communication with the interior of the ink chamber 100. An indicating portion 72 of the pivotable member 70 is configured to move within the inner space 142 between an upper position and a lower position based on an amount of ink in the ink chamber 100.

[0056] When the ink cartridge 10 is mounted to the image forming apparatus, the air communication valve mechanism 80 is positioned above the translucent portion 140. The air communication valve mechanism 80 is configured to selectively open and close an opening 81 formed through an upper portion of the front face 41 of the frame 50, such that air communication valve mechanism 80 selectively allows and prevents fluid communication between the interior of the ink chamber 100 and the exterior of the ink chamber 100 via the opening 81. The air communication valve mechanism 80 comprises a valve member 87, a spring 86, a stopper 83, and a cap 85.

[0057] The stopper 83 has an opening formed therethrough. The stopper 83 is partially positioned in the opening 81, but does not close the opening 81 completely because the opening is formed through the stopper 83. The valve member 87 is configured to move between an opened position in which the valve member 87 is separated from the stopper 83, and a closed position in which the valve member 87 contacts the stopper 83. When the valve member 87 is positioned in the opened position, the opening of the stopper 83 is not closed by the valve member 87, such that the opening 81 is opened. When the valve member 87 is positioned in the closed position, the opening of the stopper 83 is closed by the valve member 87, such that the opening 81 is closed. The valve member 87 is resiliently urged by the spring 86 toward the stopper 83, such that the valve member 87 is in the closed position unless a force substantially opposite and greater than the biasing force of the spring 86 is applied to the valve member 87. Alternatively, the opening 81 may be covered with a film instead of using the atmospheric air communication valve mechanism 80.

[0058] When the ink cartridge 10 is mounted to the image forming apparatus, the ink supply valve mechanism 90 is positioned below the translucent portion 140. The ink supply valve mechanism 90 is configured to selectively open and close an opening 91 formed through a lower portion of the front face 41 of the frame 50, such that the ink supply valve mechanism 90 selectively allows and prevents fluid communication between the interior of the ink chamber 100 and the exterior of the ink chamber 100 via the opening 91. The ink supply valve mechanism 90 comprises a valve member 97, a spring 96, a spring receiver 94, a stopper 93, and a cap 95. The stopper 93

has an opening formed therethrough. The stopper 93 is partially positioned in the opening 91, but does not close the opening 91 completely because the opening is formed through the stopper 93. The valve member 97 is configured to move between an opened position in which the valve member 97 is separated from the stopper 93, and a closed position in which the valve member 97 contacts the stopper 93. When the valve member 97 is positioned in the opened position, the opening of the stopper 93 is not closed by the valve member 97, such that the opening 91 is opened. When the valve member 97 is positioned in the closed position, the opening of the stopper 93 is closed by the valve member 97, such that the opening 91 is closed. The valve member 97 is resiliently urged by the spring 96 toward the stopper 93, such that the ink supply valve mechanism 90 is in the closed position unless a force substantially opposite and greater than the biasing force of the spring 96 is applied to the valve member 97. When the ink cartridge 10 is mounted to the image recording apparatus, the valve member 97 is pushed by a tube of the image recording apparatus against the biasing force of the spring 96, and the opening 91 is opened. Consequently, ink in the ink chamber 100 is allowed to flow from the opening 91 to the image recording apparatus via the tube. In another embodiment, the opening 91 is formed through the bottom face 44.

[0059] Referring to Figs. 5 and 6, the opening 91 has a center line C which is perpendicular to a plane on which the opening 91 is formed. In this embodiment, the plane on which the opening 91 is formed is parallel to the width direction 31 and the height direction 32, and the center line C of the opening 91 is parallel to the depth direction 33. In another embodiment, the opening 91 is formed through the bottom face 44, the plane on which the opening 91 is formed is parallel to the width direction 31 and the depth direction 33, and the center line C of the opening 91 is parallel to the height direction 32.

[0060] Referring to Figs. 5-7, the pivotable member 70 is configured to indicate whether the ink chamber 100 has a sufficient amount of ink stored therein. The indicating portion 72 is positioned at a first end of the pivotable member 70, and a float portion 73 is positioned at a second end of the pivotable member 70.

[0061] The pivotable member 70 has the shaft hole 78 formed therethrough. The shaft hole 78 is positioned between the first end of the pivotable member 70 and the second end of the pivotable member 70. The shaft 77 is inserted into the shaft hole 78, and the shaft 77 supports the pivotable member 70, such that the pivotable member 70 pivots about the shaft 77 in a direction indicated by an arrow 35 in Fig. 5. The shaft 77 is supported by the cylindrical tube 67 formed on the rib 74 at one end thereof, and by the supporting block 170 at the other end thereof. Alternatively the shaft 77 may be integral with the pivotable member 70.

[0062] The specific gravity of float portion 73 is less than the specific gravity of ink stored in the ink chamber 100. The float portion 73 has a hollow formed therein,

and floats on ink, such that the float portion 70 moves upward and downward based on the amount of ink within the ink chamber 100, and the pivotable member 70 pivots based on the movement of float portion 73. In another embodiment, the float portion 73 does not have the hollow, and comprises a material having a specific gravity less than the specific gravity of ink.

[0063] When the pivotable member 70 pivots clockwise in Fig. 5, the indicating portion 72 contacts the bottom wall 140D of the translucent portion 140, such that further movement of the pivotable member 70 is prevented, and the indicating portion 72 is positioned at the lower position. Similarly, when the pivotable member 70 pivots counterclockwise in Fig. 5, the indicating portion 72 moves away from the bottom wall 140D of the translucent portion 140, and the float portion 73 contacts a bottom surface of the ink chamber 100. When the float portion 73 contacts the bottom surface of the ink chamber 100, further movement of the pivotable member 70 is prevented, and the indicating portion 72 is at the upper position and separated from the bottom wall 140D of the translucent portion 140 by a predetermined distance.

[0064] The pivotable member 70 comprises a first portion 75 extending from the shaft hole 78 to the indicating portion 72, and a second portion 76 extending from the shaft hole 78 to the float portion 73. The mass of the first portion 75 of the pivotable member 70 is less than the mass of the second portion 76 of the pivotable member 70, such that when the second portion 76 of the pivotable member 70 and the first portion 75 of the pivotable member 70 are in the same medium as each other, the second portion 76 of the pivotable member 70 is heavier than the first portion 75 of the pivotable member 70. Accordingly, when the amount of ink stored in the ink chamber is less than a sufficient amount of ink, the pivotable member 70 pivots counterclockwise about the shaft 77 in Fig. 5, and the indicating portion 72 separates from the bottom wall 140D of the translucent portion 140. When the lower end of the float portion 73 contacts the bottom surface of the ink chamber 100, the pivotable member 70 stops pivoting, and the indicating portion 72 is positioned at the upper position. When the indicating portion 72 is at the upper position, it is determined that the ink chamber 100 has an insufficient amount of ink stored therein.

[0065] In contrast, when a sufficient amount of ink is stored in the ink chamber 100, the float portion 73 is submerged in the ink, and a buoyancy force acts on the float portion 73. The buoyancy force is great enough to cause the pivotable member 70 to pivot clockwise about the shaft 77 in Fig. 5. When the pivotable member 70 pivots clockwise, the indicating portion 72 contacts the bottom wall 140D of the translucent portion 140, and the pivotable member 70 stops pivoting and the indicating portion 72 is positioned at the lower position. When the indicating portion 72 is at the lower position, it is determined that the ink chamber 100 has a sufficient amount of ink stored therein.

[0066] Whether or not the ink chamber 100 has a suf-

ficient amount of ink stored therein is determined by a user viewing the position of the indicating portion 72 in the inner space 142, or by using an optical sensor e.g., a photo interrupter, to monitor the position of the indicating portion 72.

[0067] Referring to Figs. 5 and 6, the protecting member 150 is positioned around the pivotable member 70. The protecting member 150 is manufactured by bending a linear steel wire. The protecting member 150 comprises a U-shaped portion 150A which is received by a hook 131 formed on the frame 50, and ends 150B of the protecting member 150 are inserted into a hole (not shown) formed through the rib 74 and a hole 183 formed through the supporting block 170, respectively.

[0068] Referring to Figs. 2 and 8, an inner wall surface of the first cover member 21 comprises a first pattern which faces the opening 57 on the right side face 46 of the frame 50. The first pattern comprises a first portion and a second portion which is raised with respect to the first portion. The first pattern is a reticulated pattern. The first portion comprises a flat surface 112, and the second portion comprises a plurality of rib members 110 which extend from the flat surface 112. The rib members 110 extend towards the film 65. Each of the rib members 110 has a base connected to the flat surface 112, and a peak positioned away from the flat surface 112. The height of the rib members 110 from the base to the peak is substantially the same, and, in this embodiment, is between about 0.2 millimeters and about 0.3 millimeters. The rib members 110 comprise a plurality of first rib members 110A, and a plurality of second rib members 110B which intersect the first rib members 110A. Each of the first rib members 110A has a width and a length which is greater than the width, and a distance between a first end of the first rib member 110A and a second end of the first rib member 110A corresponds to the length of the first rib member 110A. A line intersecting a peak of the first end of the first rib member 110A and a peak of the second end of the first rib member 110A is slanted with respect to the center line C of the opening 91. In another embodiment, the opening 91 is formed through the bottom face 44 of the frame 50, and a line intersecting a peak of the first end of the first rib member 110A and a peak of the second end of the first rib member 110A is non-perpendicular with respect to the center line C of the opening 91. Similarly, each of the second rib members 110B has a width and a length which is greater than the width, and a distance between a first end of the second rib member 110B and a second end of the second rib member 110B corresponds to the length of the second rib member 110B. A line intersecting a peak of the first end of the second rib member 110B and a peak of the second end of the second rib member 110B is slanted with respect to the center line C of the opening 91. In another embodiment, the opening 91 is formed through the bottom face 44 of the frame 50, and a line intersecting a peak of the first end of the second rib member 110B and a peak of the second end of the second rib member 110B is non-

perpendicular with respect to the center line C of the opening 91. Each of the first rib members 110A and the second rib members 110B extends linearly from the first end of the first rib member 110A to the second end of the first rib member 110A, and from the first end of the second rib member 110B to the second end of the second rib member 110B, respectively. Each of the first rib members 110A extends in a direction which is slanted or non-perpendicular with respect to the center line C of the opening 91, such that a left portion of the first rib member 110A is positioned higher than a right portion of the first rib member 110A in Fig. 8. In contrast, each of the second rib members 110B extends in a direction which is slanted or non-perpendicular with respect to the center line C of the opening 91, such that a left portion of the first rib member 110B is positioned lower than a right portion of the second rib member 110B. When the container body 20 is positioned, such that the height of the first cover member 21 in the height direction 32 extends substantially parallel to the gravitational direction, the first rib members 110A and the second rib members 110B extend in directions intersecting a horizontal plane which is perpendicular to the gravitational direction. The first rib members 110A and the second rib members 110B form a reticulated pattern with rhombs which are longer in the height direction 32 of the first cover member 21. Each of the first rib members 110A and the second rib members 110B extends from a first end of the ink chamber 100, e.g., an upper end of the ink chamber 100, to a second end of the ink chamber 100, e.g., a lower end of the ink chamber 100. A portion of the rib members 110 is positioned adjacent to the first end of the ink chamber 100 and distal to the second end of the ink chamber 100, and another portion of the rib members 110 is positioned adjacent to the second end of the ink chamber 100 and distal to the first end of the ink chamber 100. Moreover, yet another portion of the rib members 110 is positioned substantially at a center of the ink chamber 100. Although it is not shown in the drawings, a plurality of rib members are also formed on the inner wall surface of the second cover member 22 in the same manner.

[0069] When the first cover member 21 is attached to the frame 50, the film 65 positioned on the right side face 46 of the frame 50 and the inner wall surface of the first cover member 21 face each other. If the film 65 is not flexed, the distance between the rib members 110 and the film 65 is substantially zero, and therefore, the rib members 110 contacts the film 65. When the film 65 is flexed outward, the film 65 tightly contacts the inner wall surface of the first cover member 21, and the first pattern of the inner wall surface of the first cover member 21 is transferred to the film 65, such that a second pattern corresponding to the first pattern is formed on the film 65. The rib members 110 contact and apply a force to the film 65, such that the film 65 is plastically deformed, and projections 60, which correspond to the shape of the rib members 110, are formed on the surface of the film 65 (See Fig. 10).

[0070] Although not shown in the drawings, the inner wall surface of the second cover member 22 also comprises rib members which are the same as or similar to those on the inner wall surface of the first cover member 21. Therefore, when the film 65 positioned on the left side face 45 tightly contacts the inner wall surface of the second cover member 22, the projections 60 are formed on the surface of the film 65 positioned on the left side face 45. In another embodiment, the rib members formed on the inner wall surface of the second cover member 22 may have a different shape from the rib members 110 formed on the first cover member 21. In yet another embodiment, when a container-shaped frame having an opening only on the right side face 46 is used instead of the frame 50, the left side face 45 does not have any film, and hence the rib members 110 are formed only on the inner wall surface of the first cover member 21.

[0071] Referring to Fig. 9, a packaging arrangement 120 according to an embodiment of the present invention is depicted. The packaging arrangement 120 comprises the ink cartridge 10 and a package bag 121 enclosing the ink cartridge 10. The interior of the package bag 121 is depressurized. When the ink cartridge 10 is shipped from a factory, the packaging arrangement 120 is stored in a container box.

[0072] The interior of the package bag 121 is depressurized by a suction pump or the like, such that the pressure inside the package bag 121 is less than the atmospheric pressure. The pressure inside the ink chamber 100 is also depressurized, such that the pressure inside the ink chamber 100 is less than the atmospheric pressure. The pressure inside the package bag 121 and outside the ink chamber 100 is less than the pressure inside the ink chamber 100. This pressure differential prevents air from entering the ink chamber 100 through the films 65, such that the pressure inside the ink chamber 100 is prevented from being restored to the atmospheric pressure when the ink cartridge 10 is left unused for a substantial amount of time.

[0073] A method of manufacturing the packaging arrangement 120 now is described in detail.

[0074] The shaft 77, the pivotable member 70, the supporting block 170, and the protecting member 150 are attached to the frame 50. The pivotable member 70 and the supporting block 170 are manufactured in advance using injection molding. The pivotable member 70 is attached to the frame 50, such that the indicating portion 72 is positioned in the inner space 142 of the translucent portion 140. Then, a resilient member, e.g., rubber, is press-fitted into the ink introduction chamber 105. After the resilient member is fitted in the ink introduction chamber 105, the openings 57 of the frame 50 are covered and closed by the pair of films 65, respectively, such that the frame 50 and the pair of films 65 define the ink chamber 100 therein. More specifically, after the film 65 is placed on the frame 50 to cover the left side face 45 of the frame 50, the film 65 is heated and adhered to the left side face 45 of the frame 50 by a thermal adhesion

apparatus (not shown). Subsequently, another film 65 is placed on the frame 50 to cover the right side face 46 of the frame 50, and the film 65 is heated and adhered to the right side face 46 by the thermal adhesion apparatus.

[0075] Subsequently, the air communication valve 80 is attached to the frame 50 at the opening 81 of the frame 50. More specifically, the spring 86, the valve member 87, the stopper 83, and the cap 85 are attached to the frame at the opening 81 of the frame 50. Similarly, the ink supply valve 90 is attached to the frame 50 at the opening 91 of the frame 50. More specifically, the spring receiver 94, the spring 96, the valve member 97, the stopper 93, and cap 95 are attached to the frame 50 at the opening 91 of the frame 50. When the openings 81 and 91 are closed by the air communication valve 80 and the ink supply valve 90, respectively, the ink chamber 100 is sealed from the exterior of the ink chamber 100.

[0076] Subsequently, air in the ink chamber 100 is discharged through the opening 91. More specifically, a suction tube of a decompression device (not shown) is inserted into the opening 91, such that the suction tube applies a force to the ink supply valve 90 to open the opening 91. Then, the decompression device is activated to draw the air from the ink chamber 100. When the air in the ink chamber 100 is drawn by the decompression device, and the pressure inside the ink chamber 100 is lowered to a predetermined pressure, the decompression device is stopped, and the suction tube is removed from the opening 91. When the suction tube is removed from the opening 91, the opening 91 is closed by the ink supply valve 90. Therefore, the interior of the ink chamber 100 is maintained in a depressurized state.

[0077] After the interior of the ink chamber 100 is depressurized, an ink introduction needle is inserted into the ink chamber 100 through the resilient member fitted in the ink introduction chamber 105 to introduce ink into the ink chamber 100. Because the interior of the ink chamber 100 is depressurized, ink is readily introduced into the ink chamber 100 by the pressure differential between the interior and the exterior of the ink chamber 100. After a predetermined amount of ink has been introduced into the ink chamber 100, e.g., about 80% the capacity of the ink chamber 100, the ink introduction needle is removed from the resilient member. When the ink introduction needle is inserted through the resilient member and then removed, an opening formed through the resilient member by the ink introduction needle is closed by the resiliency of the resilient member. In this embodiment, after ink is introduced into the ink chamber 100, the pressure inside the ink chamber 100 may be about -60 kPa. The films 65 are caused to flex toward the ink chamber 100 by the pressure differential between the interior and the exterior of the ink chamber 100. Nevertheless, the supporting block 170 supports the films 65 from the interior of the ink chamber 100.

[0078] Subsequently, the housing 26 is attached to the frame 50. More specifically, the first cover member 21 is attached to the right side face 46 of the frame 50, and

the second cover member 22 is attached to the left side face 45 of the frame 50. Consequently, the first cover member 21 is positioned outside the film 65 which closes the right side face 46 of the frame 50, and the second cover member 22 is positioned outside the film 65 which closes the left side face 45 of the frame 50. The films 65 flex inwardly because the interior of the ink chamber 100 is depressurized, and therefore, in this embodiment, the films 65 are positioned at a distance of about 0.3 millimeters at maximum apart from the cover members 21 and 22, respectively. Subsequently, the slider 27 is coupled to the container body 20 via the coil springs 23 and 24.

[0079] Subsequently, the ink cartridge 10 is positioned in the package bag 121 through an opening of the package bag 121, and then a portion of the opening of the package bag 121 is closed by adhering the edge of the opening, such that a part of the opening is not closed. Then, the suction tube of the decompression device is inserted into the package bag 121 through the unclosed part of the opening, and the decompression device is activated to discharge air from the package bag 121. Then, in this embodiment, after the pressure in the package bag 121 is reduced to be about -70 kPa, the suction tube is removed, and the unclosed part of the opening is closed by adhering the edge of the unclosed part of the opening. The pressure outside the ink chamber 100 and inside the package bag 121 is about 10 kPa less than the pressure inside the ink chamber 100. In another embodiment, the pressure inside the package bag 121 and outside the ink chamber 100 may be at least 2 kPa less than the pressure inside the ink chamber 100.

[0080] When the ink cartridge 10 is packaged in the package bag 121 in this manner, the pressure differential between the interior and the exterior of the ink chamber 100 draws the film 65, which closes the right side face 46 of the frame 50, into tight contact with the inner wall surface of the first cover member 21. Consequently, the rib members 110 contact and apply a force to the film 65 to deform the film 65 plastically, such that the projections 60 which correspond to the shape of the rib members 110 are formed on the surface of the film 65. The film 65 remains in tight contact with the inner wall surface of the first cover member 21 at least until the package bag 121 is opened. The projections 60 are formed after the packaging arrangement 120 is manufactured and before a user opens the package bag 121 to use the ink cartridge 10. The projections 60 are also formed on the surface of the film 65 which closes the left side face 45 of the frame 50 in the same manner.

[0081] As described above, the rib members 110 comprise the first rib members 110A and the second rib members 110B. Therefore, referring to Fig. 10, the projections 60 on the film 65 comprise a plurality of first projections 60A which correspond to the first rib members 110A, and a plurality of second projections 60B which correspond to the second rib members 110B. Each of the first and the second projections 60A and 60B are raised from a flat surface of the film 65 to extend into the ink chamber

100. Each of the projections 60 has a base connected to the flat surface of the film 65, and a peak positioned away from the flat surface of the film 65. The height of the projections 60 from the base to the peak is substantially the same, and, in this embodiment, is between about 0.2 millimeters and about 0.3 millimeters. The first projections 60A intersect the second projections 60B. Each of the first projections 60A has a width and a length which is greater than the width, and a distance between a first end of the first projection 60A and a second end of the first projection 60A corresponds to the length of the first projection 60A. A line intersecting a peak of the first end of the first projection 60A and a peak of the second end of the first projection 60A is slanted with respect to the center line C of the opening 91. In another embodiment, the opening 91 is formed through the bottom face 44 of the frame 50, and a line intersecting a peak of the first end of the first projection 60A and a peak of the second end of the first projection 60A is non-perpendicular with respect to the center line C of the opening 91. Similarly, each of the second projection 60B has a width and a length which is greater than the width, and a distance between a first end of the second projection 60B and a second end of the second projection 60B corresponds to the length of the second projection 60B. A line intersecting a peak of the first end of the second projection 60B and a peak of the second end of the second projection 60B is slanted with respect to the center line C of the opening 91. In another embodiment, the opening 91 is formed through the bottom face 44 of the frame 50, and a line intersecting a peak of the first end of the second projection 60B and a peak of the second end of the second projection 60B is non-perpendicular with respect to the center line C of the opening 91. Each of the first projections 60A and the second projections 60B extends linearly from the first end of the first projection 60A to the second end of the first projection 60A, and from the first end of the second projection 60B to the second end of the second projection 60B, respectively. Each of the first projections 60A extends in a direction which is slanted or non-perpendicular with respect to the center line C of the opening 91, such that a left portion of the first projection 60A is positioned higher than a right portion of the first projection 60A in Fig. 10. In contrast, each of the second projections 60B extends in a direction which is slanted or non-perpendicular with respect to the center line C of the opening 91, such that a left portion of the second projection 60B is positioned lower than a right portion of the second projection 60B. When the container body 20 is positioned, such that the height of the ink cartridge 10 extends substantially parallel to the gravitational direction, the first projections 60A and the second projections 60B extend in directions intersecting a horizontal plane which is perpendicular to the gravitational direction. The first projections 60A and the second projections 60B form a reticulated pattern with rhombs which are longer in the height direction 32 of the ink cartridge 10. Each of the first projections 60A and the second projections 60B

extends from a first end of the ink chamber 100, e.g., an upper end of the ink chamber 100, to a second end of the ink chamber 100, e.g., a lower end of the ink chamber 100. A portion of the projections 60 is positioned adjacent to the first end of the ink chamber 100 and distal to the second end of the ink chamber 100, and another portion of the projections 60 is positioned adjacent to the second end of the ink chamber 100 and distal to the first end of the ink chamber 100. Moreover, yet another portion of the projections 60 is positioned substantially at a center of the ink chamber 100. The directions in which the first projections 60A and the second projections 60B extend are selected based on the wettability of the surface of the films 65 on the ink-chamber-100 side.

[0082] The container body 20 comprises the projections 60 formed on the films 65 and extending in a direction intersecting the horizontal plane when the container body 20 is positioned, such that the height of the ink cartridge 10 extends substantially parallel to the gravitational direction, e.g., when the ink cartridge 10 is mounted to an image recording apparatus. Therefore, ink droplets on the film 65 run downward in the ink chamber 100 along the projections 60, and are supplied to the image recording apparatus through the opening 91. Accordingly, ink is consumed efficiently.

[0083] The float portion 73 moves based on the amount of ink in the ink chamber 100. Because the ink in the ink chamber 100 runs downward along the projections 60, the float portion 73 readily moves based on the amount of ink in the ink chamber 100. Therefore, an ink amount determination is accurately performed.

[0084] Referring to Fig. 11, the inner wall surface of the first cover member 21 comprises a third pattern according to another embodiment of the present invention.

The third pattern comprises a first portion and a second portion which is raised with respect to the first portion. The first portion comprises a flat surface 112, and the second portion comprises a plurality of rib members 115 which extend from the flat surface 112. The rib members 115 extend in the height direction 32 of the first cover member 21. The rib members 115 are positioned side by side in a horizontal direction, which is parallel to the depth direction 33. When the ink cartridge 10 is packaged in the package bag 121 and the interior of the package bag 121 is depressurized as described above, the third pattern is transferred to the film 65 positioned on the right side face 46, such that a fourth pattern corresponding to the third pattern is formed on the film 65. The rib members 110 contact and apply a force to the film 65, such that the film 65 are plastically deformed, and projections (not shown) corresponding to the rib members 115 are formed on the film 65. The projections on the film 65 extend perpendicular to the horizontal plane from an upper end of the ink chamber 100 to a lower end of the ink chamber 100. Projections are also formed on the surface of the film 65 which closes the left side face 45 of the frame 50 in the same manner.

[0085] Referring to Fig. 12, the inner wall surface of

the first cover member 21 comprises a fifth pattern according to yet another embodiment of the present invention. The fifth pattern comprises a first portion and a second portion which is raised with respect to the first portion. The first portion comprises a flat surface 112, and the second portion comprises a plurality of rib members 116 which extend from the flat surface 112. The rib members 116 extend in the height direction 32 of the first cover member 21 at predetermined intervals in the height direction 32. A length of each of the rib members 116 is less than the height of the opening 57 in the height direction 32. The rib members 116 are positioned in row in the height direction 32. The rib members 116 are also positioned side by side in a horizontal direction, which is parallel to the depth direction 33. When the ink cartridge 10 is packaged in the package bag 121 and the interior of the package bag 121 is depressurized as described above, the fifth pattern is transferred to the film 65 positioned on the right side face 46, such that a sixth pattern corresponding to the fifth pattern is formed on the film 65. The rib members 116 contact and apply a force to the film 65, such that the film 65 are plastically deformed, and projections (not shown) corresponding to the rib members 116 are formed on the film 65. One of the projections is positioned adjacent to the upper end of the ink chamber 100 and distal to the lower end of the ink chamber 100, another one of the projections is positioned adjacent to the lower end of the ink chamber 100 and distal to the upper end of the ink chamber 100, and yet another one of the projections is positioned substantially at a center of the ink chamber 100. Projections are also formed on the surface of the film 65 which closes the left side face 45 of the frame 50 in the same manner.

[0086] Referring to Fig. 13, the inner wall surface of the first cover member 21 comprises a seventh pattern according to still another embodiment of the present invention. The seventh pattern comprises a first portion and a second portion which is raised with respect to the first portion. The first portion comprises a flat surface 112, and the second portion comprises a plurality of rib members 117 which extend from the flat surface 112. The rib members 117 extend from the upper end of the ink chamber 100 to a lower end of the ink chamber 100 in zigzag patterns. The rib members 117 are positioned side by side in a horizontal direction, which is parallel to the depth direction 33. When the ink cartridge 10 is packaged in the package bag 121 and the interior of the package bag 121 is depressurized as described above, the seventh pattern is transferred to the film 65 on the right side face 46, such that a eighth pattern corresponding to the seventh pattern is formed on the film 65. The rib members 117 contact and apply a force to the film 65, such that the film 65 are plastically deformed, and projections (not shown) corresponding to the rib members 116 are formed on the film 65. Projections are also formed on the surface of the film 65 which closes the left side face 45 of the frame 50 in the same manner.

[0087] In another embodiment, the inner wall surface

of the first cover member 21 or the second cover member 22 comprises a ninth pattern. The ninth pattern comprises a first portion and a second portion which is raised with respect to the first portion. The second portion comprises a flat surface 112, and the first portion comprise a plurality of grooves recessed in the direction away from the film 65. When the ink cartridge 10 is packaged in the package bag 121 and the interior of the package bag 121 is depressurized, the ninth pattern is transferred to the film 65, such that a tenth pattern corresponding to the ninth pattern is formed on the film 65. An inner surface of the grooves contact and apply a force to the film 65, such that the film 65 are plastically deformed, and projections (not shown) corresponding to the grooves are formed on the film 65. The projections extend away from the ink chamber 100.

[0088] In another embodiment, the projections 60 are formed on the film 65 before the film 65 is adhered to the frame 50. Nevertheless, it may be more difficult to adhere the film 65 to the frame 50 if the projections 60 are formed on the film 65 in advance because the film 65 may be at least partially deformed due to the projections 60.

[0089] In another embodiment, the pivotable member 70 may be omitted.

[0090] While the invention has been described in connection with embodiments of the invention, it will be understood by those skilled in the art that variations and modifications of the embodiments described above may be made without departing from the scope of the invention. Other embodiments will be apparent to those skilled in the art from a consideration of the specification or from a practice of the invention disclosed herein. It is intended that the specification and the described examples are consider exemplary only, with the true scope of the invention indicated by the following claims.

Claims

1. An ink cartridge (10) comprising:
 - a frame (50) having a first opening (57) on at least one side face (45, 46) thereof;
 - a film (65) closing the first opening (57);
 - an ink chamber (100) defined by the frame (50) and the film (65); and
 - a second opening (91) through which ink is supplied from an interior of the ink chamber (100) to an exterior of the ink chamber (100);
 wherein the film (65) comprises projections (60) formed on a surface of the film (65).
2. The ink cartridge of claim 1, wherein the projections (60) extends in a direction intersecting a horizontal direction in a state in which the film (65) is arranged substantially in a vertical direction.

3. The ink cartridge of claims 1 or 2, wherein the projections (60) are arranged substantially over an entire area of the film (65).
4. The ink cartridge of claims 2 or 3, wherein the projections (60) are arranged to align in the horizontal direction on the film (65).
5. The ink cartridge of any one of claims 1 to 4, wherein the projections (60) project toward the ink chamber (100).
6. The ink cartridge of claim 5, further comprising a cover member (21, 22) which covers the film (65) and comprises rib members (110, 115, 116, 117) protruding toward the film (65), wherein the projections (60) are formed by plastic deformation of the film (65) caused by the rib members (110, 115, 116, 117).
7. The ink cartridge of any one of claims 1 to 6, wherein the projecting (60) are formed so as to extend from a portion adjacent to an upper end of the first opening (57) to a portion adjacent to a lower end of the first opening (57).
8. The ink cartridge of any one of claims 1 to 7, further comprising a movable member (70) pivotably provided in the ink chamber (100).
9. The ink cartridge of any one of claims 1 to 8, wherein the film (65) is formed of a multilayer synthetic resin film (65) and a layer on the side of the ink chamber (100) is formed of the same material as the frame (50).
10. The ink cartridge of claim 1, wherein a center line (C) of the second opening (91) is perpendicular to a plane on which the second opening (91) is formed, the projections (60) comprise a first projection (60A) and a second projection (60B), and the first projection (60A) and the second projection (60B) are raised with respect to a flat surface of the film (65), wherein the first projection (60A) has a width and a length which is greater than the width of the first projection (60A), and a distance between a first end of the first projection (60A) and a second end of the first projection (60A) corresponds to the length of the first projection (60A), wherein the second projection (60B) has a width and a length which is greater than the width of the second projection (60B), and a distance between a first end of the second projection (60B) and a second end of the second projection (60B) corresponds to the length of the second projection (60B), and wherein a line intersecting a peak of the first end of the first projection (60A) and a peak of the second end of the first projection (60A) is slanted or non-perpendicular with respect to the center line (C) of the second opening (91), and a line intersecting a peak of the first end of the second projection (60B) and a peak of the second end of the second projection (60B) is slanted or non-perpendicular with respect to the center line (C) of the second opening (91).
11. The ink cartridge of claim 10, wherein the first projection (60A) and the second projection (60B) extend substantially from a first end of the ink chamber (100) to a second end of the ink chamber (100).
12. The ink cartridge of claims 10 or 11, wherein a portion of the projections (60) is positioned adjacent to a first end of the ink chamber (100) and distal to a second end of the ink chamber (100), and another portion of the projections (60) is positioned adjacent to the second end of the ink chamber (100) and distal to the first end of the ink chamber (100).
13. The ink cartridge of any one of claims 10-12, wherein a portion of the projections (60) is positioned adjacent to a first end of the ink chamber (100) and distal to a second end of the ink chamber (100), and another portion of the projections (60) is positioned substantially at a center of the ink chamber (100).
14. The ink cartridge of any one of claims 10-13, wherein the first projection (60A) and the second projection (60B) are raised to extend into the ink chamber (100).
15. The ink cartridge of claim 14, further comprising a cover member (21, 22) configured to cover the film (65), wherein the cover member (21, 22) comprises a plurality of rib members (110, 115, 116, 117) extending toward the film (65).
16. The ink cartridge of any one of claims 10-15, wherein a distance from a base of the first projection (60A) to a peak of the first projection (60A) is substantially the same as a distance from a base of the second projection (60B) to a peak of the second projection (60B).

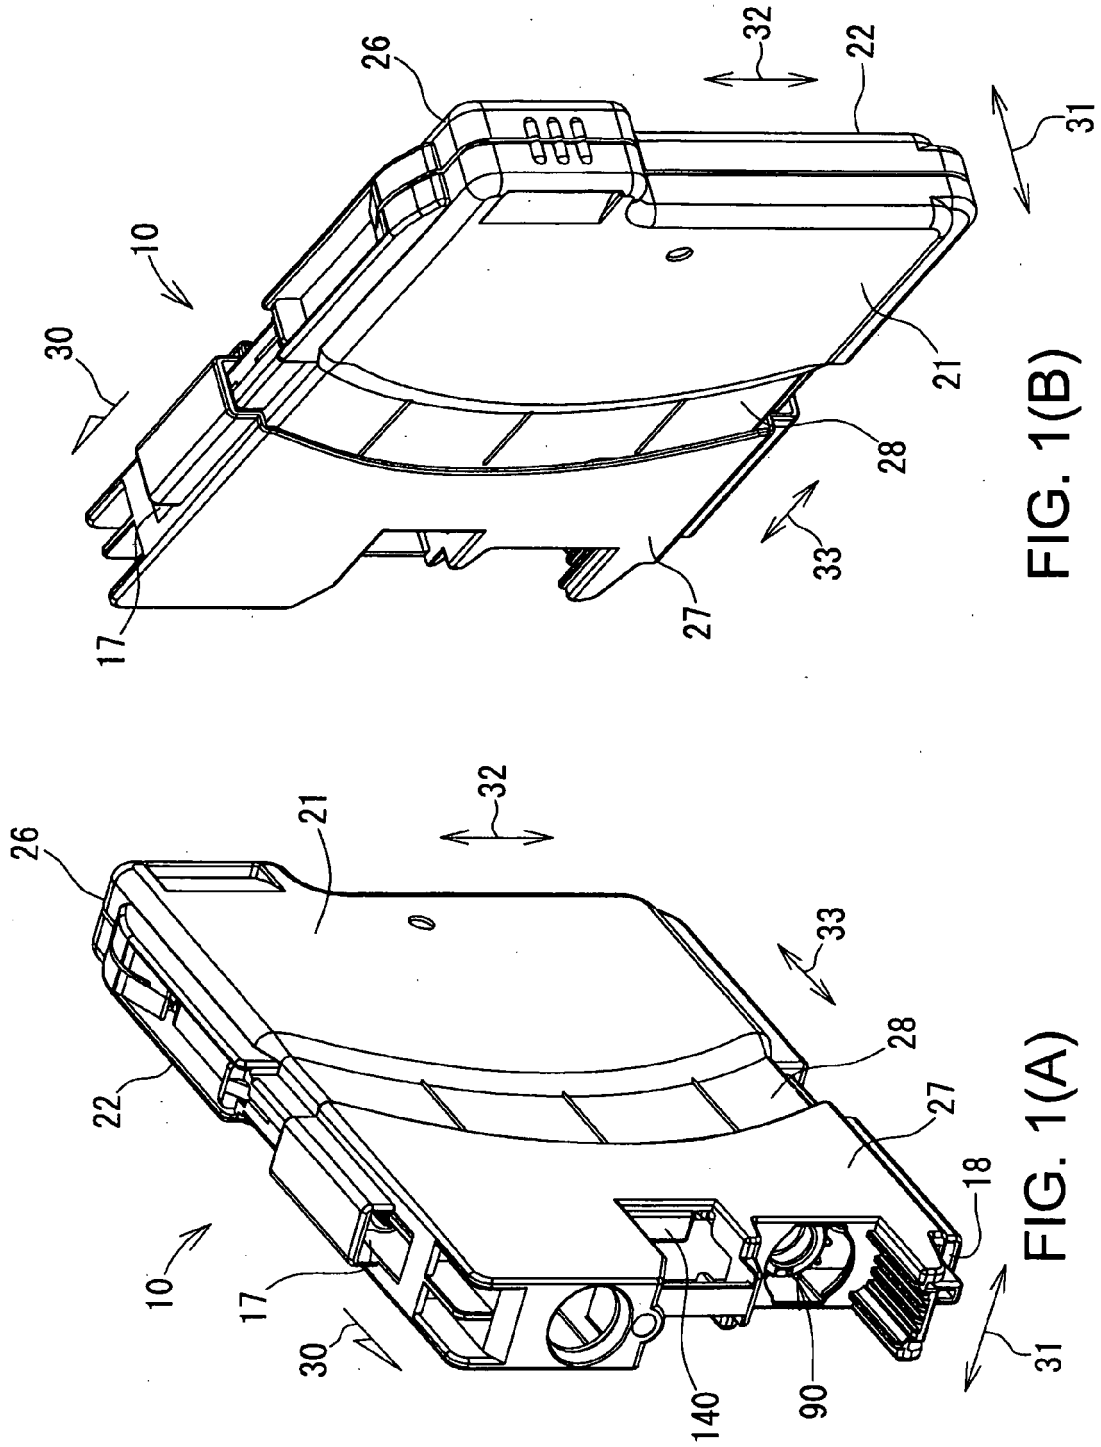


FIG. 1(B)

FIG. 1(A)

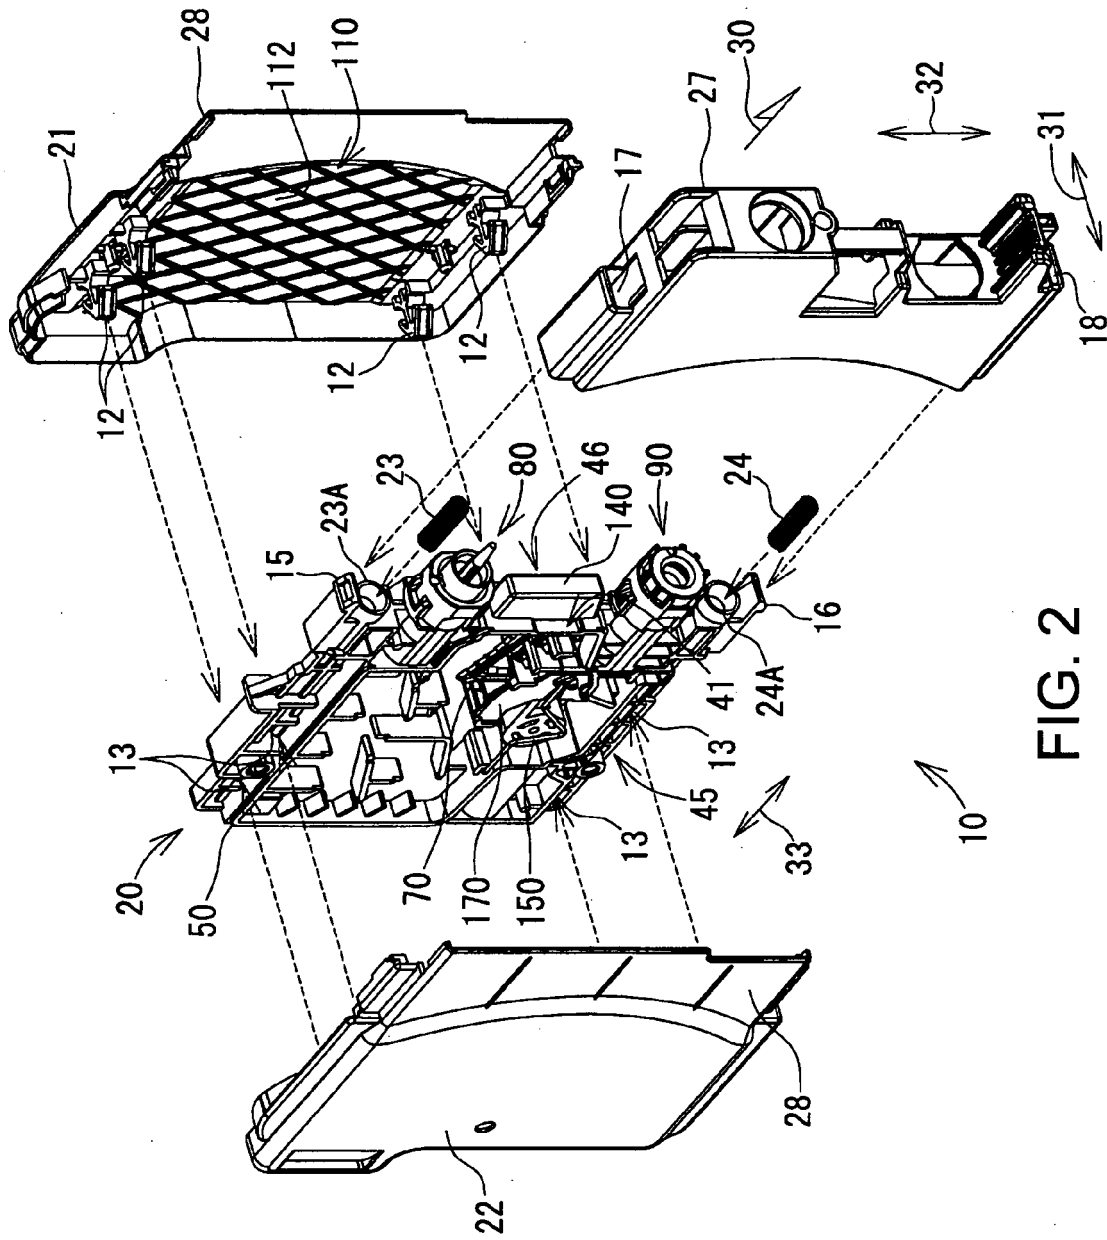


FIG. 2

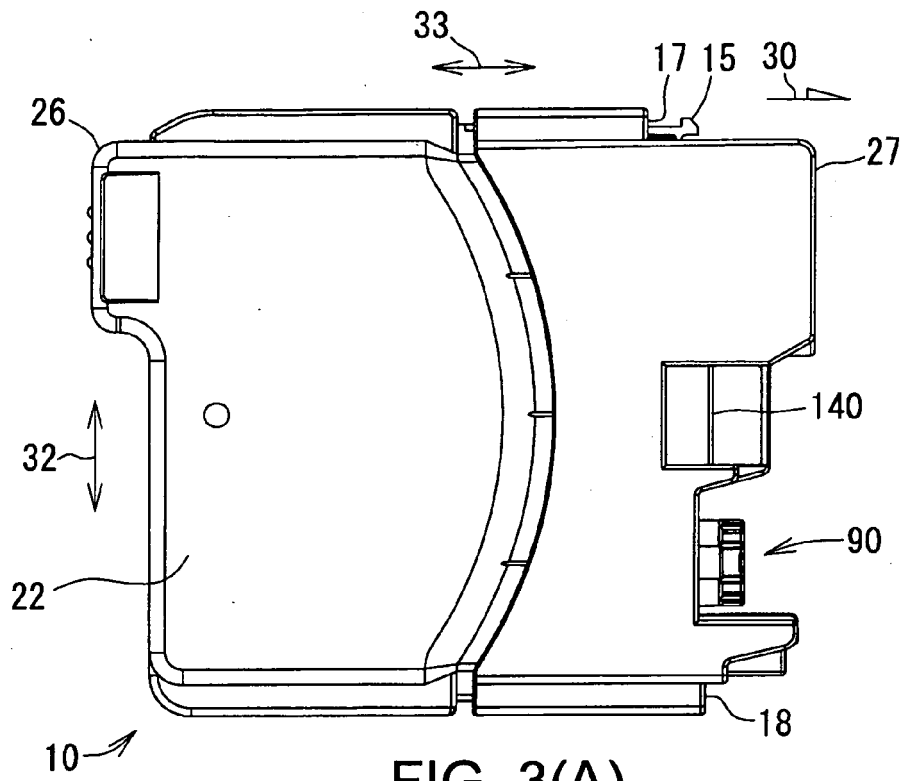


FIG. 3(A)

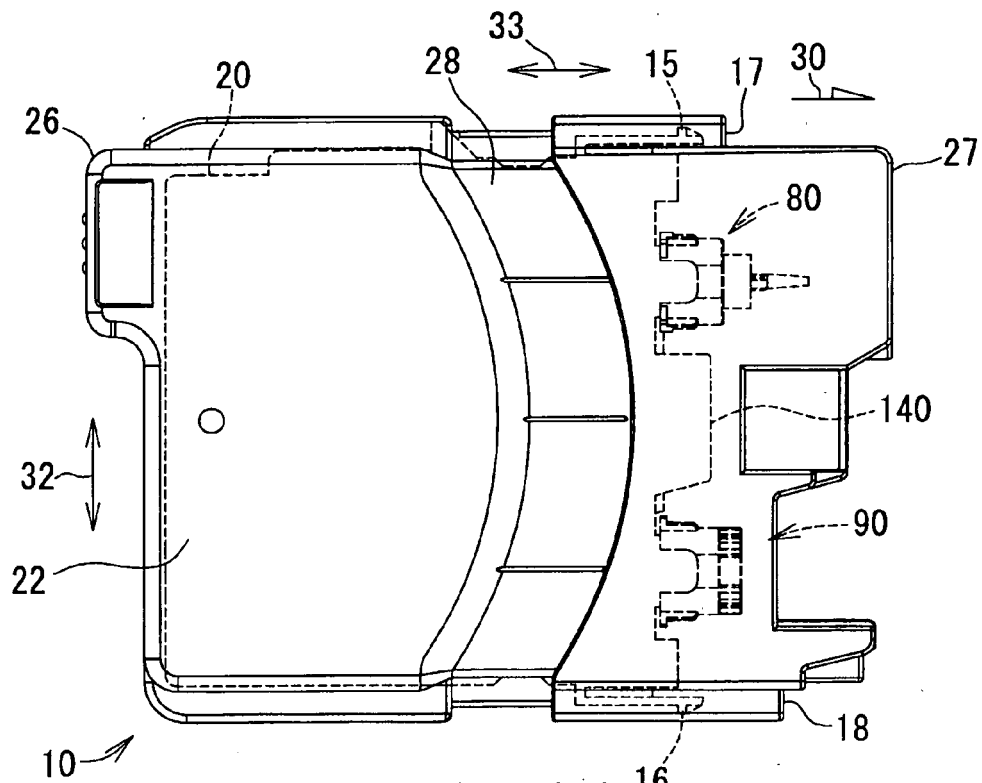


FIG. 3(B)

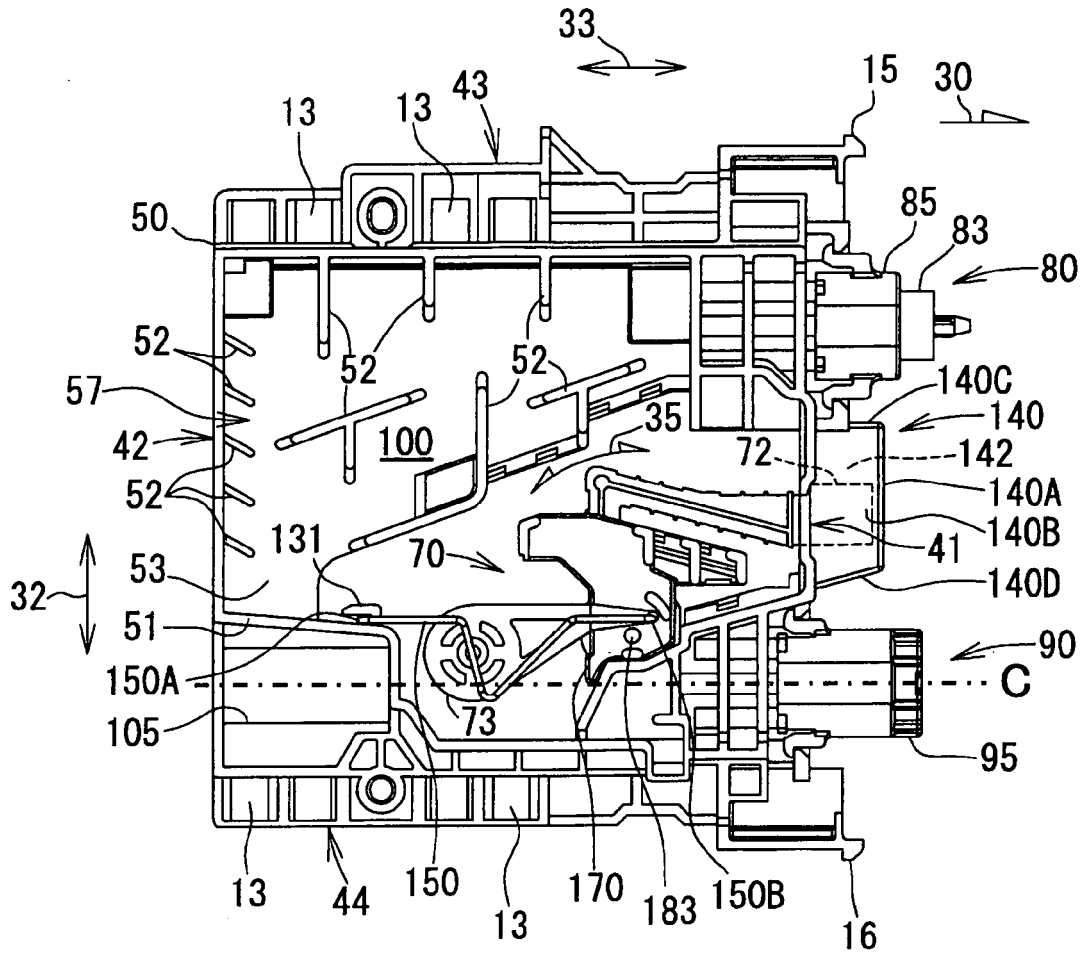


FIG. 5

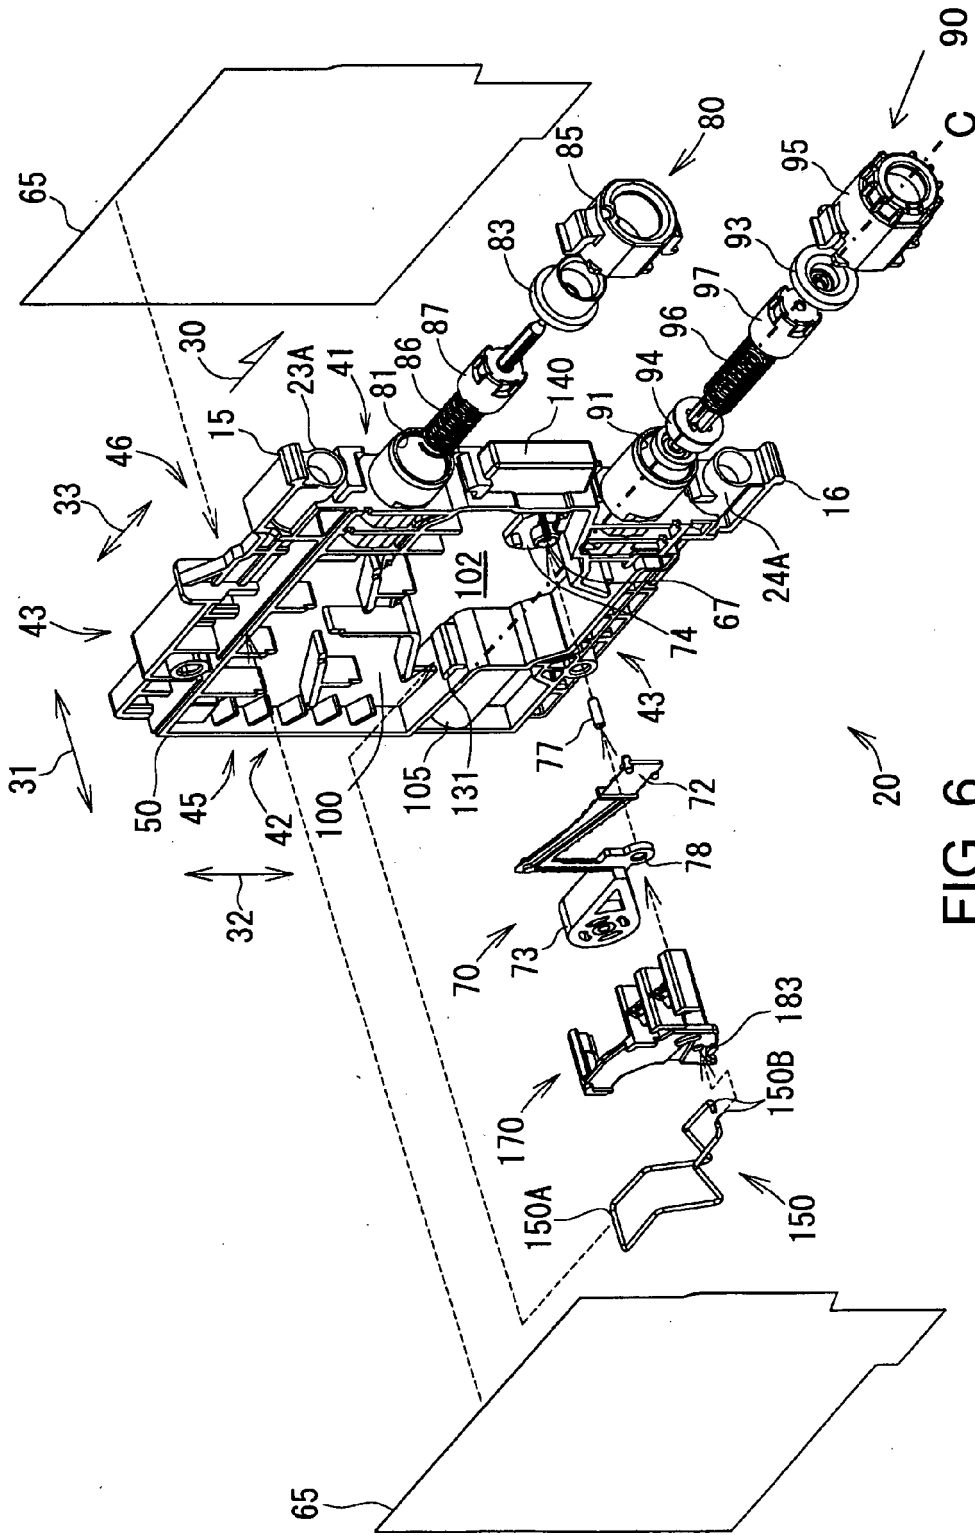


FIG. 6

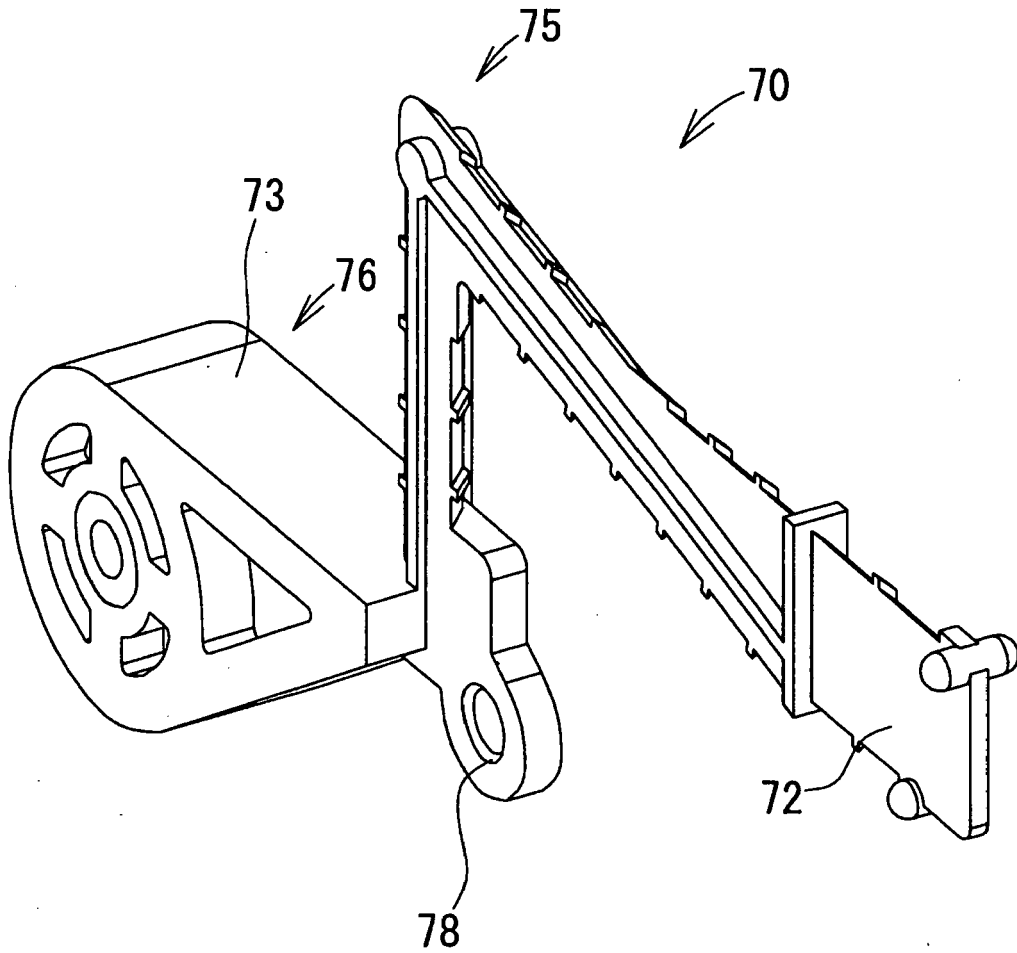


FIG. 7

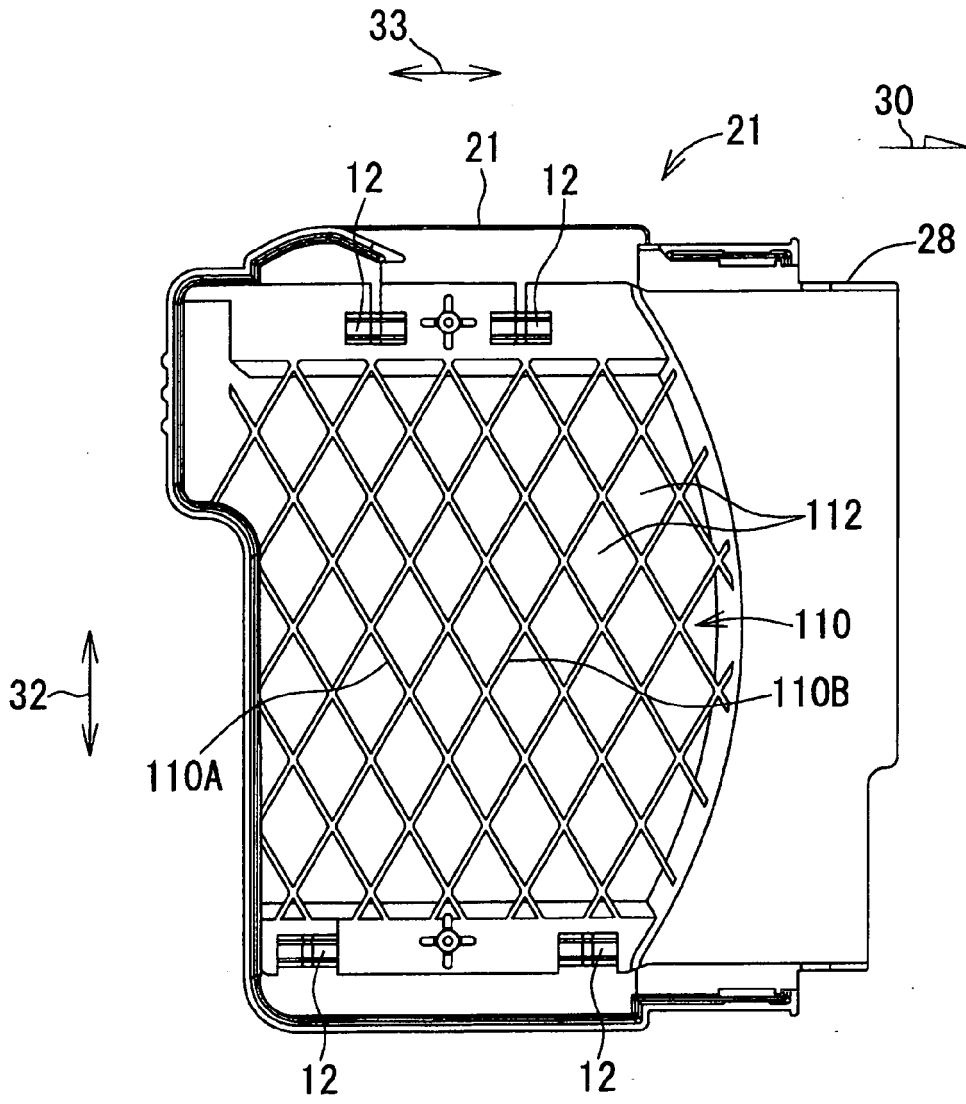


FIG. 8

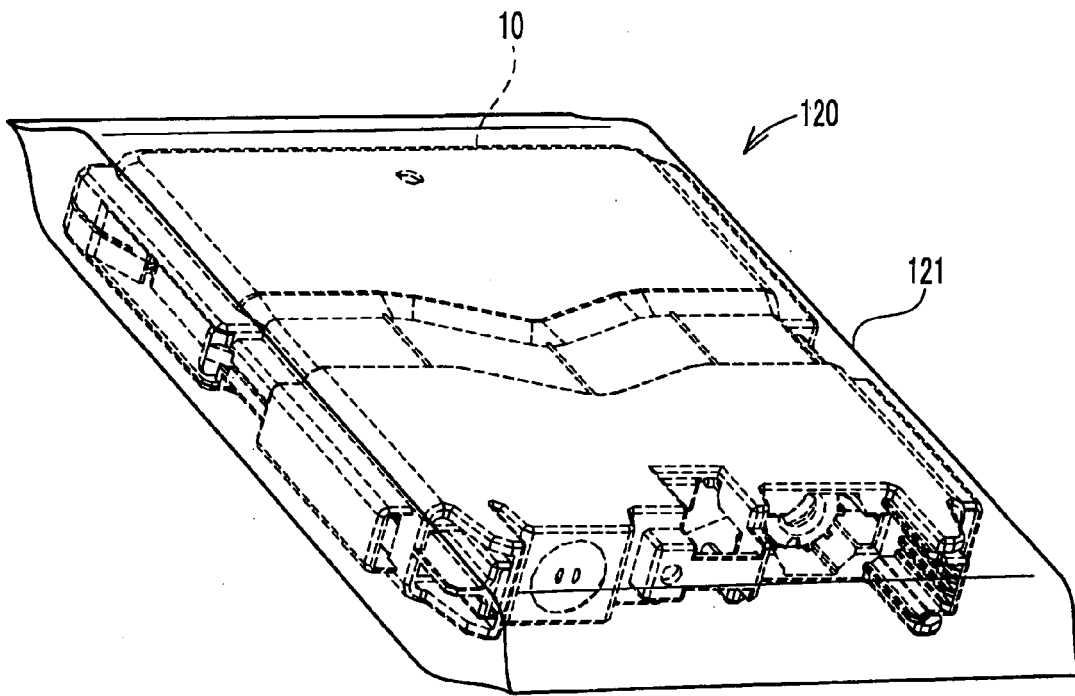


FIG. 9

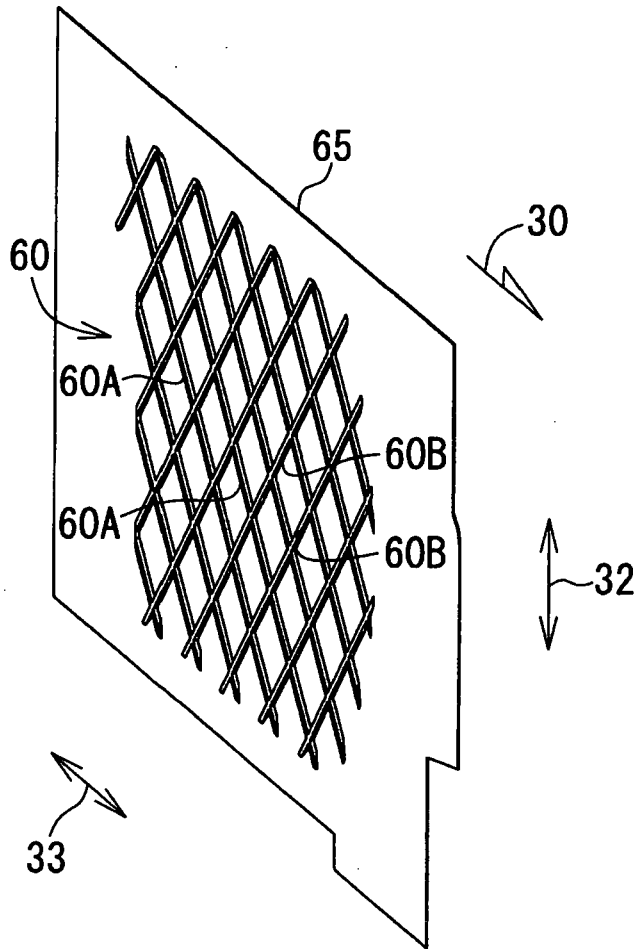


FIG. 10

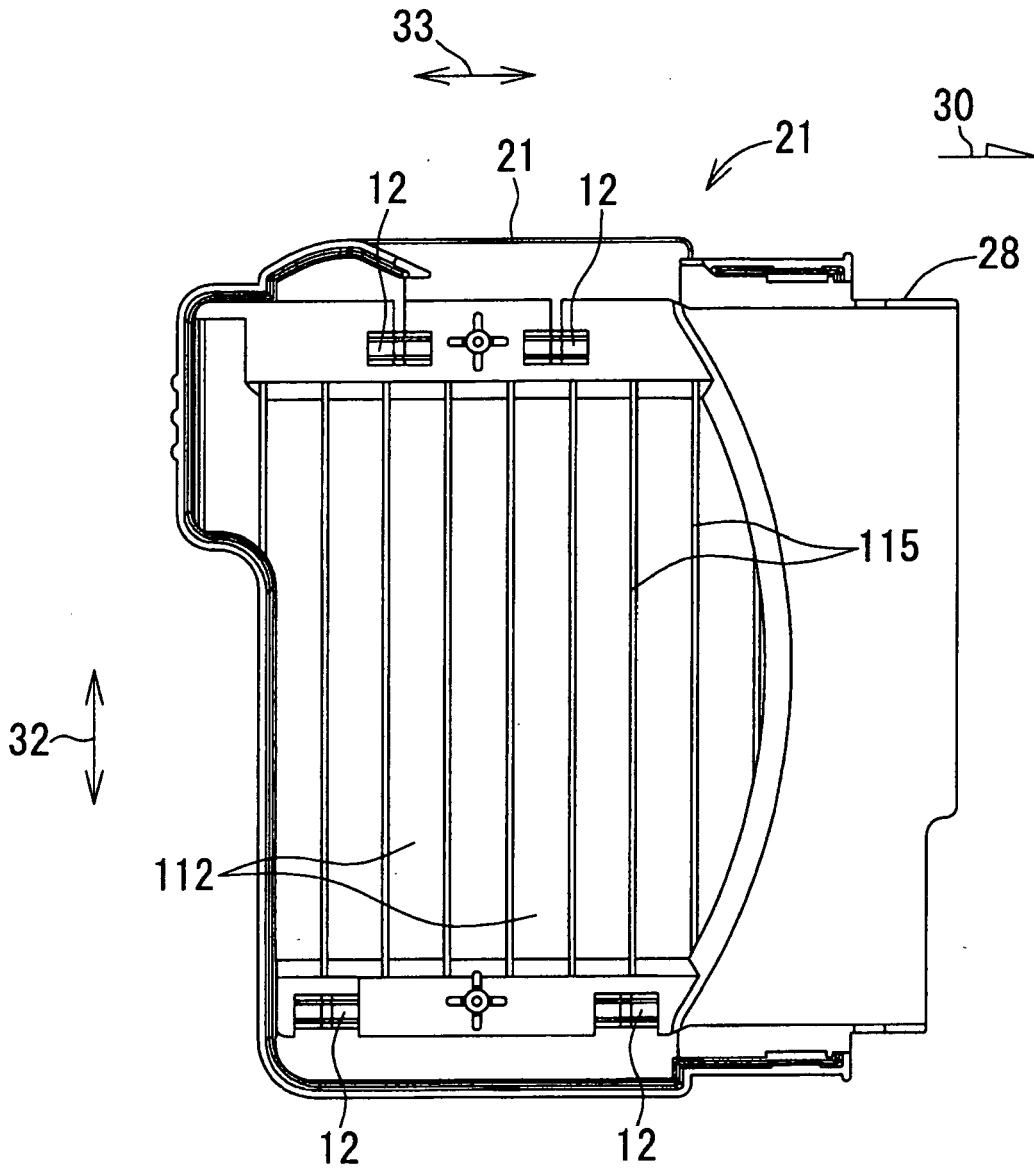


FIG. 11

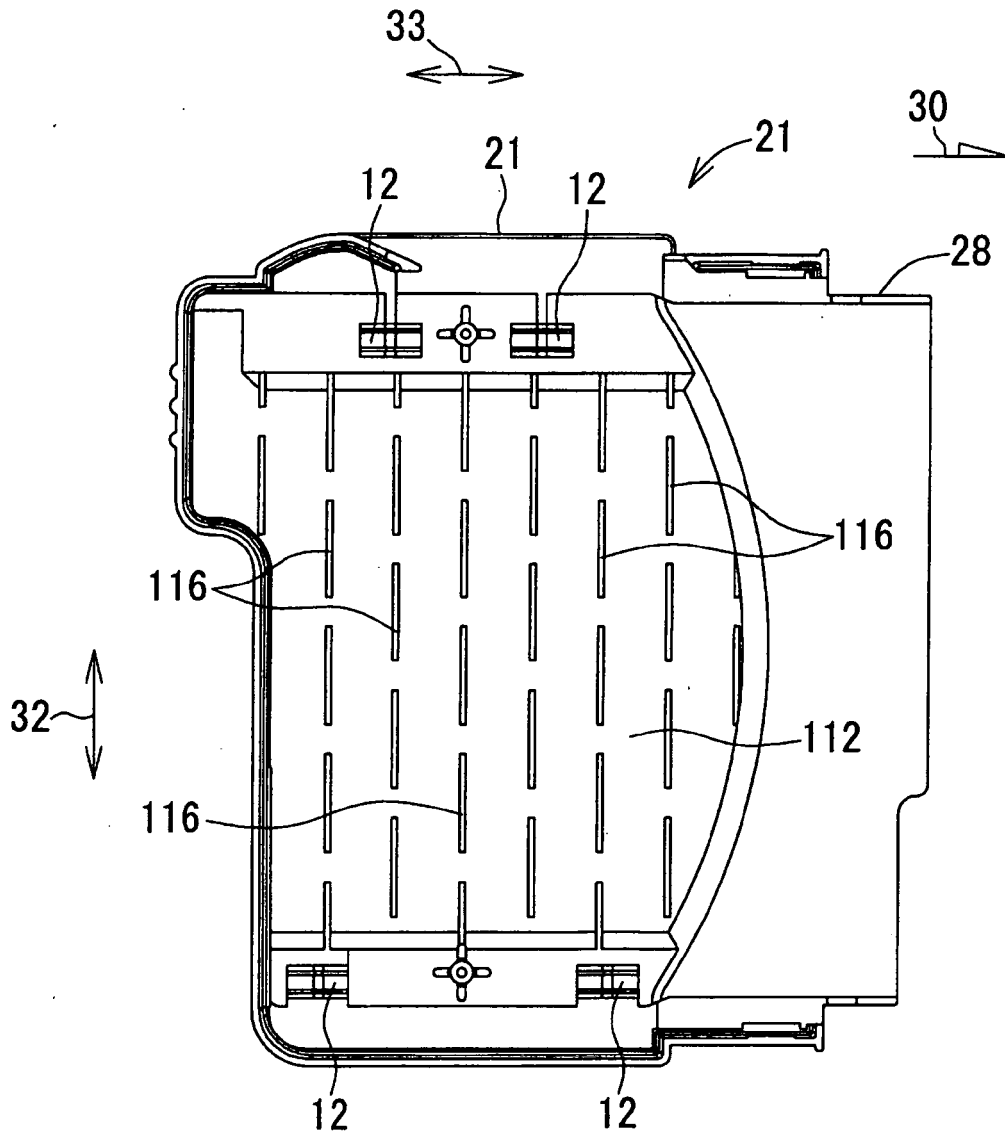


FIG. 12

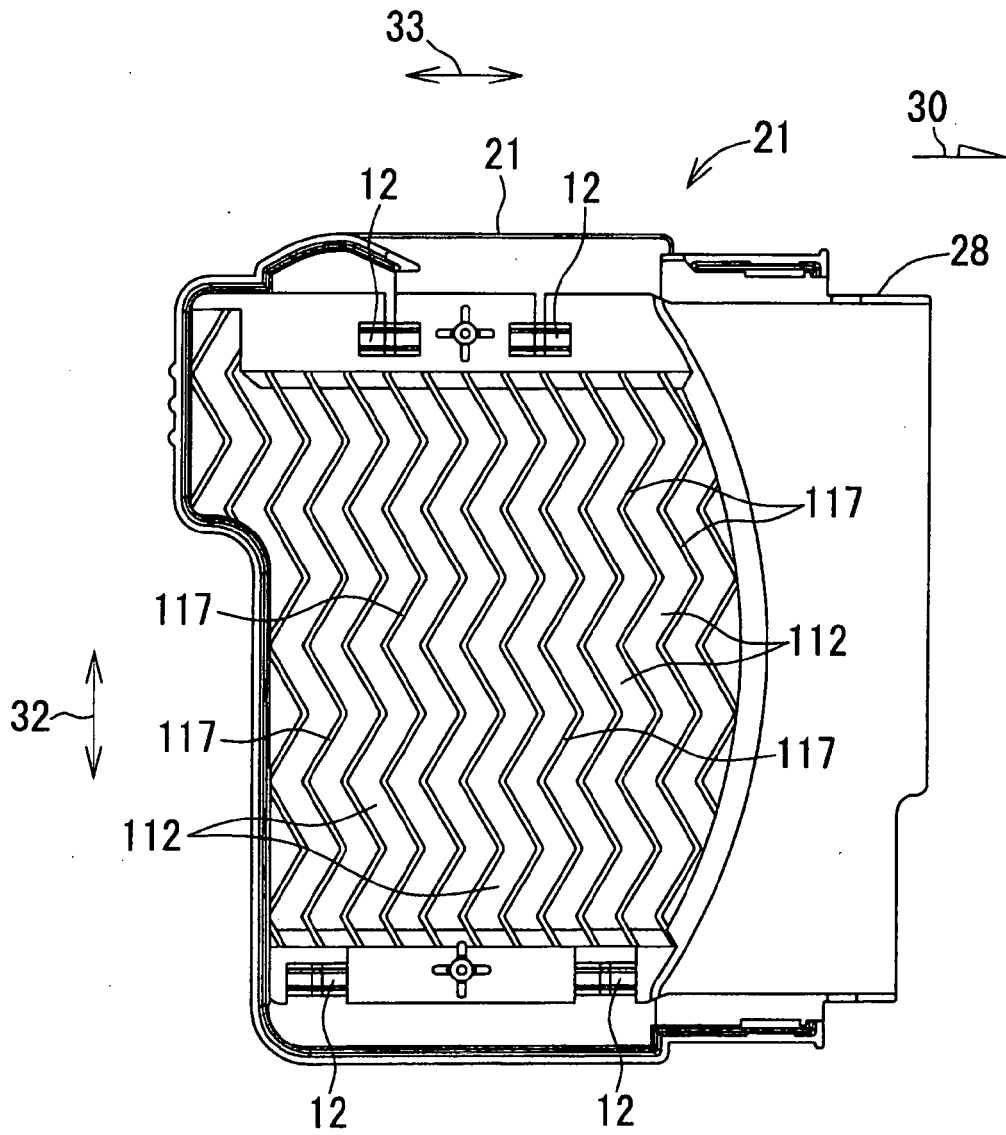


FIG. 13



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2005/057624 A1 (HANAOKA YUKIHIRO [JP]) 17 March 2005 (2005-03-17) * paragraph [0061] * * paragraph [0098] - paragraph [0099]; figure 10 * * paragraph [0104]; figure 14 * * paragraph [0109]; figures 15,16 * -----	1-5,7, 9-16	INV. B41J2/175
A	EP 1 693 213 A (SEIKO EPSON CORP [JP]) 23 August 2006 (2006-08-23) * abstract * * figure 3 * * paragraph [0251] - paragraph [0262]; figures 14,15 * * figures 28a-28c * * figures 30,31 * -----	1-7, 10-16	
A	EP 1 772 270 A (BROTHER IND LTD [JP]) 11 April 2007 (2007-04-11) * paragraph [0361]; figure 11 * * paragraph [0312]; figure 42 * -----	1,6,15	TECHNICAL FIELDS SEARCHED (IPC)
A	US 2003/184626 A1 (SASAKI TOYONORI [JP] ET AL) 2 October 2003 (2003-10-02) * paragraph [0103]; figures 12,14,21-27 * * paragraph [0162]; figure 25 * -----	1,6,15	B41J
A	EP 1 792 736 A (BROTHER IND LTD [JP]) 6 June 2007 (2007-06-06) * abstract * * paragraph [0124] - paragraph [0125]; figure 14 * -----	1	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 23 May 2008	Examiner Adam, Emmanuel
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

5

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 08 00 3697

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-05-2008

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005057624 A1	17-03-2005	US 2007296777 A1	27-12-2007
EP 1693213 A	23-08-2006	DE 20122653 U1	22-02-2007
EP 1772270 A	11-04-2007	WO 2007037536 A1	05-04-2007
		US 2007070146 A1	29-03-2007
US 2003184626 A1	02-10-2003	NONE	
EP 1792736 A	06-06-2007	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2007144808 A [0002]