

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 April 2007 (05.04.2007)

PCT

(10) International Publication Number
WO 2007/038063 A1

(51) International Patent Classification:

G06K 7/08 (2006.01) **H01Q 13/20** (2006.01)
H01Q 1/22 (2006.01) **H01P 7/08** (2006.01)

(21) International Application Number:

PCT/US2006/036392

(22) International Filing Date:

20 September 2006 (20.09.2006)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11/231,391 21 September 2005 (21.09.2005) US

(71) Applicant (for all designated States except US): **ZIH CORP.** [US/—]; Pearman Building, 3 Gorham Road, 3rd Floor, Hamilton, HM 08 (BM).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TSIRLINE, Boris, Y.** [US/US]; 4561 W. Westchester Lane, Libertyville, IL

60048 (US). **TORCHALSKI, Karl** [US/US]; 2504 N. Forrest Lane, Arlington Heights, IL 60004 (US). **GAWEL-CZYK, Robert** [US/US]; 1618 West 38th Place, Chicago, IL 60609 (US).


(74) Agents: **DRYSDALE, Glen, R.** et al.; Alstone & Bird LLP, Bank of America Plaza, 101 South Tryon Street, Suite 4000, Charlotte, NC 28280-4000 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: MULTI-LAYERED RFID COUPLER

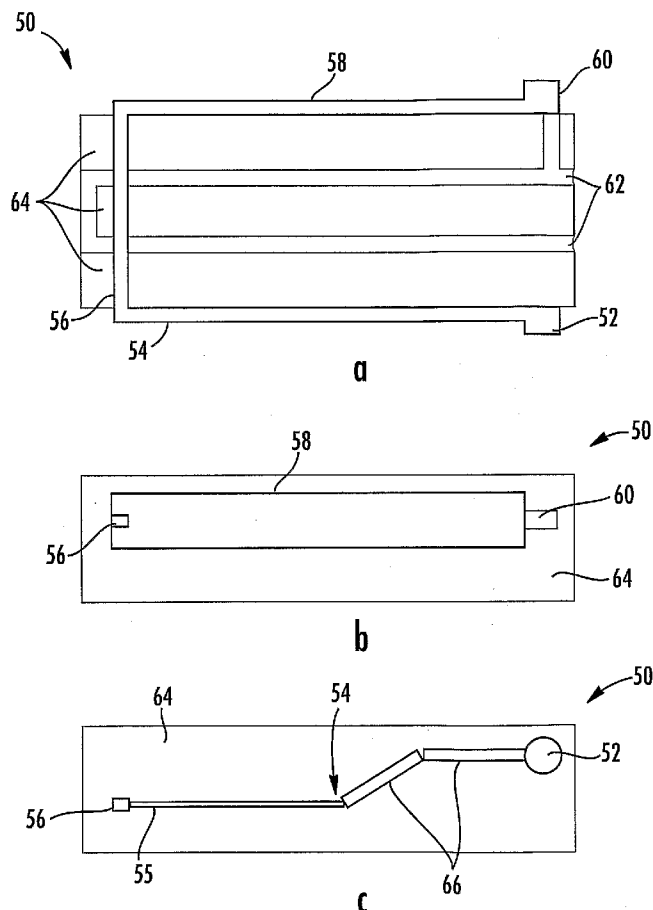

(57) Abstract: A RFID coupler capable of selectively communicating with a targeted transponder from among a group of multiple adjacent transponders. The coupler includes a grounded terminal load, a coupling element, a connecting element, an impedance matching element, and an input terminal. The coupling element is connected with the grounded terminal load and is configured to couple with the transponder by emanating an electromagnetic field. The input terminal is connected to a transceiver for receiving communication signals. The impedance matching element is connected to the input terminal and is configured to substantially match an input impedance of the coupler to a source impedance of the transceiver. The connecting element connects the impedance matching element to the coupling element. The coupling element and the impedance matching element are substantially parallel and separated by at least one dielectric layer and at least one ground plane.



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Declaration under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

MULTI-LAYERED RFID COUPLER

BACKGROUND OF THE INVENTION

1) Field of the Invention

The present invention relates to RFID couplers and, in particular, to spatially selective couplers capable of selectively communicating with a targeted transponder from among a group of multiple adjacent transponders.

2) Description of Related Art

Radio frequency identification technology ("RFID") allows wireless communication between an RF transceiver-reader or other similar device and one or more active or passive transponders. Active transponders are powered by a battery or other self contained power unit that is provided within the transponder and used as a DC source for conversion to RF energy. Alternatively, passive transponders draw energy from an electromagnetic field provided by an antenna or coupler of the RF transceiver. Various commands, data, or other information may be relayed between the RF transceiver and the transponders using a predefined "air interface" RF signaling protocol.

When multiple passive transponders are within range of RF transceiver's antenna they will each be energized and may simultaneously attempt to communicate with the transceiver, thus, potentially causing errors in "reading" or "writing" to one or more of the transponders. This is especially problematic in applications such as RFID printer-encoders.

In general, RFID printer-encoders are systems capable of printing and encoding RFID-enabled labels, tickets, tags, cards or other media "on demand." These printer-encoders have a transceiver for communicating with the transponders embedded within or attached to individual media units. In various applications, it is highly desirable to present the individual media units on rolls or other structures

in which the transponders are closely spaced. However, as referenced above, spacing passive transponders in relatively close proximity makes it more difficult to serially communicate with each transponder without simultaneously activating and communicating with neighboring transponders on other parts of the media roll.

5 To alleviate this problem, some techniques have focused on dispersing passive transponders embedded within or attached to carrier substrates such as labels, tickets, tags or other media supplied in bulk rolls, Z-folded stacks or other formats. For example, many applications provide passive transponders dispersed along media units or labels having sufficient length (or width) such that only one
10 passive transponder is disposed within a given electromagnetic field at any even given time. Predictably, however, such dispersed configurations result in excessive media or carrier material costs. Further, winding or folding such dispersed labels into Z-folded stacks requires an increased packaging volume within the printer-encoder or other system as compared to standard length media
15 rolls or stacks. Finally, widely dispersing passive transponders by providing longer labels or increased spacing between transponders may also slow overall printer-encoder throughput.

 Anti-collision management techniques exist that allow near simultaneous reading and writing to numerous closely grouped transponders in a common RF
20 electromagnetic field. However, such anti-collision management techniques often increase RFID system complexity, cost, and delay response. Furthermore, anti-collision management techniques are generally "blind" in that they do not recognize where a targeted passive transponder is physically located in the RF
 electromagnetic field. Systems incorporating such techniques would be less than
25 desirable for printer-encoder applications as they have difficulty determining, for example, which passive transponder is located proximate the printhead of a printer-encoder. Accordingly, common objectives such as correlating information that is printed and encoded to a given label would prove highly difficult under standard anti-collision management techniques.

30 One way to prevent passive transponder read/write errors without using anti-collision management techniques is to electromagnetically isolate a specific transponder of interest from nearby transponders. Previously, electromagnetic

isolation of physically adjacent transponders required passing transponders individually through RF-shielded housings or anechoic chambers for targeted exposure to an interrogating RF electromagnetic field. Unfortunately, use of such housings or chambers adds additional cost to the RFID system, tasks the often
5 limited space requirements within the RFID system, and generally requires significant physical separation of the passive transponders. Furthermore, such housings or chambers are typically configured for media units of a particular type or size and such housing or chambers are generally not replaceable. Thus, operators which to print and encode media units of different types or shapes are
10 often forced different printers/encoders.

Another known technique for selectively communicating with a specific transponder is controlling the strength or range of the electromagnetic field emanating from the transceiver's antenna. Typically, a transceiver is connected to a coupler or antenna. The transceiver generates the signal and the coupler is
15 configured to broadcast the signal as an electromagnetic field. According to this technique, the coupler is configured to emit the signal within a limited range and directed to a specific targeted area. In theory, limiting the signal reduces the chance that additional transponders outside the targeted area will be activated. An exemplary short-range coupler is a one-half wavelength microstrip coupler, as
20 generally described in U.S. Patent Application No. 10/981,967, hereby incorporated herein by reference. In general, the coupler **10** is based on a band pass filter (BPF) using $\frac{1}{2}$ microstrip transmission line terminated by a 50 ohm resistor. Typically, as shown in Figures 1a and 1b, such couplers **10** includes a rectangular conductive strip **12** disposed upon a printed circuit. One end of the
25 conductive strip **12** is connected to the transceiver and the other end is connected through a terminal load **16** to the ground plane layer **14**. The conductive strip **12** is generally of sufficient width to produce adequate electromagnetic field strength for coupling to a targeted passive transponder.

However, conventional microstrip couplers and other couplers configured
30 for short range communication are not without problems. For example, a coupler similar to that illustrated in Figures 1a and 1b may require a relatively high level of power to over an inherent low power efficiency and to ensure reliable activation

and communication between a coupler and a transponder separated by even relatively short distances. The low power efficiency typically is caused from an inherent mismatch between the transponder's antenna impedance and the coupler's wave impedance. Impedance mismatch often stems from differing design criteria
5 for the transponder and the coupler. For example, in many applications the transponder's antenna impedance may be set for maximum performance in far field electromagnetic transmissions (e.g., approximately 377 ohms) of the type expected during retail or industrial end use of the transponder. Alternatively, the coupler's wave impedance may be dictated by spatial selectivity requirements for near field
10 communications and further its RF port should match the standard impedance of the transceiver's RF port which is typically 50 ohms.

In non-printer-encoder applications impedance matching for a coupler based on a microstrip line has been addressed through the use of a conventional quarter wavelength transmission line 18, as shown in Figures 2a and 2b. However,
15 to be effective, such quarter wavelength transmission lines generally must be relatively long for UHF band and not desirable in space-restricted systems such as UHF RFID enabled printer-encoder systems.

BRIEF SUMMARY OF THE INVENTION

20 The present invention addresses the above needs by providing an RFID system for selectively communicating with a targeted transponder from among a group of multiple adjacent transponders. The system includes a transponder conveyance, a transceiver, and a near field coupler. The transponder conveyance is for transporting one or more targeted transponders from a group of multiple
25 adjacent transponders through a transponder operating region. The transceiver defines a source impedance and is configured to generate communication signals. The near field coupler defines an input impedance and is structured to be in electrical communication with the transceiver for receiving the communication signals.

30 The coupler includes a grounded terminal load, a coupling element, and an impedance matching element. The coupling element is in electrical communication with the grounded terminal load and configured to transmit a near

field electromagnetic field having a wave impedance into the transponder operating region. The wave impedance is substantially equal to the impedance of the antenna of the transponder. The impedance matching element is in electrical communication with the coupling element and configured to substantially match the input impedance to the source impedance. The coupling element and the impedance matching element are structured in a substantially parallel stacked arrangement and separated by at least one dielectric layer and at least one ground plane. The coupling element and the impedance element may be substantially aligned so as to minimize the overall length of the coupler.

The impedance matching element may be one or more quarter wavelength microstrip sections. In case of multiple microstrip sections, the sections may be substantially coplanar and non-linear.

The input impedance may be approximately 50 ohms while the terminal load is greater than 50 ohms.

The RFID system may further include a printhead for printing indicia onto the one or more targeted transponders. For example, the printhead may be configured to engage the targeted transponder or transponders in the transponder operating region.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING(S)

Having thus described the invention in general terms, reference will now be made to the accompanying drawings, which are not necessarily drawn to scale, and wherein:

Figure 1a is a top view of a prior art microstrip forward wave coupler;

Figure 1b is a bottom view of the microstrip shown in Figure 1a;

Figure 2a is a top view of a prior art microstrip forward wave coupler having a quarter wave impedance transformer;

Figure 2b is a bottom view of the microstrip shown in Figure 2a;

Figure 3 is a side schematic view of a printer-encoder according to an embodiment of the present invention;

Figure 4 is a partial top view of the media web over the coupler in Figure 3 taken along line 4-4;

Figure 5a is a cross-sectional view of a near-field UHF coupler according to another embodiment of the present invention;

Figure 5b is a top view of the near-field UHF coupler shown in Figure 5a;

Figure 5c is a bottom view of the near-field UHF coupler shown in Figure 5a; and

Figure 6 is a graph illustrating wave impedance as a function of distance from the electric and magnetic field sources, i.e. the coupler.

DETAILED DESCRIPTION OF THE INVENTION

The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all embodiments of the invention are shown. Indeed, this invention may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will satisfy applicable legal requirements. Like numbers refer to like elements throughout.

The present invention concerns an apparatus and method that enables an RFID transceiver (sometimes referred to as an "interrogator") to selectively communicate with a targeted transponder that is commingled among or positioned in proximity to multiple adjacent transponders. As will be apparent to one of ordinary skill in the art, various embodiments of the present invention are described below that do not require physical isolation of a given transponder through use of cumbersome shielded housings, anechoic chambers, or complex anti-collision management techniques.

Several embodiments of the present invention may be useful for reading, writing, or otherwise encoding passive transponders that are located on assembly lines, in inventory management centers where on-demand RFID labeling may be needed, or in other similar applications. In various embodiments, one or more transponders are mounted to or embedded within a label, ticket, tag, card or other media form that may be carried on a liner or carrier. In alternate linerless embodiments, a liner or carrier may not be needed. In either case, such RFID enabled labels, tickets, tags, and other media forms are referred to collectively as

“media units” 24. It is often desirable to print to a media unit 24 before, after, or during communication with its corresponding transponder 26.

As shown in Figures 3-5, the present invention is directed to an RFID communication system comprising a near field coupler 50 that is capable of selectively communicating with a targeted transponder 26 positioned among a group of multiple adjacent transponders. In general, the coupler 50 defines an input impedance and includes a terminal load 60, a coupling element 58, a connecting element 56, an impedance matching element 54, and an input terminal 52. The terminal load 60 is grounded. The coupling element 58 is electrically connected with the grounded terminal load 60 and is configured to couple or communicate with the transponder 26 by emanating an electromagnetic field having a wave impedance. The input terminal 52 is electrically connected to a transceiver 42 for receiving communication signals from the transceiver 42. The impedance matching element 54 is electrically connected to the input terminal 52 and is configured to substantially match the input impedance of the coupler to a source impedance defined by the transceiver. The connecting element 56 electrically connects the impedance matching element 54 to the coupling element 58. The coupling element 58 and the impedance matching element 54 are structured in a substantially parallel stacked arrangement and separated by at least one dielectric layer 64 and at least one ground plane 62. For example, as illustrated in Figure 5, the coupling element 58 and the impedance matching element 54 may be separated by three dielectric layers 64 and two ground planes 62.

The present invention has been depicted, for illustration purposes, in the context of a specific application, namely, RFID enabled printer systems, also referred to herein as “printer-encoders” (e.g., thermal transfer printers, direct thermal printers, inkjet, dot matrix, electro-photographic printers, etc.). Examples of RFID enabled printer systems are disclosed in U.S. Patent Nos. 6,481,907 and 6,848,616, both of which are hereby incorporated herein by reference. However, in various other embodiments, the inventive concepts of the present invention may be applied to other RFID enabled systems in which it may be desirable to

selectively communicate with a single passive transponder that is disposed among multiple adjacent passive transponders.

Figure 3 illustrates an RFID printer-encoder **20** structured for printing and programming a series or stream of media units **24** according to one embodiment of the present invention. In the depicted embodiments, at least a few of the media units **24** include transponders **26**. The printer-encoder **20** includes a printhead sub-assembly comprising a conventional printhead **28** and a platen roller **29**. The depicted RFID enabled system is a thermal transfer printer, however, in alternate embodiments, as referenced above, the inventive concepts disclosed herein may be applied to other types of printers or non-printer systems. Also, although the typical printer-encoder operates within the UHF frequency band, the inventive concepts discloses herein may be applied to other systems operating in frequency bands other than UHF.

As best seen in Figures 3 and 4, the individual media units **24** are connected by a carrier substrate that combines with the media units **24** to form a web **22**. The web **22** is directed along a feed path **30** under the printhead **28** for “on-demand” printing of indicia such as text, bar codes, or graphics. Such on-demand printing operations are generally controlled by a computer or microprocessor (not shown).

After printing, the media units **24** disposed on the web **22** proceed to a media exit path **34** where they are typically individually removed from the web **22**. For example, pre-cut media units **24** may be simply peeled from an underlying carrier substrate of the web **22** at a peeler bar **32** as shown. In other embodiments, non-cut media units **24** may be peeled and transmitted downstream to an in-line cutter (not shown). Various other known media unit removal techniques may be used as will be apparent to one of ordinary skill in the art. In applications, such as the depicted embodiment, in which the media units **24** are supported by a carrier substrate the carrier substrate may be guided out of the printer-encoder **20** along a carrier exit path **38** by a roller **36** as shown. As is further apparent, the depicted printer-encoder **20** also includes a ribbon supply roll **41** and a take-up spool **40** for delivering a thermal transfer ribbon (not shown for clarity) between the printhead **28** and the media units **24** on web **22**.

In accordance with an aspect of the present invention, the RFID printer-encoder **20** includes a transceiver **42** for generating RF communication signals that are fed to a spatially selective microstrip near field coupler **50** located proximate the media feed path **30**. For purposes of the present specification and appended
5 claims the transceiver **42** and the near field coupler **50** will be referred to as collectively forming at least a part of a communication system. As will be explained in more detail below, the communication system forms an electromagnetic field in proximity to a transponder operating region. The communication system is configured to establish, at predetermined transceiver
10 power levels, a mutual coupling between the transceiver **42** and a selected transponder **26** of a media unit **24** that is located in the transponder operating region.

As the media units **24** and their transponders **26** move along the media feed path **30** through the transponder operating region, data may be read from and or
15 written to each transponder **26**. Indicia such as text, bar-codes, graphics, and the like then may be printed to an external surface of the media units **24** as the media units **24** pass between the platen roller **29** and the printhead **28**. Various techniques for printing indicia to the media units and devices for transmitting or conveying a web **22** comprising media units through a printer-encoder are known
20 in the art and, thus, such techniques and conveyance devices are not described in detail.

A near field coupler **50**, according to one embodiment of the present invention, will now be described with reference to Figures 5a through 5c. The depicted near field coupler **50** includes an input terminal **52**, an impedance
25 matching element **54**, a connecting element **56**, a coupling element **58**, a terminal load **60**, one or more ground planes **62**, and more than one dielectric layers **64**. In the depicted embodiment, the elements **54**, **56**, **58**, **60**, **62** of the coupler **50** are arranged electrically in series. The input terminal **52** connects the transceiver **42** directly (or indirectly through a transmission line) to the coupler **50**. For example,
30 the input terminal **52** may be a "RF port" as known in the art. In particular, the transceiver **42** is configured to send a source electrical signal to the coupler **50** through the input terminal **52**. The signal passes through the input terminal **52**, the

impedance matching element **54**, the connecting element **56**, the coupling element **58**, and into the terminal load **60**, which is connected to a ground layer **62**.

As the electrical signal passes through the coupler **50**, it generates a near field electromagnetic field that may be adapted to couple the coupler **50** to a transponder **26** disposed proximate the transponder operating region. A more detailed description of one exemplary near field electromagnetic field is provided in "Leaky Fields on Microstrip" L.O. McMillian et al. Progress in Electromagnetics Research, PIER 17, 323-337, 1997; U.S. Patent Application No. 10/604,996; and U.S. Patent Application No. 10/707,895; each of which is hereby incorporated by reference in the entirety. Because the near field electromagnetic field is relatively local to the coupler **50** and degrades, at an exponential rate, with increasing distance from the coupler **50**, the resulting range of the coupler **50** is generally limited. This limited range reduces the likelihood that a given transceiver's signal will activate transponders **26** outside the transponder operating region.

In one aspect of the present invention, the coupler **50** is structured such that the wave impedance of the electromagnetic field transmitted from the coupler substantially matches the impedance of the antenna of the transponder **26**. It is believed that due to the proximity of the coupler to the transponder (i.e. the transponder is within the near field range of the signal) the wave impedance of the field is a function of the structure of the coupler, including the terminal load, as illustrated in Figure 6. Notably, as will be apparent to one of ordinary skill in the art, the impedance of the transponder's antenna may vary depending on the intended end-use (e.g. retail, commercial, inventory management, etc.) of the transponder **26**. Relatively common antenna impedance levels for transponders range between 250 – 500 ohms.

As referenced above, it is desirable for the wave impedance to substantially match the impedance of the antenna of the transponder **26** and thereby reduce the power loss attendant to any communication between the coupler **50** and the transponder **26**. However, structuring the coupler such that it produces a wave impedance that substantially matches the impedance of the transponder's antenna, e.g., by increasing the terminal load, may, in turn, create an impedance mismatch

between the transceiver and the coupler. Specifically, the transceiver **42** and its related circuitry define a source impedance. The source impedance is often on the order of 50 ohms but may vary between applications. The coupler defines an input impedance which is generally the voltage/current ratio across the input terminal of the coupler. It is believed that, in a conventional microstrip coupler based on half-wavelength microstrip line (or multiple thereof), the input impedance is substantially equal to the terminal load at operational frequency. As referenced above, an impedance mismatch between any two components of a circuit, here, the transceiver and the coupler generally creates an undesirable power loss between the two.

In the depicted embodiment, the impedance matching element **54** is provided to substantially match the impedances between transceiver and the coupler. More specifically, the impedance matching element substantially matches the input impedance to the source impedance. The depicted impedance matching element **54** includes an odd number of quarter wavelength conductive strips or microstrip sections each having a matching impedance level (Z_m). As shown below, the value of such matching impedance levels is approximately equal to the square root of the product of the source impedance (Z_0) and the terminal load impedance (Z_l).

$$Z_m \approx \sqrt{(Z_0 Z_l)}$$

Once quantitatively determined, the matching impedance level (Z_m) of the microstrip sections can be set by appropriately defining the width of the conductive strip sections **55**. Although not wishing to be bound by theory, it is a basic principle that the narrower the conductive strip sections **55** the higher the characteristic impedance.

As referenced above, in the illustrated embodiment, the coupling element **58** is disposed between the impedance matching element **54** and the terminal load **60**. The coupling element **58** may be comprised of a conductive surface having a relatively large surface area. In various embodiments, the coupling element **58** may be positioned near the transponder operating region for converting electrical

signals supplied by the transceiver into an electromagnetic field having a wave impedance that is transmitted into the transponder operating region.

The depicted coupling element **58** is comprised of a rectangular shape microstrip. However, in alternate embodiments, the shape or type of the coupling element **58** may vary to include those antenna structures commonly known in the art. In several embodiments, the electromagnetic field generated by the coupling element originates from the edges of the coupling element. Furthermore, although not wishing to be bound by theory, it is believed that the strength of the electric fields emanating from the edges of the coupler element is proportionate to the width of the coupling element. However, it is also believed an increase in width of the coupling element decreases the bandwidth of the coupler.

In yet another embodiment, the coupling element **58** and the matching element **54** may be constructed from the same material in substantially the same manner. For example, the matching element **54** and coupling element **58** may represent different regions of a copper conductive strip or microstrip with differing widths (and thus differing impedances).

Another aspect of the present invention concerns the spatial relationship between the impedance matching element **54** and the coupling element **58**. It is generally preferable, especially in space-limited applications such as printer-encoder systems, for the impedance matching element **54** and the coupling element **58** to be configured in a manner that reduces the overall length of the coupler **50**. Figures 5a-5c depict a coupler **50** according to one embodiment of the present invention wherein the structures of the impedance matching element **54** and the coupling element **58** are packaged in a relatively compact design. More specifically, the impedance matching element **54** and the coupling element **58** are disposed in a substantially parallel arrangement and separated by a number of dielectric layers **64** and ground planes **62** as shown. This structure essentially folds the overall length of the coupler **50** in half allowing for easier placement and packaging within the printer-encoder **20** or other interrogation device.

In the depicted embodiment, the impedance matching element **54** and coupling element **58** are substantially aligned, i.e., their ends are substantially aligned relative to one another, so as to minimize the overall length of the coupler

50. However, in alternate embodiments, the impedance matching element 54 and the coupling element 58 may be staggered relative to one another thereby forming a coupler 50 having a "stepped" shape. In various embodiments, the overall shape and size of the coupler may be to some degree determined by the space restrictions of the RFID enabled system. For example, here, the shape and size of the coupler 50 is determined in large part to the space restrictions of the printer-encoder 20.

As best seen in Figure 5a, the impedance matching element 54 and the coupling elements 58 are connected in series by a connecting element 56 extending substantially perpendicular to the impedance matching element 54 and the coupling element 58. In one embodiment, the connecting element 56 is a simple via filled with a conductive material as known in the art. Figure 5a also depicts a stacked structure comprised of alternating dielectric layers 64 and ground planes 62. In one embodiment, the dielectric layers 64 are made from a woven glass reinforced epoxy laminate dubbed "FR-4" or flame resistant 4. However, one in the art would appreciate that other dielectric materials may be used within this invention, including materials having a higher dielectric constant (or permittivity) than FR-4. A higher dielectric constant value may allow for a further decrease in the dimensions of the coupler 50, including the thicknesses of the dielectric layers 64. Examples of other dielectric materials include, but are not limited to, porcelain (ceramic), mica, glass, plastics, and the oxides of various metals, such as aluminum oxide.

As shown in Figure 5c, the impedance matching element 54 may also include a microstrip extension 66. The microstrip extension 66 may include one or more sections. Each section having a characteristic impedance substantially equal to the source impedance (typically 50 ohms). Together the sections extend from the input terminal 52 to the first quarter wavelength conductive strip or microstrip section 55 having the matching impedance. Little power is lost between the extension 66 and the transceiver because they share substantially equal impedances. In general, the microstrip extension 66 functions as a transmission line from the transceiver 42 to the first quarter wave section 55. The microstrip extension 66 allows for the input terminal 52 to be placed in a location that is convenient for connecting the transceiver 42 to the coupler 50. More particularly,

the microstrip extension 66 allows for the connection of the transceiver 42 and coupler 50 without displacing the quarter wavelength sections 55.

Figures 5b and 5c also illustrate the non-linear placement of the different sections of the impedance matching element 54. By placing adjacent sections at angles, the overall length of the impedance matching element 54 is reduced.

As described in detail above, various embodiments of the present invention are directed to RFID communication systems comprising a near field coupler that is capable of selectively communicating with a targeted transponder positioned among a group of multiple adjacent transponders. In general, the coupler includes a terminal load, a coupling element, a connecting element, an impedance matching element, and an input terminal. The impedance matching element is electrically connected to the input terminal and is configured to substantially match the impedances between the transceiver and the coupler. The connecting element electrically connects the impedance matching element to the coupling element. The coupling element and the impedance matching element are structured in a substantially parallel stacked arrangement and separated by at least one dielectric layer and at least one ground plane. For example, in one embodiment, the coupling element and the impedance matching element are separated by three dielectric layers and two ground planes.

RFID communication systems having near field couplers of the type described above are capable of interrogating individual transponders positioned among multiple adjacent transponders without the need for anti-collision management techniques or shielding components. Further, such systems require relatively little space and may be produced at relatively low cost. Finally, such communications may be adapted to operate effectively using relatively little in the way of power. Such advantages are useful in multiple communications and may be particularly useful in RFID printer-encoder systems.

It should be noted that in the above description, the term "coupler" is most often used to describe the device connected to the transceiver while the term "antenna" is most often used to describe the device connected to or part of the transponder. However, this is done only for clarification purposes and not as a limitation. One in the art would appreciate that the terms "antenna" and "coupler"

are essentially interchangeable. Both generally describe devices or elements of devices that are configured to convert electromagnetic fields into electrical signals and electrical signals into electromagnetic fields.

Also, as used herein, the term “electrical communication” refers to
5 elements or devices being connected or coupled to each other electronically. For example purposes only, and not as a limitation, electrical communication may include devices having contact-less or wireless communication with each other; being electromagnetically coupled to each other; or connected in series or parallel to each other within a circuit. Electrical communication may also refer to devices
10 that are connected or coupled to each other via one or more intermediate devices or elements.

Many modifications and other embodiments of the invention set forth herein will come to mind to one skilled in the art to which this invention pertain having the benefit of the teachings presented in the foregoing descriptions and the
15 associated drawings. Therefore, it is to be understood that the invention is not to be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

THAT WHICH IS CLAIMED:

1. An RFID system for selectively communicating with a targeted transponder from among a group of multiple adjacent transponders, the system
5 comprising:
a transponder conveyance adapted to transport at least one targeted transponder from a group of multiple adjacent transponders through a transponder operating region;
a transceiver configured to generate communication signals, said
10 transceiver defining a source impedance; and
a near field coupler structured in electrical communication with said transceiver for receiving the communication signals, said coupler defining an input impedance and including,
a grounded terminal load,
15 a coupling element in electrical communication with said grounded terminal load and configured to transmit a near field electromagnetic field into the transponder operating region, and
an impedance matching element in electrical communication with said coupling element and configured to substantially match the input
20 impedance to the source impedance,
wherein said coupling element and said impedance matching element are structured in a substantially parallel stacked arrangement and separated by at least one dielectric layer and at least one ground plane.
- 25 2. The RFID system according to Claim 1, wherein said coupling element and said impedance matching element are substantially aligned so as to minimize an overall length of said near field coupler.
- 30 3. The RFID system according to Claim 1, wherein said impedance matching element is a quarter wavelength microstrip section.

4. The RFID system according to Claim 1, wherein said impedance matching element is a plurality of quarter wavelength microstrip sections.

5. The RFID system according to Claim 4, wherein said quarter wavelength microstrip sections are substantially coplanar and at least two microstrip sections are non-linear relative to each other.

6. The RFID system according to Claim 1, wherein the source impedance is approximately 50 ohms and said terminal load is greater than 50 ohms.

7. The RFID system according to Claim 1, further comprising a printhead for printing indicia onto the at least one targeted transponder.

8. The RFID system according to Claim 7, wherein said printhead engages the at least one targeted transponder in the transponder operating region.

9. A coupler configured to couple a transceiver with a transponder, said coupler comprising:

an input terminal structured to receive an input signal from the transceiver; a grounded terminal load,

a coupling element electrically connected with said grounded terminal load and configured to couple with the transponder,

an impedance matching element electrically connected with said input terminal and configured to substantially match an input impedance defined by said coupler to a source impedance defined by the transceiver, and

a connecting element for electrically connecting said impedance matching element to said coupling element,

wherein said coupling element and said impedance matching element are structured in a substantially parallel stacked arrangement and separated by at least one dielectric layer and at least one ground plane.

10. The coupler according to Claim 9, wherein said coupling element and said impedance matching element are substantially aligned so as to minimize an overall length of the coupler.

5

11. A RFID printer-encoder for printing and programming a series of media units wherein at least one of the media units include at least one transponder; said printer-encoder comprising:

a printhead for printing indicia onto the media units;

10 a media conveyance adapted to transport the series of media units including the at least one transponder to said printhead and to a transponder operating region;

a transceiver configured to generate communication signals, said transceiver defining a source impedance; and

15 a near field coupler defining an input impedance, said near field coupler configured to receive the communications signals from the transceiver and selectively communicate with a transponder in the transponder operating region, said near field coupler includes a microstrip line extending from an input terminal to a terminal load, said microstrip line having at least a first region and a second region separated by a plurality of dielectric layers and at least one ground plane,
20 wherein the first region is configured to substantially match the input impedance to the source impedance and the second region is configured to generate a near field signal to couple with the transponder in the transponder operating region.

25 12. The RFID printer-encoder according to Claim 11, wherein the first region and the second region are substantially aligned and substantially parallel so as to minimize an overall length of said near field coupler.

13. The RFID printer-encoder according to Claim 11, wherein the first
30 region forms one or more quarter wavelength microstrip sections.

14. The RFID printer-encoder according to Claim 13, wherein the first region is partially non-linear.

5 15. The RFID printer-encoder according to Claim 11, wherein the source impedance is approximately 50 ohms and said terminal load is greater than 50 ohms.

10 16. The RFID printer-encoder according to Claim 11, wherein the second region being characterized by a comparatively low impedance relative to the first region.

15 17. The RFID printer-encoder according to Claim 11, wherein the first region includes a matching impedance up to 800 ohms for substantially matching the source impedance and the input impedance.

18. The RFID printer-encoder according to Claim 11, wherein the first region and the second region are separated by four layers of dielectric layers and two ground planes.

20 19. The RFID printer-encoder according to Claim 17, wherein the dielectric layers include a FR-4 material.

20. The RFID printer-encoder according to Claim 19, wherein the first region and the second region are connected by a via.

1/6

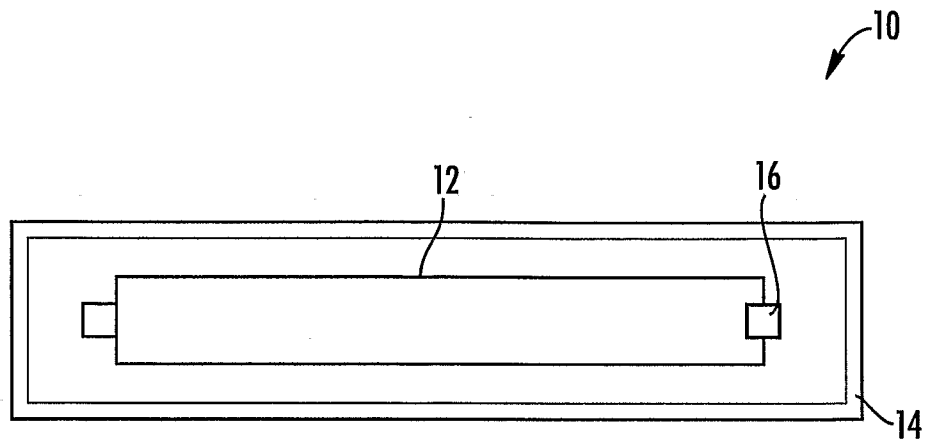


FIG. 1a
(PRIOR ART)

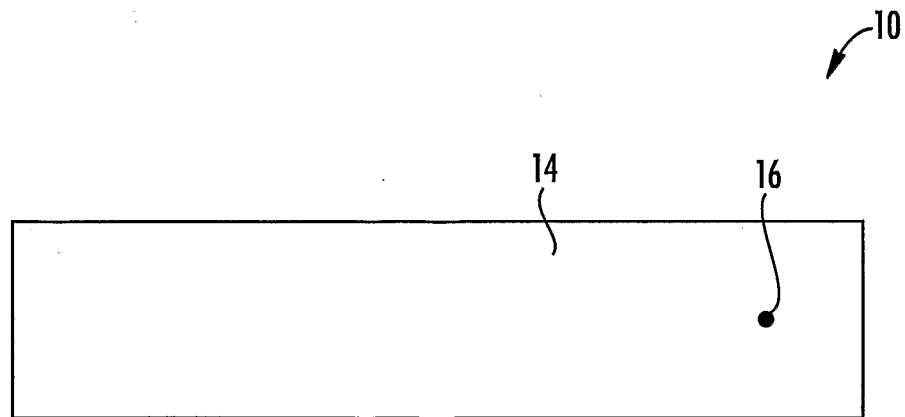


FIG. 1b
(PRIOR ART)

2/6

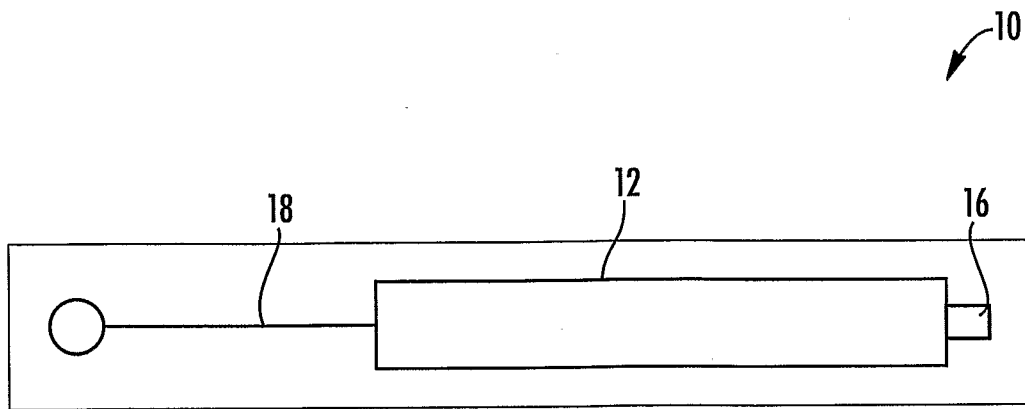


FIG. 2a
(PRIOR ART)

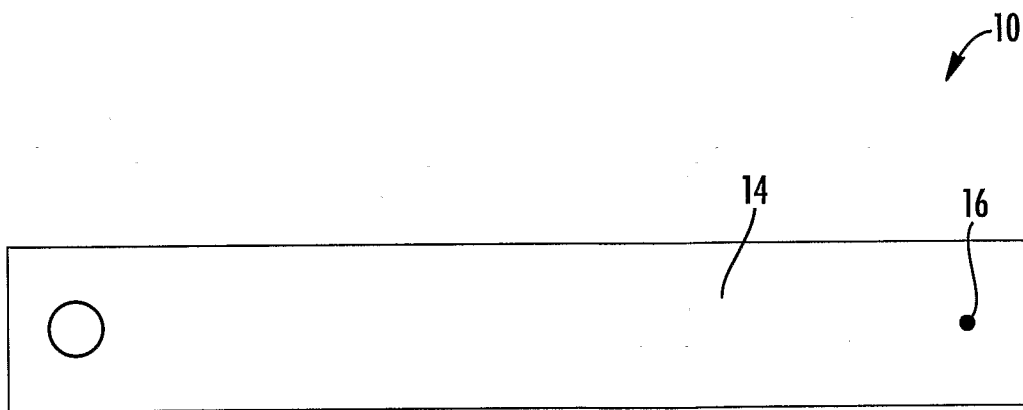


FIG. 2b
(PRIOR ART)

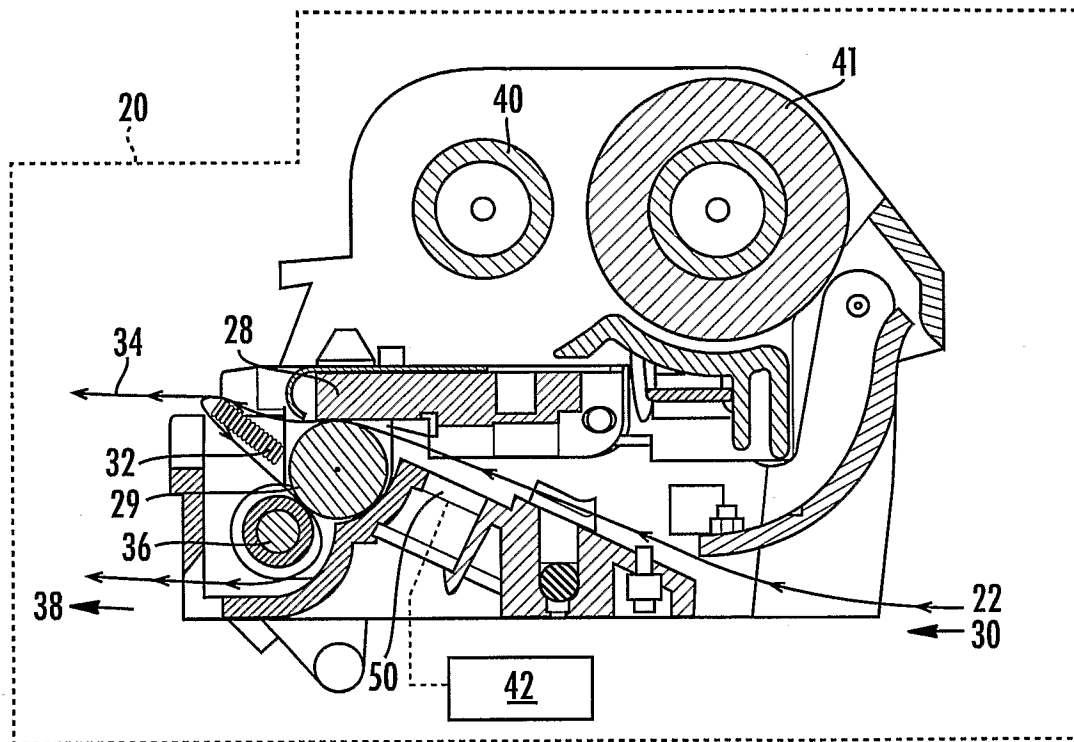


FIG. 3

4/6




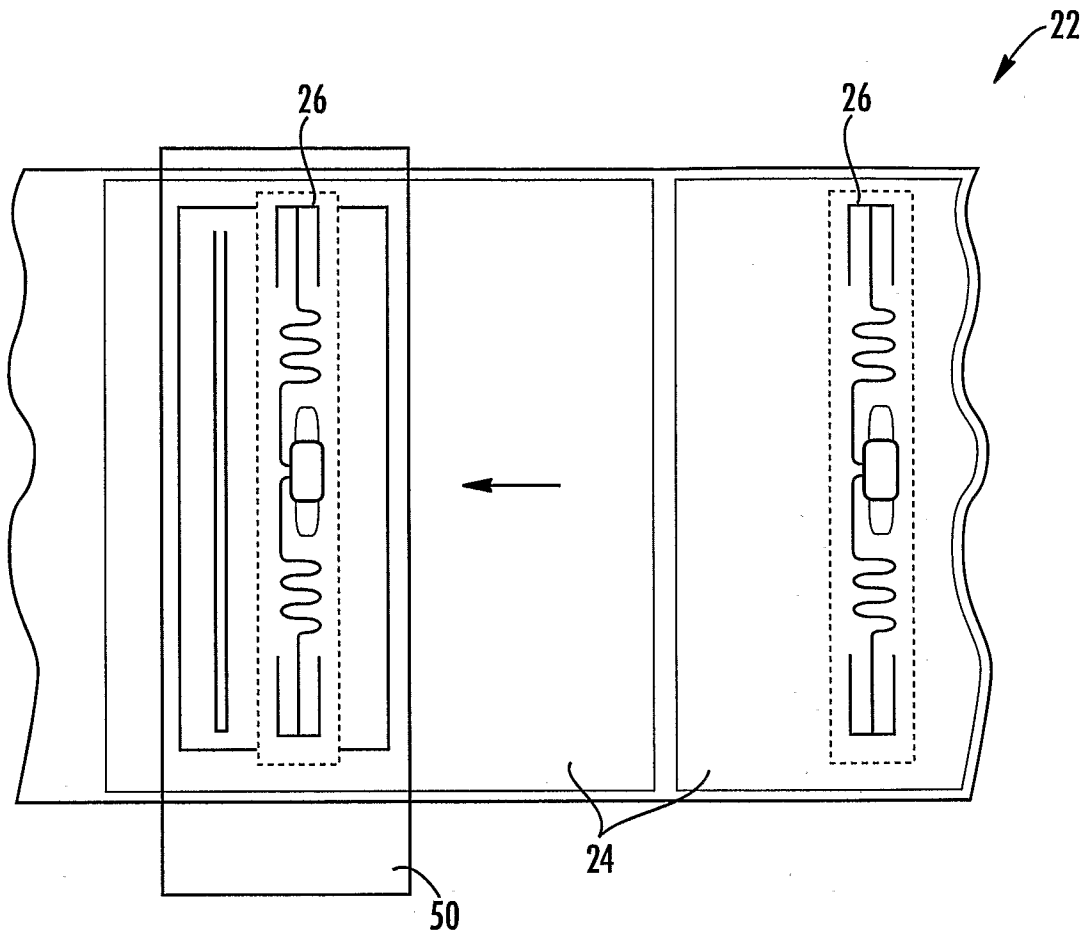


FIG. 4

5/6

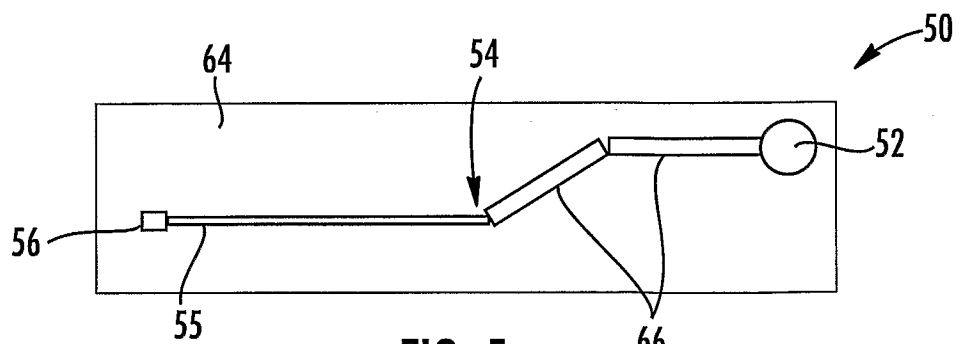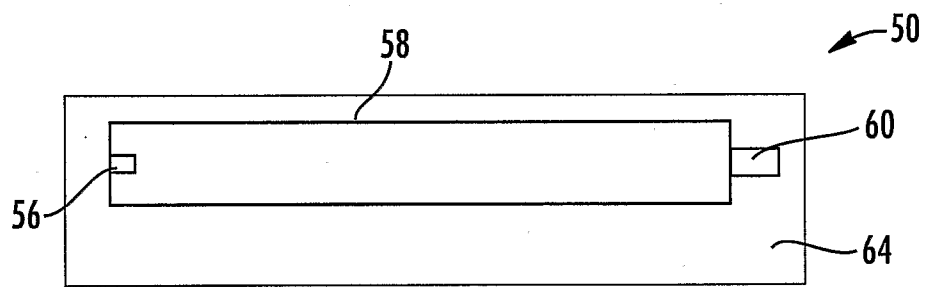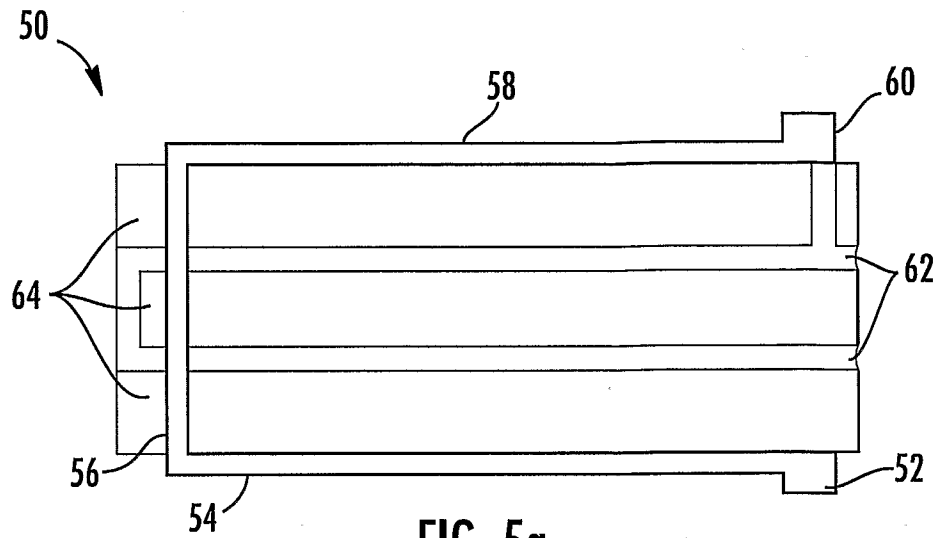

6/6

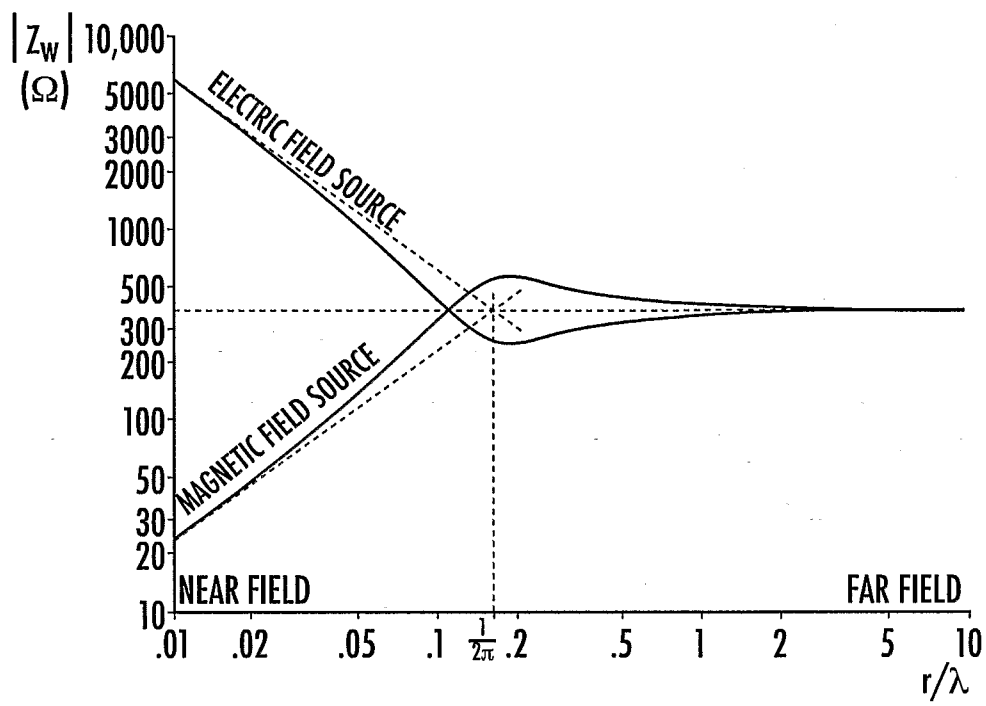


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2006/036392

A. CLASSIFICATION OF SUBJECT MATTER

INV. G06K7/08 H01Q1/22 H01Q13/20 H01P7/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06K H01Q H01P

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2005/022445 A2 (ZIH CORP; DONATO DANIEL F [US]; GAWELCZYK ROBERT [US]; HOHBERGER CLIVE) 10 March 2005 (2005-03-10) the whole document	1-18
Y	US 5 903 239 A (TAKAHASHI KAZUAKI [JP] ET AL) 11 May 1999 (1999-05-11) column 4, line 46 - column 5, line 13; figures 3,4	1-18
A	US 4 922 259 A (HALL EDWARD A [US] ET AL) 1 May 1990 (1990-05-01) abstract	1-18
A	US 5 898 405 A (IWASAKI HISAO [JP]) 27 April 1999 (1999-04-27) abstract	1-18



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

24 January 2007

Date of mailing of the international search report

31/01/2007

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Van Dooren, Gerardus

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2006/036392

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 2005022445	A2	10-03-2005	EP TW	1660331 A2 250460 B		31-05-2006 01-03-2006
US 5903239	A	11-05-1999	JP JP	3141692 B2 8056113 A		05-03-2001 27-02-1996
US 4922259	A	01-05-1990	NONE			
US 5898405	A	27-04-1999	NONE			