



(11) **EP 3 459 619 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
03.06.2020 Bulletin 2020/23

(51) Int Cl.:
B01F 11/00 ^(2006.01) **B06B 1/14** ^(2006.01)

(21) Application number: **17798628.8**

(86) International application number:
PCT/CN2017/082590

(22) Date of filing: **28.04.2017**

(87) International publication number:
WO 2017/198065 (23.11.2017 Gazette 2017/47)

(54) **SOUND WAVE MIXING DEVICE BASED ON THREE-FREEDOM-DEGREE RESONANCE SYSTEM**

SCHALLWELLENMISCHVORRICHTUNG BASIEREND AUF EINEM RESONANZSYSTEM MIT DREI FREIHEITSGRADEN

DISPOSITIF DE MÉLANGE D'ONDES SONORES FAISANT APPEL À UN SYSTÈME DE RÉSONANCE À TROIS DEGRÉS DE LIBERTÉ

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **16.05.2016 CN 201610320677**

(43) Date of publication of application:
27.03.2019 Bulletin 2019/13

(73) Proprietors:
• **Hubei Hangpeng Chemical Power Technology
Limited Liability Company
Xiangyang, Hubei 441003 (CN)**
• **Beijing Aerospace Innovation
Patent Investment Center (Limited Partnership)
Beijing 100034 (CN)**

(72) Inventors:
• **LU, Zhimeng
Xiangfan
Hubei 441003 (CN)**
• **SUN, Tao
Xiangfan
Hubei 441003 (CN)**
• **WANG, Qingsong
Xiangfan
Hubei 441003 (CN)**

- **ZENG, Qinglin
Xiangfan
Hubei 441003 (CN)**
- **WEN, Changyan
Xiangfan
Hubei 441003 (CN)**
- **DU, Tao
Xiangfan
Hubei 441003 (CN)**
- **REN, Xiangning
Xiangfan
Hubei 441003 (CN)**
- **ZHANG, Junjie
Xiangfan
Hubei 441003 (CN)**

(74) Representative: **EP&C
P.O. Box 3241
2280 GE Rijswijk (NL)**

(56) References cited:
**EP-A1- 1 972 296 CN-A- 106 000 198
CN-U- 202 387 416 CN-U- 204 799 210
CN-U- 206 027 588 CN-Y- 2 444 676
JP-A- H1 034 084 US-A- 4 619 532
US-A1- 2012 175 489 US-B1- 7 188 993**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

5 [0001] The disclosure relates to a mixing device, and particularly to a three-degree-of-freedom resonance system-based sonic mixing device.

BACKGROUND

10 [0002] Mixing equipment has been widely applied to the industries of chemistry, medicine, batteries and the like. However, most of mixing equipments used at present are paddle mixers, and therefore, mixing time is long; mixing efficiency is low; mixing dead angles exist in a mixing process; materials are not allowed to be added at the same time in a charging process; it is difficult to clean materials after mixing; and production efficiency of an enterprise is greatly influenced.

15 [0003] US7188993B1 discloses a three-degree-of-freedom resonance system-based sonic mixing device.

SUMMARY

20 [0004] The disclosure is intended to overcome the shortcomings of the conventional art and provide a three-degree-of-freedom resonance system-based sonic mixing device capable of rapidly and efficiently mixing materials.

[0005] In order to solve the technical problem, the invention provides a three-degree-of-freedom resonance system-based sonic mixing device according to claim 1, which includes :

25 a machine frame 1 which includes a lower machine frame plate 101 and an upper machine frame plate 103 fixedly connected with the lower machine frame plate 101;

a reaction unit 3 which includes an upper reaction plate 302 and a lower reaction plate 304 fixedly connected with the upper reaction plate 302 and is supported in the upper machine frame plate 103 and lower machine frame plate 101 of the machine frame 1 through a plurality of second upper springs 301a arranged on an upper surface of the upper reaction plate 302 and a plurality of second lower springs 301b arranged on a lower surface of the lower reaction plate 304;

a vibration excitation unit 2 which includes a fixed plate 202 supported between the upper reaction plate 302 and the lower reaction plate 304 through a plurality of first upper springs 201a arranged on an upper surface of the fixed plate 202 and a plurality of first lower springs 201b on a lower surface of the fixed plate 202; and

35 a loading unit 4 which includes an upper loading plate 402 and a lower loading plate 407 fixedly connected with the upper loading plate 402 and arranged between the upper reaction plate 302 and the lower reaction plate 304 of the reaction unit 3, and

the lower loading plate 407 being supported between the upper reaction plate 302 and lower reaction plate 304 of the reaction unit 3 through a plurality of fourth upper springs 406a and a plurality of fourth lower springs 406b.

40 [0006] Preferably, the loading unit 4 may further include a plurality of spring guide posts 404 fixed on a lower surface of the upper loading plate 402;

each spring guide post 404 may pass through the upper machine frame plate 103 to form an upper half part and a lower half part;

45 the upper half parts of the spring guide posts 404 may be sleeved with a third upper springs 403a which may be supported between an upper surface of the upper machine frame plate 103 and the lower surface of the upper loading plate 402; and the lower half parts of the spring guide posts 404 may be sleeved with a third lower springs 403b which may be supported between the upper machine frame plate 103 and ends of the lower half parts of the spring guide posts 404.

[0007] Preferably, the upper reaction plate 302 may be fixedly connected with the lower reaction plate 304 through a plurality of reaction columns 303.

50 [0008] Preferably, the plurality of reaction columns 303 may pass through the plurality of through holes formed in the lower loading plate 407, respectively.

[0009] Preferably, the upper loading plate 402 may be fixedly connected with the lower loading plate 407 through a plurality of loading connecting rods 405.

55 [0010] Preferably, each loading connecting rod 405 may sequentially pass through the upper machine frame plate 103, the second upper spring 301a, the upper reaction plate 302 and the fourth upper spring 406a.

[0011] Preferably, the plurality of first upper springs 201a and the plurality of first lower springs 201b may be arranged on an upper surface and a lower surface of the fixed plate 202 in an annular array manner, respectively; or the plurality of second upper springs 301a and the plurality of second lower springs 301b may be arranged on the upper

reaction plate 302 and the lower reaction plate 304 in an annular array manner, respectively.

[0012] Preferably, central axes of each first upper spring 201a and each first lower spring 201b may be coincident; central axes of each second upper spring 301a and each second lower spring 301b may be coincident; or central axes of each fourth upper spring 406a and each fourth lower spring 406b may be coincident.

[0013] Preferably, recesses for keeping the first upper springs 201a may be provided in the upper surface of the fixed plate 202, and recesses for keeping the first lower springs 201b may be provided in the lower surface of the fixed plate 202; or

recesses for keeping the second upper springs 301 a may be provided in the upper surface of the upper reaction plate 302, and recesses for keeping the second lower springs 301b may be provided in the lower surface of the lower reaction plate 304; or

recesses for keeping the second upper springs 301a may be provided in the upper machine frame plate 103, and recesses for keeping the second lower springs 301b may be provided in the lower machine frame plate 101; or recesses for keeping the first upper springs 201a may be provided in the lower surface of the upper reaction plate 302, and recesses for keeping the first lower springs 201b maybe provided in the upper surface of the lower reaction plate 304; or

recesses for keeping the fourth upper springs 406a may be provided in the lower surface of the upper reaction plate 302, and recesses for keeping the fourth lower springs 406b may be provided in the upper surface of the lower reaction plate 304.

[0014] Preferably, the device may further include a vibration excitation device fixed on the vibration excitation unit 2.

[0015] Preferably, the vibration excitation device may be an eccentric mechanical vibration exciter, an electromagnetic vibration exciter or a hydraulic vibration exciter.

[0016] Preferably, a plurality of holes for reducing weight may be formed in the lower reaction plate 304.

[0017] Preferably, the device may further include a mixing container 401 fixed on at least the reaction unit 3 or the loading unit 4.

[0018] Preferably, the lower machine frame plate 101 may be fixedly connected with the upper machine frame plate 103 through a plurality of machine frame upright posts 102.

[0019] Preferably, the first upper springs 201a and the first lower springs 201b may be arranged on the vibration excitation unit 2 in a press-fitting manner; the second upper springs 301a and the second lower springs 301b may be arranged on the reaction unit 3 in the press-fitting manner; or the fourth upper springs 406a and the fourth lower springs 406b may be arranged on the loading unit 4 in the press-fitting manner.

BRIEF DESCRIPTION OF DRAWINGS

[0020] Specific embodiments of the application will be described below with reference to the drawings, wherein

FIG. 1 is a structure diagram of a sonic mixing device according to an embodiment of the application.

FIG. 2 is a sectional structure diagram of a sonic mixing device according to an embodiment of the application.

FIG. 3 is a structure diagram of a machine frame according to an embodiment of the application.

FIG. 4 is a structure diagram of a vibration excitation unit according to an embodiment of the application.

FIG. 5 is a structure diagram of a reaction unit according to an embodiment of the application.

FIG. 6 is a structure diagram of a loading unit according to an embodiment of the application.

FIG. 7 is a schematic diagram of overall stress on a sonic mixing device according to an embodiment of the application.

FIG. 8 is a third-order amplitude-frequency response diagram according to an embodiment of the application.

FIG. 9 is a third-order phase-frequency response diagram according to an embodiment of the application.

[0021] Reference numerals in the drawings are listed below:

1: machine frame; 2: vibration excitation unit; 3: reaction unit; 4: loading unit; 101: lower machine frame plate; 102: machine frame upright post; 103: upper machine frame plate; 201: first spring; 202: fixed plate; 301: second spring; 302: upper reaction plate; 303: reaction upright post; 304: lower reaction plate; 401: mixing container; 402: upper loading plate; 403: third spring; 404: spring guide post; 405: loading connecting plate; 406: fourth spring; and 407: lower loading plate.

[0022] F indicates a vibration excitation force, and m_i , c_i and k_i indicate a mass of each unit, a damping coefficient and rigidity, respectively.

DETAILED DESCRIPTION

[0023] For making the technical solutions and advantages of the application clearer, exemplary embodiments of the application will further be described below in combination with the drawings in detail. The described embodiments are

not exhaustive but only part of embodiments of the application. Moreover, the embodiments in the disclosure and characteristics in the embodiments may be combined if without conflicts.

[0024] In FIG. 1, a mixing device includes a machine frame (1), a vibration excitation unit (2), a reaction unit (3) and a loading unit (4). The reaction unit (1) is positioned in the middle of the machine frame (1), and is connected with an upper plate (103) and lower plate (101) of the machine frame (1) through second springs (301a, 301b). The vibration excitation unit (2) is positioned in the middle of the reaction unit (3), and is connected with an upper plate (302) and lower plate (304) of the reaction unit (3) through first springs (201a, 201b). The loading unit (4) is positioned between the machine frame (1) and the reaction unit (3), and is connected with the machine frame (1) and the reaction unit (3) through third springs (403a, 403b) and fourth springs (406a, 406b) respectively. A mixing container (401) may be fixed on the loading unit (4) or fixed on the reaction unit (3), or two mixing containers (401) are fixed on both the loading unit (4) and the reaction unit (3). A vibration excitation device of the vibration excitation unit (2) may adopt an eccentric mechanical vibration exciter, an electromagnetic vibration exciter or a hydraulic vibration exciter.

[0025] A working process of the disclosure is as follows: the vibration excitation device only generates a vertical vibration excitation force, bringing the loading unit and reaction unit of the mixing device into forced vibration. When a vibration frequency of the mixing device reaches a third-order natural frequency, a system achieves a resonance effect; the upper loading plate moving with a certain acceleration transmits kinetic energy into the mixing container; low-frequency sonic waves are generated between materials mixed in the container to break boundary layers between the materials; and the materials freely flow to form a numerous micro mixing regions to promote rapid mixing of the materials. During resonance, an amplitude and acceleration of the system are sharply increased; energy required by the system is minimized; and all energy generated by the system is used for effective mixing of the materials. Motion directions of the loading unit (4) and the reaction unit (3) are opposite, and generated acting forces are mutually canceled. After mixing, it is only necessary to take the container out, and the mixing container may be rapidly replaced and is not required to be cleaned on line.

[0026] In FIG. 2, FIG. 3, FIG. 4, FIG. 5 and FIG. 6, the machine frame 1 includes a circular lower machine frame plate 101 and an upper annular lower machine frame plate 103 connected with the lower machine frame plate 101 through a plurality of machine frame upright posts 102.

[0027] The reaction unit 3 is arranged in the machine frame 1. The reaction unit 3 includes an upper annular reaction plate 302 and a lower annular reaction plate 304 connected with the upper reaction plate 302 through a plurality of reaction upright posts 303. The plurality of second upper springs 301a are press-fitted between the upper reaction plate 302 and the upper machine frame 103, and the plurality of second upper springs 301a are uniformly distributed. The plurality of second lower springs 301b are press-fitted between the lower reaction plate 304 and the lower machine frame plate 101, and the plurality of second lower springs 301b are uniformly distributed. Each of the second upper springs 301a and each of the second lower springs 301b form a group, and central axes of the second upper spring 301a and second lower spring 301b in each group are coincident.

[0028] The loading unit 4 includes an annular lower loading plate 407 arranged between the upper reaction plate 302 and the lower reaction plate 304 and an upper loading plate 402 connected with the lower loading plate 407 through a plurality of loading connecting rods 405 passing through the upper machine frame plate 103. The second upper springs 301a and the upper reaction plate 302 and positioned above the upper machine frame plate 103; fourth upper springs 406a are press-fitted between the lower loading plate 407 and the upper reaction plate 302, and the fourth upper springs 406a sleeve the loading connecting rods 405; fourth lower springs 406b arranged correspondingly to the fourth upper springs 406a are press-fitted between the lower loading plate 407 and the lower reaction plate 304; the plurality of spring guide posts 404 are connected to a lower surface of the upper loading plate 402, and lower ends of the spring guide posts 404 pass through the upper machine frame plate 103; parts, positioned on the upper machine frame plate 103, of the spring guide posts 404 are sleeved with third upper springs 403a, and the third upper springs 403a are press-fitted between the upper loading plate 402 and the upper machine frame plate 103; and parts, positioned below the upper machine frame plate 103, of the spring guide posts 404 are sleeved with third lower springs 403b, and the third lower springs 403b are press-fitted between the upper machine frame plate 103 and flanges at lower ends of the spring guide posts 404.

[0029] The vibration excitation unit 2 includes a fixed plate 202 arranged in the lower loading plate 407 and a vibration excitation device connected to the fixed plate 202; and a plurality of first upper springs 201a are press-fitted between the fixed plate 202 and the upper reaction plate 302, and a plurality of first lower springs 201b arranged correspondingly to the first upper springs 201a are press-fitted between the fixed plate 202 and the lower reaction plate 304.

[0030] The device further includes the mixing container 401; and the mixing container 301 is fixed on the upper loading plate 402 of the loading unit 4.

[0031] Recesses for keeping the third upper springs 403a are formed in the upper surface of the upper machine frame plate 103; recesses for keeping the third lower springs 403b are formed in the lower surface; the recesses are formed correspondingly; and holes for the spring guide posts 404 to pass through are formed at the recesses. Recesses for keeping the second upper springs 301a are further formed in the lower surface of the upper machine frame plate 103;

holes for the loading connecting rods 305 to pass through are formed in the upper machine frame plate 103; and recesses for keeping the second lower springs 301b are formed in the upper surface of the lower machine frame plate 101.

[0032] Recesses for keeping the second upper springs 301a are provided in the upper surface of the upper reaction plate 302; recesses for keeping the fourth upper springs 406a are provided in the lower surface; the recesses are provided correspondingly; and through holes for the loading connecting rods 405 to pass through are provided at the recesses. Via holes for the spring guide posts 404 and the third lower springs 403b to pass through are further provided in the lower surface of the upper reaction plate 302; recesses for keeping the first upper springs 201a are further provided in the lower surface of the upper reaction plate 302; recesses for keeping the second lower springs 301b are provided in the lower surface of the lower reaction plate 304; recesses for keeping the fourth lower springs 406b are provided in the upper surface; and the recesses are provided correspondingly. Recesses for keeping the first lower springs 201b are further provided in the upper surface of the lower reaction plate 304. Large holes for reducing weight are provided in the lower reaction plate 304.

[0033] Recesses for keeping the fourth upper springs 406a are provided in the upper surface of the lower loading plate 407; recesses for keeping the fourth lower springs 406b are provided in the lower surface; and the recesses are provided correspondingly. Holes for the reaction upright posts 303 to pass through are provided in the lower loading plate 407.

[0034] Recesses for keeping the third upper springs 403a are provided in the lower surface of the upper loading plate 402.

[0035] The large holes for reducing the weight are provided in the lower reaction plate 304.

[0036] There is one mixing container 401 fixed on the upper loading plate 402 of the loading unit 4.

[0037] There are two mixing containers 401. One is fixed on the loading unit 4, and the other is fixed on the reaction unit 3.

[0038] The motion directions of the loading unit 4 and the reaction unit 3 are completely opposite, the generated acting forces are mutually canceled, and an acting force of a mixer on the ground is zero.

[0039] The mixing device works at the third-order natural frequency, so that the system generates a resonance state. When the mixing device is in the resonance state, the materials in the container generate the low-frequency sonic waves, and all the energy is used for mixing between the materials, so that the materials may be rapidly and efficiently mixed. A resonance amplitude of the system is lower than 15mm, a resonance frequency range is $60 \pm 5\text{Hz}$, and a highest acceleration is 200g.

[0040] When the mixing device works close to the resonance frequency, a sonic wave eddy current of $<300\mu\text{m}$ may be generated in the mixing container to rapidly and efficiently mix the materials.

[0041] In FIG. 7, FIG. 8 and FIG. 9, a working principle of the three-degree-of-freedom resonance system-based sonic mixing device of the disclosure is as follows.

[0042] According to a vibration theory, a single mass body follows a damped forced vibration equation: $m\ddot{x} + c\dot{x} + kx = F$, and from a stress diagram of the system in FIG. 6, a forced vibration motion equation of the three-degree-of-freedom system under the action of an additional intermittent vibration excitation force is:

$$\begin{bmatrix} m_1 & 0 & 0 \\ 0 & m_2 & 0 \\ 0 & 0 & m_3 \end{bmatrix} \begin{Bmatrix} \ddot{a}_1 \\ \ddot{a}_2 \\ \ddot{a}_3 \end{Bmatrix} + \begin{bmatrix} c_1 & -c_1 & 0 \\ -c_1 & c_1 + c_2 + c_4 & -c_2 \\ 0 & -c_2 & c_2 + c_3 \end{bmatrix} \begin{Bmatrix} \dot{v}_1 \\ \dot{v}_2 \\ \dot{v}_3 \end{Bmatrix} + \begin{bmatrix} k_1 & -k_1 & 0 \\ -k_1 & k_1 + k_2 + k_4 & -k_2 \\ 0 & -k_2 & k_2 + k_3 \end{bmatrix} \begin{Bmatrix} x_1 \\ x_2 \\ x_3 \end{Bmatrix} = \begin{Bmatrix} F \\ 0 \\ 0 \end{Bmatrix},$$

in the formula:

m_i -- mass of each unit,
 c_i -- damping coefficient,
 k_i -- rigidity of the springs in each group,
 x_i , v_i and a_i -- displacement, velocity and acceleration of each unit, and
 $\{F\}$ -- vibration excitation force of the system.

[0043] At present, there are many calculation methods for a natural frequency and main vibration mode of a multi-free-of-freedom system, and there have been existing standard computer programs for some of them to select. Common methods include a matrix iteration method, a Dunkerly method, a Rayleigh method, a Ritz method, a subspace iteration method, and the like.

[0044] Theoretically, when the vibration excitation frequency reaches the natural frequency of the system, the system generates resonance, amplitude of the loading unit is highest, a required vibration excitation force may be very weak, and energy consumption is lowest. In the disclosure, phase-frequency response and amplitude-frequency response characteristics of the three-degree-of-freedom vibration system are analyzed under a given set of conditions of mass,

damping and rigidity parameters to find that that, during work at a first-order natural frequency and a second-order natural frequency, the motion directions of the loading unit and the reaction unit are the same, so that the whole mixing device vibrates violently and is unfavorable for mixing work. During work at the third-order natural frequency, the motion directions of the loading unit and the reaction unit are opposite, amplitudes are close, the forces generated by the loading unit and the reaction unit are mutually canceled in the mixing device, and the mixing device generates no acting force on the ground, so that the third-order natural frequency is selected as a working frequency, as shown in FIG. 8 and FIG. 9.

[0045] Compared with the conventional art, the solution has the following advantages.

1) Compatibility with the plurality of material systems, including liquid-liquid, liquid-solid, gas-liquid and solid-solid: the mixing device is particularly suitable for mixing dangerous materials and widely applicable.

2) High mixing quality: on one hand, quality of a single product is improved, and on the other hand, differences between production batches are reduced.

3) Energy saving and high efficiency: a time required by resonant mixing of the materials is only 1/7 of a time required by conventional mixing, in addition, resonant mixing energy loss is low, and applied mechanical energy is all used for applying work for mixing, so that the mixing efficiency is high, and an energy-saving effect is extraordinarily prominent.

4) High safety: a resonant mixing dispersion technology avoids contact between mechanical rotating parts and the materials, there are no paddles in the mixing container, and intrinsic safety of the process is improved.

5) No mixing dead angles: the resonant mixing technology generates a micro sonic wave eddy current in the mixing container to completely mix the materials.

6) Easiness for cleaning: during mixing, the materials are arranged in the mixing container, the container is fixed with the equipment, it is only necessary to take the container out after mixing, and the mixing container may be rapidly replaced and is not required to be cleaned on line.

Claims

1. A three-degree-of-freedom resonance system-based sonic mixing device, comprising:

a machine frame (1) comprising a lower machine frame plate (101) and an upper machine frame plate (103) fixedly connected with the lower machine frame plate (101);

a reaction unit (3) comprising an upper reaction plate (302) and a lower reaction plate (304) fixedly connected with the upper reaction plate (302); the reaction unit (3) being supported in the upper machine frame plate (103) and lower machine frame plate (101) of the machine frame (1) through a plurality of second upper springs (301a) arranged on an upper surface of the upper reaction plate (302) and a plurality of second lower springs (301b) arranged on a lower surface of the lower reaction plate (304);

a vibration excitation unit (2) comprising a fixed plate (202) which is supported between the upper reaction plate (302) and the lower reaction plate (304) through a plurality of first upper springs (201a) arranged on its upper surface and a plurality of first lower springs (201b) on its lower surface; and

a loading unit (4) comprising an upper loading plate (402) and a lower loading plate (407) fixedly connected with the upper loading plate (402); the lower loading plate being arranged between the upper reaction plate (302) and lower reaction plate (304) of the reaction unit (3),

wherein the lower loading plate (407) is supported between the upper reaction plate (302) and the lower reaction plate (304) of the reaction unit (3) through a plurality of fourth upper springs (406a) and a plurality of fourth lower springs (406b).

2. The sonic mixing device according to claim 1, wherein the loading unit (4) further comprises a plurality of spring guide posts (404) fixed on a lower surface of the upper loading plate (402);

each spring guide post (404) passes through the upper machine frame plate (103) to form an upper half part and a lower half part;

the upper half parts of the spring guide posts (404) are sleeved with third upper springs (403a) supported between an upper surface of the upper machine frame plate (103) and the lower surface of the upper loading plate (402); and

the lower half parts of the spring guide posts (404) are sleeved with third lower springs (403b) supported between the upper machine frame plate (103) and ends of the lower half parts of the spring guide posts (404).

3. The sonic mixing device according to claim 1, wherein the upper reaction plate (302) is fixedly connected with the

lower reaction plate (304) through a plurality of reaction columns (303).

4. The sonic mixing device according to claim 3, wherein the plurality of reaction columns (303) pass through a plurality of through holes formed in the lower loading plate (407), respectively.

5. The sonic mixing device according to claim 1, wherein the upper loading plate (402) is fixedly connected with the lower loading plate (407) through a plurality of loading connecting rods (405).

6. The sonic mixing device according to claim 5, wherein each loading connecting rod (304) sequentially passes through the upper machine frame plate (103), the second upper spring (301a), the upper reaction plate (302) and the fourth upper spring (406a).

7. The sonic mixing device according to claim 1, wherein the plurality of first upper springs (201a) and the plurality of first lower springs (201b) are arranged on an upper surface and a lower surface of the fixed plate (202) in an annular array manner, respectively; or the plurality of second upper springs (301a) and the plurality of second lower springs (301b) are arranged on the upper reaction plate (302) and the lower reaction plate (304) in an annular array manner respectively.

8. The sonic mixing device according to claim 1, wherein central axes of each first upper spring (201a) and each first lower spring (201b) are coincident;

central axes of each second upper spring (301a) and each second lower spring (301b) are coincident; or central axes of each fourth upper spring (406a) and each fourth lower spring (406b) are coincident.

9. The sonic mixing device according to claim 1, wherein recesses for keeping the first upper springs (201a) are provided in the upper surface of the fixed plate (202), and recesses for keeping the first lower springs (201b) are provided in the lower surface of the fixed plate (202);

recesses for keeping the second upper springs (301a) are provided in the upper surface of the upper reaction plate (302), and recesses for keeping the second lower springs (301b) are provided in the lower surface of the lower reaction plate (304); or

recesses for keeping the second upper springs (301a) are provided in the upper machine frame plate (103), and recesses for keeping the second lower springs (301b) are provided in the lower machine frame plate (101); recesses for keeping the first upper springs (201a) are provided in the lower surface of the upper reaction plate (302), and recesses for keeping the first lower springs (201b) are provided in the upper surface of the lower reaction plate (304); or

recesses for keeping the fourth upper springs (406a) are provided in the lower surface of the upper reaction plate (302), and recesses for keeping the fourth lower springs (406b) are provided in the upper surface of the lower reaction plate (304).

10. The sonic mixing device according to claim 1, further comprising a vibration excitation device fixed on the vibration excitation unit (2).

11. The sonic mixing device according to claim 10, wherein the vibration excitation device is an eccentric mechanical vibration exciter, an electromagnetic vibration exciter or a hydraulic vibration exciter.

12. The sonic mixing device according to claim 1, wherein a plurality of holes for reducing weight are formed in the lower reaction plate (304).

13. The sonic mixing device according to claim 1, further comprising a mixing container (401) fixed on at least the reaction unit (3) or the loading unit (4).

14. The sonic mixing device according to claim 1, wherein the lower machine frame plate (101) is fixedly connected with the upper machine frame plate (103) through a plurality of machine frame upright posts (102).

15. The sonic mixing device according to claim 1, wherein

the first upper springs (201a) and the first lower springs (201b) are arranged on the vibration excitation unit (2)

in a press-fitting manner;
 the second upper springs (301a) and the second lower springs (301b) are arranged on the reaction unit (3) in the press-fitting manner; or
 the fourth upper springs (406a) and the fourth lower springs (406b) are arranged on the loading unit (4) in the press-fitting manner.

Patentansprüche

1. Schallmischvorrichtung, die auf einem Resonanzsystem mit drei Freiheitsgraden basiert, umfassend:

einen Maschinenrahmen (1) umfassend eine untere Maschinenrahmenplatte (101) und eine obere Maschinenrahmenplatte (103), die fest mit der unteren Maschinenrahmenplatte (101) verbunden ist;
 eine Reaktionseinheit (3) umfassend eine obere Reaktionsplatte (302) und eine untere Reaktionsplatte (304), die fest mit der oberen Reaktionsplatte (302) verbunden ist; wobei die Reaktionseinheit (3) in der oberen Maschinenrahmenplatte (103) und der unteren Maschinenrahmenplatte (101) des Maschinenrahmens (1) durch eine Vielzahl von zweiten oberen Federn (301a) gestützt wird, die auf einer oberen Oberfläche der oberen Reaktionsplatte (302) angeordnet sind, und durch eine Vielzahl von zweiten unteren Federn (301b), die auf einer unteren Oberfläche der unteren Reaktionsplatte (304) angeordnet sind;
 eine Vibrationserregungseinheit (2) umfassend eine befestigte Platte (202), die zwischen der oberen Reaktionsplatte (302) und der unteren Reaktionsplatte (304) durch eine Vielzahl von ersten oberen Federn (201a) gestützt wird, die auf ihrer oberen Oberfläche angeordnet sind, und durch eine Vielzahl von ersten unteren Federn (201b) auf ihrer unteren Oberfläche; und
 eine Ladeeinheit (4) umfassend eine obere Ladeplatte (402) und eine untere Ladeplatte (407), die fest mit der oberen Ladeplatte (402) verbunden ist; wobei die untere Ladeplatte zwischen der oberen Reaktionsplatte (302) und der unteren Reaktionsplatte (304) der Reaktionseinheit (3) angeordnet ist, wobei die untere Ladeplatte (407) zwischen der oberen Reaktionsplatte (302) und der unteren Reaktionsplatte (304) der Reaktionseinheit (3) durch eine Vielzahl von vierten oberen Federn (406a) und durch eine Vielzahl von vierten unteren Federn (406b) gestützt wird.

2. Schallmischvorrichtung nach Anspruch 1, wobei die Ladeeinheit (4) ferner eine Vielzahl von Federführungsstützen (404) umfasst, die an einer unteren Oberfläche der oberen Ladeplatte (402) befestigt sind; wobei jede Federführungsstütze (404) durch die obere Maschinenrahmenplatte (103) hindurchtritt, um ein oberes Halbtteil und ein unteres Halbtteil zu formen;
 wobei die oberen Halbtteile der Federführungsstützen (404) mit dritten oberen Federn (403a) ummantelt sind, die zwischen einer oberen Oberfläche der oberen Maschinenrahmenplatte (103) und der unteren Oberfläche der oberen Ladeplatte (402) gestützt werden; und
 wobei die unteren Halbtteile der Federführungsstützen (404) mit dritten unteren Federn (403b) ummantelt sind, die zwischen der oberen Maschinenrahmenplatte (103) und den Enden der unteren Halbtteile der Federführungsstützen (404) gestützt werden.

3. Schallmischvorrichtung nach Anspruch 1, wobei die obere Reaktionsplatte (302) mit der unteren Reaktionsplatte (304) über eine Vielzahl von Reaktionssäulen (303) fest verbunden ist.

4. Schallmischvorrichtung nach Anspruch 3, wobei die Vielzahl von Reaktionssäulen (303) durch eine Vielzahl von Durchgangslöchern hindurchtreten, die entsprechend in der unteren Ladeplatte (407) geformt sind.

5. Schallmischvorrichtung nach Anspruch 1, wobei die obere Ladeplatte (402) mit der unteren Ladeplatte (407) durch eine Vielzahl von Ladeverbindungsstangen (405) fest verbunden ist.

6. Schallmischvorrichtung nach Anspruch 5, wobei jede Ladeverbindungsstange (304) nacheinander durch die obere Maschinenrahmenplatte (103), die zweite obere Feder (301a), die obere Reaktionsplatte (302) und die vierte obere Feder (406a) hindurchtritt.

7. Schallmischvorrichtung nach Anspruch 1, wobei die Vielzahl von ersten oberen Federn (201a) und die Vielzahl von ersten unteren Federn (201b) entsprechend auf einer oberen Oberfläche und einer unteren Oberfläche der befestigten Platte (202) in einer ringförmigen Anordnung angeordnet sind; oder
 wobei die Vielzahl von zweiten oberen Federn (301a) und die Vielzahl von zweiten unteren Federn (301b) entspre-

chend auf der oberen Reaktionsplatte (302) und der unteren Reaktionsplatte (304) in einer ringförmigen Anordnung angeordnet sind.

8. Schallmischvorrichtung nach Anspruch 1, wobei die Mittelachsen jeder ersten oberen Feder (201a) und jeder ersten unteren Feder (201b) zusammenfallen;
wobei die Mittelachsen jeder zweiten oberen Feder (301a) und jeder zweiten unteren Feder (301b) zusammenfallen;
oder
wobei die Mittelachsen jeder vierten oberen Feder (406a) und jeder vierten unteren Feder (406b) zusammenfallen.

9. Schallmischvorrichtung nach Anspruch 1, wobei Aussparungen zum Halten der ersten oberen Federn (201a) in der oberen Oberfläche der befestigten Platte (202) und Aussparungen zum Halten der ersten unteren Federn (201b) in der unteren Oberfläche der befestigten Platte (202) vorgesehen sind;
wobei Aussparungen zum Halten der zweiten oberen Federn (301a) in der oberen Oberfläche der oberen Reaktionsplatte (302) vorgesehen sind und Aussparungen zum Halten der zweiten unteren Federn (301b) in der unteren Oberfläche der unteren Reaktionsplatte (304) vorgesehen sind; oder
wobei Aussparungen zum Halten der zweiten oberen Federn (301a) in der oberen Maschinenrahmenplatte (103) und Aussparungen zum Halten der zweiten unteren Federn (301b) in der unteren Maschinenrahmenplatte (101) vorgesehen sind;
wobei Aussparungen zum Halten der ersten oberen Federn (201a) in der unteren Oberfläche der oberen Reaktionsplatte (302) und Aussparungen zum Halten der ersten unteren Federn (201b) in der oberen Oberfläche der unteren Reaktionsplatte (304) vorgesehen sind; oder
wobei Aussparungen zum Halten der vierten oberen Federn (406a) in der unteren Oberfläche der oberen Reaktionsplatte (302) und Aussparungen zum Halten der vierten unteren Federn (406b) in der oberen Oberfläche der unteren Reaktionsplatte (304) vorgesehen sind.

10. Schallmischvorrichtung nach Anspruch 1, die ferner eine an der Vibrationserregungseinheit (2) befestigte Vibrationserregungsvorrichtung umfasst.

11. Schallmischvorrichtung nach Anspruch 10, wobei die Vibrationserregungsvorrichtung ein exzentrischer mechanischer Vibrationserreger, ein elektromagnetischer Vibrationserreger oder ein hydraulischer Vibrationserreger ist.

12. Schallmischvorrichtung nach Anspruch 1, wobei in der unteren Reaktionsplatte (304) eine Vielzahl von Löchern zur Gewichtsreduzierung geformt ist.

13. Schallmischvorrichtung nach Anspruch 1, die ferner einen Mischbehälter (401) umfasst, der zumindest an der Reaktionseinheit (3) oder der Ladeeinheit (4) befestigt ist.

14. Schallmischvorrichtung nach Anspruch 1, wobei die untere Maschinenrahmenplatte (101) mit der oberen Maschinenrahmenplatte (103) durch eine Vielzahl von Maschinenrahmenaufrichtstützen (102) fest verbunden ist.

15. Schallmischvorrichtung nach Anspruch 1, wobei
die ersten oberen Federn (201a) und die ersten unteren Federn (201b) auf der Vibrationserregungseinheit (2) in einer Presssitzweise angeordnet sind;
wobei die zweiten oberen Federn (301a) und die zweiten unteren Federn (301b) auf der Reaktionseinheit (3) in der Presssitzweise angeordnet sind; oder
wobei die vierten oberen Federn (406a) und die vierten unteren Federn (406b) auf der Ladeeinheit (4) in der Presssitzweise angeordnet sind.

Revendications

1. Dispositif de mélange sonore faisant appel à un système de résonance à trois degrés de liberté, comprenant :

un bâti de machine (1) comprenant une plaque de bâti de machine inférieure (101) et une plaque de bâti de machine supérieure (103) raccordée de manière fixe avec la plaque de bâti de machine inférieure (101) ;
une unité de réaction (3) comprenant une plaque de réaction supérieure (302) et une plaque de réaction inférieure (304) raccordée de manière fixe avec la plaque de réaction supérieure (302) ; l'unité de réaction (3) étant supportée dans la plaque de bâti de machine supérieure (103) et la plaque de bâti de machine inférieure (101)

du bâti de machine (1) par le biais d'une pluralité de deuxièmes ressorts supérieurs (301a) agencés sur une surface supérieure de la plaque de réaction supérieure (302) et une pluralité de deuxièmes ressorts inférieurs (301b) agencés sur une surface inférieure de la plaque de réaction inférieure (304) ;
 une unité d'excitation vibratoire (2) comprenant une plaque fixe (202) qui est supportée entre la plaque de réaction supérieure (302) et la plaque de réaction inférieure (304) par le biais d'une pluralité de premiers ressorts supérieurs (201a) agencés sur sa surface supérieure et une pluralité de premiers ressorts inférieurs (201b) sur sa surface inférieure ; et
 une unité de chargement (4) comprenant une plaque de chargement supérieure (402) et une plaque de chargement inférieure (407) raccordée de manière fixe à la plaque de chargement supérieure (402) ; la plaque de chargement inférieure étant agencée entre la plaque de réaction supérieure (302) et la plaque de réaction inférieure (304) de l'unité de réaction (3),
 dans lequel la plaque de chargement inférieure (407) est supportée entre la plaque de réaction supérieure (302) et la plaque de réaction inférieure (304) de l'unité de réaction (3) par le biais d'une pluralité de quatrièmes ressorts supérieurs (406a) et d'une pluralité de quatrièmes ressorts inférieurs (406b).

2. Dispositif de mélange sonore selon la revendication 1, dans lequel l'unité de chargement (4) comprend en outre une pluralité de montants de guidage de ressort (404) fixés sur une surface inférieure de la plaque de chargement supérieure (402) ;
 chaque montant de guidage de ressort (404) passe par la plaque de bâti de machine supérieure (103) afin de former une demi-partie supérieure et une demi-partie inférieure ;
 les demi-parties supérieures des montants de guidage de ressort (404) sont emmanchées avec des troisièmes ressorts supérieurs (403a) supportés entre une surface supérieure de la plaque de bâti de machine supérieure (103) et la surface inférieure de la plaque de chargement supérieure (402) ; et
 les demi-parties inférieures des montants de guidage de ressort (404) sont emmanchées avec des troisièmes ressorts inférieurs (403b) supportés entre la plaque de bâti de machine supérieure (103) et des extrémités des demi-parties inférieures des montants de guidage de ressort (404).
3. Dispositif de mélange sonore selon la revendication 1, dans lequel la plaque de réaction supérieure (302) est raccordée de manière fixe avec la plaque de réaction inférieure (304) par le biais d'une pluralité de colonnes de réaction (303).
4. Dispositif de mélange sonore selon la revendication 3, dans lequel la pluralité de colonnes de réaction (303) passe par une pluralité de trous débouchants formés dans la plaque de chargement inférieure (407), respectivement.
5. Dispositif de mélange sonore selon la revendication 1, dans lequel la plaque de chargement supérieure (402) est raccordée de manière fixe avec la plaque de chargement inférieure (407) par le biais d'une pluralité de tiges de raccordement de chargement (405).
6. Dispositif de mélange sonore selon la revendication 5, dans lequel chaque tige de raccordement de chargement (304) passe de manière séquentielle à travers la plaque de bâti de machine supérieure (103), le deuxième ressort supérieur (301a), la plaque de réaction supérieure (302) et le quatrième ressort supérieur (406a).
7. Dispositif de mélange sonore selon la revendication 1, dans lequel la pluralité de premiers ressorts supérieurs (201a) et la pluralité de premiers ressorts inférieurs (201b) sont agencées sur une surface supérieure et une surface inférieure de la plaque fixe (202) à la manière d'un réseau annulaire, respectivement ; ou bien la pluralité de deuxièmes ressorts supérieurs (301a) et la pluralité de deuxièmes ressorts inférieurs (301b) sont agencées sur la plaque de réaction supérieure (302) et la plaque de réaction inférieure (304) respectivement à la manière d'un réseau annulaire.
8. Dispositif de mélange sonore selon la revendication 1, dans lequel les axes centraux de chaque premier ressort supérieur (201a) et de chaque premier ressort inférieur (201b) coïncident ;
 les axes centraux de chaque deuxième ressort supérieur (301a) et de chaque deuxième ressort inférieur (301b) coïncident ; ou bien
 les axes centraux de chaque quatrième ressort supérieur (406a) et de chaque quatrième ressort inférieur (406b) coïncident.
9. Dispositif de mélange sonore selon la revendication 1, dans lequel des évidements pour maintenir les premiers ressorts supérieurs (201a) sont prévus dans la surface supérieure de la plaque fixe (202), et des évidements pour

maintenir les premiers ressorts inférieurs (201b) sont prévus dans la surface inférieure de la plaque fixe (202) ; les évidements pour maintenir les deuxièmes ressorts supérieurs (301a) sont prévus dans la surface supérieure de la plaque de réaction supérieure (302), et les évidements pour maintenir les deuxièmes ressorts inférieurs (301b) sont prévus dans la surface inférieure de la plaque de réaction inférieure (304) ; ou bien

les évidements pour maintenir les deuxièmes ressorts supérieurs (301a) sont prévus dans la plaque de bâti de machine supérieure (103) et les évidements pour maintenir les deuxièmes ressorts inférieurs (301b) sont prévus dans la plaque de bâti de machine inférieure (101) ;

les évidements pour maintenir les premiers ressorts supérieurs (201a) sont prévus dans la surface supérieure de la plaque de réaction supérieure (302), et les évidements pour maintenir les premiers ressorts inférieurs (201b) sont prévus dans la surface supérieure de la plaque de réaction inférieure (304) ; ou bien

les évidements pour maintenir les quatrièmes ressorts supérieurs (406a) dans la surface inférieure de la plaque de réaction supérieure (302), et les évidements pour maintenir les quatrièmes ressorts inférieurs (406b) sont prévus dans la surface supérieure de la plaque de réaction inférieure (304).

10. Dispositif de mélange sonore selon la revendication 1, comprenant en outre un dispositif d'excitation vibratoire fixé sur l'unité d'excitation vibratoire (2).

11. Dispositif de mélange sonore selon la revendication 10, dans lequel le dispositif d'excitation vibratoire est un dispositif d'excitation vibratoire mécanique excentrique, un dispositif d'excitation vibratoire électromagnétique ou un dispositif d'excitation vibratoire hydraulique.

12. Dispositif de mélange sonore selon la revendication 1, dans lequel une pluralité de trous pour réduire le poids sont formés dans la plaque de réaction inférieure (304).

13. Dispositif de mélange sonore selon la revendication 1, comprenant en outre un récipient de mélange (401) fixé au moins sur l'unité de réaction (3) ou sur l'unité de chargement (4).

14. Dispositif de mélange sonore selon la revendication 1, dans lequel la plaque de bâti de machine inférieure (101) est raccordée de manière fixe avec la plaque de bâti de machine supérieure (103) par le biais d'une pluralité de montants verticaux de bâti de machine (102).

15. Dispositif de mélange sonore selon la revendication 1, dans lequel :

les premiers ressorts supérieurs (201a) et les premiers ressorts inférieurs (201b) sont agencés sur l'unité d'excitation vibratoire (2) par montage à la presse ;

les deuxièmes ressorts supérieurs (301a) et les deuxièmes ressorts inférieurs (301b) sont agencés sur l'unité de réaction (3) par montage à la presse ; ou bien

les quatrièmes ressorts supérieurs (406a) et les quatrièmes ressorts inférieurs (406b) sont agencés sur l'unité de chargement (4) par montage à la presse.

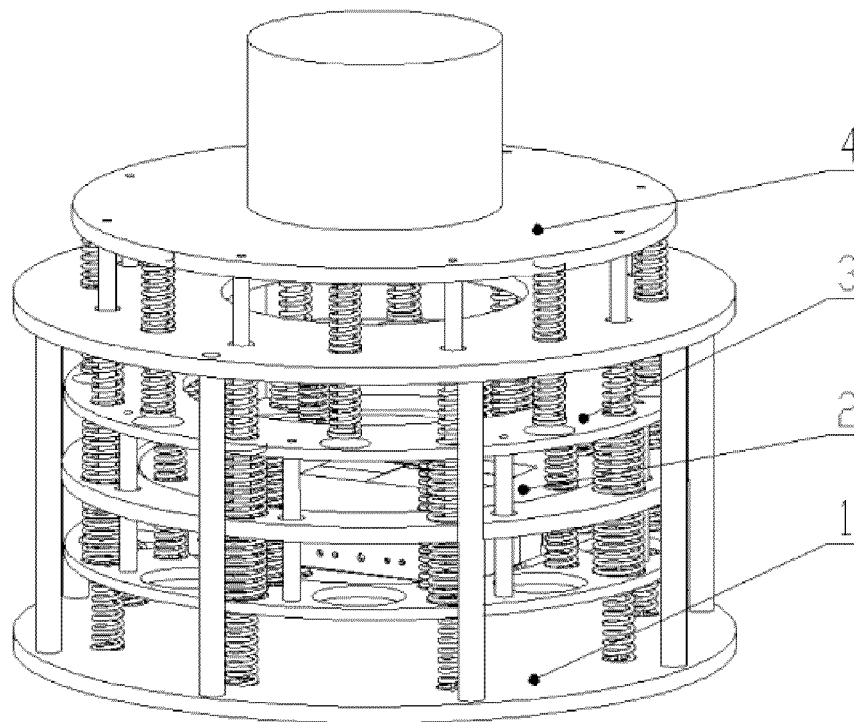


FIG. 1

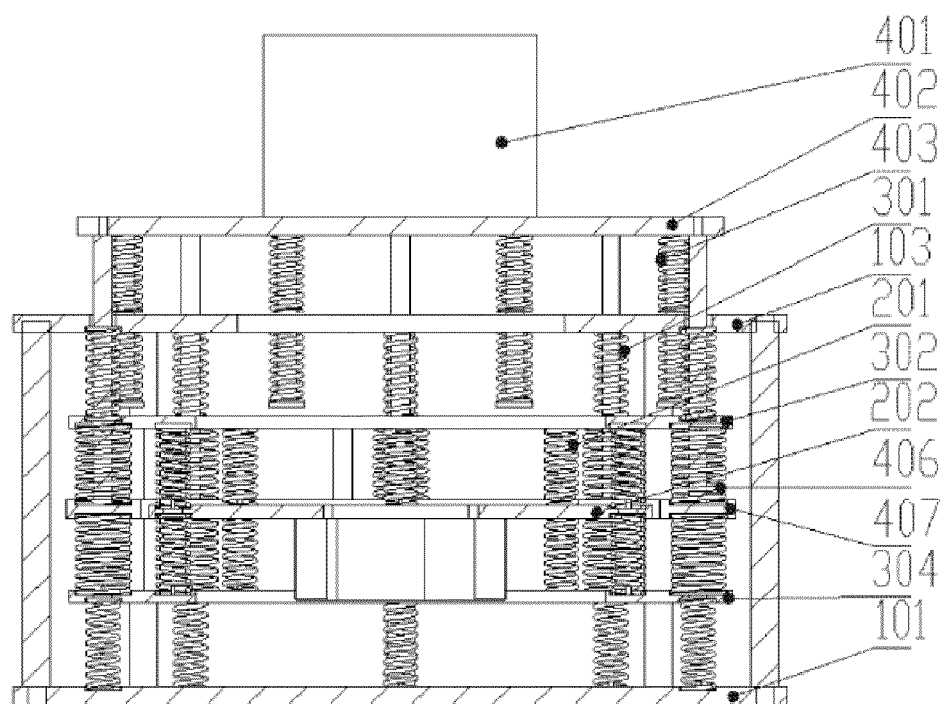


FIG. 2

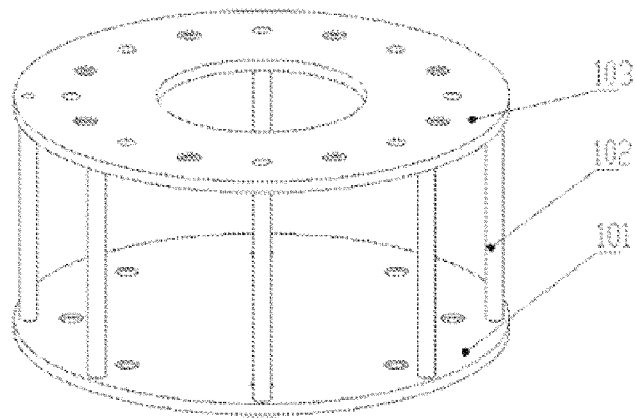


FIG. 3

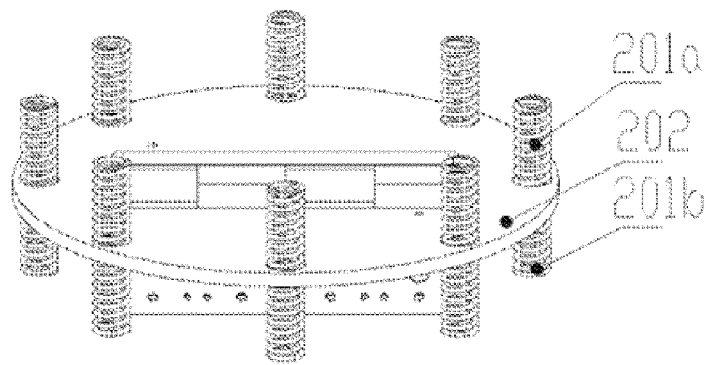


FIG. 4

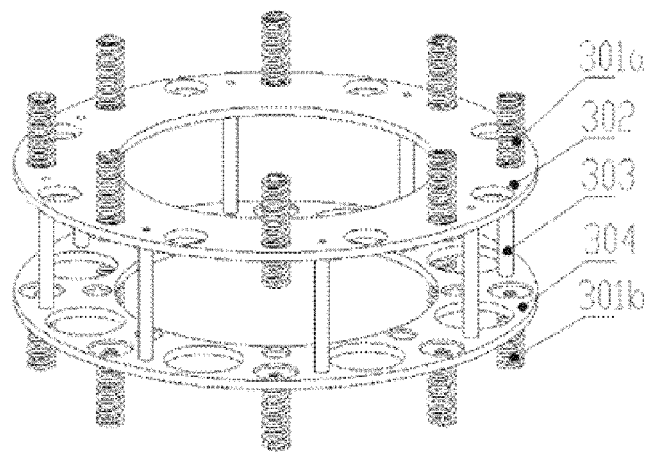


FIG. 5

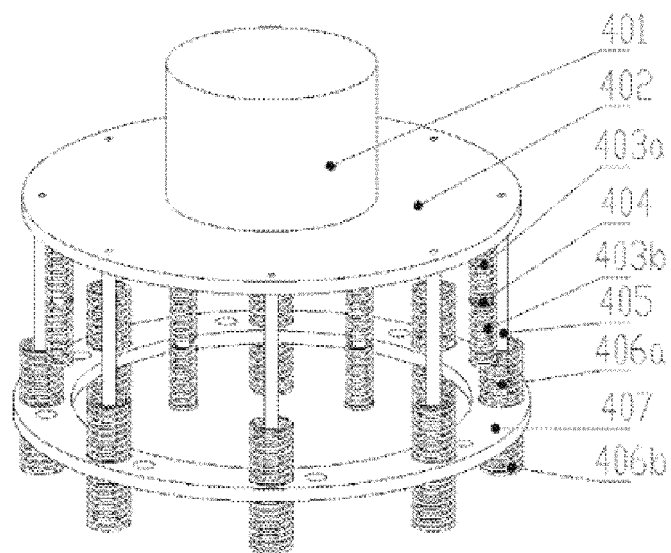


FIG. 6

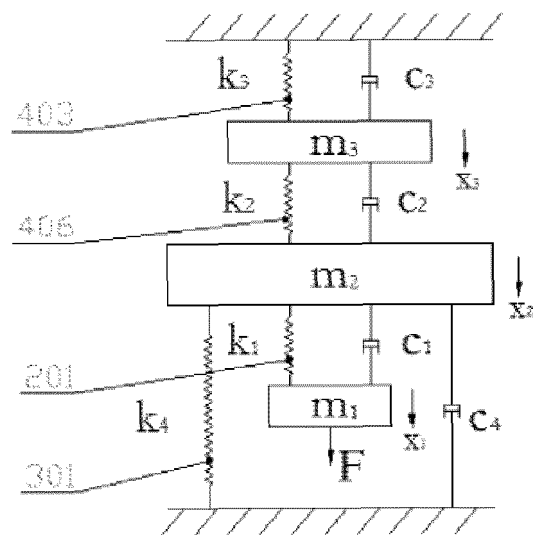


FIG. 7

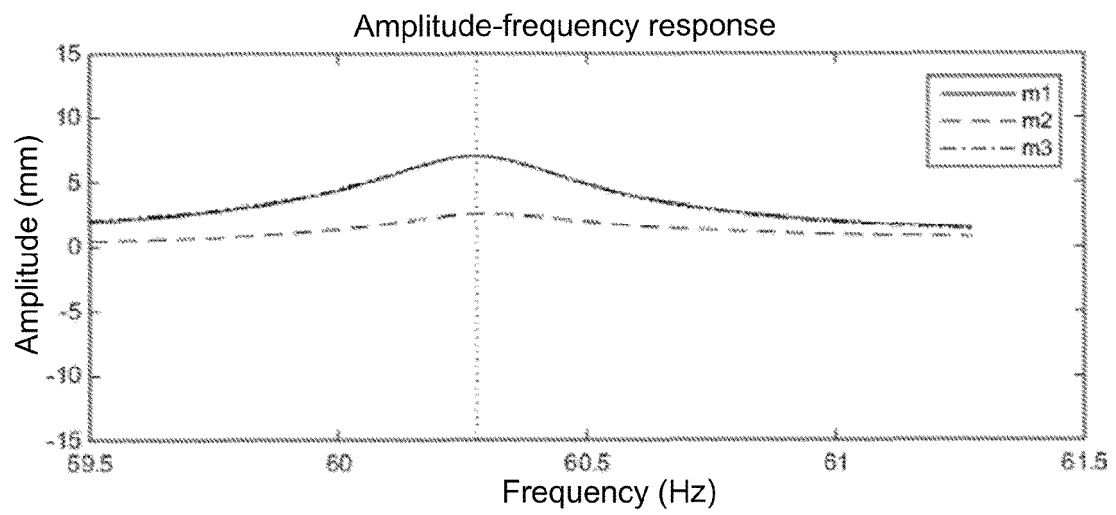


FIG. 8

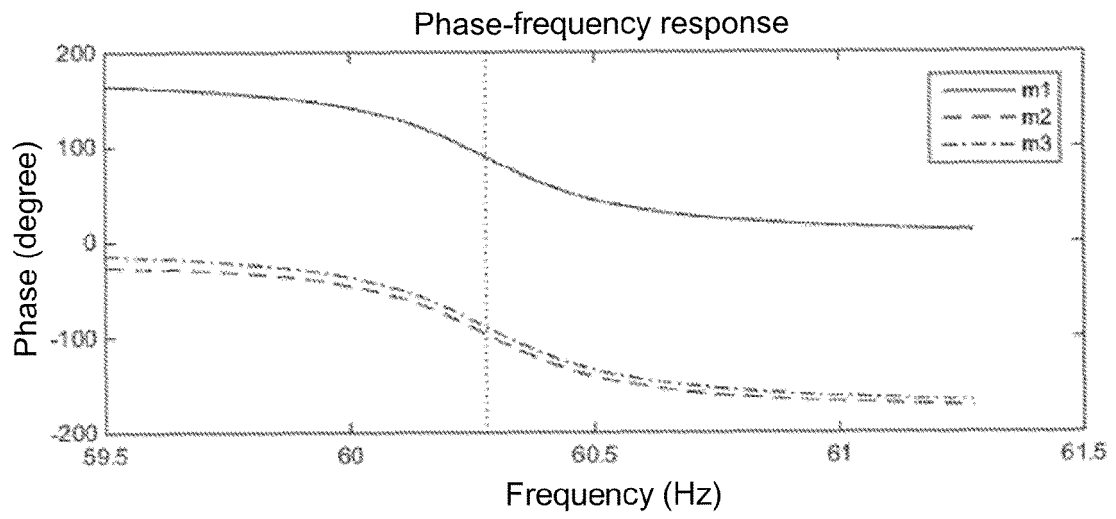


FIG. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 7188993 B1 [0003]