



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04B 7/005		A1	(11) International Publication Number: WO 98/36508 (43) International Publication Date: 20 August 1998 (20.08.98)			
(21) International Application Number: PCT/FI98/00043	(22) International Filing Date: 21 January 1998 (21.01.98)					
(30) Priority Data: 970293 24 January 1997 (24.01.97) FI						
(71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).			
(72) Inventors; and						
(75) Inventors/Applicants (for US only): HÄMÄLÄINEN, Seppo [FI/FI]; Saarnimäenkuja 6 B 20, FIN-02670 Espoo (FI). LAPPETELÄINEN, Antti [FI/FI]; Vallikuja 4 B 12, FIN-02600 Espoo (FI).						
(74) Agent: PATENT AGENCY COMPATENT LTD.; Teollisuuskatu 33, P.O. Box 156, FIN-00511 Helsinki (FI).						
(54) Title: POWER CONTROL METHOD OF DISCONTINUOUS TRANSMISSION						
(57) Abstract						
<p>According to the proposed method, the frequency of power control commands transmitted on a power control channel is changed according to the traffic. When the traffic becomes slower in at least one direction due to a DTX state, a slower transfer rate, asymmetric data transfer or for any other reason, the frequency of power control commands is lowered. Both the base station and the personal station may lower the frequency of the commands which they send. An alternative to changing the frequency of power control commands is to change the energy of power control bits. The duration of power control bits must hereby be extended, if a standard bit error ratio is desired. If the system is frequency-divided and/or time-divided and uses frequency control command of several bits, the length of the command word may be shortened in addition to or as an alternative to the change in frequency. The power control algorithm may be changed several times during a traffic connection.</p>						
<pre> graph TD TR1[TRAFFIC] --> C1[CHANGE IN DATA TRANSFER RATE REQUIREMENT] C1 -- 711 --> C2[CHANGE OF TRANSMISSION FRAME IN ACCORDANCE WITH TRANSFER RATE INFORMATION] C2 -- 712 --> C3[ADAPTATION OF POWER CONTROL TO NEW RATE] C3 -- 715 --> TR2[TRAFFIC] TR2 --> D1{DISCONNECTION?} D1 -- NO --> C1 D1 -- YES --> D2[DISCONNECTION] I[IDENTIFICATION OF TRANSFER RATE FROM TYPE OF RECEIVED FRAME] -- 813 --> C4[CHANGE IN POWER CONTROL PROCESS] C4 -- 714 --> D2 </pre>						

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		

Power control method of discontinuous transmission

Field of the invention

This invention concerns a system where the transmission power between base station and personal station is controlled during radio communication. In particular, the invention concerns such a method for use in cellular networks by which power control commands are sent to the personal station and from the personal station to the base station.

Background of the invention

It must be possible in all cellular systems to control at least the transmission power of the personal station for its transmission to arrive at the base station with a sufficient signal-to-noise ratio irrespective of the distance between personal station and base station. Power transmission will be explained in the following using the CDMA system (Code Division Multiple Access) as an example. Figure 1 shows a CDMA forward traffic channel. This comprises the following code canals: a pilot channel, one synchronization channel, from one to seven paging channels and no more than 61 traffic channels. The maximum number is when there is only one paging channel besides the synchronization channel. Each code channel is orthogonally hashed and thus spread out by using the phase quadrature couple of the random noise sequence. At the base station several forward traffic CDMA channels may be used by way of frequency-divided multiplexing. The structure shown in Figure 1 is presented in Proposed CDMA PCS Standard, Joint Technical Committee (JTC), September 23, 1994. This proposal is also known by the name IS-95. Reference will be made in the following to a CDMA system according to this standard, although the invention is suitable for any kind of system.

An unmodulated spread spectrum signal is sent continuously on the pilot channel and it is used for synchronization by the PS (Personal Stations).

An encoded, interleaved, spread and modulated spread spectrum signal is sent on the synchronization channel. The personal station uses this signal for achieving a preliminary time synchronization. The channel bit rate is 1200 bps and the frame duration is 26,666 ms. No sub-channel relaying power control commands must be included in the synchronization channel.

An encoded, interleaved, spread and modulated spread spectrum signal is sent on the paging channel. The data rate is 9600 or 4800 bps and the frame duration is 20 ms. The base station uses the paging channel for transmit overhead information and personal station specific information. The 5 number of these channels may vary in one CDMA forward traffic channel, however, the maximum number is 7 channels.

The traffic channel is used for transmitting user and signaling information to the PS (Personal Station). The maximum number of simultaneous forward traffic channels supported by one CDMA traffic 10 channel is 63 minus the number of call and synchronization channels operating on one and the same CDMA traffic channel.

The frame structure itself is the same both on the forward traffic channel and on the reverse traffic channel. The information is transmitted as frames, the length of which is 20 ms. The base station and the personal 15 station may send information at a varying data rate. Data transfer rates when using rate set 1 are 9600, 4800, 2400 and 1200 bps respectively while the corresponding frame bit numbers at different rates are 192, 96, 48 and 24 bits respectively. When using rate set 2, data transfer rates are 14400, 7200, 3600 and 1800 bps respectively while the corresponding frame bit numbers 20 are 288, 144, 72 and 36 bits. The frame bits are formed by information bits, frame quality indicator bits and encoder tail bits. The essential thing is that in both directions the structure of the traffic frame is different at different transfer rates, so when identifying the frame structure the transfer rate will also be known.

25 Such modulation symbols which are transferred at a lower data rate are also transmitted with a lower energy, but although the data rate varies from one frame to another, the symbol modulation rate is kept constant. When entering E_s energy per symbol and E_b energy per information bit, the following Table 1 according to the standard will apply:

30

Data rate	Energy per modulation symbol
9600	$E_s = E_b/2$
4800	$E_s = E_b/4$
2400	$E_s = E_b/8$
1200	$E_s = E_b/16$
14400	$E_s = E_b/4$
7200	$E_s = E_b/8$
3600	$E_s = E_b/16$
1800	$E_s = E_b/32$

Table 1

Each forward traffic channel contains a power control sub-channel, which is used for transmitting such power control commands to the personal station during the communication, in response to which the personal station will change its transmission power. The power control channel is described in item 3.1.3.1.8 of the specification proposal.

From its received personal station signal the base station calculates the signal power always with intervals of 1.25 ms, which time corresponds to 16 modulation symbols. Judging by the signal power the base station will command the personal station to increase or decrease the transmission power. Thus a big power control loop is formed, which comprises the personal station, the base station and the two-way radio channel in between. The base station may also control its own transmission power to correspond with the power measurement reports which it receives from the personal station. This is so because the personal station constantly keeps statistics on frame errors and sends the power measurement report regularly or when a certain threshold value is exceeded.

The power control sub-channel is formed in such a way that power control bits are sent constantly among the normal traffic channel bits. The power control bits are repeated cyclically at intervals of 1.25 ms. Hereby the bit rate of the power control channel is 800 bps. Bit 0 means that the personal station must increase its transmission power, and correspondingly bit 1 means a command to lower the transmission power. The bits are located in the frame so that from the completed traffic frame, which is a convolution coded and interleaved frame formed from modulation symbols,

two successive modulation symbols are removed at regular intervals and they are replaced with a power control bit. Thus, the time width of one power control bit is 104.166 ms. The procedure is generally known in the field and it is called symbol puncturing. The puncturing figure shows which symbols are 5 removed from the frame and replaced with power control bits. The power control bit is transmitted with energy E_b .

Having received the power control bit, the personal station will increase or decrease its transmission power in the direction indicated by the bit. The power control bit is considered genuine, if it was received in that 10 1.25 ms time slot, which is the second time slot counting from the time slot in which the personal station has transmitted. The change of power level is a small step, and the standard determines that one bit changes the power level by 1 dB. A great change of the power level will thus require transmission of several power control bits.

15 As is done in FDD/TDMA systems, DTX (Discontinuous Transmission) is also used in CDMA systems. In a broader sense, DTX also includes an asymmetric case where information is transferred in one direction only, while acknowledgements are transferred in the opposite direction. An Internet connection is an example of such a situation. Power 20 control commands are sent to the receiving party at a normal frequency even if the party is sending information only occasionally.

It is possible to go over to the DTX state in different ways. Firstly, when the personal station discovers that the data transfer rate which it needs is dropping, it will first send to the base station information on the data rate to 25 be used in the following radio frame and then from the next frame forward it will use the rate which it stated. Secondly, the personal station may change the transfer rate during the connection without further ado. The base station will learn the transfer rate from the frame structure, because, as was said above, when the frame structure is identified the used transfer rate will also 30 be known, since the frame structure varies at different transfer rates.

It is a problem in the presented CDMA system and also in other known CDMA systems that power control commands of one or several bits are always sent at the same standard frequency and energy. Power control is fast so that the transmission power will comply as closely as possible with 35 changes in the radio path. In addition, power control commands are sent both in the forward direction and in the reverse direction at the same

frequency and the power control will thus not be affected by the transfer rate used, by asymmetry of the data transfer or by the fact that either party may be in the DTX state. The outcome is, that in the DTX state and when using a reduced data transfer rate, the power control will use a disproportionately large share of the radio link's capacity.

It is thus an objective of the present invention to bring about a method of power control which adapts to the data transfer situation, releasing radio link capacity for other use in the DTX state and at a reduced data transfer rate.

10 The objective is achieved with the method defined in the independent claims.

Brief summary of the invention

According to the proposed method, the frequency of power control commands to be sent on a power control channel is changed according to the traffic. When the traffic becomes slower at least in one direction, due to a DTX state, a lower transfer rate, asymmetric data transfer or any other reason, the frequency of power control commands is lowered. Both the base station and the personal station may lower the frequency of the commands they are sending. It is also possible to proceed so that the party with less need to transmit data or with no transmission at all will be sent power control commands only seldom, whereas this same party itself sends power control commands either at a normal frequency, if it receives information at a high rate, or at a lowered frequency, if the reception rate (the other party's transmission rate) is reduced.

An alternative to changing the frequency of power control commands is to change the energy of power control bits. If it is desirable to keep constant the bit error ratio of received power control bits, the duration of the power control bit must be extended, because the receiver must gather energy over a longer time to be able reliably to express the bit. If an increase of the bit error ratio is allowed in reception, the power control bit duration may be kept constant, even though its energy is reduced. It is an advantage of the latter case that no changes need be made in the receiver.

35 If the system is time-divided and a frequency control command of several bits is used therein, the length of the command word may be shortened in addition to or as an alternative to the change in frequency.

Since lowered power control will not comply so quickly with changing circumstances as power control, it may cause an error in the transmission power of the controlled transmitter. For this reason, any error caused by slower power control may be compensated for by increasing the 5 size of power control steps to be bigger than the size of quick power control steps.

Brief description of the drawings

The invention will be described in greater detail referring to the 10 appended drawings, wherein

- Figure 1 shows radio channels in a CDMA system;
- Figure 2 illustrates known power control;
- Figure 3 shows power control with the reverse channel link in a DTX state;
- 15 Figure 4 shows power control with the forward channel link in a DTX state;
- Figure 5 shows power control in asymmetric transfer;
- Figures 6a-6b show transmission energy as a function of time in different cases;
- Figure 7 is a block diagram of a possible embodiment; and
- 20 Figure 8 is a block diagram of the embodiment.

Detailed description of the invention

Figure 2 shows a traffic connection between a personal station PS and a base transceiver station BTS in a CDMA system. As regards power 25 control commands, data transfer is here in accordance with the known technology, so in the forward channel the base station sends power control commands among a stream of information bits at a standard frequency. For the sake of clarity, the information is here shown by big arrows while the power control commands are shown by small arrows. Correspondingly in the 30 reverse channel, personal station PS sends power control commands among a stream of information bits at a standard frequency. As was explained earlier, in known systems power control commands are sent both on the reverse channel and on the forward channel at a standard frequency irrespective of the information transfer rate or whether any information at all 35 is sent. But in the proposed method the frequency of those power control

commands is reduced which are transmitted to the party which needs less transmission or which does not transmit at all.

Figure 3 shows a case where base transceiver station BTS sends information to a personal station, but the personal station sends no information to the base transceiver station. The reverse channel is hereby in a DTX state. Its information rate is hereby low and the channel's transmission power requirement and, analogously, its reception power are low. Such a situation is very usual when the personal station is in an Internet connection, whereby the main information flow is from the network to the personal station. Since only little information is sent on the reverse channel as the personal station sends upper layer acknowledgements etc. only occasionally, there is no need for any quick control of the personal station's transmission power. For this reason, the frequency of power control commands to be sent to the personal station is reduced according to the invention. This is illustrated in the figures by leaving out every second power control command, whereby small arrows formed by dashed lines show the commands which have been left out. On the other hand, power control commands must be sent frequently on the reverse channel, e.g. at the normal frequency of the system, because the personal station must control the transmission of the base station which sends much information.

Figure 4 shows a case where the personal station sends information to base transceiver station BTS, but the base station sends no information to the personal station. The forward channel is hereby in a DTX state. Such a situation is very usual when the personal station sends a fax or files towards the network. According to the invention, the frequency is now reduced as regards the power control commands to be sent on the reverse channel to the base station. This is illustrated in the figure by leaving out every second power control command, whereby the commands which have been left out are indicated by small arrows formed by dashed lines. On the other hand, power control commands are sent frequently on the forward channel e.g. at the system's normal frequency, because the base station must control the transmission of the personal station which is sending much information.

The cases illustrated above concern a case where the reverse channel or the forward channel is in a DTX state. The method can be used as well in a case where data transfer is asymmetric in such a way that there

is transfer in both directions, but the rate is higher in one direction than in the other direction. The transmission frequency of power control commands is hereby also higher in that link where less information is sent. A case of this type is illustrated in Figure 5. There less information is sent on the reverse 5 channel than on the forward channel, so power control commands are sent at a higher frequency on the reverse channel than on the forward channel.

The method is also well suited for use in data transfer where the transfer rate will change in one direction or in both directions during the communication. The transmission frequency of power control commands 10 sent in one direction is hereby controlled in proportion to the change in data transfer rate in the opposite direction.

Such cases were described above where resources of the radio channel are released by lowering the transmission frequency of power control commands. The same result is achieved also in alternative ways.

15 One alternative is to shorten the length of the command word in such systems where the command word is formed by several bits. Such systems are time-divided and/or frequency-divided systems.

Another alternative is to control the energy of the individual power 20 control bit. When e.g. changing into a DTX state in one direction, the energy of power control bits to be sent in the opposite direction is lowered. If it is desirable to keep the bit error ratio of received power control bits constant, the duration of the power control bits must be extended, since the receiver must collect energy over a longer time to be able reliably to express the bit. Bit duration is extended by sending it in several parts. This alternative is 25 especially advantageous in a system according to Proposed CDMA PCS Standard, Joint Technical Committee (JTC), since no changes need be made in the transmitter, but the necessary changes are limited to the power control algorithm. If an increase of the bit error ratio is allowed in reception, the duration of power control bits may be kept constant, even though its 30 energy is reduced. This case has the advantage that no changes need be made in the receiver.

Figures 6a-6c illustrate ways of implementation of the proposed method. These illustrate transmission energy as a function of time. Figure 6a shows a state-of-the-art method where power control commands are sent at a standard frequency in a flow of information and with the same energy E_b 35 with which information symbols are transmitted.

Figure 6b shows an embodiment of the method according to the invention where the transmission frequency of power control commands has been lowered, but their transmission energy E_b is the same as with the information.

5 Figure 6c shows an embodiment where the energy of power control bits has been reduced to be lower than the transmission energy E_b of information symbols. The duration of power control bits is hereby extended by sending the bit, e.g. bit a, in two parts. One power control bit is hereby received during a longer time, so the receiver will thus be able reliably to
10 express the power control bit.

Figure 7 shows a block diagram of some possible events in personal station PS and in base transceiver station BTS. It is assumed that PS and BTS are first in communication using normal, that is quick power control. When personal station PS notices that its required data transfer rate
15 is falling, step 711, it places in the traffic frame information on the lower data transfer rate it requires and sends the frame over the radio interface to base station BTS, step 712. The information may concern e.g. only the transmission of the personal station, that is, the reverse channel, its reception, that is, the forward channel, or the information may concern both directions.
20 Thus the information may tell that nothing will be sent on the reverse channel for the time being, whereby the personal station is in a DTX state on this channel.

The base station separates the information on the new transfer rate from the frame it has received, step 713, and changes its power control process in accordance with the changed transfer rate, step 714. In the case
25 of a DTX state on the reverse channel it would transmit power control commands scarcely, with reduced energy or it would shorten the length of the command word. Before this, the personal station has adapted its own power control to comply with the changed data transfer rate, so it is able
30 correctly to pick up power control commands from the frames it receives. Likewise, it is able to transmit power control commands to the base station in the manner according to the invention which complies with the transmission rate of the base station.

The data transfer rate may remain the same until the end of the
35 communication or it may be changed again, step 716. The latter case means returning to step 711 from which progress is as described. It is thus possible

again to begin using a normal data transfer rate or any other lowered rate or to disconnect. A dashed line shows signaling between PS and BTS which may be required when disconnecting.

Figure 8 shows the same main features as Figure 7, but adapted 5 to a system according to standard proposal IS-95. The difference is that since according to this standard the structure of the traffic frame is different at different transfer rates, the personal station need not separately notify of the changed transfer rate. Without further ado, it begins using a frame structure in accordance with the new transfer rate, step 812. From the 10 received frame structure the base station identifies the new transfer rate, step 813, and changes its power control to be in accordance with the invention, step 714. The personal station has also changed its own power control, step 714, so the operation may continue using the method according to the invention. During the communication the power control may again be 15 changed or this changed power control may be used until disconnection, as was described in connection with Figure 7.

It was proposed in connection with Figures 7 and 8 that the personal station originates the change, but the base station may be the originator as well and it may inform the personal station of the new rates, 20 whereby both will change their power control algorithms according to the new situation. It is also possible that the personal station and the network negotiate before the operation begins or that they agree on rates during the operation and having reached an agreement they will set their power control algorithms accordingly.

25 When the frequency or energy of power control commands is calculated in accordance with the proposed method, the requirement of the link E_b/N_0 (energy of received signal/energy of noise) will grow compared to a case where power control commands are sent at a high frequency. This is so because a slower power control is not able to follow all signal changes. 30 However, the increase in the E_b/N_0 requirement is very small and the system may be dimensioned so that despite the said increase a total benefit is achieved. It should also be noted that since the reception power required by the DTX connection is significantly smaller than the reception power of active users, minor errors caused by slower power control are not significant. 35 Besides, errors can be compensated for by increasing the change of the transmitter power step which is caused by the power control command.

The proposed method can be embodied in many ways keeping within the definitions of the claims. For example, it is possible that only the base station changes the power control frequency or the energy of the power control bits which it sends while the personal station always functions in the same way. The invention can then be easily embodied in an IS-95 system. Some personal stations may be equipped with characteristics according to the invention and those which have quick power control according to the specification will operate in a normal manner even though power control commands arrive at a lower frequency. The personal stations simply note that e.g. every second power control command does not arrive.

In some cases the power control frequency or the energy of power control bits may be changed in reverse proportion to the load in the opposite transfer direction. For example, if at some moment most operation takes place on the forward channel, that is, from base station to personal station, and there is only slight traffic on the reverse channel, the power control frequency on the reverse channel can be kept low. The situation is such e.g. if five personal stations receive information from the network at the same time while only one transmits in the direction of the network.

Claims

1. Method of controlling the transmission power used in a digital radio link in a system where a base station and a personal station are parties to the radio connection and during operation between them either 5 party may send a power control command, which will change the transmission power of the other party,
characterized in that
when the transmission rate of the first party changes it will inform the second party of the new rate,
10 in response to the message the second party changes the power control command to be sent to the first party to be in accordance with the new rate,
the first party changes the reception of its own power control command to be in accordance with the new rate.
15 2. Method as defined in claim 1, characterized in that when the transfer rate of the second party changes:
the first party will change the power control command to be sent to the second party,
the second party will change the reception of its own power 20 control command.
3. Method as defined in claim 1, characterized in that the power control command is formed of power control commands and when the transmission rate of the first party becomes slower the second party will lower the frequency of power control commands to be sent to the first party
25 and, correspondingly, when the transmission rate becomes higher, the second party will increase the frequency of power control commands.
4. Method as defined in claim 1, characterized in that the power control command is formed of power control commands of several bits and when the transmission rate of the first party is lowered, the second party 30 will shorten the length of the power control command and, correspondingly, when the transmission rate becomes higher the second party will extend the length of the power control command.
35 5. Method as defined in claim 1, characterized in that the power control command is formed of power control commands and when the transmission rate of the first party is lowered, the second party will lower the energy of power control commands to be sent to the first party and,

correspondingly, when the transmission rate of the first party becomes higher, the second party will increase the energy of power control commands.

6. Method as defined in claim 1, characterized in that the
5 change in transmission rate of the first party is declared in a field of the transmission frame reserved for this purpose.

7. Method as defined in claim 1, characterized in that in such a system where there is an individual transmission frame for each transfer rate, a change in transmission rate of the first party is declared by
10 changing the structure of the transmission frame directly to correspond with the new transfer rate.

8. Method as defined in claim 1 or 2, characterized in that the power control command has a quick state and a slow state, of which the slow state is used when the transmission of the commanded party is in a
15 DTX state.

9. Method as defined in claim 1 or 2, characterized in that the power control command has several states, whereby when the transmission rate of a party changes, the opposite party will send the power control command in one of these states.

10. Method as defined in claim 1 or 2, characterized in that when the power control command changes, the size of the transmitter's power control step is also changed.

11. Method as defined in claim 1 or 2, characterized in that the power control command in one direction is changed in reverse proportion
25 to the load of the opposite transfer direction.

1/5

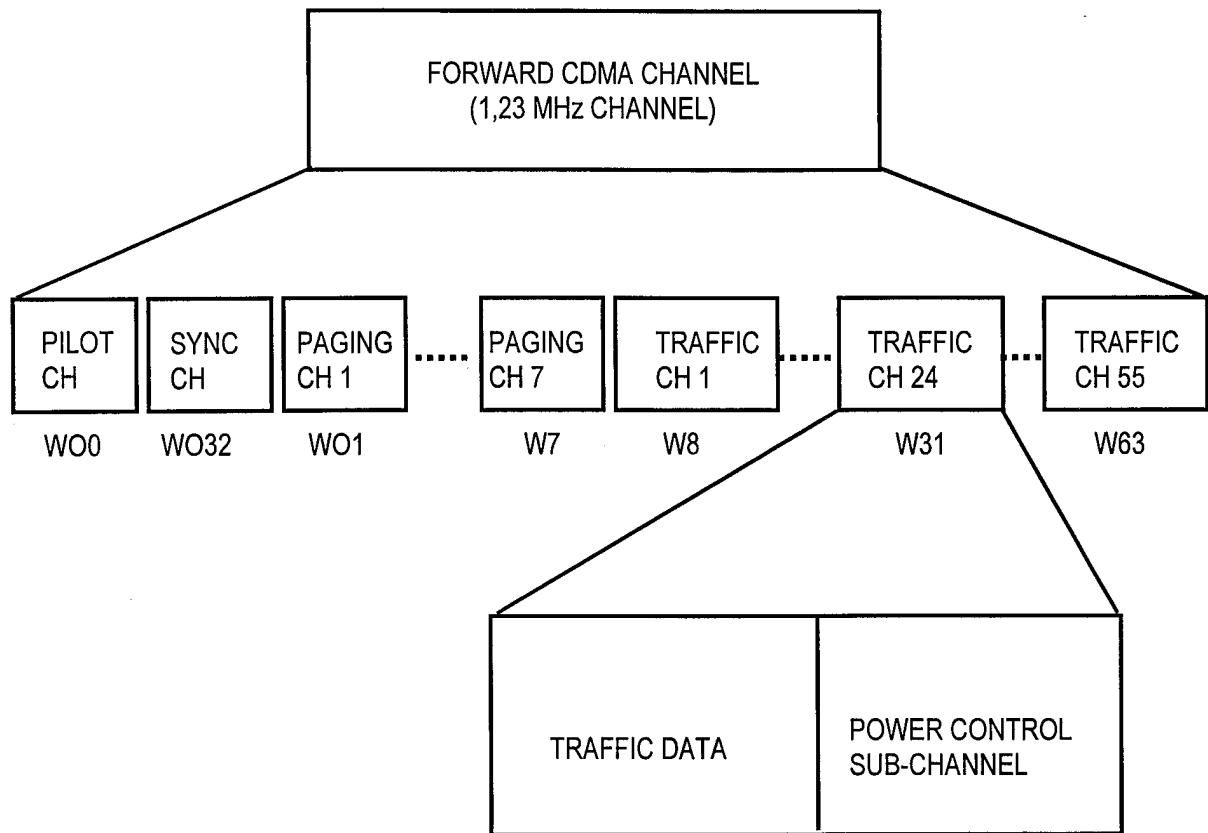


Fig. 1

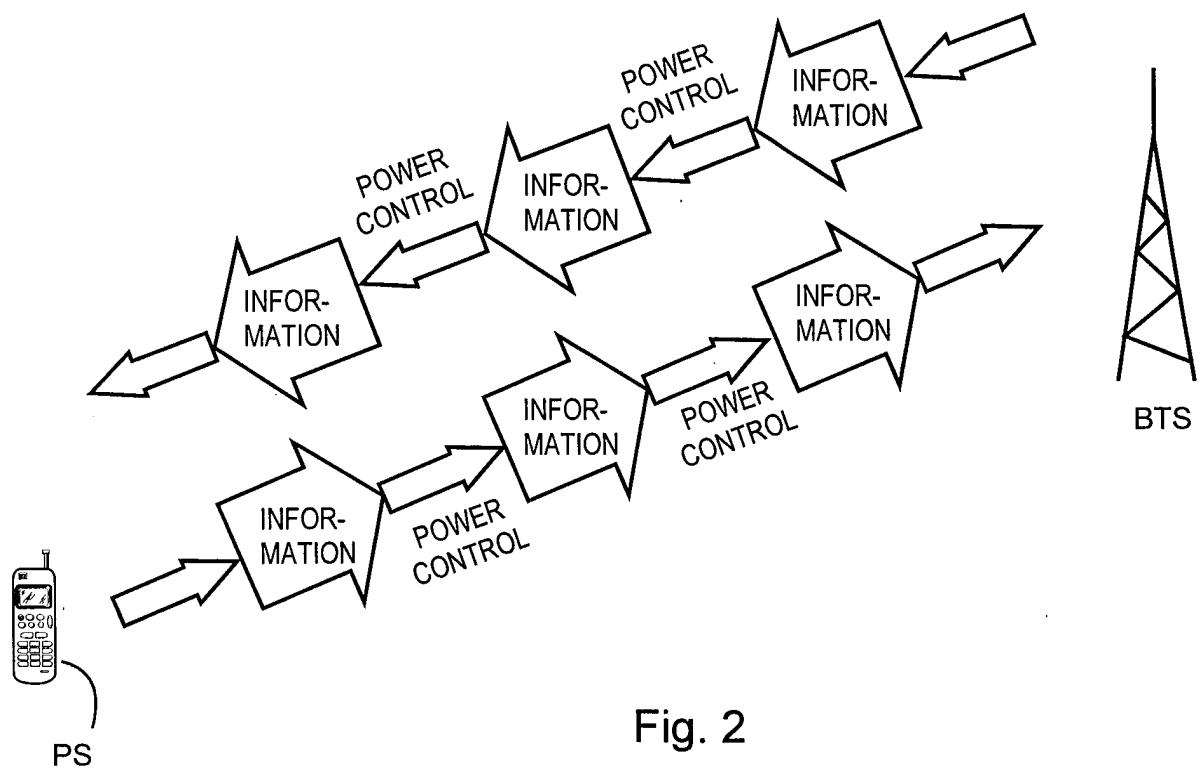


Fig. 2

2/5

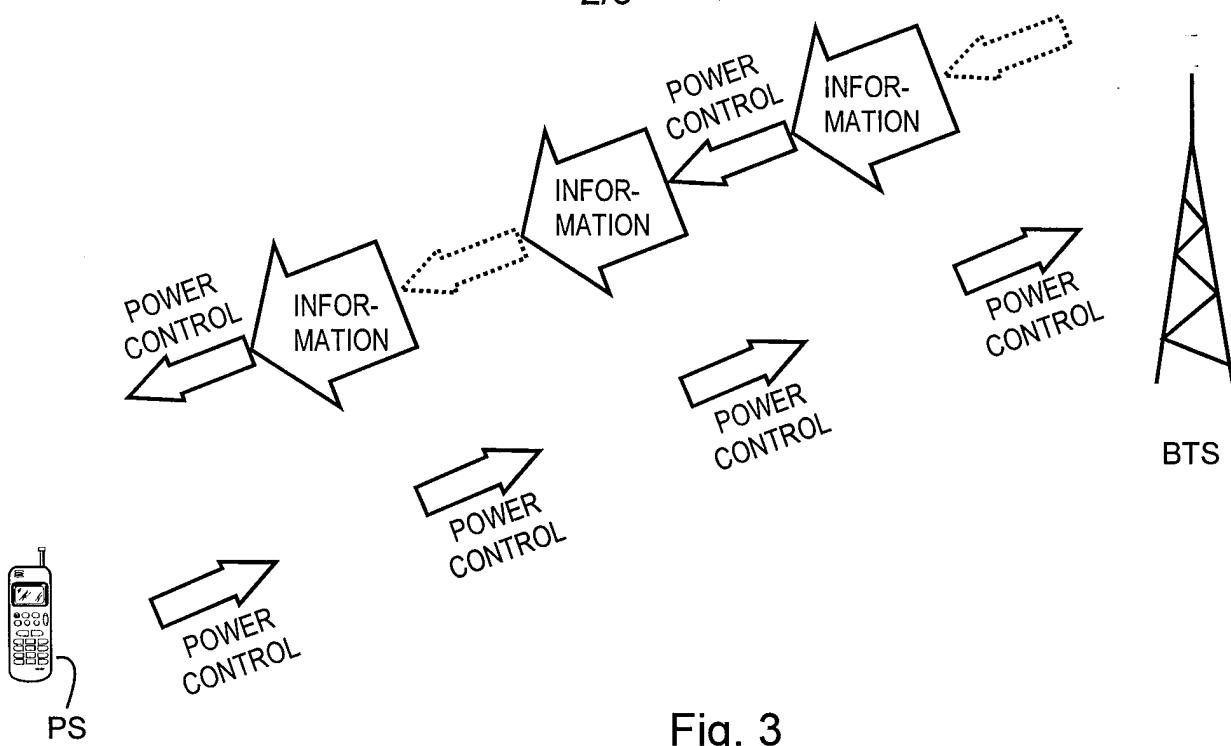


Fig. 3

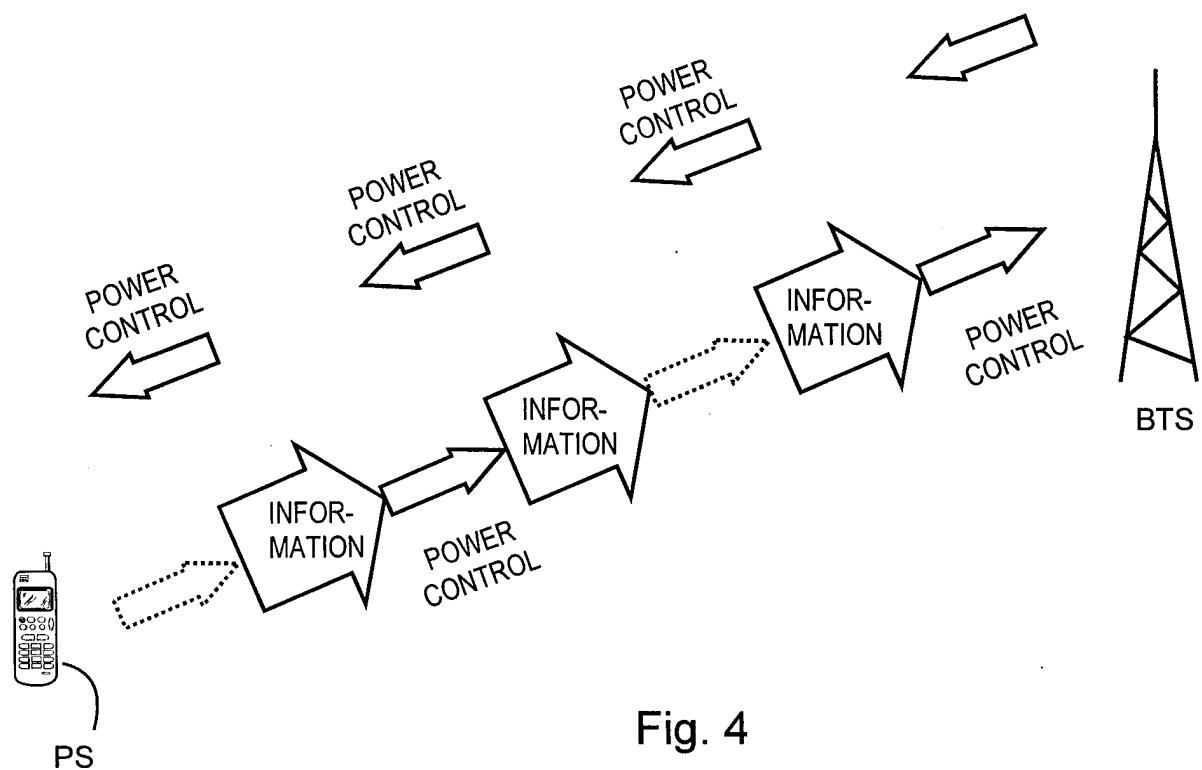


Fig. 4

3/5

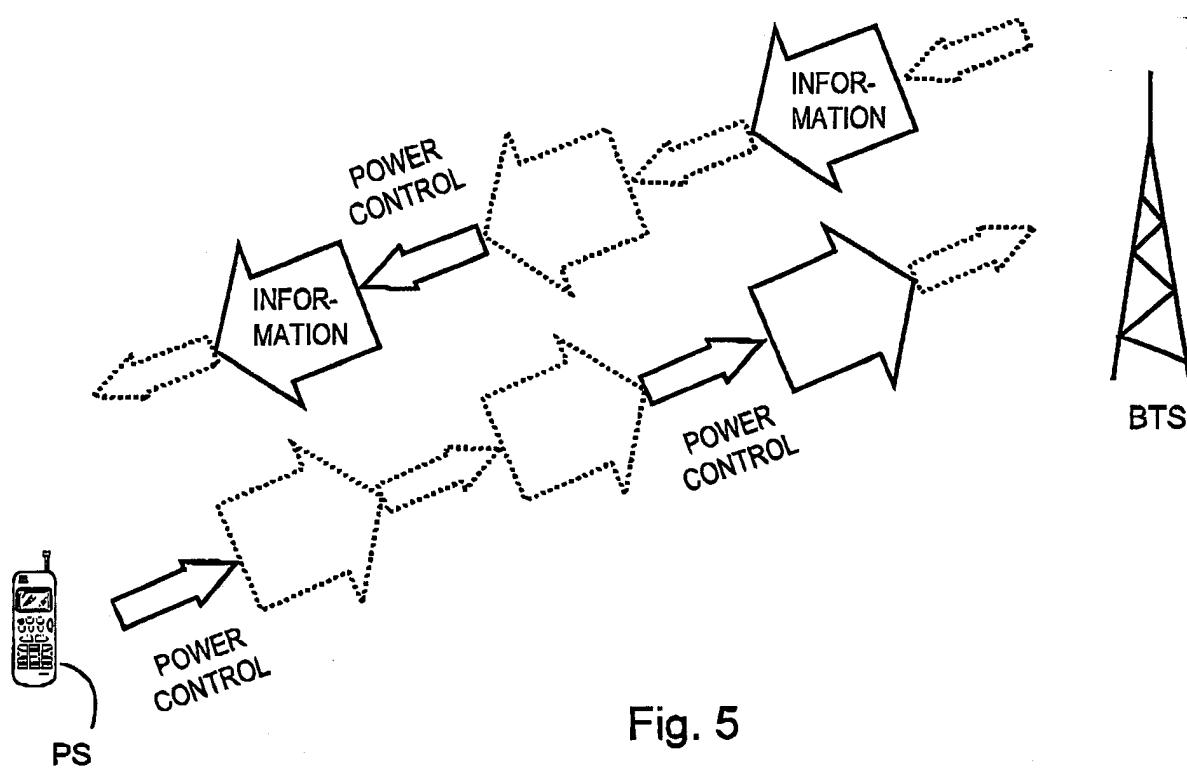


Fig. 5

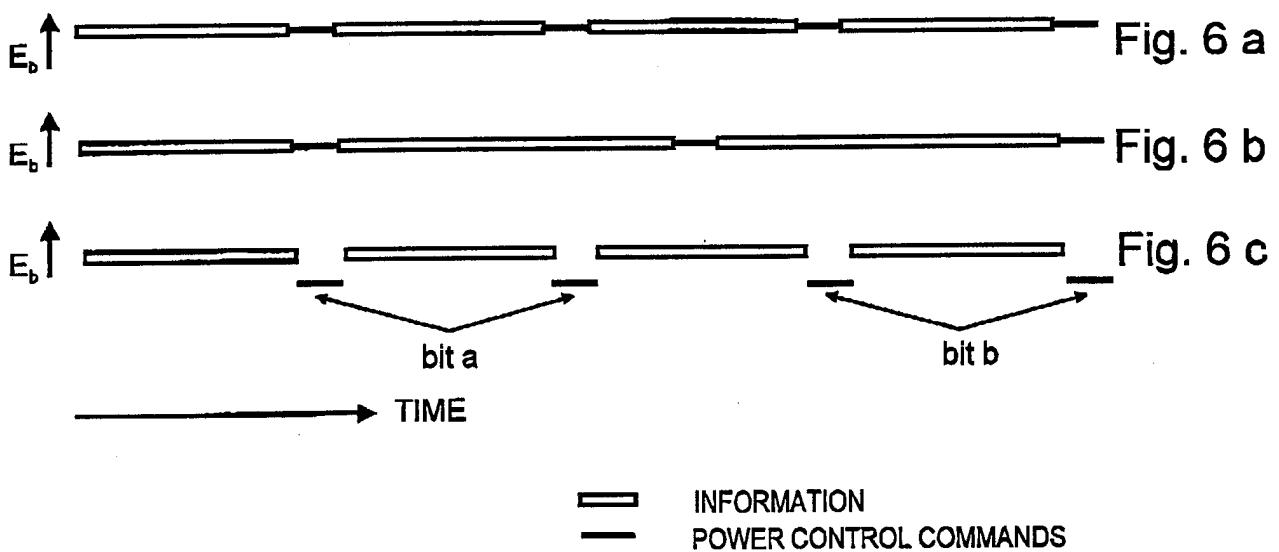


Fig. 6

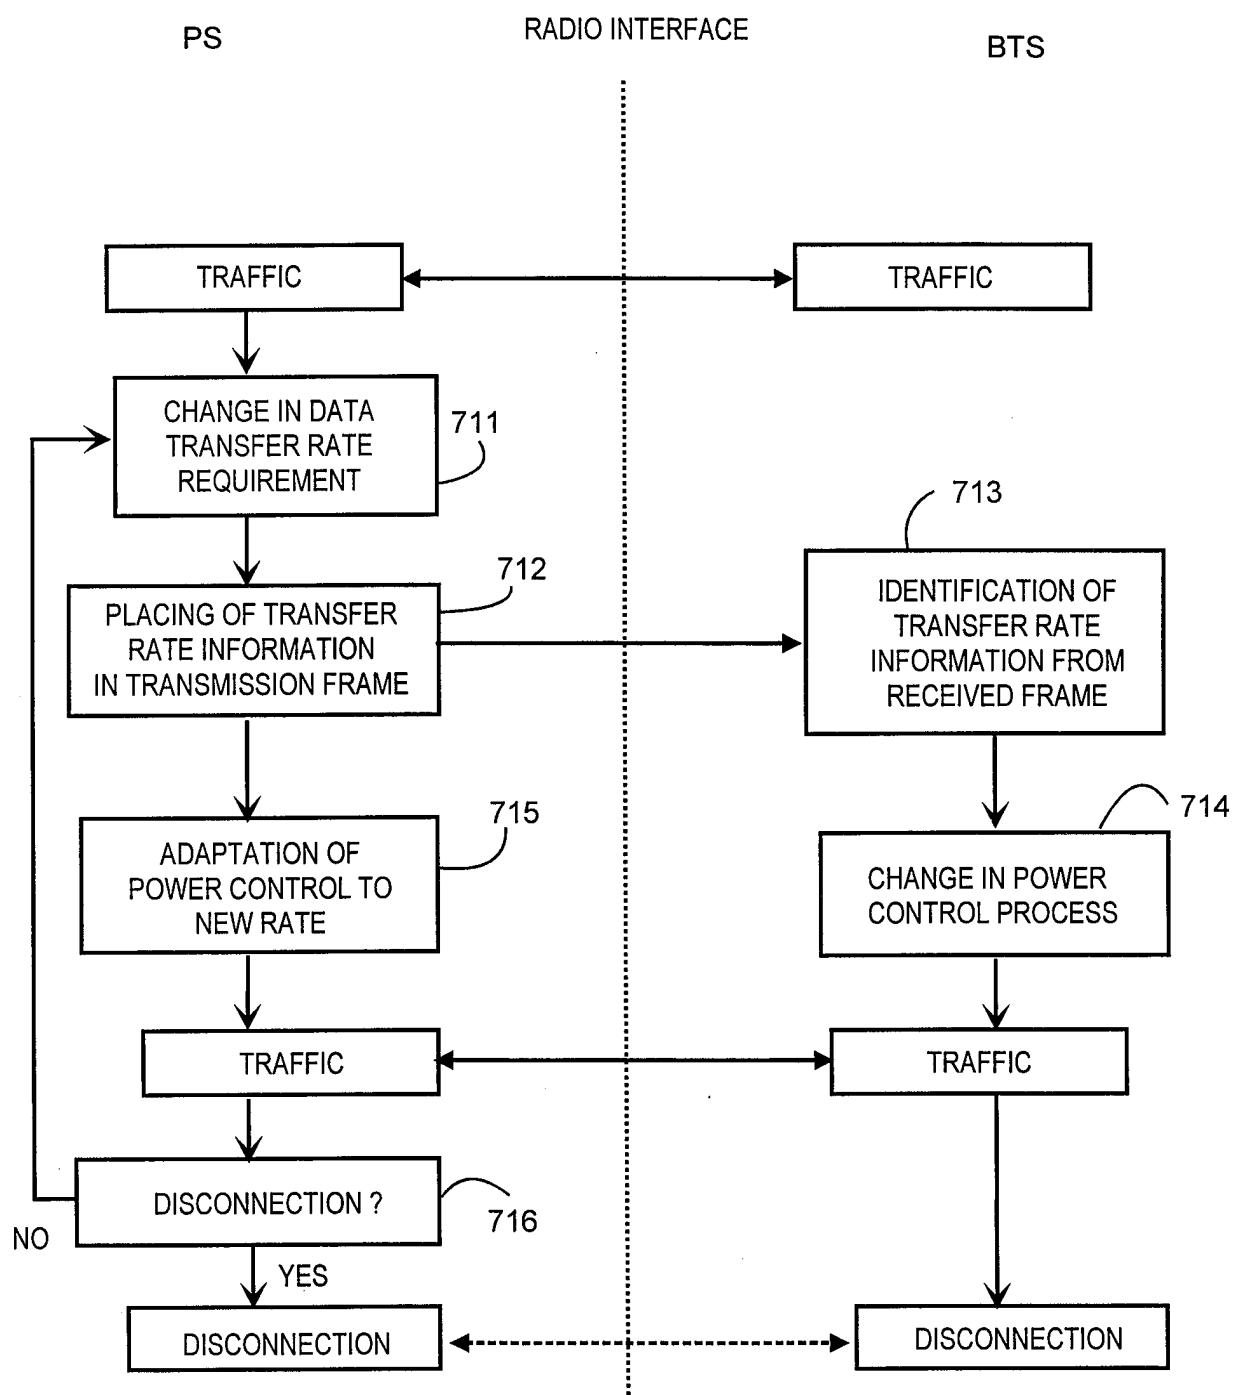


Fig. 7

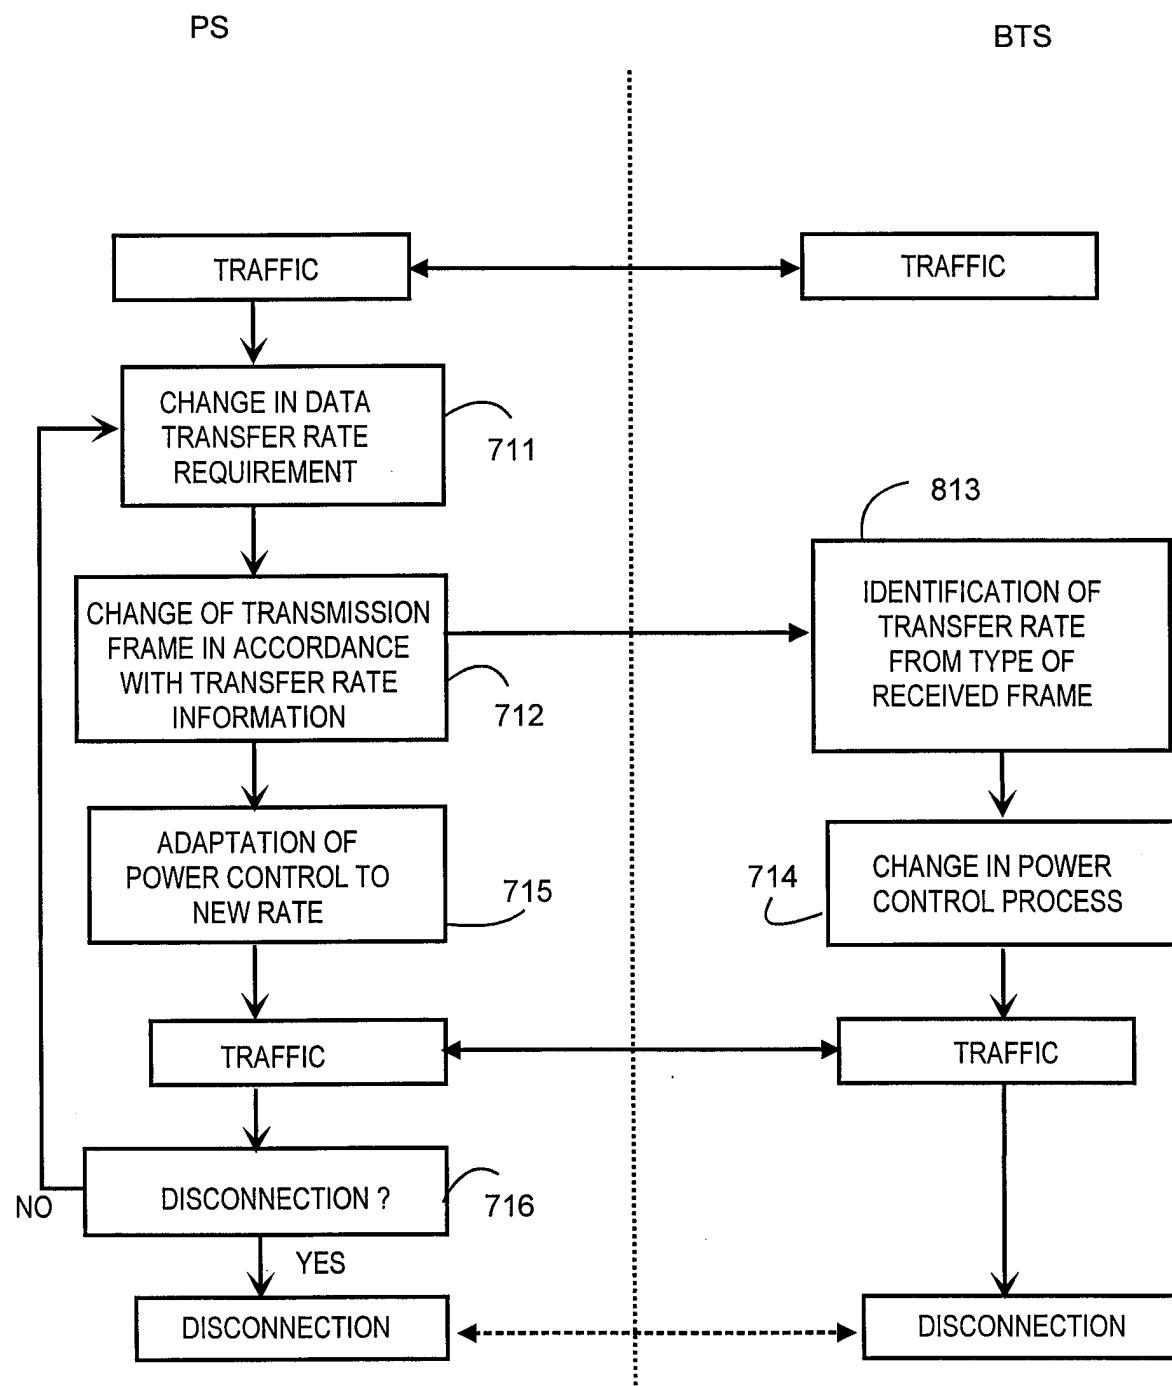


Fig. 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00043

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04B 7/005

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, JAPIO

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	EP 0802638 A2 (LUCENT TECHNOLOGIES INC.), 22 October 1997 (22.10.97), column 1, line 50 - column 2, line 14, figure 3 --	1
A	WO 9603813 A1 (QUALCOMM INCORPORATED), 8 February 1996 (08.02.96), abstract --	1
A	WO 9107037 A1 (QUALCOMM, INC.), 16 May 1991 (16.05.91), abstract -- -----	1

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

30 June 1998

02-07-1998

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Viktor Skoog
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/FI 98/00043

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP	0802638 A2	22/10/97	JP	10041885 A	13/02/98
WO	9603813 A1	08/02/96	AU	3003195 A	22/02/96
			CA	2195984 A	08/02/96
			EP	0774179 A	21/05/97
			FI	970319 A	13/03/97
			IL	114703 D	00/00/00
			JP	10503337 T	24/03/98
			US	5604730 A	18/02/97
			ZA	9505843 A	15/03/96
WO	9107037 A1	16/05/91	AT	163822 T	15/03/98
			AU	646001 B	03/02/94
			AU	6728390 A	31/05/91
			CA	2072989 A	08/05/91
			CN	1025402 B	06/07/94
			CN	1053870 A	14/08/91
			CN	1090107 A	27/07/94
			DE	69032105 D	00/00/00
			EP	0500689 A,B	02/09/92
			SE	0500689 T3	
			FI	922083 A	07/05/92
			IL	96218 A	27/02/94
			JP	4502841 T	21/05/92
			MX	172367 B	14/12/93
			US	5056109 A	08/10/91
			US	5257283 A	26/10/93
			US	5265119 A	23/11/93
			US	5267262 A	30/11/93
			US	5485486 A	16/01/96