



(51) International Patent Classification:

F41H 1/02 (2006.01) B32B 5/10 (2006.01)  
B32B 37/12 (2006.01) F41H 5/04 (2006.01)

(21) International Application Number:

PCT/CA2010/000870

(22) International Filing Date:

9 June 2010 (09.06.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/213,458 11 June 2009 (11.06.2009) US

(71) Applicant (for all designated States except US): **BARR-DAY INC.** [CA/CA]; 75 Moorefield Street, Cambridge, Ontario N1R 5W6 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KRUMMEL, Joseph, Edward** [US/US]; 65 Northland Dr., Rising Sun, Maryland 21911 (US).

(74) Agent: **BERESKIN & PARR LLP/S.E.N.C.R.L., S.R.L.**; 40 King Street West, 40th Floor, Toronto, Ontario M5H 3Y2 (CA).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: ROTATIONALLY OFFSET PENETRATION-RESISTANT ARTICLES

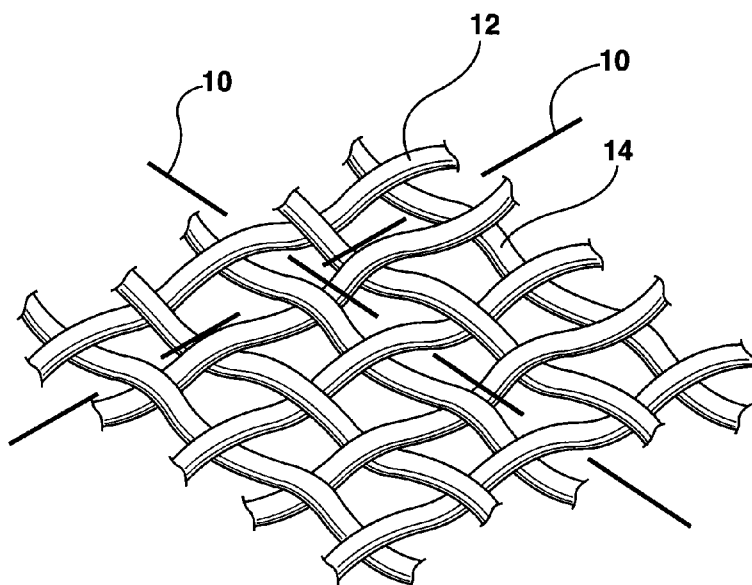


FIG. 1

(57) Abstract: A penetration-resistant article is provided comprising two or more layers of woven fabric. The layers of woven fabric each comprise a first series of fibers aligned in a first direction and a second series of fibers interwoven with the first series of fibers and aligned in a second direction perpendicular to the first direction. Two or more layers of woven fabric are loosely stacked together so as to permit relative slippage therebetween and are rotationally offset by an offset angle selected so as to inhibit mechanical interference between opposing adjacent surfaces of the woven fabric layers during slippage therebetween. Also provided are methods for assembling penetration-resistant articles.

WO 2010/142028 A1

**Title: Rotationally Offset Penetration-Resistant Articles**

**Related Applications**

5

[0001] This application claims the benefit of U.S. Provisional Application No. 61/213,458 filed on June 11, 2009 and entitled ROTATIONALLY OFFSET PENETRATION RESISTANT MATERIALS, the entire contents of which are hereby incorporated by reference.

10 **Technical Field**

[0002] The embodiments disclosed herein relate to penetration-resistant articles, and in particular to multi-layer penetration-resistant articles with woven layers.

**Background**

15 [0003] There is currently a demand for improved penetration-resistant articles. Traditionally, some articles or armor systems designed for stab and/or spike-resistance have used composite systems that include metallic components in the form of rigid plates or platelets, such as chain mail.

[0004] More recently, penetration-resistant articles that use multiple layers  
20 of woven fabric have also been developed. For example, Foy and Miner (US Patent No. 5,578,358) describe an aramid article having improved resistance to penetration by sharp implements made of multiple layers of tightly woven fabric with a minimum fabric tightness factor wherein adjacent layers of the fabric are free to move relative to each other. Chiou (US Patent No. 6,475,936) describes  
25 matrix-resin free fabrics with a loose weave or low fabric tightness factor that also exhibit resistance to penetration by knife stabs. Granqvist et al. (US Publication No. 20040048538) describe a penetration resistant article consisting of one or more layers of a woven fabric having a friction raising means operating between the fabric layers.

- 2 -

**[0005]** There is a need for improved penetration-resistant articles and armor systems.

**Summary**

**[0006]** Some embodiments described herein relate generally to penetration-resistant articles comprising multiple layers of woven fabric wherein adjacent layers fabric are rotationally offset.

**[0007]** The inventor has surprisingly found that rotationally offsetting the direction of warp or weft in adjacent layers of woven fabric tends to improve the penetration-resistance performance of multi-layer woven articles. This arrangement is believed to improve the slippage between adjacent layers of woven fabric in the article and lead to a corresponding increase in the resistance of the article to a stab or spike.

**[0008]** Accordingly, in one aspect there is provided a penetration-resistant article comprising a first layer of woven fabric and a second layer of woven fabric adjacent the first layer of woven fabric. In one embodiment, the first and second layers of woven fabric each comprise a first series of fibers aligned in a first direction and a second series of fibers interwoven with the first series of fibers and aligned in a second direction perpendicular to the first direction. In one embodiment, the first and second layers of woven fabric are loosely stacked together so as to permit relative slippage between the layers. In one embodiment, the first and second directions of the fibers in the first layer of woven fabric are rotationally offset to the first and second directions of the fibers in the second layer of woven fabric by an offset angle. The offset angle may be selected so as to inhibit mechanical interference between opposing adjacent surfaces of the first and second woven fabric layers during slippage therebetween.

**[0009]** In one embodiment, the offset angle is selected so as to improve the relative slippage between adjacent layers of woven fabric. The offset angle

- 3 -

between adjacent fabric layers may be about 45 degrees, about between 5 degrees and 45 degrees, or about between 30 degrees and 45 degrees.

**[0010]** In one embodiment, the penetration-resistant article further comprises additional layers of woven fabric. The additional layers of woven fabric  
5 may be rotationally offset and loosely stacked so as to permit relative slippage between the layers of woven fabric. The offset angles between adjacent layers may be about the same or they may be different.

**[0011]** In one embodiment, the penetration-resistant article comprises between 3 and 25 layers of woven fabric or greater than 25 layers of woven  
10 fabric. The woven fabric may be a plain-woven fabric made from high performance fibers such as aramid fibers.

**[0012]** In one embodiment, the articles described herein meet or exceed Level 1, Level 2 and/or Level 3 National Institute of Justice (NIJ) standard 0115.00 for stab resistance of personal body armor.

**[0013]** In one embodiment, the fabric layers are loosely stacked together so as to permit relative slippage between the layers. The fabric layers may be combined to maintain a selected offset angle between adjacent layers of woven fabric. In one embodiment, the layers of woven fabric are combined to as to maintain the relative rotational offset of adjacent fabric layers. The layers may be  
20 combined in a bag or envelope that surrounds the layers of woven fabric and maintains the relative rotational offset of the fabric layers. In one embodiment, the layers of woven fabric are combined so as to permit slippage of adjacent fabric layers. The layers of woven fabric may be combined by attaching the layers at one or more spots along the perimeter of the fabric or at one or more  
25 spots on the surface of the fabric. In one embodiment, a substantial portion of the opposing surfaces of adjacent fabric layers are not mechanically coupled. In one embodiment, greater than 50%, 70%, 80%, 90%, 95% or 99% of the opposing surfaces of adjacent fabric layers are not mechanically coupled.

- 4 -

**[0014]** In one aspect, there is provided a method of assembling a penetration-resistant article as described herein. In one embodiment, two or more layers of woven fabric are provided wherein each layer of woven fabric comprise a first series of fibers aligned in a first direction and a second series of fibers interwoven with the first series of fibers and aligned in a second direction perpendicular to the first direction. The woven fabric may be a plain-woven fabric. In one embodiment the method includes selecting an offset angle between adjacent layers of woven fabric so as to inhibit mechanical interference between opposing adjacent surfaces of layers of woven fabric. The layers of fabric may be oriented such that adjacent layers of woven fabric are rotationally offset by the selected offset angle. The fabric layers may be stacked and the rotational offset of each layer oriented to the selected offset angle in the stack.

**[0015]** In one embodiment, the method comprises combining the layers of woven fabric so as to permit slippage between adjacent layers of woven fabric. In one embodiment, the method comprises combining the layers of woven fabric so as to maintain the rotational offset of adjacent fabric layers.

**[0016]** Other aspects and features of the present specification will become apparent to those ordinarily skilled in the art upon review of the following description.

## 20 **Brief Description of the Drawings**

**[0017]** The drawings included herewith are for illustrating various examples of articles, methods, and apparatuses of the present specification and are not intended to limit the scope of what is taught in any way. In the drawings:

**[0018]** Figure 1 is a schematic showing ridge-like features in a woven fabric according to one embodiment;

**[0019]** Figure 2 provides the results of NIJ-STD-0115.0 spike testing for a rotationally offset layup (90/45/90) of 70x70 200 denier Kevlar® Correctional™ fabric;

- 5 -

**[0020]** Figure 3 provides the results of NIJ-STD-0115.0 spike testing for a control layup (90/90/90) of 70x70 200 denier Kevlar® Correctional™ fabric;

**[0021]** Figure 4 provides the results of Level 1 NIJ-STD-0115.0 spike testing for 5 to 8 layers of a rotationally offset layup (90/45/90) of 70x70 200  
5 denier Kevlar® Correctional™ fabric;

**[0022]** Figure 5 provides the results of Level 3 NIJ-STD-0115.0 spike testing for 15 to 18 layers of a rotationally offset layup (90/45/90) of 70x70 200 denier Kevlar® Correctional™ fabric;

**[0023]** Figure 6 provides the results of Level 2 NIJ-STD-0115.0 spike  
10 testing for 13 to 15 layers of a rotationally offset layup (90/45/90) of 70x70 200 denier Kevlar® Correctional™ fabric;

**[0024]** Figure 7 is an exploded view of three layers of adjacent woven fabric arranged with a 45 degree rotational offset (90/45/90) according to one embodiment.

15

### **Detailed Description**

**[0025]** Exemplary embodiments described herein include penetration-resistant articles made with multiple layers of woven fabric, with one or more adjacent layers of fabric being rotationally offset.

**[0026]** The inventor has surprisingly discovered that the penetration-resistance performance of multi-layer woven articles tends to improve if adjacent  
20 layers are positioned such that the direction of fibers or yarns in adjacent layers is rotationally offset.

**[0027]** As used herein, the term "penetration-resistance" refers to the  
25 ability of an article to resist penetration when forcibly contacted or stabbed with a sharpened object. In one embodiment, the object is a spike. In some embodiments, the object is a blade, ice pick, awl, shank, or any similar pointed

- 6 -

implement. In some embodiments the object may be a sharpened or pointed piece of plastic or an improvised object such as a pen or shiv. The penetration-resistance of an article can be measured according National Institute of Justice (NIJ) standard 0115.00 (Available from the National Law Enforcement and  
5 Corrections Technology Center, P.O. Box 1160, Rockville MD, 20849-1160).

**[0028]** As used herein, the term "fiber" refers to an elongated body for which the length dimension is greater than the transverse or width dimension. In some embodiments, a series of fibers aligned in the same general longitudinal direction may constitute a yarn or tape.

10 **[0029]** In some embodiments, the fibers are high-performance fibers such as aramid fibers, extended chain polyethylene fibers, and/or poly(p-phenylene-2,6-benzobisoxazole) (PBO) fibers. Other examples could include aramid and copolymer aramid fibers, for example as produced commercially by DuPont (Kevlar®), Teijin (Twaron®), Kolon (Heracron®), and Hyosung Aramid, modified  
15 para-aramids (e.g. Ruser®, Autex®), ultra high molecular weight polyethylene (UHMWPE) produced commercially by Honeywell, DSM, and Mitsui under the trade names Spectra®, Dyneema®, and Tekmilon®, respectively (as well as Pegasus® yarn), polyethylene fibers and films produced by Synthetic Industries and sold under the trade name Tensylon®, poly(p-phenylene-2,6-benzobisoxa-  
20 zole) (PBO) (produced by Toyobo under the commercial name Zylon®), and/or polyester-polyarylate yarns (e.g. Liquid crystal polymers produced by Kuraray under the trade name Vectran®). In some embodiments, the fibers are Innegra™ fibers produced by Innegrity™ LLC.

**[0030]** According to some embodiments, the penetration-resistant articles  
25 described herein include fibers that are arranged into a woven fabric. As used herein, the term "woven fabric" refers to a plurality of fibers that have been interwoven so as to form a generally continuous sheet. In one embodiment, the woven fabric comprises a plurality of interwoven warp and weft yarns as generally known in the art.

- 7 -

- [0031]** It will be understood that in some embodiments a particular fabric may be made from a single type of fiber, or from two or more various types of fibers. Each fabric may also include various types of fibers in each yarn and/or in different yarns that may be combined to make the fabric.
- 5 **[0032]** In some embodiments, the fabric may be woven on standard weaving looms, including rapier, shuttle, air jet and water jet looms. Woven fabrics useful for the penetration-resistant articles described herein may include weaves such as a plain weaves, crowfoot weaves, basket weaves, satin weaves, twill weaves, proprietary weaves, or the like.
- 10 **[0033]** In one embodiment, the woven fabric comprises a first series of fibers aligned in a first direction and a second series of fibers interwoven with the first series of fibers and aligned in a second direction. In one embodiment, the direction of the first series of fibers is perpendicular to direction of the second series of fibers in the plane of the woven fabric. Optionally, the woven fabric  
15 comprises warp yarns and weft yarns, wherein the warp yarns comprise a first series of fibers and the weft yarns comprise a second series of fibers. In one embodiment, the woven fabric has a series of fibers that are generally parallel in a first direction, interwoven with a series of fibers that are generally parallel in a second direction perpendicular to the fibers in the first direction. In one  
20 embodiment, each layer of woven fabric defines a perpendicular set of axes with a first series of fibers in one direction and a second series of fibers in a generally perpendicular direction. This perpendicular set of axes in a first layer of woven fabric can therefore be aligned or rotationally offset with a set of axes defined by the direction of the fibers or yarns in an adjacent layer of woven fabric.
- 25 **[0034]** As used herein, two woven fabric layers are "rotationally offset" if the direction of a series of fibers in a first fabric layer forms an angle in the plane of the fabric other than about 0 degrees or 90 degrees with the direction of a series of fibers in a second adjacent fabric layer. In contrast, two woven fabric



- 8 -

layers are considered "aligned" if the direction of the fibers in one fabric layer is collinear or parallel with the direction of fibers in the second fabric layer.

**[0035]** As used herein "offset angle" refers to the smallest angle formed in the plane of the fabric between the direction of a series of fibers in the first fabric layer and a direction formed by a series of fibers in the second adjacent fabric layer. For example, a series of fibers defining a direction or axis in a first fabric layer will form two angles in the plane of the fabric that measure less than 90 degrees with a perpendicular set of axes defined by the direction of the fibers in a second fabric layer. In one embodiment, the "offset angle" therefore refers to an angle of less than or equal to about 45 degrees.

**[0036]** In one embodiment, the fabric is woven in a tight weave. While the embodiments described herein are not limited to any particular fabric tightness, tighter fabric weaves are generally preferred for penetration-resistant articles since they tend to provide better resistance to penetration of spikes and/or blades through the layers of fabric.

**[0037]** In one embodiment, the fabric is a tight, plainly woven 70x70, 200 denier Kevlar®. Optionally, the fabric may be made from yarn that includes high-performance fibers and has a yarn denier of between 1 and 750. In some embodiments, the woven fabric may be made from yarn having a denier between 150 and 250. In one embodiment, the fabric is 200 denier Kevlar® Correctional™ available from E.I. du Pont de Nemours and Company.

**[0038]** The penetration-resistant articles as generally described herein comprise multiple layers of woven fabric. In some embodiments, the articles comprise at least two layers of fabric. In some embodiments, the articles comprise three or more layers of fabric. In some embodiments the articles comprise between 5 and 25 layers of fabric, or greater than 25 layers of fabric. In other embodiments the articles comprise between 6 and 17 layers of fabric.

**[0039]** The number of layers in a particular article may be selected according to the desired level of threat protection, and it is generally understood that a greater number of fabric layers generally provides greater protection as compared to a smaller number of fabric layers.

5 **[0040]** In some embodiments, the article comprises 6 or more layers of 200 denier Kevlar woven fabric and meets or exceeds the Level 1 National Institute of Justice's (NIJ) Standard STD-0115.00 with respect to stab testing. In another embodiment, the article comprises 13 or more layers of 200 denier Kevlar woven fabric and meets or exceeds Level 2 NIJ STD-0115.00. In another  
10 embodiment, the article comprises 15 or more layers of 200 denier Kevlar woven fabric and meets or exceeds Level 3 NIJ STD-0115.00.

**[0041]** The penetration-resistant articles described herein include multiple layers of woven fabric, wherein at least some of the adjacent layers are rotationally offset. As shown in Examples 1 and 2, rotationally offsetting adjacent  
15 layers of woven fabric surprisingly tends to improve the spike-resistance performance of multi-layer woven articles when tested to NIJ Standard 0115.00 Level 2. This improved performance resulted in a 34% relative reduction in fabric layers as compared to a conventionally arranged sample article for the same level of protection (see Figure 2).

20 **[0042]** Without limiting the scope of the embodiments described herein, the inventor believes that rotationally offsetting the individual protection layers tends to inhibit the fibers in adjacent layers from interlocking or mechanically engaging with each other. This tends to promote slippage between adjacent fabric layers and may cause movement of the penetration threat upon impact  
25 (e.g. lateral and/or rotational movement of the spike or stabbing item), thereby allowing fewer layers of fabric to stop the threat. This is in contrast to ballistic-resistant articles, which commonly use materials where fabric layers are held together either by stitching or by using composite materials to hold the fabric layers in position and to prevent slippage between the fabric layers.

- 10 -

**[0043]** Generally, the surface of a layer of woven fabric includes intermittent ridge-like features defined by the fibers or warp or weft yarns as shown in Figure 1. Referring to Figure 1, a series of ridge-like surface features (10) indicated by the dashed lines are formed by the warp (12) or weft (14) yarns or fibers on the surface of the fabric. When adjacent layers of fabric in a multi-layer article are positioned such that the ridge-like surface features are aligned, movement of the fabric layers can result in contact and locking or nesting of the ridge-like surface features between one layer within the ridge-like surface features on the surface of another adjacent layer, and this tends to prevent or impair the relative movement or slippage of adjacent fabric layers.

**[0044]** However, the inventor believes that by rotationally offsetting the warp yarns and/or weft yarns in adjacent layers of woven fabric, the contact or mechanical interference between the ridge-like structures in adjacent layers is reduced as the ridges are no longer parallel and tend not to mechanically engage or nest with each other. As used herein "mechanical interference" refers to the interaction of surface features on opposing adjacent surfaces of woven fabric layers during the slippage of one layer of woven fabric against another layer of woven fabric. As used herein "slippage" refers to the relative movement of at least a portion of one fabric along the surface of an adjacent fabric.

**[0045]** In one aspect adjacent fabric layers are therefore arranged to minimize or at least reduce the contact between the surface features. In some embodiments, adjacent layers of fabric are rotationally offset such that the ridge-like surface features are not parallel. In some embodiments the direction of a series of fibers in one fabric layer is rotationally offset at an angle substantially different than the direction a series of fibers in an adjacent layer.

**[0046]** In one aspect, there is provided a penetration-resistant article wherein layers of adjacent woven fabric are rotationally offset by an offset angle selected so as to inhibit mechanical interference between the opposing adjacent surfaces of the woven fabric layers during slippage therebetween. In one

- 11 -

embodiment, the offset angle is about 45 degrees. In one embodiment, the offset angle is greater than 0 degrees and less than or equal to 45 degrees. Optionally, the offset angle is between about 5 degrees and 45 degrees or between about 30 and 45 degrees. A person skilled in the art will be able to select a suitable  
5 offset angle based on the teachings of the present disclosure and the characteristics of the woven fabrics used to form the penetration-resistant article. In one embodiment, the offset angle is selected to minimize mechanical interference between the opposing adjacent surfaces of the woven fabric layers.

**[0047]** In one aspect there is provided a penetration-resistant article with 3  
10 or more fabric layers wherein adjacent layers are each rotationally offset at 45 degrees. Figure 7 provides a schematic showing three layers of fabric wherein adjacent layers are rotationally offset at 45 degrees. Assuming the warp in the first layer is oriented at vertically at 90 degrees, the adjacent layers that are rotationally offset at 45 degrees are therefore arranged in a 90/45/90 orientation  
15 as shown in Figure 7. Some additional embodiments include penetration-resistant articles with between 5 and 50 layers of fabric wherein some or all of the adjacent layers are rotationally offset at an angle of about 45 degrees. A person skilled in the art will appreciate an article comprising layers of plain woven fabric with identical warp and weft arranged in a 90/90/90 orientation (i.e. warp  
20 yarns or fibers vertically aligned in adjacent layers) will be identical to an article arranged in a 90/0/90 orientation (i.e. warp and weft yarns or fibers aligned in adjacent layers).

**[0048]** In some embodiments, the articles may have different rotational offsets between adjacent layers. Generally, in some embodiments any  
25 combination of rotational offsets may be used with the fibers or warp or weft yarns in adjacent layers being rotationally offset and not aligned. For example, in one embodiment a penetration-resistant article may have 7 or more layers arranged such that the adjacent layers each have an offset angle of 15 degrees

- 12 -

(i.e. 90/75/60/45/30/15/90) to promote slippage between the layers. In some embodiments, adjacent layers are offset at different degrees of rotation.

**[0049]** In other embodiments, one or more adjacent orthogonal layers may be combined with one or more rotationally offset layers. For example, a five-layer  
5 fabric may have a 90/0/90/45/90 configuration.

**[0050]** In one aspect, woven fabric layers are combined to form a penetration-resistant article and to permit the slippage of at least some of the fabric layers. In another aspect, woven fabric layers are combined to form a penetration-resistant article where the relative rotational offset of adjacent woven  
10 fabric layers is generally maintained. In one embodiment, the impact of a stab or spike will cause the fabric layers to slip relative to one another.

**[0051]** In one embodiment, the layers of woven fabric are loosely stacked together so as to permit the relative slippage of the fabric layers. As used herein "loosely stacked together" refers to the arrangement of two or more layers of  
15 woven fabric in a stack wherein a substantial portion of opposite adjacent surfaces are not mechanically coupled. Loosely stacking the woven fabric layers allows a fabric layer to move or slip relative to an adjacent layers upon impact of a threat such as a spike or sharpened implement, thereby increasing the penetration resistance of the article. In one embodiment, the layers of woven  
20 fabric are loosely stacked together to generally maintain the rotational offset of the adjacent woven fabric layers. In one embodiment, the plurality of woven fabric layers are combined to permit the slippage of at least some of the fabric layers and to maintain the relative orientation of the fabric layers with respect to the rotational offset of the fabric layers.

**[0052]** For example, in one embodiment the fabric layers are combined by fastening the layers at one or more spots along the perimeter of the fabric. The fabric layers may be combined by an interlayer connection at some relatively great spacing compared to the thickness of the article. In one embodiment, the  
25

- 13 -

- fabric layers are combined by using an adhesive, thermal adhesive, stitching or any other method known for combining layers of fabric known in the art. In one embodiment, the fabric layers are not mechanically coupled. For example, the fabric layers may be combined by enclosing the fabric layers in a bag, vest, or other suitable container or envelope that allows slippage between the fabric layers but maintains the rotational offset between adjacent layers in the stack of woven fabric layers. In one embodiment, the fabric layers may be combined by fastening and/or enclosing the fabric layers in a bag, vest, or other suitable container or envelope.
- 5
- 10 **[0053]** In some embodiments, the penetration-resistant articles described herein may be used in armor systems. The penetration-resistant articles described herein may also be combined with other materials such as ceramics and/or metals suitable for penetration-resistant product designs for spikes and/or edged weapons that are known in the art.
- 15 **[0054]** In some cases, the embodiments described herein may be combined with ballistic-resistant materials in order to create a multi-threat resistant armor system.
- [0055]** Finished articles or armor systems that may make use of the penetration-resistant articles described herein include, but are not limited to, body armor, personal armor plates and shields, stab and spike resistant vests or shields, and stab and spike resistant clothing (e.g. pants, shirts, etc.) as well as garments or articles that are abrasion resistant, slash cut resistant, and/or shock resistant.
- 20
- 25 **[0056]** In another aspect, there is provided methods for assembling the penetration-resistant articles as described herein. In one embodiment, two or more layers of woven fabric are provided to assemble into a penetration resistant article and an offset angle is selected to inhibit mechanical interference between opposing adjacent surfaces of the provided woven fabric layers. The fabric

- 14 -

layers may then be stacked and each layer oriented at the selected offset angle. In one embodiment, the fabric layers are then combined to allow for slippage between the layers.

- 5 **[0057]** In one aspect, the method comprises selecting an offset angle to minimize mechanical interference between opposing adjacent surfaces. In one embodiment, method comprises selecting an offset angle of about 45 degrees. In one embodiment, the offset angle is selected to be about between 5 degrees and 45 degrees. In one embodiment the offset angle is selected to be about between 30 and 45 degrees.
- 10 **[0058]** In one embodiment, the method includes providing 3 or more woven fabric layers to assemble into a penetration-resistant article. In one embodiment the method comprises selecting offset angles between adjacent fabric layers that are the same. In another embodiment, the method comprises selecting offset angles between adjacent fabric layers that are different.
- 15 **[0059]** In one aspect, the method includes combining the woven fabric layers to form the penetration-resistant article. In one embodiment, the layers are combined to as to allow slippage between adjacent layers of woven fabric. In one embodiment, the woven fabric layers are combined to maintain the selected offset angle between adjacent layers of woven fabric.
- 20 **[0060]** In one embodiment, the method comprises combining layers of woven fabric by inserting the first and second layers into a bag or envelope that surrounds the first and second layers of woven fabric. In one embodiment, the bag or envelope is made of fabric and inserting the fabric layers into the bag or envelope restrains the relative movement of the fabric layers contained therein.
- 25 **[0061]** In one embodiment, the method comprises attaching adjacent layers of woven fabric. In one embodiment, method comprises attaching adjacent layers of woven fabric such that substantial portions of opposing adjacent surfaces of the fabric layers are not mechanically coupled. For

- 15 -

example, in one embodiment the method comprises attaching the layers at one or more spots along the surface or perimeter of the fabric.

**[0062]** The above disclosure generally describes some embodiments of the present application. Further details may be obtained by reference to the following specific examples. These examples are described solely for the purpose of illustration and are not intended to limit the scope of the disclosure. In particular, changes in form and substitution of equivalents are contemplated as circumstances might suggest or render expedient. Although specific terms have been employed herein, such terms are intended in a descriptive sense and not for purposes of limitation.

### **EXAMPLES**

#### **Example 1: Comparison Testing of Rotationally-Offset 200 denier Kevlar™**

**[0063]** Two series of armor systems were tested according to Level 2 NIJ-STD-0115.00 by H.P. White Laboratory Inc. in order to observe the effects of rotationally offsetting adjacent layers of woven fabric on stab resistance. Both series used identical fabric layers of 200 denier plain weave 70X70 Kevlar® Correctional™. Referring to Figure 2, the "Proprietary Layup" consisted of layers of fabric wherein adjacent layers were arranged in a 90/45/90 degree rotational offset. Referring to Figure 3, the "Control Normal Layup" consisted of adjacent layers of fabric that were positioned in a traditional 90/90/90 degree arrangement such that warp or weft in adjacent layers was parallel.

**[0064]** As shown in Figure 2, test samples with a 90/45/90 degree rotational offset failed at 9 layers (1/1 samples), 10 layers (3/5 samples) and at 11 layers (1/5 samples) when tested to NIJ-STD-0115.00 standards with a spike. No penetration was observed in rotationally offset 200 denier Kevlar® Correctional™ test samples that consisted of 12 or more layers.



- 16 -

[0065] Figure 3 shows that test samples positioned in a 90/90/90 arrangement offset failed at 17 layers (1/2 samples), 16 layers (2/8 samples), 15 layers (2/3 samples; bent spike), 14 layers (3/4 samples) and at 13 layers (1/1 samples).

5 [0066] Test samples arranged with a 90/45/90 degree rotational offset therefore tended to exhibit better performance and resist penetration at lower layer counts when compared to conventional fabric samples without the rotational offset.

10 **Example 2: S-50 value of Rotationally-Offset 200 denier Kevlar®**

[0067] Table 1 summarizes the results presented in Figures 2 and 3 of the comparative testing of rotationally offset 200 denier Kevlar® Correctional™ fabric. An S-50 value, which represents that average number of layers at which penetration will occur 50% of the time using a NIJ-STD-0115.00 spike at Level 2 /  
15 Energy 2 (approx. 50 Joules), was calculated for each group of samples. As shown in Table 1, the S-50 value for the 90/90/90 Control Sample was 15.7 while the S-50 value for the rotationally offset 90/45/90 Test Sample was 10.36. This difference in S-50 level represents a fabric layer reduction of 33.99% for an equivalent level of spike protection.

20

Control Sample: 90/90/90 Layup			Test Sample: 45/90/45/90 Layup		
Number of Layers	Result	Penetration (mm)	Number of Layers	Result	Penetration (mm)
17	C	23	17	P	0
17	P	0	17	P	0
16	P	0	16	P	0
16	P	0	16	P	0
16	P	0	14	P	0
16	C	1	14	P	0
16	C	24	13	P	0
16	C	22	12	P	0
16	P	0	12	P	0
16	P	0	12	P	0
15	C	29	11	P	0
15	P	0	10	C	33
15	C	29	11	P	0
14	C	33	10	C	36
14	C	32	10	C	50
14	P	0	11	C	26
14	C	31	11	P	0
13	C	23	11	P	0
15.7	S-50		10	P	0
			10	P	0
			9	C	50
			10.36	S-50	
FABRIC LAYER REDUCTION:			33.99%		

5 **Table 1:** Comparative testing of and calculation of S-50 levels for 200 denier Kevlar® Correctional™. P = partial penetration; C = complete penetration.

**Example 3: Rotationally Offset Kevlar® Armor Systems Consistently Meet or Exceed NIJ-STD-0115.00 Standards**

10 **[0068]** In order to further investigate the performance of the armor systems described herein, additional testing of articles comprising multiple layers of 200 denier Kevlar® Correctional™ fabric rotationally offset at 90/45/90 degrees was performed according to NIJ-STD-0115.00 standards.

- 18 -

**[0069]** Results shown in Figure 4 indicates that articles made from 6 or more layers of 200 denier Kevlar® rotationally offset at 45 degrees are compliant with Level 1 NIJ-STD-0115.00.

5 **[0070]** Results shown in Figure 5 indicate that articles made from 15 layers or more of 200 denier Kevlar® rotationally offset at 45 degrees are compliant with Level 3 NIJ-STD-0115.00.

**[0071]** Results shown in Figure 6 indicated that articles made from 13 layers or more of 200 denier Kevlar® rotationally offset at 45 degrees are compliant to Level 2 NIJ-STD-0115.00.

10 **[0072]** While the above description provides examples of one or more penetration-resistant articles, armor systems and/or methods of assembly, it will be appreciated that other articles, armor systems and/or methods of assembly may be within the scope of the present description as interpreted by one of skill in the art.

15

## WE CLAIM:

1. A penetration-resistant article comprising:
  - a first layer of woven fabric;
  - 5 a second layer of woven fabric adjacent the first layer of woven fabric;
    - the first and second layers of woven fabric each comprising a first series of fibers aligned in a first direction and a second series of fibers interwoven with the first series of fibers and aligned in a second direction perpendicular to the first direction;
  - 10 the first and second layers of woven fabric loosely stacked together so as to permit relative slippage therebetween; and
    - wherein the first and second directions of the fibers in the first layer of woven fabric are rotationally offset to the first and second directions in the second layer of woven fabric by an offset angle selected so as to inhibit
    - 15 mechanical interference between opposing adjacent surfaces of the first and second woven fabric layers during slippage therebetween.
- 20 2. The penetration-resistant article of claim 1, wherein the offset angle is about 45 degrees.
3. The penetration-resistant article of claim 1, wherein the offset angle is about between 5 and 45 degrees.
- 25 4. The penetration-resistant article of claim 1, wherein the offset angle is about between 30 and 45 degrees.

- 20 -

5. The penetration-resistant article of claim 1, wherein the offset angle is selected so as to improve the relative slippage between adjacent layers of woven fabric.

5

6. The penetration-resistant article of claim 1, further comprising a third layer of woven fabric loosely stacked on the second layer so as to permit relative slippage between the second layer and third layer.

10 7. The penetration-resistant article of claim 6, wherein the first and second directions of the fibers in the third layer are rotationally offset to the first and second directions of the fibers in the second layer of woven fabric by a second offset angle selected so as to inhibit mechanical interference between opposing adjacent surfaces of the second and third woven fabric  
15 layers during slippage therebetween.

8. The penetration-resistant article of claim 7, wherein the first and second offset angle are different.

20 9. The penetration-resistant article of claim 7, wherein the first and second offset angle are about the same.

10. The penetration-resistant article of claim 7, further comprising a fourth layer of woven fabric loosely stacked on the third layer so as to permit relative  
25 slippage between the third layer and fourth layer, and wherein the first and second directions of the fibers in the fourth layer are rotationally offset to the first and second directions of the fibers in the third layer of woven fabric by a third offset angle selected so as to inhibit mechanical interference between

- 21 -

opposing adjacent surfaces of the third and fourth woven fabric layers during slippage therebetween.

11. The penetration-resistant article of claim 1, wherein the article  
5 comprises between 3 and 25 layers of woven fabric and at least some of the layers of woven fabric are loosely stacked and rotationally offset so as to inhibit mechanical interference between opposing adjacent surfaces of the woven fabric layers during slippage therebetween.

10 12. The penetration-resistant article of claim 1, wherein the woven fabric is a plain-woven fabric.

13. The penetration-resistant article of claim 1, wherein the fibers are aramid fibers.  
15

14. The penetration-resistant article of claim 1, wherein the article meets or exceeds Level 1, Level 2 and/or Level 3 National Institute of Justice (NIJ) standard 0115.00.

20 15. The penetration-resistant article of claim 1, wherein the first and second layers of woven fabric are combined to maintain the selected offset angle between the first and second layers.

25 16. The penetration-resistant article of claim 15, wherein the first and second layers of woven fabric are combined in a bag or envelope that surrounds the first and second layers of woven fabric and maintains the relative rotational offset of the stacked fabric layers.

- 22 -

17. The penetration-resistant article of claim 15, wherein the first and second layers of woven fabric are combined by attaching the layers of woven fabric at one or more spots along the perimeter of the fabric.

5

18. The penetration-resistant article of claim 15, wherein the layers of woven fabric are not stitched together.

19. A method of assembling a penetration-resistant article comprising:

10 providing first and second layers of woven fabric wherein the first and second layers of woven fabric each comprise a first series of fibers aligned in a first direction and a second series of fibers interwoven with the first series of fibers and aligned in a second direction perpendicular to the first direction;

15 selecting a first offset angle between the first layer of woven fabric and the second layer of woven fabric so as to inhibit mechanical interference between opposing adjacent surfaces of the first and second layers of woven fabric;

orienting the first and second layers of woven fabric at the first selected offset angle; and

20 combining the first layer of woven fabric and second layer of woven fabric so as to permit slippage of the first layer of woven fabric and the second layer of woven fabric.

25

- 23 -

20. The method of claim 19, further comprising:

providing a third layer of woven fabric wherein the third layer of woven fabric comprises a first series of fibers aligned in a first direction and a second series of fibers interwoven with the first series of fibers and aligned in a  
5 second direction perpendicular to the first direction;

selecting a second offset angle between the second layer of woven fabric and the third layer of woven fabric to inhibit mechanical interference between opposing adjacent surfaces of the second and third layers of woven fabric,

10 orienting the second and third layers of woven fabric at the selected second offset angle; and

combining the second layer of woven fabric and third layer of woven fabric layer so as to permit slippage of the second layer of woven fabric and the third layer of woven fabric.

15

21. The method of claim 19, wherein the first selected offset angle is about 45 degrees.

22. The method of claim 20, wherein the first selected offset angle and the  
20 second selected offset angle are the same.

23. The method of claim 20, wherein the first selected offset angle and the second selected offset angle are different.

25 24. The method of claim 20, wherein the step of combining the first and second layers comprises inserting the first and second layers into a bag or envelope that surrounds the first and second layers of woven fabric.



- 24 -

25. The method of claim 20, wherein the step of combining the first and second layers comprises attaching the layers at one or more spots along the perimeter of the fabric.

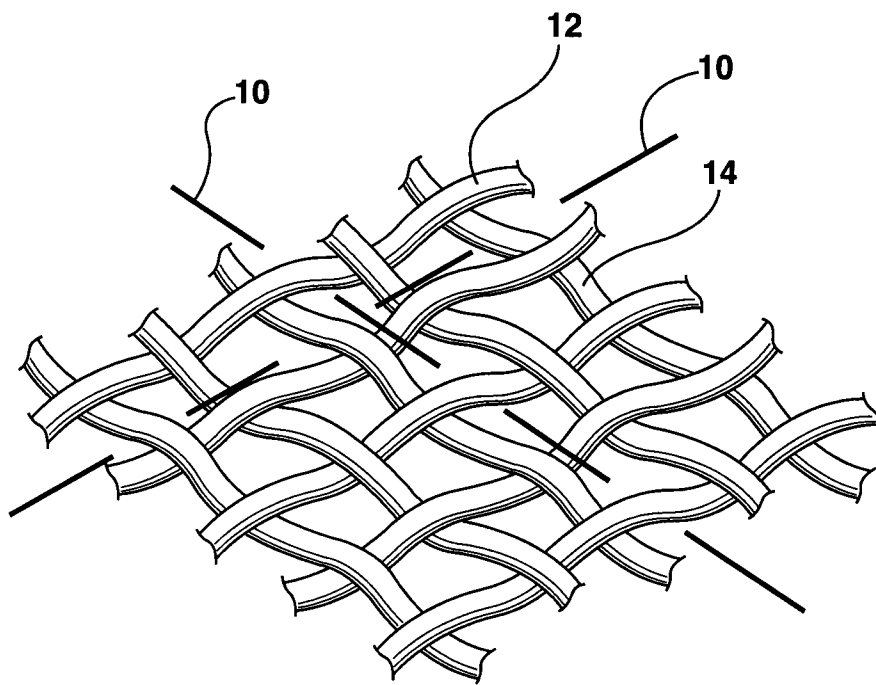


FIG. 1

Model : PROPRIETARY LAYUP  
 Size : 15X15 Weight : NA  
 Construction :

Via : HAND CARRIED  
 Returned : HAND CARRIED

SET-UP

Upper Drop Mass (g) : 1259 D Time Base (mm) : 30.00  
 Lower Drop Mass (g) : 652 Standoff Distance (mm) : 12.7

Test Personnel : A. WILLIAMSON  
 Temperature (F) : 71  
 Rel. Humidity (%) : 64

No.	Sample Description	Blade (P1, S1, Spike)	Angle (deg.)	Desired Energy		Drop Height		Time (ms)	Impact Energy (J)	Penet. (mm)	Remarks
				Level	J	(ft.)	(in.)				
1	17 LAYERS	SPIKE	0	L2, E1	50	8	11.50	4.1597	50.21	0	(a)
2	17 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1587	50.23	0	
3	16 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1719	49.91	0	
4	16 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1671	50.03	0	
5	14 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1609	50.18	0	
6	14 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1657	50.06	0	(a)
7	13 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1624	50.14	0	
8	12 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1597	50.21	0	
9	12 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1840	49.62	0	
10	12 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1625	50.14	0	
11	11 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1682	50.00	0	(b)
12	10 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1659	50.06	33	
13	11 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1703	49.95	0	
14	10 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1537	50.35	36	
15	10 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1526	50.38	53	
16	11 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1607	50.18	26	
17	11 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1619	50.15	0	
18	11 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1762	49.81	0	
19	10 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1641	50.10	0	
20	10 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1641	50.10	0	
21	9 LAYERS	SPIKE	0	L2, E2	50	8	11.50	4.1596	50.21	50	
22											
23											
24											
25											
26											
27											
29											
30											

NOTES  
 (a) SPIKE BENT  
 (b) CHANGED DISCS

DEFINITIONS

Per NIJ-STD-0115.00, sample fails if E1 penetration > 7mm or E2 penetration > 20mm  
 Upper Drop Mass includes weight of 2 foam disks; Lower Drop Mass includes weight of test implement  
 D Time Base is distance between velocity sensors  
 Standoff Distance is measured from blade tip to armor surface when drop mass is at 0 position  
 (just breaking bottom velocity sensor beam)

FIG. 2

3/7

Replacement Sheet

Model : CONTROL NORMAL LAYUP  
 Size : 15X15 Weight : NA  
 Construction :

Via : HAND CARRIED  
 Returned : HAND CARRIED

SET-UP

Upper Drop Mass (g) : 1259  
 Lower Drop Mass (g) : 652

D Time Base (mm) : 30.0  
 Standoff Distance (mm) : 12.7

Test Personnel : A. WILLIAMSON  
 Temperature (F) : 71  
 Rel. Humidity (%) : 64

No.	Sample Description	Blade (P1, S1, Spike)	Angle (deg.)	Desired Energy		Drop Height		Time (ms)	Impact Energy (J)	Penet. (mm)	Remarks
				Level	J	(ft.)	(in.)				
1	14 LAYERS CONTROL	SPIKE	0	L2, E1	50	8	11.50	4.1558	50.30	32	(a,b)
2	14 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1616	50.16	33	
3	15 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1738	49.87	29	
4	17 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1718	49.92	23	
5	17 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1633	50.12	0	
6	16 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1678	50.01	0	
7	16 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1678	50.01	0	
8	15 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1502	50.44	0	(a)
9	14 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1495	49.45	0	
10	16 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1639	50.10	0	
11	13 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1628	50.13	23	(b)
12	14 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1464	50.53	31	
13	15 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1777	49.77	29	
14	16 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1458	50.54	1	(a)
15	16 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1519	50.39	24	
16	16 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1592	50.22	22	
17	16 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1559	50.30	0	(d)
18	16 LAYERS CONTROL	SPIKE	0	L2, E2	50	8	11.50	4.1575	50.26	0	
19											
20											
21											
22											
23											
24											
25											
26											
27											
28											
29											
30											

NOTES

- (a) SPIKE BENT
- (b) CHANGED FOAM BACKING
- (c) CHANGED DISCS

DEFINITIONS

Per NIJ-STD-0115.00, sample fails if E1 penetration > 7mm or E2 penetration > 20mm  
 Upper Drop Mass includes weight of 2 foam disks; Lower Drop Mass includes weight of test implement  
 D Time Base is distance between velocity sensors  
 Standoff Distance is measured from blade tip to armor surface when drop mass is at 0 position  
 (just breaking bottom velocity sensor beam)

FIG. 3

4/7

Replacement Sheet

Model : BARRDAY 4590, 1024-1202  
 Size : VEST Weight : UNKNOWN  
 Construction : PROPRIETARY

Via : HAND CARRIED  
 Returned : HAND CARRIED

SET-UP

Upper Drop Mass (g) : 1259  
 Lower Drop Mass (g) : 652

D Time Base (mm) : 30.0  
 Standoff Distance (mm) : 12.7

Test Personnel : B. SHAFFER  
 Temperature (F) : 66  
 Rel. Humidity (%) : 48

No.	Sample Description	Blade (P1, S1, Spike)	Angle (deg.)	Desired Energy		Drop Height		Time (ms)	Impact Energy (J)	Penet. (mm)	Remarks
				Level	J	(ft.)	(in.)				
1	SAMPLE #3	SPIKE	0	L1, E2	36	6	5.00	4.9304	35.88	0	8 LAYERS + FELT
2	SAMPLE #3	SPIKE	0	L1, E2	36	6	5.00	4.9123	36.15	0	8 LAYERS + FELT
3	SAMPLE #3	SPIKE	0	L1, E2	36	6	5.00	4.9191	36.05	0	8 LAYERS + FELT
4	SAMPLE #3	SPIKE	0	L1, E2	36	6	5.00	4.9375	35.78	0	7 LAYERS + FELT
5	SAMPLE #3	SPIKE	0	L1, E2	36	6	5.00	4.9238	35.98	0	7 LAYERS + FELT
6	SAMPLE #3	SPIKE	0	L1, E2	36	6	5.00	4.9344	35.82	0	6 LAYERS + FELT
7	SAMPLE #3	SPIKE	0	L1, E2	36	6	5.00	4.9325	35.85	0	6 LAYERS + FELT
8	SAMPLE #3	SPIKE	0	L1, E2	36	6	5.00	4.9200	36.03	37	5 LAYERS + FELT
9											
10											
11											
12											
13											
14											
15											
16											
17											
18											
19											
20											
21											
22											
23											
24											
25											
26											
27											
28											
29											
30											

NOTES

DEFINITIONS

Per NIJ-STD-0115.00, sample fails if E1 penetration > 7mm or E2 penetration > 20mm  
 Upper Drop Mass includes weight of 2 foam disks; Lower Drop Mass includes weight of test implement  
 D Time Base is distance between velocity sensors  
 Standoff Distance is measured from blade tip to armor surface when drop mass is at 0 position  
 (just breaking bottom velocity sensor beam)

FIG. 4

5/7

Replacement Sheet

Model : BARRDAY 4590, 1024-1202  
 Size : VEST Weight : UNKNOWN  
 Construction : PROPRIETARY

Via : HAND CARRIED  
 Returned : HAND CARRIED

SET-UP

Upper Drop Mass (g) : 1259 D Time Base(mm) : 30.0  
 Lower Drop Mass (g) : 652 Standoff Distance (mm) : 12.7

Test Personnel : B. SHAFFER  
 Temperature (F) : 66  
 Rel. Humidity (%) : 48

No.	Sample Description	Blade (P1, S1, Spike)	Angle (deg.)	Desired Energy		Drop Height		Time (ms)	Impact Energy (J)	Penet. (mm)	Remarks
				Level	J	(ft.)	(in.)				
1	SAMPLE #5	SPIKE	0	L3, E2	65	11	8.00	3.6614	64.65	0	18 LAYERS + FELT
2	SAMPLE #5	SPIKE	0	L3, E2	65	11	8.00	3.6332	65.66	0	17 LAYERS + FELT
3	SAMPLE #5	SPIKE	0	L3, E2	65	11	8.00	3.6498	65.06	0	17 LAYERS + FELT
4	SAMPLE #5	SPIKE	0	L3, E2	65	11	8.00	3.6515	65.00	0	16 LAYERS + FELT
5	SAMPLE #5	SPIKE	0	L3, E2	65	11	8.00	3.6494	65.08	0	15 LAYERS + FELT
6	SAMPLE #5	SPIKE	0	L3, E2	65	11	8.00	3.6570	64.80	0	15 LAYERS + FELT
7	SAMPLE #5	SPIKE	0	L3, E2	65	11	8.00	3.6500	65.05	0	15 LAYERS + FELT
8											
9											
10											
11											
12											
13											
14											
15											
16											
17											
18											
19											
20											
21											
22											
23											
24											
25											
26											
27											
28											
29											
30											
NOTES											

DEFINITIONS

Per NIJ-STD-0115.00, sample fails if E1 penetration > 7mm or E2 penetration > 20mm  
 Upper Drop Mass includes weight of 2 foam disks; Lower Drop Mass includes weight of test implement  
 D Time Base is distance between velocity sensors  
 Standoff Distance is measured from blade tip to armor surface when drop mass is at 0 position  
 (just breaking bottom velocity sensor beam)

FIG. 5

6/7

Replacement Sheet

Model : BARRDAY 4590, 1024-1202  
 Size : VEST Weight : UNKNOWN  
 Construction : PROPRIETARY

Via : HAND CARRIED  
 Returned : HAND CARRIED

SET-UP

Upper Drop Mass (g) : 1259 D Time Base(mm) : 30.0  
 Lower Drop Mass (g) : 652 Standoff Distance (mm) : 12.7

Test Personnel : B. SHAFFER  
 Temperature (F) : 66  
 Rel. Humidity (%) : 48

No.	Sample Description	Blade (P1, S1, Spike)	Angle (deg.)	Desired Energy		Drop Height		Time (ms)	Impact Energy (J)	Penet. (mm)	Remarks
				Level	J	(ft.)	(in.)				
1	SAMPLE #2	SPIKE	0	L2, E2	50	8	11.50	4.1634	50.12	0	15 LAYERS + FELT
2	SAMPLE #2	SPIKE	0	L2, E2	50	8	11.50	4.1847	49.61	0	15 LAYERS + FELT
3	SAMPLE #2	SPIKE	0	L2, E2	50	8	11.50	4.1667	50.04	0	15 LAYERS + FELT
4	SAMPLE #2	SPIKE	0	L2, E2	50	8	11.50	4.1742	49.86	0	15 LAYERS + FELT
5	SAMPLE #2	SPIKE	0	L2, E2	50	8	11.50	4.1642	50.10	0	14 LAYERS + FELT
6	SAMPLE #2	SPIKE	0	L2, E2	50	8	11.50	4.1700	49.96	0	14 LAYERS + FELT
7	SAMPLE #2	SPIKE	0	L2, E2	50	8	11.50	4.1652	50.07	0	13 LAYERS + FELT
8	SAMPLE #2	SPIKE	0	L2, E2	50	8	11.50	4.1716	49.92	0	13 LAYERS + FELT
9	SAMPLE #2	SPIKE	0	L2, E2	50	8	11.50	4.1796	49.73	0	13 LAYERS + FELT
10											
11											
12											
13											
14											
15											
16											
17											
18											
19											
20											
21											
22											
23											
24											
25											
26											
27											
28											
29											
30											
<u>NOTES</u>											

DEFINITIONS

Per NIJ-STD-0115.00, sample fails if E1 penetration > 7mm or E2 penetration > 20mm  
 Upper Drop Mass includes weight of 2 foam disks; Lower Drop Mass includes weight of test implement  
 D Time Base is distance between velocity sensors  
 Standoff Distance is measured from blade tip to armor surface when drop mass is at 0 position  
 (just breaking bottom velocity sensor beam)

FIG. 6

7/7

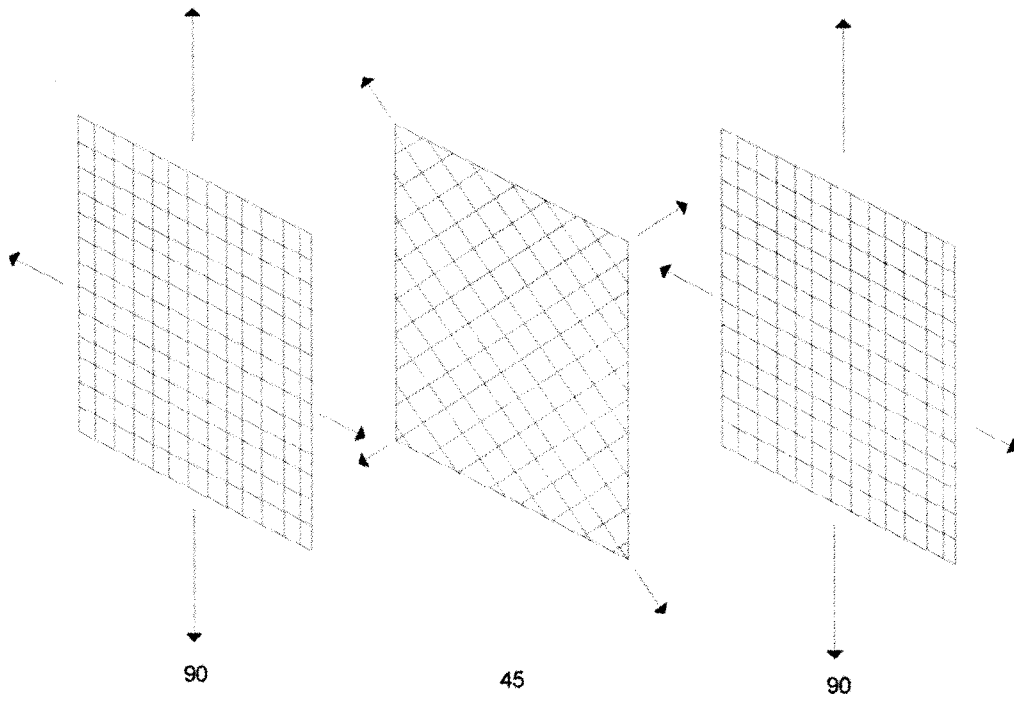


FIG. 7



**INTERNATIONAL SEARCH REPORT**

International application No.  
PCT/CA2010/000870

<p>A. CLASSIFICATION OF SUBJECT MATTER                  IPC: <b>F41H 1/02</b> (2006.01) , <b>B32B 37/12</b> (2006.01) , <b>B32B 5/10</b> (2006.01) , <b>F41H 5/04</b> (2006.01)                  According to International Patent Classification (IPC) or to both national classification and IPC</p>		
<p>B. FIELDS SEARCHED</p>		
<p>Minimum documentation searched (classification system followed by classification symbols)                  IPC: F41H, B32B 37/12, and B32B 5/10                  USCL: 2/2.5 and 442/135</p>		
<p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched</p>		
<p>Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)                  Database: Epoque (EPODOC and Full Text of US Documents)                  Keywords: woven, fabric, layer(s), slip or slippage, offset or angle or angular, ballistic</p>		
<p>C. DOCUMENTS CONSIDERED TO BE RELEVANT</p>		
<b>Category*</b>	<b>Citation of document, with indication, where appropriate, of the relevant passages</b>	<b>Relevant to claim No.</b>
X	US 2003/0228815 A1 (BHATNAGAR, A. et al.) 11 DECEMBER 2003 (11-12-2003) *Entire Document*	1-25
A	US 5,926,842 A (PRICE, A. et al.) 27 JULY 1999 (27-07-1999) *Entire Document*	1-25
A	US 6,219,842 B1 (BACHNER, T. Jr.) 24 APRIL 2001 (24-04-2001) *Entire Document*	1-25
A	US 6,931,662 B2 (LINDEMULDER, J.) 23 AUGUST 2005 (23-08-2005) *Entire Document*	1-25
A	CA 2,627,901 A1 (CHIOU, M.) 14 JUNE 2007 (14-06-2007) *Entire Document*	1-25
A	US 2008/0138566 A1 (STEWART, R. et al.) 12 JUNE 2008 *Entire Document*	1-25
<p><input type="checkbox"/> Further documents are listed in the continuation of Box C.      <input checked="" type="checkbox"/> See patent family annex.</p>		
<b>*</b>	Special categories of cited documents :	<b>"T"</b> later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
<b>"A"</b>	document defining the general state of the art which is not considered to be of particular relevance	<b>"X"</b> document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
<b>"E"</b>	earlier application or patent but published on or after the international filing date	<b>"Y"</b> document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
<b>"L"</b>	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	<b>"&amp;"</b> document member of the same patent family
<b>"O"</b>	document referring to an oral disclosure, use, exhibition or other means	
<b>"P"</b>	document published prior to the international filing date but later than the priority date claimed	
<p>Date of the actual completion of the international search 13 September 2010 (13.09.2010)</p>		<p>Date of mailing of the international search report 20 October 2010 (20-10-2010)</p>
<p>Name and mailing address of the ISA/CA                  Canadian Intellectual Property Office                  Place du Portage I, C114 - 1st Floor, Box PCT                  50 Victoria Street                  Gatineau, Quebec K1A 0C9                  Facsimile No.: 001-819-953-2476</p>		<p>Authorized officer                   Siavash Mohajer (819) 934-3466</p>

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
**PCT/CA2010/000870**

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US2003022815A1	30 January 2003 (30-01-2003)	AT277010T CA2335254A1 DE69920455D1 DE69920455T2 EP1093455A1 EP1093455B1 ES2229736T3 JP2002520315T US6323233B1 US2001056112A1 US6444697B2 US6589975B2 WO0002857A1 WO0002857A9	15 October 2004 (15-10-2004) 20 January 2000 (20-01-2000) 28 October 2004 (28-10-2004) 20 January 2005 (20-01-2005) 25 April 2001 (25-04-2001) 22 September 2004 (22-09-2004) 16 April 2005 (16-04-2005) 09 July 2002 (09-07-2002) 27 November 2001 (27-11-2001) 27 December 2001 (27-12-2001) 03 September 2002 (03-09-2002) 08 July 2003 (08-07-2003) 20 January 2000 (20-01-2000) 20 July 2000 (20-07-2000)
US5926842A	27 July 1999 (27-07-1999)	US5926842A	27 July 1999 (27-07-1999)
US6219842B1	24 April 2001 (24-04-2001)	AU4051997A AU5424898A CA2261746A1 CA2261746C CA2269527A1 CA2269527C DE69714852D1 DE69714852T2 DE69738602D1 EP0914586A1 EP0914586A4 EP0914586B1 EP1006825A1 EP1006825A4 EP1006825B1 US5960470A US5974585A US6131193A US6154880A WO9805917A1 WO9817136A1	25 February 1998 (25-02-1998) 15 May 1998 (15-05-1998) 12 February 1998 (12-02-1998) 08 February 2005 (08-02-2005) 30 April 1998 (30-04-1998) 30 December 2003 (30-12-2003) 26 September 2002 (26-09-2002) 20 March 2003 (20-03-2003) 08 May 2008 (08-05-2008) 12 May 1999 (12-05-1999) 20 October 1999 (20-10-1999) 21 August 2002 (21-08-2002) 14 June 2000 (14-06-2000) 14 June 2000 (14-06-2000) 26 March 2008 (26-03-2008) 05 October 1999 (05-10-1999) 02 November 1999 (02-11-1999) 17 October 2000 (17-10-2000) 05 December 2000 (05-12-2000) 12 February 1998 (12-02-1998) 30 April 1998 (30-04-1998)
US6931662B2	23 August 2005 (23-08-2005)	AU4286001A EP1261835A1 JP2003526071T NL1014608C2 TW461957B US2003106126A1 WO0167027A1	17 September 2001 (17-09-2001) 04 December 2002 (04-12-2002) 02 September 2003 (02-09-2003) 11 September 2001 (11-09-2001) 01 November 2001 (01-11-2001) 12 June 2003 (12-06-2003) 13 September 2001 (13-09-2001)
A2627901A1	14 June 2007 (14-06-2007)	CA2627901A1 CN101325887A EP1973433A1 JP2009518210T KR20080081956A US2009247031A1 WO2007067951A1	14 June 2007 (14-06-2007) 17 December 2008 (17-12-2008) 01 October 2008 (01-10-2008) 07 May 2009 (07-05-2009) 10 September 2008 (10-09-2008) 01 October 2009 (01-10-2009) 14 June 2007 (14-06-2007)

**INTERNATIONAL SEARCH REPORT**International application No.  
**PCT/CA2010/000870**

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US2008138566A1	12 June 2008 (12-06-2008)	AT281974T AU6333600A DE60015747D1 DE60015747T2 EP1178925A1 EP1178925A4 EP1178925B1 US6562435B1 US2004086685A1 US6949280B2 US2004221712A1 WO0061435A1	15 November 2004 (15-11-2004) 14 November 2000 (14-11-2000) 16 December 2004 (16-12-2004) 22 December 2005 (22-12-2005) 13 February 2002 (13-02-2002) 11 September 2002 (11-09-2002) 10 November 2004 (10-11-2004) 13 May 2003 (13-05-2003) 06 May 2004 (06-05-2004) 27 September 2005 (27-09-2005) 11 November 2004 (11-11-2004) 19 October 2000 (19-10-2000)