

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2006229498 B2**

- (54) Title
Method and apparatus for transmitting/receiving MBMS transport blocks
- (51) International Patent Classification(s)
H04L 29/06 (2006.01) **H04W 4/06** (2009.01)
- (21) Application No: **2006229498** (22) Date of Filing: **2006.03.28**
- (87) WIPO No: **WO06/104334**
- (30) Priority Data
- (31) Number (32) Date (33) Country
10-2005-0025644 **2005.03.28** **KR**
- (43) Publication Date: **2006.10.05**
(44) Accepted Journal Date: **2010.02.11**
- (71) Applicant(s)
LG Electronics Inc.
- (72) Inventor(s)
Lee, Young Dae;Jung, Myung Cheul;Chun, Sung Duck
- (74) Agent / Attorney
Freehills Patent & Trade Mark Attorneys, Level 43 101 Collins Street, Melbourne, VIC, 3000
- (56) Related Art
EP 1372350 A1 (SAMSUNG ELECTRONICS CO LTD) 17 December 2003
WO 2005/011157 A1 (SAMSUNG ELECTRONICS CO LTD) 3 February 2005
WO 2003/096149 A2 (QUALCOMM INC) 20 November 2003

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 October 2006 (05.10.2006)

PCT

(10) International Publication Number
WO 2006/104334 A3

(51) International Patent Classification:

H04Q 7/38 (2006.01) *H04L* 29/06 (2006.01)
H04Q 7/22 (2006.01)

(21) International Application Number:

PCT/KR2006/001125

(22) International Filing Date: 28 March 2006 (28.03.2006)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10-2005-0025644 28 March 2005 (28.03.2005) KR

(71) Applicant (for all designated States except US): **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, Seoul, 150-721 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHUN, Sung Duck** [KR/KR]; 601-1007, Saetbyeol Hanyang Apt., Daran-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-719 (KR). **LEE, Young Dae** [KR/KR]; 370-43, Deokpung 2-dong, Hanam-si, Gyeonggi-do 465-012 (KR). **JUNG, Myung Cheul** [KR/KR]; 2/2, 358-36, Sangdo 2-dong, Dongjak-gu, Seoul, 156-032 (KR).

(74) Agents: **KIM, Yong In** et al.; KBK & Associates, 15th Floor Yo Sam Building, 648-23 Yeoksam-dong, Kangnam-gu, Seoul, 135-080 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:

21 June 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR TRANSMITTING/RECEIVING MBMS TRANSPORT BLOCKS

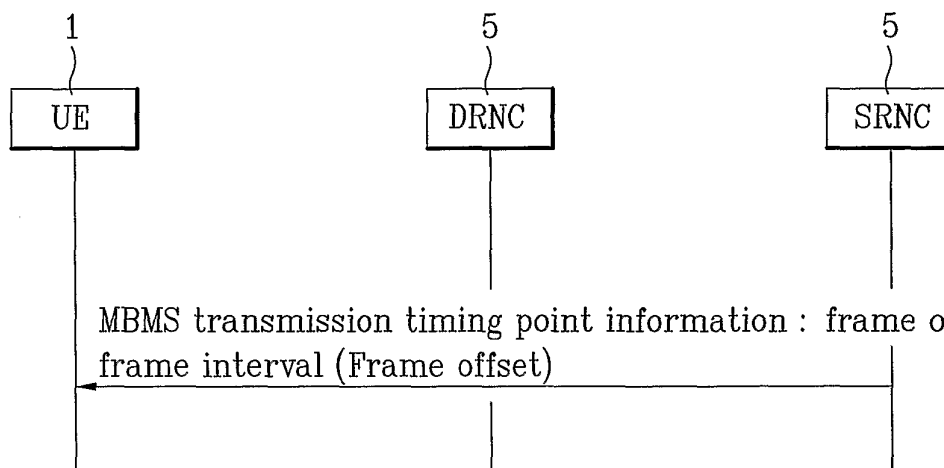

(57) Abstract: An apparatus and method for transmitting/receiving multimedia broadcast/multicast service (MBMS) transport blocks is disclosed, whereby the MBMS transport blocks can be efficiently received by a user equipment (UE). The present invention enables a UE to determine information related to a transmission start timing point of an MBMS transport block, thereby increasing efficiency of soft combining

**METHOD AND APPARATUS FOR TRANSMITTING/RECEIVING MBMS
TRANSPORT BLOCKS**

TECHNICAL FIELD

[0001] The present invention relates to a method of receiving point to multipoint service in a mobile terminal. The invention also relates to a mobile terminal.

BACKGROUND ART

[0002] FIG. 1 is a block diagram of a network structure of a universal mobile telecommunications system (UMTS). Referring to FIG. 1, the universal mobile telecommunications system (hereinafter, referred to as 'UMTS') includes a user equipment 1 (hereinafter, referred to as 'UE'), a UMTS terrestrial radio access network 2 (hereinafter, referred to as 'UTRAN') and a core network 3 (hereinafter, referred to as 'CN'). The UTRAN 2 includes at least one radio network sub-system 4 (hereinafter, referred to as 'RNS') and each RNS includes a radio network controller 5 (hereinafter, referred to as 'RNC') and at least one base station 6 (hereinafter, referred to as 'Node B') managed by the RNC. The Node B 6 includes at least one cell.

[0003] FIG. 2 is an architectural diagram of a radio interface protocol between a UE 1 and UTRAN 2. Referring to FIG. 2, the radio interface protocol horizontally includes a physical layer, a data link layer and a network layer and the radio interface

2006229498 03 Dec 2009

protocol vertically includes a user plane for data information transfer and a control plane for signaling transfer. The protocol layers in FIG. 2 can be divided into L1 (first layer), L2 (second layer), and L3 (third layer) based on lower three layers of the open system interconnection (OSI) standard model widely known in the communications systems.

[0004] The physical layer as the first layer provides an information transfer service to an upper layer using physical channels. The physical layer is connected to a medium access control (MAC) layer above the physical layer via transport channels through which data are transferred between the medium access control layer and the physical layer. Data is transmitted between different physical layers, and more particularly, between the physical layer of a transmitting side and the physical layer of a receiving side via physical channels.

[0005] The medium access control (MAC) layer of the second layer provides services to a radio link control (hereinafter abbreviated RLC) layer above the MAC layer via logical channels. The RLC layer of the second layer supports reliable data transfer and is operative in segmentation and concatenation of RLC service data units (SDUs) sent down from an upper layer.

[0006] The RLC layer operates according to one of three modes; a transparent mode, an unacknowledged mode and an acknowledged mode. A major function of the RLC layer is an SDU discard function. A transmitting side RLC entity discards old RLC SDUs stored in the RLC entity in order to prevent an RLC buffer from being overloaded. The SDU discard function plays an important role in securing a quality of service (hereinafter 'QoS) of a radio bearer service provided by the RLC layer.

[0007] A condition for the transmitting side RLC entity to discard an SDU is the use of a timer or a retransmission count limitation. In the transparent or unacknowledged mode, only the timer is used. In the acknowledged mode, both of the timer and retransmission count limitation can be used.

5 **[0008]** When an RLC layer operates in transparent mode, no header information is added to an RLC SDU transferred from an upper layer and data is transmitted to a receiving side in RLC PDU format. It is decided to use segmentation and concatenation of RLC SDUs when establishing a radio bearer (hereinafter abbreviated 'RB').

10 **[0009]** A transmitting side transparent mode RLC entity and a receiving side transparent mode RLC entity are configured to transfer data unidirectionally. Therefore, when data transmission is bidirectional, the UE and UTRAN should each be equipped with the transmitting side transparent mode RLC entity and the receiving side transparent mode RLC entity.

15 **[0010]** When an RLC layer operates in unacknowledged mode, header information is added to an RLC SDU transferred from an upper layer and data is then transmitted to a receiving side in RLC PDU format. If transmission of an RLC PDU fails, retransmission is not supported. Therefore, even if data is lost or a problem occurs during transmission, the receiving side does not request retransmission but rather discards associated data.

20 **[0011]** In the unacknowledged mode, a transmitting side unacknowledged mode RLC entity transmits data to a receiving side unacknowledged mode RLC entity unidirectionally. Therefore, when data transmission is bidirectional, the UE and

UTRAN should each be equipped with the transmitting side unacknowledged mode RLC entity and the receiving side unacknowledged mode RLC entity.

[0012] When an RLC layer operates in acknowledged mode, header information is added to an RLC SDU transferred from an upper layer and data is then transmitted to a receiving side in RLC PDU format. If transmission of an RLC PDU fails, retransmission is supported.

[0013] Specifically, a transmitting side RLC layer receives status information facilitating a determination of transmission success or failure with regard to a corresponding packet from a receiving side RLC layer and then retransmits an RLC PDU that needs to be retransmitted. In the acknowledged mode, response mode RLC entities, each of which includes a transmitting unit and a receiving unit, exist in both the UE and UTRAN, to enable bi-directional communication.

[0014] A radio resource control (RRC) layer located on the lowest part of the third layer is defined in the control plane only and controls the logical channels, the transport channels, and the physical channels with configuration, reconfiguration, and release of radio bearers (RBs). An RB is a service offered by the second layer for the data transfer between the UE 1 and the UTRAN 2. Generally, configuring an RB refers to defining the characteristics of protocol layers and channels necessary for providing a specific service and is to establish respective specific parameters and operational methods for them.

[0015] A multimedia broadcast/multicast service (hereinafter, referred to as 'MBMS') offers a streaming or background service to a plurality of UEs 1 using a downlink dedicated MBMS bearer service. An MBMS is provided during one session,

and data for the MBMS is transmitted to the plurality of UEs 1 via the MBMS bearer service during an ongoing session only. A UE 1 performs activation first for receiving the MBMS to which the UE has subscribed and receives the activated services only.

[0016] The UTRAN 2 provides the MBMS bearer service to at least one UE 1
5 using radio bearers. The radio bearers (RBs) used by the UTRAN 2 include a point-to-point radio bearer and a point-to-multipoint radio bearer.

[0017] The point-to-point radio bearer is a bi-directional radio bearer and is configured by a logical channel DTCH (dedicated traffic channel), a transport channel DCH (dedicated channel), and a physical channel DPCH (dedicated physical channel)
10 or a physical channel SCCPCH (secondary common control physical channel). The point-to-multipoint radio bearer is a unidirectional downlink radio bearer and is configured by a logical channel MTCH (MBMS traffic channel), a transport channel FACH (forward access channel), and a physical channel SCPCH. The logical channel MTCH is configured for each MBMS offered to one cell and is used for transmitting
15 user-plane data of a specific MBMS to a plurality of UEs.

[0018] As illustrated in FIG. 3, a logical channel MCCH (MBMS control channel) in a conventional system is a point-to-multipoint downlink channel used in transmitting control information associated with the MBMS. The logical channel MCCH is mapped to the transport channel FACH (forward access channel), while the
20 transport channel FACH is mapped to the physical channel SCCPCH (secondary common control physical channel). A cell has only one MCCH.

[0019] The UTRAN 2 providing MBMS services transmits MCCH information through the MCCH channel to at least one UE 1. The MCCH information includes

notification messages, specifically RRC messages related to the MBMS. For example, the MCCH information may include messages indicating MBMS service information, messages indicating point-to-multipoint radio bearer information or access information indicating that RRC connection for the MBMS is needed.

5 **[0020]** FIG. 4 is a diagram illustrating how MCCH information is transmitted in a conventional method. FIG. 5 illustrates a conventional method for providing an MBMS.

[0021] As illustrated in FIG. 4, the UTRAN 2 providing an MBMS service transmits the MCCH information to a plurality of UEs 1 via the MCCH channel. The
10 MCCH information is periodically transmitted according to a modification period and a repetition period.

[0022] The MCCH information is categorized into critical information and non-critical information. The non-critical information can be freely modified each modification period or each repetition period. However, the critical information can be
15 modified only each modification period.

[0023] Specifically, the critical information is repeated one time each repetition period. However, the modified critical information can be transmitted only at a start point of the modification period.

[0024] If at least two neighbor cells transmit the same information related to an
20 MBMS via an MTCH, a UE receives the MTCH transmitted from the cells by soft combining in order to increase its reception sensitivity. In order to facilitate soft combining, transport blocks from the cells in the same time interval should be identical

to each other and a UTRAN should transmit transport blocks for one transport channel only for any given transmission time interval (hereinafter abbreviated TTI).

[0025] One transport block is delivered over one transport channel for one TTI. If there are transport blocks to be transmitted, a transmitting side MAC delivers at least
5 one transport block to a physical layer according to a TTI unit. A transmitting side physical layer encodes the transport blocks received from the MAC for transmission to a receiving side physical layer.

[0026] In order, to allow the receiving side physical layer to decode the encoded data correctly, as illustrated in FIG. 3, the transmitting side transmits transport
10 format (hereinafter abbreviated 'TF') information to the receiving side together with the encoded data. After receiving the TF information from the transmitting side, the receiving side physical layer decodes the received data using the TF in order to reconfigure the transport blocks. The reconfigured transport blocks are transferred to a receiving side MAC according to a TTI unit.

15 **[0027]** The TF information includes various attributes related to one transport channel. Attributes of the TF information can be classified as semi-static and dynamic. Semi-static attributes are TF information that can be changed slowly by an RRC message. Dynamic attributes are TF information that can be changed fast by TTI or radio frame unit.

20 **[0028]** A dynamic attribute is transferred via a transport format combination indicator (hereinafter abbreviated 'TFCI'). The transmitting side transmits the TFCI to the receiving side via a control field of a physical channel.

[0029] Typical dynamic attributes of the TF information are transport block size and transport block set size. The transport block size is defined as a set of transport blocks in a TTI.

[0030] One transport block is defined as one MAC PDU (protocol data unit),
5 which includes one MAC SDU (service data unit) and one MAC header. At least one transport block can be delivered during one TTI.

[0031] The sizes of the transport blocks transmitted for the same TTI are equal. Therefore, a size of the transport block set is a multiple of the size of the transport block.

[0032] An RRC establishes a set of size values of transportable transport blocks
10 for one transport channel. A set of the transport blocks of one transport channel is called a transport format set (TFS).

[0033] At least two transport channels are mapped to one physical channel for transmission. The RRC establishes a set of combinations of the transport blocks of the transport channels that can be simultaneously transmitted for the same transport section
15 via the corresponding physical channel. A set of the combinations (transport format combinations) of the transport blocks of at least two transport channels mapped to one physical channel is called a TFCS (transport format combination set).

[0034] An RNC transmits TFCS information for the physical channel to the transmitting and receiving sides. In order to transmit TFCS information, the RNC
20 transforms the TFCS information into calculated transport format combination (hereinafter abbreviated CTFC) information for transmission to the transmitting and receiving sides rather than directly transmitting the TFCS information.

[0035] A connection frame number (herein abbreviated 'CFN') is a frame counter used for second layer (Layer2)/transport channel synchronization between a UE and a UTRAN. A CFN value is associated with one TBS and is transmitted via a MAC-L1 SAP.

5 **[0036]** The CFN is used for common frame reference in Layer2. For example, the CFN can be used for synchronized transport channel reconfiguration.

[0037] In MBMS transmission, a UE can increase its reception sensitivity by receiving the same MBMS transport blocks from several neighbor cells providing the same MBMS. In general, transmission of an MBMS transport block can start from a
10 CFN corresponding to a multiplication of the number of frames necessary for transmission of one TTI.

[0038] Therefore, if several different MBMS transport blocks are transmitted by being mapped to one channel, transmission of MBMS transport blocks may not be possible within a required time to enable soft combining. In order to solve this problem,
15 MBMS service transmission is delayed, thereby wasting channel resources.

[0039] Therefore, it is necessary to initiate transmission of MBMS transport blocks from different timing points as well as the CFN corresponding to the multiplication of frames required for the transmission of one TTI. However, in the conventional method, a UE is unable to determine information related to a transmission
20 start timing point of an MBMS transport block, thereby reducing efficiency of soft combining.

[0040] Therefore, there is a need for a method and apparatus for transmitting/receiving multimedia broadcast/multicast service (MBMS) transport blocks that enables

a UE to determine information related to a transmission start timing point of an MBMS transport block, thereby increasing efficiency of soft combining. The present invention addresses these and other needs.

[0040a] It is not admitted that any of the information in this specification is common general knowledge, or that the person skilled in the art could reasonably be expected to have ascertained, understood, regarded it as relevant or combined it in any way at the priority date.

DISCLOSURE OF THE INVENTION

[0041] Features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0042] The present invention is directed to a method of receiving a point-to-multipoint service in a mobile terminal, as well as a mobile terminal that substantially obviates one or more problems due to limitations and disadvantages of conventional methods. Described herein is a method for transmitting/receiving multimedia broadcast/multicast service (MBMS) transport blocks, whereby the MBMS transport blocks can be efficiently received by a user equipment (UE).

[0043] As used herein, except where the context requires otherwise the term "comprise" and variations of the term, such as "comprising", "comprises" and "comprised", are not intended to exclude other additives, components, integers or steps.

[0044] In accordance with a first aspect of the present invention, there is provided a method of receiving a point-to-multipoint service in a mobile terminal, the method comprising: receiving, in the mobile terminal, control information including a temporal offset, the control information being received from a current cell via a current cell point-to-multipoint radio bearer information or from a neighboring cell via a neighboring cell point-to-multipoint radio bearer information; receiving, in the mobile terminal from the current cell, a first point-to-multipoint service transport block; calculating, in the mobile terminal, a connection frame number for processing a transport block using the received

2006229498 03 Dec 2009

temporal offset; receiving, in the mobile terminal from the neighboring cell, a second point-to-multipoint service transport block according to the calculated connection frame number; and combining, in the mobile terminal, the first and second point-to-multipoint service transport blocks.

5 [0045] It is contemplated that the control information including the temporal offset is received from a service radio network controller. Preferably, the temporal offset includes one of a frame offset and a time offset.

[0046] It is contemplated that the control information including the temporal offset is received via a radio resource control (RRC) signaling message. Preferably, the
0 control information including the temporal offset is received via one of a point-to-multipoint service control channel and a broadcast control channel.

[0047] It is contemplated that the point-to-multipoint service includes a multimedia broadcast/multicast service.

[0048] In accordance with a second aspect of the invention, there is provided a
5 method of receiving a point-to-multipoint service in a mobile terminal, the method including: receiving, in the mobile terminal from a current cell, a first point-to-multipoint service transport block; receiving, in the mobile terminal from the current cell, first control information via a current cell point-to-multipoint radio bearer information, the first control information including a first temporal offset; receiving, in the mobile terminal from
20 a neighboring cell, second control information via a neighboring cell point-to-multipoint radio bearer information, the second control information including a second temporal offset; calculating, in the mobile terminal, a connection frame number for processing a transport block according to at least one of the first temporal offset or the second temporal offset; receiving, in the mobile terminal from the neighboring cell, a second
25 point-to-multipoint service transport block according to the calculated connection frame number; and combining, in the mobile terminal, the first and second point-to-multipoint service transport blocks.

[0049] It is contemplated that the first and second control information including the first and second temporal offsets are provided from a service radio network

2006229498 03 Dec 2009

controller. Preferably, the temporal offsets include one of a frame offset and a time offset.

[0050] It is contemplated that the first and second control information including the first and second temporal offsets are provided via a radio resource control (RRC) signaling message. Preferably, the control information including the first and second temporal offsets are provided via one of a point-to-multipoint service control channel and a broadcast control channel.

[0051] It is contemplated that the point-to-multipoint service includes a multimedia broadcast/multicast service.

[0052] In accordance with a third aspect of the present invention, there is provided a mobile terminal including: an antenna unit adapted to receive RF signals including a first point-to-multipoint service transport block from a current cell, a second point-to-multipoint service transport block from a neighboring cell, and control information, wherein the control information is received from the current cell via a current cell point-to-multipoint radio bearer information or from the neighboring cell via a neighboring cell point-to-multipoint radio bearer information, the control information including a temporal offset; an RF unit adapted to process the RF signals received by the antenna; a keypad for inputting information from a user; a storage unit adapted to store the first point-to-multipoint service transport block, the second point-to-multipoint service transport block, and the control information; a display adapted to convey information to the user; and a processing unit adapted to calculate a connection frame number for processing a transport block using the temporal offset, process the first point-to-multipoint service transport block, process the second point-to-multipoint service transport block according to the calculated connection frame number, and combine the first and second point-to-multipoint service transport blocks.

[0053] It is contemplated that the temporal offset includes either a frame offset or a time offset. Preferably, the processing unit is further adapted to extract the control information including the temporal offset from a radio resource control (RRC) signalling message.

[0054] It is contemplated that the processing unit is further adapted to process the control information including the temporal offset via either a point-to-multipoint

service control channel or a broadcast control channel. It is further contemplated that the point-to-multipoint service includes a multimedia broadcast/multicast service.

[0055] Described herein, but not claimed is a network for providing a point-to-multipoint service to at least one mobile terminal. The network includes one or more transmitters adapted to transmit signals containing a first point-to-multipoint service transport block, a second point-to-multipoint service transport block and control information to the at least one mobile communication terminal, the first point-to-multipoint service transport block and control information provided from a first cell in which the at least one mobile terminal is currently located and the second point-to-multipoint service transport block provided from a second cell, a receiver adapted to receive signals from the at least one mobile communication terminal and a controller adapted to include a temporal offset in the control information and to control the transmitters to transmit the second point-to-multipoint service transport block according to the temporal offset while transmitting the first point-to-multipoint service transport block.

[0058] It is contemplated that the one or more transmitters are adapted to transmit signals containing a first point-to-multipoint service transport block is located

03 Dec 2009

2006229498

5

THIS PAGE IS INTENTIONALLY LEFT BLANK

in a service radio network controller. Preferably, the controller is further adapted to include the temporal offset including one of a frame offset and a time offset.

[0059] It is contemplated that the controller is further adapted to include the control information in a radio resource control (RRC) signaling message. Preferably, the controller is further adapted to provide the control information via a point-to-multipoint service control channel or a broadcast control channel.

[0060] It is contemplated that the point-to-multipoint service includes a multimedia broadcast/multicast service. Preferably, the controller is further adapted to include a temporal offset associated with a connection frame number (CFN) for transmitting a transport block.

[0061] It is contemplated that the controller is further adapted to determine a connection frame number for transmitting the second point-to-multipoint service transport block by using the temporal offset. Preferably, the controller is further adapted to include the control information a common range bearer information message, a current cell point-to-multipoint range bearer information message and/or a neighboring cell point-to-multipoint range bearer information message.

[0062] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed. These and other embodiments will also become readily apparent to those skilled in the art from the following detailed description of the embodiments

having reference to the attached figures, the invention not being limited to any particular embodiments disclosed.

BRIEF DESCRIPTION OF THE DRAWINGS

5 **[0063]** The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. Features, elements, and aspects of the invention that are referenced by the same numerals in different figures represent the
10 same, equivalent, or similar features, elements, or aspects in accordance with one or more embodiments.

[0064] FIG. 1 is a block diagram of a network structure of a general UMTS.

[0065] FIG. 2 is a diagram of a structure of a radio interface protocol between a UE and a UTRAN.

15 **[0066]** FIG. 3 is a diagram illustrating a channel configuration for an MBMS in a UE.

[0067] FIG. 4 is a diagram illustrating transmission scheme of MCCH information in a conventional system.

[0068] FIG. 5 illustrates a transmission scheme of MBMS transport blocks
20 according to one embodiment of the present invention.

[0069] FIG. 6 illustrates a method of transmitting transmission timing point information related to transmitting MBMS transport blocks according to the present invention.

[0070] FIG. 7 is a block diagram of a mobile communication terminal according to one embodiment of the present invention

BEST MODE FOR CARRYING OUT THE INVENTION

5 [0071] The present invention relates to an apparatus and method for transmitting/ receiving multimedia broadcast/multicast service (MBMS) transport blocks, whereby the MBMS transport blocks can be efficiently received by a user equipment (UE). Although the present invention is illustrated with respect to a mobile communication device, it is contemplated that the present invention may be utilized
10 anytime it is desired to transmit and receive transport blocks efficiently.

[0072] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

15 [0073] FIG. 5 is a diagram illustrating transmission of an MBMS transport block. As illustrated in FIG. 5, transmission of the transport block can start from a time corresponding to a connection frame number (CFN) that corresponds to a multiple of the number of frames transmitted during one transmit time interval (TTI) such that division by the number of frames yields a remainder of '0'. Specifically, the transport
20 block transmission can be initiated at a timing point corresponding to a CFN that satisfies Formula 1.

[0074] [Formula 1] $CFN \bmod F = 0$

[0075] In Formula 1, 'F' is the number of frames required for one TTI transmission. As illustrated in FIG. 5, since the number of frames necessary for one TTI is '8', the CFN available for a transmission timing point of transport block is 80, 88, 96 or 104.

5 **[0076]** To perform soft combining in a physical layer of a receiving side, the same transport block should be received from a neighboring cell within a time of (1 TTI + 1 slot). However, if TTI has to be simultaneously used for different services over one channel, transmission block reception from a neighboring cell is normally impossible within a soft combining window, thereby making soft combining impossible.

10 **[0077]** In order to overcome this problem, it is necessary to initiate transport block transmission at a timing point not corresponding to a CFN corresponding to a multiple of the number of frames required for one TTF transmission such that division by the number of frames yields a remainder of '0'. Specifically, a transport block must be transmitted at a timing point that does not satisfy Formula 1.

15 **[0078]** In order to accomplish this, information about a transmission timing point of an MBMS transport block can be determined as a value that has a uniform time interval from a CFN that satisfies Formula 1, such as a frame offset. The frame offset information can be delivered to a Node B and a UE to indicate a timing point from which transmission of a corresponding transport block begins. Alternatively,
20 transmission timing point information can be determined as a new CFN indicating a transmission start point of an MBMS transport block irrespective of a CFN that satisfies Formula 1.

[0079] FIG. 6 illustrates a method of transmitting transmission timing point information for an MBMS transport block. As illustrated in FIG. 6, transmission timing point information related to an MBMS transport block is transmitted to a UE from an RNC.

5 **[0080]** A frame offset is one example of the transmission timing point information related to an MBMS transport block. For instance, with reference to FIG. 5, the frame offset may be information indicating that transmission of a transport block begins at a timing point with a certain delay from CFN 80, 88 or 96. Specifically, if the frame offset value is '2', transmission of a transport block can be initiated at a timing
10 point corresponding to a value of CFN 82, 90 or 98.

[0081] A UE can correctly obtain a transmission timing point of an MBMS transport block using the corresponding transmission timing point information. The transmission timing point information of the transport block may differ in each cell. Specifically, a UE can receive different types of transmission timing point information
15 from several cells.

[0082] The UE can deliver the information received regarding the MBMS transmission timing point to a physical layer. The physical layer of the UE can correctly determine a reception timing of an SCCPCH, which is an MBMS physical layer transport channel corresponding to a transport block transmitted from a UTRAN, using
20 this information.

[0083] The MBMS service transmission timing may be a new CFN generated specifically for the MBMS. The UE receives the new CFN and determines an accurate transmission timing point of the transport block. The determined transmission timing

point can be provided to the physical layer in order to determine an accurate timing point of an SCCPCH carrying a corresponding transport block.

[0084] The transmission timing point of an MBMS transport block can be transmitted to the UE via an RRC signaling message. Furthermore, the transmission
5 timing point of the MBMS transport block can be transmitted to the UE via an MCCH or BCCH or can be included in a MBMS COMMON RB INFORMATION message, a MBMS Current Cell p-t-m rb Information message or an MBMS Neighboring Cell p-t-m rb Information message.

[0085] The embodiments of the present invention are illustrated with respect to
10 mobile communications. However, the technical features of the present invention are also applicable to wireless communication systems, such as a PDA (personal digital assistant) or a notebook computer equipped with a wireless communication function. Terms used in describing the present invention are not limited to a wireless communication system, such as UMTS. The present invention is applicable to wireless
15 communication systems using different wireless interfaces and physical layers such as TDMA, CDMA and FDMA.

[0086] The technical features of the present invention can be implemented with software, firmware, hardware or combinations of the software, firmware and/or hardware. Specifically, the contents of the present invention may be implemented with
20 hardware using a code, circuit chip and hardware logic such as ASIC or with code in a storage medium readable by a computer such as a hard disc, a floppy disc or a tape or in an optical storage, ROM or RAM using a computer programming language. Code stored in a computer readable medium may be accessible by a processor and can be executed.

[0087] Code implementing contents of the present invention may be accessible via a transport medium or via a file server on a network. A device implemented with the code may be configured to include a wire transport medium such as a network transport line, a wireless transport medium, a signal transfer, a radio signal or an infrared signal.

5 [0088] FIG. 7 illustrates a block diagram of a mobile communication terminal 70 according to one embodiment of the present invention. As illustrated in FIG. 7, the mobile communication terminal 70 includes an antenna unit 71, an RF (radio frequency) unit 72, a signal processing unit 73 and a memory unit 74. The signal processing unit 73 includes a processing unit such as a microprocessor and a digital processor. The mobile
10 communication terminal further includes a display unit 75 displaying specific information on a screen, a keypad unit 76 receiving a signal from a user and a speaker unit 77 outputting a sound signal.

[0089] The mobile communication terminal 70 receives transmission timing point information related to an MBMS transport block and at least one transport block
15 from at least one base station using the antenna unit 71 and the RF unit 72. The signal processing unit 73 decodes the at least one received MBMS transport block corresponding transmission timing point using the information related to the MBMS transport block.

[0090] The present invention enables a UE to accurately determine a
20 transmission timing point of an MBMS transport block, thereby enabling the UE to receive the MBMS efficiently.

[0091] As the present invention may be embodied in several forms without departing from the spirit or essential characteristics thereof, it should also be understood

that the above-described embodiments are not limited by any of the details of the foregoing description, unless otherwise specified, but rather should be construed broadly within its spirit and scope as defined in the appended claims, and therefore all changes and modifications that fall within the metes and bounds of the claims, or

5 equivalence of such metes and bounds are therefore intended to be embraced by the appended claims.

[0092] The foregoing embodiments and advantages are merely exemplary and are not to be construed as limiting the present invention. The present teaching can be readily applied to other types of apparatuses. The description of the present invention is

10 intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations will be apparent to those skilled in the art. In the claims, means-plus-function clauses are intended to cover the structure described herein as performing the recited function and not only structural equivalents but also equivalent structures.

15

INDERSTRIAL APPLICABILITY

[0093] The present invention can be applied to a mobile communication system.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method of receiving a point-to-multipoint service in a mobile terminal, the method comprising:

receiving, in the mobile terminal, control information including a temporal offset, the control information being received from a current cell via a current cell point-to-multipoint radio bearer information or from a neighboring cell via a neighboring cell point-to-multipoint radio bearer information;

receiving, in the mobile terminal from the current cell, a first point-to-multipoint service transport block;

10 calculating, in the mobile terminal, a connection frame number for processing a transport block using the received temporal offset;

receiving, in the mobile terminal from the neighboring cell, a second point-to-multipoint service transport block according to the calculated connection frame number; and

15 combining, in the mobile terminal, the first and second point-to-multipoint service transport blocks.

2. The method of claim 1, wherein the control information including the temporal offset is received from a service radio network controller.

3. The method of claim 1, wherein the temporal offset includes one of a frame offset and a time offset.

20 4. The method of claim 1, wherein the control information including the temporal offset is received via a radio resource control (RRC) signaling message.

5. The method of claim 1, wherein the control information including the temporal offset is received via one of a point-to-multipoint service control channel and a broadcast control channel.

2006229498 03 Dec 2009

6. The method of claim 1, wherein the point-to-multipoint service includes a multimedia broadcast/multicast service.

7. A mobile terminal including:

an antenna unit adapted to receive RF signals including a first point-to-multipoint service transport block from a current cell, a second point-to-multipoint service transport block from a neighboring cell, and control information, wherein the control information is received from the current cell via a current cell point-to-multipoint radio bearer information or from the neighboring cell via a neighboring cell point-to-multipoint radio bearer information, the control information including a temporal offset;

an RF unit adapted to process the RF signals received by the antenna;

a keypad for inputting information from a user;

a storage unit adapted to store the first point-to-multipoint service transport block, the second point-to-multipoint service transport block, and the control information;

a display adapted to convey information to the user; and

a processing unit adapted to calculate a connection frame number for processing a transport block using the temporal offset, process the first point-to-multipoint service transport block, process the second point-to-multipoint service transport block according to the calculated connection frame number, and combine the first and second point-to-multipoint service transport blocks.

8. The mobile terminal of claim 7, wherein the temporal offset includes one of a frame offset and a time offset.

9. The mobile terminal of claim 7, wherein the processing unit is further adapted to extract the control information including the temporal offset from a radio resource control (RRC) signaling message.

10. The mobile terminal of claim 7, wherein the processing unit is further adapted to process the control information including the temporal offset via one of a point-to-multipoint service control channel and a broadcast control channel .

11. The mobile terminal of claim 7, wherein the mobile terminal is configured to receive a multimedia broadcast/multicast service.

12. A method of receiving a point-to-multipoint service in a mobile terminal, the method including:

receiving, in the mobile terminal from a current cell, a first point-to-multipoint service transport block;

receiving, in the mobile terminal from the current cell, first control information via a current cell point-to-multipoint radio bearer information, the first control information including a first temporal offset;

receiving, in the mobile terminal from a neighboring cell, second control information via a neighboring cell point-to-multipoint radio bearer information, the second control information including a second temporal offset;

calculating, in the mobile terminal, a connection frame number for processing a transport block according to at least one of the first temporal offset or the second temporal offset;

receiving, in the mobile terminal from the neighboring cell, a second point-to-multipoint service transport block according to the calculated connection frame number; and

combining, in the mobile terminal, the first and second point-to-multipoint service transport blocks.

13. The method of claim 12, wherein the first and second control information respectively including the first and second temporal offsets are received from a service radio network controller.

14. The method of claim 12, wherein the first and second temporal offsets respectively include a frame offset or a time offset.

15. The method of claim 12, wherein the first and second control information respectively including the first and second temporal offsets are received via a radio resource control (RRC) signaling message.

16. The method of claim 12, wherein the first and second control information respectively including the first and second temporal offsets are received via a point-to-multipoint service control channel or a broadcast control channel.

17. The method of claim 12, wherein the point-to-multipoint service includes a multimedia broadcast/multicast service.


18. The method of claim 12, the first and second point-to-multipoint service transport blocks are received through a secondary common control physical channel (SCCPCH) mapped to a multimedia broadcast/multicast service traffic channel (MTCH).

19. The method of claim 1, wherein the first and second point-to-multipoint service transport blocks are received through a secondary common control physical channel (SCCPCH) mapped to a multimedia broadcast/multicast service traffic channel (MTCH).

20. The mobile terminal of claim 7, the first and second point-to multipoint service transport blocks are received through a secondary common control physical channel (SCCPCH) mapped to a multimedia broadcast/multicast service traffic channel (MTCH).


1/6

FIG. 1

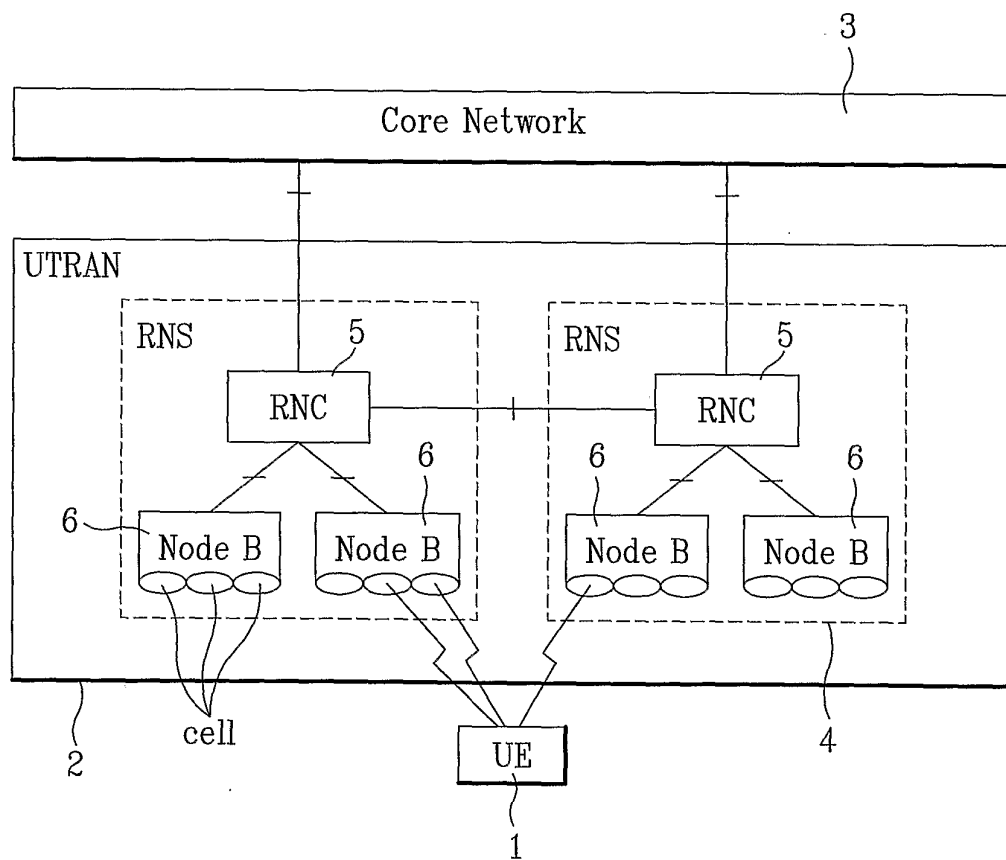

2/6

FIG. 2

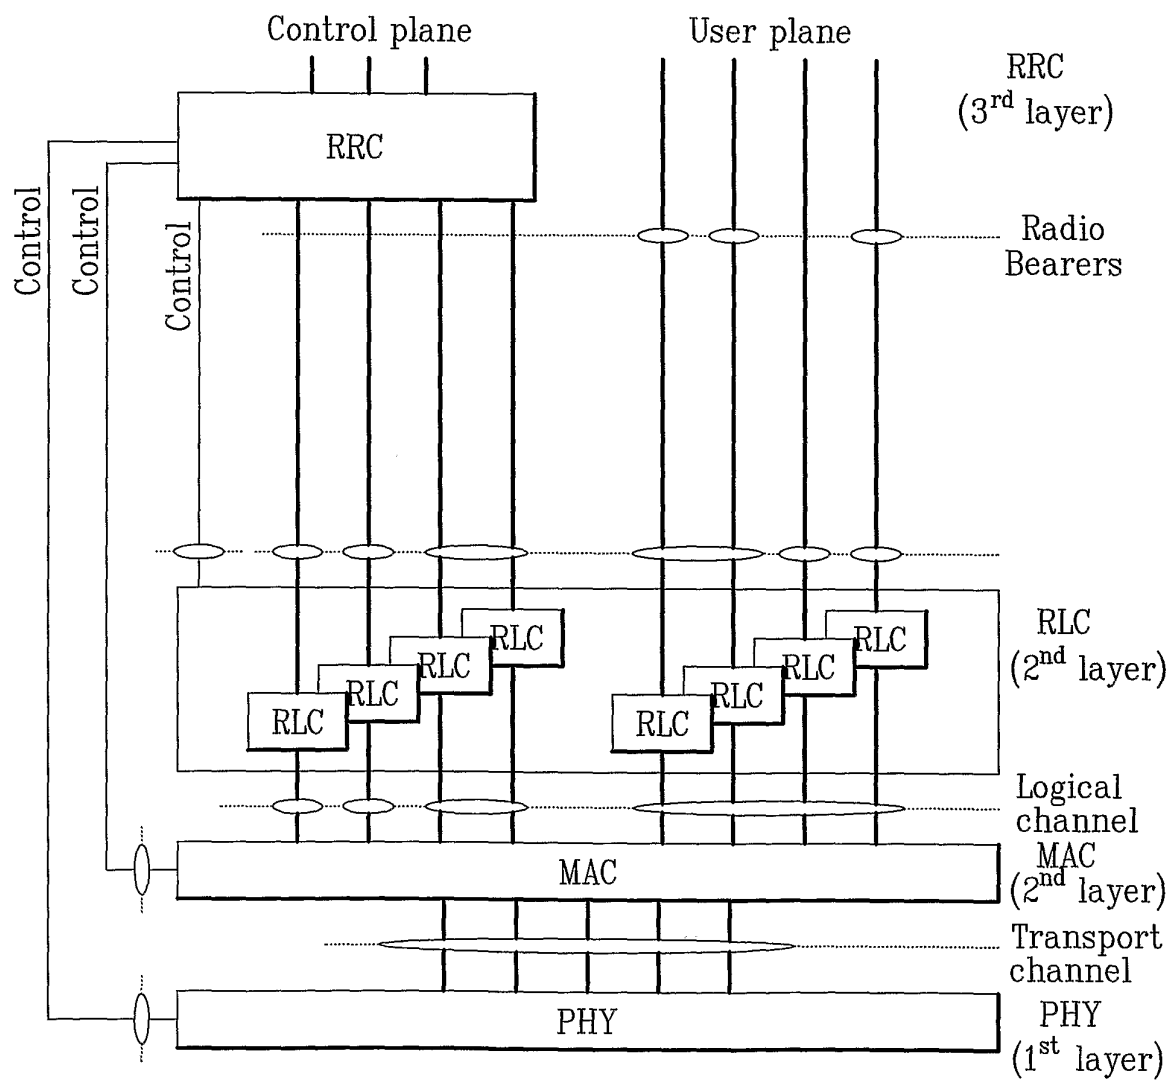

3/6

FIG. 3



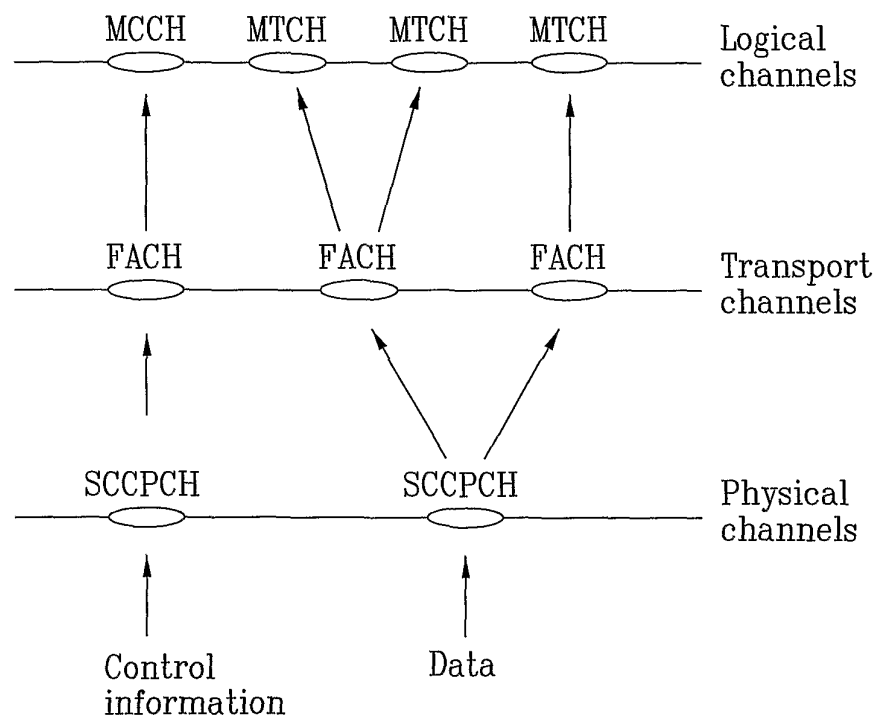


FIG. 4

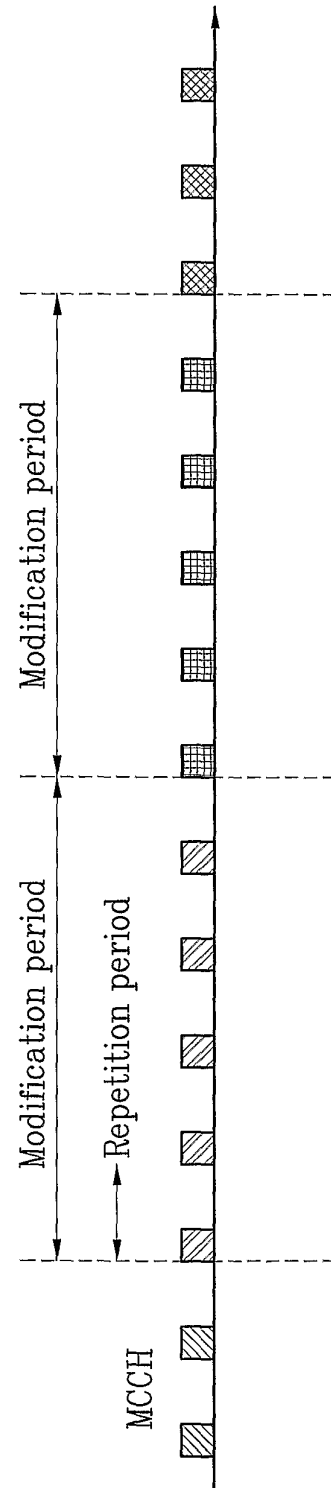

5/6

FIG. 5

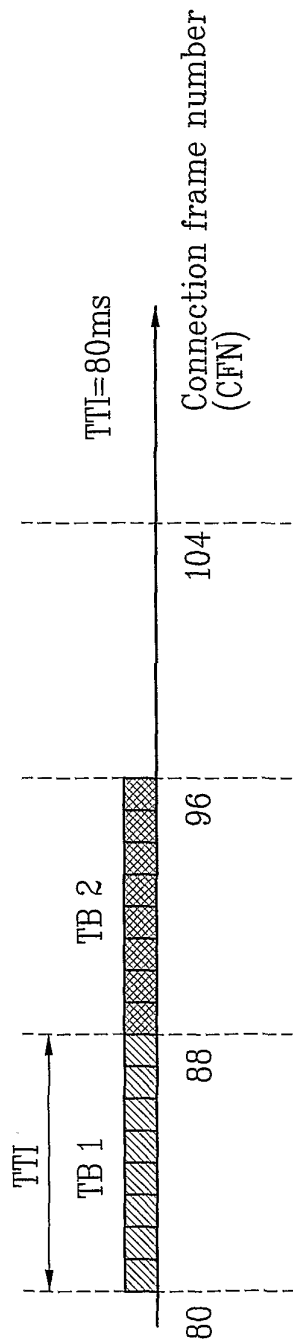

6/6

FIG. 6

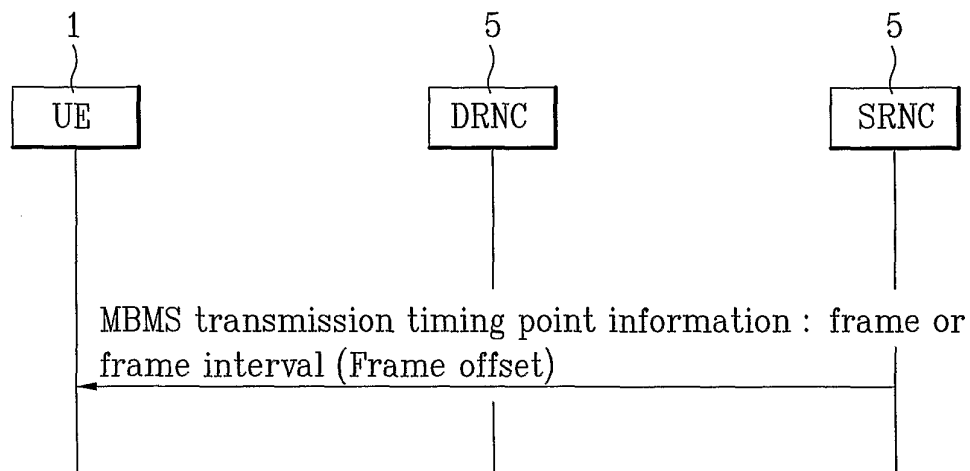


FIG. 7

