United States Patent [19]

Uetrecht

[11] **3,919,648**

[45] **Nov. 11, 1975**

[54] **VOLTAGE-CONTROLLED FILTER**

[75] Inventor: **Dale M. Uetrecht**, Cincinnati, Ohio

[73] Assignee: **D. H. Baldwin Company**, Cincinnati, Ohio

[22] Filed: **June 15, 1973**

[21] Appl. No.: **370,303**

[52] **U.S. Cl.** **328/167**; 84/1.11; 84/1.19; 84/DIG. 10; 328/151; 328/160; 330/107

[51] **Int. Cl.**[2].. **G10H 1/02**; G10H 5/04; G06G 7/16; H03F 1/34

[58] **Field of Search**..... 328/158, 160, 167; 330/107, 109; 84/1.01, 1.11, 1.19, DIG. 10

[56] **References Cited**

UNITED STATES PATENTS

3,355,668	11/1967	Boensel et al.	328/167
3,569,603	3/1971	Kern	84/1.19
3,767,833	10/1973	Noble et al.	84/1.19 X

OTHER PUBLICATIONS

Barna, Operational Amplifiers, pp. 1–31, published by John Wiley & Sons, Inc., 1971.

Tow, "A Step-By-Step Active-Filter Design;" IEEE Spectrum, 12/1969, pp. 64–68.

Salerno, "Active Filters:Part 7, Analog Blocks Ensure Stable Design," Electronics (pub.), 2/17/1969, pp. 100–105.

Colin, "Electrical Design & Musical Applications of an Unconditionally Stable Combination Voltage Controlled Filter/Resonator," Journal of the Audio Engineering Society (pub.), 12/1971, Vol. 19, No. 11, pp. 923–927.

Primary Examiner—Michael J. Lynch
Assistant Examiner—L. N. Anagnos
Attorney, Agent, or Firm—W. H. Breunig

[57] **ABSTRACT**

An audio frequency filter having voltage controlled transfer functions providing one or more of low pass, bandpass and high pass characteristics, selective in terms of cut-off frequencies and center frequency, including in cascade a first operational amplifier, a first multiplier responsive to a multiplicative function, a second operational amplifier having a frequency selective transfer function, a second multiplier responsive to said multiplicative function and a third operational amplifier having a frequency selective transfer function, in which negative feedback is provided between the outputs of the second and third operational amplifiers and said first operational amplifier.

12 Claims, 13 Drawing Figures

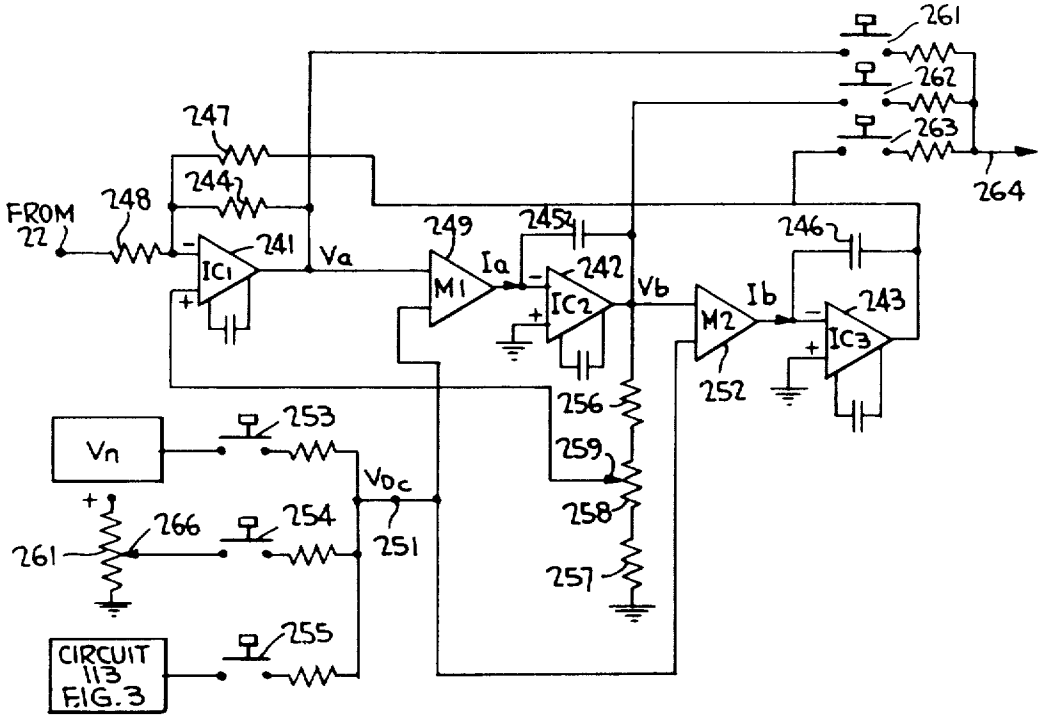


FIG. 3

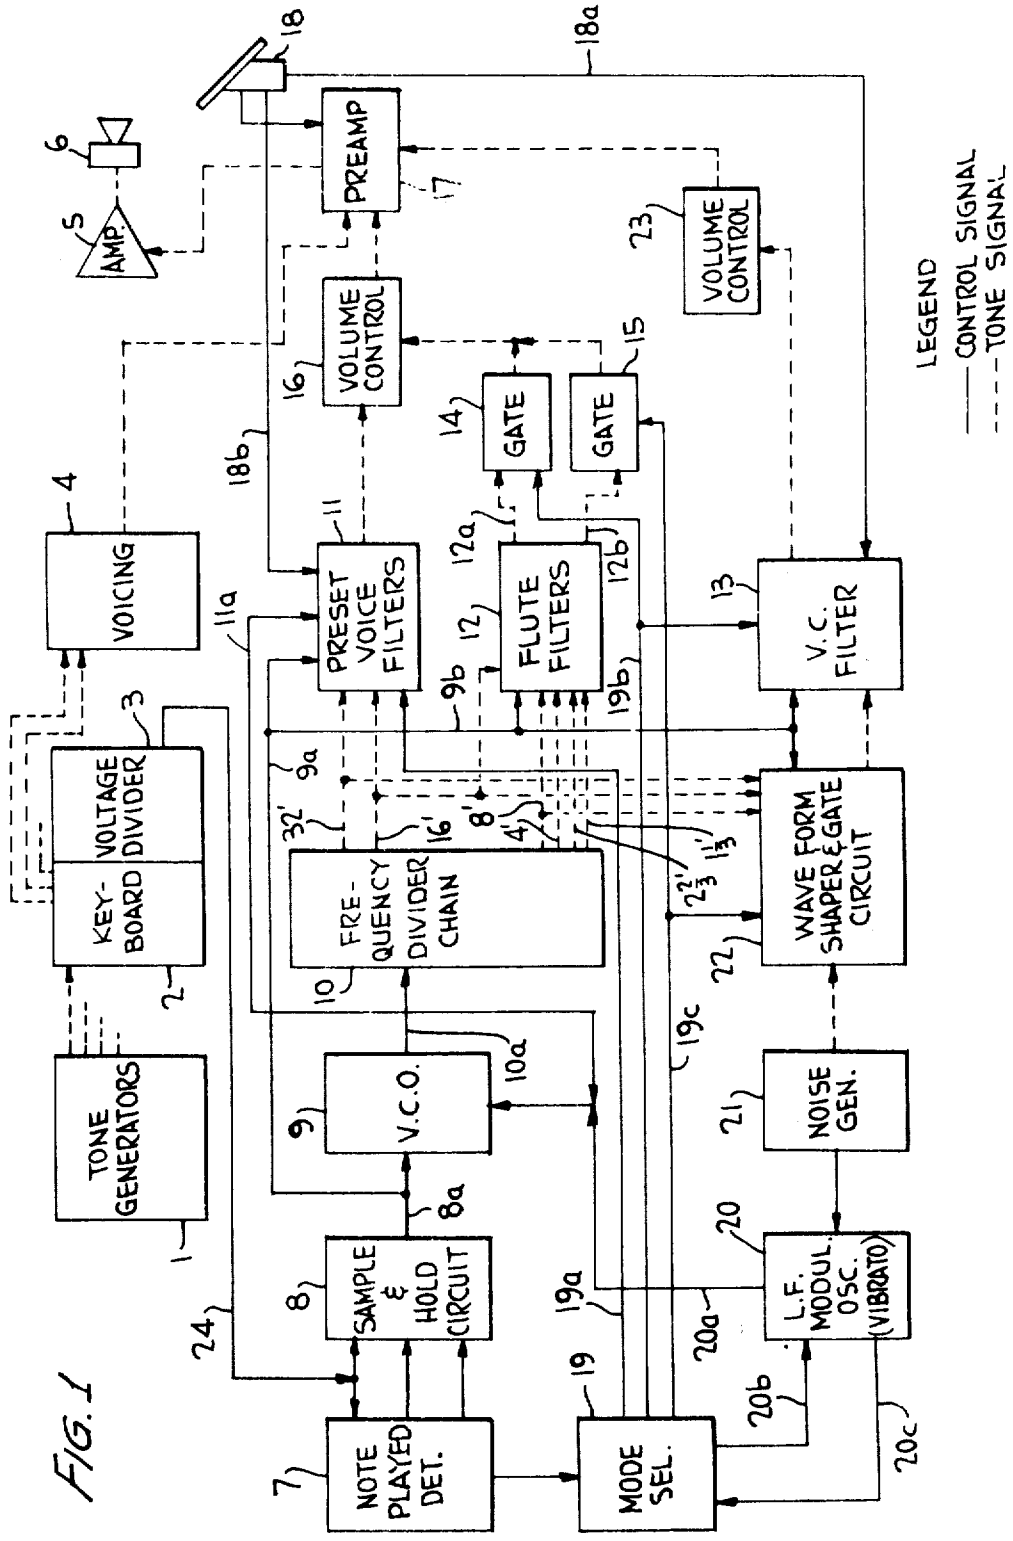

TONE GENERATORS
KEY-BOARD
VOLTAGE DIVIDER
VOICING
AMP.
PREAMP
VOLUME CONTROL
VOLUME CONTROL
GATE
GATE
PRESET VOICE FILTERS
FLUTE FILTERS
V.C. FILTER
FRE-QUENCY DIVIDER CHAIN
V.C.O.
SAMPLE & HOLD CIRCUIT
NOTE PLAYED DET.
MODE SEL.
WAVE FORM SHAPER & GATE CIRCUIT
NOISE GEN.
L.F. MODUL. OSC. (VIBRATO)
LEGEND
CONTROL SIGNAL
TONE SIGNAL

FIG. 1

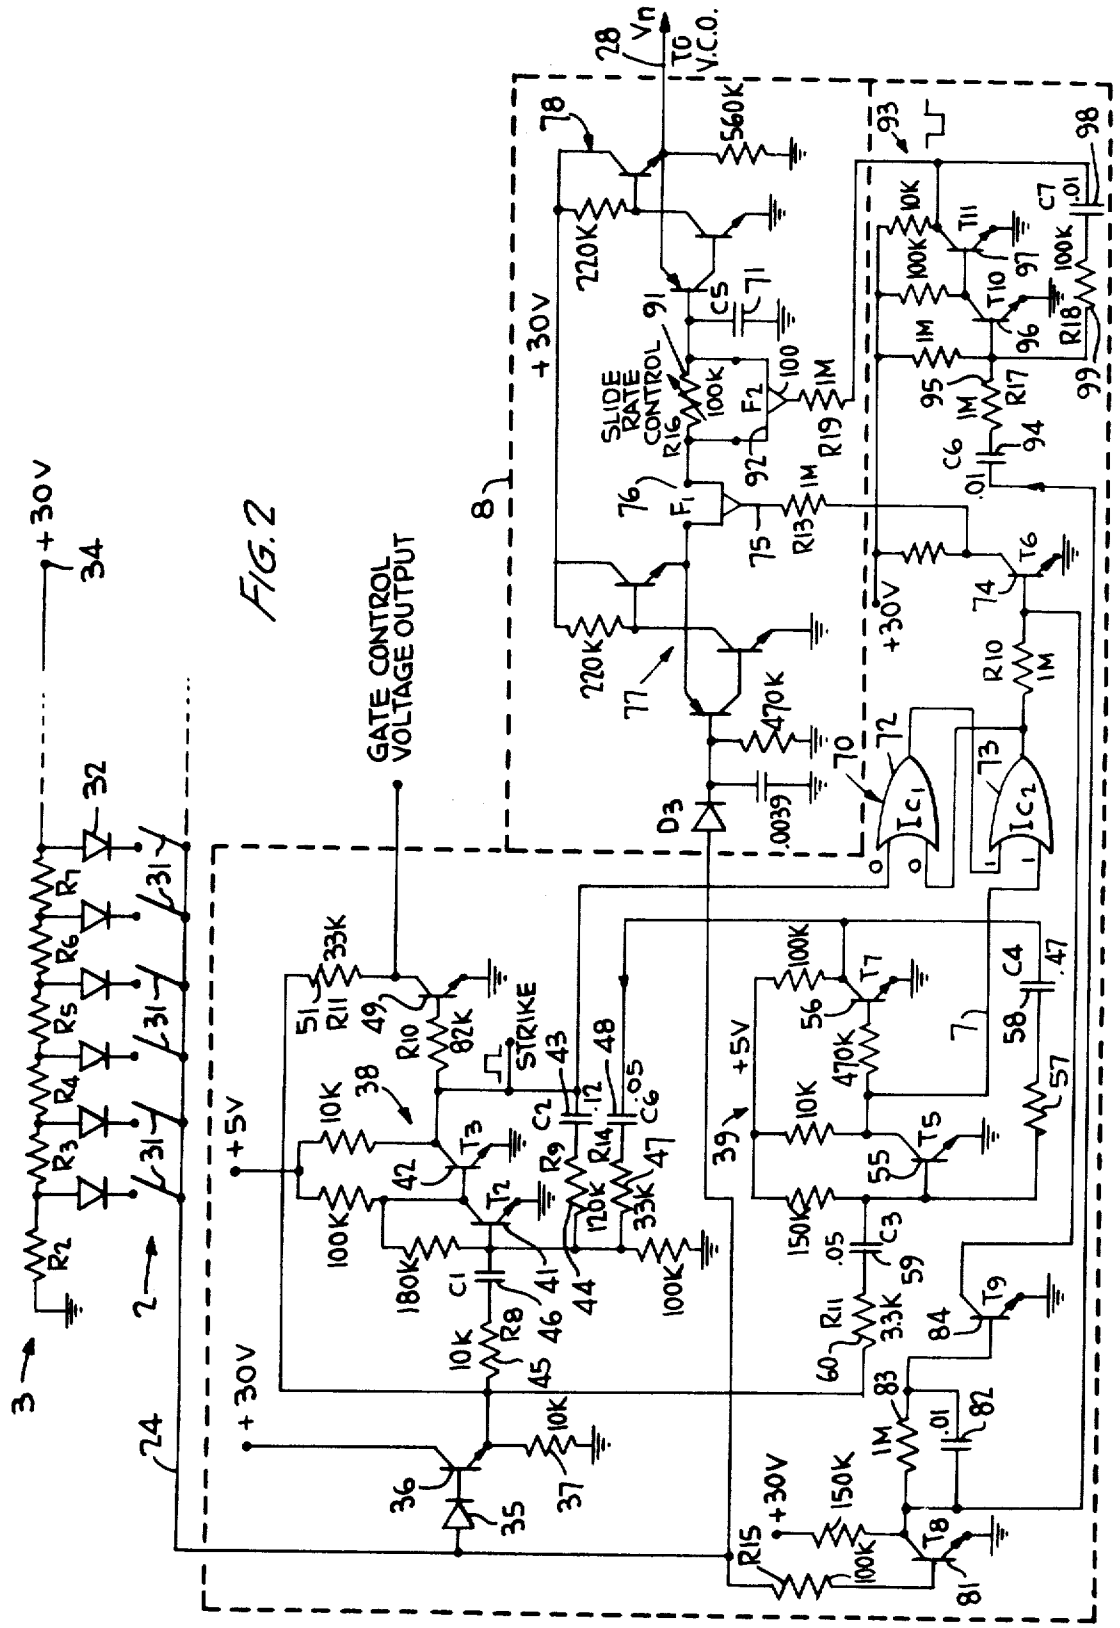

+30V
34
32
R1
R6
R5
R4
R3
R2
31
2
3
24
+5V
+30V
GATE CONTROL VOLTAGE OUTPUT
8
28
Vn
TO V.C.O.
78
560K
220K
91
C5
71
SLIDE RATE CONTROL
R16
100K
F2
100
1M
R19
92
76
F1
75
R13
1M
77
220K
470K
70
D3
.0039
72
IC1
73
IC2
R10
1M
74
T6
+30V
93
98
C7
.01
T11
10K
100K
97
T10
96
R18
100K
99
95
1M
R17
1M
94
C6
.01
51
R11
33K
49
R10
82K
STRIKE
43
48
C2
.12
C6
.05
38
10K
42
T3
T2
R9
120K
R14
33K
47
100K
180K
C1
41
44
R8
10K
46
45
10K
36
35
37
+5V
39
100K
56
T7
470K
10K
55
T5
150K
C3
.05
59
R11
3.3K
60
C4
.47
58
57
7
T9
84
83
1M
.01
82
+30V
150K
R15
100K
T8
81

FIG. 2

FIG. 3

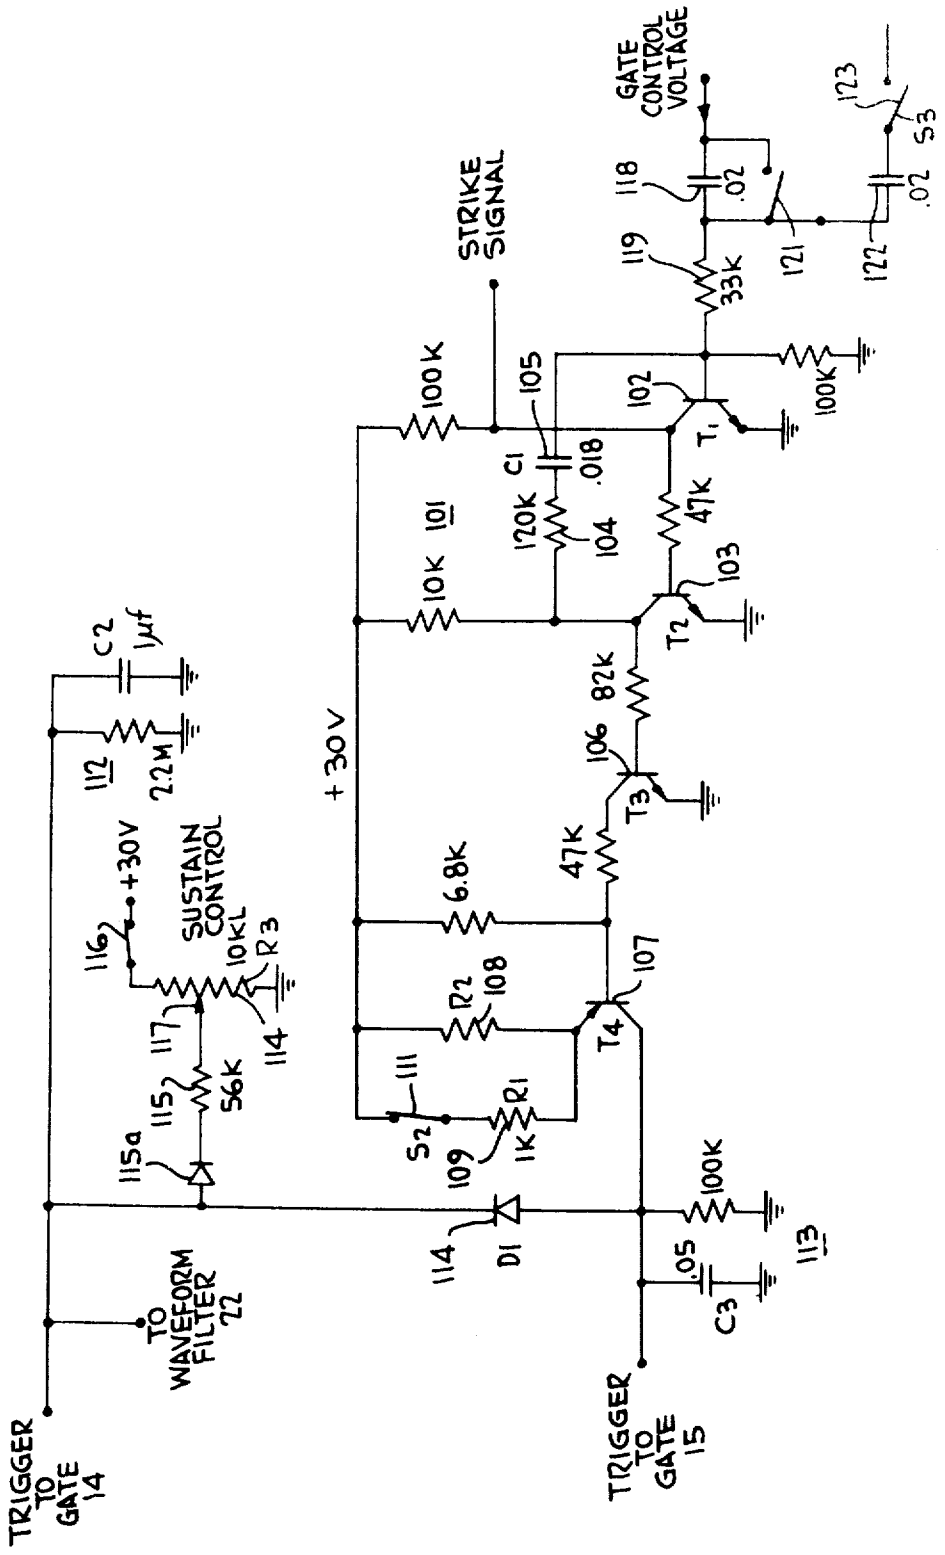

TRIGGER TO GATE 14
TO WAVEFORM FILTER 22
+30V
SUSTAIN CONTROL
10KL
R3
56K
115
115a
117
114
112
2.2M
C2
1μf
116
+30V
114
D1
S2
109
1K
R1
111
R2
108
6.8k
47K
107
T4
106
82k
T3
103
T2
10K
101
120K
104
C1
.018
105
102
T1
100K
100K
STRIKE SIGNAL
+30V
GATE CONTROL VOLTAGE
118
.02
119
33k
121
122
123
S3
.02
100K
113
.05
C3
TRIGGER TO GATE 15

FIG. 4

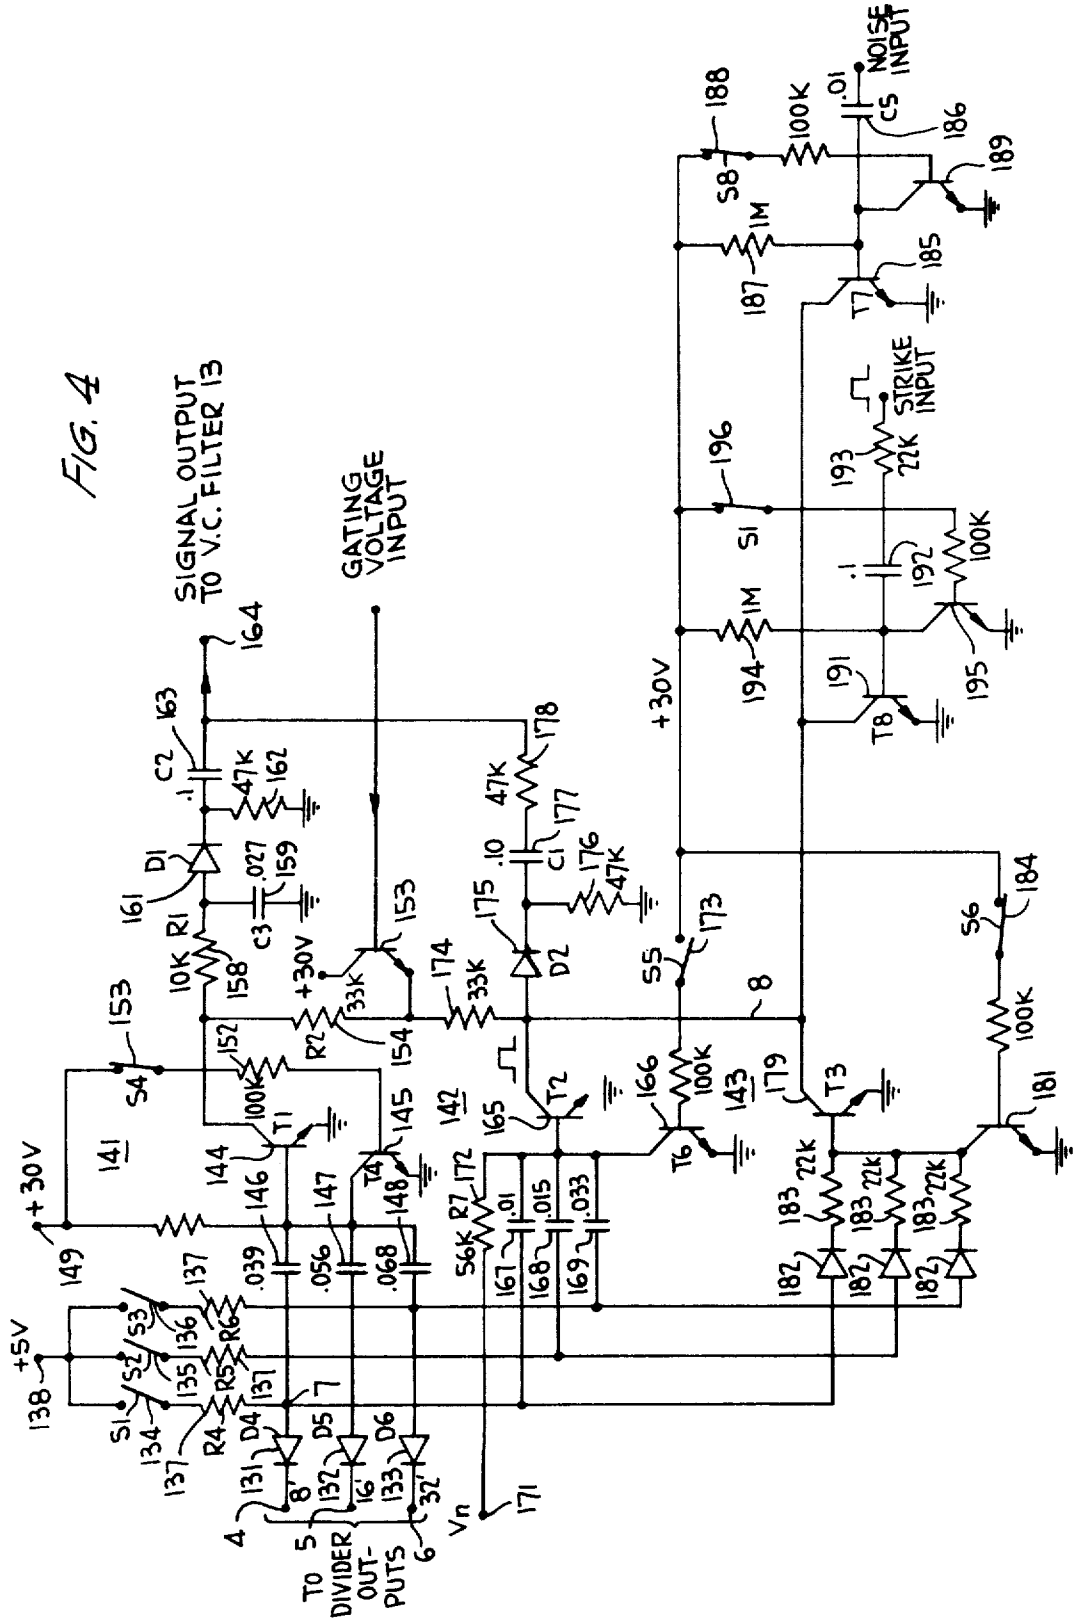

SIGNAL OUTPUT TO V.C. FILTER 13
GATING VOLTAGE INPUT
NOISE INPUT
STRIKE INPUT
+30V
+5V
TO DIVIDER OUTPUTS
Vn
T1
T2
T3
T4
T6
T7
T8
S1
S2
S3
S4
S5
S6
S8
D1
D2
D4
D5
D6
C1
C2
C3
C5
R1
R2
R4
R5
R6
R7

FIG. 5

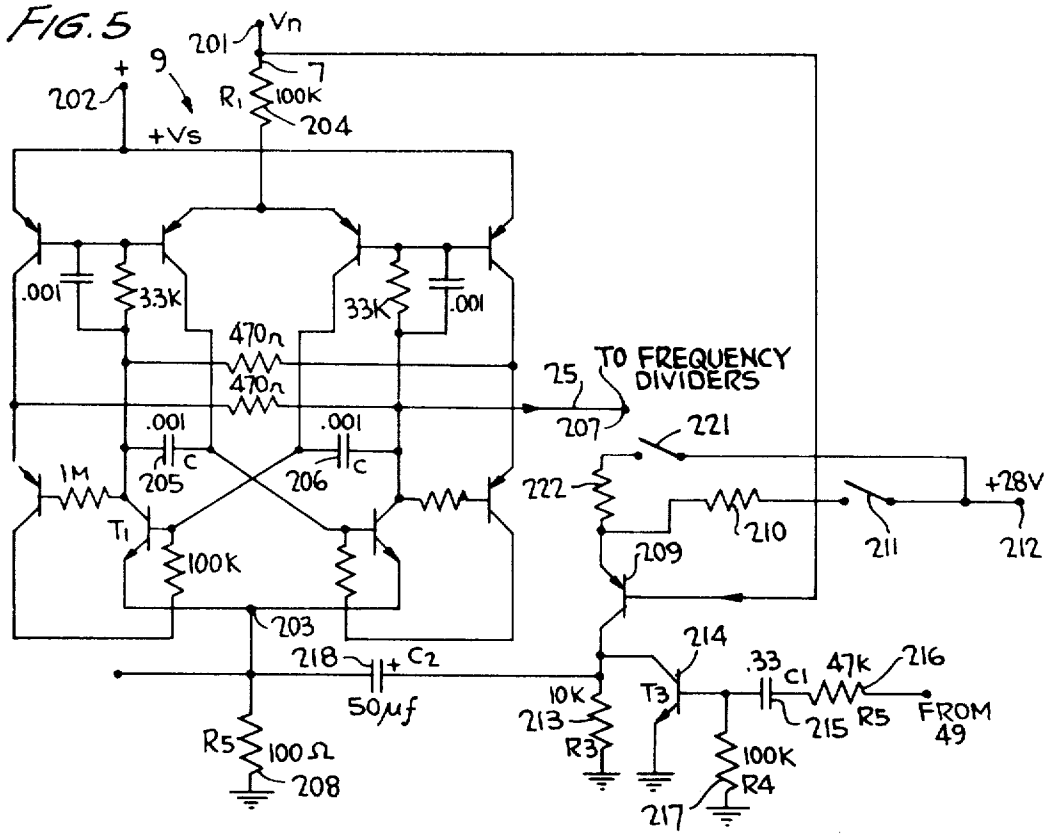
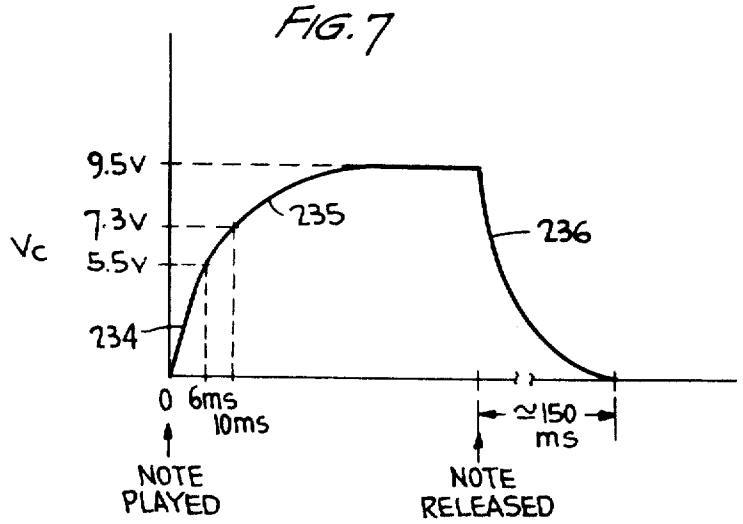

Vn
201
9
7
202
R1
100K
204
+Vs
.001
33K
33K
.001
470Ω
470Ω
TO FREQUENCY DIVIDERS
25
207
221
.001
.001
C
C
205
206
1M
222
+28V
T1
210
211
212
209
100K
203
214
218
C2
.33
C1
47K
216
50μf
10K
T3
213
215
R5
FROM 49
R3
100K
R4
R5
100Ω
208
217

FIG. 7


9.5V
7.3V
5.5V
Vc
235
236
234
0
6ms
10ms
≃150 ms
NOTE PLAYED
NOTE RELEASED

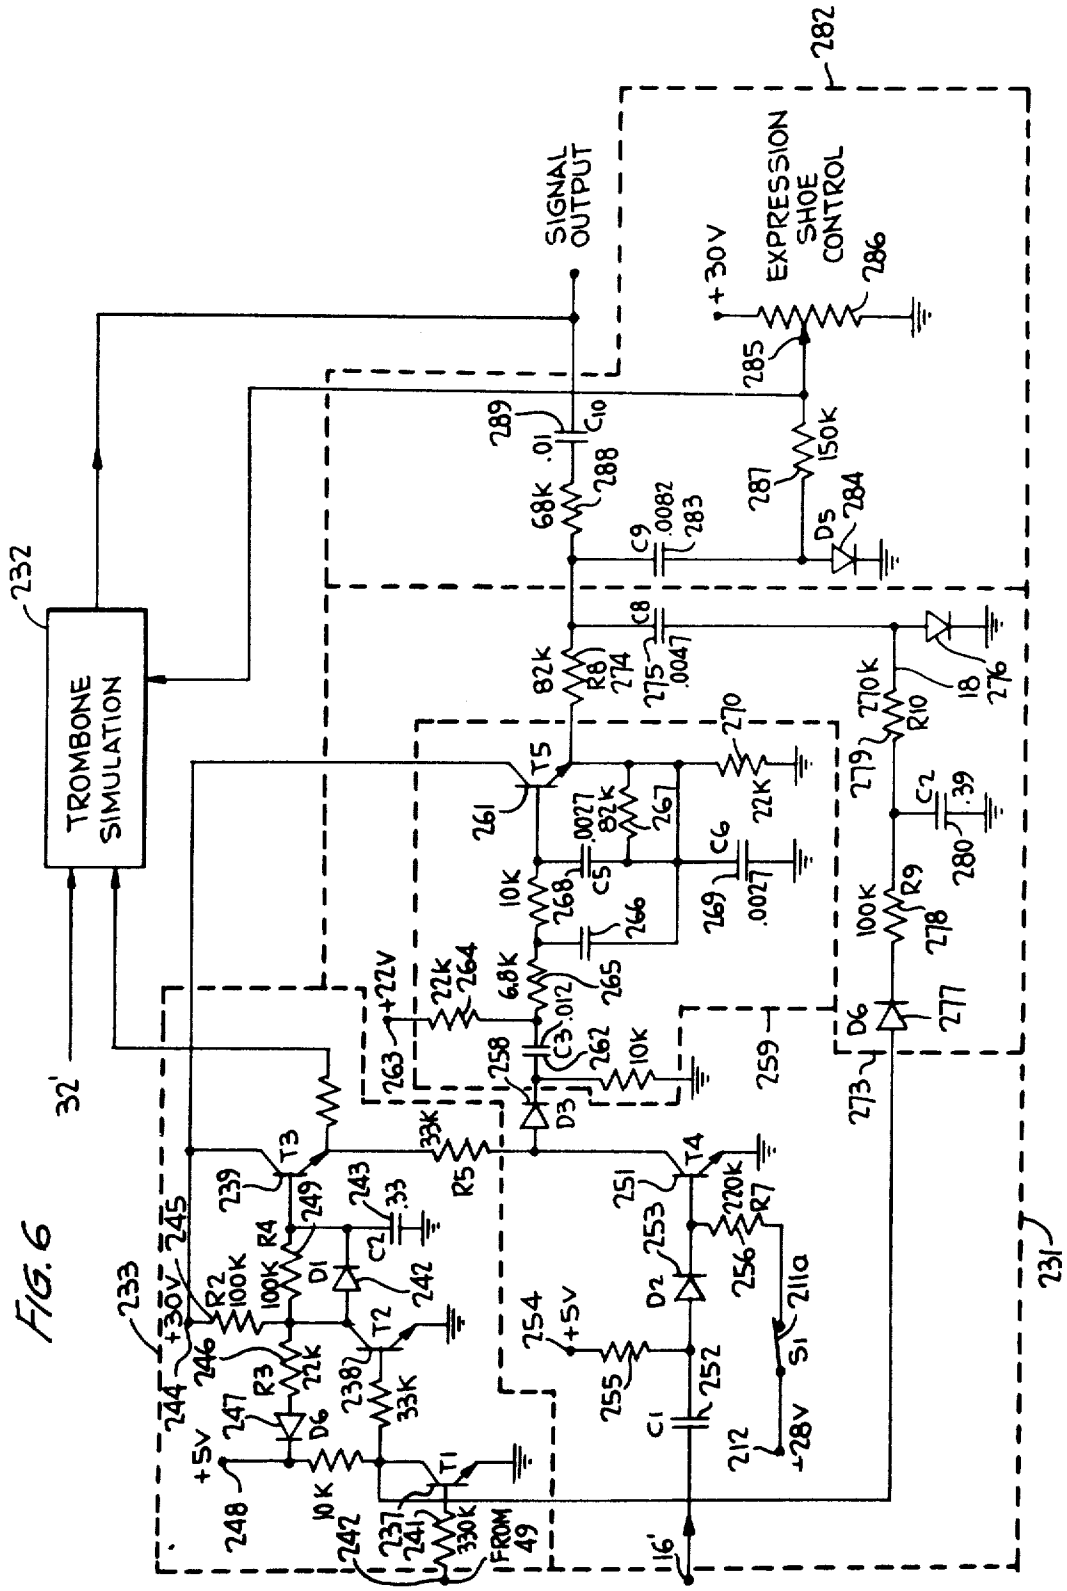

TROMBONE SIMULATION
SIGNAL OUTPUT
EXPRESSION SHOE CONTROL
+30V
+22V
+5V
-28V
FROM 49
T1
T2
T3
T4
T5
D1
D2
D3
D5
D6
S1
R1
R2
R3
R4
R5
R7
R8
R9
R10
C1
C2
C3
C5
C6
C8
C9
C10

FIG. 6

FIG. 8

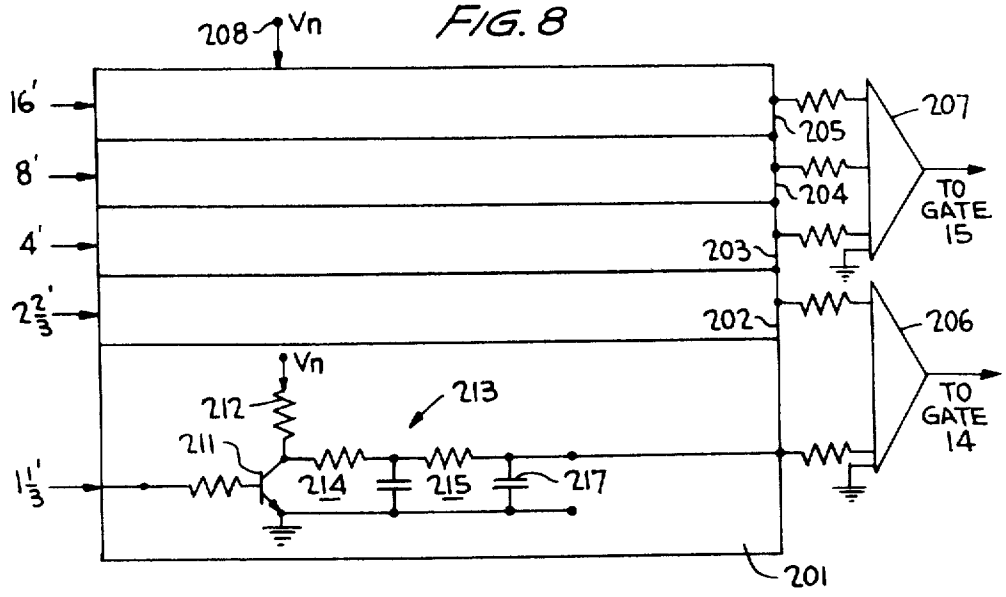


FIG. 12A

FIG. 12B

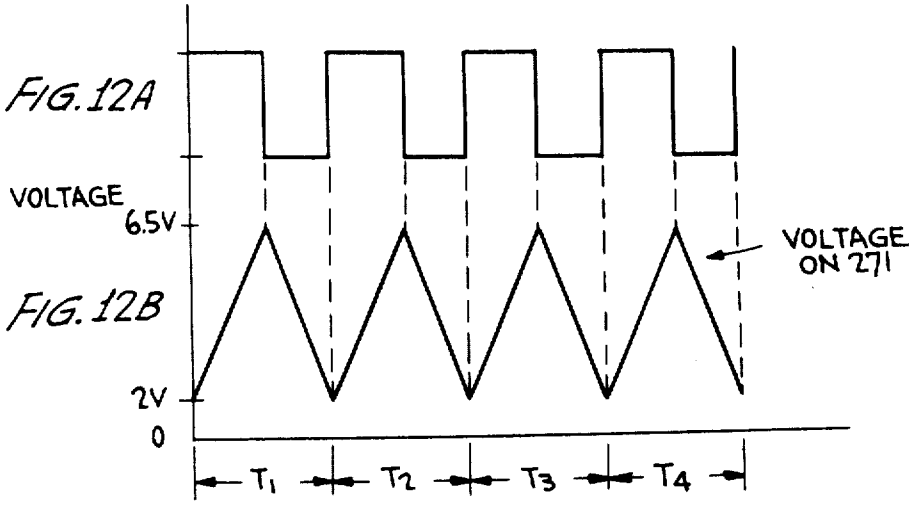


FIG. 13

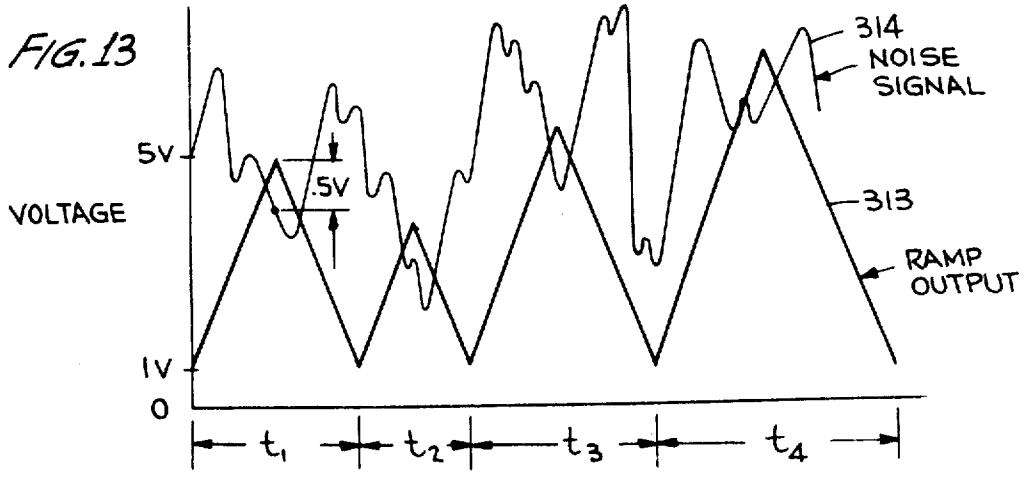


FIG. 9

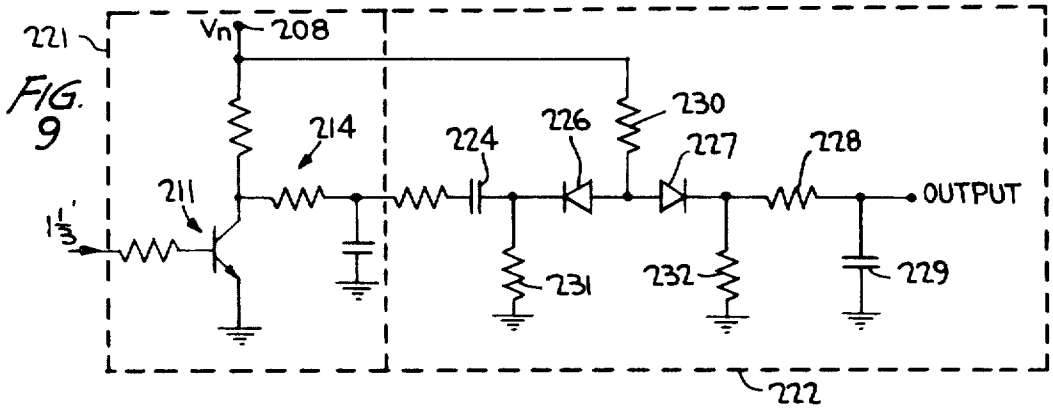
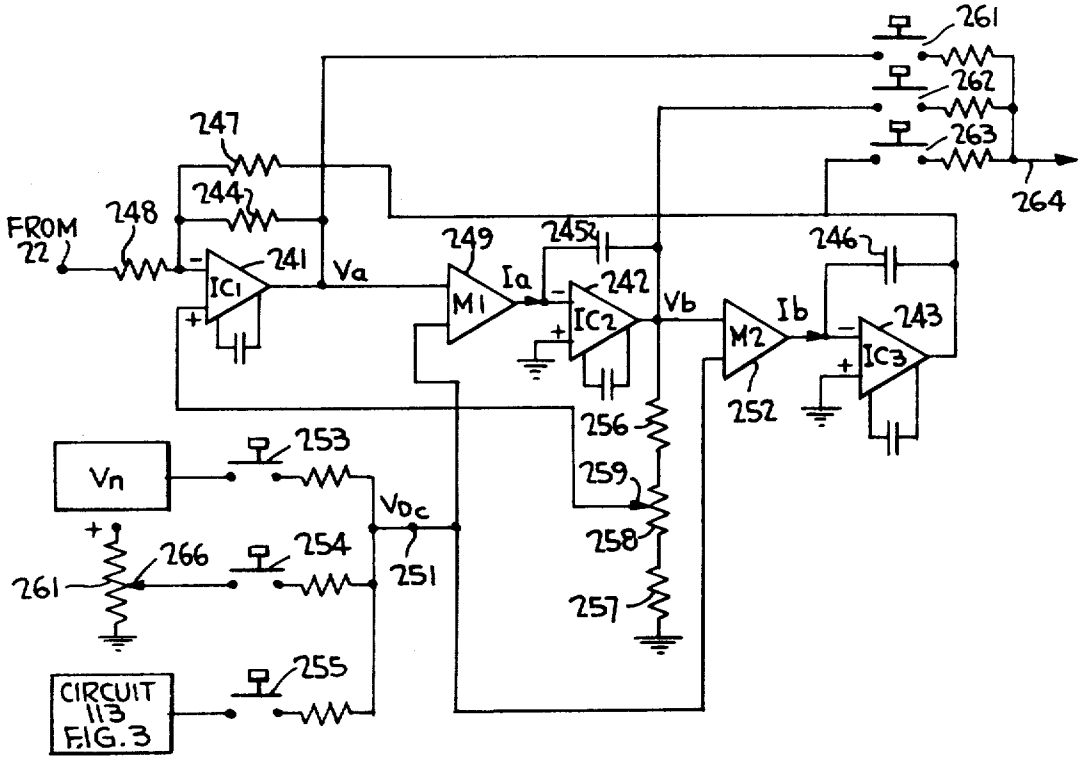

221
Vn
208
214
224
226
230
227
228
211
OUTPUT
231
232
229
222

FIG. 10


261
262
263
264
247
244
FROM 22
248
241
IC1
Va
249
245
Ia
M1
242
IC2
Vb
246
Ib
M2
243
IC3
252
256
259
258
257
253
Vn
Voc
266
254
261
251
255
CIRCUIT 113 FIG. 3

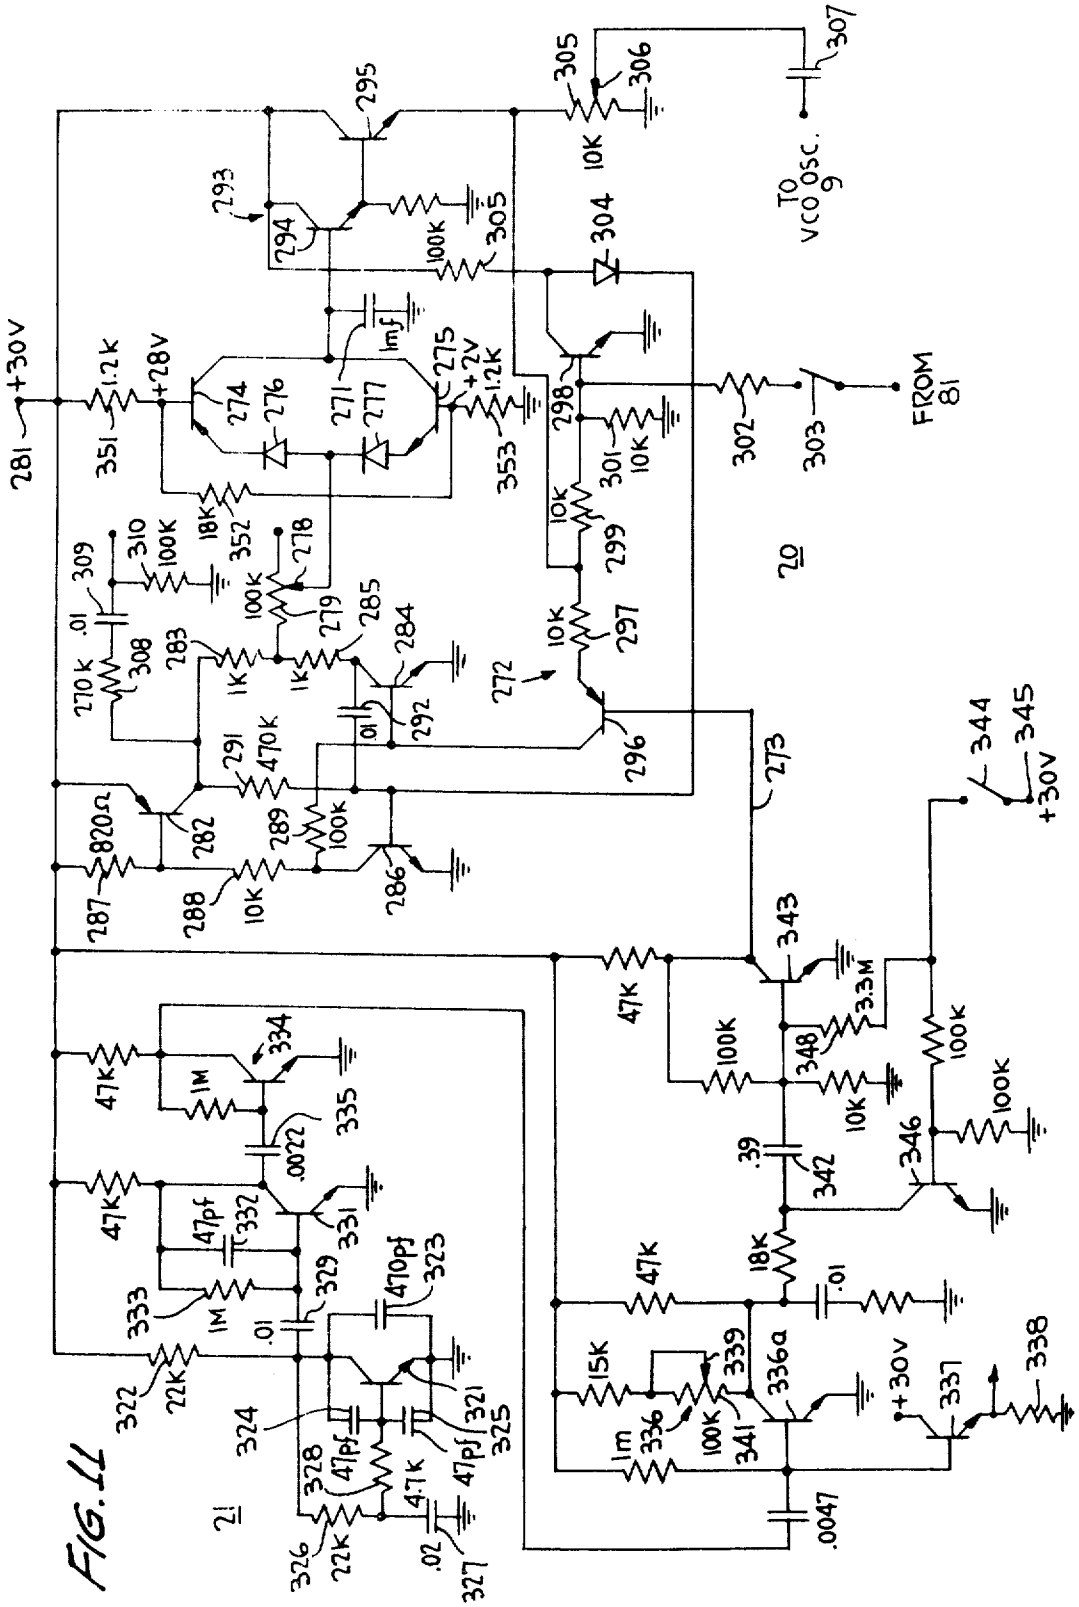

+30V
281
351
1.2k
+28V
274
276
271
277
275
+2V
1.2k
353
298
302
303
FROM 81
301
10K
305
306
307
10K
TO VCO OSC.
295
293
294
100K
305
304
1mf
310
100K
309
.01
270K
308
352
18K
278
100K
279
285
284
283
1K
1K
292
272
299
297
10K
10K
296
273
20
344
345
+30V
291
470K
289
100K
282
820Ω
287
288
10K
286
343
47K
3.3M
348
100K
100K
10K
100K
346
.39
342
47K
18K
.01
47K
334
1M
335
.0022
47K
47pf
332
331
329
333
1M
.01
410pf
323
322
22K
324
328
47pf
47k
47pf
321
325
326
22K
.02
327
21
15K
339
336a
336
100K
341
1m
+30V
337
338
.0047

FIG. 11

VOLTAGE-CONTROLLED FILTER

BACKGROUND OF THE INVENTION

It is desirable in electric organs to provide a wide range of tone signal filtering characteristics in response to control voltages. Particularly, in the present organ system, which includes a single voltage controlled oscillator, the frequency of which depends on which of an array of keys is actuated, it is desired that tone quality be a function of the voltage which controls the oscillator, or of the loudness with which a note is sounded, or of the nature of the attack of a tone, all of which are translatable into voltages. The tone filter characteristics desired include control of cut-off in high or low pass filters, and control of center frequency in a band pass filter, and selectivity or Q.

It is the object of the present invention to provide one filter, inherently simple and therefore economical, capable of achieving all the recited results in response to actuation of selector switches and control of one feedback circuit.

SUMMARY OF THE INVENTION

A frequency selective filter having pass band, high pass and low pass transfer functions, at will, on a common input variable dc control voltage, and an adjustable feedback control circuit which controls the Q of the filter.

BRIEF DESCRIPTION OF THE DRAWING

FIG. **1** is a block diagram of a preferred embodiment of the invention;

FIG. **2** is a circuit diagram of a keyswitch circuitry, a note played detector circuit, and sample and hold circuit included in FIG. **1**;

FIG. **3** is a circuit diagram of mode selector circuitry included in FIG. **1**;

FIG. **4** is a circuit diagram of a wave form shaper included in FIG. **1**;

FIG. **5** is a circuit diagram of a voltage controlled oscillator and related circuits of FIG. **1**;

FIG. **6** is a partial block, partial circuit diagram of brass filters used in FIG. **1**;

FIG. **7** illustrates a waveform derived in FIG. **6**;

FIG. **8** is a partial block, partial circuit diagram of the flute filters used in FIG. **1**;

FIG. **9** is a modification of one filter of FIG. **8**;

FIG. **10** is a circuit diagram of a voltage controlled filter used in FIG. **1**;

FIG. **11** is a circuit diagram of a vibrato oscillator, noise source and associated circuitry used in FIG. **1**; and

FIGS. **12** and **13** are waveforms to assist in describing the oscillator of FIG. **11**.

DETAILED DESCRIPTION OF THE DRAWING

BLOCK DIAGRAM, FIGURE 1

Reference is made to FIG. **1**, wherein an electronic organ is illustrated as including a plurality of tone generators **1**, each of which may be composed of plural independent oscillators, one for each note of the organ, or may involve frequency dividers. In the latter case there are traditionally twelve master oscillators for each generator, covering the uppermost octave of notes, from which lower octave tone signals of a manual are derived by frequency division. In the alternative

and in accordance with the more recent practice, there is a single master oscillator from which all notes of a manual are derived by rate scaling. In any event, the outputs of the tone generators are conventionally selected by gates controlled from keyboard **2**. The selected tone signals are passed through voicing or tone coloring circuits **4**, selected by tabs (not shown). The outputs of the voicing circuits **4** are applied to the input of a pre-amplifier **17**, which in turn drives a power amplifier **5**, and a loudspeaker **6**, or other acoustic radiating system. The gain of the pre-amplifier **17** is controlled by an expression pedal **18** so that tone amplitude is increased as the pedal is depressed. This much is conventional and is contained in many presently commercial electronic organs.

The present invention includes a tone synthesizer that is activated simultaneously, in superposition, with the conventional organ in response to depression of the same keys on keyboard **2** as the keys that control gating of generators **1**. The output of the synthesizer is controlled in several operating modes. The various operating modes are selected by means of selector **19**. Available modes are: (1) reiteration; (2) percussion; (3) normal (or continuous); (4) fast attack; (5) slow attack; and (6) sustain.

Control of the synthesizer tones is in response to activation of keyboard **2** that selects a voltage from voltage divider **3** and applies this voltage to lead **24**. The voltage represents, in terms of its magnitude, only the nomenclature of the highest pitch key played on keyboard **2**, as disclosed in my copending application, Ser. No. 213,939, filed Dec. 30, 1971. The voltage on lead **24** is supplied to sample and hold circuit **8** which provides on its output lead a voltage equal to the voltage on lead **24**. The voltage at the output of circuit **8** is derived for a time which endures after all played keys are released, or until a different key combination is struck. The sample and hold circuit **8** is activated in response to control signals provided by a note played detector **7** connected to lead **24** to respond to any change of the highest pitch actuated key. The output frequency of a voltage controlled oscillator (V.C.O.) **9** is established primarily by the control voltage supplied to it by the sample and hold circuit **8**.

The V.C.O. **9** provides at its output **10a**, a square wave signal, the fundamental frequency of which corresponds with the highest note called for by the actuated keys of keyboard **2**. The output of V.C.O. **9** is applied to a frequency divider chain **10**, which has several outputs for providing an array of square wave tone signals chordally and octavely related to the signal provided by V.C.O. **9**. Typically, and for the purposes of the present disclosure, output frequencies of divider chain **10** correspond with organ footages denotes as **32'**, **16'**, **8'**, **4'**, as well as the partials 2⅔' and 1⅗'.

The tone signals provided by frequency divider chain **10** are applied to two sets of tone color filters, **11**, **12** and to wave shaper **22**. Preset voice filters **11** for brass (e.g., trumpet, trombone, saxaphone) simulation are responsive to the **32'** and **16'** outputs of chain **10**; filters **12** for flute simulation are responsive to the **16'**, **8'**, **4'**, 2⅔' and 1⅗' outputs of chain **10**; and wave shaper **22**, for unusual tone simulations, responds to the **32'**, **16'** and **8'** outputs. Filters **11** and **12** and wave shaper **22** include an input circuit for each of the footages supplied to it. Filters **12** are arranged so that the **16'**, **8'**, **4'** tones are combined on a first output lead **12***a* and the 2⅔' and 1⅗' tones are combined on a second output

lead 12*b*.

Wave shaper **22** is also responsive to signals from noise generator **21** and to key activation pulses from note-played detector **7**. In addition, the square wave tone signals derived from divider chain **10** are selectively processed, at the will of the musician, in wave shaper **22** as shortened pulses, or sawtooth waveforms or they may be substantially unmodified. The widths of the pulses are controlled in response to the output of sample and hold circuit **8** so that low note key depressions result in wider pulses than high note key depressions. Wave shaper **22** includes operator activated controls for selecting these various waveforms.

Brightness effects of the brass instruments simulated by filters **11** are achieved with variable waveshaping circuits controlled by depression of expression pedal **18**, and for simulation of certain instruments, as a function of time elapse after a key has been played. In the latter case, as time progresses there is less attenuation of harmonic tones, whereby greater brightness is provided as time progresses after initial key activation. In response to depression of shoe **18**, the harmonic content of the tone is increased by another waveshaping circuit so as to provide greater brightness as dynamic level increases. Filters **11** also include means for simulating brass attack characteristics by amplitude modulating the tone signals fed thereto with an envelope that includes plural exponential characteristics.

Filters **12** consist of a series combination of a voltage controlled amplifier and a fixed low pass filter. The gain characteristic of the voltage controlled amplifier is proportional to the output voltage of sample and hold circuit **8**. Thus the gain of the voltage controlled amplifier is proportional to the fundamental frequency of the input. This causes the output of the fixed low pass filter to remain constant with regard to fundamental frequency over a given input frequency range while attenuating the harmonics of the fundamental frequency input at a fixed db per octave rate.

Filter **11** and wave shaper **22**, as well as linear gates **14** and **15** (which may take a form disclosed in U.S. Pat. No. 3,549,779) are responsive to control signals derived from note played detector **7**, as coupled through mode selector **13**, a predetermined time, e.g., 20 milliseconds, after the first note of a key combination has been played. The control signals enable the tone signals to be passed through filter **11** and wave shaper **22**, as well as gates **14** and **15**; these circuits block passage of the tone signals until derivation of the control signals. Because of the delayed enabling, if several keys are activated substantially simultaneously, e.g., within 20 milliseconds of each other, the tones derived from filter **11**, wave shaper **22** and gates **14** and **15** are responsive only to the highest pitch note played, regardless of which key was actually struck first. If the musician selects a continuous, rather than percussive, mode, tonal signals may be derived from gates **14** and **15** and wave shaper **22** as long as a key is depressed or, at the will of the musician, a sustain effect after key release can be provided for tones derived from gate **14** and wave shaper **22**. On the other hand, if the percussive mode is selected, control signals supplied by mode selector **19** to gates **14, 15** and wave shaper **22**, enable the wave shaper and gate **14** to provide a controllable sustain, while gate **15** provides a fixed, short sustain.

In response to one or more keys being released while one or more other keys remain depressed, the tone signals derived from filter **11** and wave shaper **22**, as well as from gates **14** and **15** are shifted to tones corresponding with the highest pitch of the remaining depressed keys. In response to all of the keys being released, the control signals from mode selector **19** are removed from filter **11**, wave shaper **22**, as well as gates **14, 15**. Circuitry in sample and hold circuit and note played detector **7** delay the V.C.O. **9** from shifting frequency for a predetermined time, e.g., 40 milliseconds, after release of a key so that if several keys are substantially simultaneously released, tones associated with only the key having the highest pitch are derived, regardless of which key was actually the last to be released. If there is activation of a new key of higher pitch than any other depressed key, tones associated with the new key are derived from filters **11**, wave shaper **22** and gates **14, 15**, 20 milliseconds after striking the new key even though another key was just previously released.

A random, vibrato tonal effect, on the signal derived from V.C.O. **9** is selectively derived from low frequency modulation oscillator **20** via lead **20***a*, the center frequency of which can be operator controlled. Random vibrato is particularly effective in simulating the characteristics of certain instruments, particularly brass tones. Modulation oscillator **20** frequency modulates V.C.O. **9** at rate, adjustable from one to 50 Hz. In the random mode, signal from noise generator **21** randomly varies the output frequency of modulator **20** about its center value. The amount of random variation is controllable, with typical maximum deviations of ± 15% about the selected center vibrato frequency.

In the reiterative mode, the output frequency of oscillator **20** is fixed, with no random variations imposed. In response to note played detector deriving a signal to indicate that any note is being depressed, oscillator **20** modulates V.C.O. **9** at a fixed frequency. In synchronism with the fixed frequency modulation supplied by oscillator **20** to V.C.O. **9**, reiteration pulses are supplied by oscillator **20** to mode selector **19** which, in turn, under the control of the musician, may enable gates **14** and **15** for reiterative effects while a key is depressed.

Another feature of the circuitry including note played detector **7** and sample and hold circuit **8**, is simulation of portamento, i.e., a smooth or continuous transition from one tone to another, in response to keys **2** being played legatissimo. If the keys are played staccatissimo there is no portamentation. The portamento effect is selectively provided by including in the sample and hold circuit **8** an electronically controlled switch that selectively short circuits a charging resistor for a storage capacitor responsive to the note indicating voltage supplied to the sample and hold circuit. If the keys are played legatissimo, note played detector **7** derives a control signal that open circuits the switch, whereby the storage capacitor is charged at a relatively slow rate through the charging resistor to provide a slow transition of the voltage controlling V.C.O. **9**. In response to staccatissimo, note played detector **7** derives a control voltage that closes the switch to short circuit the charging resistance. Thereby, the voltage across the storage capacitor changes between voltages in discrete steps and the frequency of the oscillator is accordingly altered.

Another tonal effect provides for automatically flatting a note, i.e., reducing its frequency, as it is initially being voiced, to provide accurate simulation of certain instruments, particularly brasses. The amount of flat-

ting is directly responsive to the note associated with the depressed key. To these ends, the output voltage of sample and hold circuit **8**, indicative of the pitch of the depressed key, is coupled to filters **11**, and thence selectively fed to V.C.O. **9** for a transient period when a new tone is being voiced. During the transient period the depressed key indicating voltage reduces the frequency of the V.C.O. to simulate the flatting effect.

The output of wave shaper **22** is fed via a voltage controlled filter **13** and volume control circuit **23** to the input of pre-amplifier **17** and thence via power amplifier **5** to loudspeaker **6**. The outputs of filters **11** and **12**, as coupled through gates **14** and **15**, proceed via volume control circuit **16** to preamplifier **17**, the gain of which is controlled as a direct function of depression of expression pedal **18** so that as the pedal is depressed, gain and loudness are increased.

Voltage controlled, active filter **13** selectively provides a number of different effects on the tonal output signal of wave shaper **22**. Filter **13** includes low pass, band pass, and high pass two pole transfer functions that are provided, either singly or in parallel combinations, for the signal derived from wave shaper **22**. The Q and resonant frequency of all three transfer functions are the same. The Q is preset by the musician, while the resonant frequency may be selectively controlled by any of: the played note indicating voltage derived from sample and hold circuit **8**, the gating envelope characteristic supplied to gate **14**, or the position of expression pedal **18**. The resonant frequency increases as the played note frequency increases, or with increased depression of expression pedal **18**, or as the amplitude of the gating envelope increases.

KEY SWITCHES, NOTE PLAYED DETECTOR, AND SAMPLE AND HOLD CIRCUIT, FIGURE 2

Reference is now made to FIG. **2** of the drawing wherein there is illustrated a circuit diagram for the elements included in keyboard **2**, voltage divider **3**, note played detector **7** and sample and hold circuit **8** of FIG. **1**. As in the copending application, the voltage derived on lead **24** is indicative of the highest note selected at a particular time, due to the nomenclature assigned to key switches **31**, diodes **32** and the values of resistors **33** in voltage divider **3**. Voltage divider **3** is connected to a positive d.c. source at terminal **34**. Higher notes are associated with higher voltages.

The note indicating voltage on lead **24** is applied through blocking diode **35** to the base of NPN emitter follower transistor **36**. Across emitter load resistor **37** of transistor **36** there is developed a voltage directly proportional to the voltage on lead **24**. The voltage across emitter load resistor **37** is fed in parallel to conventional monostable multivibrators **38** and **39** which respectively function as note played and note release detectors.

Monostable multivibrator **38** includes NPN transistors **41** and **42** respectively normally biased to the off and on conditions, respectively. The collector of transistor **42** is connected to the base of transistor **41** via a feedback circuit including capacitor **43** and resistor **44**, having values selected such that a positive pulse having a duration of **20** milliseconds is derived in response to a positive going pulse being supplied to the base of transistor **41**. The positive going pulse may be derived from the emitter of transistor **36** via the a.c. coupling circuit including resistor **45** and capacitor **46** or from monostable multivibrator **39**, as fed through the a.c. coupling circuit including resistor **47** and capacitor **48**.

The collector of transistor **42** is connected to the base of NPN transistor **49**, which is driven into saturation in response to the positive **20** millisecond pulse being derived at the collector of transistor **42**. The collector of transistor **49** is connected through resistor **51** to be biased by the d.c. voltage at the emitter of transistor **36**. Thereby, in response to none of keys **31** being closed, which results in transistor **36** being cut off, a zero emitter voltage of transistor **36** is fed to the collector of transistor **49**, and the voltage at the collector of transistor **49** is maintained substantially at ground level. In response to any one of keys **31** being closed, the resulting positive voltage on lead **24** causes transistor **36** to conduct sufficiently to cause the emitter voltage thereof to increase to a level sufficient to bias transistor **49** into a state enabling it to be selectively cut off and driven into saturation in response to a pulse from monostable multivibrator **38**. Thereby, in response to none of key switches **31** being closed or in response to a key switch being closed for less than 20 milliseconds, the voltage developed at the collector of transistor **49** is maintained substantially at ground. 20 milliseconds after a key switch **31** closure, the collector voltage of transistor **49** jumps positive in response to monostable multivibrator **38** changing state. The voltage developed at the collector of transistor **42** is normally at a relatively low level and jumps to a high level for the 20 milliseconds immediately after closure of a key switch **31**; after the 20 millisecond period has elapsed, the voltage at the collector of transistor **48** returns to its low level.

Note release detector **39** includes NPN transistors **55** and **56** which are biased so that transistor **55** is normally in a conducting condition, while transistor **56** is normally cut off. The collector of transistor **56** is connected to the base of transistor **55** via a feedback path including series resistor **57** and capacitor **58**, having values selected such that a pulse of approximately 40 milliseconds is derived from collector **56** in response to a negative voltage being applied to the base of transistor **55** by the emitter of transistor **36** via an a.c. coupling network including capacitor **59** and resistor **60**. In response to the highest pitch note being released, as indicated by a decreased voltage on lead **24** and at the emitter of transistor **36**, a negative pulse is supplied to the base of transistor **55** to drive that transistor into a cutoff condition, whereby transistor **56** is driven to a conducting condition. Transistors **55** and **56** remain in this condition for approximately 40 milliseconds, after which time they return to their normal state. Thereby, for 40 milliseconds after a key is released, positive and negative pulses are respectively derived at the collectors of transistors **55** and **56**.

The positive going, trailing edge of the 40 millisecond pulse at the collector of transistor **56** is coupled through capacitor **48** and resistor **47** to the base of transistor **41** to change the state of monostable multivibrator **38**. This positive going, trailing edge has the same effect on monostable multivibrator **38** as a positive pulse fed to the monostable multivibrator from emitter resistor **37**, causing an additional 20 millisecond delay for a total of 60 milliseconds.

The positive going voltage developed at the collector of transistor **49** is utilized to gate tonal signals from preset voice filters **11**, flute filters **12** and waveform shaper **22** into output circuitry. Thereby, there is a delay provided for all voices so that if a number of keys are

struck within 20 milliseconds, the tones associated with only the highest pitch key are propagated even though the highest pitched key was not actually first struck. If a number of keys are released within 40 milliseconds of each other, while one or more keys remain activated, the tones for only the highest pitch key still depressed are propagated even though the different keys are released at different times. Also, if all of the keys are substantially simultaneously released, no positive going pulse is derived at the collector of transistor **49** causes a gating of the outputs of filters **11, 12** and **22** such that only the previously voiced key tones are propagated, regardless of the order in which the keys are released.

To control selective d.c. coupling of the note indicating voltage on lead **24** to storage capacitor **71** of sample and hold circuit **8**, the voltages at the collectors of transistors **42** and **56** are fed to a flip-flop including NOR gates **72** and **73**. Output terminals of NOR gates **72** and **73** are d.c. cross coupled in a conventional manner. One input of NOR gate **72** has a d.c. connection to the collector of transistor **42**, while one input of NOR gate **73** has a d.c. connection to the collector of transistor **55**. In response to the collector of transistor **42** changing from a low to a high positive d.c. voltage, the output of flip-flop **70**, derived at the output terminal of NOR gate **73**, is driven to a binary one, relatively high voltage state. In contrast, a positive voltage at the collector of transistor **55** causes flip-flop **70** to be driven so that the flip-flop output has a relatively low binary zero voltage level. Thereby, in response to a key being struck, the **20** millisecond pulse developed at the collector of transistor **42** activates flip-flop **70** so that a positive voltage is derived from the output of NOR gate **73**; the positive voltage is maintained until the flip-flop state is altered in response to a positive voltage being derived at the collector of transistor **55**, as occurs when a highest pitch key switch **31** is released.

In response to a positive or binary one voltage being derived from the output of gate circuit **73**, storage capacitor **71** of sample and hold circuit **8** is connected to be responsive to the note indicating voltage on lead **24**. To these ends, the positive voltage derived at the output of NOR gate **73** drives normally cutoff NPN transistor **74** into a conducting state. The collector of transistor **74** is connected to gate electrode **75** of field effect transistor (FET) **76** which functions as a first voltage controlled switch of sample and hold circuit **8**. In response to transistor **76** being activated into a conducting state, current is drawn from gate electrode **75** to bias FET **76** into a conducting state.

As disclosed in the previously mentioned copending application, sample and hold circuit **8** includes an input circuit **77** and an output circuit **78**, each of which includes three transistors for providing impedance isolation and substantially unity gain. Thereby, capacitor **71** is not loaded by circuit **78**.

In response to a new high note key being depressed, the voltage on lead **24** is fed through input circuit **77** and the source drain path of FET **76** to storage capacitor **71**. Thereby, changes in the voltage on lead **24** are coupled to capacitor **71** as long as NOR gate **73** is deriving a voltage indicating that a note is being played.

In response to a highest pitch note being released, while another note is still being played, capacitor **71** is momentarily decoupled, for 40 milliseconds, from the voltage on lead **24**. Momentary decoupling of capacitor **71** occurs in response to transistor **74** being driven into cutoff by the output of NOR gate **73** returning to a binary zero level in response to the 40 millisecond positive pulse derived at the collector of transistor **55**. After the 40 millisecond period has elapsed, the state of monostable multivibrator **38** is altered, whereby a positive pulse is derived at the collector of transistor **42**. The positive pulse is coupled to the input of NOR gate **72**, causing flip-flop **70** to change state back to the binary one condition. In response to the flip-flop **70** being returned to the binary one state, FET **76** again switches to a closed state and capacitor **71** is charged to the voltage of lead **24**. Thereby, transient changes in the release of key switches **31**, while one note remains depressed, are decoupled from capacitor **71** and the capacitor is responsive only to the voltage on lead **24**, 40 milliseconds after the release has been performed.

The voltage on capacitor **71** is maintained fixed at a value corresponding with the highest pitch note after all keys are released because FET **76** is open circuited in response to all keys being released. To these ends, normally cut off NPN transistor **81** has its base connected to lead **24**. In response to any of key switches **31** being closed, transistor **81** is driven into saturation, whereby its collector is substantially grounded. The negative going voltage at the collector of transistor **81** is fed through speed-up capacitor **82** and its shunted resistor **83** to the base of normally conducting NPN transistor **84**, the collector of which is connected to shunt the base of transistor **74**. In response to any note being played, transistor **84** is cut off, whereby the output voltage of NOR gate **73** controls the conducting state of transistors **74** and therefore FET **76**. If none of key switches **31** is closed, transistors **81** and **84** are respectively biased to the off and on states, whereby transistor **84** shunts the emitter base path of transistor **74** to hold transistor **74** in a cutoff concondition and prevent FET **76** from conducting.

In summary, in response to a key switch **31** being closed, FET **76** is closed, whereby capacitor **71** is charged to the voltage on lead **24**, causing voltage controlled oscillator **9** to oscillate at the frequency determined by the voltage on lead **28**. In response to a note being released which causes a voltage on lead **24** to decrease, a **40** millisecond delay in a change of the voltage on capacitor **71** occurs, because FET **76** is open circuited for the 40 millisecond period.

If, after the 40 millisecond period has elapsed, no note indicating voltage is derived on lead **24**, FET **76** remains open circuited and the voltage across capacitor **71** is maintained at the level corresponding with the previous highest pitch played note. If there is still a note depressed after the 40 millisecond period, the voltage corresponding with the new, lower pitch note is fed through FET **76** to capacitor **71**. The voice corresponding with the new note is sounded 20 milliseconds after the voltage corresponding with the note is stored on capacitor **71**, by virtue of the positive going voltage derived at the collector of transistor **49**. If during the 40 millisecond delay period associated with note release detector **39**, a new note is played which causes the voltage on lead **24** to increase, FET **76** is immediately closed and the voltage across capacitor **71** is driven to the new value. 20 milliseconds after the new, higher pitch note has been played, a positive going pulse is derived at the collector of transistor **49** to enable tones associated with the new note to be derived.

A further feature of sample and hold circuit **8** is simulation of portamento. To these ends, the source drain path of FET **76** is connected to capacitor **71** through

variable resistor **91** that is connected across the source drain path of FET **92**, which functions as an electronic switch in response to the output voltage of monostable multivibrator **93**, included in note played detector **7**. In response to legatissimo playing, as detected in a manner described infra, the source drain path of FET **92** is open circuited, whereby capacitor **71** is charged through resistor **91**. In response to staccatissimo playing, the source drain path of FET **92** functions as a short circuit for resistor **91**, whereby the voltage of capacitor **71** is changed in discrete steps, substantially instantaneously. In response to instantaneous step changes in the voltage of capacitor **71**, the frequency of oscillator **9** is stepped. In contrast, a slow variation in the change in the frequency of oscillator **9** occurs in response to a smooth transition of the voltage across capacitor **71**. The charging rate for capacitor **71** while portamento occurs is selected by the musician adjusting the value of resistor **91** to achieve the desired rate of change in the frequency of oscillator **9**.

Detection of the legatissimo playing is provided by connecting the input of monostable multivibrator **93** to the collector of transistor **81** through an a.c. coupling circuit comprising capacitor **94** and resistor **95**. Monostable multivibrator **93** includes NPN transistors **96** and **97** respectively normally biased to the conducting and non-conducting states. The collector of transistor **97** is connected to the base of transistor **96** by capacitor **98** and resistor **99**, having values selected so that monostable multivibrator **93** derives an 8 millisecond pulse in response to each negative transition at the collector of transistor **81**. Thereby, each time a new set of keys is depressed while no other keys are depressed, monostable multivibrator **93** is activated to derive an 8 millisecond negative pulse at the collector of transistor **97**. The negative pulse is d.c. coupled to the gate **100** of FET **92**, causing the FET to be driven into a conducting state, short circuiting resistor **91**. Thereby, in response to all keys of one set of keys being released prior to any keys of a second set being depressed (i.e., staccatissimo note playing), capacitor **71** is instantly charged to the voltage associated with the new note on lead **24**. If, however, the notes are played so that one key is not released until a second key has been depressed (legatissimo note playing), negative pulses are not derived at the collector of transistor **97** and a high impedance path exists through resistor **91** to capacitor **71** to provide gradual voltage change.

MODE SELECTOR, FIG. 3

Reference is now made to FIG. **3** of the drawing wherein there is illustrated a circuit diagram of a portion of mode selector **19**. The circuits illustrated in FIG. **3** are concerned with controlling trigger voltages for linear gates **14** and **15**, as well as for a gate included in wave shaper **22**. Switches included in mode selector **19** and which functionally are related to other circuits of the system are not illustrated in FIG. **3**, but are illustrated in circuit diagrams associated with the particular circuits.

Mode selector **19** includes a monostable multivibrator **101** comprising NPN transistors **102** and **103**. The collector of transistor **103** is connected to the base of transistor **102** through a series circuit including resistor **104** and capacitor **105**, having values selected so that the monostable derives a short duration pulse, on the order of 8 milliseconds, in response to normally cut off transistor **102** being driven into a conducting state in response to a positive pulse being applied to its base. The resulting, short duration pulse derived at the collector of transistor **103** is coupled to the base of inverting NPN transistor **106**, the collector of which is connected to the base of PNP transistor **107** which is normally biased into a cut off condition. Transistor **107** is activated into a conducting state in response to transistor **106** being driven into a conducting state, whereby transistor **107**, when turned on, functions as a constant current source. To provide different attack rates the current derived from the collector of transistor **107** is controlled by varying the impedance of the transistor emitter circuit. In a slow attack configuration, the emitter of transistor **107** is connected to a positive +30 volt d.c. source through 4.7K resistor **108**, and in a fast attack configuration, while switch **111** is closed, the emitter of transistor **107** is connected to the +30 volt source through the parallel combination of resistor **108** and 1K resistor **109**, whereby the current of the second configuration is approximately five times that of the first.

The constant current derived from the collector of transistor **107** is applied to a pair of ramp forming networks **112** and **113** which are connected to trigger inputs of gates **14** and **15**, respectively; the ramp derived from network **112** is also applied as an enabling input to the gate of wave shaper **22**. Each of networks **112** and **113** includes the parallel combination of a capacitor and a resistor; the capacitor and resistor of network **112** preferably have values of one microfarad and 2.2M. and the capacitor and resistor of network **113** preferably have values of approximately 0.05 microfarads and 100K. so that the charging and discharging rates of the former are considerably less than the latter. The voltage across network **112** is decoupled or isolated from the voltage developed across circuit **113**, by virtue of diode **114**, the anode of which is connected to network **113**, and the cathode of which is connected to network **112**.

To control the decay rate of the ramp voltage derived from circuit **112** and thereby provide a sustain effect, potentiometer **114** is connected to circuit **112** via coupling resistor **115** and isolation diode **115***a*. Potentiometer **114** is selectively connected to a +30 volt d.c. source by switch **116**. The position of slider **117** of potentiometer **114** controls the decay rate of the trailing edge of the ramp voltage derived by circuit **112**.

The conducting state and current magnitude of transistor **107** are determined by the system mode of operation, as is the presence or absence of the sustain effect, as derived across network **112**. In response to the system being in a percussive mode, transistor **107** is activated into a conducting state for an 8 millisecond period in response to each positive going transition at the collector of transistor **49**, FIG. **2**, and switch **111** is closed so that a relatively large current is derived from transistor **107**. The relatively large current derived from transistor **107** causes capacitors of circuits **112** and **113** to be quickly charged to a relatively high voltage, to provide fast attack and rapid opening, i.e., enabling, of gates **14**, **15** and the gate of waveform shaper **22**. These results are achieved by connecting the collector of transistor **49** to the base of normally cut off transistor **102** through an a.c. coupling network comprising capacitor **118** and resistor **119**.

After the 8 millisecond on-time of transistor **107** has elapsed, the enabling voltages supplied by circuit **112** to gate **14** and wave shaper **22** and the enabling voltage

supplied by circuit **113** to gate **15** decrease. Because of the relatively small resistor and capacitor circuit **113**, the decay of the voltage supplied to gate **15** is relatively fast, to cause relatively rapid cutoff of gate **15**. In contrast, the resistor and capacitor of circuit **112** are selected to enable a sustain effect to be provided. In the percussive mode, the sustain duration is variably controlled by adjusting the position of slider **117** and closing switch **116**. With the position of slider **117** adjusted toward the top of slider **114** a relatively long sustain effect is provided, whereby gate **14** and wave shaper **22** remain activated for an appreciable time period to simulate the sustain effect of a percussive instrument.

In a second mode of operation, the continuous mode, gates **14** and **15** and the gate in wave shaper **22** are enabled **20** milliseconds after any of key switches **31** are depressed and remain enabled until all keys are released. To these ends, the collector of transistor **49** is connected via a d.c. path to the base of transistor **102** through resistor **119** and switch **121** which shunts capacitor **118** and is closed when the system is operated in a continuous mode. In response to any of key switches **31** being depressed for more than **20** milliseconds, a positive voltage is derived at the collector of transistor **49** and is coupled through switch **121** to drive transistor **102** into a conducting state. Transistor **102** remains in the conducting state as long as a positive voltage is applied to its base, whereby transistor **107** is biased into a conducting state to supply constant current to circuits **112** and **113**; thereby, gates **14**, **15** and the gate in waveform shaper **22** pass tone signals supplied to them as long as any of key switches **31** are depressed. In the continuous mode, the attack rate can, at the option of the musician, be either slow or fast by opening or closing switch **111**. Similarly, by closing and opening switch **116**, the sustain effect can be a relatively long controllable time or a fixed shorter time for tones fed through gate **14** and the gate of wave shaper **22**.

In the reiterative mode, fast attack enabling voltages are derived from circuits **112** and **113** periodically, at a frequency determined by the modulation oscillator **20** (FIG. **1**), for as long as the key switches remain activated. To these ends, switch **111** is closed and the base of transistor **102** is a.c. coupled by series connected resistor **119**, capacitor **122** and switch **123** to be responsive to square waves derived by modulation oscillator **20**. Switch **123** is closed by the musician when the system is in the reiterative mode, at which time modulation oscillator **20** is adjusted to derive a random frequency output, whereby monostable multivibrator **101** derives an 8 millisecond pulse in response to each positive going transition of the modulation oscillator output square wave. Enable voltages are derived by circuits **112** and **113** in response to monostable multivibrator **101** being triggered by square wave input in the same manner as described for activation of the multivibrator in response to the positive going trailing edge of the voltage derived at the collector of transistor **49**.

WAVEFORM SHAPER 22, FIG. 4

The circuit of FIG. **4** responds to the tones derived from the **8'**, **16'** and **32'** outputs of frequency divider chain **10** to selectively synthesize sawtooth voltages, pulses and square waves having the same fundamental frequency as the selectively coupled tone input signals. The duration of the pulses is dependent upon the note of the highest pitch key. The derived square waves are substantial replicas of the input square waves. The different waveforms derived in response to the square wave tones fed to FIG. **4** enable unusual tonal effects to be attained and different musical instruments to be simulated; for example, the sawtooth, pulse and square waves can be utilized to respectively simulate piano, oboe and clarinet instruments. These waveforms can be selectively modified by volt age controlled filter **13** to provide other unusual effects. Waveform shaper **22** is also selectively responsive to random, i.e., noise signals, as well as a pulse each time the state of monostable multivibrator **38**, FIG. **2**, is changed in response to a new high note signal level being derived on lead **24**. The noise input can simulate acoustic effects of, for example, the wind, surf, or a brush hitting a snare, while the pulse derived from monostable multivibrator **38** can provide click effects or noise.

Control of which one or combination of the **8'**, **16'** or **32'** tones from frequency divider chain **10** into waveform shaper **22** is provided by selectively forward biasing diodes **131**, **132** and **133**, having cathodes respectively connected to the **8'**, **16'** and **32'** outputs of frequency divider chain **10**. Diodes **131–133** are selectively forward biased by applying positive voltages to anodes thereof in response to closure of normally open switches **134**, **135** and **136**, which are respectively connected to the diode anodes via resistors **137** so that a +5 volt d.c. level at terminal **138** can forward bias the diodes. The tone signals fed through diodes **131–133** are fed in parallel to wave synthesizing networks **141**, **142** and **143**, which respectively enable selective derivation of sawtooth, pulse and square waves.

Sawtooth wave generator **141** includes NPN transistors **144** and **145** which are responsive to the square wave inputs fed through diodes **131–133** to derive a pulse having a width indicative of the footage passed by the diodes. To these ends, the anodes of diodes **131**, **132** and **133** are connected, via capacitors **146**, **147** and **148**, to the base of transistor **144** which is normally forward biased by the connection of resistor **150** to the +30 volt d.c. source at terminal **149**. The values of capacitors **146**, **147** and **148** are selected in conjunction with the value of resistor **150** to provide an on-time for pulses derived by transistor **144** such that the pulse width is directly related to the footage of the input tone, i.e., the pulse width for the **8'** tone is narrower than the pulse widths for the **16'** and **32'** tones.

Transistor **145** is selectively maintained in a saturated, forward biased condition by connecting its base to the +30 volt supply at terminal **149** through resistor **152** and switch **153**, which is opened by the musician when he wants to synthesize sawtoothtype waves. When switch **153** is closed the collector of transistor **145** is grounded, whereby the base of transistor **144**, which is shunted by the collector of transistor **145**, cannot be forward biased and sawtooth variations cannot be derived.

To enable the sawtooth, as well as the other waveforms derived by the waveform shaper **22** to be derived, gating NPN transistor **153** is provided. The base of transistor **153** is connected to be responsive to the voltage developed across network **112**, FIG. **3**, so that transistor **153** is driven into a conducting state from a normally non-conducting state only while a positive voltage of sufficiently high level is derived from network **112**. As described supra the voltage level derived from network **112** controls attack rate and sustain times and is dependent upon the system operating

mode. In response to the base of transistor **153** being forward biased, current flows from the +30 volt source connected to the transistor collector, to the transistor emitter and thence to the collector of transistor **144** via resistor **154**, to enable current to be delivered to the collector of transistor **144**.

In operation, negative going transitions of the square waves coupled to the base of transistor **144** from the anodes of diodes **131-133** drive transistor **144** into a cut off condition. Transistor **144** remains in a cut off condition until the voltage across the capacitor **146**, **147** or **148** responsive to the square waves fed through the forward biased one of diodes **131–133** reaches a voltage sufficient to activate transistor **144** into a saturated state. Thereby, the cut off duration is determined by the values of capacitors **146–148** and resistor **150**, whereby a positive voltage is derived at the collector of transistor **144** for a time period indicative of the footage fed to the base of transistor **144** and the widths of generated pulses are accordingly controlled. The frequency of the generated pulses equals the frequency of the input square waves.

The voltage at the collector of transistor **144** is fed to an integrating circuit including resistor **158** and capacitor **159**. In response to the positive voltage being derived at the collector of transistor **144**, capacitor **159** is charged and the capacitor is subsequently discharged through the emitter collector path of transistor **144** in response to the transistor returning to a saturated condition. The time duration of the increasing ramp derived by the integrating capacitor **159** is determined by the duration of the pulse derived at the collector of transistor **144**, while the decay rate of the sawtooth wave derived from the integrating capacitor is substantially constant. Thereby, the leading edge duration of the sawtooth wave is controlled by which of footage is fed through diodes **131–133**, while the sawtooth frequency equals the fundamental frequency of the square wave input from divider chain **10**. The sawtooth waveform developed across integrating capacitor **159** is coupled to output terminal **164** by diode **161**, the cathode of which is connected to resistor **162**, and a relatively large d.c. isolating capacitor **163**.

To derive pulses having widths determined by the note of the highest note depressed key, the anodes of diodes **131–133** are connected to NPN transistors **165** and **166** which are interconnected with each other, as well as the tone signal and power supply voltages, in a manner similar to the connections of transistors **144** and **145**. In particular, the base of transistor **165** is connected to the anodes of diodes **131**, **132** and **133** by capacitors **167**, **168** and **169**, having values selected with criteria similar to those for determining the values of capacitors **146–148**. The charging rate of capacitors **167–169** is controlled by the amplitude of the highest note indicating voltage on lead **24**, which is d.c. coupled to the base of transistor **165** via terminal **171** and resistor **172** to control the extent of base forward bias of the transistor. In response to variations in the amplitude of the voltage at terminal **171**, the cut off time of transistor **165** is varied. In response to a negative going pulse being supplied through one of diodes **131–133** and capacitors **167–169**, to the base of transistor **165**, the transistor is driven into cut off and remains cut off until the voltage across one of capacitors **167–169** reaches a level sufficient to cause the transistor to be forward biased and driven into saturation, which occurs at a time controlled by the voltage on terminal **171**, value of resistor **172** and which of the capacitors is responsive to the square wave input.

To enable transistor **165** to be selectively activated and cut off to provide derivation of the pulses, switch **173** is connected between a positive d.c. power supply voltage and the base of transistor **166**. In response to switch **173** being closed, the emitter collector path of transistor **166** shunts the emitter base junction of transistor **165** to prevent conduction of transistor **165**. Collector current flow of transistor **165** is controlled in response to the enable voltage derived by network **112**, in a manner similar to that of transistor **144**, by the connection of the collector of transistor **165** to the emitter of transistor **153** through resistor **174**. Pulses derived at the collector of transistor **165** are fed to output terminal **164** via a pulse shaping circuit including diode **175** which is connected to load resistor **176**, the voltage across which is coupled to the output terminal via a low impedance a.c. coupling circuit comprising capacitor **177** and resistor **178**.

The derivation of replicas of the square wave voltages selectively coupled through diodes **131–133** is performed with circuit **143**, that includes NPN transistors **179** and **181**, connected in a manner similar to transistors **165** and **166**. The base of transistor **179** and collector of transistor **181** are connected to the anodes of diodes **131**, **132** and **133** by a d.c. path including diodes **182** and current limiting resistors **183**; the cathodes of diodes **182** are connected to the base of transistor **179** to isolate the base from negative transients that might be derived from capacitors **146–148** and **167–169**. Square waves are derived at the collector of transistor **179** by the musician opening switch **184**, and are fed through the circuit including diode **175**, resistors **176** and **178** and capacitor **177** to terminal **164** in response to current being supplied to the collector of transistor **179** by the emitter of transistor **153**.

The noise signal from noise generator **21** is selectively coupled to output terminal **164** under the control of the states of transistor **153** and switch **188**. To this end, the output signal of noise generator **21** is fed to the base of NPN transistor **185** via an a.c. coupling circuit including capacitor **186** that is connected to the noise source. Transistor **185** is normally forward biased by the connection of its base to the plus d.c. power supply through resistor **187**. Forward bias for the base emitter junction of transistor **185** is removed by closing switch **188**, which causes normally cut off transistor **189** to be forward biased and shunt the emitter base junction of transistor **185**, thereby driving transistor **185** to cut off. In response to switch **188**, however, being open circuited, the noise input signal is fed to terminal **164** via diode **175**, resistors **176** and **178** and capacitor **177** when transistor **153** is conducting, by virtue of the d.c. connection between the collector of transistor **185** and the emitter of transistor **153**.

To derive a relatively short duration pulse each time a new high pitch key is struck, the base of NPN transistor **191** is a.c. coupled via capacitor **192** and resistor **193** to the collector of transistor **42** of note played detecting multivibrator **38**, FIG. **2**. Transistor **191** is normally biased to a conducting state by the connection of its base to the positive d.c. power supply via resistor **194**. In response to the trailing, negative going edge of the pulse derived at the collector of transistor **42**, which occurs **20** milliseconds after monostable multivibrator **38** is driven into a transient state in response to a new high note being struck, transistor **191** is driven to

cut off and a positive pulse is supplied to terminal **164** through diode **175**, resistors **176** and **178** and capacitor **177**. The duration of the pulse is determined by the values of capacitor **192** and resistor **193**, components which control the length of time transistor **191** remains cut off. The pulse can be derived only when transistor **153** has been driven into a conducting state. To prevent the pulses derived in response to each activation of monostable multivibrator **38** being coupled to output terminal **164**, the emitter base junction of transistor **191** is selectively shunted. Shunting occurs in response to the emitter collector path of transistor **195** being biased into a conducting state by the musician closing switch **196** that selectively connects the positive d.c. power supply voltage to the base of transistor **195**.

VOLTAGE CONTROLLED OSCILLATOR AND CONTROL CIRCUITRY THEREFOR, FIG. 5

Reference is now made to FIG. **5** of the drawing wherein there is illustrated a circuit diagram of voltage controlled oscillator **9** and control circuitry therefor. The voltage controlled oscillator basic circuitry is substantially the same as that disclosed in my previously-mentioned copending application, so that a detailed description of the transistors, associated resistors and capacitors is not required herein. The freqquency of oscillator **9** is controlled, inter alia, by the amplitude of the d.c., note indicating voltage derived from the output of sample and hold circuit **8**, which is d.c. coupled to oscillator input terminal **201**. The frequency of the oscillator is also controlled by the magnitude of: the positive d.c. power supply voltage at terminal **202**, a variable voltage at terminal **203**, the value of resistor **204** which feeds the voltage at terminal **201** to the oscillator, and the values of substantially equal capacitors **205** and **206** that cross couple the collectors and bases of the oscillator transistors together.

The square wave output frequency of the oscillator, as derived at its output terminal **207**, which is connected as an input to frequency divider chain **10**, is expressed as:

$$f_n = \frac{V_n - V_s}{2RC(V_s - V_c)} \quad (1)$$

where:

f_n = output frequency,
V_n = input voltage at terminal **201**,
V_s = D.C. power supply voltage at terminal **202**,
V_c = voltage at terminal **203**,
R = value of resistor **204**,
C = value of each of capacitors **205** and **206**.

From Equation (**1**), since V_s is greater than V_c the frequency of oscillator **9** is related to variations in the amplitude of the voltage V_c in such a manner that as the voltage at terminal **203** increases, the output frequency increases. The voltage at terminal **203** is selectively varied in response to the output of modulation oscillator **20** and to provide flatting effects for certain musical instruments, particularly brasses, which are flatter when first voiced than in a steady state condition. Vibrato modulation of the frequency of oscillator **9** is attained by feeding the output of modulation oscillator **20** to terminal **203**. The frequency of modulation oscillator **20** can either be fixed in the range between approximately one to 50 Hertz, normally adjusted for a vibrato rate of approximately seven Hertz, or randomly varied about a mean frequency within this range. In response to the periodic or random variations in the amplitude of the wave derived by modulation oscillator **20**, the frequency of oscillator **9** is modulated.

The flatting effect is a transient function of the note indicating signal fed by voltage divider **3** to lead **24**. As the pitch of the note increases, the flatting effect is decreased. To these ends, the voltage at terminal **201**, indicative of the highest note resulting from depression of key switches **31**, is selectively gates to terminal **203** at a time when the tone corresponding with the note is initially being sounded.

For a realistic simulation of the different brass tones, the amount of flatting necessary is different for different instruments. For example, a trombone is initially voiced flatter than a trumpet, whereby it is necessary to have more flatting when simulating a trombone than for simulation of a trumpet. When it is desired to provide the flatting effect for one of the instruments, one of several different positive d.c. voltages is applied to the emitter of PNP transistor **209** by closing one of switches **211** or **221** which are connected to a positive d.c. supply voltage at terminal **212** through resistors **210** and **222** having different values. If switch **211** and resistor **210** are provided for trumpet flatting and switch **221** and resistor **222** for trombone flatting, the value of resistor **222** is smaller than that of resistor **210** to provide a higher emitter current for the trombone and therefore greater trombone flatting.

In response to one of switches **211** or **221** being closed, the difference in voltage amplitude between the note indicating voltage on lead **201** and the emitter voltage of transistor **209** is derived at the collector of transistor **209** which is connected to ground via load resistor **213** that is shunted by the normally cut off emitter collector path of NPN transistor **214**. Transistor **214** is driven into a conducting state in response to the positive going trailing edge of the voltage developed at the collector of transistor **49**, which is fed to the transistor base via the a.c. coupling circuit including capacitor **215** and resistors **216** and **217**. A terminal common to the collectors of transistors **209** and **214** is connected to terminal **203** and across relatively small load resistor **208** via relatively large capacitor **218**. When transistor **214** is cut off, capacitor **218** is charged to a voltage which is dependent upon the emitter current of transistor **209** and the value of resistor **213** so that as the highest note indicating voltage, V_n, increases the voltage on capacitor **218** decreases.

In response to transistor **214** being transiently activated into a conducting state in response to the positive going, trailing edge transition derived from the collector of transistor **49**, capacitor **218** is suddenly discharged through the collector-emitter path of transistor **214**. Thereby, the voltage at terminal **203** suddenly decreases by an amount equal to the voltage on capacitor **218** and therefore related to the value of V_n. This applies a negative transient voltage at terminal **203** which causes oscillation to transiently go flat. Capacitor **218** exponentially recharges after transistor **214** returns to a non-conducting state. Because the amplitude of the sudden decrease in the voltage at terminal **203** is inversely related to the highest note, greater flatting is provided for lower pitch tones than for higher pitch tones.

BRASS PRESET VOICE FILTERS, FIG. 6

Reference is now made to FIG. 6 of the drawing wherein there is illustrated a circuit diagram of a complete channel **231** for simulation of one brass instrument, the trumpet, as well as control circuitry **233** for the trumpet simulation channel and a further channel **232** for simulating a second brass instrument, e.g., the trombone. Trumpet simulation channel **231** is driven by the **16'** output of frequency divider chain **10,** while the trombone simulating channel **232** is driven by the **32'** output of the frequency divider chain. Channels **231** and **232** are driven in parallel by an output signal derived by envelope shaping network **233** which is responsive to the positive going voltage derived at the collector of transistor **49,** FIG. **2.** Channels **231** and **232** respond to the signals derived by envelope shaper **233** to provide simulation of the attack rate, attack tone color change, tone color change as a function of dynamic level, and overall tone quality for the two brass instruments being simulated.

Attack rate and release rate simulation are the same for the two brass instruments, whereby envelope shaping circuit **233** can be utilized to control envelope modulation of both of channels **231** and **232.** The attack and release voltage waveform applied by circuit **233** to channels **231** and **232** is illustrated in FIG. **7,** wherein the output voltage of circuit **233** is illustrated as a function of time. During the first few, approximately six, milliseconds after derivation of the positive going, trailing edge at the collector of transistor **49,** the voltage developed by circuit **233** increases at a relatively rapid exponential rate, as indicated by line segment **234.** After the six millisecond interval has elapsed, the rate of voltage increases of the output of circuit **233** decreases and assumes the exponential relationship indicated by waveform segment **235.** Upon release of a note, the waveform derived by circuit **233** decays at a rate indicated by exponential decay wave portion **236.**

To enable the wave shape indicated by FIG. **7** to be derived, circuit **233** includes three cascaded NPN transistors **237, 238** and **239** arranged so that the base of each succeeding stage is connected to be driven by the collector of the preceding stage. Transistors **237** and **239** are normally biased to cut off condition, while transistor **238** is normally biased to be conducting.

The base of transistor **237** is d.c. coupled via resistor **241** and terminal **242** to the collector of transistor **49** so that in response to a positive voltage being derived at the collector of transistor **49,** transistor **237** is driven from its normally cut off state into a conducting state. The resulting decrease in the voltage at the collector of transistor **237** is coupled to the base of transistor **238,** causing the latter transistor to be biased into a cut off state. In response to transistor **238** being cut off, capacitor **243,** which in combination with diode **242** shunts the collector-emitter path of transistor **238,** is charged by the d.c. power supply voltage connected to terminal **244** via resistor **245** and diode **242.** Thereby, the voltage across capacitor **243** increases as indicated by the waveform segment **234.**

In response to the voltage across capacitor **243** reaching a predetermined level, the charge rate of the capacitor is decreased since resistor **246** and diode **247** are connected in series from the collector of transistor **238** to a +5 volt d.c. power supply at terminal **248.** In response to the voltage across capacitor **243** increasing above the voltage drop of diode **247,** to a level of 5.5 volts, the diode is forward biased so that current from terminal **244** is shunted through resistor **246** and the diode to decrease the charging rate of capacitor **243,** as indicated by waveform segment **235.** Capacitor **243** continues to charge until the voltage across it reaches a predetermined value, such as 9.5 volts, at which time the capacitor is fully charged.

Capacitor **243** remains charged until all of key switches **31** are deactivated, at which time the voltage at the collector of transistor **49,** applied by terminal **242** to the base of transistor **237,** drops to a zero level, causing transistor **237** to cut off and transistor **238** to be saturated. Saturation of transistor **238** results in a discharge of capacitor **243** through resistor **249** and the saturated collector-emitter path of transistor **238,** to provide waveform segment **236.** The voltage variations across capacitor **243** are coupled to the base of transistor **239** and thence to the emitter of the transistor which is a driver for channels **231** and **232.**

Waveform segments **234** and **235** control the plural sequentially derived fast and slow attack rates for the instruments simulated by channels **231** and **232,** while waveform segment **236** simulates the decay rate of the instruments. It has been found that effective simulation of the instruments can be provided by the attack and decay rates described.

Channels **231** and **232** are substantially the same, with the exception of certain components included in the former which may not necessarily be included in the latter. To provide the different simulation effects, however, the circuits have different component values as required. Because the circuits are substantially the same, channel **231** is described to the exclusion of channel **232;** the elements which are not in channel **232,** but which are in channel **231,** are indicated infra.

When the system is activated to provide simulation of trumpet sounds, the base of NPN transistor **251** is connected to be responsive to the square wave signal derived on the **16'** output lead of frequency divider chain **10,** as coupled through capacitor **252** and diode **253** which is forward biased in response to the positive voltage applied to its anode by the d.c. power supply connected to terminal **254** and resistor **255.** If no trumpet simulation is desired, transistor **251** is driven into saturation by connecting the d.c. power supply voltage at terminal **212,** FIG. **5,** through switch **211** and resistor **256** to the transistor base; transistor **251** is prevented from passing a tone signal because it is held in saturation due to base current being supplied from terminal **212** via resistor **256** and switch **211.** Switch **211** is the same switch as is illustrated in FIG. **5;** it is a single pole, double throw switch arranged so that its contact connects terminal **212** to only one of resistors **210** or **256.** Thereby, the trumpet flatting effect is provided only when switch **211** is activated to enable transistor **251** to be responsive to the **16'** output of frequency divider chain **10.**

The square wave tone signal applied to input capacitor **252** results in a pulse waveform at the collector of transistor **251** which is amplitude modulated in response to the voltage supplied to the base of transistor **239.** Envelope modulation of the tone signal occurs because the voltage supplied to the collector of transistor **251** is derived from the emitter of transistor **239,** having a waveform as shown by FIG. **7,** which enables simulation of the plural attack rates indicated by wave segments **234** and **235** and the decay rate indicated by wave segment **236.**

The tone signal developed at the collector of transistor **251** is fed via diode **258** to a bandpass filter **259** of the active type. Diode **258** is included to enable the bandpass filter to be decoupled from any voltage variations which might appear at the collector of transistor **251** when trumpet simulation is not performed.

Bandpass filter **259** is of the active type, including NPN transistor **261** and a feedback circuit from the emitter of the transistor to its base, which is respponsive to the signal coupled through diode **258** via capacitor **262.** The base of transistor **261** is forward biased by a positive d.c. voltage connected to terminal **263** and resistor **264** to a terminal between filter resistor **265** and capacitor **262.** The feedback path from the emitter of transistor **261** to its base includes capacitor **266** which provides a first shunt path for the transistor emitter base junction, as well as the series combination of resistor **267** and capacitor **268** which provides a second shunt path for the emitter base junction. The connection between resistor **267** and capacitor **268** is shunted to ground by capacitor **269.** The signal derived at the output of bandpass filter **259** is developed across emitter load resistor **270.** The values of the components included in bandpass filter **259** are selected so that the filter center frequency is approximately at 1200 Hz.

The filtered output signal of bandpass filter **259** is fed to variable wave shaper **273** which controls tone color during the attack phase of the tone signal applied thereto whereby brightness increases as time increases as a voice is being initially sounded. This effect is achieved by varying the non-linear impedance of circuit **273** so that during the attack phase the high frequencies derived from bandpass filter **259** are attenuated as a variable function of time. To these ends, the emitter of transistor **261** is connected to resistor **274,** which is connected to ground through a variable nonlinear impedance shunt path including capacitor **275** and diode **276.**

When no note is being played, diode **276** is forward biased to provide a low impedance shunt path between resistor **274** and ground, whereby the filter attenuates the high frequencies in the tone signals. Diode **276** is forward biased in response to the relatively high voltage at the collector of transistor **237,** which is fed to the anode of diode **276** through diode **277** and a bias control network including series resistors **278** and **279,** the junction between which is shunted to ground by capacitor **280.** Diode **277** is poled in such a manner that capacitor **280** is charged to 0.75 of the voltage at the collector of transistor **237** in response to transistor **237** being biased to its cut off condition, as exists when no note is depressed and for the first **20** milliseconds after depression of a note.

In response to transistor **237** being forward biased 20 milliseconds after initial depression of a key, diode **277** is back biased and capacitor **280** is discharged through diode **276** and resistor **279.** As time progresses, the discharge current decreases and the impedance of diode **276** is increased, until the diode is no longer biased to a conducting state. As the impedance of diode **276** increases, the shunt impedance from resistor **274** to ground increases, reducing the attenuation of the high frequencies in the tone signal passed through circuit **273.** For a typical circuit simulating the attack action of a trumpet, the variable wave shaping action provided by diode **276** and capacitor **275** is completed in approximately 200 milliseconds. In response to release of all keys a similar variable filtering effect is provided in the opposite direction in response to diode **276** being forward biased in response to the increasing voltage developed across capacitor **280** from the relatively high voltage at the collector of transistor **237.**

It has been found that the tone brightening effect provided by the variable impedance connected between resistor **274** and ground is not as important for trombone simulation as for trumpet simulation. Therefore, in channel **232,** the tone brightening effect is not necessarily included and the components associated therewith, i.e., capacitors **275** and **280,** resistors **278** and **279,** and diodes **276** and **277** can be excluded.

Additional tone color filtering, under control of the musician as a function of tone loudness, is provided by variable wave shaper **282** that receives the tone signal derived from tone color control circuit **273.** Dynamic wave shaping by **282** is controlled by the musician depressing expression shoe **18.** In response to no depression of expression shoe **18,** the high frequencies of the tone signal are passed through circuit **282** with substantial attentuation, while minimum attenuation and dynamic wave shaping of the high frequencies are provided by maximum depression of the expression shoe.

To these ends, circuit **282** includes a variable impedance shunt path across the output of circuit **273.** The variable impedance shunt path comprises capacitor **283** and diode **284,** having its anode connected to capacitor **283** and its cathode grounded. The junction between diode **284** and capacitor **283** is connected to a variable d.c. voltage at slider **285** of potentiometer **286** via coupling resistor **287.** Slider **285** is controlled by depression of expression shoe **18** so that in response to the expression shoe being completely depressed, the slider picks off a very low or zero d.c. voltage, but if the expression shoe is not depressed, a maximum d.c. voltage is fed to diode **284** by slider **285.** In response to full depression of expression shoe **18,** diode **284** is biased to cut off, whereby a high shunt impedance is provided for the high frequencies of the tone signal and maximum brightness is thereby attained. In contrast, diode **284** is forward biased to a great extent if the expression shoe is not depressed at all, to provide a great deal of attenuation for the high frequencies of the tone signal and reduced brightness. The signal developed across capacitor **283** and diode **284** is fed to the output terminal of channel **231** via a coupling network including series resistor **288** and capacitor **289.**

The output of channel **231** is combined with the output signal of channel **232,** which provides trombone simulation in response to the **32'** tone input, and the attack waveform developed at the emitter of transistor **239,** as well as an indication of expression shoe position, as coupled to a potentiometer pick off point within channel **232.** The tones derived from channels **231** and **232** are combined in an additive manner to provide complete simulation for the two brass instruments.

FLUTE FILTERS, FIG. 8

Reference is now made to FIG. **8** of the drawing wherein there is illustrated in partially block diagram and partially circuit schematic diagram flute filters **12.** There are five separate flute filter channels **201–205,** each of which is substantially the same, except for fixed circuit component values associated with different cut off frequencies for the different channels. The five channels **201, 202, 203, 204** and **205** are respectively responsive to the **1 ⅓', 2 ⅔', 4', 8'** and **16'** square wave

tone output signals of frequency divider chain **10**. The signals filtered in channels **201** and **202** for the partials **1 ⅓'** and **2 ⅔'**, are combined together in an amplifier **206**, the output of which is fed to gate **14**. The filtered signals responsive to the **4'**, **8'** and **16'** outputs of divider chain **10** are fed by filters **203–205** to amplifier **207**, the output of which is fed to gate **15**.

Each of filters **201–205** includes a fixed filter section of the low pass type, as well as a variable gain amplifier circuit, the gain of which is directly proportional to the highest pitch indicating voltage on lead **24**, as coupled to the filters via terminal **208**. By controlling the gain of each of filters **201–205** in response to the highest note depressed key, the amplitude of the fundamental frequency remains relatively constant over the frequency range of the input signal while providing a given attenuation for harmonics associated with the key irrespective of input frequency. Harmonic filtering, to the exclusion of fundamental filtering, enables the filter outputs to resemble, more closely, a sinusoidal wave shape, rather than the square wave shape of the filter input to provide more accurate flute simulation.

To these ends, in one embodiment, channel **201** includes a varaible gain amplifier comprising NPN transistor **211**, the base of which is responsive to the square wave output of frequency divider chain **10** for the **1 ⅓'** tone. The collector of transistor **211** is connected in a d.c. circuit to be biased by the output voltage of sample and hold circuit **8** via resistor **212**, while the emitter of the transistor is grounded. As the output voltage of sample and hold circuit **8** increases, the gain of transistor **211** is accordingly increased so that the transistor gain is directly and linearly proportional to the highest pitch signal on lead **24**. Therefore, as the highest pitch signal voltage on lead **24** increases, the gain of amplifier **211** increases.

The output signal, at the collector of transistor **211**, is coupled to a fixed, low pass filter circuit **213** that may include one or several cascaded resistance capacitance sections. For purposes of the present description, there are illustrated two cascaded sections **214** and **215**, having different cut off frequencies such that the cut of frequency of section **214** is less than that of section **215**. Thereby, filter circuit **213** provides approximately **6** db attenuation for its input frequencies between the cut off frequencies of sections **214** and **215**, about **12** db attenuation for input frequencies greater than both cut off frequencies, and substantially no attenuation for frequencies less than both cut off frequencies.

Channel **201** provides substantial attenuation for harmonics of the **1 ⅓'** input signals fed thereto while enabling the fundamental, regardless of frequency, to be passed. Attenuation of harmonics, without fundamental attenuation, is attained because the gain of transistor **211** is directly proportional to the highest pitch signal indicated by the voltage on lead **24**. The gain of amplifier **211** and the low pass filter characteristics of filter circuit **213** are such that all fundamentals coupled to channel **210** between the two cut off frequencies of sections **214** and **215** are passed through the channel with the same degree of attenuation.

The operation of channel **201** can, perhaps be best described by considering a few examples. Assume that the cut off frequencies of sections **214** and **215** are f_o and $2f_o$, respectively, and that the gains of amplifier **211** are one and two for notes having fundamentals of f_o and $2f_o$, respectively. Under these circumstances filter circuit **213** respectively provides approximately 0 db and 6 db attenuation for f_o and $2f_o$. If the f_n note is the highest frequency struck key, the f_n fundamental is passed with 0 db while its second harmonic, $2f_n$, is attenuated **6** db and its fourth harmonic, $4f_n$, is attenuated 18 db. If the $2f_o$ note is the highest note struck key, the −6db of attenuation provided for the $2f_n$ fundamental by filter circuit **213** is compensated by the increased, +6 db gain of amplifier **211** so that the $2f_n$ frequency is passed by channel **201** with 0 db, the same as the f_o fundamental when the f_o note was the highest note struck key. The second harmonic, $4f_n$, of the $2f_o$ fundamental is attenuated 12 db by channel **201**.

As an alternate configuration, the range of fundamental frequencies passed without attenuation can be increased while providing the same degree of attenuation for all higher harmonics. In general, this result is attained by cascading several (N) individual, gain controlled amplifier stages, each followed by a low pass filter; each filter may have the same cut off frequency to achieve the same harmonic attenuation slope as a function of frequency. If N stages are provided, the harmonic attenuation rate is **6N** db per octave. In one arrangement, such a result can be achieved by connecting a transistor linear amplifier between stages **214** and **215** and controlling the gain of the linear amplifier in the same manner that the gain of transistor **211** is changed. Such a configuration provides two variable gain sections, which have a multiplicative effect on the total filter characteristic. The two variable gain sections, in combination with the two low pass filter sections, provide 0 db attenuation for all fundamental frequencies equal to or greater than the common cut off frequency of the filter sections and 12 db per octave attenuation for all harmonics of the fundamentals.

The same result of 0 db attenuation for the fundamental and 6N db per octave for harmonics can be achieved with N stages having different types of gain controlled elements, as illustrated in FIG. **9** wherein two cascaded stages **221** and **222** are provided. The gain of each of stages **221** and **222** is controlled in response to the highest pitch indicating signal derived from sample and hold circuit **8** as coupled to terminal **208**. Stage **221** includes a variable gain amplifier and one low pass filter section, having the same configuration as amplifier **211** and stage **214** of the channel illustrated in FIG. **8**. The output of stage **221** is fed through d.c. blocking capacitor **224** and variable impedance diodes **226** and **227** to a low pass filter section comprising series resistance **228** and shunt capacitor **229**. Bias voltage is applied to the anodes of diodes **226** and **227** from terminal **208** via resistor **230**, and a return path from the cathodes of the diodes to ground is provided by resistors **231** and **232**. Capacitor **224** is selected to have a large enough value such that all frequencies of interest are passed through it without attenuation. The cut off frequency of the filter including resistor **228** and capacitor **229** can be equal or different from the cut off frequency of the low pass filter included in section **221**, depending upon whether it is desirable to attenuate certain harmonics to a greater extent than others.

In response to variations in the d.c. voltage at terminal **208**, the impedances of diodes **226** and **227** are varied. As the voltage at terminal **208** increases, the impedance of diodes **226** and **227** decreases, to reduce the attenuation inserted by filter section **222** on its input signal. Since each of sections **221** and **222** includes a variable gain or variable attenuation device having signal passing properties directly proportional to the high-

est pitch indicating voltage on lead **24**, the attenuation characteristics of the two filter sections are overcome for the range of fundamental frequencies.

VOLTAGE CONTROLLED FILTER, FIG. 10

Consideration is now given to the voltage controlled filter **13** responsive to the tone signals selectively derived from waveform shaper **22** in response to the **32'**, **16'** and **8'** signal tones supplied to the shaper **22**, as well as in response to the noise and key activation tone signals supplied to the shaper **22**. Filter **13** enables unusual and variable characteristics to be provided for its input signal. The filter includes means for providing one, or a combination of three, transfer functions that provide low pass, bandpass and high pass filter characteristics on its input signal. The filter characteristics provided by filter **13** are variable with regard selectivity (Q) and cut off or center frequency (which can be considered resonant frequency), depending upon the desires of the musician. The resonant frequencies can be determined in response to one of: the highest pitch indicating voltage derived from sample and hold circuit **8**, the position of expression shoe **18**, or the attack control provided by the waveform fed by mode selector **19** to gate **15** for controlling the **16'**, **8'** and **4'** outputs of the flute filters. Selectivity of the filter characteristics, that is its Q, is controlled by a preset operator adjustment.

To these ends, filter **13** is of the active type, including conventional d.c. operational amplifiers **241**, **242** and **243**, that include a phase inverting, i.e., negative input, and a non-phase inverting, i.e., positive, input so that the output voltage of each amplifier is proportional to the difference of the voltages at its positive and negative input terminals. Amplifier **241** is responsive to signals at its positive and negative input terminals and is provided with a negative d.c. feedback path comprising resistor **244**, whereby the output voltage of amplifier **241** is indicative of the difference between the input signals supplied to its positive and negative input terminals. The non-inverting input terminals of amplifiers **242** and **243** are grounded while the inverting input terminals have tone signals applied, these amplifiers are provided with capacitors **245** and **246** in their negative feedback loops so that the outputs thereof are proportional to the integral of the inputs applied to the inverting input terminals thereof. The output signal of integrator **243** is coupled via a d.c. feedback path including resistor **247** to the negative input terminal of amplifier **241**, which is also responsive to the tone indicating output signal of waveform shaper **22**, as derived at terminal **164**, FIG. **4**, and coupled through resistor **248**. Connected between the output of amplifier **241** and the negative input terminal of amplfier **242** is two quadrant multiplier **249**, responsive to a d.c. voltage at terminal **251**. A similar multiplier **252**, connected between the output of amplifier **242** and the negative input terminal of amplifier **243**, responds to the d.c. voltage at terminal **251**. Multipliers **249** and **252** thereby respectively derive output signals of both polarities that are proportional to the products of the voltage at terminal **251** and the output voltages of amplifiers **241** and **242**.

The d.c. voltage at terminal **251** determines the filter resonant frequency, i.e., the center frequency of the bandpass filter characteristic, the cut off frequency of the low pass and high pass filter characteristics. The voltage at terminal **251** is controlled by the operator activating one of switches **253**, **254** or **255** to selectively couple the highest note indicating d.c. output voltage of sample and hold circuit **8**, a d.c. voltage indicating the position of expression shoe **18**, or the attack waveform fed to gate **15** by mode selector **19**. The expression shoe controls the position of slider **260** of d.c. energized potentiometer **261** such that voltage fed through switch **254** has a maximum value for maximum depression of expression shoe **18**; the d.c. voltage has a minimum value in response to the expression shoe being in the up position.

The Q of the filter characteristics is determined by a feedback path between the output of amplifier **242** and the non-inverting input terminal of amplifier **241**. The feedback path includes a pair of fixed resistors **256** and **257**, between which is connected potentiometer **258**, having a slider **259** that is connected via a d.c. path to the non-inverting input terminal of amplifier **241**; resistors **256** and **257** and potentiometer **258** provide a shunt path for the output of amplifier **242** to ground. Resistor **257** is provided to limit the gain of the network, whereby the possibility of oscillation at a frequency in the band of interest is obviated. Fixed resistor **256** is provided to enable the desired range of Q values to be obtained.

To derive the high pass, bandpass and low pass filter characteristics, the output signals of amplifiers **241**, **242** and **243** are selectively fed through switches **261**, **262** and **263**, any or all of which may be closed at the will of the operator, depending upon the desired effect, to a common output terminal **264**. If more than one of switches **261–263** is activated to the closed state, the voltage derived at terminal **264** provides a combination filtering effect for the tone signal supplied to resistor **248**.

It can be shown that the low pass, bandpass and high pass filter transfer functions are respectively represented by:

$$\frac{K}{1 + kd\left(\frac{jw}{aV_{dc}}\right) + \left(\frac{jw}{aV_{dc}}\right)^2} \tag{2}$$

$$\frac{K\left(\frac{jw}{aV_{dc}}\right)}{1 + kd\left(\frac{jw}{aV_{dc}}\right) + \left(\frac{jw}{aV_{dc}}\right)^2} \tag{3}$$

$$\frac{K\left(\frac{jw}{aV_{dc}}\right)^2}{1 + kd\left(\frac{jw}{aV_{dc}}\right) + \left(\frac{jw}{aV_{dc}}\right)^2} \tag{4}$$

where:

k = gain of the filter, determined by impedance component values;

k = proportionality constant, determined by the relative resistances of resistor **256** and the total resistance of potentiometer **258**;

kd = 1/Q = indication of the position of slider **259**;

$j = \sqrt{-1}$

w = frequency

aV_{dc} = the circuit resonant frequency;

V_{dc} = d.c. voltage at terminal **251**.

From Equations (2), (3) and (4), it is seen that the resonant frequency, aV_{dc}, and Q of each of the transfer functions are identical. By increasing the voltage applied to terminal **251**, the resonant frequency is increased. The Q is increased by moving slider **259** toward the connection between resistor **257** and potentiometer **258**, while decreases in Q are provided by

moving the potentiometer toward the connection between resistor **256** and potentiometer **258.**

MODULATION OSCILLATOR AND NOISE GENERATOR, FIG. 11

Reference is now made to FIG. **11** of the drawing wherein there is illustrated a circuit diagram for vibrato oscillator **20,** noise generator **21** and control circuitry interconnecting the noise generator and the vibrator oscillator, as well as other control circuitry.

Vibrato is an important sub-audio frequency musical embellishment that adds an artistic sense to music due to deviation of a tone from a precise and steady frequency. It is extremely difficult for a musician playing a flute or a brass instrument to produce a tone of constant frequency. The deviation from the constant frequency is a vibrato effect, which in actuality is a random, sub-audio frequency, variation of tone. It has been found that accurate simulation of the vibrato effect can be achieved by random variation of the tone frequency at a sub-audio modulation frequency that may lie in the region of between approximately 5.5 and 9.5 Hertz. Typically, the random variation is plus or minus 15% about the sub-audio modulation frequency.

In simulating the vibrato effect, the present invention provides a vibrato oscillator of the relaxation type wherein capacitor **271** is supplied with constant charging and discharging current to derive a triangular type waveform. The slopes of the leading and trailing edges of the triangle type waveform are maintained equal because of the equal charging and discharging currents. The durations of the charge and discharge portions of the waveform may be variable by varying the input voltage level on lead **273** of comparison trigger circuit **272** that also responds to the capacitor voltage. For the random vibrato effect, the trigger level on lead **273** is responsive to the output of noise generator **21.** If random control of the vibrato frequency is not desired, a constant input voltage is supplied to comparison trigger **272** by lead **273,** whereby charging and discharging currents are supplied to capacitor **271** for non-random time durations.

To establish the constant charge and discharge currents for capacitor **271,** PNP and NPN transistors **274** and **275** are provided. Transistors **274** and **275** are biased by a resistive voltage divider including resistors **351–353** that are connected between the positive d.c. power supply voltage between terminal **281** and ground. Taps of the voltage divider are connected to bases of transistors **274** and **275** to provide base biases of +28 volts and +2 volts, respectively. The emitter collector paths of transistors **274** and **275** are individually series connected with capacitor **271,** with the emitter of transistor **274** being connected to the cathode of diode **276,** while the emitter of transistor **275** is connected to the anode of diode **277.** The cathode and anode of diodes **277** and **276** have a common terminal, which is connected to tap **278** of variable resistor **279.** The setting of tap **278** is set by the musician to control the charging and discharging current levels supplied to capacitor **271,** and therefore the basic oscillation frequency of the vibrator oscillator. When capacitor **271** is being charged, the d.c. supply voltage at terminal **281** supplied positive d.c. current through the emitter collector path of transistor **282** and coupling resistor **283,** connected to one end of resistor **279,** and thence through diode **276** and the emitter collector path of transistor **274** to the capacitor. During discharge of capacitor **271,** the emitter collector path of PNP transistor **282** is turned off, while the emitter collector path of transistor **284,** which was turned off while the emitter collector path of transistor **282** is turned on, is turned on. Thereby, a discharge path is provided from capacitor **271** through the emitter collector path of transistor **275,** diode **277,** resistor **279,** coupling resistor **285** and the emitter collector path of transistor **284** to ground.

PNP transistor **282** and NPN transistors **284** and **286** are interconnected with each other in a flip-flop type circuit such that the emitter collector path of transistor **286** is in a conducting state while transistors **282** and **284** are respectively activated to the conducting and non-conducting state; the emitter collector path of transistor **286** is cut off while the emitter collector paths of transistors **282** and **284** are respectively cut off and conducting. To these ends, the base of transistor **282** and collector of transistor **286** are connected to be biased by the positive d.c. supply voltage at terminal **281** via resistors **287** and **288** and base bias for transistor **284** is provided through resistor **289** that is connected to the terminal common to resistor **288** and the collector of transistor **286.** The base of transistor **286** and collector of transistor **282** are interconnected by resistor **291.** To positively establish the flip-flop type action, the collector of transistor **284** is connected to the base of transistor **286** and the collector of transistor **282** has component values such that it normally has no effect on the frequency of oscillations derived by the vibrato oscillator.

The frequency of the vibrato oscillator is controlled by comparing the voltage across capacitor **271** with the input voltage supplied by lead **273** to comparator trigger network **272.** The voltage variations of capacitor **271** are coupled to an isolation amplifier **293** that includes cascaded emitter follower stages **294** and **295;** the base of emitter follower **294** is responsive to the voltage across capacitor **271.** The impedance seen by capacitor **271** between the base of transistor **294** and ground remains constant, despite variations in the capacitor voltage, whereby the constant charging and discharging currents supplied to capacitor **271** by transistors **274** and **275** result in linear increases and decreases of the capacitor voltage, which are derived at the emitter of transistor **295.**

The voltage amplitude derived by amplifier **293** controls when transistors **282** and **284** are activated into the conducting and non-conducting states. To these ends, the voltage at the emitter of transistor **295,** an in phase replica of the voltage variations of capacitor **271,** is fed via resistor **297** to the emitter of transistor **296** that is included in comparison trigger network **272.** The base of transistor **296** responds to the voltage on lead **273,** which can be constant or randomly variable depending upon whether the musician selects the reiterative or random mode of operation. In response to the voltage at the emitter of transistor **295** exceeding the voltage between the base and emitter of transistor **296,** transistor **296** is activated into a conducting state and positive current is supplied to the baseof transistor **284,** to drive that transistor into a conducting state, whereby transistor **282** is cut off and capacitor **271** begins to discharge through the constant current drain comprising transistor **275,** diode **277,** resistor **279** and transistor **284.** As capacitor **271** begins to discharge, the voltage at the emitter of transistor **295** decreases, causing the emitter base junction of transistor **296** to become back biased, whereby the collector of transis-

tor **296** does not supply current to the base of transistor **284**. Transistor **284**, however, remains conductive because of the bias applied to its base by resistors **287–289**.

The discharge current of capacitor **271** continues through the emitter collector path of transistor **284** until NPN transistor **298** in comparator trigger **272** is driven out of saturation in response to a predetermined low voltage level at the emitter of transistor **295** which is coupled to the base of transistor **298** via coupling resistor **299**. In the random mode, the base of transistor **298** is responsive solely to the voltage at the emitter of transistor **295**, as fed to its base emitter bias resistor **301** by resistor **299**. In the reiterative mode, however, a certain amount of forward bias is applied to the base of transistor **298** whenever a key **31** is not depressed by virtue of the connection of the collector of transistor **81**, FIG. **2**, to the base of transistor **298** through resistor **302** and switch **303** which is closed only while the organ is in the reiterative mode and prevents the oscillator from oscillating. With the system in the reiterative mode, a constant voltage level is applied to lead **273**, as described infra, and when any of keys **31** are depressed transistor **81** saturates, which removes the forward bias provided to transistor **298**, resulting in a fixed oscillation frequency. Thus the oscillator is synchronized each time a voltage appears on lead **24** in response to key activation.

In either mode, in response to the voltage at the emitter of transistor **295** being greater than the predetermined level, even though the voltage of capacitor **271** is decreasing, the emitter collector path of transistor **298** is forward biased to saturation, whereby the transistor collector is at a sufficiently low voltage to prevent coupling of the d.c. voltage at terminal **281** through diode **304**, the anode of which is connected to a junction between the collector of transistor **298** and one terminal of resistor **305**, the other terminal of which is connected to the voltage at terminal **281**. In response to transistor **298** being driven out of saturation and into cutoff because the voltage at the emitter of transistor **295** has reached the predetermined level, positive voltage is fed from terminal **281** through resistor **305** and diode **304** to the base of transistor **386** and the collector of transistor **284**, the latter being via capacitor **292**. In response to the positive voltage fed through diode **304**, transistor **286** is activated to the conducting state and transistor **284** is driven to cutoff. The conducting state of transistor **286** produced sufficient voltage drop across resistor **287** to cause PNP transistor **282** to be driven into a conducting state.

Two output signals are derived from the oscillator illustrated in FIG. **11**; one output is utilized to control the frequency of voltage controlled oscillator **9**, and the second output provides gating voltages to mode selector **19**. The frequency of voltage controlled oscillator **9** is responsive to the basically triangular voltage variations of capacitor **271**, as derived at the emitter of transistor **295** and coupled to potentiometer **305**. Slider **306** of potentiometer **305** is positioned to control the magnitude of the voltage variations supplied by the vibrato oscillator to voltage controlled oscillator **9**, and thereby determines the modulation index imposed by the vibrato oscillator on the frequency of the voltage controlled oscillator. Slider **306** is connected via coupling capacitor **307** to terminal **203** of the vibrato oscillator illustrated in FIG. **5**. The reiterative output is in the form of pulses which are derived every cycle by a differentiating network including series resistor **308**, capacitor **309** and shunt resistor **310**, that is responsive to the basically square wave voltage variations at the collector of transistor **282**. The voltage developed across resistor **310** is connected to the base of transistor **102**, FIG. **3**, in response to switch **123** being activated to the closed condition during the reiterative mode, whereby transistor **102** is driven into a conducting state once every cycle of the modulator by the positive going pulses developed across resistor **310**.

In response to variations in the voltage on lead **273** due to noise from noise generator **21**, the emitter base forward bias point of transistor **296** is controlled. If the voltage on lead **273** is maintained constant, the charging and discharging times of capacitor **271** are equal, as illustrated in FIG. **12A**, which represents the square wave voltage variations between the emitter and collector of transistor **284**. The voltage variations of capacitor **271** are illustrated in FIG. **12B** wherein the linear charge and discharge currents are reflected in the identical leading and trailing slopes of the triangular waveform. The peak upper and lower values of the triangle waveform are to be noted. In contrast, in FIG. **13**, which illustrates waveforms derived in response to random noise variations on lead **273**, the peak voltages of the triangular waveform are variable, being dependent upon the amplitude of the noise signal on lead **273**, as indicated by waveform **314**; the triangular voltage variations **313** have linear, equal slopes because of the equal charge and discharge currents. The noise signal derived on lead **273** has a variable level, controlled by the musician, and a white noise characteristic over a frequency range between approximately 50 Hz. and 15 to 20 KHz.

The white noise generator **21** comprises an NPN transistor **321** having its emitter collector path biased by the positive voltage at terminal **281**, as coupled through resistor **322**. Thermal noise of transistor **321** is generated by connecting capacitors **323–325** between its collector and emitter, base and emitter and collector and base. Base bias is provided by series resistors **326** and **328**. The thermal noise voltage variations derived at the collector of transistor **321** are a.c. coupled via capacitor **329** to the base of NPN transistor **331** which includes a feedback circuit comprising capacitor **332** and resistor **333**, designed to attenuate some of the high frequency noise variations.

The noise signal developed at the collector of transistor **331** is fed via coupling capacitor **335** to a high gain, clipping amplifier comprising cascaded fixed gain transistor amplifier stage **334** and variable gain stage **336**, both of which are connected in the grounded emitter configuration. The signal at the collector of transistor **334** is also supplied to the base of emitter follower transistor **337**. Voltage developed across emitter load resistor **338** of emitter follower **337** is selectively fed to the base of transistor **185**, FIG. **4**, via capacitor **186** to enable simulation of wind, surf, and associated noise type signals in waveform shaper **22**, as described supra.

The gain of amplifier **336** is controlled by the position of slider **339** of variable resistor **341**, connected in the collector bias circuit of transistor **336***a*. The position of slider **339** is selected in accordance with the desired amount of the random frequency variations of vibrato oscillator **20**; the gain is directly proportional to the frequency variation desired. The noise signal derived at the collector of transistor **336***a*, which has a clipped waveform so that it consists of two voltage lev-

els having randomly varying leading and trailing edges, is a.c. coupled via capacitor **342** to a further amplifier stage **343**, the output of which is d.c. coupled to the base of transistor **296** via lead **273**. The d.c. level at the collector of transistor **343**, supplied to lead **273**, is such that the noise signal varies about an average value to maintain the vibrato center frequency, about which the frequency variations occur, at the fixed level determined by the setting of resistor **279**.

If it is desired to defeat the random variations in the frequency of the vibrato oscillator, as during the reiterative mode, the collector output of amplifier **336** can be selectively shunted to ground, whereby a constant voltage is applied by transistor **343** to the base of transistor **296** via lead **273**. To these ends, switch **344** selectively connects a positive d.c. voltage at terminal **345** to the bases of NPN transistors **343** and **346**. The base bias applied to transistor **346** when switch **344** is closed is sufficient to drive transistor **346** into saturation, to prevent coupling of the noise signal to the base of transistor **343**. The base of transistor **343** is biased by its connection through resistor **348** and switch **344** to the positive d.c. voltage at terminal **345** such that the same d.c. value is derived at its output as is derived when the noise signal is fed thereto.

While there has been described and illustrated one specific embodiment of the invention, it will be clear that variations in the details of the embodiment specifically illustrated and described may be made without departing from the true spirit and scope of the invention as defined in the appended claims.

What is claimed is:

1. An audio frequency filter comprising in cascade in the order recited, a first operational amplifier, a two quadrant first multiplier, a second integrating operational amplifier having two inputs, a second two quadrant multiplier, a third integrating operational amplifier, a source of audio signal applied to a first input of said first operational amplifier, means for applying multiplicative voltage factors respectively to both said first multiplier and said second multiplier, means for feeding back output from said second operational amplifier to a second input of said first operational amplifier, means for feeding back output from said third operational amplifier to said first input of said first operational amplifier, and means for deriving separate audio signal outputs from each of said operational amplifiers.

2. The combination according to claim **1**, wherein said first operational amplifier is a unity gain phase inverter.

3. The combination according to claim **1**, wherein the multiplicative voltage factors of said multipliers are the same.

4. The combination according to claim **1**, wherein said multiplicative voltage factors are dc voltages.

5. The combination according to claim **1**, wherein said means for feeding back output from said second and third operational amplifiers to an input of said first operational amplifier include negative feedback loops.

6. The combination according to claim **5**, wherein said operational amplifiers have transfer functions such that said filter has selectively high pass, low pass and band pass characteristics variable as a function of said multiplicative voltages in respect to cut-offs or center frequency.

7. The combination according to claim **5**, wherein each of said operational amplifiers includes a non-phase inverting and a phase inverting input terminal, and wherein the output of each of said amplifiers is proportional to the differences of the voltages applied to said terminals.

8. The combination according to claim **7**, wherein said first operational amplifier includes a positive and a negative input terminal, said first input being a negative input terminal, and wherein said second and third operational amplifiers each includes one grounded terminal.

9. An audio frequency amplifier, comprising an audio signal input terminal, a first different operational amplifier having resistive feedback and having a first and a second input terminal, means connecting said signal input terminal to said first input terminal, a first multiplier connected in cascade with the output terminal of said first differential operational amplifier, a second operational amplifier having a further input terminal connected to the output of said first multiplier, said second operational amplifier having a capacitive feedback, means deriving a voltage from the output of said second operational amplifier, means applying a variable fraction of said voltage to said second input terminal, a second multiplier connected in cascade with said second operational amplifier, a third operational amplifier connected in cascade with said second multiplier, said third operational amplifier having an output terminal, a negative feedback circuit connected from said last mentioned output terminal to said first input terminal, means for at will deriving output signal from any one or more of said operational amplifiers, a source of dc control voltage, and means applying said dc control voltage to both said multipliers as multiplicative factors.

10. The combination according to claim **9**, wherein said audio signal input is a tone signal and wherein said source of dc control voltage is a dc voltage representative of the pitch of said tone signal.

11. The combination according to claim **9**, wherein said audio signal input is a tone signal, and wherein said source of dc control voltage is representative of amplitude of said tone signal.

12. The combination according to claim **9**, wherein said audio signal input is a tone signal and wherein said dc control voltage is representative of a tonal characteristic of said tone signal.

* * * * *