




(86) **Date de dépôt PCT/PCT Filing Date:** 2011/08/10
 (87) **Date publication PCT/PCT Publication Date:** 2012/02/16
 (45) **Date de délivrance/Issue Date:** 2017/03/07
 (85) **Entrée phase nationale/National Entry:** 2013/01/21
 (86) **N° demande PCT/PCT Application No.:** US 2011/047256
 (87) **N° publication PCT/PCT Publication No.:** 2012/021624
 (30) **Priorités/Priorities:** 2010/08/11 (US61/372,790);
 2010/09/22 (US61/385,390); 2010/10/06 (US61/390,543);
 2010/10/26 (US61/406,903); 2010/12/03 (US61/419,652);
 2011/08/09 (US13/206,343)

(51) **Cl.Int./Int.Cl. H04L 27/26** (2006.01)
 (72) **Inventeurs/Inventors:**
 YANG, LIN, US;
 JONES, VINCENT KNOWLES, IV, US;
 VAN ZELST, ALBERT, US;
 SAMPATH, HEMANTH, US;
 VAN NEE, DIDIER JOHANNES RICHARD, NL
 (73) **Propriétaire/Owner:**
 QUALCOMM INCORPORATED, US
 (74) **Agent:** SMART & BIGGAR

(54) **Titre : CONSTRUCTION DE CHAMPS DE SIGNAUX A TRES HAUT DEBIT (VHT-SIG) DANS LE BUT DE REDUIRE UN FACTEUR DE CRETE MAXIMUM (PAPR, PEAK-TO-AVERAGE POWER RATIO)**
 (54) **Title: CONSTRUCTING VERY HIGH THROUGHPUT SIGNAL (VHT-SIG) FIELDS FOR REDUCED PEAK-TO-AVERAGE POWER RATIO (PAPR)**

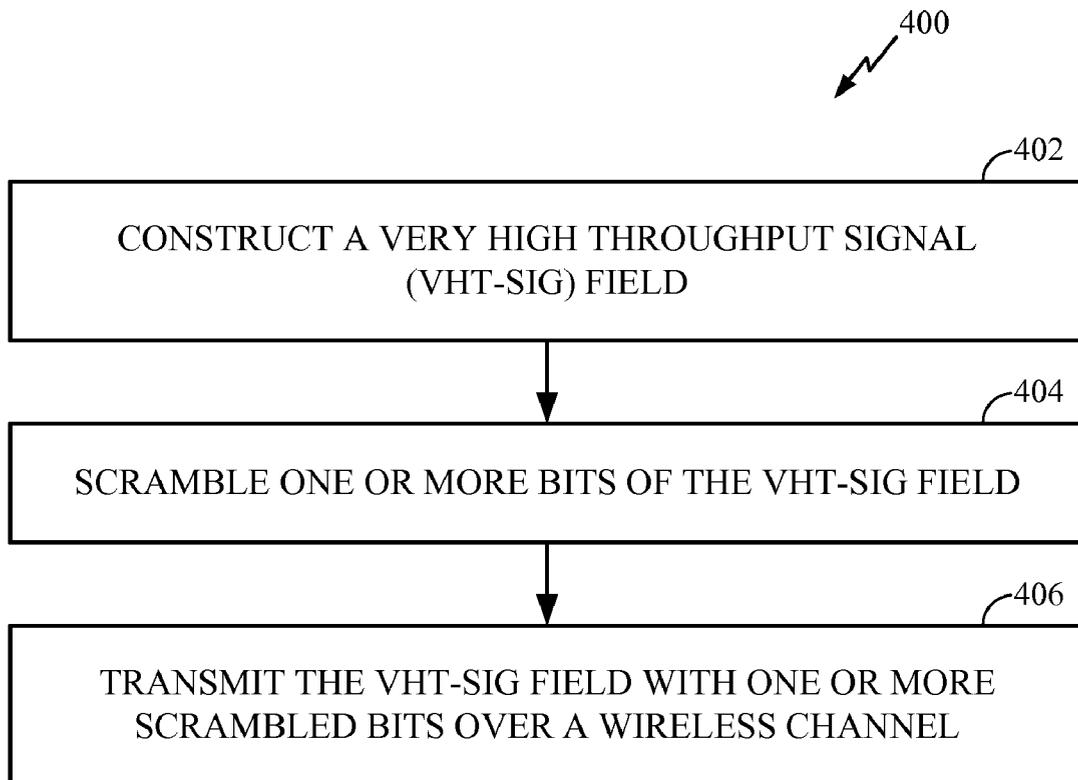

(57) **Abrégé/Abstract:**

Certain aspects of the present disclosure relate to techniques for scrambling VHT-SIG field of a transmission preamble in a manner that may reduce peak-to-average power ratio (PAPR).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 February 2012 (16.02.2012)

(10) International Publication Number
WO 2012/021624 A1

- (51) International Patent Classification:
H04L 27/26 (2006.01)
- (21) International Application Number:
PCT/US2011/047256
- (22) International Filing Date:
10 August 2011 (10.08.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:

61/372,790	11 August 2010 (11.08.2010)	US
61/385,390	22 September 2010 (22.09.2010)	US
61/390,543	6 October 2010 (06.10.2010)	US
61/406,903	26 October 2010 (26.10.2010)	US
61/419,652	3 December 2010 (03.12.2010)	US
13/206,343	9 August 2011 (09.08.2011)	US
- (71) Applicant (for all designated States except US): **QUALCOMM INCORPORATED** [US/US]; 5775 Morehouse Drive, San Diego, California 92121 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **YANG, Lin** [CN/US]; 5775 Morehouse Drive, San Diego, California 92121 (US). **JONES, Vincent K., IV** [US/US]; 3105 Kifer Road, Santa Clara, California 95051 (US). **VAN ZELST, Albert** [NL/US]; 5775 Morehouse Drive, San

Diego, California 92121 (US). **SAMPATH, Hemanth** [US/US]; 5775 Morehouse Drive, San Diego, California 92121 (US). **VAN NEE, Johannes Richard Didier** [NL/NL]; Straatweg 66-S, NL-3621 Breukelen (NL).

- (74) Agents: **READ, Randol W.** et al.; 3040 Post Oak Boulevard, Suite 1500, Houston, Texas 77056 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: CONSTRUCTING VERY HIGH THROUGHPUT SIGNAL (VHT-SIG) FIELDS FOR REDUCED PEAK-TO-AVERAGE POWER RATIO (PAPR)

(57) Abstract: Certain aspects of the present disclosure relate to techniques for scrambling VHT-SIG field of a transmission preamble in a manner that may reduce peak-to-average power ratio (PAPR).

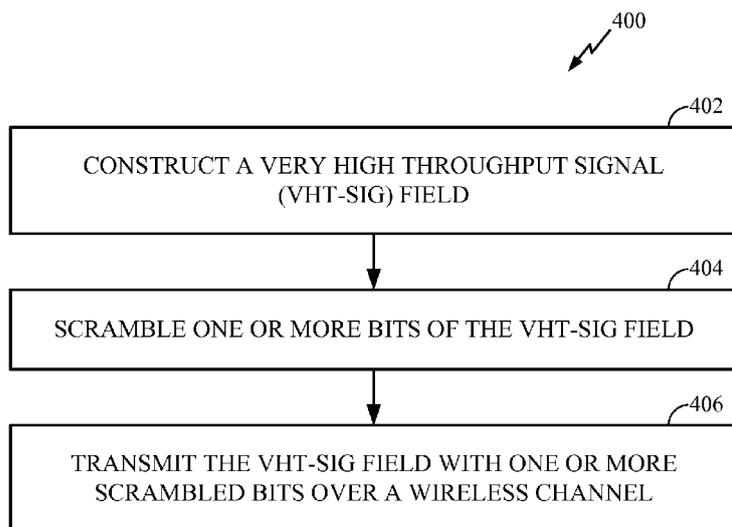


FIG. 4

WO 2012/021624 A1

WO 2012/021624 A1 

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

55162-1

1

**CONSTRUCTING VERY HIGH THROUGHPUT SIGNAL (VHT-SIG) FIELDS
FOR REDUCED PEAK-TO-AVERAGE POWER RATIO (PAPR)**

Related Applications

[0001] The present Application for Patent is related to U.S. Provisional Patent
5 Application Serial No. 61/372,790, filed August 11, 2010, U.S. Provisional Patent Application
Serial No. 61/385,390, filed September 22, 2010, U.S. Provisional Patent Application Serial
No. 61/390,543, filed October 6, 2010, U.S. Provisional Patent Application Serial No.
61/406,903, filed October 26, 2010, and U.S. Provisional Patent Application Serial No.
61/419,652, filed December 3, 2010.

10

BACKGROUND

Field

[0002] Certain aspects of the present disclosure generally relate to wireless
communications and, more particularly, to construction of a signal field within a transmission
preamble that may help reduce peak-to-average power ratio (PAPR) of the transmission.

15 **Background**

[0003] The Institute of Electrical and Electronics Engineers (IEEE) 802.11 Wide
Local Area Network (WLAN) standards body established specifications for transmissions
based on the very high throughput (VHT) approach using a carrier frequency of 5 GHz (i.e.,
the IEEE 802.11ac specification), or using a carrier frequency of 60 GHz (i.e., the IEEE
20 802.11ad specification) targeting aggregate throughputs larger than 1 Gigabits per second.
One of the enabling technologies for the VHT 5GHz specification is a wider channel
bandwidth, which bonds two 40MHz channels for 80MHz bandwidth therefore doubling the
physical layer (PHY) data rate with negligible increase in cost compared to the IEEE 802.11n
standard.

[0004] A VHT Signal (VHT-SIG) field is a part of a transmission preamble, and can be utilized to indicate various features of corresponding transmissions.

SUMMARY

[0005] Certain aspects of the present disclosure provide a method for wireless communications. The method generally includes constructing a very high throughput signal (VHT-SIG) field, scrambling one or more bits of the VHT-SIG field, and transmitting the VHT-SIG field with one or more scrambled bits over a wireless channel.

[0006] Certain aspects of the present disclosure provide an apparatus for wireless communications. The apparatus generally includes means for constructing a very high throughput signal (VHT-SIG) field, means for scrambling one or more bits of the VHT-SIG field, and means for transmitting the VHT-SIG field with one or more scrambled bits over a wireless channel.

[0007] Certain aspects of the present disclosure provide an apparatus for wireless communications. The apparatus generally includes a circuit configured to construct a very high throughput signal (VHT-SIG) field, an encoder configured to scramble one or more bits of the VHT-SIG field, and a transmitter configured to transmit the VHT-SIG field with one or more scrambled bits over a wireless channel.

[0008] Certain aspects of the present disclosure provide a computer readable medium containing executable instructions for wireless communications. The executable instructions generally include instructions for constructing a very high throughput signal (VHT-SIG) field, scrambling one or more bits of the VHT-SIG field, and transmitting the VHT-SIG field with one or more scrambled bits over a wireless channel by utilizing a bandwidth of a first size.

[0009] Certain aspects of the present disclosure provide an access point. The access point generally includes at least one antenna, a circuit configured to construct a very high throughput signal (VHT-SIG) field, an encoder configured to scramble one or more bits of the VHT-SIG field, and a transmitter configured to transmit via the at least one antenna the VHT-SIG field with one or more scrambled bits over a wireless channel.

[0010] Certain aspects of the present disclosure provide a method for wireless communications. The method generally includes receiving, over a wireless channel, a transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission and de-scrambling the one or more scrambled bits of the VHT-SIG field.

[0011] Certain aspects of the present disclosure provide an apparatus for wireless communications. The apparatus generally includes means for receiving, over a wireless channel, a transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission and means for de-scrambling the one or more scrambled bits of the VHT-SIG field.

[0012] Certain aspects of the present disclosure provide an apparatus for wireless communications. The apparatus generally includes a receiver configured to receive, over a wireless channel, a transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission, and a decoder configured to de-scramble the one or more scrambled bits of the VHT-SIG field scramble one or more bits of the VHT-SIG field.

[0013] Certain aspects of the present disclosure provide a computer readable medium containing executable instructions for wireless communications. The executable instructions generally include instructions for receiving, over a wireless channel, a transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission and de-scrambling the one or more scrambled bits of the VHT-SIG field.

[0014] Certain aspects of the present disclosure provide an access terminal. The access terminal generally includes at least one antenna, a receiver configured to receive, over a wireless channel via the at least one antenna, a transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission, and a decoder configured to de-scramble the one or more scrambled bits of the VHT-SIG field scramble one or more bits of the VHT-SIG field.

55162-1

3a

- [0014a]** Certain aspects of the present disclosure provide a method for wireless communications, comprising: constructing a very high throughput signal (VHT-SIG) field; scrambling one or more bits of the VHT-SIG field, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the VHT-SIG field, wherein the scrambling
5 comprises: re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the VHT-SIG field; and transmitting the VHT-SIG field with one or more scrambled bits over a wireless channel.
- [0014b]** Certain aspects of the present disclosure provide an apparatus for wireless communications, comprising: means for constructing a very high throughput signal (VHT-SIG) field; means for scrambling one or more bits of the VHT-SIG field, wherein the means for scrambling is designed to reduce peak-to-average power ratio (PAPR) of the VHT-SIG field, wherein the means for scrambling comprises: means for re-locating, within the VHT-
15 SIG field, one or more reserved bits of the one or more bits; and means for performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits; means for determining the sequence of bits in an effort to reduce PAPR of the VHT-SIG field; and means for transmitting the VHT-SIG field with one or more scrambled bits over a wireless channel.
- [0014c]** Certain aspects of the present disclosure provide an apparatus for wireless communications, comprising: a circuit configured to construct a very high throughput signal (VHT-SIG) field; an encoder configured to scramble one or more bits of the VHT-SIG field, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the VHT-SIG field, wherein the encoder is further configured to scramble by re-locating, within
25 the VHT-SIG field, one or more reserved bits of the one or more bits, and performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the VHT-SIG field; and a

55162-1

3b

transmitter configured to transmit the VHT-SIG field with one or more scrambled bits over a wireless channel.

[0014d] Certain aspects of the present disclosure provide a non-transitory computer readable medium containing executable instructions for wireless communications, the
5 executable instructions comprising instructions for: constructing a very high throughput signal (VHT-SIG) field; scrambling one or more bits of the VHT-SIG field, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the VHT-SIG field, wherein the instructions for scrambling further comprises instructions for: re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and performing binary operation
10 between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the VHT-SIG field; and transmitting the VHT-SIG field with one or more scrambled bits over a wireless channel by utilizing a bandwidth of a first size.

[0014e] Certain aspects of the present disclosure provide an access point, comprising:
15 at least one antenna; a circuit configured to construct a very high throughput signal (VHT-SIG) field; an encoder configured to scramble one or more bits of the VHT-SIG field, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the VHT-SIG field, wherein the encoder is further configured to scramble by: re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and performing binary operation
20 between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the VHT-SIG field; and a transmitter configured to transmit via the at least one antenna the VHT-SIG field with one or more scrambled bits over a wireless channel.

[0014f] Certain aspects of the present disclosure provide a method for wireless
25 communications, comprising: receiving, over a wireless channel, a transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the transmitted VHT-SIG field, and wherein the scrambling comprises: re-

55162-1

3c

locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the transmitted VHT-SIG field; and de-scrambling the one or more scrambled bits of the

5 VHT-SIG field.

[0014g] Certain aspects of the present disclosure provide an apparatus for wireless communications, comprising: means for receiving, over a wireless channel, a transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission, wherein the scrambling is designed to reduce peak-to-

10 average power ratio (PAPR) of the transmitted VHT-SIG field, and wherein the scrambling comprises: re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the transmitted VHT-SIG field; and means for de-scrambling the one or more

15 scrambled bits of the VHT-SIG field.

[0014h] Certain aspects of the present disclosure provide an apparatus for wireless communications, comprising: a receiver configured to receive, over a wireless channel, a transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission, wherein the scrambling is designed to reduce

20 peak-to-average power ratio (PAPR) of the transmitted VHT-SIG field, and wherein the scrambling comprises: re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the transmitted VHT-SIG field; and a decoder configured to de-scramble the

25 one or more scrambled bits of the VHT-SIG field.

[0014i] Certain aspects of the present disclosure provide a non-transitory computer readable medium containing executable instructions for wireless communications, the executable instructions comprising instructions for: receiving, over a wireless channel, a

55162-1

3d

transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the transmitted VHT-SIG field, and wherein the scrambling comprises: re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the transmitted VHT-SIG field; and de-scrambling the one or more scrambled bits of the VHT-SIG field.

[0014j] Certain aspects of the present disclosure provide an access terminal, comprising: at least one antenna; a receiver configured to receive, over a wireless channel via the at least one antenna, a transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the transmitted VHT-SIG field, and wherein the scrambling comprises: re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the transmitted VHT-SIG field; and a decoder configured to de-scramble the one or more scrambled bits of the VHT-SIG field.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] So that the manner in which the above-recited features of the present disclosure can be understood in detail, a more particular description, briefly summarized above, may be had by reference to aspects, some of which are illustrated in the appended drawings. It is to be noted, however, that the appended drawings illustrate only certain typical aspects of this disclosure and are therefore not to be considered limiting of its scope, for the description may admit to other equally effective aspects.

[0016] FIG. 1 illustrates a diagram of a wireless communications network in accordance with certain aspects of the present disclosure.

[0017] FIG. 2 illustrates a block diagram of an example of signal processing functions of a physical layer (PHY) of a wireless node in the wireless communications network of FIG.1 in accordance with certain aspects of the present disclosure.

[0018] FIG. 3 illustrates a block diagram of an exemplary hardware configuration for a processing system in a wireless node in the wireless communications network of FIG.1 in accordance with certain aspects of the present disclosure.

[0019] FIG. 4 illustrates example operations for constructing and transmitting a very high throughput signal (VHT-SIG) field in accordance with certain aspects of the present disclosure.

[0020] FIG. 4A illustrates example components capable of performing the operations illustrated in FIG. 4.

[0021] FIG. 5 illustrates example operations for receiving and processing a very high throughput signal (VHT-SIG) field in accordance with certain aspects of the present disclosure.

[0022] FIG. 5A illustrates example components capable of performing the operations illustrated in FIG. 5.

[0023] FIG. 6 illustrates example VHT-SIG field values in accordance with certain aspects of the present disclosure.

[0024] FIG. 7 illustrates a table of example peak-to-average power ratio (PAPR) results for different packet types in accordance with certain aspects of the present disclosure.

[0025] FIG. 8 illustrates example PAPR results for data in accordance with certain aspects of the present disclosure.

[0026] FIGS. 9-11 illustrate example PAPR results for different Association Identifier (AID) sequences in the VHT-SIG field in accordance with certain aspects of the present disclosure.

[0027] FIGS. 12A-12E illustrate example PAPR results for different AID sequences in the VHT-SIG field transmitted from a user station to an access point in accordance with certain aspects of the present disclosure.

[0028] FIGS. 13A-13E illustrate example worst case PAPR results for different AID sequences in the VHT-SIG field in accordance with certain aspects of the present disclosure.

[0029] FIGS. 14A-14B illustrate example PAPR results of VHT-SIGA1 and VHT-SIGA2 fields in accordance with certain aspects of the present disclosure.

[0030] FIGS. 15A-15B illustrate example PAPR results of VHT-SIGA when most fields of the VHT-SIGA are zeros in accordance with certain aspects of the present disclosure.

[0031] FIGS. 16A-16B illustrate example PAPR results of VHT-SIGB when most fields of the VHT-SIGB are zeros in accordance with certain aspects of the present disclosure.

[0032] FIGS. 17A-17B illustrate example PAPR results of the VHT-SIG field when the VHT-SIG comprises all ones in accordance with certain aspects of the present disclosure.

[0033] FIGS. 18A-18D illustrate example PAPR results of VHT-SIGA1 and VHT-SIGA2 fields in accordance with certain aspects of the present disclosure.

55162-1

6

[0034] FIGS. 19A-19B illustrate example PAPR results of VHT-SIGA1 and VHT-SIGA2 fields in accordance with certain aspects of the present disclosure for Single-User (SU) communication in accordance with certain aspects of the present disclosure.

DETAILED DESCRIPTION

5 [0035] Various aspects of the disclosure are described more fully hereinafter with reference to the accompany drawings. This disclosure may, however, be embodied in many different forms and should not be construed as limited to any specific structure or function presented throughout this disclosure. Rather, these aspects are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the disclosure to those
10 skilled in the art. Based on the teachings herein one skilled in the art should appreciate that the scope of the disclosure is intended to cover any aspect of the disclosure disclosed herein, whether implemented independently of or combined with any other aspect of the disclosure. For example, an apparatus may be implemented or a method may be practiced using any number of the aspects set forth herein. In addition, the scope of the disclosure is intended to
15 cover such an apparatus or method which is practiced using other structure, functionality, or structure and functionality in addition to or other than the various aspects of the disclosure set forth herein. It should be understood that any aspect of the disclosure disclosed herein may be embodied by one or more elements of a claim.

[0036] The word “exemplary” is used herein to mean “serving as an example,
20 instance, or illustration.” Any aspect described herein as “exemplary” is not necessarily to be construed as preferred or advantageous over other aspects.

[0037] Although particular aspects are described herein, many variations and permutations of these aspects fall within the scope of the disclosure. Although some benefits and advantages of the preferred aspects are mentioned, the scope of the disclosure is not
25 intended to be limited to particular benefits, uses, or objectives. Rather, aspects of the disclosure are intended to be broadly applicable to different wireless technologies, system

55162-1

7

configurations, networks, and transmission protocols, some of which are illustrated by way of example in the figures and in the following description of the preferred aspects. The scope of the disclosure is defined by the appended claims and equivalents thereof.

AN EXAMPLE WIRELESS COMMUNICATION SYSTEM

5 [0038] The techniques described herein may be used for various broadband wireless communication systems, including communication systems that are based on an orthogonal multiplexing scheme. Examples of such communication systems include Spatial Division Multiple Access (SDMA), Time Division Multiple Access (TDMA), Orthogonal Frequency Division Multiple Access (OFDMA) systems, Single-Carrier Frequency Division Multiple
10 Access (SC-FDMA) systems, and so forth. An SDMA system may utilize sufficiently different directions to simultaneously transmit data belonging to multiple user terminals. A TDMA system may allow multiple user terminals to share the same frequency channel by dividing the transmission signal into different time slots, each time slot being assigned to different user terminal. A TDMA system may implement GSM or some other standards known in the art. An
15 OFDMA system utilizes orthogonal frequency division multiplexing (OFDM), which is a modulation technique that partitions the overall system bandwidth into multiple orthogonal sub-carriers. These sub-carriers may also be called tones, bins, etc. With OFDM, each sub-carrier may be independently modulated with data. An OFDM system may implement IEEE 802.11 or some other standards known in the art. An SC-FDMA system may utilize interleaved FDMA
20 (IFDMA) to transmit on sub-carriers that are distributed across the system bandwidth, localized FDMA (LFDMA) to transmit on a block of adjacent sub-carriers, or enhanced FDMA (EFDMA) to transmit on multiple blocks of adjacent sub-carriers. In general, modulation symbols are sent in the frequency domain with OFDM and in the time domain with SC-FDMA. A SC-FDMA system may implement 3GPP-LTE (3rd Generation Partnership Project Long
25 Term Evolution) or some other standards known in the art.

55162-1

7a

[0039] The teachings herein may be incorporated into (e.g., implemented within or performed by) a variety of wired or wireless apparatuses (e.g., nodes). In some aspects a node comprises a wireless node. Such wireless node may provide, for example, connectivity for or to a network (e.g., a wide area network such as the Internet or a cellular network) via a wired or
5 wireless communication link. In some aspects, a

wireless node implemented in accordance with the teachings herein may comprise an access point or an access terminal.

[0040] An access point (“AP”) may comprise, be implemented as, or known as NodeB, Radio Network Controller (“RNC”), eNodeB, Base Station Controller (“BSC”), Base Transceiver Station (“BTS”), Base Station (“BS”), Transceiver Function (“TF”), Radio Router, Radio Transceiver, Basic Service Set (“BSS”), Extended Service Set (“ESS”), Radio Base Station (“RBS”), or some other terminology. In some implementations an access point may comprise a set top box kiosk, a media center, or any other suitable device that is configured to communicate via a wireless or wired medium. According to certain aspects of the present disclosure, the access point may operate in accordance with the Institute of Electrical and Electronics Engineers (IEEE) 802.11 family of wireless communications standards.

[0041] An access terminal (“AT”) may comprise, be implemented as, or known as an access terminal, a subscriber station, a subscriber unit, a mobile station, a remote station, a remote terminal, a user terminal, a user agent, a user device, user equipment, a user station, or some other terminology. In some implementations an access terminal may comprise a cellular telephone, a cordless telephone, a Session Initiation Protocol (“SIP”) phone, a wireless local loop (“WLL”) station, a personal digital assistant (“PDA”), a handheld device having wireless connection capability, a Station (“STA”), or some other suitable processing device connected to a wireless modem. Accordingly, one or more aspects taught herein may be incorporated into a phone (e.g., a cellular phone or smart phone), a computer (e.g., a laptop), a portable communication device, a portable computing device (e.g., a personal data assistant), a tablet, an entertainment device (e.g., a music or video device, or a satellite radio), a television display, a flip-cam, a security video camera, a digital video recorder (DVR), a global positioning system device, or any other suitable device that is configured to communicate via a wireless or wired medium. According to certain aspects of the present disclosure, the access terminal may operate in accordance with the IEEE 802.11 family of wireless communications standards.

[0042] Several aspects of a wireless network will now be presented with reference to FIG.1. The wireless network 100 is shown with several wireless nodes, generally designated as nodes 110 and 120. Each wireless node is capable of receiving and/or

transmitting. In the discussion that follows, the term “receiving node” may be used to refer to a node that is receiving and the term “transmitting node” may be used to refer to a node that is transmitting. Such a reference does not imply that the node is incapable of performing both transmit and receive operations.

[0043] In the detailed description that follows, the term “access point” is used to designate a transmitting node and the term “access terminal” is used to designate a receiving node for downlink communications, whereas the term “access point” is used to designate a receiving node and the term “access terminal” is used to designate a transmitting node for uplink communications. However, those skilled in the art will readily understand that other terminology or nomenclature may be used for an access point and/or access terminal. By way of example, an access point may be referred to as a base station, a base transceiver station, a station, a terminal, a node, an access terminal acting as an access point, or some other suitable terminology. An access terminal may be referred to as a user terminal, a mobile station, a subscriber station, a station, a wireless device, a terminal, a node or some other suitable terminology. The various concepts described throughout this disclosure are intended to apply to all suitable wireless nodes regardless of their specific nomenclature.

[0044] The wireless network 100 may support any number of access points distributed throughout a geographic region to provide coverage for access terminals 120. A system controller 130 may be used to provide coordination and control of the access points, as well as access to other networks (e.g., Internet) for the access terminals 120. For simplicity, one access point 110 is shown. An access point is generally a fixed terminal that provides backhaul services to access terminals in the geographic region of coverage; however, the access point may be mobile in some applications. An access terminal, which may be fixed or mobile, utilizes the backhaul services of an access point or engages in peer-to-peer communications with other access terminals. Examples of access terminals include a telephone (e.g., cellular telephone), a laptop computer, a desktop computer, a Personal Digital Assistant (PDA), a digital audio player (e.g., MP3 player), a camera, a game console or any other suitable wireless node.

[0045] One or more access terminals 120 may be equipped with multiple antennas to enable certain functionality. With this configuration, multiple antennas at the access point 110 may be used to communicate with a multiple antenna access terminal to

improve data throughput without additional bandwidth or transmit power. This may be achieved by splitting a high data rate signal at the transmitter into multiple lower rate data streams with different spatial signatures, thus enabling the receiver to separate these streams into multiple channels and properly combine the streams to recover the high rate data signal.

[0046] While portions of the following disclosure will describe access terminals that also support multiple-input multiple-output (MIMO) technology, the access point 110 may also be configured to support access terminals that do not support MIMO technology. This approach may allow older versions of access terminals (i.e., “legacy” terminals) to remain deployed in a wireless network, extending their useful lifetime, while allowing newer MIMO access terminals to be introduced as appropriate.

[0047] In the detailed description that follows, various aspects of the invention will be described with reference to a MIMO system supporting any suitable wireless technology, such as Orthogonal Frequency Division Multiplexing (OFDM). OFDM is a technique that distributes data over a number of subcarriers spaced apart at precise frequencies. The spacing provides “orthogonality” that enables a receiver to recover the data from the subcarriers. An OFDM system may implement IEEE 802.11, or some other air interface standard. Other suitable wireless technologies include, by way of example, Code Division Multiple Access (CDMA), Time Division Multiple Access (TDMA), or any other suitable wireless technology, or any combination of suitable wireless technologies. A CDMA system may implement with IS-2000, IS-95, IS-856, Wideband-CDMA (WCDMA) or some other suitable air interface standard. A TDMA system may implement Global System for Mobile Communications (GSM) or some other suitable air interface standard. As those skilled in the art will readily appreciate, the various aspects of this invention are not limited to any particular wireless technology and/or air interface standard.

[0048] In an aspect of the present disclosure, a training sequence may be constructed at the access point 110. The construction of training sequence may provide a desired level of peak-to-average power ratio (PAPR) when the training sequence is being transmitted within a preamble of a frame to user terminals 120. In another aspect, a training sequence may be constructed at the user terminal 120 such that the PAPR of

training sequence transmitted within a preamble to the access point 110 may be at a desired level.

[0049] FIG. 2 illustrates a conceptual block diagram illustrating an example of the signal processing functions of the Physical (PHY) layer. In a transmit mode, a TX data processor 202 may be used to receive data from the Media Access Control (MAC) layer and encode (e.g., Turbo code) the data to facilitate forward error correction (FEC) at the receiving node. The encoding process results in a sequence of code symbols that that may be blocked together and mapped to a signal constellation by the TX data processor 202 to produce a sequence of modulation symbols.

[0050] In wireless nodes implementing OFDM, the modulation symbols from the TX data processor 202 may be provided to an OFDM modulator 204. The OFDM modulator splits the modulation symbols into parallel streams. Each stream is then mapped to an OFDM subcarrier and then combined together using an Inverse Fast Fourier Transform (IFFT) to produce a time domain OFDM stream.

[0051] A TX spatial processor 206 performs spatial processing on the OFDM stream. This may be accomplished by spatially precoding each OFDM and then providing each spatially precoded stream to a different antenna 208 via a transceiver 206. Each transmitter 206 modulates an RF carrier with a respective precoded stream for transmission over the wireless channel.

[0052] In a receive mode, each transceiver 206 receives a signal through its respective antenna 208. Each transceiver 206 may be used to recover the information modulated onto an RF carrier and provide the information to a RX spatial processor 210.

[0053] The RX spatial processor 210 performs spatial processing on the information to recover any spatial streams destined for the wireless node 200. The spatial processing may be performed in accordance with Channel Correlation Matrix Inversion (CCMI), Minimum Mean Square Error (MMSE), Soft Interference Cancellation (SIC) or some other suitable technique. If multiple spatial streams are destined for the wireless node 200, they may be combined by the RX spatial processor 210.

[0054] In wireless nodes implementing OFDM, the stream (or combined stream) from the RX spatial processor 210 is provided to an OFDM demodulator 212. The OFDM demodulator 212 converts the stream (or combined stream) from time-domain to the frequency domain using a Fast Fourier Transform (FFT). The frequency domain signal comprises a separate stream for each subcarrier of the OFDM signal. The OFDM demodulator 212 recovers the data (i.e., modulation symbols) carried on each subcarrier and multiplexes the data into a stream of modulation symbols.

[0055] A RX data processor 214 may be used to translate the modulation symbols back to the correct point in the signal constellation. Because of noise and other disturbances in the wireless channel, the modulation symbols may not correspond to an exact location of a point in the original signal constellation. The RX data processor 214 detects which modulation symbol was most likely transmitted by finding the smallest distance between the received point and the location of a valid symbol in the signal constellation. These soft decisions may be used, in the case of Turbo codes, for example, to compute a Log-Likelihood Ratio (LLR) of the code symbols associated with the given modulation symbols. The RX data processor 214 then uses the sequence of code symbol LLRs in order to decode the data that was originally transmitted before providing the data to the MAC layer.

[0056] In an aspect of the present disclosure, the TX data processor 202 of the wireless node 200 may be configured to construct a training sequence. The construction of training sequence may be such that to provide a desired level of PAPR when the training sequence is being transmitted within a preamble of a frame to other wireless nodes (not shown in FIG. 2).

[0057] FIG. 3 illustrates a conceptual diagram illustrating an example of a hardware configuration for a processing system in a wireless node. In this example, the processing system 300 may be implemented with a bus architecture represented generally by bus 302. The bus 302 may include any number of interconnecting buses and bridges depending on the specific application of the processing system 300 and the overall design constraints. The bus links together various circuits including a processor 304, machine-readable media 306 and a bus interface 308. The bus interface 308 may be used to connect a network adapter 310, among other things, to the processing system 300 via the bus 302. The network adapter 310 may be used to implement the signal

processing functions of the PHY layer. In the case of an access terminal 110 (see FIG. 1), a user interface 312 (e.g., keypad, display, mouse, joystick, etc.) may also be connected to the bus. The bus 302 may also link various other circuits such as timing sources, peripherals, voltage regulators, power management circuits, and the like, which are well known in the art, and therefore, will not be described any further.

[0058] The processor 304 is responsible for managing the bus and general processing, including the execution of software stored on the machine-readable media 306. The processor 304 may be implemented with one or more general-purpose and/or special-purpose processors. Examples include microprocessors, microcontrollers, DSP processors and other circuitry that can execute software. Software shall be construed broadly to mean instructions, data or any combination thereof, whether referred to as software, firmware, middleware, microcode, hardware description language, or otherwise. Machine-readable media may include, by way of example, RAM (Random Access Memory), flash memory, ROM (Read Only Memory), PROM (Programmable Read-Only Memory), EPROM (Erasable Programmable Read-Only Memory), EEPROM (Electrically Erasable Programmable Read-Only Memory), registers, magnetic disks, optical disks, hard drives, or any other suitable storage medium, or any combination thereof. The machine-readable media may be embodied in a computer-program product. The computer-program product may comprise packaging materials.

[0059] In the hardware implementation illustrated in FIG. 3, the machine-readable media 306 is shown as part of the processing system 300 separate from the processor 304. However, as those skilled in the art will readily appreciate, the machine-readable media 306, or any portion thereof, may be external to the processing system 300. By way of example, the machine-readable media 306 may include a transmission line, a carrier wave modulated by data, and/or a computer product separate from the wireless node, all which may be accessed by the processor 304 through the bus interface 308. Alternatively, or in addition to, the machine readable media 306, or any portion thereof, may be integrated into the processor 304, such as the case may be with cache and/or general register files.

[0060] The processing system 300 may be configured as a general-purpose processing system with one or more microprocessors providing the processor functionality and external memory providing at least a portion of the machine-readable

media 306, all linked together with other supporting circuitry through an external bus architecture. Alternatively, the processing system 300 may be implemented with an ASIC (Application Specific Integrated Circuit) with the processor 304, the bus interface 308, the user interface 312 in the case of an access terminal), supporting circuitry (not shown), and at least a portion of the machine-readable media 306 integrated into a single chip, or with one or more FPGAs (Field Programmable Gate Array), PLDs (Programmable Logic Device), controllers, state machines, gated logic, discrete hardware components, or any other suitable circuitry, or any combination of circuits that can perform the various functionality described throughout this disclosure. Those skilled in the art will recognize how best to implement the described functionality for the processing system 300 depending on the particular application and the overall design constraints imposed on the overall system.

[0061] The wireless network 100 from FIG. 1 may represent the IEEE 802.11 Wide Local Area Network (WLAN) utilizing the very high throughput (VHT) protocol for signal transmissions with a carrier frequency of 5 GHz (i.e., IEEE 802.11ac) or with a carrier frequency of 60 GHz (i.e., IEEE 802.11ad) targeting aggregate throughputs larger than 1 Gigabits per second. The VHT 5GHz specification may utilize a wider channel bandwidth, which may comprise two 40MHz channels to achieve 80MHz bandwidth therefore doubling the PHY data rate with negligible increase in cost compared to IEEE 802.11n.

[0062] Certain aspects of the present disclosure support constructing a training sequence within a preamble for the VHT-based transmissions that may provide a lower peak-to-average power ratio (PAPR) than the training sequences utilized in the art. In an aspect of the present disclosure, the training sequence may be constructed by the processor 304 of the processing system 300 from FIG. 3.

CONSTRUCTING VHT-SIG FIELDS FOR REDUCED PAPR

[0063] A Very High Throughput Signal (VHT-SIG) field may be used to convey various features of a corresponding transmission. According to certain aspects, a preamble may comprise different types of VHT-SIG fields, which may be contained in different portions of a preamble. As an example, a preamble may comprise a VHT-SIGA field (Very High Throughput Signal field type A) in a “legacy” portion of a

preamble (e.g., in accordance with one or more earlier versions of a standard) and a VHT-SIGB field (Very High Throughput Signal field type B) in a “non-legacy” portion of a preamble (e.g., that may be precoded in accordance with one or more later versions of a standard).

[0064] According to certain aspects, a SIGA1 sub-field of the VHT-SIGA field may comprise almost all “zeros” for a practical packet (as illustrated in FIG. 6). In such cases, the encoded bit stream may comprise mostly zeros. In some cases, this may result in high level of Peak-to-average power ratio (PAPR). According to certain aspects, in such cases, portions of the VHT-SIG field may be scrambled in a manner that may help reduce PAPR.

[0065] FIG. 4 illustrates example operations 400 for constructing and transmitting a VHT-SIG field of a preamble in accordance with certain aspects of the present disclosure. The operations may be performed, for example, at any transmitting device. According to certain aspects, the operations may be performed when an expected PAPR of transmitting the VHT-SIG field is above a certain threshold.

[0066] The operations 400 begin, at 402, by constructing a VHT-SIG field. At 404, one or more bits of the VHT-SIG field may be scrambled. At 406, the VHT-SIG field with one or more scrambled bits may be transmitted over a wireless channel.

[0067] FIG. 5 illustrates example operations 500 for receiving and processing a VHT-SIG field of a preamble in accordance with certain aspects of the present disclosure. The operations may be performed, for example, at any device receiving a VHT-SIG field transmitted in accordance with the operations 400 described above.

[0068] The operations 500 begin, at 502, by receiving, over a wireless channel, a transmission containing a VHT-SIG field with one or more bits altered via scrambling prior to transmission. At 504, the one or more scrambled bits of the VHT-SIG field may be de-scrambled.

[0069] FIG. 6 illustrates example VHT-SIG field values in accordance with certain aspects of the present disclosure. As illustrated, a majority of the bits may have a zero value. However, transmitting an encoded bit stream with almost all zeros may result into a high level of PAPR. FIG. 7 illustrates a table of example PAPR results for

different packet types in accordance with certain aspects of the present disclosure. As illustrated, the PAPR results are provided for two cases: the case 702 when all sub-fields in the SIG fields have zero values, and the Case 704 with ones in many places of the SIG fields while still forming a meaningful packet. As illustrated, PAPR may be reduced by scrambling one or more bits of SIG fields.

[0070] Scrambling of one or more bits in a VHT-SIG field (e.g., a SIGA and/or SIGB field) may help reduce PAPR and may be performed in various manners.

[0071] As an example, according to certain aspects, the scrambling may involve reversing one or more bits in some fields (e.g., zeros become ones). According to certain aspects, a scrambling algorithm in accordance with IEEE 802.11 family of wireless communications standards based on a known seed may be utilized. As an alternative, a scrambling algorithm may utilize a new (e.g., short) variable seed. According to certain aspects, the scrambling may involve re-locating one or more reserved bits in an effort to lower PAPR.

[0072] According to certain aspects, the scrambling may involve inverting one or more (or all) bits in one or more fields of a VHT-SIGA. In addition or as an alternative, the scrambling may also involve scrambling (e.g., with an 802.11a scrambling algorithm) of a VHT-SIGB field. An error check field (e.g., a Cyclic Redundancy Check (CRC)) may then be computed on the scrambled VHT-SIGB field.

[0073] FIG. 8 illustrates examples 802 and 804 for PAPR of transmission data in accordance with certain aspects of the present disclosure.

SELECTION OF ASSOCIATION IDENTIFIER (AID) VALUE FOR STATION-TO-ACCESS POINT TRANSMISSIONS

[0074] According to certain aspects, for station-to-access point (STA-to-AP) transmission packets, a value of Association Identifier (AID) subfield of the VHT-SIGA field may be set to one of a plurality of special values. It should be noted that a Group ID subfield within the VHT-SIGA field may have a binary value equal to '111111' since all STA-to-AP transmissions represent single user (SU) transmissions. Certain aspects of the present disclosure propose selecting AID values for STA-to-AP transmissions such that VHT-SIGA PAPR statistics has preferred values.

[0075] Every AID value may result in a set of PAPR values for a combination of various bandwidths (BW), space-time block codes (STBC) and a number of space-time streams (N_{STS}). In order to optimize the PAPR statistics, the AID value may be chosen in an effort to reduce at least one of: a largest value among a plurality of values for PAPR of the transmitted VHT-SIGA field (i.e., to reduce the worst case PAPR), an average value of the plurality of values for PAPR of the transmitted VHT-SIG field (i.e., to reduce the mean PAPR), or to reduce a sum of the largest value and the average value. In an aspect, the effort to reduce the at least one of the largest PAPR value, the average PAPR value or the sum may comprise an effort to minimize the at least one of the largest PAPR value, the average PAPR value or the sum.

[0076] Without applying the proposed selection of AID values, the worst case PAPR may be as high as 18 dB. On the other hand, if the AID value is chosen from the set of values obtained in an effort to reduce or minimize the worst case PAPR, the worst case PAPR may be reduced below 10.5 dB.

[0077] The following 9-bit AID sequences (least significant bit (LSB) is the one being first from the left) may result in at least one of: a lowest value for the maximum PAPR, a lowest value for the average PAPR, or a lowest value for a sum of the maximum PAPR and the average PAPR. In an aspect, four times oversampled Inverse Fast Fourier Transform (IFFT) may be applied before transmitting the VHT-SIGA field within a preamble of STA-to-AP transmission packet.

[0078] In one aspect of the present disclosure, the AID value of '000011010' (i.e., decimal value of 176) may result in a lowest maximum (worst case) PAPR for the transmitted VHT-SIGA1 field. It should be noted that AID decimal values of 176, 688, 1200 and 1712 may be marked/reserved for STA-to-AP packets. In this aspect, the worst case PAPR for the transmitted VHT-SIGA1 field may be equal to 10.4334 dB.

[0079] In another aspect, the AID value of '100100010' (i.e., decimal value of 137) may result in a lowest average PAPR for the transmitted VHT-SIGA1 field. It should be noted that AID decimal values of 137, 649, 1161 and 1673 may be marked/reserved for STA-to-AP packets. In this aspect, the average PAPR for the transmitted VHT-SIGA1 field may be equal to 8.3487 dB.

[0080] In yet another aspect, the AID value of '000011010' (i.e., decimal value of 176) may result in a lowest value for a sum of the maximum PAPR and the average PAPR for the transmitted VHT-SIGA1 field. It should be noted that AID decimal values of 176, 688, 1200 and 1712 may be marked/reserved for STA-to-AP packets. In this aspect, the worst case PAPR for the transmitted VHT-SIGA1 field may be equal to 18.8869 dB. It can be observed that minimizing the worst case PAPR and minimizing the sum of the maximum PAPR and the average PAPR may result in the same AID sequences. This may be because the maximum PAPR may fluctuate faster and with a larger range than the average PAPR.

[0081] Certain aspects of the present disclosure support AID value selection for Multiple Basic Service Sets (M-BSS) with Power Save (PS) feature. For power save reasons, a different BSS may utilize a different AID sequence. For example, five or more preferred AID sequences may be chosen in an effort to reduce at least one of the maximum (worst case) PAPR, the average PAPR, or the sum of maximum (worst case) PAPR and the average PAPR. In an aspect, the effort to reduce the at least one of the maximum PAPR, the average PAPR or the sum may comprise an effort to minimize the at least one of the maximum PAPR, the average PAPR or the sum.

[0082] FIG. 9 illustrates an example 900 of values for AID subfield of the VHT-SIGA field of the preamble in accordance with certain aspects of the present disclosure. The AID sequences given in FIG. 9 may be selected for M-BSS with PS to reduce or minimize a worst case PAPR of the transmitted VHT-SIGA field. In an aspect, the best 16 AID sequences listed in FIG. 9 may allow fast identification of 16 different access points (APs). Four times oversampled IFFT may be applied before transmitting the VHT-SIGA1 field with one of the listed AID sequences within the preamble of STA-to-AP transmission packet. The third column in FIG. 9 lists all decimal AID values comprising the 9 LSBs in the second column.

[0083] FIG. 10 illustrates an example 1000 of values for AID subfield of the VHT-SIGA field in accordance with certain aspects of the present disclosure. The AID sequences given in FIG. 10 may be selected for M-BSS with PS to reduce or minimize an average PAPR of the transmitted VHT-SIGA field. Four times oversampled IFFT may be applied before transmitting the VHT-SIGA1 field with one of the listed AID

sequences within the preamble of STA-to-AP transmission packet. The third column in FIG. 10 lists all decimal AID values comprising the 9 LSBs in the second column.

[0084] FIG. 11 illustrates an example 1100 of values for AID subfield of the VHT-SIGA field in accordance with certain aspects of the present disclosure. The AID sequences given in FIG. 11 may be selected for M-BSS with PS to reduce or minimize a sum of the maximum PAPR and the average PAPR of the transmitted VHT-SIGA field. Four times oversampled IFFT may be applied before transmitting the VHT-SIGA1 field with one of the listed AID sequences within the preamble of STA-to-AP transmission packet. The third column in FIG. 11 lists all decimal AID values comprising the 9 LSBs in the second column.

[0085] FIGS. 12A-12E illustrate examples of values for AID subfield of the VHT-SIGA1 field of the preamble that may be transmitted from a STA to an AP in accordance with certain aspects of the present disclosure. The AID sequences given in FIGS. 12A-12E may be determined in an effort to reduce or minimize a worst case PAPR of the transmitted VHT-SIGA1 field. Four times oversampled IFFT may be applied before transmitting the VHT-SIGA1 field with one of the listed AID sequences within the preamble of STA-to-AP transmission packet. The third columns in FIGS. 12A-12E list all decimal AID values comprising the 9 LSBs in the corresponding second columns.

[0086] The AID selection results illustrated in FIG. 12A may be obtained for the case when reserved bits in VHT-SIGA1 field comprises all 1s. The AID selection results illustrated in FIG. 12B may be obtained for the case when the reserved bits comprises all 0s. The AID selection results illustrated in FIG. 12C may be obtained for the case when the reserved bits are all random. The AID selection results illustrated in FIG. 12D may be obtained for the case when last two reserved bits in VHT-SIGA1 field comprise all 0s. The AID selection results illustrated in FIG. 12E may be obtained for the case when all reserved bits in VHT-SIGA1 field comprises all 1s, while Group ID subfield may be equal to zero.

RANDOM SELECTION OF ASSOCIATION ID

[0087] Avoiding worst case PAPR and reducing (or minimizing) worst case PAPR can be as important for station-to-access point (STA-to-AP) transmissions as for AP-to-

STA transmissions. Certain aspects of the present disclosure support choosing an AID value associated with an access point (AP) in the same way as choosing an AID value associated with a station (STA).

[0088] In an aspect, the AP may assign itself a random AID value from the same range as the AIDs selected for its associated STAs. The range of AID values may be determined as previously described for the STA side. The range of AID values may be received at the AP from its associated STA. The AID of the AP may be signaled in at least one of: a Beacon frame, a Probe Response frame, or an Association Response frame.

[0089] FIGS. 13A-13E illustrate examples of values for AID subfield of the VHT-SIGA1 field of a packet that may be transmitted from an AP to a STA and/or from a STA to an AP in accordance with certain aspects of the present disclosure. The AID sequences given in FIGS. 13A-13E may result in the highest maximum PAPR of the transmitted VHT-SIGA1 field. Therefore, the AID values listed in FIGS. 13A-13E may need to be avoided for AP-to-STA transmissions and/or STA-to-AP transmissions. In an aspect, four times oversampled IFFT may be applied before transmitting the VHT-SIGA1 field. The third columns in FIGS. 13A-13E list all decimal AID values comprising the 9 LSBs in the corresponding second columns.

[0090] The AID sequences illustrated in FIG. 13A may be obtained for the case when reserved bits in VHT-SIGA1 field comprises all 1s. The AID sequences illustrated in FIG. 13B may be obtained for the case when the reserved bits comprises all 0s. The AID sequences illustrated in FIG. 13C may be obtained for the case when the reserved bits are all random. The AID sequences illustrated in FIG. 13D may be obtained for the case when last two reserved bits in VHT-SIGA1 field comprise all 0s. The AID sequences illustrated in FIG. 13E may be obtained for the case when all reserved bits in VHT-SIGA1 field comprises all 1s, while Group ID subfield may be equal to zero that may indicate Multi User (MU) transmission from an AP to STAs.

“MAGIC” SEQUENCE APPLIED ON VHT-SIG-A AND VHT-SIG-B FIELDS

[0091] In an aspect of the present disclosure, information bits of at least one of VHT-SIG-A or VHT-SIG-B may be utilized for performing XOR operation with a “magic” sequence to minimize (or at least reduce) PAPR when transmitting the VHT-

SIG. The “magic” sequence may be obtained by exhaustive search and identifying a sequence of bits with the lowest PAPR, while assuming all zeros in the at least one of VHT-SIG-A or VHT-SIG-B.

[0092] For VHT-SIG-A, the following 34-bit pattern (LSB first) may result in PAPR for VHT-SIGA1 of 3.0345 dB and PAPR for VHT-SIGA2 of 4.4206 dB: {1, 1, 0 1, 1, 0, 1, 0, 1, 0, 1, 0, 0, 1, 1, 1, 1, 0, 0, 0, 0, 1, 1, 0, 0, 0, 0, 0, 0, 0, 0, 1, 1, 0}.

[0093] For VHT-SIG-B, the following 20/21/23 bits sequences (LSB first) may result in the lowest PAPR when using four times oversampled inverse fast Fourier transform (IFFT). In the case of 20 MHz bandwidth, the “magic” sequence may be {0, 0, 0, 0, 1, 1, 1, 0, 1, 0, 0, 0, 1, 0, 0, 0, 0, 1, 0}, and the PAPR may be equal to 3.16 dB. In the case of 40 MHz bandwidth, the “magic” sequence may be {1, 0, 1, 0, 0, 1, 0, 1, 1, 0, 1, 0, 0, 0, 1, 0, 0, 0, 1, 1}, and the PAPR may be equal to 5.42 dB. In the case of 80 MHz bandwidth, the “magic” sequence may be {0, 1, 0, 1, 0, 0, 1, 1, 0, 0, 1, 0, 1, 1, 1, 1, 1, 1, 0, 0, 1, 0}, and the PAPR may be equal to 5.13 dB.

[0094] FIG. 14A illustrates example PAPR results of VHT-SIGA1 in accordance with certain aspects of the present disclosure. The PAPR of transmitting VHT-SIGA1 when the aforementioned 34-bit “magic” sequence is applied is illustrated by plot 1410. It should be noted that $GID = 0$ and $AID = 0$.

[0095] FIG. 14B illustrates example PAPR results of VHT-SIGA2 in accordance with certain aspects of the present disclosure. The PAPR of transmitting VHT-SIGA2 when the aforementioned “magic” sequence is applied is illustrated by plot 1420. It should be noted that again $GID = 0$ and $AID = 0$.

[0096] FIGS. 15A-15B illustrate examples of PAPR results of VHT-SIGA when most fields of the VHT-SIGA are zeros in accordance with certain aspects of the present disclosure. It can be observed substantial improvement in PAPR when the “magic” sequence of bits is applied on the VHT-SIGA (e.g., PAPR results in column 1502 when the “magic” sequence is applied on VHT-SIGA2 versus PAPR results in column 1504 when the “magic” sequence is not applied).

[0097] FIG. 16A illustrates example PAPR results of VHT-SIGB when most fields of the VHT-SIGB are zeros and wherein Multi-User (MU) communication is utilized in

accordance with certain aspects of the present disclosure. It can be observed substantial improvement in PAPR when the “magic” sequence is applied on the VHT-SIGB (e.g., PAPR results in column 1602 when the “magic” sequence is applied on VHT-SIGB versus PAPR results in column 1604 when the “magic” sequence is not applied). In an aspect, it may be unlikely that MCS is zero, a pre-coder at a transmitter may be configured to mix streams, and it may be unlikely that small packets are transmitted.

[0098] FIG. 16B illustrates example PAPR results of VHT-SIGB when most fields of the VHT-SIGB are zeros and wherein Single-User (SU) communication is used with 20 MHz bandwidth in accordance with certain aspects of the present disclosure. It can be observed substantial improvement in PAPR when the “magic” sequence is applied on the VHT-SIGB (e.g., PAPR results in column 1606 when the “magic” sequence is applied on VHT-SIGB versus PAPR results in column 1608 when the “magic” sequence is not applied). Reserved bits of the VHT-SIGB may be set to all 1s and may not be used. In an aspect, in the case of SU communication, a receiver may not be required to decode the VHT-SIGB.

[0099] FIG. 17A illustrate example PAPR results of the VHT-SIGA when the VHT-SIGA comprises all ones in accordance with certain aspects of the present disclosure. It can be observed substantial improvement in PAPR results when the “magic” sequence is applied on the VHT-SIGA1 (e.g., PAPR results in column 1702 when the “magic” sequence is applied on VHT-SIGA1 versus PAPR results in column 1704 when the “magic” sequence is not applied). Further, it can be observed substantial improvement in PAPR results when the “magic” sequence is applied on the VHT-SIGA2 (e.g., PAPR results in column 1706 when the “magic” sequence is applied on VHT-SIGA2 versus PAPR results in column 1708 when the “magic” sequence is not applied).

[00100] FIG. 17B illustrate example PAPR results of the VHT-SIGB when the VHT-SIGB comprises all ones in accordance with certain aspects of the present disclosure. It can be observed substantial improvement in PAPR when the “magic” sequence is applied on the VHT-SIGB, e.g., PAPR results in column 1710 when the “magic” sequence is applied on VHT-SIGB versus PAPR results in column 1712 when the “magic” sequence is not applied.

[00101] In an aspect of the present disclosure, a transmitter may be configured to choose two reserved bits in VHT-SIGA1. A receiver may be configured to decode the VHT-SIG field without utilizing these reserved bits. The transmitter may be able to reduce PAPR on packet-by-packet basis by choosing the optimal two reserved bits. For example, this may be achieved by using a look-up table. In an aspect, the optimization may be based on a location of the two reserved bits (e.g., an end of the VHT-SIGA1), and on minimizing the PAPR of VHT-SIGA1.

[00102] It can be observed from FIG. 18A and FIG. 18C (example PAPR results of VHT-SIGA1 for $GID/AID = 0$ and GID being random, respectively) that the PAPR for tone reservation (plots 1808, 1828) is constantly better than the PAPR for the original VHT-SIGA1 (plots 1804, 1824) by at least 0.5 dB. In the range of 8.2 dB ~ 9.3 dB, the PAPR for tone reservation (plots 1808, 1828) may be even better than the PAPR of VHT-SIGA1 when GID bits are flipped (plots 1806, 1826 in FIG. 22A and FIG. 22C, respectively).

[00103] FIG. 18B and FIG. 18D illustrates example PAPR results of VHT-SIGA2 for $GID/AID = 0$ and GID being random, respectively in accordance with certain aspects of the present disclosure. Since the reserved bits are optimized for PAPR of VHT-SIGA1 and not for VHT-SIGA2, PAPR results for tone reservation (plots 1818, 1838) are only slightly better than PAPR results for the original VHT-SIGA2 (plots 1814, 1834). The PAPR results illustrated in FIGS. 18A-18D are for SU transmission and AID being all zeros.

[00104] The example results from FIGS. 18A-18D may be summarized as follows.

[00105] In case of $GID = 0$ and $AID = 0$, a current VHT-SIGA1 has medium PAPR higher than BPSK data, and VHT-SIGA2 is worse than data. For VHT-SIGA1, inverting the GID field may improve PAPR of VHT-SIG-A1. Changing the location of the reserved bits in VHT-SIGA1 may make PAPR worse. Changing the values of the reserved bits in VHT-SIGA1 may make PAPR worse. For VHT_SIGA2, inverting SGI, coding, SU BF fields may not be substantially helpful to PAPR statistics. Changing the location/value of the reserved bit in VHT-SIGA2 may not make a substantial difference.

[00106] In case of GID being random, current VHT-SIGA1 may have medium PAPR higher than BPSK data, and VHT-SIGA2 may have PAPR worse than data. For VHT-

SIGA1, inverting GID may not make a substantial difference in PAPR statistics. For VHT-SIGA2, changing the location of the reserved 6 bits in VHT-SIGA2 may make PAPR slightly worse.

[00107] According to certain aspects, making an SU Group ID = 111111, instead of all 0s may make a noticeable difference.

[00108] FIGS. 19A-19B illustrate example PAPR results of VHT-SIGA1 and VHT-SIGA2 fields respectively in accordance with certain aspects of the present disclosure for SU communication in accordance with certain aspects of the present disclosure. It can be assumed that AID may be all ones for uplink (UL) transmission, or AID may be equal to 1 or 3 (which may often happen in practice).

[00109] In FIG. 19A, PAPR cumulative density function (CDF) results of SU transmission of VHT-SIGA2 compare the case when GID is all ones (plot 1906) versus the case when AID is all ones (plot 1908) versus the case when both GID and AID are all ones (plot 1910) versus the case when AID = 1 (plot 1912) versus the case when AID = 3 (plot 1914), with baseline PAPR results from BPSK data (plot 1902) and originally proposed VHT-SIGA1 (plot 1904). It can be observed that with AID being all ones (plot 1908), the CDF is almost the same as the baseline PAPR result for the original VHT-SIGA1 (plot 1904). This is why the flipping of AID was not recommended before. However, with both GID and AID being all ones (plot 1910), the PAPR is getting worse, especially high PAPR values may occur more frequently. The case when AID = 1 (plot 1912 in FIG. 19A) or AID = 3 (plot 1914 in FIG. 19A) does not make much difference from the baseline PAPR result for the original VHT-SIGA1 (plot 1904 in FIG. 19A). As illustrated in FIG. 19B, all these different cases provide similar PAPR results for VHT-SIGA2.

SCRAMBLING OF ALL VHT-SIG BITS

[00110] A transmitter side (e.g., an access point) may be configured to perform scrambling of VHT-SIG field before transmission to minimize (or at least reduce) the PAPR of transmitted VHT-SIG field. In an aspect of the present disclosure, the scrambling may comprise: scrambling all bits of the VHT-SIG field with one of a plurality of scrambling sequences (e.g., one of four scrambling sequences), and including an identifier (ID) of that scrambling sequence in RESERVED bits of the

VHT-SIG field. The plurality of scrambling sequences may be determined in an effort to reduce PAPR of the transmitted VHT-SIG field, and that scrambling sequence may provide a smallest value for the PAPR among a plurality of values for the PAPR associated with the plurality of scrambling sequences.

[00111] A receiver side (e.g., an access terminal) may receive the VHT-SIG field with all bits scrambled prior to transmission of the VHT-SIG field using one of the plurality of scrambling sequences, wherein an ID of that scrambling sequence was included in RESERVED bits of the transmitted VHT-SIG field. In an aspect of the present disclosure, the receiver may determine that scrambling sequence based on the ID, and perform de-scrambling of the VHT-SIG field according to that scrambling sequence.

[00112] The various operations of methods described above may be performed by any suitable means capable of performing the corresponding functions. The means may include various hardware and/or software component(s) and/or module(s), including, but not limited to a circuit, an application specific integrate circuit (ASIC), or processor. Generally, where there are operations illustrated in Figures, those operations may have corresponding counterpart means-plus-function components with similar numbering. For example, operations 400 and 500 illustrated in FIGS. 4 and 5 may correspond to components 400A and 500A illustrated in FIGS. 4A and 5A.

[00113] For example, the means for constructing may comprise an application specific integrated circuit, e.g., the TX data processor 202 of the wireless node 200 from FIG. 2, or the RX data processor 214 of the wireless node 200, or the processor 304 of the processing system 300 from FIG. 3. The means for scrambling may comprise an encoder, e.g., the TX data processor 202, or the processor 304. The means for transmitting may comprise a transmitter, e.g., the transceiver 206 of the wireless node 200 from FIG. 2. The means for inverting may comprise an application specific integrated circuit, e.g., the TX data processor 202, or the RX data processor 214 of the wireless node 200, or the processor 304. The means for computing may comprise an application specific integrated circuit, e.g., the TX data processor 202 o, or the RX data processor 214, or the processor 304. The means for inserting may comprise an application specific integrated circuit, e.g., the TX data processor 202, or the RX data processor 214, or the processor 304. The means for re-locating may comprise an

application specific integrated circuit, e.g., the TX data processor 202, or the RX data processor 214, or the processor 304. The means for setting may comprise an application specific integrated circuit, e.g., the TX data processor 202, or the RX data processor 214, or the processor 304. The means for determining may comprise an application specific integrated circuit, e.g., the TX data processor 202, or the RX data processor 214, or the processor 304. The means for evaluating may comprise an application specific integrated circuit, e.g., the TX data processor 202, or the RX data processor 214, or the processor 304. The means for identifying may comprise an application specific integrated circuit, e.g., the TX data processor 202, or the RX data processor 214, or the processor 304. The means for receiving may comprise a receiver, e.g., the transceiver 206 of the wireless node 200 from FIG. 2. The means for de-scrambling may comprise a decoder, e.g., the RX data processor 214, or the processor 304. The means for calculating may comprise an application specific integrated circuit, e.g., the TX data processor 202, or the RX data processor 214, or the processor 304. The means for comparing may comprise an application specific integrated circuit, e.g., the TX data processor 202, or the RX data processor 214, or the processor 304. The means for signaling may comprise a transmitter, e.g., the transceiver 206 of the wireless node 200 from FIG. 2. The means for decoding may comprise a decoder, e.g., the RX data processor 214, or the processor 304. The means for identifying may comprise an application specific integrated circuit, e.g., the RX data processor 214, or the processor 304.

[00114] As used herein, the term “determining” encompasses a wide variety of actions. For example, “determining” may include calculating, computing, processing, deriving, investigating, looking up (e.g., looking up in a table, a database or another data structure), ascertaining and the like. Also, “determining” may include receiving (e.g., receiving information), accessing (e.g., accessing data in a memory) and the like. Also, “determining” may include resolving, selecting, choosing, establishing and the like.

[00115] As used herein, a phrase referring to “at least one of” a list of items refers to any combination of those items, including single members. As an example, “at least one of: *a*, *b*, or *c*” is intended to cover: *a*, *b*, *c*, *a-b*, *a-c*, *b-c*, and *a-b-c*.

[00116] The various illustrative logical blocks, modules and circuits described in connection with the present disclosure may be implemented or performed with a general

purpose processor, a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field programmable gate array (FPGA) or other programmable logic device (PLD), discrete gate or transistor logic, discrete hardware components, or any combination thereof designed to perform the functions described herein. A general-purpose processor may be a microprocessor, but in the alternative, the processor may be any commercially available processor, controller, microcontroller, or state machine. A processor may also be implemented as a combination of computing devices, e.g., a combination of a DSP and a microprocessor, a plurality of microprocessors, one or more microprocessors in conjunction with a DSP core, or any other such configuration.

[00117] The steps of a method or algorithm described in connection with the present disclosure may be embodied directly in hardware, in a software module executed by a processor, or in a combination of the two. A software module may reside in any form of storage medium that is known in the art. Some examples of storage media that may be used include random access memory (RAM), read only memory (ROM), flash memory, EPROM memory, EEPROM memory, registers, a hard disk, a removable disk, a CD-ROM and so forth. A software module may comprise a single instruction, or many instructions, and may be distributed over several different code segments, among different programs, and across multiple storage media. A storage medium may be coupled to a processor such that the processor can read information from, and write information to, the storage medium. In the alternative, the storage medium may be integral to the processor.

[00118] The methods disclosed herein comprise one or more steps or actions for achieving the described method. The method steps and/or actions may be interchanged with one another without departing from the scope of the claims. In other words, unless a specific order of steps or actions is specified, the order and/or use of specific steps and/or actions may be modified without departing from the scope of the claims.

[00119] The functions described may be implemented in hardware, software, firmware, or any combination thereof. If implemented in hardware, an example hardware configuration may comprise a processing system in a wireless node. The processing system may be implemented with a bus architecture. The bus may include any number of interconnecting buses and bridges depending on the specific application of the processing system and the overall design constraints. The bus may link together

various circuits including a processor, machine-readable media, and a bus interface. The bus interface may be used to connect a network adapter, among other things, to the processing system via the bus. The network adapter may be used to implement the signal processing functions of the PHY layer. In the case of a user terminal 120 (see FIG. 1), a user interface (e.g., keypad, display, mouse, joystick, etc.) may also be connected to the bus. The bus may also link various other circuits such as timing sources, peripherals, voltage regulators, power management circuits, and the like, which are well known in the art, and therefore, will not be described any further.

[00120] The processor may be responsible for managing the bus and general processing, including the execution of software stored on the machine-readable media. The processor may be implemented with one or more general-purpose and/or special-purpose processors. Examples include microprocessors, microcontrollers, DSP processors, and other circuitry that can execute software. Software shall be construed broadly to mean instructions, data, or any combination thereof, whether referred to as software, firmware, middleware, microcode, hardware description language, or otherwise. Machine-readable media may include, by way of example, RAM (Random Access Memory), flash memory, ROM (Read Only Memory), PROM (Programmable Read-Only Memory), EPROM (Erasable Programmable Read-Only Memory), EEPROM (Electrically Erasable Programmable Read-Only Memory), registers, magnetic disks, optical disks, hard drives, or any other suitable storage medium, or any combination thereof. The machine-readable media may be embodied in a computer-program product. The computer-program product may comprise packaging materials.

[00121] In a hardware implementation, the machine-readable media may be part of the processing system separate from the processor. However, as those skilled in the art will readily appreciate, the machine-readable media, or any portion thereof, may be external to the processing system. By way of example, the machine-readable media may include a transmission line, a carrier wave modulated by data, and/or a computer product separate from the wireless node, all which may be accessed by the processor through the bus interface. Alternatively, or in addition, the machine-readable media, or any portion thereof, may be integrated into the processor, such as the case may be with cache and/or general register files.

[00122] The processing system may be configured as a general-purpose processing system with one or more microprocessors providing the processor functionality and external memory providing at least a portion of the machine-readable media, all linked together with other supporting circuitry through an external bus architecture. Alternatively, the processing system may be implemented with an ASIC (Application Specific Integrated Circuit) with the processor, the bus interface, the user interface in the case of an access terminal), supporting circuitry, and at least a portion of the machine-readable media integrated into a single chip, or with one or more FPGAs (Field Programmable Gate Arrays), PLDs (Programmable Logic Devices), controllers, state machines, gated logic, discrete hardware components, or any other suitable circuitry, or any combination of circuits that can perform the various functionality described throughout this disclosure. Those skilled in the art will recognize how best to implement the described functionality for the processing system depending on the particular application and the overall design constraints imposed on the overall system.

[00123] The machine-readable media may comprise a number of software modules. The software modules include instructions that, when executed by the processor, cause the processing system to perform various functions. The software modules may include a transmission module and a receiving module. Each software module may reside in a single storage device or be distributed across multiple storage devices. By way of example, a software module may be loaded into RAM from a hard drive when a triggering event occurs. During execution of the software module, the processor may load some of the instructions into cache to increase access speed. One or more cache lines may then be loaded into a general register file for execution by the processor. When referring to the functionality of a software module below, it will be understood that such functionality is implemented by the processor when executing instructions from that software module.

[00124] If implemented in software, the functions may be stored or transmitted over as one or more instructions or code on a computer-readable medium. Computer-readable media include both computer storage media and communication media including any medium that facilitates transfer of a computer program from one place to another. A storage medium may be any available medium that can be accessed by a computer. By way of example, and not limitation, such computer-readable media can

comprise RAM, ROM, EEPROM, CD-ROM or other optical disk storage, magnetic disk storage or other magnetic storage devices, or any other medium that can be used to carry or store desired program code in the form of instructions or data structures and that can be accessed by a computer. Also, any connection is properly termed a computer-readable medium. For example, if the software is transmitted from a website, server, or other remote source using a coaxial cable, fiber optic cable, twisted pair, digital subscriber line (DSL), or wireless technologies such as infrared (IR), radio, and microwave, then the coaxial cable, fiber optic cable, twisted pair, DSL, or wireless technologies such as infrared, radio, and microwave are included in the definition of medium. Disk and disc, as used herein, include compact disc (CD), laser disc, optical disc, digital versatile disc (DVD), floppy disk, and Blu-ray[®] disc where disks usually reproduce data magnetically, while discs reproduce data optically with lasers. Thus, in some aspects computer-readable media may comprise non-transitory computer-readable media (e.g., tangible media). In addition, for other aspects computer-readable media may comprise transitory computer-readable media (e.g., a signal). Combinations of the above should also be included within the scope of computer-readable media.

[00125] Thus, certain aspects may comprise a computer program product for performing the operations presented herein. For example, such a computer program product may comprise a computer-readable medium having instructions stored (and/or encoded) thereon, the instructions being executable by one or more processors to perform the operations described herein. For certain aspects, the computer program product may include packaging material.

[00126] Further, it should be appreciated that modules and/or other appropriate means for performing the methods and techniques described herein can be downloaded and/or otherwise obtained by a user terminal and/or base station as applicable. For example, such a device can be coupled to a server to facilitate the transfer of means for performing the methods described herein. Alternatively, various methods described herein can be provided via storage means (e.g., RAM, ROM, a physical storage medium such as a compact disc (CD) or floppy disk, etc.), such that a user terminal and/or base station can obtain the various methods upon coupling or providing the storage means to the device. Moreover, any other suitable technique for providing the methods and techniques described herein to a device can be utilized.

[00127] It is to be understood that the claims are not limited to the precise configuration and components illustrated above. Various modifications, changes and variations may be made in the arrangement, operation and details of the methods and apparatus described above without departing from the scope of the claims.

[00128] While the foregoing is directed to aspects of the present disclosure, other and further aspects of the disclosure may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims that follow.

55162-1

32

CLAIMS:

1. A method for wireless communications, comprising:
constructing a very high throughput signal (VHT-SIG) field;
scrambling one or more bits of the VHT-SIG field, wherein the scrambling is
5 designed to reduce peak-to-average power ratio (PAPR) of the VHT-SIG field, wherein the
scrambling comprises:
re-locating, within the VHT-SIG field, one or more reserved bits of the one or
more bits; and
performing binary operation between the one or more bits of the VHT-SIG
10 field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce
PAPR of the VHT-SIG field; and
transmitting the VHT-SIG field with one or more scrambled bits over a
wireless channel.
- 15 2. The method of claim 1, wherein the scrambling is performed in response to
determining expected PAPR of the transmitted VHT-SIG field exceeds a threshold value.
3. The method of claim 1, wherein the scrambling further comprises inverting the
value of one or more bits in the VHT-SIG field.
20
4. The method of claim 1, wherein the scrambling further comprises selecting
reserved bits using a lookup table.
5. The method of claim 1, wherein the scrambling further comprises setting
25 values of a Group Identifier (GID) of the VHT-SIG field to indicate Single User (SU)
transmission.
6. The method of claim 1, wherein the scrambling further comprises:

55162-1

33

setting an Association Identifier (AID) subfield of the VHT-SIG field to a value chosen from a set of one or more values, and wherein

a Group Identifier (GID) subfield of the VHT-SIG field is set to a defined value indicating Single User (SU) transmission.

5

7. The method of claim 6, wherein the one or more values in the set are determined in an effort to reduce at least one of:

a largest value among a plurality of values for PAPR of the transmitted VHT-SIG field,

10 an average value of the plurality of values for PAPR of the transmitted VHT-SIG field, or

a sum of the largest value and the average value.

8. An apparatus for wireless communications, comprising:

15 means for constructing a very high throughput signal (VHT-SIG) field;

means for scrambling one or more bits of the VHT-SIG field, wherein the means for scrambling is designed to reduce peak-to-average power ratio (PAPR) of the VHT-SIG field, wherein the means for scrambling comprises:

20 means for re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and

means for performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits;

means for determining the sequence of bits in an effort to reduce PAPR of the VHT-SIG field; and

25 means for transmitting the VHT-SIG field with one or more scrambled bits over a wireless channel.

9. The apparatus of claim 8, wherein the means for scrambling comprises means for performing the scrambling in response to determining expected PAPR of the transmitted

30 VHT-SIG field exceeds a threshold value.

55162-1

34

10. The apparatus of claim 8, wherein the means for scrambling further comprises means for inverting the value of one or more bits in the VHT-SIG field.
11. The apparatus of claim 8, wherein the means for scrambling comprises means
5 for selecting reserved bits using a lookup table.
12. The apparatus of claim 8, wherein the means for scrambling further comprises means for setting values of a Group Identifier (GID) of the VHT-SIG field to indicate Single User (SU) transmission.
10
13. The apparatus of claim 8, wherein the means for scrambling further comprises:
means for setting an Association Identifier (AID) subfield of the VHT-SIG
field to a value chosen from a set of one or more values, and wherein
a Group Identifier (GID) subfield of the VHT-SIG field is set to a defined
15 value indicating Single User (SU) transmission.
14. The apparatus of claim 13, wherein the one or more values in the set are determined in an effort to reduce at least one of:
a largest value among a plurality of values for PAPR of the transmitted VHT-
20 SIG field,
an average value of the plurality of values for PAPR of the transmitted VHT-
SIG field, or
a sum of the largest value and the average value.
- 25 15. An apparatus for wireless communications, comprising:
a circuit configured to construct a very high throughput signal (VHT-SIG)
field;
an encoder configured to scramble one or more bits of the VHT-SIG field,
wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the
30 VHT-SIG field, wherein the encoder is further configured to scramble by re-locating, within

55162-1

35

the VHT-SIG field, one or more reserved bits of the one or more bits, and performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the VHT-SIG field; and

5 a transmitter configured to transmit the VHT-SIG field with one or more scrambled bits over a wireless channel.

16. A non-transitory computer readable medium containing executable instructions for wireless communications, the executable instructions comprising instructions for:

constructing a very high throughput signal (VHT-SIG) field;

10 scrambling one or more bits of the VHT-SIG field, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the VHT-SIG field, wherein the instructions for scrambling further comprises instructions for:

re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and

15 performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the VHT-SIG field; and

transmitting the VHT-SIG field with one or more scrambled bits over a wireless channel by utilizing a bandwidth of a first size.

20

17. An access point, comprising:

at least one antenna;

a circuit configured to construct a very high throughput signal (VHT-SIG) field;

25 an encoder configured to scramble one or more bits of the VHT-SIG field, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the VHT-SIG field, wherein the encoder is further configured to scramble by:

re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and

55162-1

36

performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the VHT-SIG field; and

5 a transmitter configured to transmit via the at least one antenna the VHT-SIG field with one or more scrambled bits over a wireless channel.

18. A method for wireless communications, comprising:

receiving, over a wireless channel, a transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to
10 transmission, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the transmitted VHT-SIG field, and wherein the scrambling comprises:

re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and

performing binary operation between the one or more bits of the VHT-SIG
15 field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the transmitted VHT-SIG field; and

de-scrambling the one or more scrambled bits of the VHT-SIG field.

19. The method of claim 18, wherein the scrambling further comprises inverting
20 the value of one or more bits in the VHT-SIG field.

20. The method of claim 18, wherein the scrambling further comprises:

setting values of GroupID bits of the VHT-SIG field to indicate Single User (SU) transmission, and the method further comprising
25 identifying the transmission as the SU transmission based on the values of GroupID bits.

21. The method of claim 20, further comprising identifying values of the GroupID bits of the VHT-SIG field set to 111111 as the SU transmission.

30

55162-1

37

22. The method of claim 18, wherein the scrambling further comprises selecting reserved bits using a lookup table.
23. The method of claim 18, wherein the scrambling further comprises:
5 setting an Association Identifier (AID) subfield of the transmitted VHT-SIG field to a value chosen from a set of one or more values, and wherein a Group Identifier (GID) subfield of the VHT-SIG field is set to a defined value indicating Single User (SU) transmission.
- 10 24. The method of claim 23, wherein the one or more values in the set are determined in an effort to reduce at least one of:
a largest value among a plurality of values for PAPR of the transmitted VHT-SIG field,
an average value of the plurality of values for PAPR of the transmitted VHT-SIG field, or
15 a sum of the largest value and the average value.
25. The method of claim 18, further comprising:
setting an Association Identifier (AID) subfield of another VHT-SIG field to a
20 value randomly chosen from a set of one or more values; and
transmitting the other VHT-SIG field.
26. An apparatus for wireless communications, comprising:
means for receiving, over a wireless channel, a transmission containing a very
25 high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the transmitted VHT-SIG field, and wherein the scrambling comprises:
re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and

55162-1

38

performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the transmitted VHT-SIG field; and

means for de-scrambling the one or more scrambled bits of the VHT-SIG field.

5

27. The apparatus of claim 26, wherein the scrambling further comprises inverting the value of one or more bits in the VHT-SIG field.

28. The apparatus of claim 26, wherein the scrambling further comprises:
setting values of GroupID bits of the VHT-SIG field to indicate Single User (SU) transmission, and the apparatus further comprising

10

means for identifying the transmission as the SU transmission based on the values of GroupID bits.

15

29. The apparatus of claim 28, further comprising means for identifying values of the GroupID bits of the VHT-SIG field set to 111111 as the SU transmission.

30. The apparatus of claim 26, wherein the scrambling further comprises selecting reserved bits using a lookup table.

20

31. The apparatus of claim 26, wherein the scrambling further comprises:
setting an Association Identifier (AID) subfield of the transmitted VHT-SIG field to a value chosen from a set of one or more values, and wherein

25

a Group Identifier (GID) subfield of the VHT-SIG field is set to a defined value indicating Single User (SU) transmission.

32. The apparatus of claim 31, wherein the one or more values in the set are determined in an effort to reduce at least one of:

30

a largest value among a plurality of values for PAPR of the transmitted VHT-SIG field,

55162-1

39

an average value of the plurality of values for PAPR of the transmitted VHT-SIG field, or

a sum of the largest value and the average value.

- 5 33. The apparatus of claim 26, further comprising:
means for setting an Association Identifier (AID) subfield of another VHT-SIG field to a value randomly chosen from a set of one or more values; and
means for transmitting the other VHT-SIG field.

- 10 34. An apparatus for wireless communications, comprising:
a receiver configured to receive, over a wireless channel, a transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the transmitted VHT-SIG field, and wherein the scrambling
15 comprises:
re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and
performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce
20 PAPR of the transmitted VHT-SIG field; and
a decoder configured to de-scramble the one or more scrambled bits of the VHT-SIG field.

35. A non-transitory computer readable medium containing executable instructions
25 for wireless communications, the executable instructions comprising instructions for:
receiving, over a wireless channel, a transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the transmitted VHT-SIG field, and wherein the scrambling comprises:

55162-1

40

re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and

performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce

5 PAPR of the transmitted VHT-SIG field; and

de-scrambling the one or more scrambled bits of the VHT-SIG field.

36. An access terminal, comprising:

at least one antenna;

10 a receiver configured to receive, over a wireless channel via the at least one antenna, a transmission containing a very high throughput signal (VHT-SIG) field with one or more bits altered via scrambling prior to transmission, wherein the scrambling is designed to reduce peak-to-average power ratio (PAPR) of the transmitted VHT-SIG field, and wherein the scrambling comprises:

15 re-locating, within the VHT-SIG field, one or more reserved bits of the one or more bits; and

performing binary operation between the one or more bits of the VHT-SIG field and a sequence of bits, wherein the sequence of bits is determined in an effort to reduce PAPR of the transmitted VHT-SIG field; and

20 a decoder configured to de-scramble the one or more scrambled bits of the VHT-SIG field.

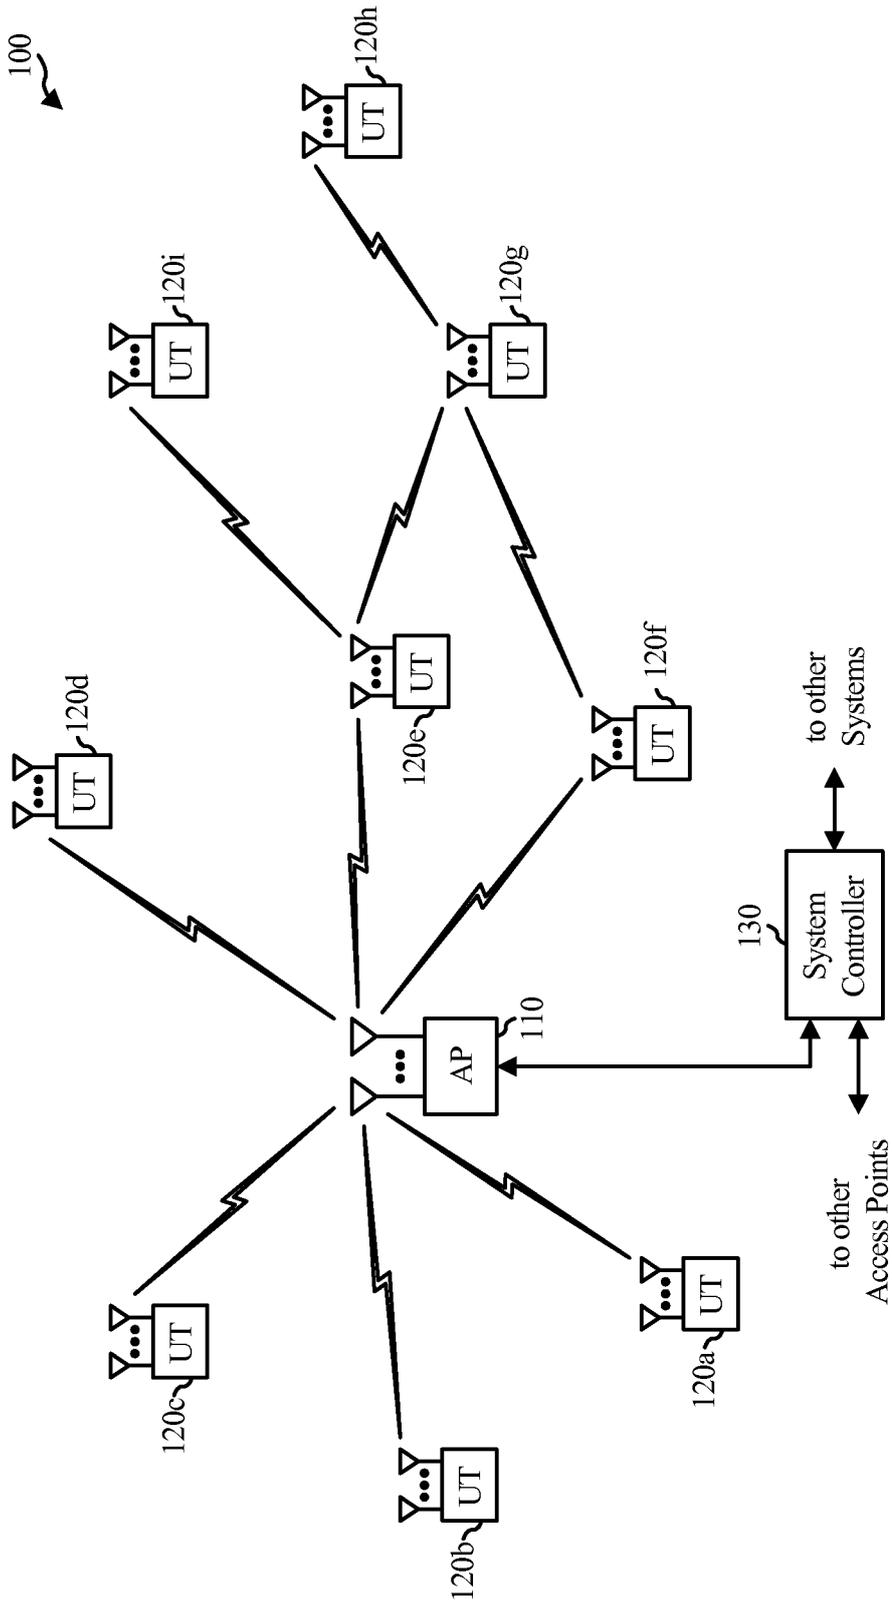


FIG. 1

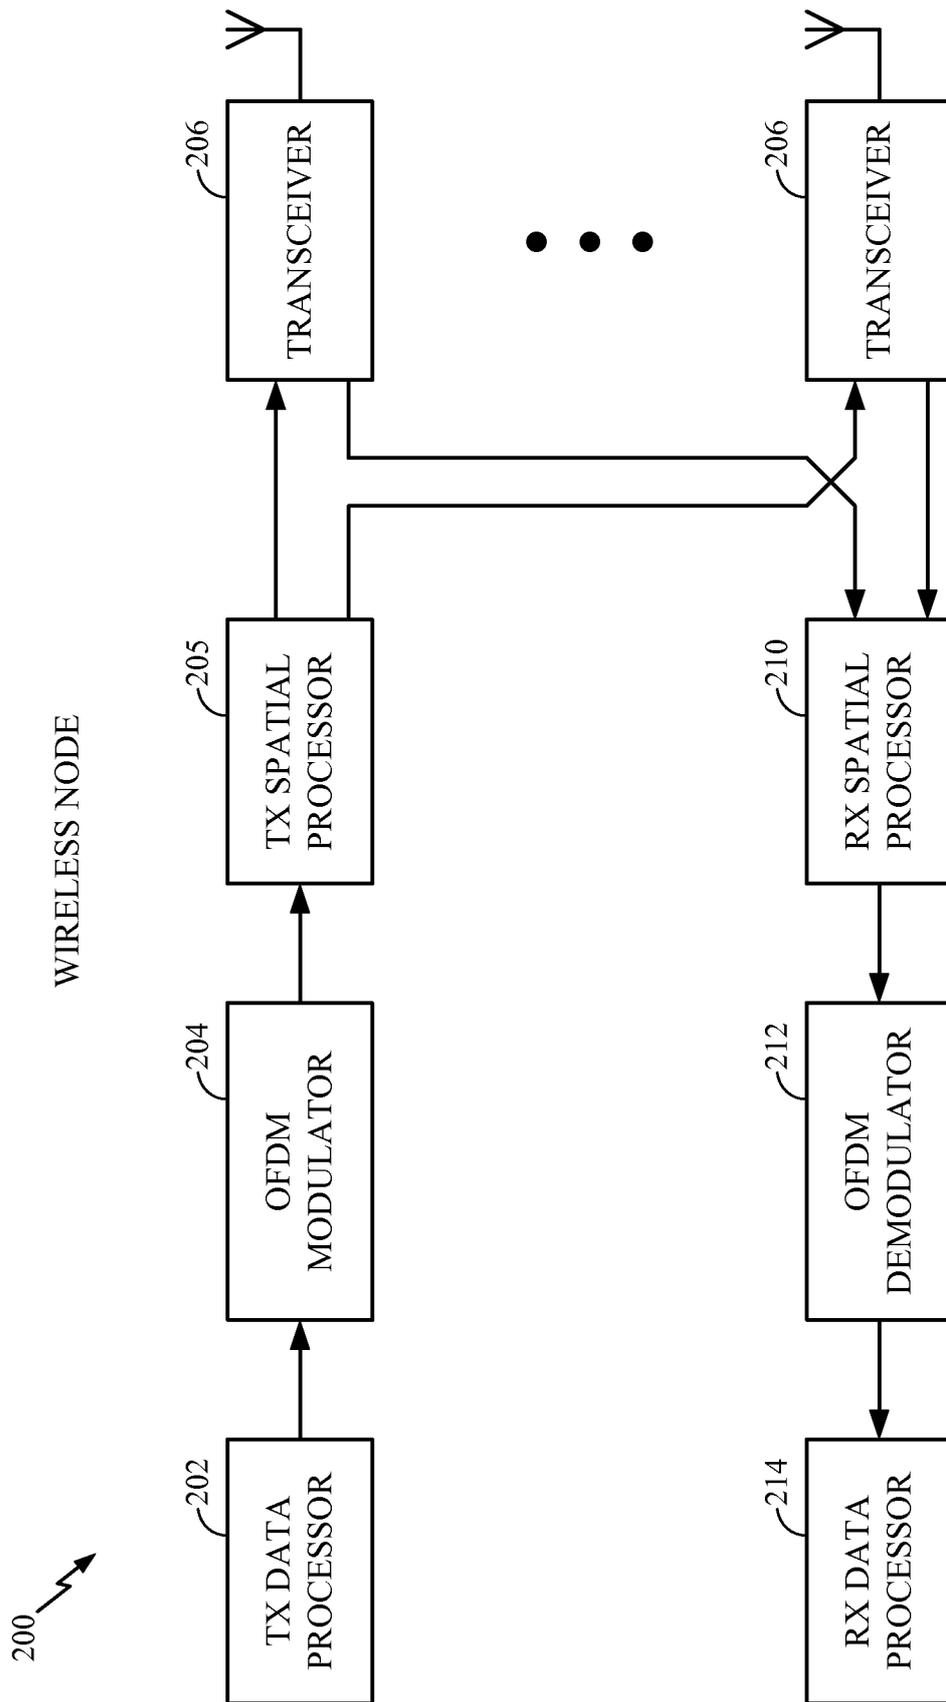


FIG. 2

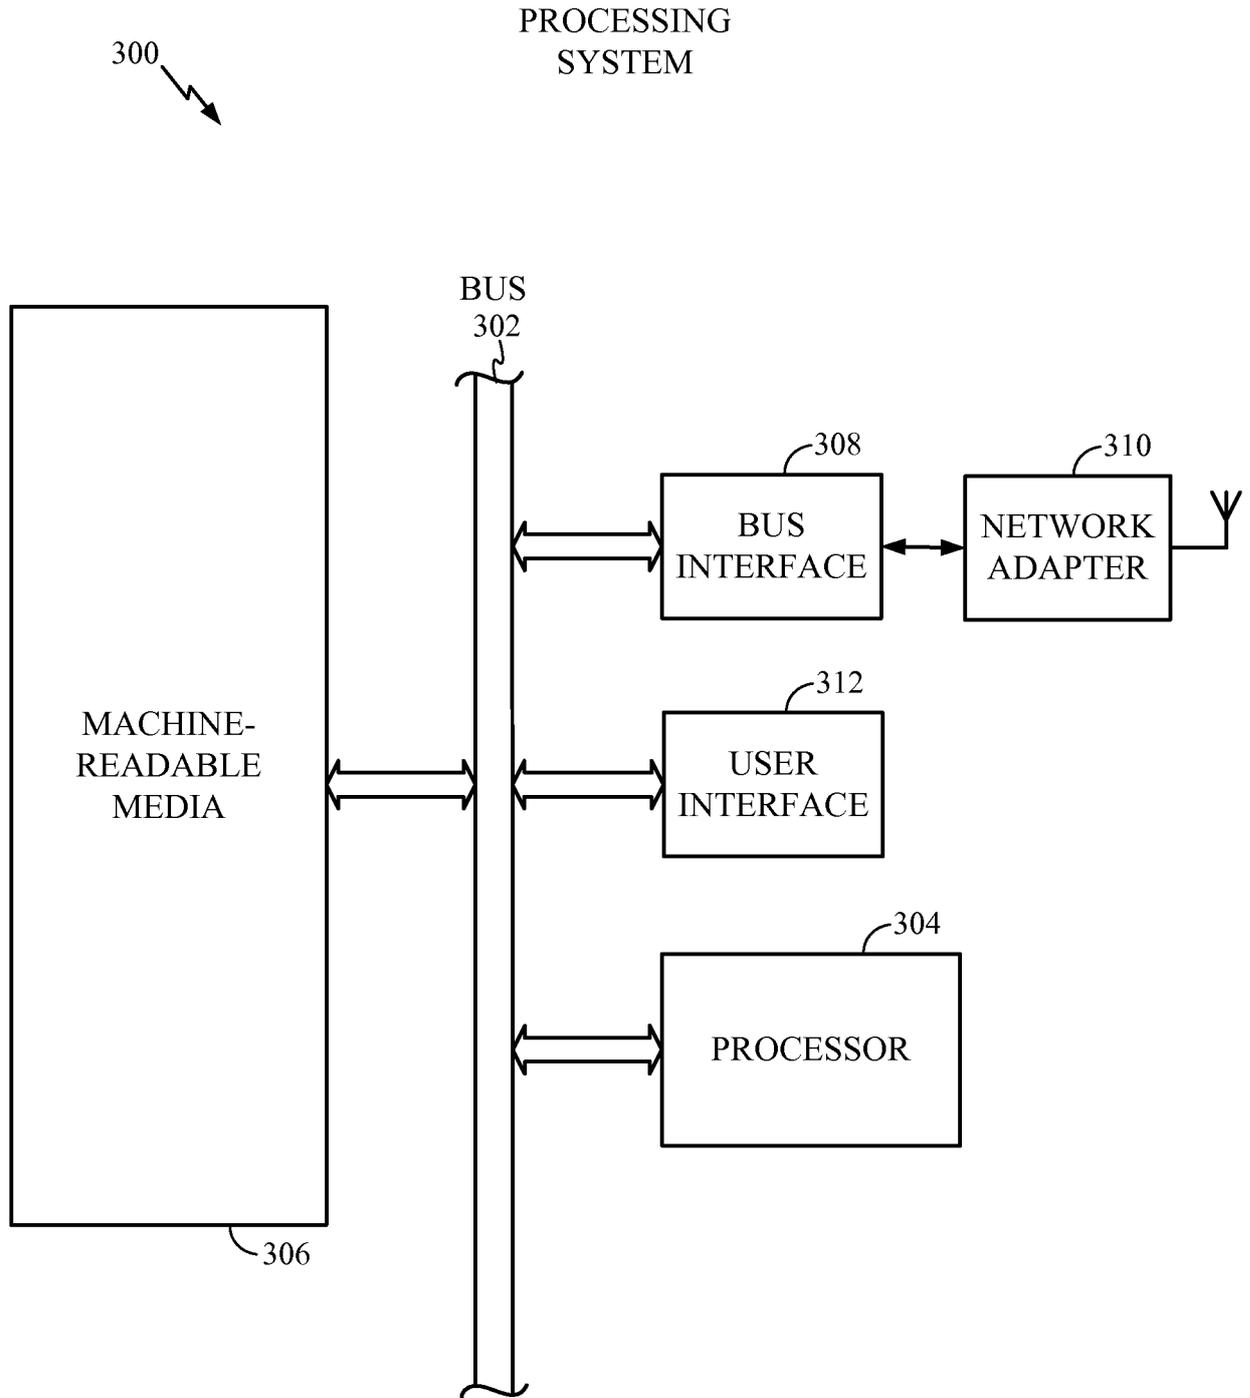


FIG. 3

4/34

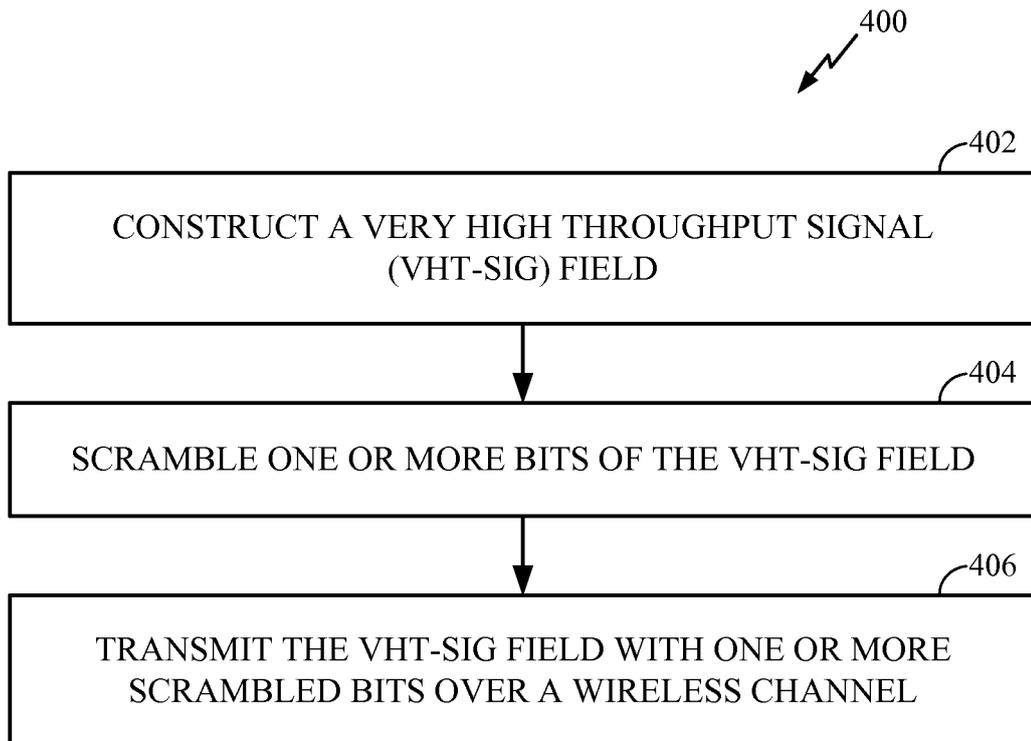


FIG. 4

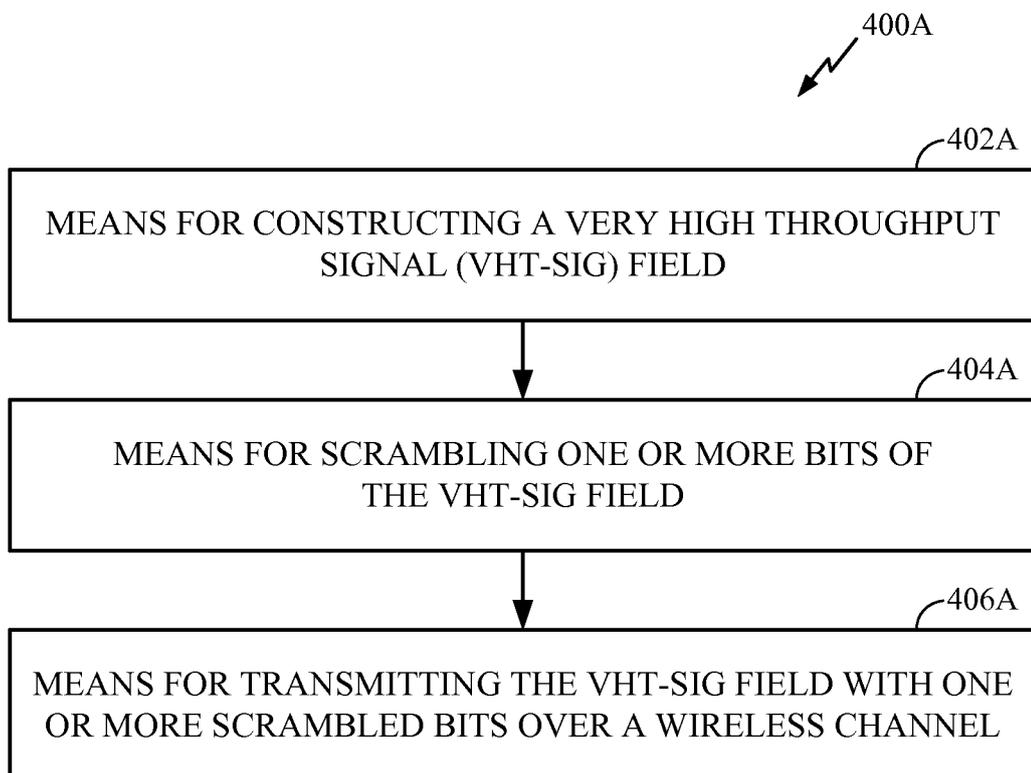


FIG. 4A

5/34

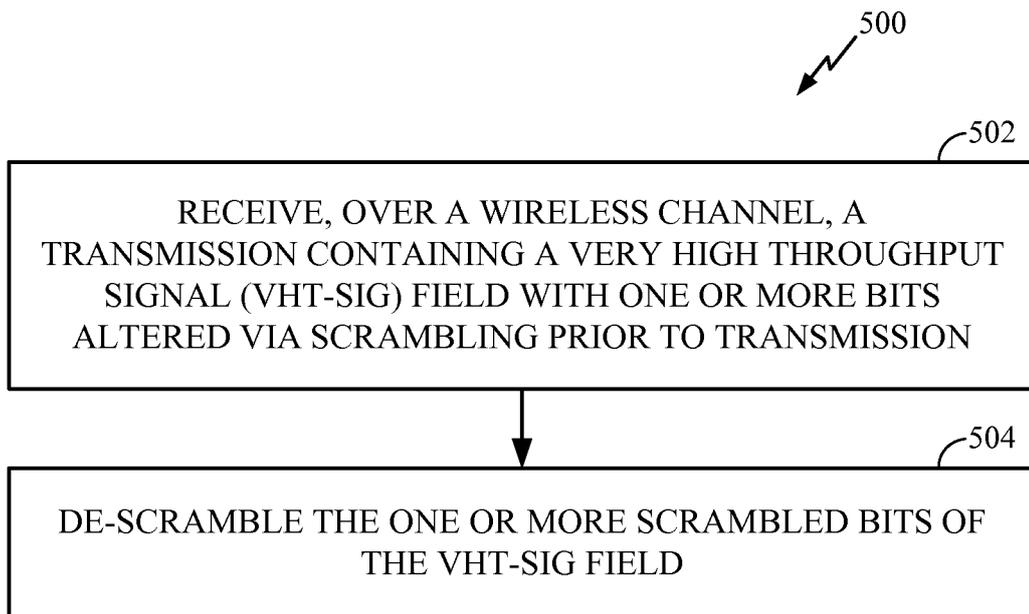


FIG. 5

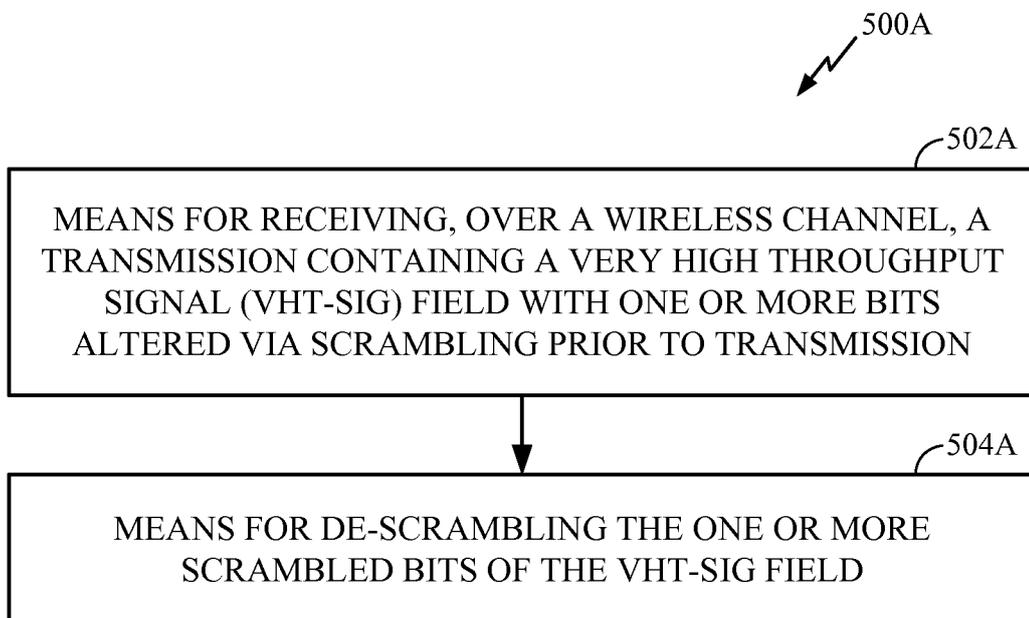


FIG. 5A

600
↙

Bit Index	Field	SU Value	SU bit allocation	Description
0-1	BW	00	2	Allows 20,40,80,80+80 and 160 MHz modes. Other modes TBD. Set to 0 for 20 MHz, 1 for 40 MHz, 2 for 80 MHz, 3 for 160 MHz or 80+80 MHz mode If MSB is not used, make it reserved and set to 1
2	STBC	0	1	No STBC
3-8	Group ID	111111	6	Single user transmission
9-20	N _{STS}	000, 00000000	12	Single Spatial Stream, sent from AP
21-23	Reserved	111	3	All ones

FIG. 6

700 ↘

Cases	SIGA1	SIGA2	SIGB	HT-SIG1	HT-SIG2	With 11a scrambler	
						SIGA1	SIGA2
20MHz, no STBC, SU, 1 ss, normal GI, BCC, BPSK 1/2, no beamforming, packet length = 0	8.8629	6.6954	12.0605	16.4723	8.1486	6.7861	7.0549
40MHz, STBC, SU, 1 ss, short GI with length ambiguity, LDPC, highest possible MCS, no beamforming, max. packet length	9.9177	8.7403	14.6331	11.5742	9.8529	8.4257	9.4059

FIG. 7

8/34

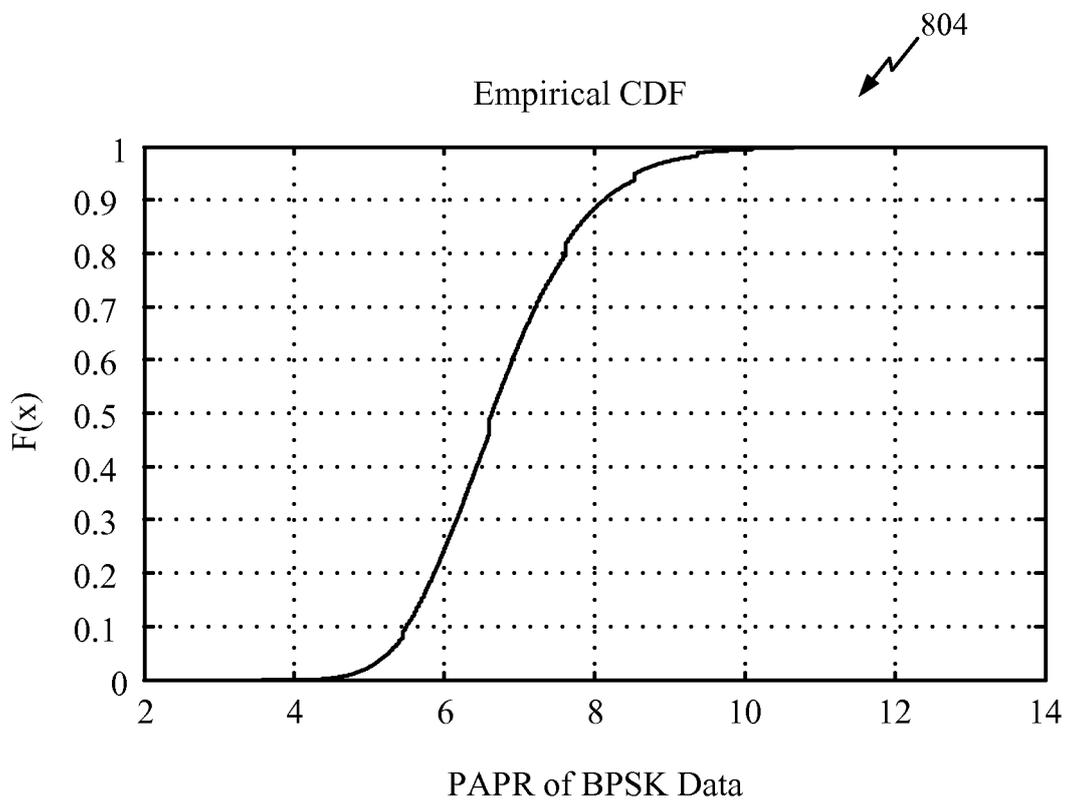
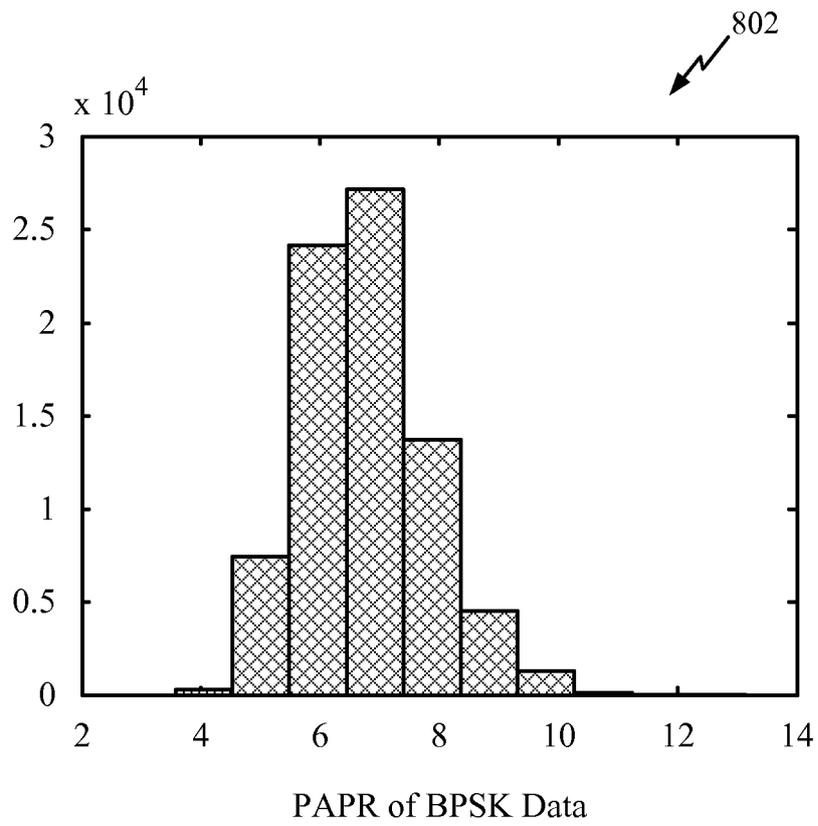


FIG. 8

9/34

AID Selection Results for M-BSS with PS
(min. of worst case PAPR)

900


Max(PAPR) (dB)	AID sequence in VHTSIGA (LSB first)	AID values reserved for STA-AP
10.4334	0 0 0 0 1 1 0 1 0	176, 688, 1200, and 1712
10.5558	0 0 1 0 1 0 0 1 0	148, 660, 1172, and 1684
10.6718	0 0 0 1 0 0 1 1 1	456, 968, 1480, and 1992
10.7120	1 0 0 1 1 0 1 0 1	345, 857, 1369, and 1881
10.8276	1 0 0 0 1 1 1 1 0	241, 753, 1265, and 1777
10.8675	0 0 1 0 1 0 0 1 1	404, 916, 1428, and 1940
10.8695	0 0 0 1 1 0 0 0 0	24, 536, 1048, and 1560
10.9091	0 1 1 1 1 1 1 0 0	126, 638, 1150, and 1662
10.9310	0 0 1 1 1 1 0 0 0	60, 572, 1084, and 1596
10.9822	1 1 0 1 0 1 1 1 1	491, 1003, and 1515
10.9847	0 1 1 1 1 1 1 0 1	382, 894, 1406, and 1918
10.9850	0 1 0 1 0 0 1 0 1	330, 842, 1354, and 1866
11.0186	0 1 0 1 0 0 0 1 0	138, 650, 1162, and 1674
11.0230	1 0 0 1 0 0 1 0 1	329, 841, 1353, and 1865
11.0519	1 1 0 1 1 1 1 0 1	379, 891, 1403, and 1915
11.0520	0 1 1 1 1 1 0 1 1	446, 958, 1470, and 1982

FIG. 9

10/34

**AID Selection Results for M-BSS with PS
(min. of average PAPR)**

1000
↙

Mean(PAPR) (dB)	AID sequence in VHTSIGA (LSB first)	AID values reserved for STA-AP
8.3487	1 0 0 1 0 0 0 1 0	137, 649, 1161, and 1673
8.3912	1 0 0 1 0 1 1 0 0	105, 617, 1129, and 1641
8.4318	0 1 1 0 0 0 0 0 0	6, 518, 1030, and 1542
8.4325	0 0 1 0 1 0 0 1 1	404, 916, 1428, and 1940
8.4413	0 0 1 1 1 1 1 0 0	124, 636, 1148, and 1660
8.4442	1 0 0 1 0 1 1 0 1	361, 873, 1385, and 1897
8.4518	0 0 0 1 0 1 1 0 0	104, 616, 1128, and 1640
8.4527	1 0 0 0 1 0 1 1 0	209, 721, 1233, and 1745
8.4528	1 0 1 1 1 1 0 1 0	189, 701, 1213, and 1725
8.4535	0 0 0 0 1 1 0 1 0	176, 688, 1200, and 1712
8.4541	0 0 1 1 0 1 1 0 1	364, 876, 1388, and 1900
8.4557	0 1 1 0 1 1 0 0 0	54, 566, 1078, and 1590
8.4578	0 0 0 0 0 0 0 0 1	256, 768, 1280, and 1792
8.4737	0 0 1 1 1 1 1 1 1	508, 1020, and 1532
8.4759	1 1 0 0 1 0 0 0 1	275, 787, 1299, and 1811
8.4771	0 1 0 1 0 0 1 0 1	330, 842, 1354, and 1866

FIG. 10

11/34

AID Selection Results for M-BSS with PS
(min. of sum(max and mean))

1100



mean+max(PAPR) (dB)	AID sequence in VHTSIGA (LSB first)	AID values reserved for STA-AP
18.8869	0 0 0 0 1 1 0 1 0	176, 688, 1200, and 1712
19.0875	0 0 1 0 1 0 0 1 0	148, 660, 1172, and 1684
19.3000	0 0 1 0 1 0 0 1 1	404, 916, 1428, and 1940
19.3287	0 0 0 1 0 0 1 1 1	456, 968, 1480, and 1992
19.4001	1 0 0 1 1 0 1 0 1	345, 857, 1369, and 1881
19.4620	0 1 0 1 0 0 1 0 1	330, 842, 1354, and 1866
19.4674	1 0 0 1 0 0 0 1 0	137, 649, 1161, and 1673
19.5093	1 0 0 0 1 1 1 1 0	241, 753, 1265, and 1777
19.5300	0 0 1 1 1 1 0 0 0	60, 572, 1084, and 1596
19.5366	0 0 0 1 1 0 0 0 0	24, 536, 1048, and 1560
19.5647	0 1 1 1 1 1 1 0 0	126, 638, 1150, and 1662
19.5879	0 0 1 1 1 1 1 0 0	124, 636, 1148, and 1660
19.6314	1 1 1 0 0 0 0 1 0	135, 647, 1159, and 1671
19.6918	1 1 0 0 1 0 0 0 1	275, 787, 1299, and 1811
19.7080	0 1 0 1 0 0 0 1 0	138, 650, 1162, and 1674
19.7103	1 1 0 1 1 0 0 0 0	27, 539, 1051, and 1563

FIG. 11

12/34

max(PAPR) (dB)	AID sequence in VHTSIGA	AID values marked/reserved for STA-to-AP packets
10.4334	0 1 0 1 1 0 0 0 0	176, 688, 1200, and 1712
10.5558	0 1 0 0 1 0 1 0 0	148, 660, 1172, and 1684
10.6718	1 1 1 0 0 1 0 0 0	456, 968, 1480, and 1992
10.7120	1 0 1 0 1 1 0 0 1	345, 857, 1369, and 1881
10.8276	0 1 1 1 1 0 0 0 1	241, 753, 1265, and 1777
10.8675	1 1 0 0 1 0 1 0 0	404, 916, 1428, and 1940
10.8695	0 0 0 0 1 1 0 0 0	24, 536, 1048, and 1560
10.9091	0 0 1 1 1 1 1 1 0	126, 638, 1150, and 1662
10.9310	0 0 0 1 1 1 1 0 0	60, 572, 1084, and 1596
10.9822	1 1 1 1 0 1 0 1 1	491, 1003, and 1515
10.9847	1 0 1 1 1 1 1 1 0	382, 894, 1406, and 1918
10.9850	1 0 1 0 0 1 0 1 0	330, 842, 1354, and 1866
11.0186	0 1 0 0 0 1 0 1 0	138, 650, 1162, and 1674
11.0230	1 0 1 0 0 1 0 0 1	329, 841, 1353, and 1865
11.0519	1 0 1 1 1 1 0 1 1	379, 891, 1403, and 1915
11.0520	1 1 0 1 1 1 1 1 0	446, 958, 1470, and 1982

FIG. 12A

13/34

max(PAPR) (dB)	AID sequence in VHTSIGA	AID values marked/reserved for STA-to-AP packets
10.6312	0 1 1 0 1 0 1 1 1	470 982 1494 2006
10.8264	0 0 0 0 0 1 1 0 0	96 608 1120 1632
10.8514	0 0 1 0 1 0 1 1 0	212 724 1236 1748
10.8686	0 1 1 1 1 1 1 0 0	126 638 1150 1662
10.9435	0 1 0 1 1 1 1 1 1	506 1018 1530
10.9637	0 0 1 1 1 1 1 0 0	124 636 1148 1660
10.9995	1 0 0 1 0 0 0 1 0	137 649 1161 1673
11.0374	0 0 1 0 0 0 0 1 0	132 644 1156 1668
11.0544	0 0 0 0 0 0 0 0 1	256 768 1280 1792
11.0977	0 0 1 0 0 0 0 1 1	388 900 1412 1924
11.1265	0 0 1 1 1 1 1 1 1	508 1020 1532
11.1691	0 1 0 1 1 1 1 1 0	250 762 1274 1786
11.1702	0 0 0 1 0 1 0 1 1	424 936 1448 1960
11.1954	0 1 0 0 0 0 0 1 1	386 898 1410 1922
11.2088	0 1 1 1 0 1 1 1 0	238 750 1262 1774
11.2117	0 1 1 1 1 1 0 0 0	62 574 1086 1598

FIG. 12B

14/34

max(PAPR) (dB)	AID sequence in VHTSIGA	AID values marked/reserved for STA-to-AP packets
11.5776	1 0 0 0 1 0 1 1 0	209 721 1233 1745
11.6432	0 0 1 0 0 0 0 0 0	4 516 1028 1540
11.6567	0 1 0 1 1 1 1 0 0	122 634 1146 1658
11.7965	1 0 0 1 0 0 0 1 0	137 649 1161 1673
12.0344	0 1 1 1 1 0 0 0 0	30 542 1054 1566
12.0691	0 1 1 1 1 0 1 0 0	94 606 1118 1630
12.0704	0 0 0 1 1 0 0 0 0	24 536 1048 1560
12.0771	1 0 0 1 0 0 0 1 1	393 905 1417 1929
12.1068	0 0 1 1 0 1 1 0 1	364 876 1388 1900
12.1235	0 1 0 1 0 0 1 1 1	458 970 1482 1994
12.1421	0 1 0 0 1 0 0 0 0	18 530 1042 1554
12.1523	0 0 0 0 0 1 1 0 1	352 864 1376 1888
12.1691	0 0 0 1 1 1 0 0 1	312 824 1336 1848
12.1795	0 1 0 0 1 0 0 0 1	274 786 1298 1810
12.1932	1 1 0 0 1 0 1 1 0	211 723 1235 1747
12.1996	0 0 0 1 0 1 1 0 0	104 616 1128 1640

FIG. 12C

15/34

max(PAPR) (dB)	AID sequence in VHTSIGA	AID values marked/reserved for STA-to-AP packets
10.6134	1 0 0 1 0 0 1 1 1	457 969 1481 1993
10.6991	0 0 0 0 1 1 1 1 1	496 1008 1520
10.7089	1 0 1 1 0 0 0 0 1	269 781 1293 1805
10.9557	0 0 1 1 1 0 0 1 1	412 924 1436 1948
10.9608	0 1 1 1 1 1 1 0 1	382 894 1406 1918
10.9630	1 0 1 0 1 0 0 1 0	149 661 1173 1685
10.9927	0 1 1 1 1 0 0 0 0	30 542 1054 1566
11.0066	0 1 0 0 0 0 1 0 1	322 834 1346 1858
11.0096	0 0 1 0 1 1 0 0 1	308 820 1332 1844
11.0640	0 0 1 1 1 1 1 0 0	124 636 1148 1660
11.0696	0 1 1 1 0 0 0 1 1	398 910 1422 1934
11.0976	0 0 0 1 1 0 0 0 0	24 536 1048 1560
11.1294	1 0 0 1 0 1 1 0 1	361 873 1385 1897
11.1321	0 1 1 1 1 0 1 0 0	94 606 1118 1630
11.1380	0 0 0 0 1 1 0 1 1	432 944 1456 1968
11.1396	0 0 1 1 1 1 0 1 1	444 956 1468 1980

FIG. 12D

16/34

max(PAPR) (dB)	AID sequence in VHTSIGA	AID values marked/reserved for STA-to-AP packets
10.3455	0 0 0 0 0 1 1 1 0	224 736 1248 1760
10.4611	0 0 1 0 0 1 1 1 1	484 996 1508
10.4881	1 1 1 1 0 1 0 1 1	431 943 1455 1967
10.5009	1 1 1 0 0 1 0 1 1	423 935 1447 1959
10.5313	0 1 0 0 1 1 1 0 0	114 626 1138 1650
10.5766	0 0 1 0 1 0 1 0 1	340 852 1364 1876
10.5941	1 1 0 0 1 1 1 1 0	243 755 1267 1779
10.6287	0 1 0 0 1 0 1 0 1	338 850 1362 1874
10.6426	1 0 1 1 0 1 1 1 0	237 749 1261 1773
10.6741	0 1 1 0 1 1 0 1 1	438 950 1462 1974
10.6871	1 0 0 1 1 1 1 0 0	121 633 1145 1657
10.6907	0 0 0 0 0 0 1 1 1	448 960 1472 1984
10.7559	0 0 1 1 0 1 0 0 1	300 812 1324 1836
10.8092	0 0 0 1 1 0 0 0 0	24 536 1048 1560
10.8256	1 0 0 0 1 1 0 0 1	305 817 1329 1841
10.8394	0 1 1 0 1 1 0 0 0	54 566 1078 1590

FIG. 12E

17/34

max(PAPR) (dB)	AID sequence in VHTSIGA	Decimal AID values
17.5952	1 1 1 1 1 1 1 1 1	511, 1023, and 1535
15.4745	1 1 1 1 0 1 0 1 0	175, 687, 1199, and 1711
15.4684	1 1 1 1 1 1 1 0 0	127, 639, 1151, and 1663
15.1256	1 1 1 1 1 1 1 1 0	255, 767, 1279, and 1791
15.0843	1 1 0 0 1 1 0 0 0	51, 563, 1075, and 1587
15.0243	1 1 1 0 1 0 1 0 1	343, 855, 1367, and 1879
14.8428	1 1 1 1 1 1 0 0 0	63, 575, 1087, and 1599
14.4966	1 0 0 1 1 0 0 0 1	281, 793, 1305, and 1817
14.3754	1 1 0 1 0 1 0 1 0	171, 683, 1195, and 1707
14.3559	1 1 1 1 1 1 0 1 0	191, 703, 1215, and 1727
14.3101	1 1 1 1 1 1 0 0 1	319, 831, 1343, and 1855
14.2666	1 0 1 0 1 1 1 0 0	117, 629, 1141, and 1653
14.2459	1 1 1 1 1 0 1 0 0	95, 607, 1119, and 1631
14.2253	1 1 1 1 1 0 0 0 1	287, 799, 1311, and 1823
14.1899	1 1 1 1 0 1 0 0 1	303, 815, 1327, and 1839
14.0905	1 0 0 1 1 1 1 0 1	377, 889, 1401, and 1913

FIG. 13A

18/34

max(PAPR) (dB)	AID sequence in VHTSIGA	Decimal AID values
16.3099	1 1 1 1 1 1 1 1 1	511 1023 1535
15.7377	1 1 1 1 1 1 1 1 0	255 767 1279 1791
15.7038	1 1 1 1 0 0 1 1 0	207 719 1231 1743
15.6868	1 1 1 1 1 1 1 0 1	383 895 1407 1919
15.6156	1 1 1 1 1 0 0 1 1	415 927 1439 1951
15.2874	1 1 1 0 0 1 1 0 0	103 615 1127 1639
15.1706	1 0 1 0 1 0 1 1 1	469 981 1493 2005
15.1330	0 0 1 1 1 1 0 0 1	316 828 1340 1852
15.0871	1 1 1 1 1 1 1 0 0	127 639 1151 1663
15.0869	1 1 1 1 1 1 0 1 0	191 703 1215 1727
15.0346	1 1 1 1 1 0 1 0 0	95 607 1119 1631
14.6897	1 1 0 0 1 1 0 0 0	51 563 1075 1587
14.6477	1 1 0 1 0 1 0 1 1	427 939 1451 1963
14.5699	1 0 0 1 1 0 0 0 0	25 537 1049 1561
14.5361	1 1 1 0 1 0 0 0 0	23 535 1047 1559
14.5070	0 1 0 1 0 1 1 1 0	234 746 1258 1770

FIG. 13B

19/34

max(PAPR) (dB)	AID sequence in VHTSIGA	Decimal AID values
17.7338	1 1 1 1 1 1 1 1 1	511 1023 1535
16.2391	1 1 1 1 1 1 1 1 0	255 767 1279 1791
15.7038	1 1 1 1 0 0 1 1 0	207 719 1231 1743
15.6868	1 1 1 1 1 1 1 0 1	383 895 1407 1919
15.6813	1 1 1 1 0 1 0 1 0	175 687 1199 1711
15.6178	1 1 1 1 1 1 1 0 0	127 639 1151 1663
15.6174	1 1 1 1 1 0 1 0 1	351 863 1375 1887
15.6156	1 1 1 1 1 0 0 1 1	415 927 1439 1951
15.6064	1 1 1 1 1 1 0 1 0	191 703 1215 1727
15.5839	1 1 1 1 1 1 0 0 1	319 831 1343 1855
15.2874	1 1 1 0 0 1 1 0 0	103 615 1127 1639
15.2518	1 1 0 0 1 1 0 0 0	51 563 1075 1587
15.2441	1 1 1 0 1 0 1 0 1	343 855 1367 1879
15.2168	1 1 0 1 0 1 0 1 1	427 939 1451 1963
15.1706	1 0 1 0 1 0 1 1 1	469 981 1493 2005
15.1330	0 0 1 1 1 1 0 0 1	316 828 1340 1852

FIG. 13C

20/34

max(PAPR) (dB)	AID sequence in VHTSIGA	Decimal AID values
16.1862	1 1 1 1 1 1 1 1 1	511 1023 1535
15.6139	1 1 1 1 1 1 1 1 0	255 767 1279 1791
15.5484	1 1 1 1 1 1 1 0 1	383 895 1407 1919
15.4894	1 1 1 1 0 0 1 1 0	207 719 1231 1743
15.4199	1 1 1 1 1 0 0 1 1	415 927 1439 1951
15.0601	1 1 1 0 0 1 1 0 0	103 615 1127 1639
15.0313	1 0 1 0 1 0 1 1 1	469 981 1493 2005
14.9538	1 1 1 1 1 1 1 0 0	127 639 1151 1663
14.9387	1 1 1 1 1 1 0 1 0	191 703 1215 1727
14.8537	1 1 1 1 1 0 1 0 0	95 607 1119 1631
14.5382	1 1 0 0 1 1 0 0 0	51 563 1075 1587
14.5054	1 1 0 1 0 1 0 1 1	427 939 1451 1963
14.4312	1 0 0 1 1 0 0 0 0	25 537 1049 1561
14.3918	1 0 0 0 0 1 1 1 0	225 737 1249 1761
14.3503	0 1 0 1 0 1 1 1 0	234 746 1258 1770
14.3086	1 1 1 1 1 0 1 0 1	351 863 1375 1887

FIG. 13D

21/34

max(PAPR) (dB)	AID sequence in VHTSIGA	Decimal AID values
15.1988	1 1 1 0 0 0 0 1 1	391 903 1415 1927
15.1132	1 1 1 0 1 0 1 1 0	215 727 1239 1751
15.0985	1 1 0 0 0 0 1 1 0	195 707 1219 1731
14.5890	1 1 0 1 0 0 1 0 0	75 587 1099 1611
14.0825	1 0 1 0 1 0 1 0 1	341 853 1365 1877
13.8925	1 1 0 0 0 1 1 1 0	227 739 1251 1763
13.8331	1 1 0 0 0 1 0 1 1	419 931 1443 1955
13.7631	1 1 1 0 1 0 1 0 1	343 855 1367 1879
13.7311	1 0 0 1 0 0 1 0 1	329 841 1353 1865
13.6998	0 1 0 1 1 1 0 1 1	442 954 1466 1978
13.6742	0 0 0 1 0 1 1 1 0	232 744 1256 1768
13.6470	0 1 0 1 1 1 0 0 0	58 570 1082 1594
13.5026	1 1 0 1 1 0 1 0 1	347 859 1371 1883
13.4516	0 1 1 0 0 0 1 0 0	70 582 1094 1606
13.3867	1 0 1 1 0 0 1 1 0	205 717 1229 1741
13.3194	1 1 1 1 0 1 0 0 1	303 815 1327 1839

FIG. 13E

22/34

PAPR of VHT-SIGA1
Assuming GID = 0 & AID = 0

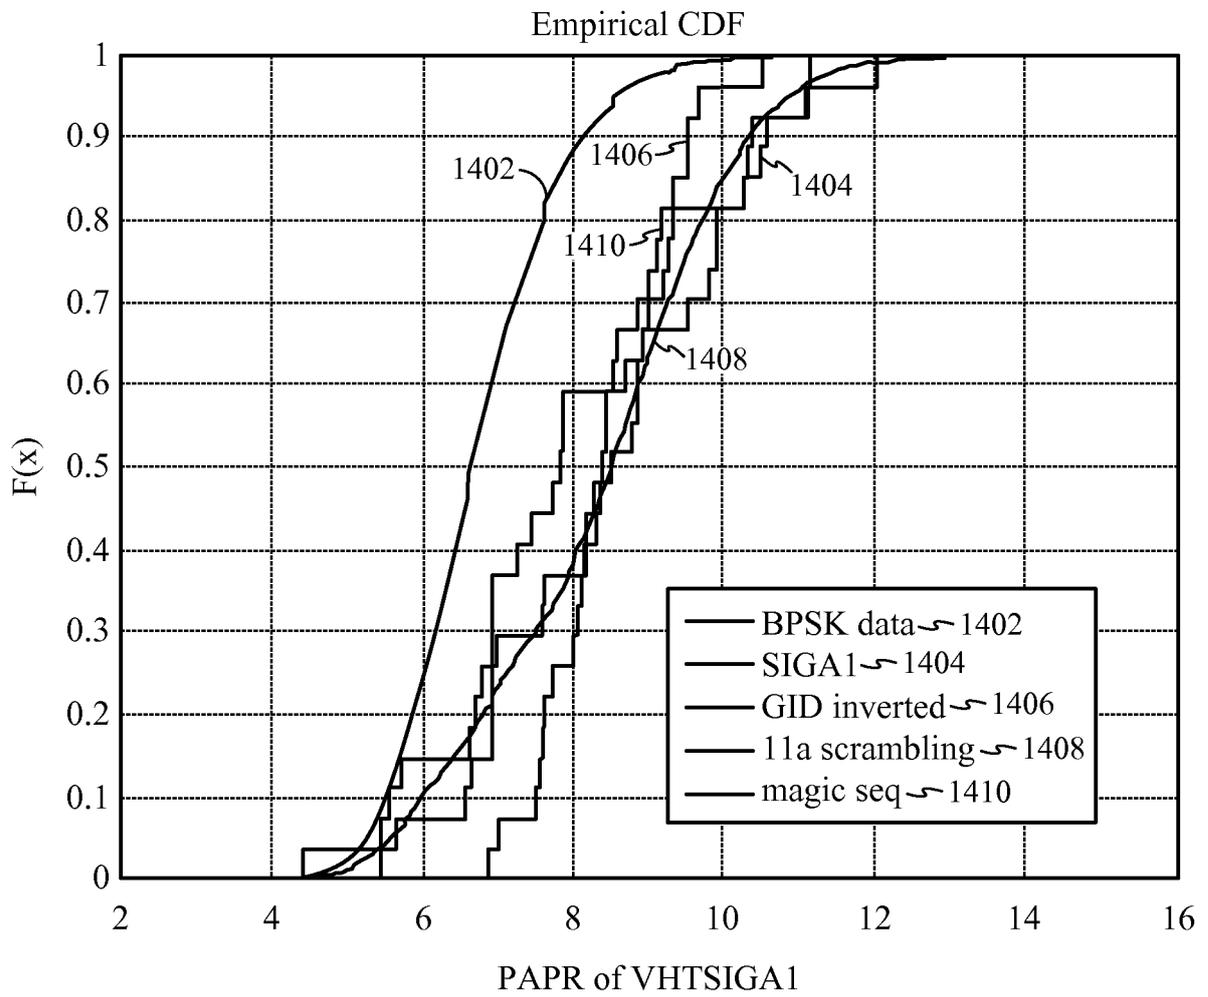


FIG. 14A

PAPR of VHT-SIGA2 Assuming GID = 0 & AID = 0

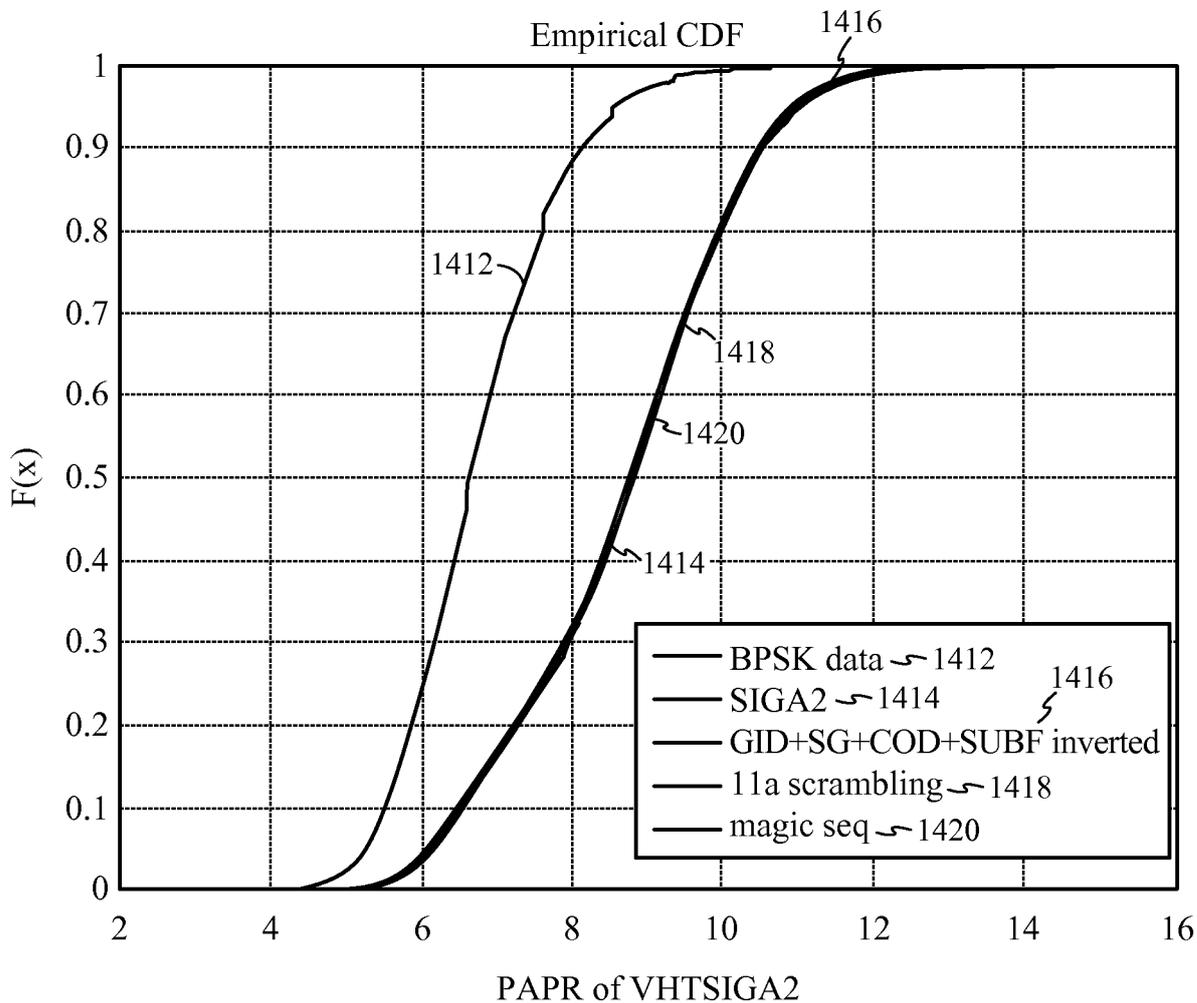


FIG. 14B

VHTSIGA PAPRs of Most Fields = 0

Bit Fill Description	RSVD	Combination	SIGA1	SIGA1 with magic seq	SIGA2	SIGA2 with magic seq	HT SIG1	HT SIG2
(1) SU: All SIGA1 bits are zeros	0	1	16.0951	3.0345			16.4723	8.1486
Solution to (1): Set GID = [111111]	0	1	9.6884					
(2) MU: GID has 1 bit on; Nsts has 2 bits on (two users, with 1 bit each)	0	324	11.1952	11.1394				
(3) MU: All SIGA1 bits zeros except Nsts has 2 bits on (two users, with 1 bit each)	0	54	12.9430	8.8577	1504	1502		
(4) All SIGA2 bits = 0, CRC is based on all bits = 0	0	1			8.9038	4.4206		
(5) All SIGA2 bits = 0, CRC is based on GID having 1 bit on; Nsts having 2 bits on	0	324			11.8052	9.5261		
(6) All SIGA2 bits = 0, CRC is based on All SIGA1 bits zeros except Nsts having 2 bits on	0	54			11.8052	9.4132		

FIG. 15A

VHTSIGA PAPRs of Most Fields = 0

Bit Fill Description	RSVD	Combination	SIGA1	SIGA1 with magic seq	SIGA2	SIGA2 with magic seq	HT SIG1	HT SIG2
(7) SU: All SIGA1 bits are zeros	1	1	14.8812	5.5256			16.4723	8.1486
Solution to (7): Set GID = [1111111]	1	1	7.6767					
(8) MU: GID has 1 bit on; Nsts has 2 bits on (two users, with 1 bit each)	1	324	11.1902	11.1394				
(9) MU: All SIGA1 bits zeros except Nsts has 2 bits on (two users, with 1 bit each)	1	54	14.4356	9.4109				
(10) All SIGA2 bits = 0, CRC is based on all bits = 0	1	1			6.4882	6.5340		
(11) All SIGA2 bits = 0, CRC is based on GID having 1 bit on; Nsts having 2 bits on	1	324			10.4742	9.4939		
(12) All SIGA2 bits = 0, CRC is based on All SIGA1 bits zeros except Nsts having 2 bits on	1	54			8.8613	10.3702		

FIG. 15B

**VHTSIGB PAPRs of Most Fields = 0
MU Case**

Bit Fill Description	RSVD	Combination	SIGB PAPR	SIGB with magic seq
(1) All bits are zeros, tail = 0, Length = 14 bytes	N/A	1	12.0605	5.4407
(2) All bits are zeros, tail = 0, Length = 18 bytes	N/A	1	10.8176	7.2981
(3) All bits are zeros, tail = 0, Length = 26 bytes	N/A	1	12.0605	6.0696
(4) All bits are zeros, tail = 0, Length = 64 bytes	N/A	1	12.0605	7.7945

FIG. 16A

**VHTSIGB PAPRs of Most Fields = 0
SU Case with 20MHz**

Bit Fill Description	RSVD	Combination	SIGB PAPR	SIGB with magic seq
(1) All bits are zeros, tail = 0, Length = 14 bytes	0	1	12.0605	5.4407
(2) All bits are zeros, tail = 0, Length = 18 bytes	0	1	10.8176	7.2981
(3) All bits are zeros, tail = 0, Length = 26 bytes	0	1	12.0605	6.0696
(4) All bits are zeros, tail = 0, Length = 64 bytes	0	1	12.0605	7.7945
(5) All bits are zeros, tail = 0, Length = 14 bytes	1	1	6.6582	6.2313
(6) All bits are zeros, tail = 0, Length = 18 bytes	1	1	7.6932	7.6236
(7) All bits are zeros, tail = 0, Length = 26 bytes	1	1	7.4373	6.3536
(8) All bits are zeros, tail = 0, Length = 64 bytes	1	1	6.9968	5.2863

FIG. 16B

VHTSIG PAPRs of All Ones

Bit Fill Description	RSVD	Combination	1704			1706	
			SIGA1 PAPR	SIGA1 w/ magic seq	SIGA2 PAPR	SIGA2 with magic seq	
(1) BW=111(160MHz), STBC=1, GID=111111, Nsts=1,3,5,7, AID=1111111111	1	4	17.5952	9.4646			
(1) BW=111, STBC=1, GID=000000, Nsts=1,3,5,7, AID=1111111111	1	4	13.1085	9.6345			
(3) All ones, CRC is based on all ones except tail is 0	1	1			14.1630	12.3494	

(17A)

Bit Fill Description	RSVD	Combination	1712		1710	
			SIGB PAPR	SIGB with magic seq		
(1) All ones, except tail=0	1	1	9.3666	7.1249		

(17B)

FIG. 17

29/34

PAPR of VHT-SIGA1
Assuming GID = 0 & AID = 0

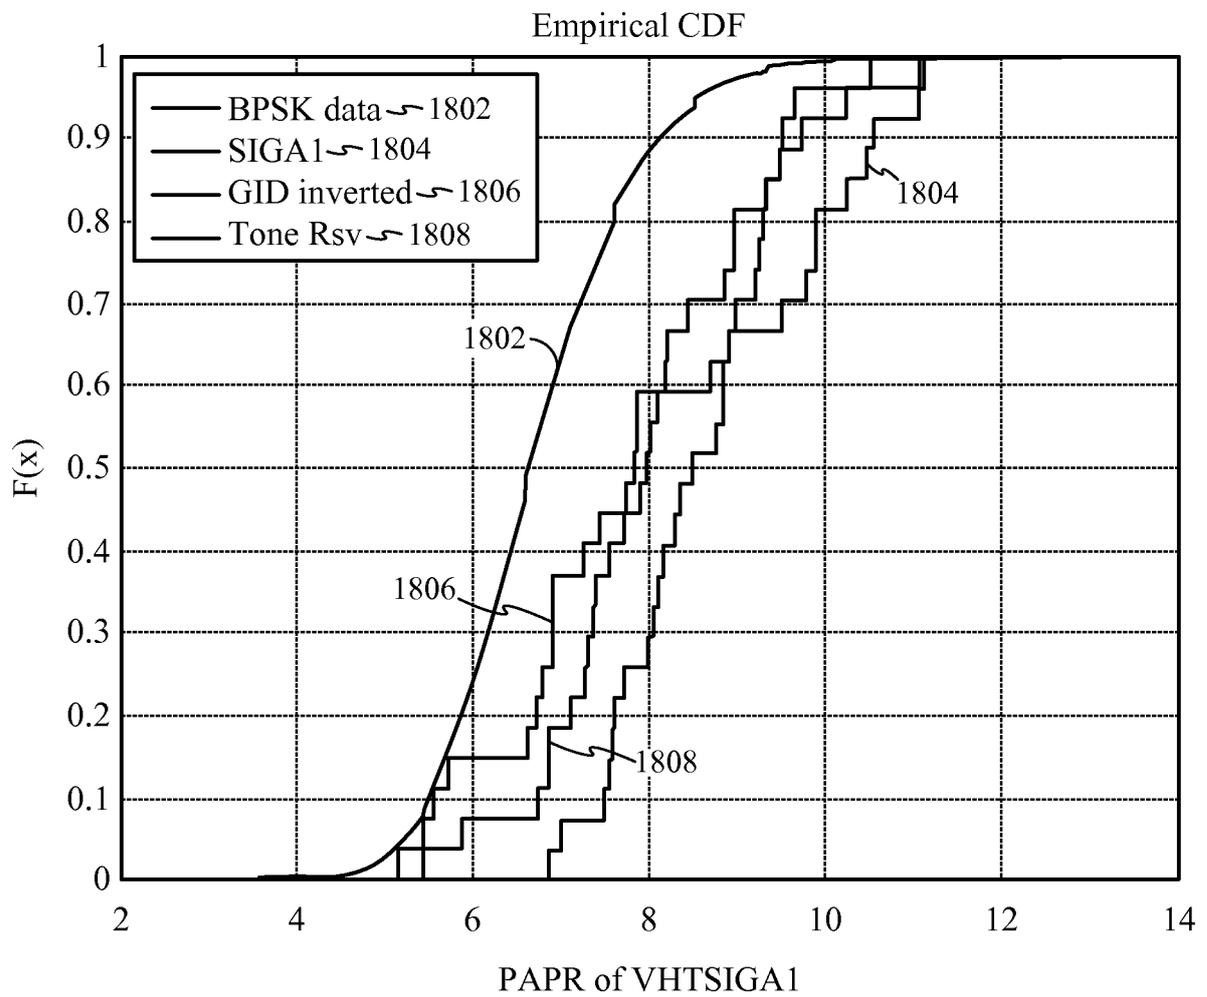


FIG. 18A

30/34

PAPR of VHT-SIGA2
Assuming GID = 0 & AID = 0

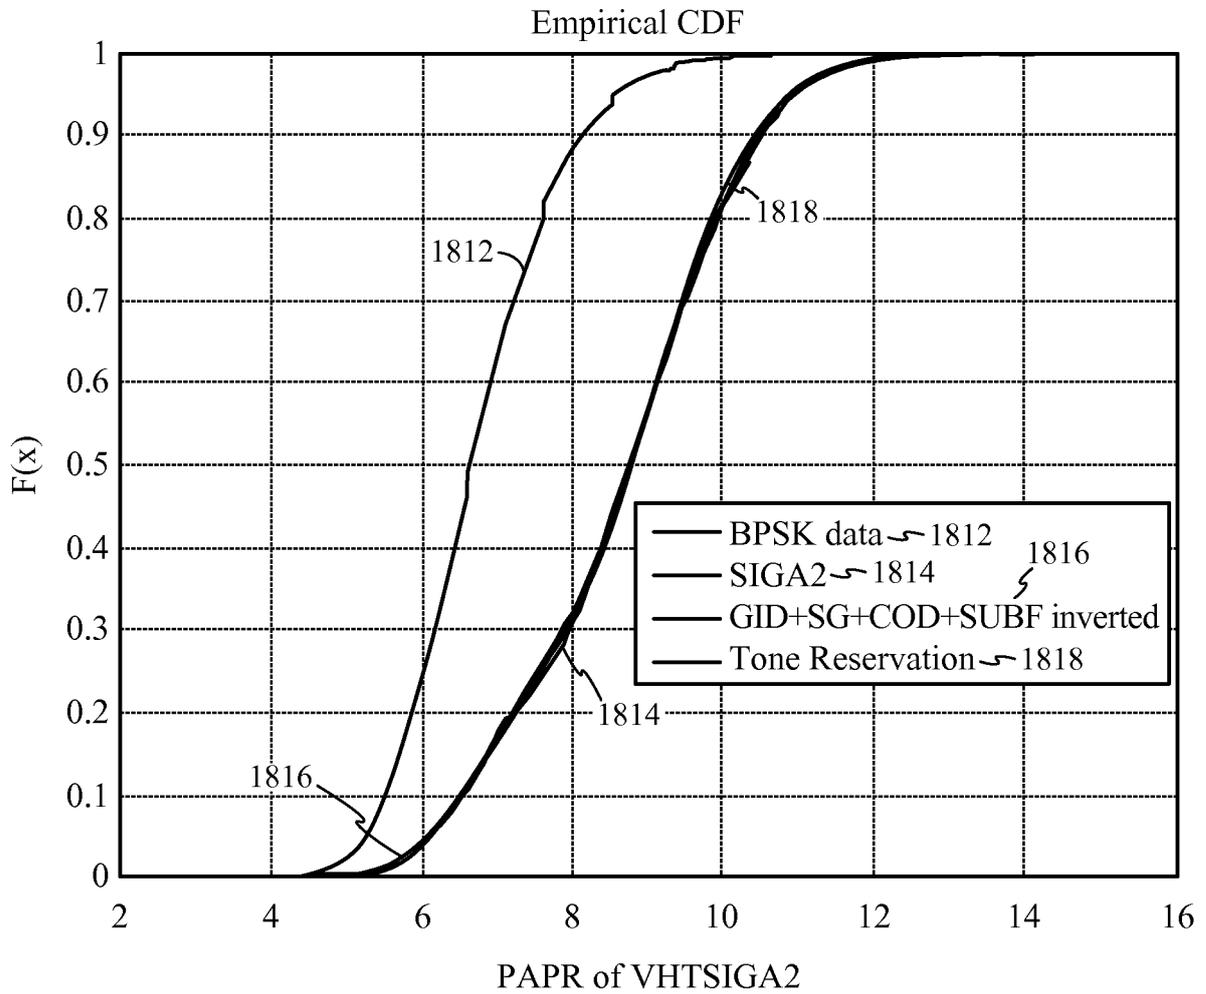


FIG. 18B

31/34

PAPR of VHT-SIGA1
Assuming GID Random

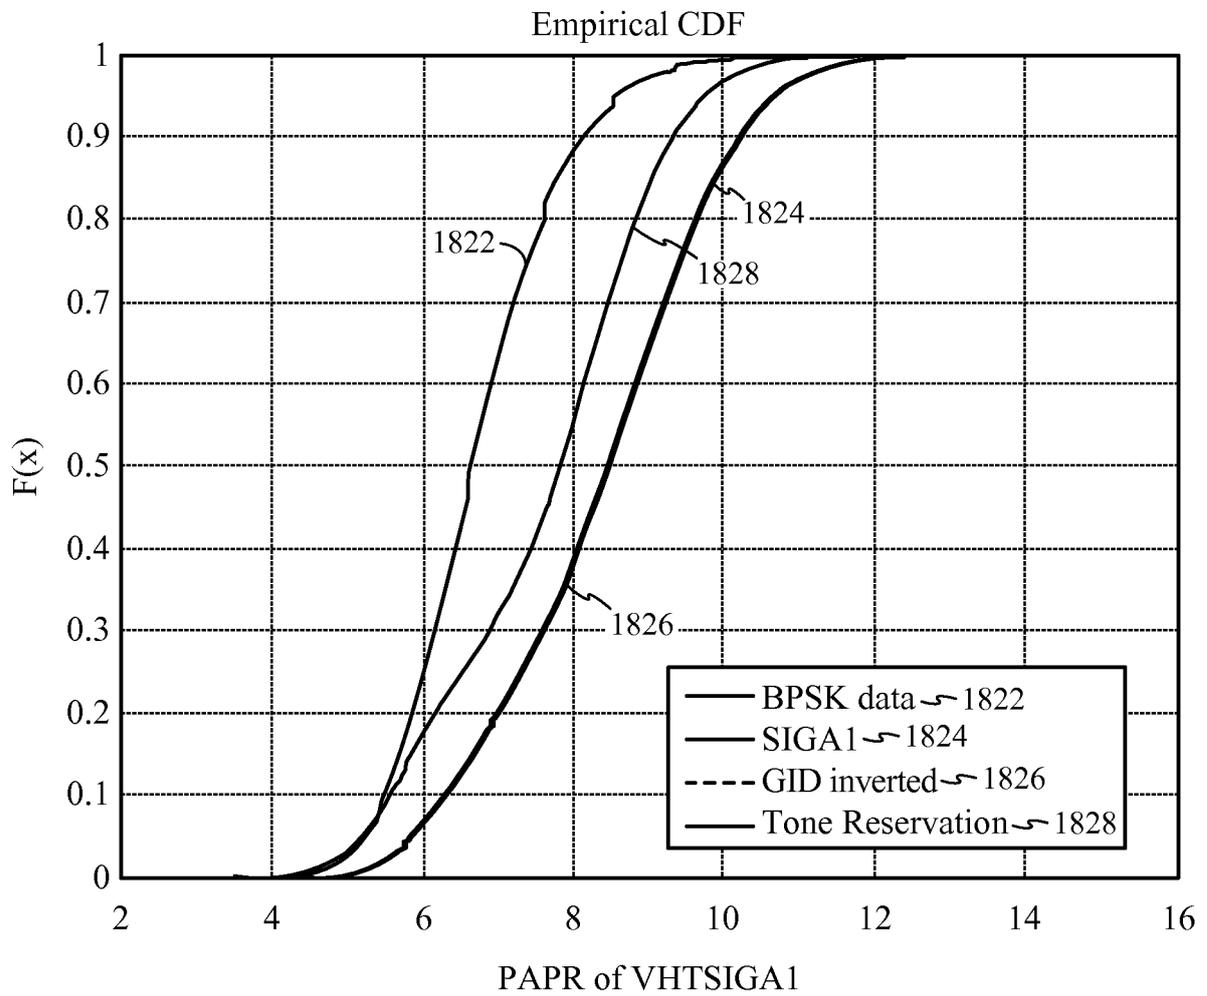


FIG. 18C

PAPR of VHT-SIGA2
Assuming GID Random

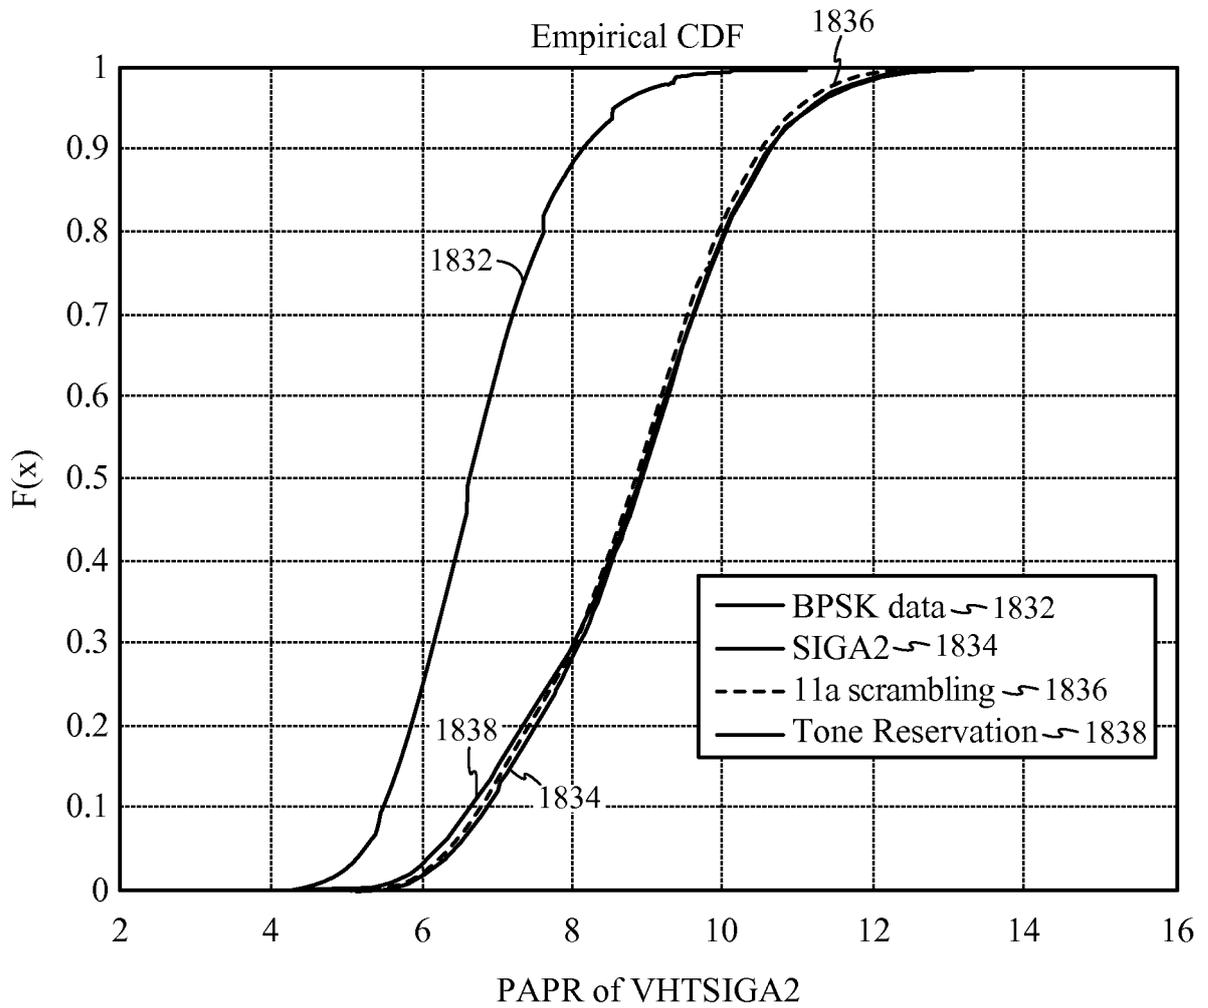


FIG. 18D

PAPR of VHT-SIGA1
Assuming SU

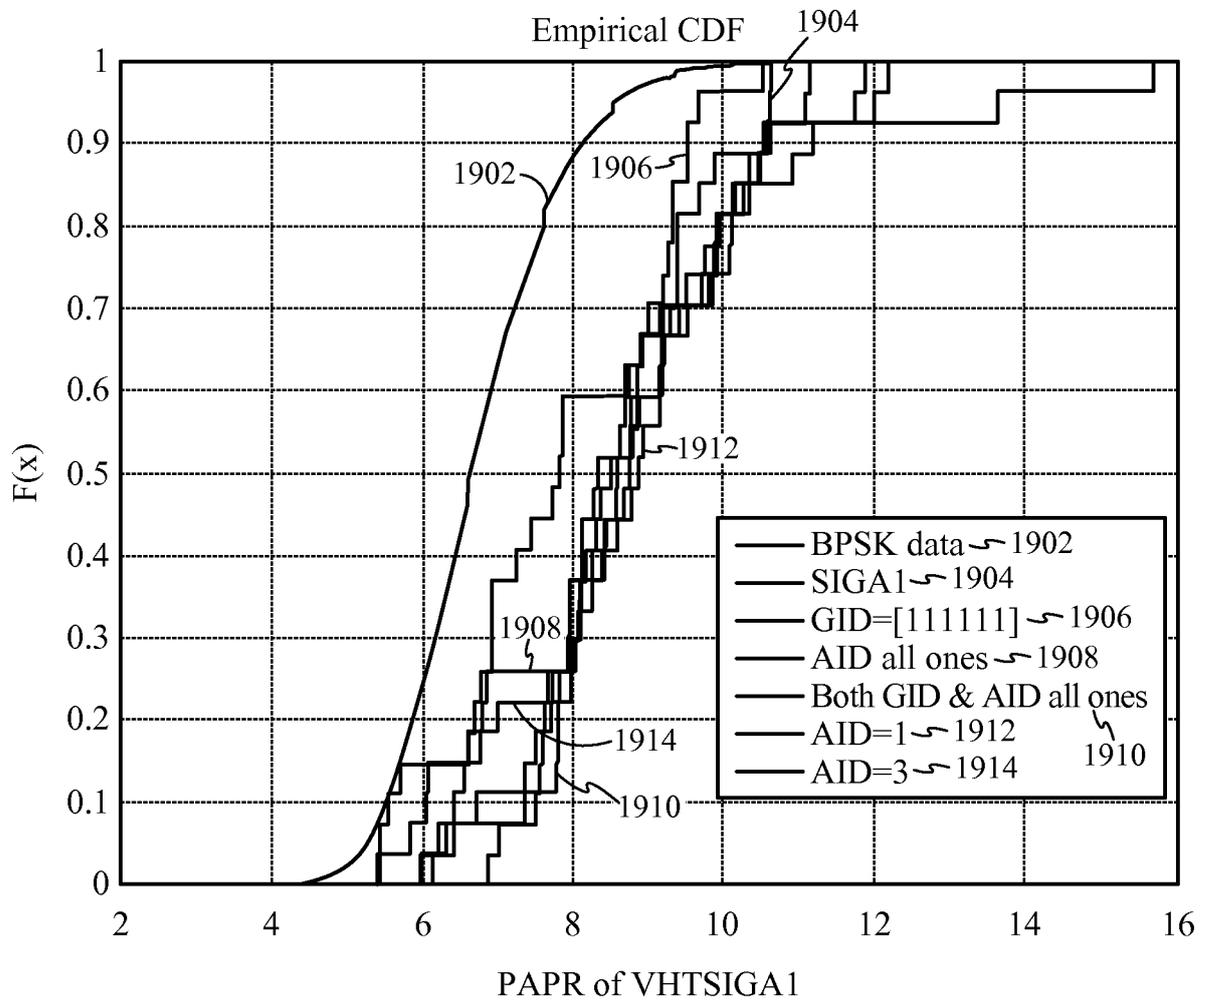


FIG. 19A

PAPR of VHT-SIGA2
Assuming SU

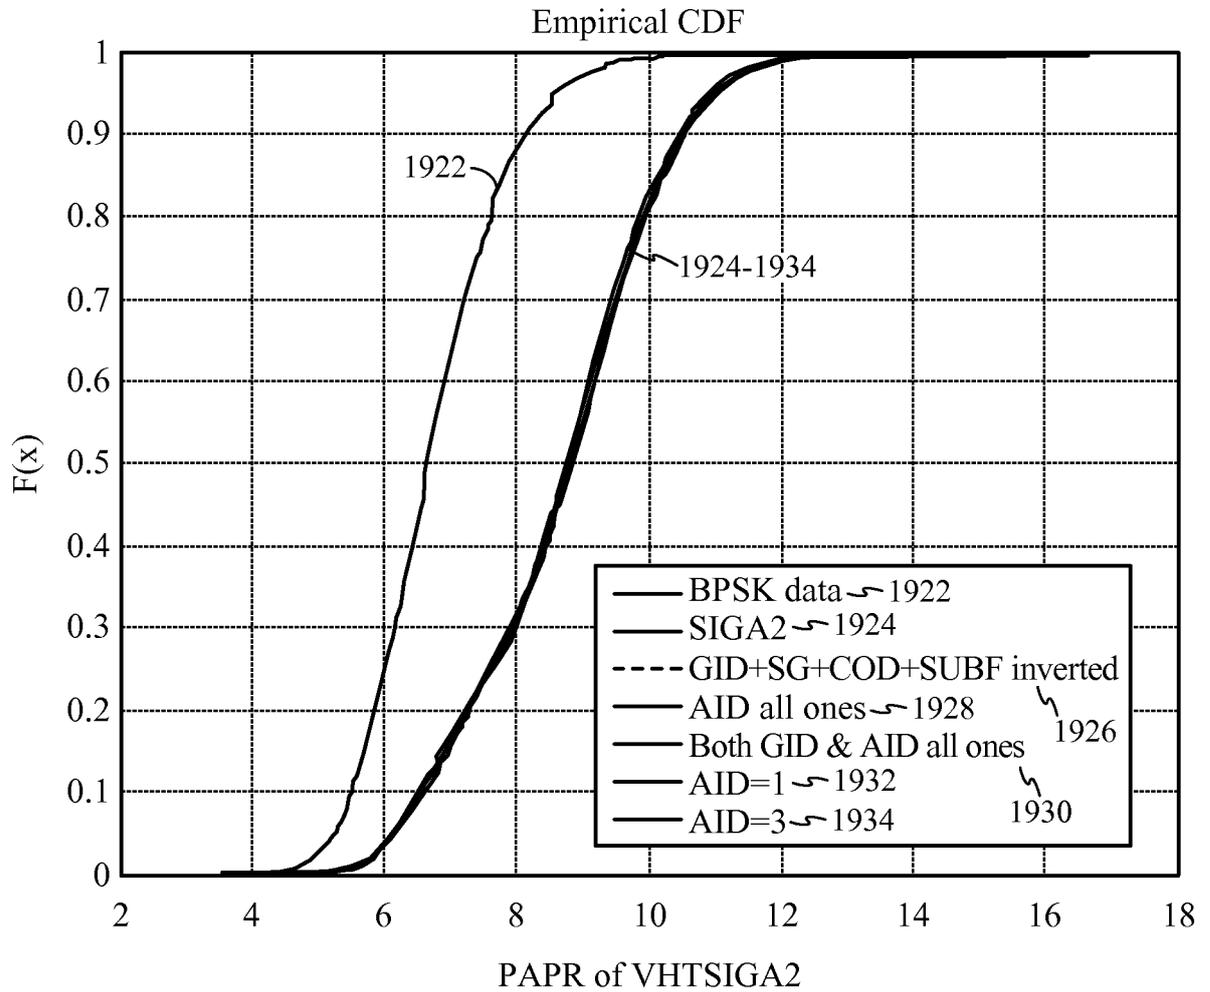


FIG. 19B

400



402

CONSTRUCT A VERY HIGH THROUGHPUT SIGNAL
(VHT-SIG) FIELD



404

SCRAMBLE ONE OR MORE BITS OF THE VHT-SIG FIELD



406

TRANSMIT THE VHT-SIG FIELD WITH ONE OR MORE
SCRAMBLED BITS OVER A WIRELESS CHANNEL