

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 July 2004 (29.07.2004)

PCT

(10) International Publication Number
WO 2004/064269 A1

(51) International Patent Classification⁷: **H04B 7/08**,
17/00, G07C 9/00

(21) International Application Number:
PCT/EP2003/014734

(22) International Filing Date:
22 December 2003 (22.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0300221 10 January 2003 (10.01.2003) FR

(72) Inventor; and

(75) Inventor/Applicant (for US only): **AUFFRET, Eric**
[FR/FR]; 2, rue du Commandant Desguez, F-35530 Noyal
sur Vilaine (FR).

(74) Agent: **ROSSMANITH, Manfred**; Deutsche Thom-
son-Brandt GmbH, European Patent Operations,
Karl-Wiechert-Allee 74, 30625 Hannover (DE).


(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (for all designated States except US): **THOM-
SON LICENSING S.A.** [FR/FR]; 46, quai A. le Gallo,
F-92100 Boulogne-Billancourt (FR).

(84) Designated States (regional): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: DIVERSITY SYSTEM FOR MEASURING RECEPTION QUALITY

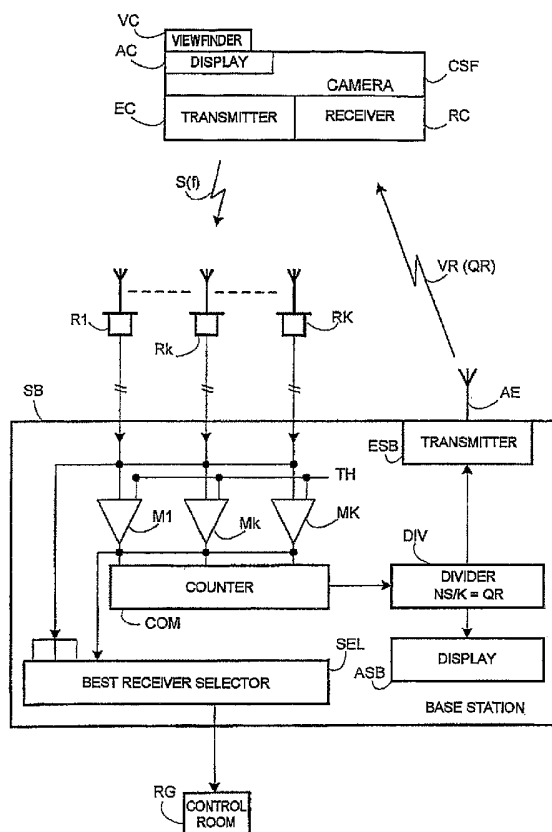

(57) Abstract: To assist an operator to position a wire-
less camera (CSF) so that a base station (SB) receives with
good quality a radiofrequency signal (S) transmitted from
a transmitter (EC) linked to the camera, several measur-
ers (M1-MK) linked to diversity receivers (R1-RK) of the
signal each determine whether a characteristic of the sig-
nal via the respective receiver satisfies a reception crite-
rion (TH). In the base station, a counter (COM) counts the
receivers satisfying the reception criterion, and a divider
(DIV) establishes a reception quality indicator (QR) de-
pendent on the number of satisfactory receivers so as in
particular to retransmit it via a return channel (VR) to the
camera so that it can be displayed thereon.



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

PCT 1/4.

REC'D 15 APR 2004

WIPO PC

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference PF030025	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/EP 03/14734	International filing date (day/month/year) 22/12/2003	(Earliest) Priority Date (day/month/year) 10/01/2003
Applicant THOMSON LICENSING S.A.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.
- ☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).
- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing:
- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

- ☐ the text is approved as submitted by the applicant.
- ☒ the text has been established by this Authority to read as follows:

DIVERSITY SYSTEM FOR MEASURING RECEPTION QUALITY

5. With regard to the **abstract**,

- ☒ the text is approved as submitted by the applicant.
- ☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

- ☒ as suggested by the applicant.
- ☐ because the applicant failed to suggest a figure.
- ☐ because this figure better characterizes the invention.

1
☐ None of the figures.

DIVERSITY SYSTEM FOR MEASURING RECEPTION QUALITY

The present invention concerns a measurement system for measuring the quality of reception at the level of several radiofrequency receivers which receive a predetermined signal transmitted by a transmitter. The predetermined
5 transmitted signal can be a single-carrier signal or a more complex signal, for example frequency or time division multiplexed.

The invention aims more particularly to use such a measurement system assisting an operator of a wireless mobile camera (cameraman) to position it
10 properly to improve the transmission quality of the images and sounds transmitted by a camera-linked transmitter to central means of production (control room, outside broadcasting van), via the receivers.

To achieve this aim, a measurement system according to the invention for measuring the reception quality of a predetermined radiofrequency signal
15 transmitted from a transmission means to several receiver means is characterized in that it comprises:

- several measurement means respectively linked to the receiver means each to determine whether a characteristic of the predetermined signal received by the respective receiver means satisfies a predetermined reception criterion,
- 20 - a counting means to count a number of satisfactory receiver means in which the reception criterion is satisfied, and
- an indicator means to establish a reception quality indicator depending on the number of satisfactory receiver means.

Preferably, the counting means and the indicator means are included in a
25 central measurement means linked to the receiver means.

The predetermined reception criterion is known by those skilled in the art and may, for example, be based on a comparison of the amplitude or power of the signal received by a receiver means, as a characteristic of the predetermined signal, with a predetermined threshold. The one of the receiver
30 means offering the best reception in relation to the predetermined reception criterion will be selected in the central measurement means to retransmit the predetermined signal for example to a television control room when the predetermined signal is a video signal transmitted by the transmission means linked to a mobile wireless camera.

However, the invention does not directly concern the selection of the receiver means offering the best reception, but assistance to the cameraman directing the camera so that he positions the camera according to the reception quality indicator so that the said indicator is higher than the predetermined threshold.

As will be seen in what follows, the invention provides several variants of embodiment as concerns the transmission system comprising the reception means linked to the camera and the receiver means linked to the central measurement means. This system of transmission can operate in space diversity and/or frequency diversity and/or polarization diversity and/or time diversity.

Preferably, to better assist the cameraman near the camera, a return radio channel is provided over which the reception quality indicator is transmitted via a transmitter means included in the central measurement means to a reception means linked to the transmission means in order to display thereon the reception quality indicator.

According to a more complex embodiment, the receiver means are organized like a cellular telecommunications network. In this embodiment, several cellular receiver means each include several measurer means, a counting means and an indicator means in order to establish and transmit respective reception quality indicators to the central measurement means.

Other characteristics and advantages of the present invention will appear more clearly on reading the following description of several preferred embodiments of the invention with reference to the corresponding attached drawings in which:

- figure 1 is a block diagram of a measurement system according to a first embodiment of the invention, comprising a camera with a transmitter and with a receiver and a base station linked to distributed receivers;

- figure 2 is a block diagram of a base station similar to that in figure 1 but concentrating the receivers;

- figure 3 is a block diagram of a frequency diversity base station according to a first variant;

- figure 4 is a block diagram of a polarization diversity base station according to a second variant;

- figure 5 is a block diagram of a time diversity base station according to a third variant; and

5 - figure 6 is a block diagram of a base station with cellular receivers distributed in elementary cells.

With reference to figure 1, a reception quality measurement system according to the invention comprises a radiofrequency transmitter EC linked to a
10 mobile wireless camera CSF, K elementary radiofrequency receivers R1 to RK and a base station SB constituting a central measurement means.

In this first embodiment illustrated in figure 1, the K elementary receivers R1 to RK operate in space diversity, that is a predetermined signal $S(f)$ is transmitted at a predetermined frequency f by the transmitter EC and received
15 by the receivers R1 to RK. The receivers R1 to RK are installed in different locations in order to have the disparity of the transmission channel between the transmitter EC and the receivers in three dimensional space. However, as a variant, the receivers Ra1 to RaK are concentrated in the base station Sba, as shown in figure 2.

20 As shown in figures 1 and 2 and in the subsequent figures, each elementary receiver Rk, where $2 \leq k \leq K$, is schematized by a reception antenna although the elementary receiver Rk comprises after the antenna various known respective means of processing the received signal to apply a baseband signal to the base station SB. When the receivers Ra1 to RaK are concentrated in the
25 base station SBa, the K signal processing means in the receivers constitute K parallel reception channels, as is known.

The predetermined transmitted signal $S(f)$ is for example a modulation signal on a carrier f which conveys a video image and sound signal (analogue or digital) produced by the camera CSF to, for example, a television control room
30 RG via the base station SB.

In addition to the radio downlink between the transmitter EC and the receivers R1 to RK transmitting the signal S_f , the measurement system also comprises a return radio channel VR to transmit instructions and remote controls from the base station SB via a transmitter and transmission antenna AE

of the latter to a radiofrequency receiver RC linked to the camera CSF. The instructions and remote controls are intended for an operator - cameraman handling the camera CSF and/or for the camera itself CSF. The return radio channel VR is used according to the invention also to transmit a reception quality indicator QR.

To evaluate the reception quality indicator QR, the base station SB comprises K measurers M1 to MK respectively linked to the output of the elementary receivers R1 to RK. Each measurer Mk, where $1 \leq k \leq K$, measures a predetermined characteristic of the signal received by the respective receiver Rk. The measurer Rk is included in the base station SB, as shown in figures 1 and 2, or is integrated into the respective receiver Rk. For example, the predetermined characteristic that is measured in the measurer Mk is the amplitude or power of the signal received. The measurer Mk then comprises a comparator with a predetermined threshold TH. The output of the comparator is at a first logical state "1" indicating that the amplitude or the power received is greater than the threshold TH and at a second logical state "0" when the amplitude or the power received is below the threshold TH.

The base station SB also comprises a counter COM which counts the numbers NS of satisfactory elementary receivers of the K receivers, in which the reception criterion is satisfied, that is the amplitude or the power received is equal to or greater than the predetermined threshold TH. The number NS is equal to the number of outputs of the measurers M1 to MK at the state "1".

The base station SB comprises another divider DIV to establish the reception quality indicator QR depending on the number NS of satisfactory elementary receivers. In this instance, the indicator QR is equal to the ratio NS/K of the number of receivers in which the amplitude or power received is equal to or greater than the threshold TH over the total number K of receivers R1 to RK.

The number K of elementary receivers R1 to RK is equal to at least 2 and may be increased. It is chosen depending on the cost of the measurement system and the volume of the various equipment implemented in it.

For example, when the number K is equal to 3, the base station SB transmits an alarm when no receiver R1 to RK = R3 receives a signal of which the amplitude or the power is greater than the threshold TH. If one, two or three

output logical signals from the measurers M1 to M3 are at the state "1", that is if one, two or three of the measurers M1 to M3 have processed signals with an amplitude or a power equal to or greater than the threshold TH, the reception quality indicator QR is equal to 33%, 66% or 100%. The base station SB then
5 selects only the receiver that has satisfied the comparison criterion or selects one of the two or three receivers that have satisfied the comparison criterion to process the composite video signal received for retransmission for example to the television control room RG. In practice, one receiver of the K receivers R1 to RK that satisfies the predetermined reception criteria and presents the best
10 reception, that is the highest level of amplitude or power, is determined by a best-receiver selector SEL.

The reception quality indicator QR established by the divider DIV is transmitted by the transmitter ESB and the transmission antenna AE of the base station SB via the return radio channel VR to the camera receiver RC. The
15 indicator QR is indicated to the cameraman of the camera CSF on an external display AC dedicated to that indicator or directly in a viewfinder VC of the camera CSF. The reception quality indicator QR thus transmitted to the cameraman prompts him to move the camera CSF linked to the transmitter EC and to the receiver RC to find the camera position in which the displayed
20 indicator value QR is the highest in order to optimize the reception quality in the base station SB and thus ensure transmission of the signal S(f) under the best conditions.

Preferably, the reception quality indicator QR is also communicated to an operator located in the base station SB by means of a display ASB for example
25 of the LED diode, or electroluminescent bar or liquid crystal type.

The measurement system according to the invention is not restricted to space diversity reception, as shown in figures 1 and 2, but can operate according to other modes of diversity shown below in figures 3 to 5. For the
30 purposes of simplification, the circuits COM, DIV, SEL and ASB found in all the base stations have not been shown.

According to a first variant shown in figure 3, the transmitter EC linked to the wireless camera CSF transmits a composite signal S composed of M signals supporting the same composite information of the video signal propagated on

different carrier frequencies F1 to FM, where the integer $M \geq 2$, knowing that the behaviour of the transmission channel between the transmitter EC and the base station SBb can vary according to the carrier frequency. In this variant, the base station SBb comprises only one broadband reception antenna AR which is
5 linked via a power distributor REP to M elementary receivers Rb1 to RbM filtering, demodulating and processing respectively the received signals with the carriers F1 to FM linked respectively to amplitude or power measurers Mb1 to MbM. The counting COM and divider DIV logic circuits are linked to the outputs of the measurers Mb1 to MbM to evaluate the reception quality indicator QR, as
10 in figures 1 and 2. The reception quality indicator QR is expressed in this variant according to the number of carriers satisfying the predetermined reception criterion. Also a selector SEL linked to the outputs of the receivers Rb1 to RbM selects the carrier presenting the best reception quality.

According to a second variant shown in figure 4, the transmitter EC linked
15 to the camera CSF transmits the composite video signal Sf according to two orthogonal polarizations of the electric field, this requiring two elementary receivers Rc1 and Rc2, where necessary with two distinct reception antennae in the base station SBc. The base station SBc also comprises two measurers Mc1 and Mc2 at the outputs of the receivers Rc1 and Rc2, linked to the COM-DIV
20 circuit and to the selector SEL. More generally in this variant, the base station SBc may comprise more than two receivers designed to receive respectively several signals transmitted with the same information by the transmitter EC, but according to different polarizations of the electric field, respectively.

According to a third variant shown in figure 5, the transmitter EC linked to
25 the camera CSF transmits the same signal several times at different instants. For example, the transmitter EC transmits the signal S representative of one or more samples of the video signal to be transmitted repetitively in N consecutive time slots IT1 to ITN, where $N \geq 2$. The set of N slots is, for example, signalled by a synchronization slot preceding them. All the successive signals transmitted
30 during the slots IT1 to ITN are received by a single antenna AR in the base station SBd and are demultiplexed in a demultiplexer DEM so as to be processed in N elementary receivers Rd1 to RdN linked respectively to amplitude or power measurers Md1 to MdN. The transmission of the same signal S at different instants makes it possible to take advantage of the

behaviour of the transmission channel varying over time between the transmitter EC and the base station SBd. So that the counter COM at the output of the measurers Md1 to MdN and the best-receiver selector SEL at the output of the receivers Rd1 to RdN are able to process the signals output from the measurers and receivers in synchronism, the signals received in the slots IT1 to ITN are delayed respectively by N-1 to 0 time slot durations respectively, for example by means of delay circuits or appropriate memories.

The different variants presented above of the measurement system can be combined. The base station can process signals transmitted by the transmitter EC in space diversity and/or frequency diversity and/or polarization diversity and/or time diversity.

According to another preferred embodiment of the invention, the measurement system on the base station SBe side is much more extensive in order to ensure greater mobility of the wireless camera CSF. The base station SBe is linked to Q diversity cellular receivers RC1 to RCQ, where $Q \geq 2$. As is known in a digital cellular network for mobile radio telephones, each cellular receiver RCq, where $1 \leq q \leq Q$, is particular to receiving signals at a respective carrier frequency Fq. For this respective frequency Fq, the elementary receiver RCq can operate, like the base station shown in figures 1 to 5, in space diversity and/or frequency diversity and/or polarization diversity and/or time diversity. The receiver RCq comprises in consequence several diversity receivers, amplitude or power measurers, the counter COM and the divider DIV according to the variants described above.

In this embodiment, a best-receiver selector in the base station SBe chooses the best cell, that is the best receiver RC1 to RCQ of which the selector SEL retransmits the best signal received, according to a predetermined criterion similar to those according to the variants illustrated in figures 1 to 5. The quality indicators QR1 to QRQ produced by the divider DIV in the cellular receivers RC1 to RCQ are transmitted to the base station SBe whose transmitter ASB retransmits them to the receiver RC of the camera over the return radio channel VR. In the display ASB in the base station Sbe and/or in the display AC linked to the camera CSF, the reception quality indicators QR1 to QRQ are presented in association with index numbers 1 to Q of the respective cells. Particularly in the

base station SBe, the indicators QR1 to QRQ are displayed on a map substantially in the locations where the cellular receivers RC1 to RCQ are found. Such a map superimposing the reception quality indicators QR1 to QRQ with the locations of the receivers RC1 to RCQ respectively indicated by their index numbers 1 to Q can be displayed advantageously by means of the screen of a computer of the PC type.

This display presents the following advantages:

- the cameraman can have complete autonomy to manage the positioning of the camera CSF, within a cell or on the boundary of two or more cells, to optimize the quality of transmission without the help of another operator supervising the transmission at the base station;

- it enables the cameraman to locate himself in relation to the system's cellular receivers and to its particular topology; furthermore, an operator situated at the base station SBe or in the television control room RG can easily locate the cameraman in relation to RC1 to RCQ;

- when the camera CSF is situated substantially at the boundary between two cells, the operator can choose the cell offering the best reception quality by requesting that the camera be moved to that cell.

CLAIMS

1 - Measurement system for measuring the reception quality of a predetermined radiofrequency signal transmitted from a transmission means (EC) to several receiver means (R1-RK), characterized in that it comprises:

- several measurer means (M1-MK) respectively linked to the receiver means (R1-RK) each to determine whether a characteristic of the predetermined signal (S) received by the respective receiver means satisfies a predetermined reception criterion (TH),
- a counting means (COM) to count a number of satisfactory receiver means in which the reception criterion is satisfied, and
- an indicator means (DIV) to establish a reception quality indicator (QR) depending on the number of satisfactory receiver means.

2 - Measurement system as in claim 1, in which the counting means (COM) and the indicator means (DIV) are included in a central measurement means (SB) linked to the receiver means (R1-RK).

3 - Measurement system as in claim 2, in which a display (ASB) of the measurement means displays the reception quality indicator (QR).

4 - Measurement system as in one of claims 1 to 3, in which the transmission means (EC) and the receiver means (R1-RK) operate in space diversity or in frequency diversity or in polarization diversity or in time diversity.

5 - Measurement system as in any of claims 1 to 4, comprising a return radio channel (VR) over which the reception quality indicator (QR) is transmitted via a transmitter means (ESB, AE) to a reception means (RC) linked to the transmission means (EC) in order to display thereon (AC, VC) the reception quality indicator (QR).

6 - Measurement system as in any of claims 1 to 5, comprising several cellular receiver means (RC1-RCQ) each including several measurer means, a counting means and an indicator means in order to establish and transmit

respective reception quality indicators (QR1-QRQ) to the central measurement means (SBe).

5 7 - Measurement system as in claims 5 and 6, in which the reception quality indicators (QR1-QRQ) are retransmitted over the return radio channel (VR) from the transmitter means (ESB, AE) to the receiver means (RC).


10 8 - Measurement system as in claim 6 or 7, in which the reception quality indicators (QR1-QRQ) are displayed (ASB) in the base station.

 9 - Measurement system as in claim 8, in which the reception quality indicators (QR1-QRQ) are displayed on a map respectively in correspondence with the locations of the cellular receiver means (RC1-RCQ) on the map.

15 10 - Measurement system as in any of claims 1 to 9, in which the transmission means (EC) is linked to a mobile wireless camera (CSF).

1/4

FIG. 1

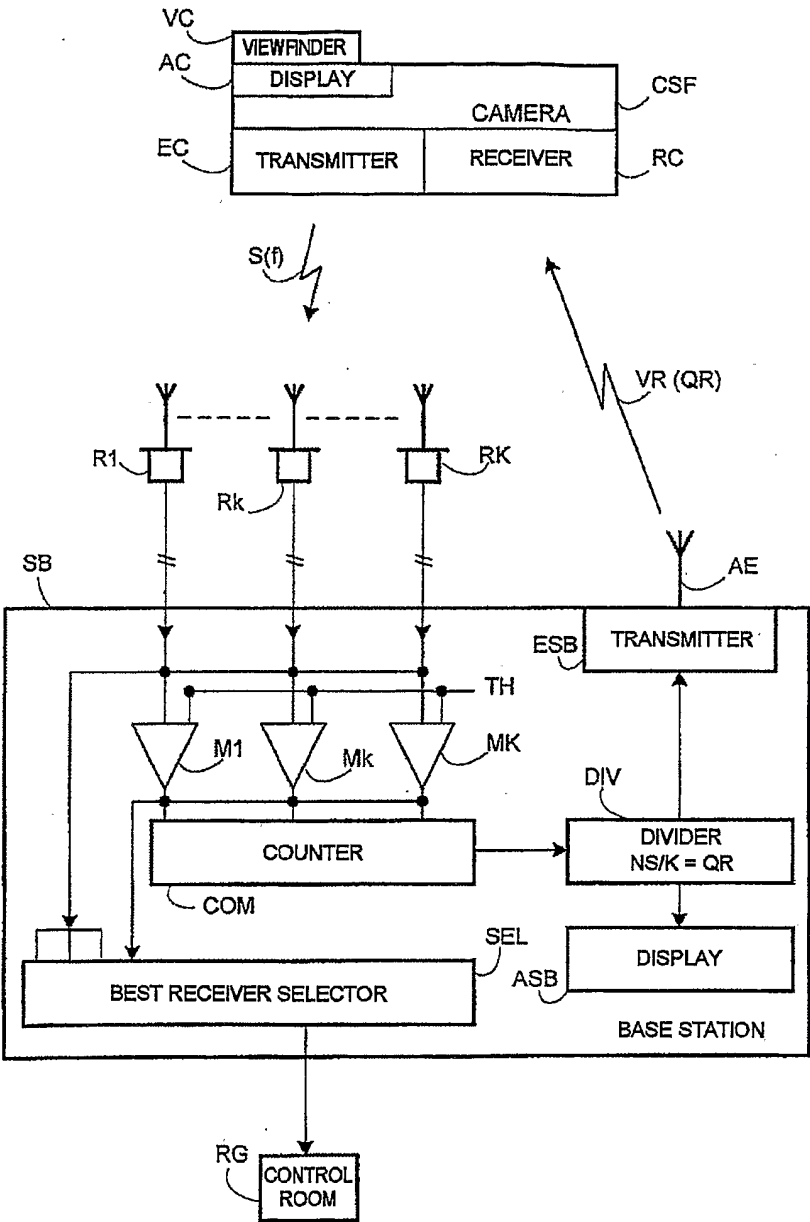

2/4

FIG. 2


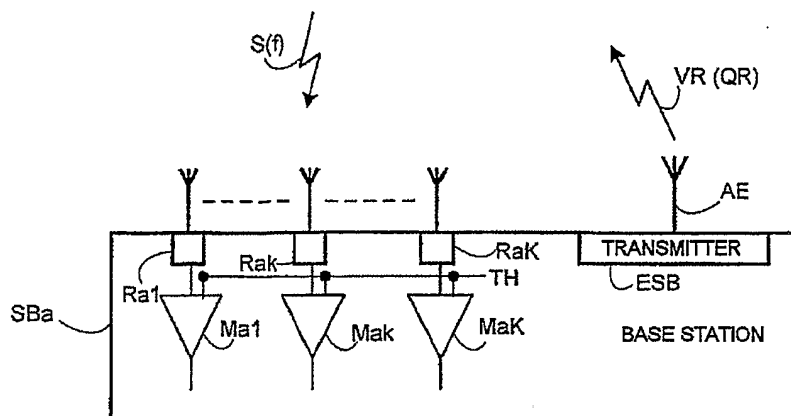


FIG. 3

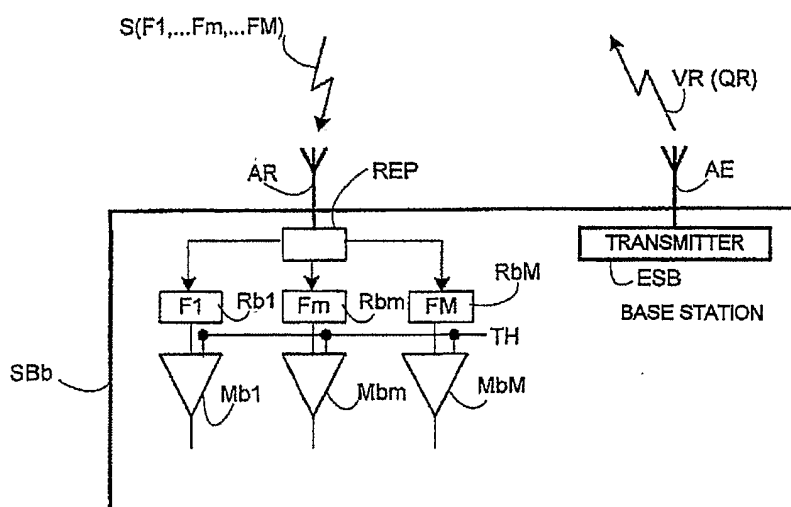

3/4

FIG. 4


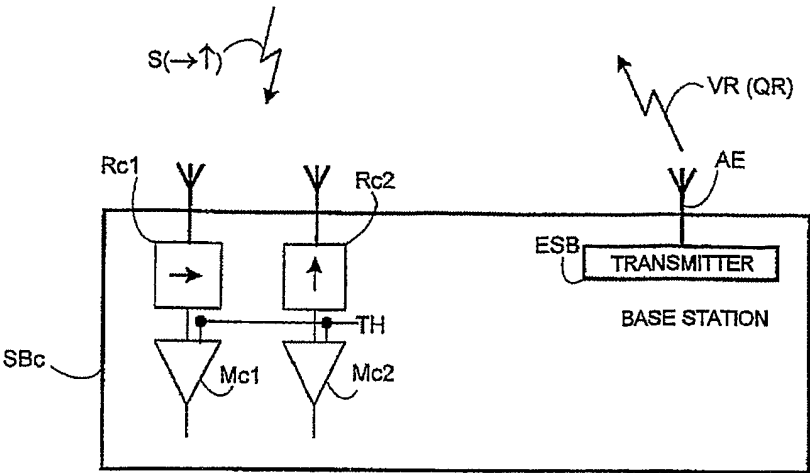


FIG. 5

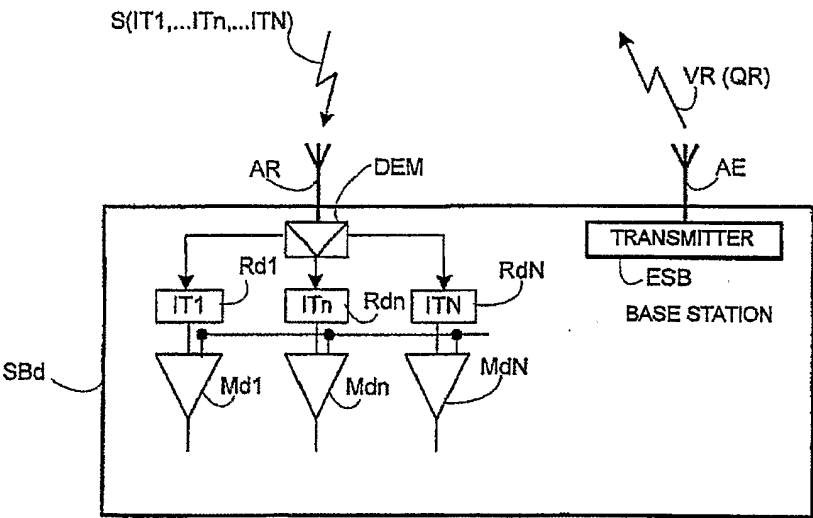

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/14734

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04B7/08 H04B17/00 G07C9/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 307 375 A (BRITISH BROADCASTING CORP) 21 May 1997 (1997-05-21) abstract page 4, line 19 -page 5, line 5 page 5, line 31 -page 7, line 21 figures 2,3 ----	1-10
A	GB 2 196 211 A (BRITISH BROADCASTING CORP) 20 April 1988 (1988-04-20) abstract figures 1,2 ----	1-10
A	US 5 263 175 A (DEJMEK JAMES W) 16 November 1993 (1993-11-16) abstract figures 1A,1B,2 -----	1-10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

7 April 2004

Date of mailing of the international search report

16/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Yang, Y

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/14734

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2307375	A	21-05-1997	NONE	
GB 2196211	A	20-04-1988	NONE	
US 5263175	A	16-11-1993	NONE	