

(54) Title
A METHOD AND SYSTEM FOR PREPARING AN EXHIBITION SPACE

International Patent Classification(s)
(51)⁴ **E04B 001/343 E04B 005/52 E04B 007/16**

(21) Application No. : **83142/87** (22) Application Date : **30.12.87**

(30) Priority Data

(31) Number (32) Date (33) Country
87100168 08.01.87 EP EUROPE

(43) Publication Date : **14.07.88**

(44) Publication Date of Accepted Application : **22.11.90**

(71) Applicant(s)
DOLMEN ENGINEERING & SYSTEMS LTD.

(72) Inventor(s)
ANNA OLEWSKA

(74) Attorney or Agent
GRIFFITH HACK & CO, GPO Box 1285K, MELBOURNE VIC 3001

(56) Prior Art Documents
CH 537502

(57) Claim

1. A method for preparing and furnishing an open-space exhibition or fair within a building such as a closed shed or the like, comprising the steps of pre-setting a plurality of false ceiling elements consisting of supporting frames and supported panels each said element being independently sustained by said building roof through cables or ropes, means to controllably lift or lower each element being provided for raising and lowering at least some of said elements from a stand-by position near the building roof to a preparing position in order to work on said elements and finally lowering same to their operating position, intermediate between said preparing and stand-by position, at the end of said preparation, characterized in that false ceiling elements are used in the form of truss-like frames having a structure essentially consisting of a plurality of adjacent pyramids linked together both through their bases and at their vertices to form a quadrilateral base structure which is

(11) AU-B-83142/87
(10) 603633

-2-

substantially only as wide as a relevant corridor; and
in that the method comprises the step of presetting said
frames in correspondence with only the exhibition
corridors.

AUSTRALIA

PATENTS ACT 1952

COMPLETE SPECIFICATION

(ORIGINAL)

FOR OFFICE USE

603638

Form 10

Short Title:

Int. Cl:

Application Number:
Lodged:

Complete Specification-Lodged:
Accepted:
Lapsed:
Published:

Priority:

Related Art:

This document contains the
amendments made under
Section 49 and is correct for
printing.

TO BE COMPLETED BY APPLICANT

Name of Applicant:

DOLMEN ENGINEERING & SYSTEMS
LTD.

Address of Applicant: 58, COLEMAN STREET
LONDON
ENGLAND

Actual Inventor:

Address for Service: CLEMENT HACK & CO.,
601 St. Kilda Road,
Melbourne, Victoria 3004,
Australia.

Complete Specification for the invention entitled:
A METHOD AND SYSTEM FOR PREPARING
AN EXHIBITION SPACE

The following statement is a full description of this invention
including the best method of performing it known to me:-

This invention relates to a method and system for preparing an exhibition or fair space within a building or in any case under a roof covering or the like.

Exhibitions are generally carried-out within large buildings, generally in the form of sheds or the like, wherein stands, passages between stands, common spaces and services are arranged. While stands are prepared by the single exhibitors, passages between stands, common spaces and services are usually prepared by the fair promoter. Services are normally permanent structures, while the common spaces and passages must be changed at every exhibition not in their location but in their appearance, both for look and practical purposes. In fact each exhibition must have a different look according to different requirements, for instance as the form and location of signalling elements and lighting means.

When the fair promoter leaves uncovered the shed roof or the like, aesthetical problems may arise as this roof is usually too far from the fair floor, as well as practical problems to sustain in the required positions said signalling elements and light means by uprights or the like. If, on the contrary, the fair promoter covers the roof of said buildings by means of a ceiling, this solves the above aesthetical and practical problems, but involves high costs for a full coverage and a heavy work to assemble and then

disassemble a ceiling suitable for each particular fair. Such a ceiling is usually mounted at a height over the floor which is lower than that required for the movement of vehicles carrying the stand furnishing components and the exhibited objects so that the ceiling assembling and disassembling operations must be made respectively after and before the stand preparation and dismantlement, with substantial time losses and difficulties for all exhibitors.

An object of this invention is then to provide a method and a system to overcome the above drawbacks of the known fair preparations, allowing to obtain in a simple, not expensive and time saving manner, both a required aesthetical appearance and a required location and form of the signalling elements and lighting means. Said aesthetical appearance, said elements form and location can be rapidly changed according to each fair requirements, without any actual limitation, as well as without undue excessive charge of work time and costs.

Accordingly, this invention concerns a method for preparing an exhibition or fair within a building such as a closed shed or the like, comprising the steps of pre-setting a plurality of false ceiling elements consisting of supporting frames and supported panels each said element being independently sustained by said building roof through cables or ropes, means to controllably lift or lower each element being provided for raising and lowering at least some of said elements from a stand-by position near the building roof to a preparing position in order to work on said elements and finally lowering same to their operating position, intermediate between said preparing and stand-by position, at the end of said preparation, characterized in that false ceiling elements are used in the form of truss-like frames having a structure essentially consisting of a plurality of adjacent pyramids linked together both through their bases and at their vertices



to form a quadrilateral base structure which is substantially only as wide as a relevant corridor; and in that the method comprises the step of presetting said frames in correspondence with only the exhibition corridors.

Moreover, the invention concerns a system for preparing a fair or exhibition within a building such as a closed shed or the like, of the kind comprising a plurality of supporting frames, each of which is independently sustained to said building roof by means of cables or ropes, has means for being controllably lifted or lowered from said roof, and is provided with a plurality of removable furnishing elements; characterized in that said frame structure is a truss-like structure essentially consisting of a plurality of adjacent pyramids linked together both through their bases and at their vertices to form a quadrilateral base structure which is substantially only as wide as corridors within said building, said frames being positioned in correspondence only with the corridors of cited exhibition building.

The different features and advantages of the invention will be now more detailedly described with reference to embodiments thereof as shown in the enclosed drawings, wherein:

Fig. 1 is a perspective diagrammatic view of an embodiment of the present invention.

Figs. 2 and 3 are a plan view and respectively a side view



of the embodiment of Fig. 1.

Figs. 4 and 5 are cross-sectional views of possible profiles as used to form the truss of Figs. 1 to 3.

Fig. 6 is a view from the bottom showing a preferred embodiment of a joint between profiles according to Figs. 4 and 5.

Figs. 7 to 13 are diagrammatic perspective front views of possible embodiments of ceiling elements as removably fixed to the truss of Fig. 1.

Fig. 14 is a plan view showing a crossing between two passages as prepared according to the invention.

Fig. 15 is a diagrammatic perspective view showing an embodiment of the invention when used in connection with an exhibition stand.

Figs. 16 to 19 are diagrammatic perspective front views showing possible forms and locations of signalling elements and lighting means.

Referring firstly to figs. 1 to 3, a supporting frame 10 is shown therein, which is preferably in the form of a beam or truss made by profiles, for instance aluminum profiles, defining a rectangular planar base with longitudinal profiles 11 and transverse profiles 12, as well as a series of pyramidal elements 13, which are defined by slanting profiles 14 and are connected by an upper longitudinal profile 15. Preferably, at least the base transverse

profiles 12 and maybe also the base longitudinal profiles 11 have a cross section as that shown at 16 in fig. 5, while the other profiles have a cross section as that shown at 17 in figure 4. Both these sections show longitudinal grooves 18 wherein ceiling elements, signalling elements and/or lighting means can be removably fixed. The methods for fixing any type of element or means to said profile grooves 18 are well known in the art.

According to a preferred embodiment said profiles 11, 12, 14 and 15 are mounted and fixed together by means of specially shaped joints, an example of which is shown in fig. 6. Such joint 27 is made by two identical parts 28 and 29, joined together by snap pin and seat arrangements as shown at 30. At the ends of frame 10, half-joints 28 or 29 are used for fixing the profiles. Each joint 27 has four double tongues 31 adapted to retain the ends of profiles, for instance using bolts, through screws or the like, as well as a plurality of through bores or openings 32 and 33 adapted to fix, by means of a screw, bolt or the like, the joint itself to a supporting profile, as a base profile 11 or 12.

As shown in fig. 1, the frame 10, if necessary together with sidewardly protruding tongues 19, covers a length of a passage between fair stands, the whole passage being able to be covered by a series of frames 10 placed end to end with one another, preferably in an independent way.

The four outer corners of each frame base as sustained to the building roof by means of cables or ropes 20-23, which pass on pulleys 24 fixed as in 25 to said roof and are independently or jointly controlled by a lifting and lowering device, as for instance a motor winch or the like, as diagrammatically shown at 26 for rope 20, in such a manner that said frame can be lifted, lowered or even slanted at will.

Usually, during periods in which the fair is closed, said frames 10 are kept in a stand-by upper position, near the roof pulleys 24, in such a manner not to hinder any operation which can be made at the roof level, for instance all operations as necessary to prepare the stand furniture as well as the objects to be exhibited. Such operations require a vehicle traffic, which can be carried out without problems relating to the vehicle height, on condition of course that the roof is sufficiently far from floor, as usually happens in sheds or the like.

When the above operations and in particular the vehicle traffic is over or before this traffic will start, said frames 10 can be lowered, all together or preferably one at a time, at a height allowing an easy fastening operation thereto of ceiling elements and/or signalling elements and/or lighting means. It is particularly advantageous to lower each frame 10, by means of ropes 20-23 and devices 26,

up to man height as shown at 10' in figure 1, so to allow such operations in the easiest way, without the need of stepladders and so on. When all required ceiling, signalling and lighting elements are mounted, the frames can be lifted again in their stand-by position and, when all is ready, they are placed at the required height as shown by 10 in fig. 10, which height is usually lower than the roof height, and are kept in this position for the whole fair period. At the end of this period, the exhibition dismantlement can be carried-out following an inverted procedure with reference to the above described one.

As previously said, the frames can removably carry different ceiling elements to obtain different looks of passages. Such ceiling elements may be rigid plates but preferably they are in the form of flexible, for instance suitably cut textile or plastics sheets which are placed to cover the frame slanting sides to obtain a span look as at 34 in Fig. 7, wherein side tongues 19 are provided too. In fig. 8, the ceiling elements 35 cover the walls of each pyramidal protrusion 13, while in figure 9 alternate planar ceiling elements 36 are placed on frame 10. It is also possible to obtain a vault look (fig. 10) by means of curved ceiling elements 37 or a triangle look (fig. 11) by means of vertically placed triangular ceiling elements 38. In fig. 12 the base of frame 10 is completely covered by plane ceiling

elements 39 and in fig. 13 the frame is placed in a reversed position 10".

From the above examples it can be seen that the shapes, sizes and fixing features of the ceiling elements can be modified at will, so that actually infinite look variations are possible.

Fig. 14 shows a passage crossing as seen from the bottom, wherein ceiling elements 35 according to a pyramidal look are foreseen and a special crossing ceiling part 40 is provided for.

Fig. 15 is a perspective view of a frame 10 with triangle looking ceiling elements 38, which is placed over a passage floor 41 between stands, one of which is shown at 42. It is to be noted that said stand 42 has a passage wall 43, the upper end of which can be removably fixed to the longitudinal profiles 11 of frame base. This wall 43 can be maintained in its vertical position by its connection with the other stand walls 44, or by said connection thereof to the frame base. It is to be understood that instead of (or besides) a stand wall, stand uprights can be provided for, which are connected or not to the frame base.

Figures 16 to 19 show some ones amongst the different possible choices as to arrange signalling elements and lighting means in connection with a frame 10 according to the invention. In figure 16 a central sign-board 45 is

mounted on a transverse profile 12, preferably together with a related lighting means 46, while figure 17 shows sidewardly mounted sign-boards 47. Finally figs. 18 and 19 show that the same ceiling elements can be used as signalling means, as indicated with 48 and 49.

As previously said, any lighting means can be mounted on frame 10, using the profile grooves 18, while the required current can be fed thereto by means of cables concealed in the profiles or by means of a metal enclosed bus duct (not shown) which can be fixed to one or more profiles or forming itself a profile.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method for preparing and furnishing an open-space exhibition or fair within a building such as a closed shed or the like, comprising the steps of pre-setting a plurality of false ceiling elements consisting of supporting frames and supported panels
5 each said element being independently sustained by said building roof through cables or ropes, means to controllably lift or lower each element being provided for raising and lowering at least some of said elements from a stand-by position near the building roof to a
10 preparing position in order to work on said elements and finally lowering same to their operating position, intermediate between said preparing and stand-by position, at the end of said preparation, characterized in that false ceiling elements are used in the form of
15 truss-like frames having a structure essentially consisting of a plurality of adjacent pyramids linked together both through their bases and at their vertices to form a quadrilateral base structure which is substantially only as wide as a relevant corridor; and
20 in that the method comprises the step of presetting said frames in correspondence with only the exhibition corridors.

2. A system for preparing and furnishing a fair or exhibition within a building such as a closed shed or the like, of the kind comprising a plurality of supporting frames, each of which is independently
5 sustained to said building roof by means of cables or ropes, has means for being controllably lifted or lowered from said roof, and is provided with a plurality of removable furnishing elements; characterized in that said frame structure is a truss-like structure
10 essentially consisting of a plurality of adjacent pyramids linked together both through their bases and at their vertices to form a quadrilateral base structure which is substantially only as wide as corridors within said building, said frames being positioned in



15 correspondence only with the corridors of cited exhibition building.

3. A system according to claim 2, characterised in that said furnishing elements are chosen between sheet-like panels, lighting means, signalling means, false ceiling panels, and decorated or shaped panels.

4. A system according to claim 2 or 3, characterised in that said frame structure is made of light sections or bars provided with grooves for fixing said furnishing elements.

5. A system according to claim 4 characterised in that at least one of said sections or profiles is in the form of a metal-enclosed bus duct.






6. A system according to claim 4, characterized in that said sections or profiles are connected by joints in two parts, each joint having tongues for connection of profiles thereto, as well as seats for fixing means operating to connect said joint to one of said profile grooves.









DATED THIS 24TH DAY OF AUGUST 1990

DOLMEN ENGINEERING & SYSTEMS LTD.
By Its Patent Attorneys

GRIFFITH HACK & CO.
Fellows Institute of Patent
Attorneys of Australia



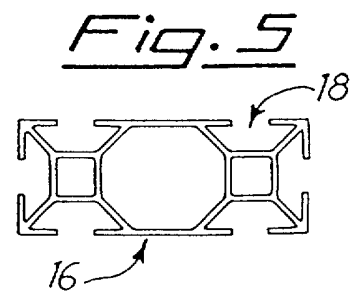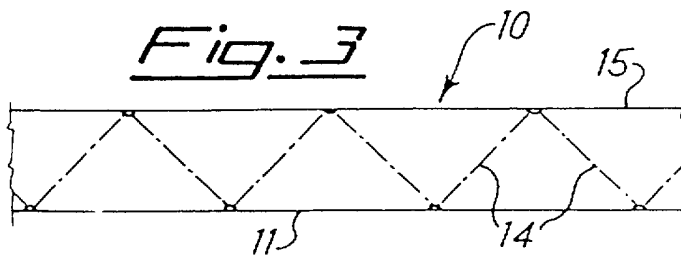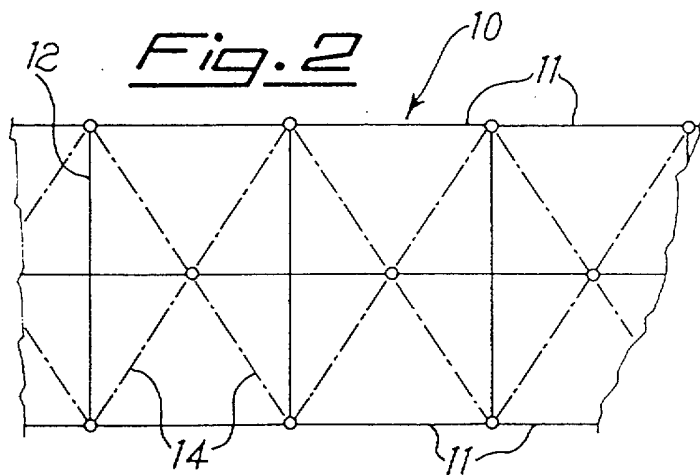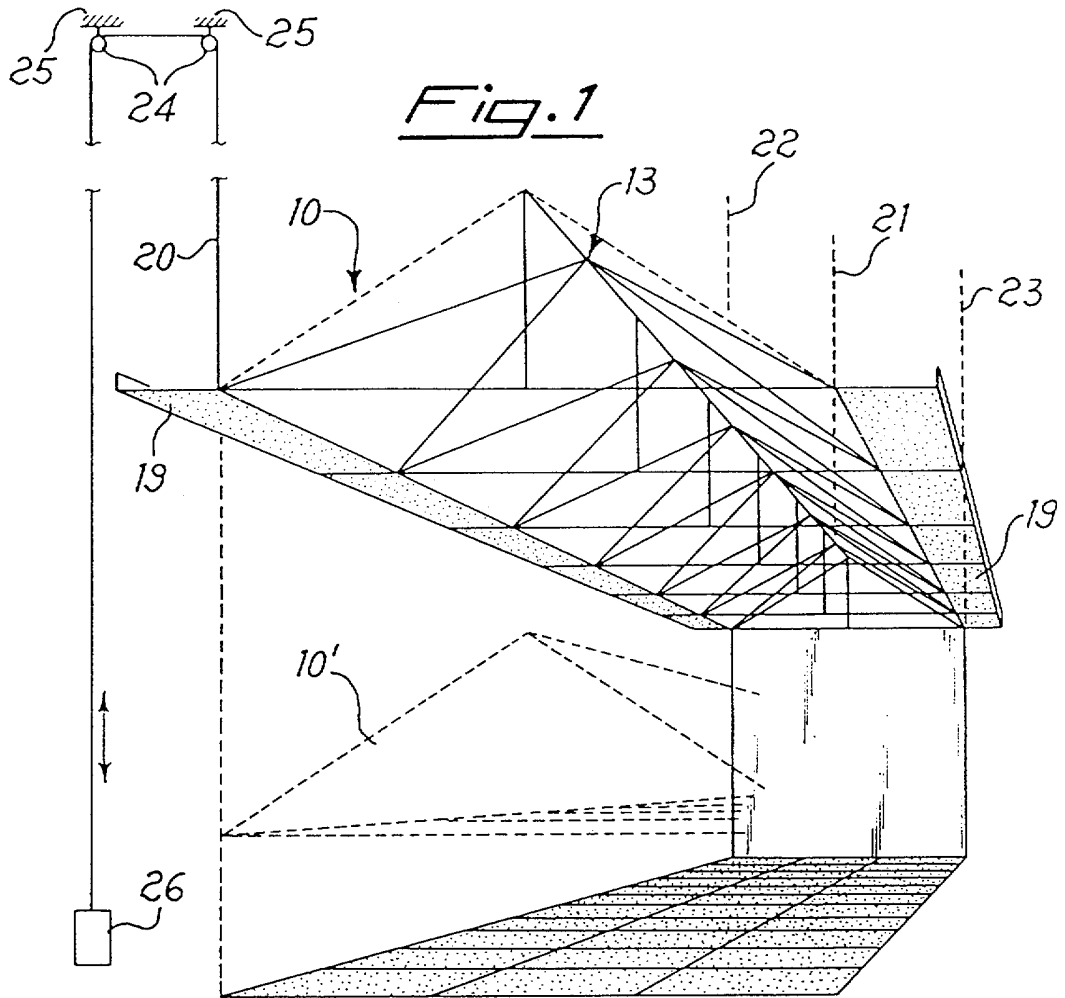

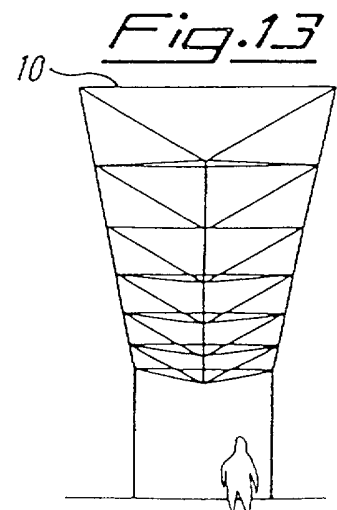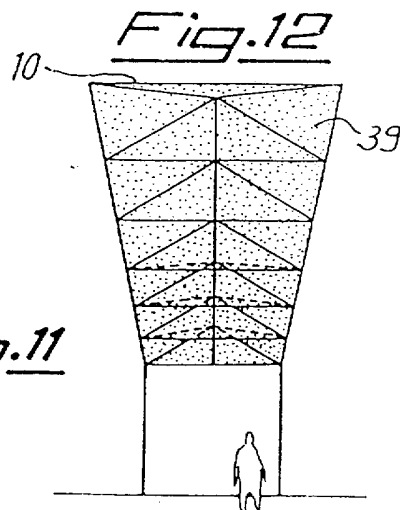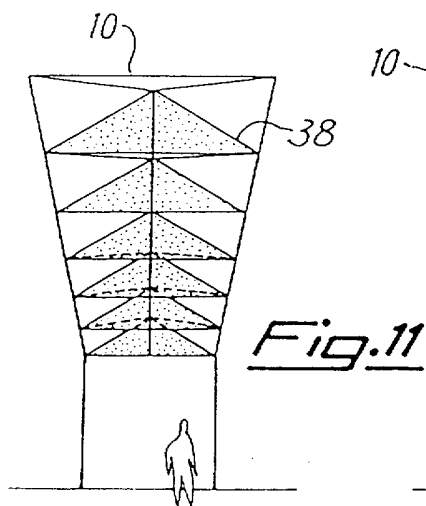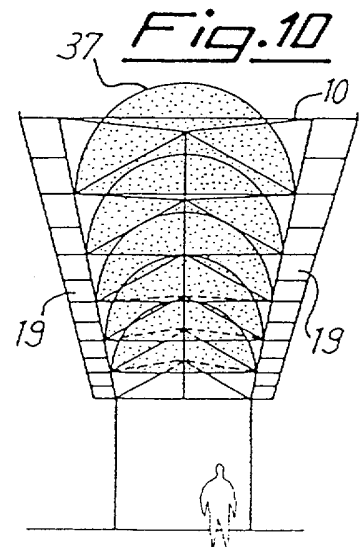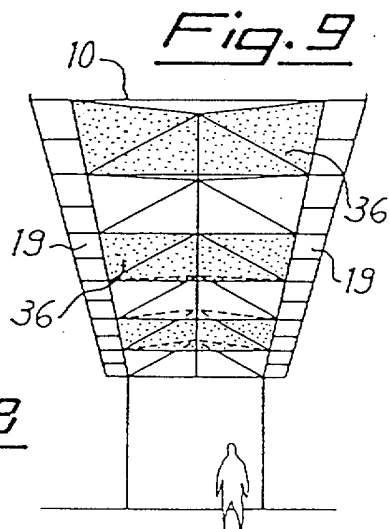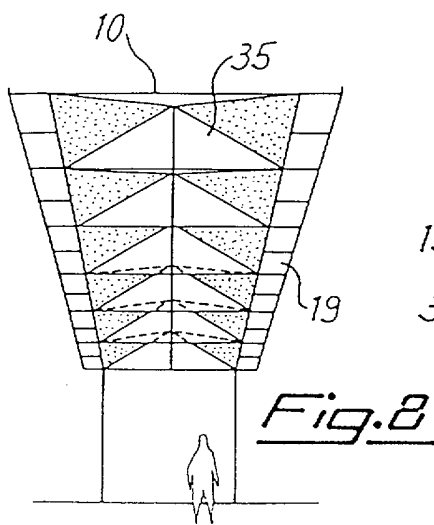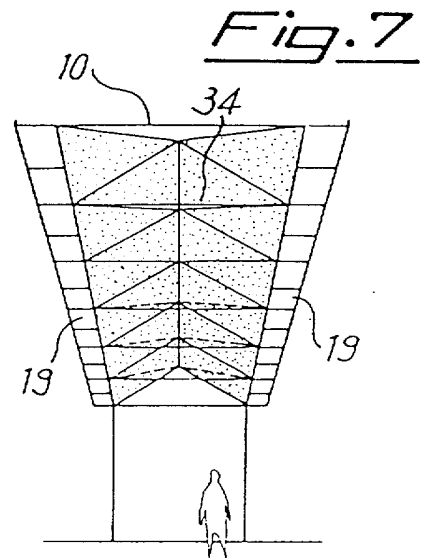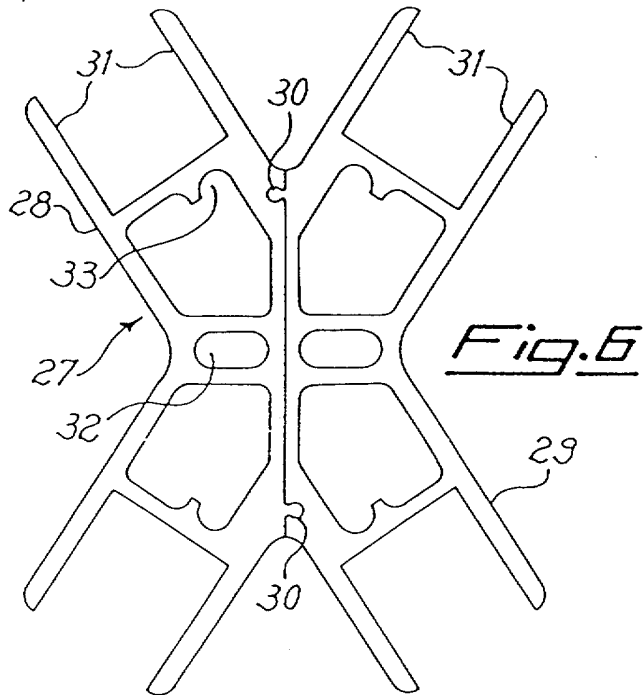

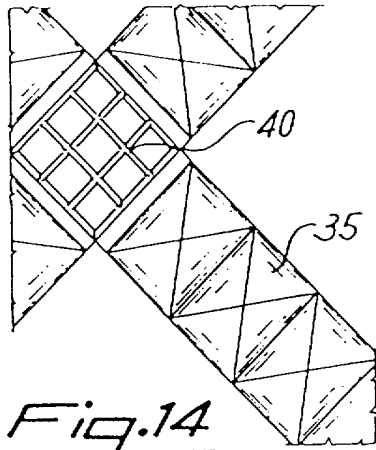


Fig. 14

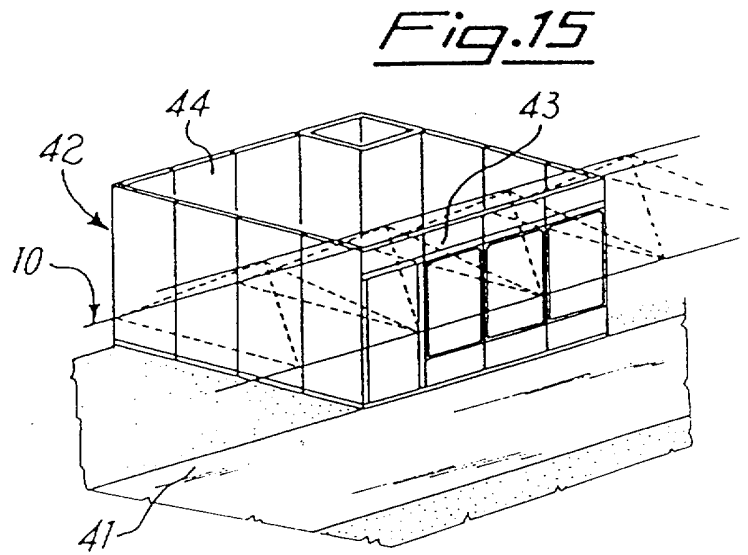


Fig. 15

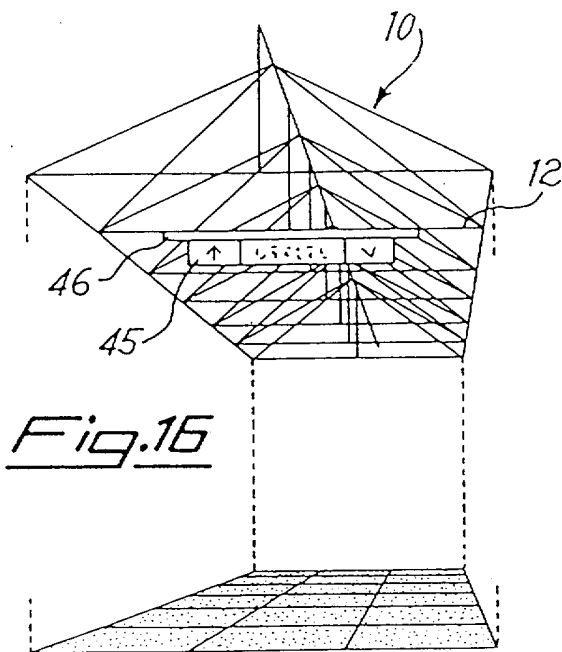


Fig. 16

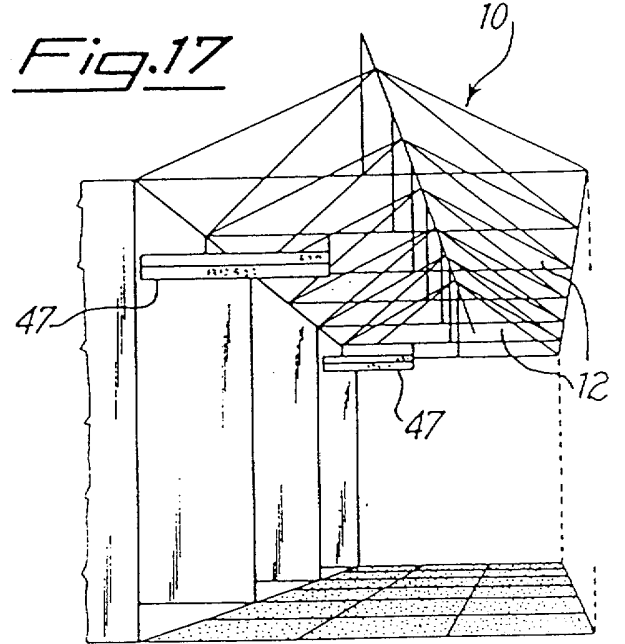


Fig. 17

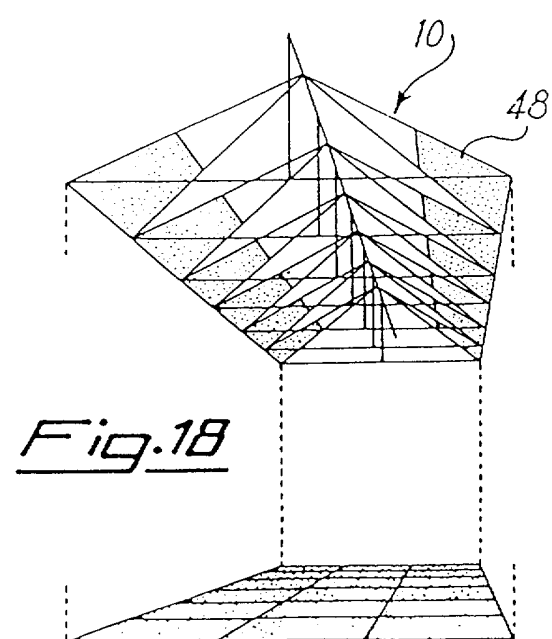


Fig. 18

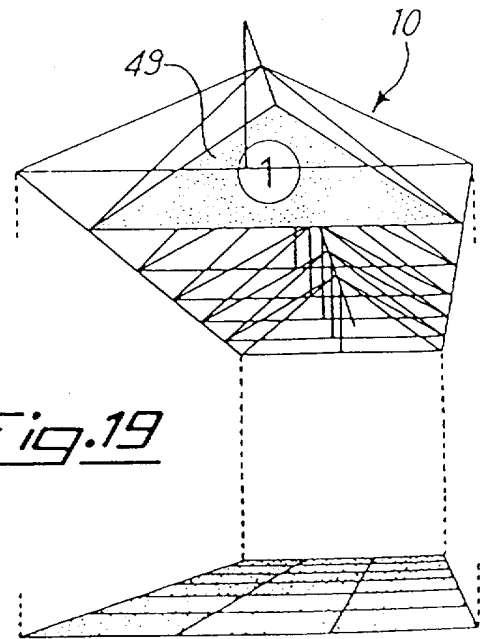


Fig. 19