



- (51) **International Patent Classification:**
H01L 27/24 (2006.01) *H01L 27/22* (2006.01)
- (21) **International Application Number:**
PCT/US2010/030466
- (22) **International Filing Date:**
9 April 2010 (09.04.2010)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
12/425,084 16 April 2009 (16.04.2009) US
- (71) **Applicant (for all designated States except US):** **SEA-GATE TECHNOLOGY LLC** [US/US]; 920 Disc Drive, Scotts Valley, California 95066 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **WANG, Xuguang** [CN/US]; 16535 Ashby Lane, Eden Prairie, Minnesota 55346 (US). **LU, Yong** [CN/US]; 13239 Crusheen Court, Rosemount, Minnesota 55068 (US). **LI, Hai** [CN/US]; 10124 Phaeton Drive, Eden Prairie, Minnesota 55347 (US). **LIU, Hongyue** [US/US]; 18540 65th Avenue North, Maple Grove, Minnesota 55311 (US).
- (74) **Agent:** **NELSON, Anna, M.**; Campbell Nelson Whippis, LLC, 408 St. Peter Street, Suite 240, St. Paul, MN 55102 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(54) **Title:** THREE DIMENSIONALLY STACKED NON-VOLATILE MEMORY UNITS

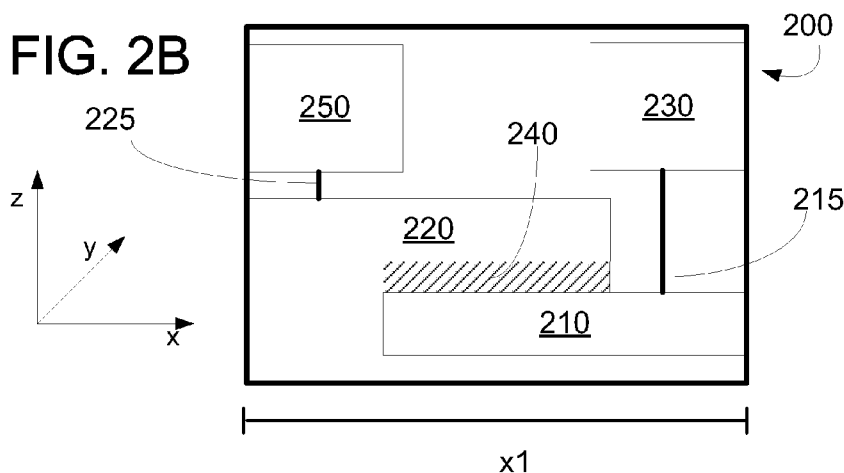

(57) **Abstract:** A memory unit (200) including a first transistor (210) spanning a first transistor region in a first layer of the memory unit; a second transistor (220) spanning a second transistor region in a second layer of the memory unit; a first resistive sense memory (RSM) cell (230) spanning a first memory region in a third layer of the memory unit; and a second RSM cell (250) spanning a second memory region in the third layer of the memory unit, wherein the first transistor is electrically coupled to the first RSM cell, and the second transistor is electrically coupled to the second RSM cell, wherein the second layer is between the first and third layers, wherein the first and second transistor have a transistor overlap region, and wherein the first memory region and the second memory region do not extend beyond the first transistor region and the second transistor region.

THREE DIMENSIONALLY STACKED NON VOLATILE MEMORY UNITS

BACKGROUND

- [01] New types of memory have demonstrated significant potential to compete with commonly utilized types of memory. For example, non-volatile spin-transfer torque random access memory (referred to herein as “STRAM”) and resistive random access memory (referred to herein as “RRAM”) are both considered good candidates for the next generation of memory. The ability of STRAM and RRAM to more effectively compete with established memory types, such as FLASH memory (NAND or NOR) can be maximized by increasing the density at which memory units (a memory cell and its associated driving device) can be formed on a chip.

BRIEF SUMMARY

- [02] Disclosed herein is a memory unit including a first transistor spanning a first transistor region in a first layer of the memory unit; a second transistor spanning a second transistor region in a second layer of the memory unit; a first resistive sense memory (RSM) cell spanning a first memory region in a third layer of the memory unit; and a second RSM cell spanning a second memory region in the third layer of the memory unit, wherein the first transistor is electrically coupled to the first RSM cell, and the second transistor is electrically coupled to the second RSM cell, wherein the second layer is between the first and third layers, wherein the first and second transistor have an transistor overlap region, and wherein the first memory region and the second memory region do not extend beyond the first transistor region and the second transistor region.
- [03] Disclosed herein is RSM unit including a first transistor spanning a first transistor region in a first layer of the memory unit; a second transistor spanning a second transistor region in a second layer of the memory unit; and a RSM cell spanning a memory region in a third layer of the memory unit, wherein the first transistor is electrically coupled to the second transistor and the second transistor is electrically coupled to the RSM cell, wherein the second layer is between the first layer and the third layer, wherein the first transistor and

the second transistor have an transistor overlap region, and wherein the memory region does not extend beyond the first and second transistor regions.

- [04] Also disclosed herein are methods of utilizing a RSM unit that include providing a RSM unit including a first transistor spanning a first transistor region in a first layer of the memory unit; a second transistor spanning a second transistor region in a second layer of the memory unit; and a RSM cell spanning a memory region in a third layer of the memory unit, wherein the first transistor is electrically coupled to the second transistor and the second transistor is electrically coupled to the RSM cell, wherein the second layer is between the first layer and the third layer, wherein the first transistor and the second transistor have an transistor overlap region, and wherein the memory region does not extend beyond the first and second transistor regions; and activating only the first or second transistor to determine the resistance state of the RSM cell.
- [05] These and various other features and advantages will be apparent from a reading of the following detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

- [06] The disclosure may be more completely understood in consideration of the following detailed description of various embodiments of the disclosure in connection with the accompanying drawings, in which:
- [07] **FIGS. 1A** and **1B** are schematic diagrams of exemplary STRAM cells; and **FIG. 1C** is a schematic diagram of an exemplary RRAM cell;
- [08] **FIG. 2A** is a schematic diagram of an embodiment of a memory unit as disclosed herein; **FIG. 2B** is a schematic diagram of an embodiment of a memory unit that utilizes a single memory cell – single transistor configuration as disclosed herein; **FIG. 2C** is a perspective view of the memory unit depicted in **FIG. 2B**; and **FIG. 2D** is a circuit diagram of the memory unit depicted in **FIG. 2B**;
- [09] **FIG. 3A** is a schematic diagram of an embodiment of a memory unit that utilizes a single memory cell – single transistor configuration as disclosed herein; **FIG. 3B** is a schematic diagram from a different perspective of the memory unit depicted in **FIG. 3A**; and **FIG.**

3C is a schematic diagram of a memory unit that utilizes a STRAM single memory cell – single transistor;

- [10] **FIG. 4A** is a schematic diagram of an embodiment of a memory unit that utilizes a single memory cell – single transistor configuration as disclosed herein; **FIG. 4B** is a schematic diagram from a different perspective of the memory unit depicted in **FIG. 4A**; and **FIG. 4C** is a schematic diagram of a memory unit that utilizes a STRAM single memory cell – single transistor;
- [11] **FIG. 5A** is a circuit diagram for a memory unit that utilizes a single memory cell – double transistor configuration; **FIG. 5B** is a schematic diagram of such a memory unit; **FIG. 5C** is a schematic diagram from a different perspective of the memory unit depicted in **FIG. 5B**; **FIG. 5D** is a schematic diagram of an embodiment of a memory unit that utilizes a single memory cell – single transistor configuration as disclosed herein; **FIG. 5E** is a schematic diagram of a memory unit that utilizes a STRAM single memory cell – double transistor configuration; and **FIG. 5F** is a schematic diagram from a different perspective of the memory unit depicted in **FIG. 5D**;
- [12] **FIG. 6** is a schematic diagram of an embodiment of a portion of a memory unit configured with other elements to access the memory cell; and
- [13] **FIG. 7** is a schematic perspective view of an exemplary memory array including memory units as disclosed herein.
- [14] The figures are not necessarily to scale. Like numbers used in the figures refer to like components. However, it will be understood that the use of a number to refer to a component in a given figure is not intended to limit the component in another figure labeled with the same number.

DETAILED DESCRIPTION

- [15] In the following description, reference is made to the accompanying set of drawings that form a part hereof and in which are shown by way of illustration several specific embodiments. It is to be understood that other embodiments are contemplated and may be made without departing from the scope or spirit of the present disclosure. The following detailed description, therefore, is not to be taken in a limiting sense.
- [16] Unless otherwise indicated, all numbers expressing feature sizes, amounts, and physical properties used in the specification and claims are to be understood as being modified in all instances by the term “about.” Accordingly, unless indicated to the contrary, the numerical parameters set forth in the foregoing specification and attached claims are approximations that can vary depending upon the desired properties sought to be obtained by those skilled in the art utilizing the teachings disclosed herein.
- [17] The recitation of numerical ranges by endpoints includes all numbers subsumed within that range (e.g. 1 to 5 includes 1, 1.5, 2, 2.75, 3, 3.80, 4, and 5) and any range within that range.
- [18] As used in this specification and the appended claims, the singular forms “a”, “an”, and “the” encompass embodiments having plural referents, unless the content clearly dictates otherwise. As used in this specification and the appended claims, the term “or” is generally employed in its sense including “and/or” unless the content clearly dictates otherwise.
- [19] Spatially related terms, including but not limited to, “lower”, “upper”, “beneath”, “below”, “above”, and “on top”, if used herein, are utilized for ease of description to describe spatial relationships of an element(s) to another. Such spatially related terms encompass different orientations of the device in use or operation in addition to the particular orientations depicted in the figures and described herein. For example, when an article depicted in the figures is turned over or flipped over, portions previously described as below or beneath other elements would then be above those other elements.
- [20] As used herein, when an element, component or layer for example is described as being “on” “connected to”, “coupled with” or “in contact with” another element, component or

layer, it can be directly on, directly connected to, directly coupled with, in direct contact with, or intervening elements, components or layers may be on, connected, coupled or in contact with the particular element, component or layer, for example. When an element, component or layer for example is referred to as begin “directly on”, “directly connected to”, “directly coupled with”, or “directly in contact with” another element, there are no intervening elements, components or layers for example.

- [21] Non volatile memory cells, such as STRAM and RRAM require relatively large driving currents, for example, some STRAM cells require driving currents of about 400 microamps (μA). Commonly utilized metal-oxide-semiconductor field-effect transistors (MOSFETs) generally have driving capabilities of about $800\mu\text{A}/\text{micrometer}$ (μm). Therefore, a MOSFET capable of providing this requisite driving current generally has to be about $0.5\text{ }\mu\text{m}$. Assuming currently available semiconductor fabrication techniques have a minimum dimension of 90nm (F), the width of a useful MOSFET is about $5.6F$. Commonly utilized memory unit configurations generally have a single memory cell associated with a single transistor. Assuming a memory cell has dimensions of $F \times 2F$ and memory units generally require spacing between each memory unit of F , commonly utilized memory unit configurations have an area of $(5.6F + F) \times (2F + F + F)$, which equals about $26.4F^2$. When you compare the total area needed, $26.4F^2$ to the area of the memory cell alone, $2F^2$, it can be seen that in commonly utilized memory unit configurations, the transistor requires significantly more area than the memory cell and is the major cause of the relatively large area that is required for a single functional memory cell.
- [22] Memory units such as those disclosed herein offer alternative configurations for memory cells and transistors that utilize significantly less area and can therefore provide advantages in cost and efficiency. Disclosed memory units offer such advantages by either powering one memory cell with two smaller transistors or by changing the three dimensional configuration of a transistor and its associated memory cell by arranging two transistors in two vertically overlying layers and placing the two memory cells on a shared third layer above the two transistors. Various different configurations that can be utilized to obtain such advantages will be discussed herein. A calculation (similar to that above) of the area that is necessary for such configurations will be discussed with respect to each embodiment.

- [23] A “memory unit” as that term is used herein can refer to one or more memory cells that are electrically connected to one or more devices that can function to allow current to pass through the one or more memory cells. In an embodiment, a memory unit can include one memory cell electrically connected to two transistors. In an embodiment, the one memory cell can be electrically connected to one of the two transistors that is electrically connected to the other transistor. Such a configuration can be referred to as a single memory cell – double transistor configuration. In an embodiment, a memory unit can include a first memory cell that is electrically connected to a first transistor and a second memory cell that is electrically connected to a second transistor. Such a configuration can be referred to as a single memory cell – single transistor configuration.
- [24] A memory cell utilized in a memory device as described herein can include many different types of memory. Exemplary types of memory that can be utilized in devices disclosed herein include, but are not limited to non volatile memory such as, resistive sense memory (RSM) cells. A RSM cell is a memory cell having a changeable resistance that affords data storage using different resistance states of the RSM cell. Exemplary RSM cells include, but are not limited to, ferroelectric RAM (FeRAM or FRAM); magnetoresistive RAM (MRAM); resistive RAM (RRAM); phase change memory (PCM) which is also referred to as PRAM, PCRAM and C-RAM; programmable metallization cell (PMC) which is also referred to as conductive-bridging RAM or CBRAM; and spin torque transfer RAM, which is also referred to as STRAM.
- [25] In embodiments, the RSM cell can be a STRAM cell. STRAM memory cells include a MTJ (magnetic tunnel junction), which generally includes two magnetic electrode layers separated by a thin insulating layer, which is also known as a tunnel barrier. An embodiment of a MTJ is depicted in **FIG. 1A**. The MTJ **100** in **FIG. 1A** includes a first magnetic layer **110** and a second magnetic layer **130**, which are separated by an insulating layer **120**. **FIG. 1B** depicts a MTJ **100** in contact with a first electrode layer **140** and a second electrode layer **150**. The first electrode layer **140** and the second electrode layer **150** electrically connect the first magnetic layer **110** and the second magnetic layer **130** respectively to a control circuit (not shown) providing read and write currents through the magnetic layers. The relative orientation of the magnetization vectors of the first magnetic layer **110** and the second magnetic layer **130** can be determined by the resistance across

the MTJ **100**; and the resistance across the MTJ **100** can be determined by the relative orientation of the magnetization vectors of the first magnetic layer **110** and the second magnetic layer **130**.

- [26] The first magnetic layer **110** and the second magnetic layer **130** are generally made of ferromagnetic alloys such as iron (Fe), cobalt (Co), and nickel (Ni) alloys. In embodiments, the first magnetic layer **110** and the second magnetic layer **130** can be made of alloys such as FeMn, NiO, IrMn, PtPdMn, NiMn and TbCo. The insulating layer **120** is generally made of an insulating material such as aluminum oxide (Al_2O_3) or magnesium oxide (MgO).
- [27] The magnetization of one of the magnetic layers, for example the first magnetic layer **110** is generally pinned in a predetermined direction, while the magnetization direction of the other magnetic layer, for example the second magnetic layer **130** is free to rotate under the influence of a spin torque. Pinning of the first magnetic layer **110** may be achieved through, e.g., the use of exchange bias with an antiferromagnetically ordered material such as PtMn, IrMn and others.
- [28] In embodiments, the RSM cell can be a RRAM cell. **FIG. 1C** is a schematic diagram of an illustrative resistive random access memory (RRAM) cell **160**. The RRAM cell **160** includes a medium layer **112** that responds to an electrical current or voltage pulse by altering an electrical resistance of the medium layer **112**. This phenomenon can be referred to as the electrical pulse induced resistance change effect. This effect changes the resistance (i.e., data state) of the memory from one or more high resistance state(s) to a low resistance state, for example. The medium layer **112** is interposed between a first electrode **114** and the second electrode **116** and acts as a data storage material layer of the RRAM cell. The first electrode **114** and the second electrode **116** are electrically connected to a voltage source (not shown). The first electrode **114** and a second electrode **116** can be formed of any useful electrically conducting material such as, for example, a metal.
- [29] The material forming the medium layer **112** can be any known useful RRAM material. In embodiments, the material forming the medium layer **112** can include an oxide material such as, a metal oxide. In some embodiments, the metal oxide is a binary oxide material

or complex metal oxide material. In other embodiments, the material forming the medium layer **112** can include a chalcogenide solid electrolyte material or an organic/polymer material.

- [30] The binary metal oxide material can be expressed as a chemical formula of M_xO_y . In this formula, the characters “M”, “O”, “x”, and “y” refer to metal, oxygen, a metal composition ratio, and an oxygen composition ratio, respectively. The metal “M” may be a transition metal and/or aluminum (Al). In this case, the transition metal may be nickel (Ni), niobium (Nb), titanium (Ti), zirconium (Zr), hafnium (Hf), cobalt (Co), iron (Fe), copper (Cu) and/or chrome (Cr). Specific examples of binary metal oxides that may be used as the medium layer **112** include CuO, NiO, CoO, ZnO, CrO₂, TiO₂, HfO₂, ZrO₂, Fe₂O₃, and Nb₂O₅.
- [31] In embodiments, the metal oxide can be any useful complex metal oxide such as, for example, a complex oxide material having a formula Pr_{0.7}Ca_{0.3}MnO₃, or SrTiO₃, or SiZrO₃, or these oxides doped with Cr or Nb. The complex can also include LaCuO₄, or Bi₂Sr₂CaCu₂O₈. One example of a solid chalcogenide material is a germanium-selenide (Ge_xSe_{100-x}) containing a silver (Ag) component. One example of an organic material is Poly(3,4-ethylenedioxythiophene) (i.e., PEDOT).
- [32] The RSM cell can also include ferroelectric capacitors having structures similar to **FIG. 1C** using materials such as lead zirconate titanate (referred to as “PZT”) or SrBi₂Ta₂O₉ (referred to as “SBT”). In such memory cells, an electrical current can be used to switch the polarization direction and the read current can detect whether the polarization is up or down. In such embodiments, a read operation is a destructive process, where the cell will lose the data contained therein, requiring a refresh to write data back to the cell.
- [33] Memory units as disclosed herein also include transistors. Generally, field-effect transistors (FETs) are utilized. All commonly utilized FETs have a gate, a drain, a source and a body (or substrate). The gate generally controls the opening and closing of the FET, similar to a physical gate. The gate permits electrons to flow through (when open) or blocks their passage (when closed) by creating or eliminating a channel between the source and the drain. Electrons flow from the source terminal towards the drain terminal

when influenced by an applied voltage. The body or substrate is the bulk of the semiconductor in which the gate, source and drain lie.

- [34] In embodiments, memory units as disclosed herein can utilize metal-oxide-semiconductor field-effect transistors (MOSFETs). MOSFETs are generally composed of a channel of n-type or p-type semiconductor material and are respectively referred to as NMOSFETs or PMOSFETs (also commonly nMOS, pMOS). Embodiments can also utilize complimentary metal-oxide-semiconductor transistors (“CMOS” transistors). The transistors in a memory unit can, but need not be the same kind of transistors.
- [35] An embodiment of a memory unit as disclosed herein can be seen in **FIG. 2A**. The memory unit **200** in **FIG. 2A** includes a first transistor **210**, a second transistor **220** and at least a first RSM cell **230**. Generally, memory units as disclosed herein have a configuration that utilizes the height dimension, as depicted in **FIG. 2A**, the z-axis to decrease the width dimension, the x-axis as depicted in **FIG. 2A**. As seen in **FIG. 2A**, the second transistor **220** is positioned above the first transistor **210** and the at least first RSM cell **230** is positioned above the second transistor **220**. The first transistor **210** and second transistor **220** overlap in the x-dimension, forming what is referred to as a transistor overlap region **240**. The longer the transistor overlap region **240** is in the x-dimension, the less width the entire memory unit will require.
- [36] The first transistor **210** is located in a first layer of the memory unit; the second transistor **220** is located within a second layer of the memory unit and the first RSM cell **230** is located in a third layer of the memory unit. Generally, the second layer is between the first and third layers. A “layer” as that word is used with respect to the memory unit refers to a portion of the memory unit (generally taking up a portion of the memory unit in the direction of the z-axis as seen in **FIG. 2A**) that contains a component, such as the first transistor **210**, the second transistor **230** or the first RSM cell **230**.
- [37] Generally, all embodiments disclosed herein share the basic three layer and transistor overlap region configuration. Such a configuration saves space in either the width or length dimension (in **FIG. 2A**, the y- or x-axis) by stacking the components in the height dimension (the z-axis in **FIG. 2A**) and sharing at least a portion of the x-axis (or y-axis in some embodiments). The various embodiments disclosed herein will vary depending on

whether the two transistors are the same size, whether they entirely overlap each other or only partially overlap, whether one or two memory cells are included and whether a memory cell is electrically connected to one or two transistors.

- [38] Memory unit disclosed herein make advantageous use of space because of the overlap (in the z-axis) of the two transistors, which are much larger in comparison to the RSM cells. A memory unit that includes two transistors and two associated RSM cells configured in this fashion will provide a memory unit that has a per functional memory cell width that is less than generally utilized memory units. As discussed above, commonly utilized memory configurations can provide a function memory cell width (the width that one memory cell and associated transistor(s) occupy) that is dictated by the width of the transistor, which can be estimated, based on the driving current necessary for RSM cells, to be about $5.6F$ (with F being a factor based on the smallest width of features that can be fabricated). Embodiments of memory units disclosed herein can have functional memory cell widths that are less than $5.6F$. In embodiments, memory units disclosed herein can have functional memory cell widths that are not greater than about $4.0F$ (about 80% of $5.6F$). In embodiments, memory units disclosed herein can have functional memory cell widths that are not greater than about $3.9F$ (about 70% of $5.6F$). In embodiments, memory units disclosed herein can have functional memory cell widths that are not greater than about $3.4F$ (about 60% of $5.6F$). In embodiments, memory units disclosed herein can have function memory cell widths that are about $3F$. In embodiments, memory units disclosed herein can have functional memory cell widths that are about $2.8F$.
- [39] Another exemplary embodiment is depicted in **FIG. 2B**. The embodiment depicted in **FIG. 2B** includes a first transistor **210**, a second transistor **220**, a first RSM cell **230**, and a second RSM cell **250**. The first transistor **210** is electrically coupled to the first RSM cell **230**, which is depicted by the first electrical connection **215**; and the second transistor **220** is electrically coupled to the second RSM cell **250**, which is depicted by the second electrical connection **225**. In embodiments, the first and second transistors **210** and **220** both include source and drain regions and the electrical connections **215** and **225** connect to the RSM cells **230** and **250** via the drain regions of the first and second transistors **210** and **220** respectively. In such an embodiment, each of the RSM cells is driven by its own single transistor. In embodiments, the first and second RSM cells **230** and **250** can be the

same kind of RSM cells. In embodiments, the first and second RSM cells **230** and **250** can both be STRAM or can both be RRAM. In embodiments, the first and second transistors **210** and **220** can be the same kind of transistors. In embodiments, the first and second transistors **210** and **220** can be MOSFETs.

- [40] As seen in **FIG. 2B**, the memory unit **200** generally has three dimensions, as depicted by the x-axis, y-axis and z-axis. In embodiments, decreasing the length of the memory unit in either the x- or y-axes can serve to decrease the area taken up by the memory unit. In embodiments, such as that depicted in **FIG. 2B**, decreasing the width of the memory unit in the x-dimension can serve to decrease the area taken up by the memory unit. As seen in **FIG. 2B**, this exemplary memory unit **200** has a length of **x1** in the direction of the x-axis. In embodiments such as that disclosed in **FIG. 2B**, the width of the memory unit in the plane of the x-axis can generally be less than twice that of the width of commonly utilized memory configurations.
- [41] The exemplary memory unit **200** includes a first transistor **210** and a second transistor **220**. The second transistor **220** is generally positioned above the first transistor **210** in the direction of the z-axis. The first transistor **210** generally has a width and spans a region (referred to as a first transistor region) in the plane of the x-axis within the memory unit. The second transistor **220** also has a width and spans a region (referred to as a second transistor region) in the plane of the x-axis within the memory unit. The second transistor region at least partially overlaps the first transistor region in the plane of the x-axis. This region is depicted in **FIG. 2B** and is referred to as the transistor overlap region **240**. Stated differently, there is at least one cross section of the memory unit that can be taken through the plane defined by the z- and y-axes that will include both the first transistor **210** and the second transistor **220**; and there can be, but need not be, at least one cross section that can be taken through the plane defined by the z- and y-axes that will include only one of the first transistor **210** or the second transistor **220**.
- [42] The exemplary memory unit **200** also includes a first RSM cell **230** and a second RSM cell **250**. Both the first and second RSM cells **230** and **250** are generally positioned above the second transistor **220** in the direction of the z-axis. Because the second transistor **220** is positioned above the first transistor **210** in the plane of the z-axis, the first and second

RSM cells **230** and **250** are also positioned above the first transistor **210**. The first RSM cell **230** generally has a width and spans a region (referred to as a first memory region) in the plane of the x-axis within the memory unit. The second RSM cell **250** also has a width and spans a region (referred to as a second memory region) in the plane of the x-axis within the memory unit. Neither the first memory region nor the second memory region extends beyond the first transistor region and the second transistor region. Stated differently, there is no cross section of the memory unit that can be taken through the plane defined by the z- and y-axes that will include either of the RSM cells **230** or **250** but will not include one or both of the first transistor or second transistor **210** or **220**.

- [43] The first transistor **210** can be located in a first layer of the memory unit, the second transistor **220** can be located in a second layer of the memory unit, and the RMS cells **230** and **250** can be located in a third layer of the memory unit. Generally, the second layer is positioned between the first and third layers. The components being located in the three overlying layers, the transistor overlap region **240** of the first and second transistors, and the relatively smaller areas of the RSM cells (allowing two to be positioned within the region taken up by a single transistor) allows this configuration to minimize the functional memory cell width.
- [44] Another view of such a memory unit can be seen in **FIG. 2C**. It should be noted that the first and second electrical connections **215** and **225** are not shown in this view. The depiction in **FIG. 2C** could be considered a “top down” view of the memory unit depicted in **FIG. 2B**. This view shows the at least partial overlap of the first transistor **210** and the second transistor **220** in the plane of the x-axis as the transistor overlap region **240**. This view also shows that the first memory region of the first RSM cell **230** and the second memory region of the second RSM cell **250** do not extend beyond the first transistor **210** and the second transistor **220** or more specifically, do not extend beyond the first transistor **210** and the second transistor **220** in the plane of the x-axis. It can be seen from this depiction that the more the two transistors overlap, i.e. the larger the transistor overlap region **240** the smaller the width **x1** become, the more it approaches the width of a single transistor, and therefore, the smaller overall area of the memory unit.

- [45] **FIG. 2D** depicts a circuit diagram for the configuration depicted in **FIGs. 2B** and **2C**. The first transistor **210** is electrically connected to the first RSM cell **230**; and the second transistor **220** is electrically connected to the second RSM cell **250**. The positioning of the two transistors in the plane of the z-axis, the positioning of the two RSM cells above the width taken up by the two transistors, and the electrical connection of two separate transistors to two separate RSM cells affords a memory unit having a minimum function memory cell width (width that one memory cell and associated transistor(s) occupy) of about 2.8F. In embodiments, the unit width can be greater than 2.8F, but less than 5.6F. In embodiments, the functional memory cell width may only approach 2.8F because of metal routing, additional peripheral circuits, more complex decoding, other considerations, or a combination thereof.
- [46] Memory units as disclosed herein can be connected to other memory units, other electrical components, or both via electrical connections. In embodiments, electrical connections referred to as bit lines, source lines and word lines can be utilized to provide electrical connections to various portions of the memory unit. A memory unit that includes one of these (or another) electrical connections can mean that the memory unit is connected to such an electrical connection and the electrical connection can extend beyond the memory unit. Bit lines are generally utilized to make electrical connections to the RSM cells. Generally, bit lines are electrically connected to the top electrodes (or an equivalent structure) of the RSM cells. Source lines are generally utilized to make electrical connections to the transistors, thereby completing an electrical circuit through the transistor(s)/memory cell (when the transistor is turned on). Generally, source lines are electrically connected to the source (or equivalent structure) of the transistors. Word lines are generally utilized to turn the transistors on and off. Generally, word lines are electrically connected to the substrate (or equivalent structure) of the transistor or are within the substrate of the transistor.
- [47] **FIG. 3A** depicts a schematic illustration of an embodiment of a memory unit as disclosed herein. The depiction in **FIG. 3A** is not necessarily a cross section, as such a depiction may make it difficult to distinguish all of the various components. This exemplary embodiment includes a first transistor **310**, a second transistor **320**, a first RSM cell **330**, and a second RSM cell **350** as discussed above. As seen here, the second transistor **320** is

positioned above the first transistor **310** and at least partially overlaps the first transistor **310** at the transistor overlap region **340**. The first and second RSM cells **330** and **350** are positioned above the second transistor **320** and do not extend beyond the first and second transistor **310** and **320**.

- [48] The exemplary first and second transistors **310** and **320** utilized herein include source regions **311** and **321**; drain regions **313** and **323**; substrates **317** and **327**; and gate regions **319** and **329**. As seen in **FIG. 3A**, the source regions **311** and **321** and the drain regions **313** and **323** are configured oppositely. Stated differently, the first transistor **310** includes the source region **311** on the left of the first transistor **310** and the second transistor **320** includes the source region **321** on the right of the second transistor **320**.
- [49] Also included in this depiction is a source line **360**. As seen in **FIG. 3A**, the source line **360** is electrically connected, via a first source electrical connection **315** and a second source electrical connection **325** to the source regions **311** and **321** of the first and second transistor **310** and **320** respectively. The source line **360** is generally disposed between the first transistor **310** and the second transistor **320**. The first RSM cell **330** is electrically connected to the drain region **313** of the first transistor **310** via a first drain electrical connection **318**; and similarly, the second RSM cell **350** is electrically connected to the drain region **323** of the second transistor **320** via a second drain electrical connection **328**.
- [50] As seen in **FIG. 3A**, a portion of the source line **360** is electrically insulated from the first drain electrical connection **318** by a via insulator **362**. The via insulator **362** can be made of an electrically insulating material or can alternatively be a void of material (e.g. air can function as the insulator). Generally, the via insulator **362** encompasses the first drain electrical connection **318** wherever it would otherwise contact the source line **360**.
- [51] The embodiment depicted in **FIG. 3A** also includes a first bit line **370** and a second bit line **380**. The first bit line **370** is electrically connected to the first RSM cell **330**; and the second bit line **380** is electrically connected to the second RSM cell **350**. Although not depicted herein, the electrical connection of the bit lines to the RSM cells can be accomplished via the top electrodes of the RSM cells.

- [52] **FIG. 3B** illustrates a “top down” view of the memory unit depicted in **FIG. 3A**. Like components are numbered in the same fashion as **FIG. 3A**. The transistor overlap region **340** is depicted in dashed lines. As seen in **FIG. 3B**, the first bit line **370** and second bit line **380** are electrically connected to the first and second memory cell **330** and **350** respectively via first and second drain electrical connections **318** and **328**. The via insulator **362** can also be seen in this view as isolating the first drain electrical connection **318** from the source line **360**. Also seen in this view are the first and second word lines **390** and **395**. The word lines generally travel through, exist within, or are the first and second substrates **317** and **327** from **FIG. 3A**.
- [53] **FIG. 3C** illustrates a schematic representation of another embodiment of a memory unit as disclosed herein. The memory unit depicted in **FIG. 3C** is similar to that depicted in **FIG. 3A** and **3B**, and like elements are numbered similarly. A number of the components of the embodiment depicted in **FIG. 3C** were also found in and discussed with respect to **FIGs. 3A** and **3B** and will therefore not be discussed separately. The transistor overlap region **340** is again depicted in dashed lines. The embodiment depicted in **FIG. 3C** includes STRAM cells as the RSM cells. As seen in **FIG. 3C**, the RSM cells in this embodiment, the first RSM cell **330** and the second RSM cell **350** include multiple layers, pinned layers **332** and **352**; tunnel junctions **334** and **354**; and free layers **336** and **356**. The tunnel junctions **334** and **354** are disposed between the pinned layers **332** and **335** and the free layers **336** and **338** respectively. The first and second RSM cells **330** and **350** include, or are electrically connected to first and second bottom electrodes **333** and **353**. The first and second bottom electrodes **333** and **353** are then electrically connected via the first and second drain electrical connections **318** and **328** to the drains **313** and **323** of the first and second transistors **310** and **320** respectively.
- [54] **FIG. 4A** depicts a schematic illustration of another embodiment of a memory unit as disclosed herein. The depiction in **FIG. 4A** is not necessarily a cross section, as such a depiction may make it difficult to distinguish all of the various components. This exemplary embodiment includes a first transistor **410**, a second transistor **420**, a first RSM cell **430**, and a second RSM cell **450** as discussed above. As seen here, the second transistor **420** is positioned above the first transistor **410** and at least partially overlaps the first transistor **410**. As shown by the transistor overlap region **440** in dashed lines. The

first and second RSM cells **330** and **350** are positioned above the second transistor **320** and do not extend beyond the first and second transistor **310** and **320**.

- [55] As seen in **FIG. 4A**, the source regions **411** and **421** and the drain regions **413** and **423** have parallel configurations in the plane of the x-axis. Stated differently, the first transistor **410** includes the source region **411** on the left of the first transistor **410** and the second transistor **420** also includes the source region **421** on the left of the second transistor **420**. In such embodiments, the transistors are not necessarily the same size. Specifically, the drain region **413** of the first transistor **410** can be larger than the drain region **423** of the second transistor **420**. The drain region **413** of the first transistor **410** can extend farther in the plane of the x-axis than the drain region **423** of the second transistor **420**. Other portions of the first transistor **410** can also, but need not, be larger than analogous portions of the second transistor **420**. Such components allow the second transistor **420** to be positioned above the first transistor **410** while still allowing the first RSM cell **430** to be electrically connected to the first transistor **410** via the first drain electrical connection **418** without the need to electrically isolate the electrical connection from other structures it would progress through. This can provide advantages in that it may be more efficiently and/or more cost effectively produced, however it may have a slightly larger area overhead in comparison to other single memory cell – single transistor configurations.
- [56] The source line **460** in this embodiment is generally positioned between the first transistor **410** and the second transistor **420**. In contrast to the embodiment depicted in **FIG. 3A** where separate electrical connection structures (first source electrical connection **315** and second source electrical connection **325**) were provided to electrically connect the source regions **311** and **321** of the first and second transistors **310** and **320** to the source line **360**, the source region **460** generally does not require a separate structure for electrical connection and can be formed to function as its own electrical connection to the source regions **411** and **421** of the first and second transistors **410** and **420**. This can provide advantages to such a configuration as it may be more efficiently and/or more cost effectively produced.

- [57] As seen in **FIG. 4A**, the second RSM cell **450** can, but need not, have a structure (or an operatively coupled additional element) that is different than that of the first RSM cell **430**. In embodiments, the second RSM cell **450** can have a bottom electrode **451** that extends beyond the remainder of the second RSM cell **450**. One of skill in the art will understand, having read this specification, that the layout of individual components, such as the bottom electrode **451** for example, can be tailored to conserve area.
- [58] **FIG. 4B** illustrates a “top down” view of the memory unit depicted in **FIG. 4A**. Like components are numbered in the same fashion as **FIG. 4A**. As seen in **FIG. 4B**, the first bit line **470** and second bit line **480** are electrically connected to the first and second memory cell **430** and **450** respectively via first and second drain electrical connections **418** and **428**. **FIG. 4B** shows that the bottom electrode **451** of the second RSM cell **450** provides electrical connection via the second drain electrical connection **428** to the second bit line **480**. Also seen in this view are the first and second word lines **490** and **495**. Although not distinguishable in **FIG. 4B**, based on the second transistor **420** being positioned directly above the first transistor, the second word line **495** would also be positioned above the first word line **490** and would generally travel through, exist within, or are the first and second substrates **417** and **427** from **FIG. 4A**. The transistor overlap region **440** is again shown in dashed lines.
- [59] **FIG. 4C** illustrates a schematic representation of another embodiment of a memory unit as disclosed herein. The memory unit depicted in **FIG. 4C** is similar to that depicted in **FIGs. 4A** and **4B**, and like elements are numbered similarly. A number of the components of the embodiment depicted in **FIG. 4C** were also found and discussed with respect to **FIGs. 4A** and **4B** and will therefore not be discussed separately. The embodiment depicted in **FIG. 4C** includes STRAM cells as the RSM cells. As seen in **FIG. 4C**, the RSM cells in this embodiment, the first RSM cell **430** and the second RSM cell **450**, include pinned layers **432** and **452**, tunnel junction layers **434** and **454** and free layers **436** and **456** as discussed with respect to **FIG. 3C**. The first and second RSM cells **430** and **450** include, or are electrically connected to first and second bottom electrodes **433** and **453**. As seen in this exemplary embodiment, the second bottom electrode **453** can be larger than the first bottom electrode **433**. The transistor overlap region **440** is again shown in dashed lines.

- [60] Another embodiment of a memory unit as disclosed herein, is one that electrically connects a single RSM cell to a transistor that is electrically connected (in serial) to another transistor. **FIG. 5A** depicts a circuit diagram for such a configuration. The first transistor **510** is electrically connected to the second transistor **520**. The first transistor **510** and the second transistor **520** can generally have a smaller width than commonly utilized transistors because they are parallelly connected so the two transistors have a width of only half of conventionally utilized transistor. Although the two transistors require only half the area on the substrate, they are able to provide the same driving capability spread over two vertical layers. The RSM cell **530** is then electrically connected to the second transistor **520**. The positioning of the two transistors, one above the other (explained further with respect to **FIGs. 5B, 5C, 5D and 5E**) and the RSM cell above the width taken up by the two transistors affords a memory unit having a functional memory cell width (width that one memory cell and associated transistor(s) occupy) of about 2.8F. In embodiments, the unit width can be greater than 2.8F, but less than 5.6F. In embodiments, the functional memory cell width may only approach 2.8F because of metal routing, additional peripheral circuits, more complex decoding, other considerations, or a combination thereof.
- [61] Another embodiment of a memory unit is schematically depicted in **FIG. 5B**. The memory unit generally has three dimensions, as depicted by the x-axis, y-axis and z-axis. The memory unit **500** includes a first transistor **510**, a second transistor **520** and a first RSM cell **530**. The first transistor **510** is electrically connected to the second transistor **520** via a transistor connection **505**. The transistor connection **505** allows the first and second transistors **510** and **520** to function as a single transistor with respect to the RSM unit. The second transistor **520** is electrically connected to the RSM unit **530** via the memory connection **507**. The memory connection **507** allows both the first transistor and the second transistor to drive (together) the RSM cell **530**.
- [62] As seen in **FIG. 5B**, the memory unit **500** generally has a width in the plane of the x-axis of x_2 . Generally, x_2 is less than the length of commonly utilized transistors. The exemplary memory unit **500** includes a first transistor **510** and a second transistor **520**. The second transistor **520** is generally positioned above the first transistor **510** in the direction of the z-axis. The first transistor **510** generally has a width and spans a region

(referred to as a first transistor region) in the plane of the x-axis within the memory unit. The second transistor **520** also has a width and spans a region (referred to as a second transistor region) in the plane of the x-axis within the memory unit. The second transistor region at least partially overlaps the first transistor region in the plane of the z-axis. In embodiments, the second transistor region substantially overlaps the first transistor region in the plane of the z-axis. In embodiments, the first transistor **510** and the second transistor **520** generally have substantially similar widths in the plane of the x-axis and are substantially overlapping in the direction of the z-axis. In embodiments, the first transistor **510** and the second transistor **520** generally have the same widths in the direction of the x-axis and entirely overlap in the plane of the z-axis. The transistor overlap region **540** is shown in **FIG. 5B**.

- [63] The exemplary memory unit **500** also includes a RSM cell **530**. The RSM cell **530** is generally positioned above the second transistor **520**. Because the second transistor **520** is positioned above the first transistor **510**, the RSM cell **530** is also generally positioned above the first transistor **510**. The RSM cell **530** generally has a width and spans a region (referred to as a memory region) in the plane of the x-axis within the memory unit. The first memory region does not extend beyond the first transistor region and the second transistor region. Stated differently, there is no cross section of the memory unit that can be taken through the plane defined by the z- and y-axes that will include the RSM cell **530** but will not include one or both of the first transistor or second transistor **510** or **520**. In embodiments, there is no cross section of the memory unit that can be taken through the plane defined by the z- and y-axes that will include the RSM cell **530** but will not both the first transistor and the second transistor **510** and **520**.
- [64] In embodiments, the first and second transistors **510** and **520** both include source and drain regions and the transistor electrical connection **505** can include two separate electrical connections. One portion of the transistor connection **505** connects the source of the first transistor **510** to the source of the second transistor **520**; and the other portion connects the drain of the first transistor **510** to the drain of the second transistor **520**. In such an embodiment, the memory connection **507** can electrically connect the drain of the second transistor **520** to the RSM cell **530**. In embodiments, the RSM cells **530** can be a STRAM cell or a RRAM cell. In embodiments, the first and second transistors **510** and **520** can be

the same kind of transistors. In embodiments, the first and second transistors **510** and **520** can be MOSFETs.

- [65] **FIG. 5C** could be considered a “top down” view of the memory unit depicted in **FIG. 5B**. It should be noted that the transistor connection **505** and memory connection **507** are not shown in this view. In the embodiment depicted in **FIG. 5C**, the first and second transistors **510** and **520** have substantially similar dimensions and therefore substantially entirely or entirely overlap in the height direction (e.g. the plane of the z-axis), with the second transistor **520** being positioned above the first transistor **510**. As seen in **FIG. 5C**, the transistor overlap region **540** is contiguous with the two transistors because they are substantially similar in dimensions. It should be noted that the two transistors in such an embodiment need not be substantially similar. The RSM cell **530** is positioned above and within the perimeter of both the first and second transistors **510** and **520**.
- [66] **FIG. 5D** depicts a schematic illustration of an embodiment of a memory unit as disclosed herein. The depiction in **FIG. 5D** is not necessarily a cross section. This exemplary embodiment includes a first transistor **510**, a second transistor **520**, and a RSM cell **530** as discussed above. As seen here, the second transistor **520** is positioned above the first transistor **510** and at least partially overlaps the first transistor **510**. The at least partial overlap is demonstrated by the transistor overlap region **540**. The RSM cell **530** is positioned above the second transistor **520** and does not extend beyond the first and second transistor **510** and **520**.
- [67] The exemplary first and second transistors **510** and **520** utilized herein include source regions **511** and **521**; drain regions **513** and **523**; substrates **517** and **527**; and gate regions **519** and **529**. As seen in **FIG. 5D**, the source regions **511** and **521** and the drain regions **513** and **523** have a parallel configuration. Stated differently, both the first transistor **510** and the second transistor **520** include the source regions **511** and **521** on the left of the transistors and the drain regions **513** and **523** on the right (or vice versa). The source region **511** of the first transistor **510** is electrically connected to the source region **521** of the second transistor **520** by the source electrical connection **502**; and the drain region **513** of the first transistor **510** is electrically connected to the drain region **523** of the second transistor **520** by the drain electrical connection **501**. Together the source electrical

connection **502** and the drain electrical connection **501** form the transistor connection (referred to in **FIG. 5B** as element **505**).

- [68] Also included in this depiction is a source line **560**. As seen in **FIG. 5D**, the source line **560** is electrically connected to the source region **511** of the first transistor **510**. The source line **560** is generally disposed below the first transistor **510**. The embodiment depicted in **FIG. 5D** also includes a bit line **570**. The bit line **570** is electrically connected to the RSM cell **530**. Although not depicted herein, the electrical connection of the bit line to the RSM cells can be accomplished via a top electrode of the RSM cell.
- [69] **FIG. 5E** illustrates a schematic representation of another embodiment of a memory unit as disclosed herein. The memory unit depicted in **FIG. 5E** is similar to that depicted in **FIGs. 5B, 5C, and 5D**, and like elements are numbered similarly. The at least partial overlap is demonstrated by the transistor overlap region **540**. A number of the components of the embodiment depicted in **FIG. 5E** were also found and discussed with respect to **FIGs. 5B, 5C, and 5D** and will therefore not be discussed separately. The embodiment depicted in **FIG. 5E** includes a STRAM RSM cell. As seen in **FIG. 5E**, the RSM cell **530** includes a pinned layer **532**, a tunnel junction layer **534**, and a free layer **536** as discussed above with respect to **FIG. 3C**. The RSM cell **530** includes, or is electrically connected to a bottom electrode **531**.
- [70] **FIG. 5F** illustrates a “top down” view of the memory unit depicted in **FIG. 5E**. Like components are numbered in the same fashion as **FIG. 5E**. Again, the transistor overlap region **540** is shown in dashed line. As seen in **FIG. 5F**, the bit line **570** is electrically connected to the RSM cell **530** via memory connection **518**. Also seen in this view is the word line **590**. Although there are two transistors in this memory unit, there is only one word line **590** because the transistors are controlled as if they were a single transistor. The word line **590** generally travels through, exists within, or is the first substrate **517** (seen in **FIG. 5E**).
- [71] The memory units disclosed herein that electrically connect a single transistor to a single RSM cell can be utilized to store “data” as is generally known. **FIG. 6** illustrates a system that includes a portion of a memory unit as disclosed herein that can include a RSM cell **610** and its associated (or electrically connected) transistor **615**. Each portion of such a

memory unit is configured (in a three dimensional space) with a second portion as discussed above to offer a memory unit that provides a small functional memory cell width. The RSM cell **610** and its electrically connected transistor **615** are operatively coupled between a bit line **620** and a source line **625**. The read/write circuitry **635** controls which bit line **620** and source line **625** that current is passed through to read or write. The read/write circuitry **635** can also control the voltage applied across the bit line **620** from the source line **625** (or vice versa). The direction which current flows across a memory cell **610** is determined by the voltage differential across the bit line **620** and the source line **625**.

[72] A particular memory cell **610** can be read from by activating its corresponding transistor **615**, which when turned on, allows current to flow from the bit line **620** through the memory cell **610** to the source line **625** (or vice versa). The transistor **615** is activated and deactivated through the word line **630**. The word line **630** is operatively coupled to and supplies a voltage to the transistor **615** to turn the transistor on so that current can flow to the memory cell **610**. A voltage, dependent on the resistance of the memory cell **610**, is then detected by the sense amplifier **640** from the source line **625** (for example). The voltage differential between the bit line **620** and the source line **625** (or vice versa), which is indicative of the resistance of the memory cell **610** is then compared to a reference voltage **645** and amplified by the sense amplifier **640** to determine whether the memory cell **610** contains a “1” or a “0”.

[73] Embodiments of single memory cell – double transistor configurations of memory units disclosed herein (such as those described with respect to **FIGs. 5A** through **5F**) can be utilized differently than other commonly utilized memory units. However, it should also be noted that such embodiments could also be utilized as described with respect to **FIG. 6**. The current necessary to determine the resistance state (read data) of a RSM cell is less than the current necessary to change the resistance state (write data) of the RSM cell. In embodiments where two transistors are electrically connected to function as one transistor, only one transistor needs to be turned on in order to determine the resistance state (i.e. read data) of the RSM cell. In embodiments, only the first transistor can be turned on to determine the resistance state of the RSM cell. In embodiments, use of the first transistor for the read operation can make the decoding circuitry less complex. In embodiments,

both the first and second transistor can be turned on to set the resistance state of the RSM cell.

[74] **FIG. 7** depicts an exemplary memory array **700** that includes a plurality of memory units **710a** and **710b** as disclosed herein. The configuration seen in the memory array **700** is for memory units that include a single RSM cell electrically connected to a first and second transistor (such as that depicted in **FIGs. 5A** through **5F**). However, one of skill in the art, having read this specification, will understand that the other embodiments disclosed herein can also be configured in a three dimensional array. Generally, a plurality refers to at least two and generally refers to more than two. The array **700** exemplified in **FIG. 7** depicts six (6) memory units, but it will be understood that more or less than that depicted herein can be utilized. As seen in **FIG. 7**, each of the memory units **710a** and **710b** can be electrically connected in various manners and configurations by word lines **790a** and **790b**, source lines **760a** and **760b**, bit lines **770a** and **770b**, or a combination thereof. Other configurations utilized arrays of memory units disclosed herein are also envisioned.

[75] Memory devices as discussed herein can be utilized in various applications and can generally be utilized in computer systems such as a PC (e.g., a notebook computer; a desktop computer), a server, or it may be a dedicated machine such as cameras, and video or audio playback devices.

[76] Thus, embodiments of **THREE DIMENSIONALLY STACKED NON VOLATILE MEMORY UNITS** are disclosed. The implementations described above and other implementations are within the scope of the following claims. One skilled in the art will appreciate that the present disclosure can be practiced with embodiments other than those disclosed. The disclosed embodiments are presented for purposes of illustration and not limitation, and the present disclosure is limited only by the claims that follow.

What is claimed is:

1. A memory unit comprising;
 - a first transistor spanning a first transistor region in a first layer of the memory unit;
 - a second transistor spanning a second transistor region in a second layer of the memory unit;
 - a first RSM cell spanning a first memory region in a third layer of the memory unit; and
 - a second RSM cell spanning a second memory region in the third layer of the memory unit,wherein the first transistor is electrically coupled to the first RSM cell, and the second transistor is electrically coupled to the second RSM cell,
 - wherein the second layer is between the first and third layers,
 - wherein the first and second transistor have an transistor overlap region, and
 - wherein the first memory region and the second memory region do not extend beyond the first transistor region and the second transistor region.
2. The memory unit according to claim 1, wherein the first transistor comprises a source region and a drain region, and the drain region of the first transistor is electrically coupled to the first RSM cell via a first drain electrical connection.
3. The memory unit according to any one of claims 1 or 2, wherein the second transistor comprises a source region and a drain region and the drain region of the second transistor is electrically coupled to the second RSM cell.
4. The memory unit according to any one of claims 1 to 3 further comprising a first bit line and a second bit line, wherein the first RSM cell is electrically coupled to the first bit line and the second RSM cell is electrically coupled to the second bit line.
5. The memory unit according to any one of claims 3 or 4, wherein the source and drain regions of the first transistor and the second transistor are configured oppositely.

6. The memory unit according to claim 5 further comprising a source line disposed between the first layer and the second layer of the memory unit, wherein the first transistor and the second transistor are separately electrically connected to the source line.
7. The memory unit according to claim 6 further comprising a via insulator to electrically insulate the first drain electrical connection from the source line.
8. The memory unit according to any one of claims 3 to 7, wherein the source and the drain regions of the first transistor and the second transistor have parallel configurations.
9. The memory unit according to any one of claims 3 to 8, wherein the drain region of the first transistor is larger than the drain region of the second transistor.
10. The memory unit according to claim 8 further comprising a source line disposed between the first transistor and the second transistor, wherein the source line electrically connects the first transistor and the second transistor.
11. The memory unit according to any one of claims 1 to 10, wherein the memory unit has a functional memory cell width of less than about $5.6F$.
12. The memory unit according to any one of claims 1 to 11, wherein the memory unit has a functional memory cell width of not greater than about $3F$.
13. The memory unit according to any one of claims 1 to 12, wherein the first and second RSM cells are spin torque transfer random access memory (STRAM) cells.
14. The memory unit according to any one of claims 1 to 13, wherein the first and second RSM cells are resistive random access memory (RRAM) cells.
15. A RSM unit comprising;
a first transistor spanning a first transistor region in a first layer of the memory unit;

a second transistor spanning a second transistor region in a second layer of the memory unit; and
a RSM cell spanning a memory region in a third layer of the memory unit;
wherein the first transistor is electrically coupled to the second transistor and the second transistor is electrically coupled to the RSM cell,
wherein the second layer is between the first layer and the third layer,
wherein the first transistor and the second transistor have an transistor overlap region, and
wherein the memory region does not extend beyond the first and second transistor regions.

16. The RSM unit according to claim 15, wherein the first transistor comprises a source and a drain and the second transistor comprises a source and a drain, the source of the first transistor is electrically connected to the source of the second transistor, and the drain of the first transistor is electrically connected to the drain of the second transistor.

17. The RSM unit according to any one of claims 15 or 16, wherein the RSM cell is electrically coupled to the drain region of the second transistor.

18. The RSM unit according to any one of claims 15 to 17 further comprising a bit line electrically coupled to the RSM cell.

19. A method of utilizing a RSM unit,
providing a RSM unit comprising;
a first transistor spanning a first transistor region in a first layer of the memory unit;
a second transistor spanning a second transistor region in a second layer of the memory unit; and
a RSM cell spanning a memory region in a third layer of the memory unit;
wherein the first transistor is electrically coupled to the second transistor
and the second transistor is electrically coupled to the RSM cell,
wherein the second layer is between the first layer and the third layer,

wherein the first transistor and the second transistor have an transistor overlap region, and
wherein the memory region does not extend beyond the first and second transistor regions; and
activating only the first or second transistor to determine the resistance state of the RSM cell.

20. The method according to claim 19 further comprising activating both the first and the second transistors to set the resistance state of the RSM cell.

100

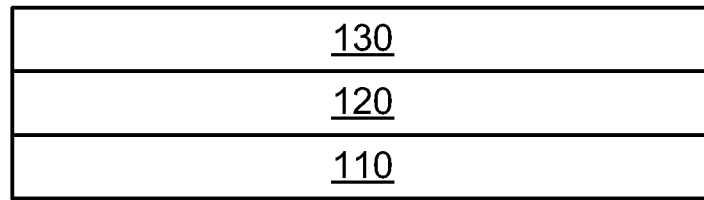


FIG. 1A

100

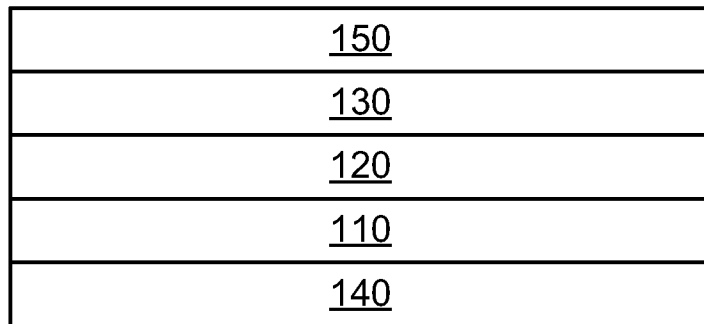


FIG. 1B

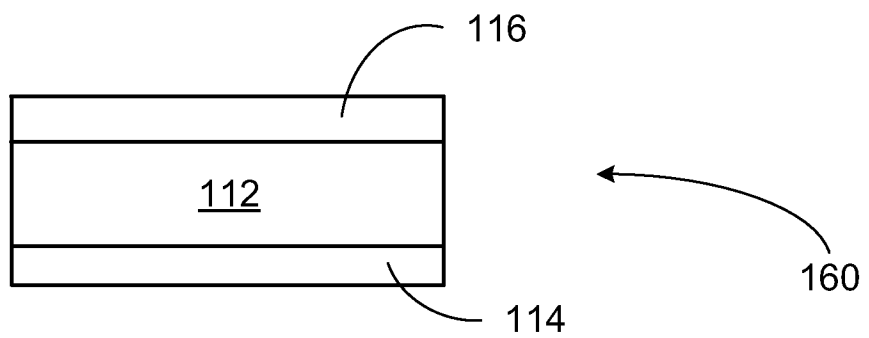


FIG. 1C

FIG. 2A

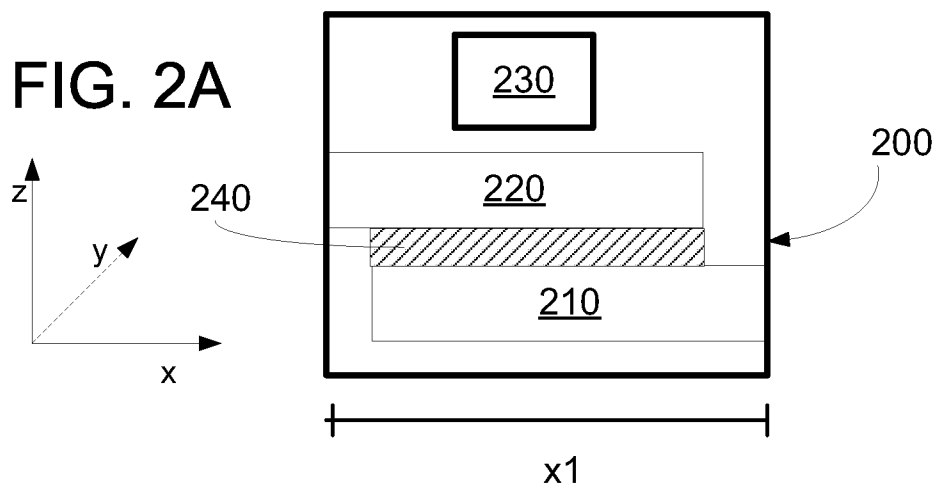


FIG. 2B

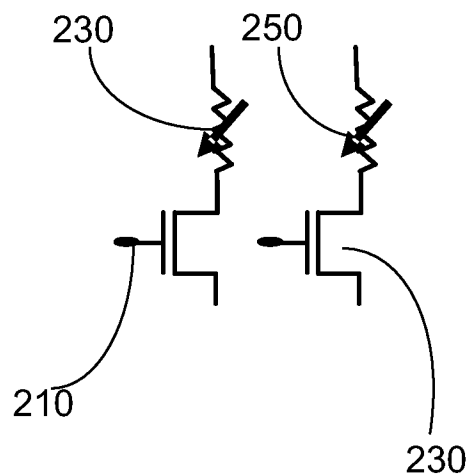
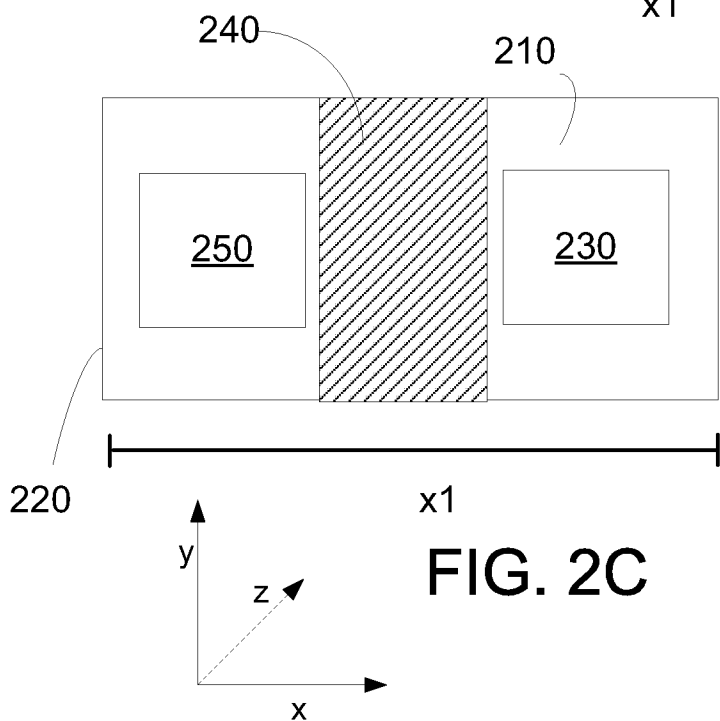
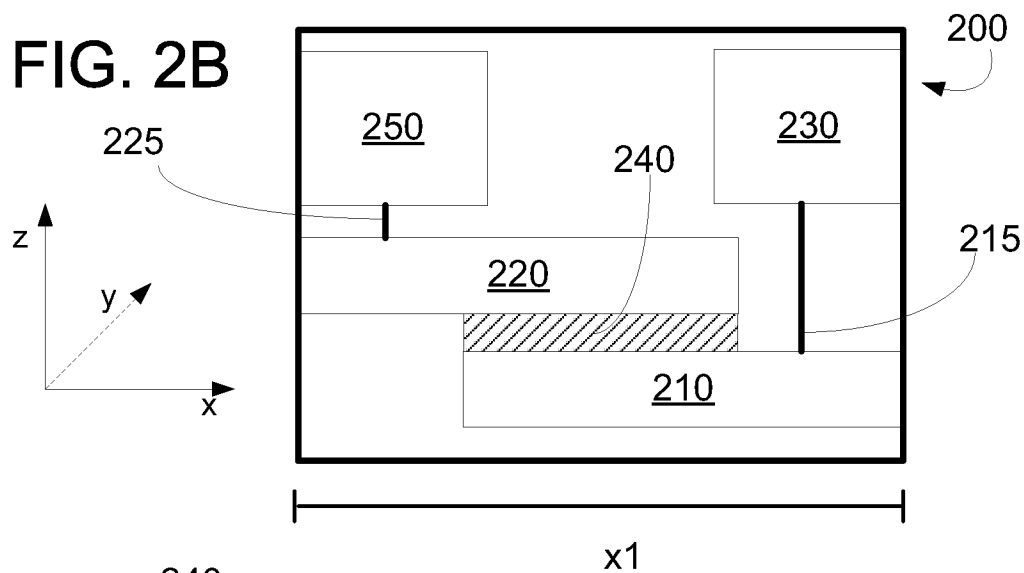


FIG. 2D

FIG. 3A

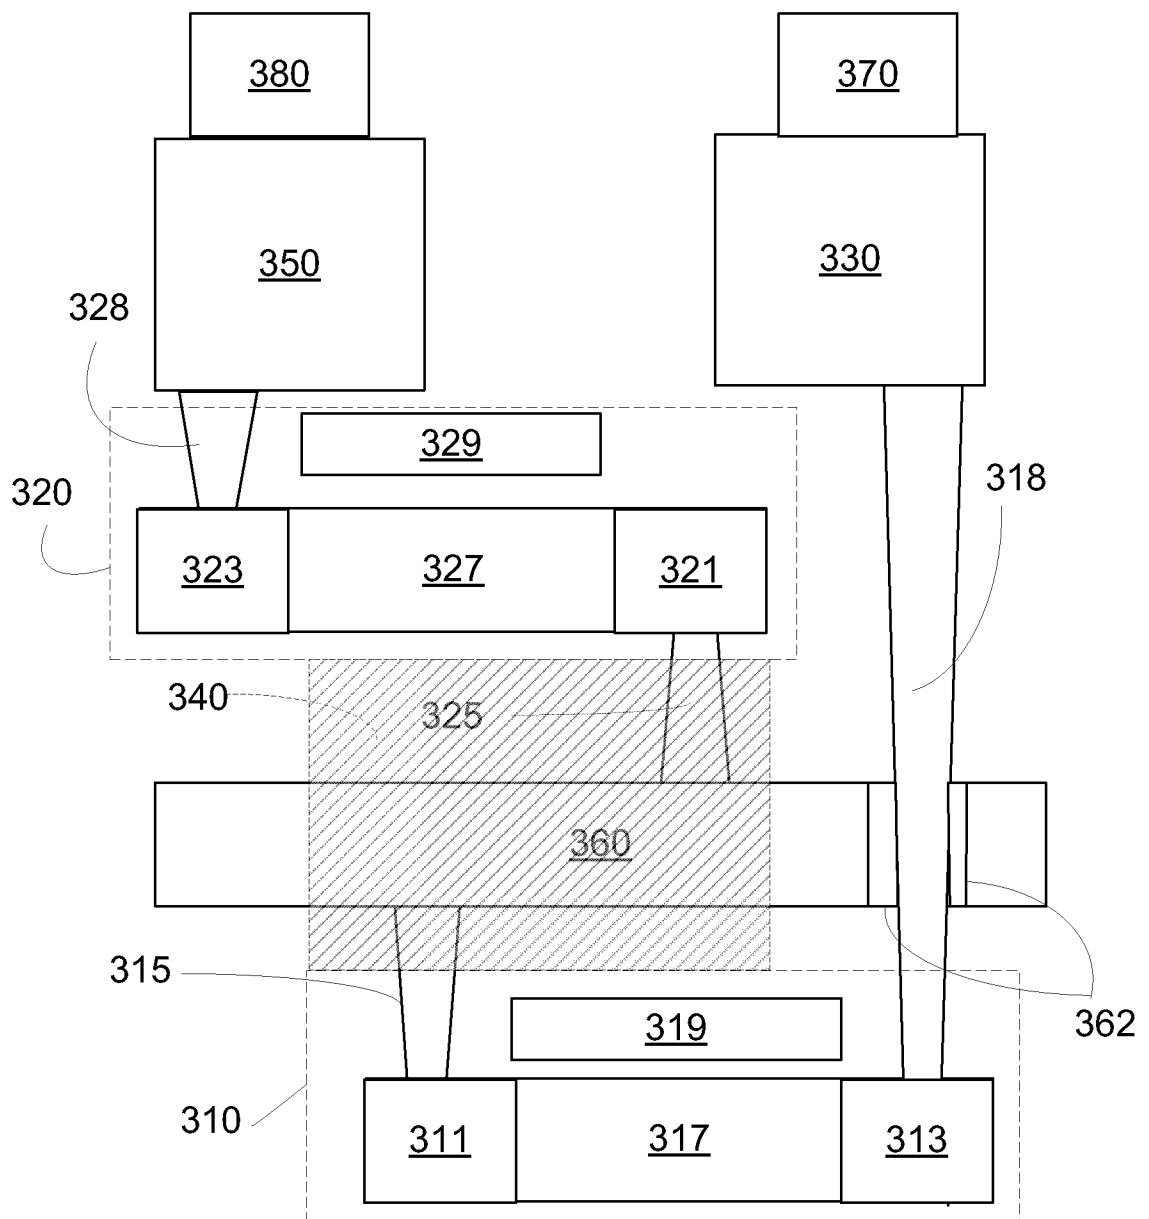


FIG. 3B

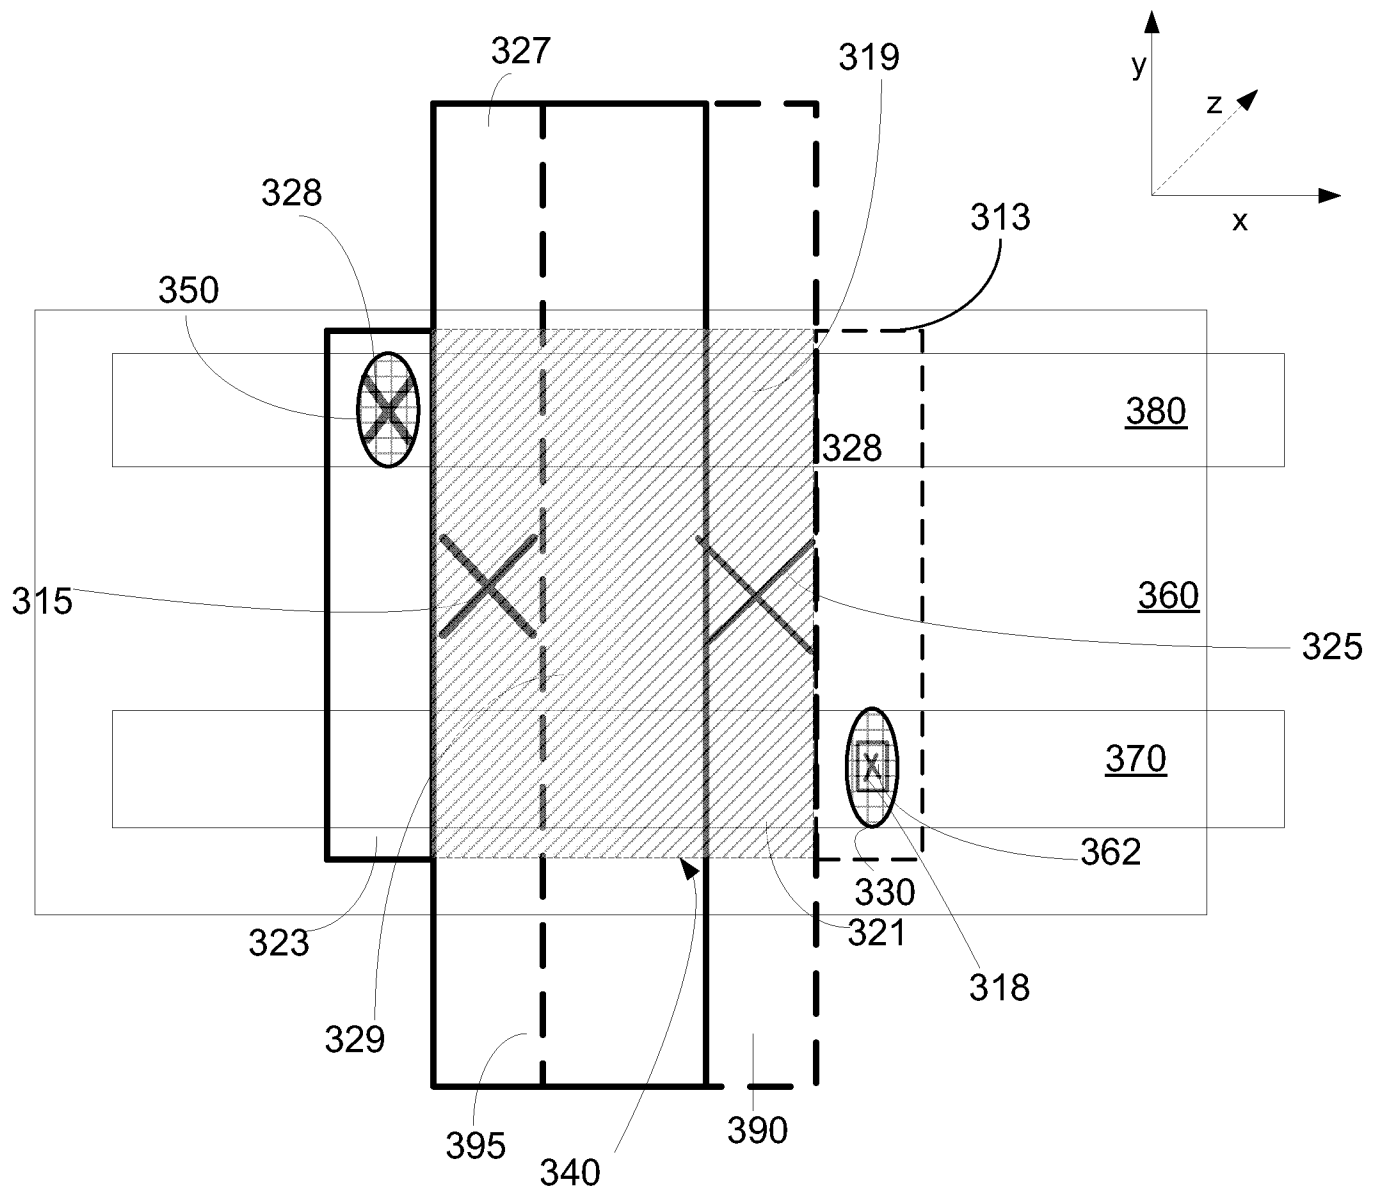


FIG. 3C

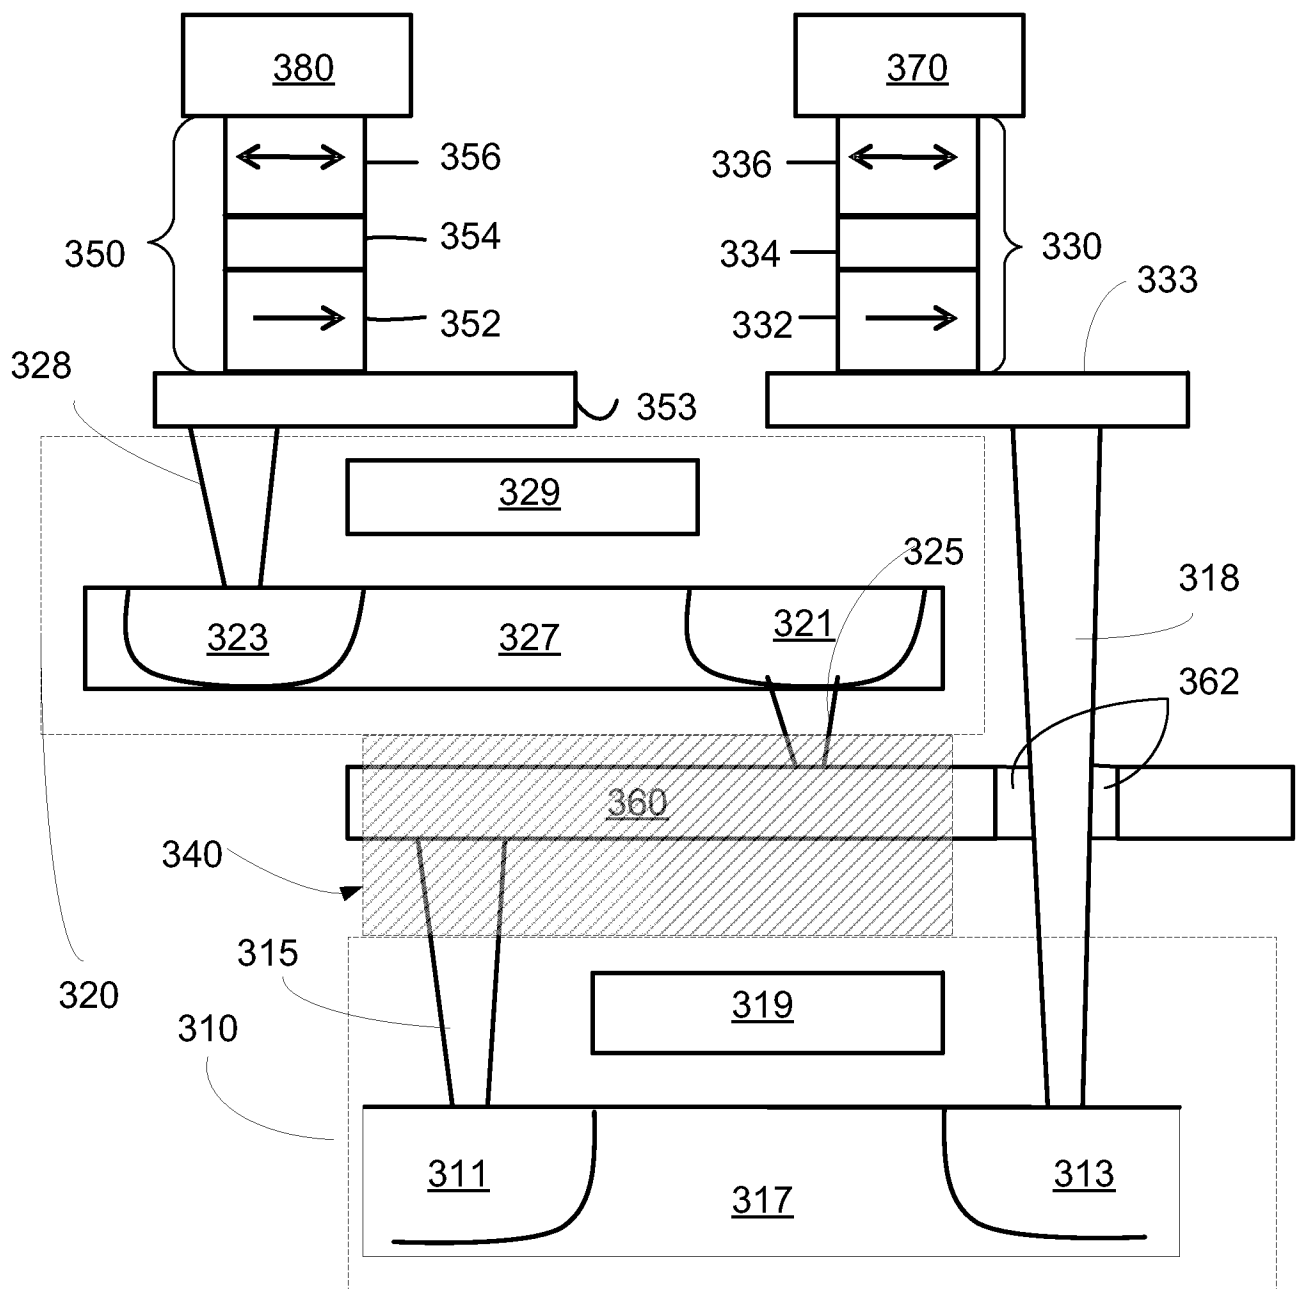


FIG. 4A

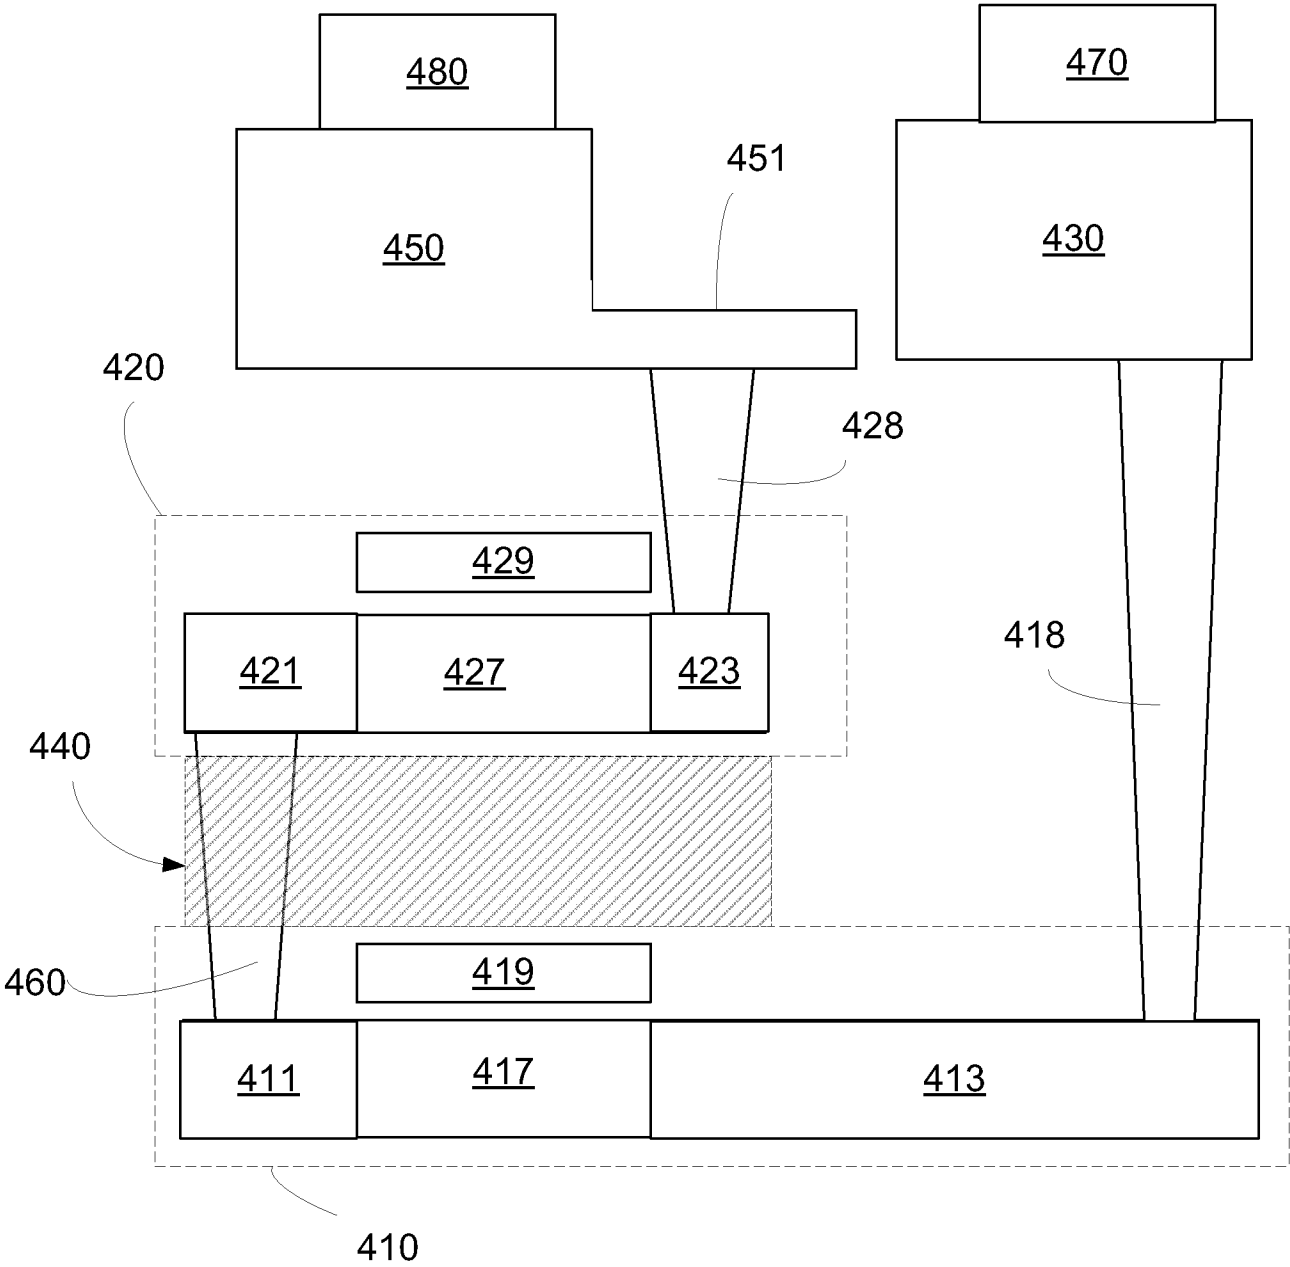


FIG. 4C

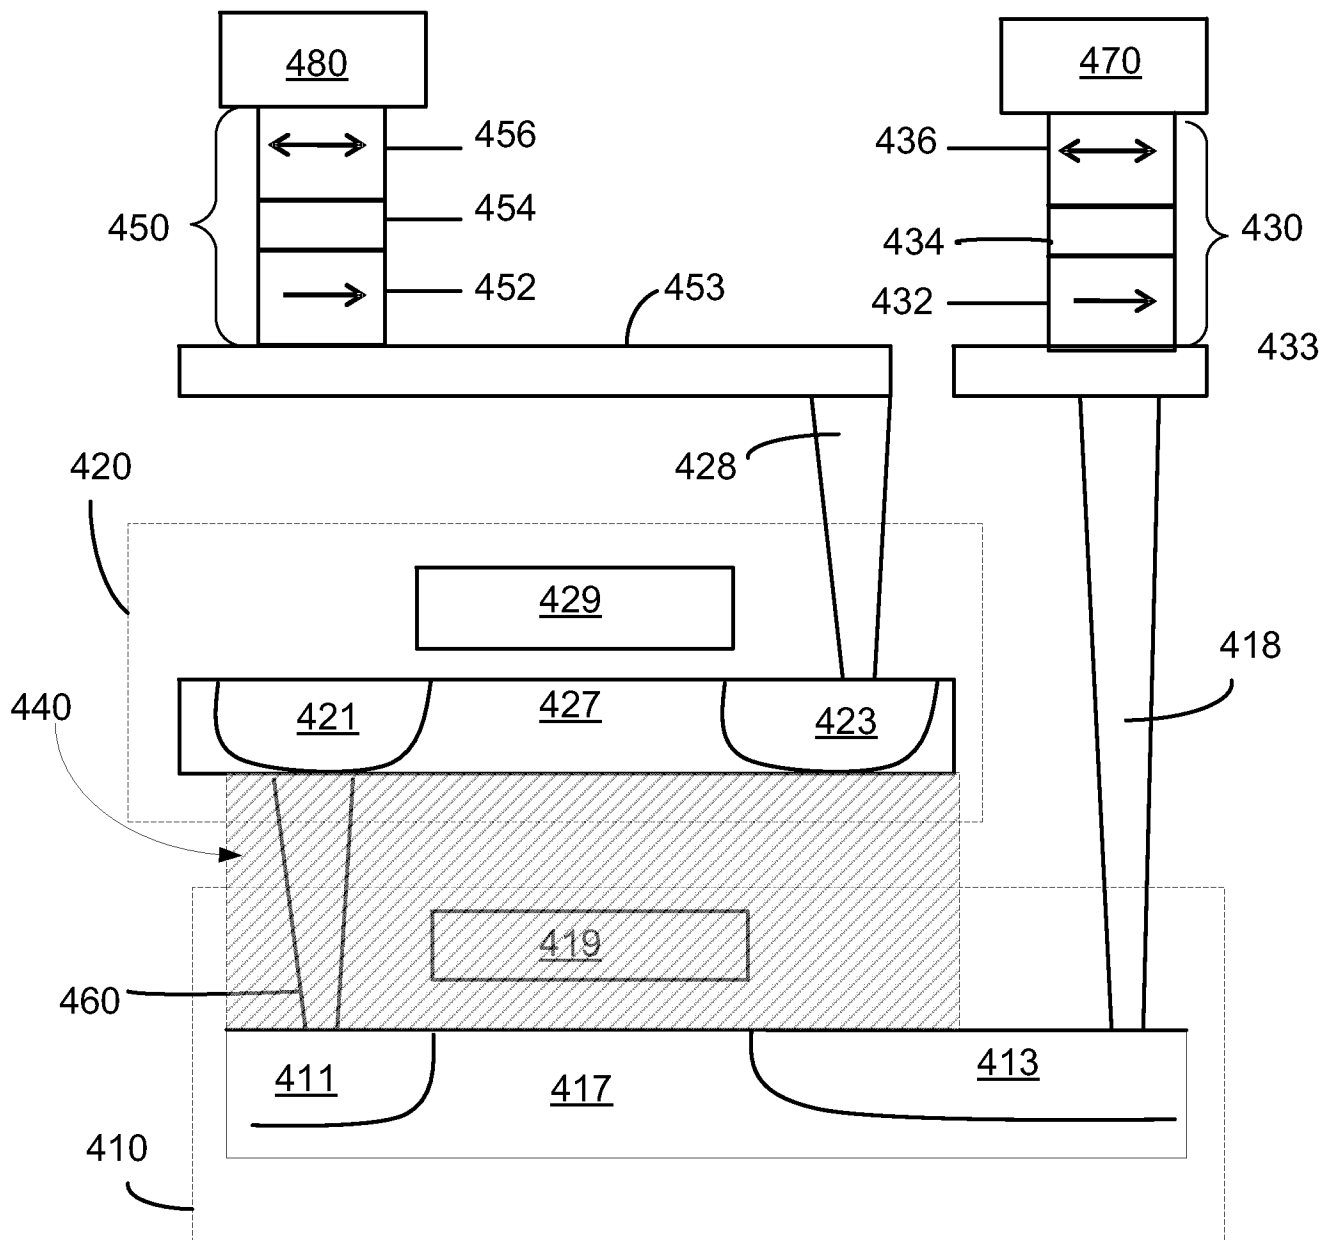


FIG. 5A

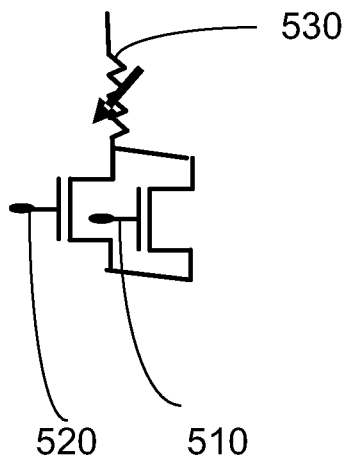


FIG. 5B

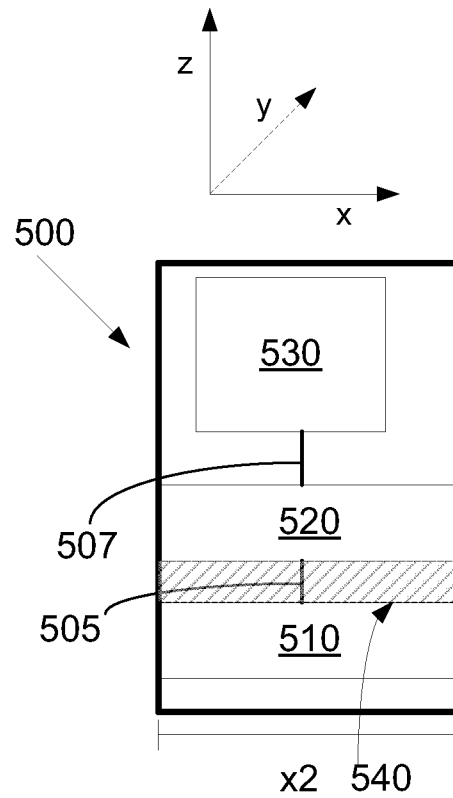


FIG. 5C

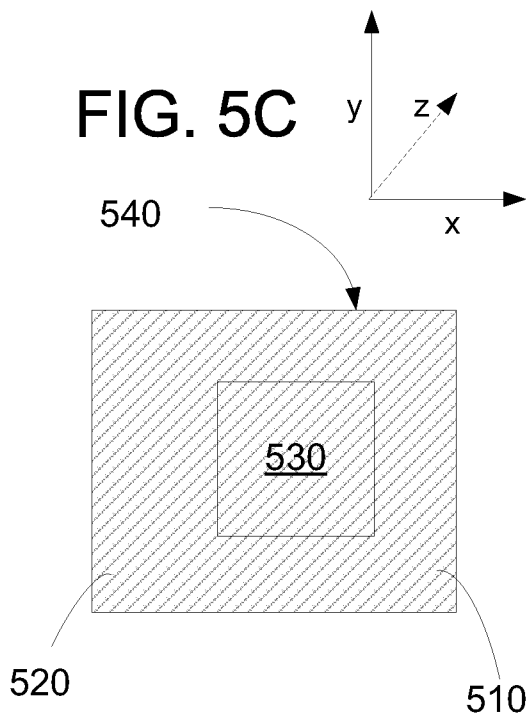


FIG. 5D

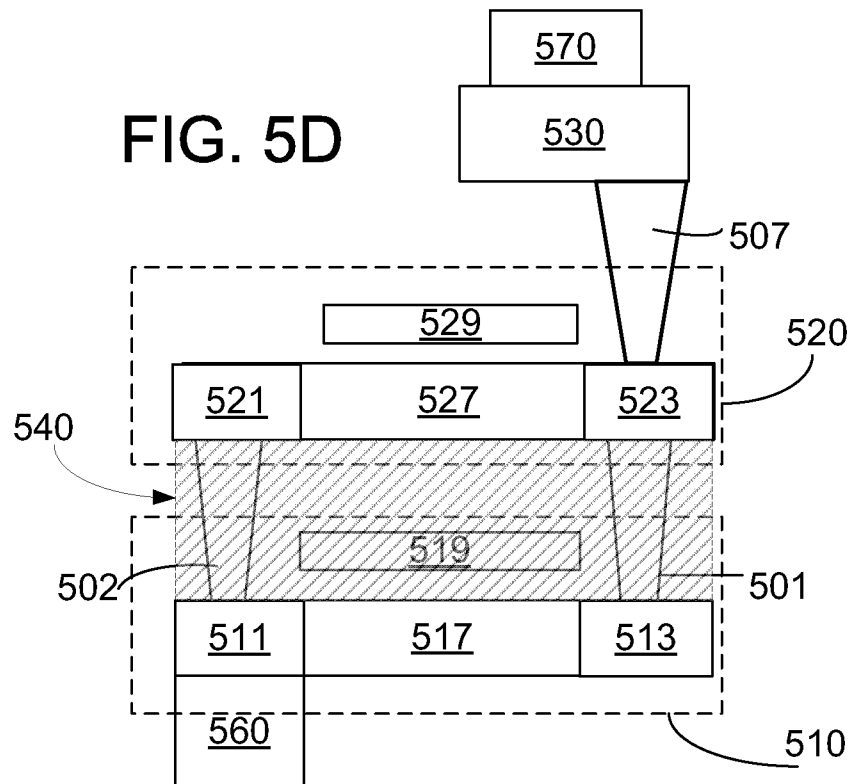


FIG. 5E

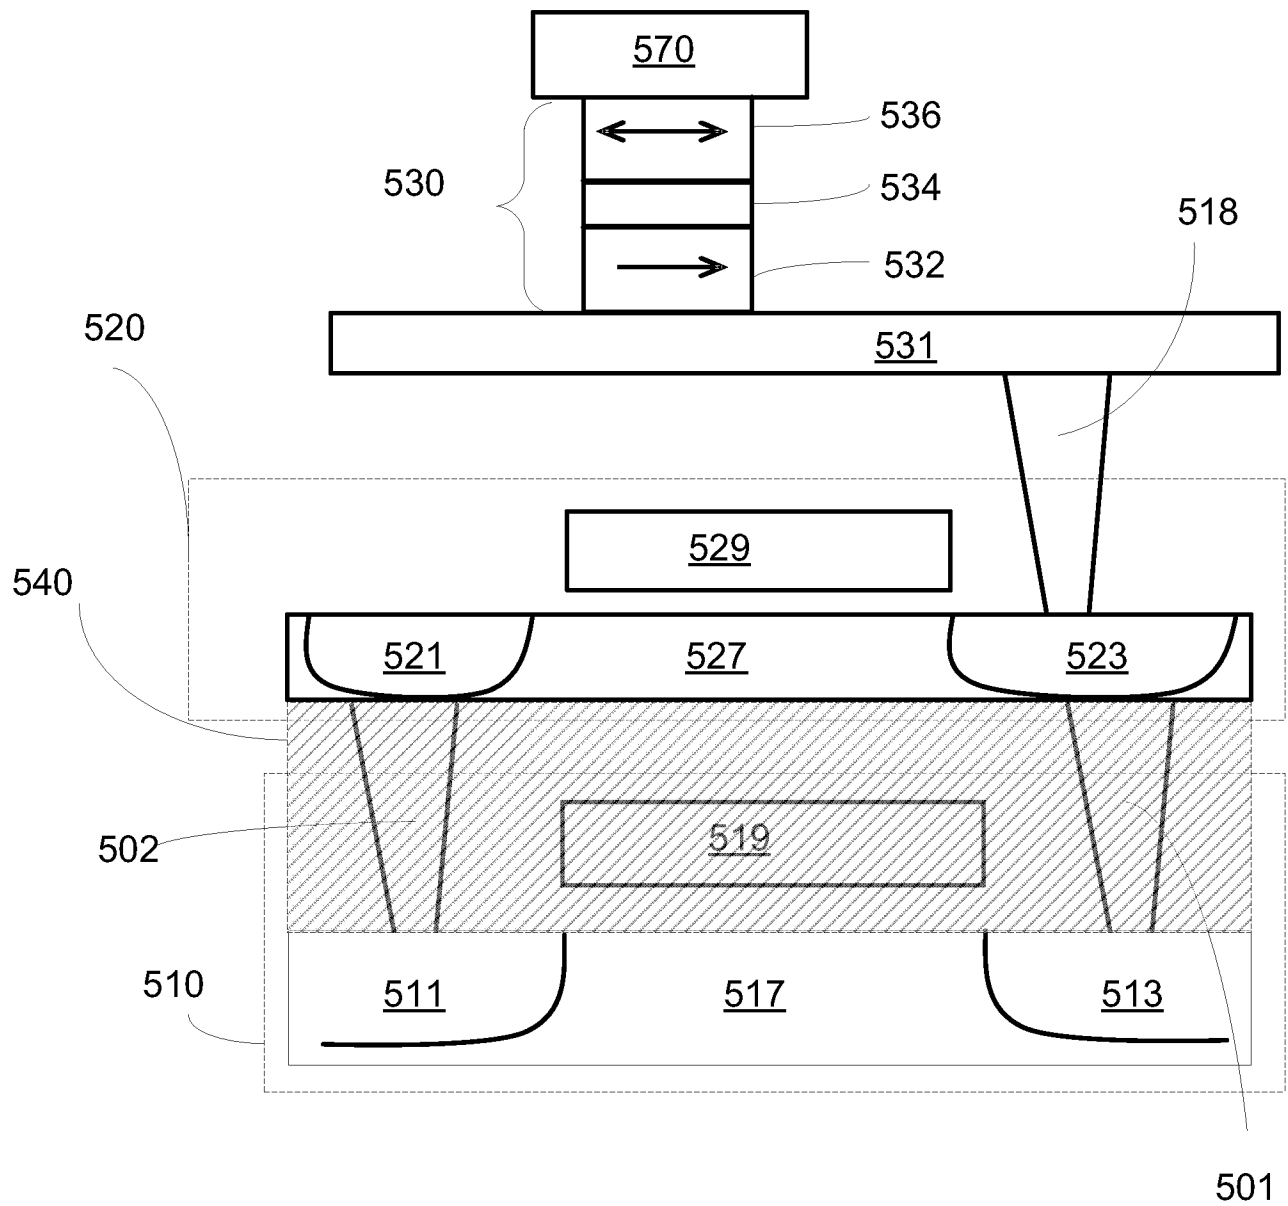


FIG. 5F

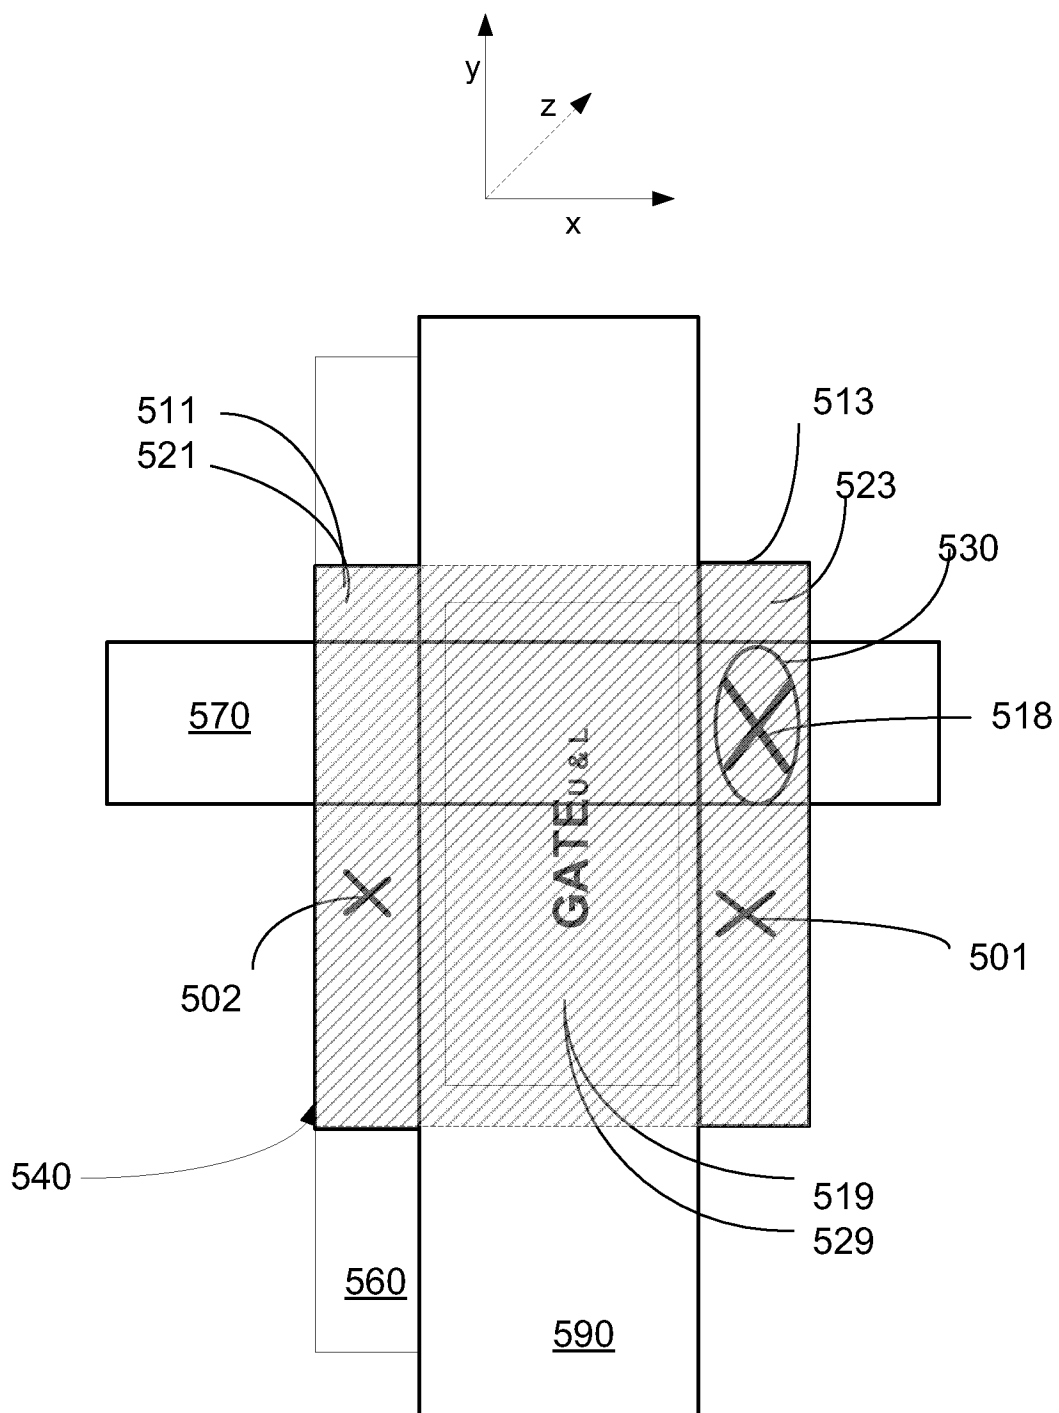


FIG. 6


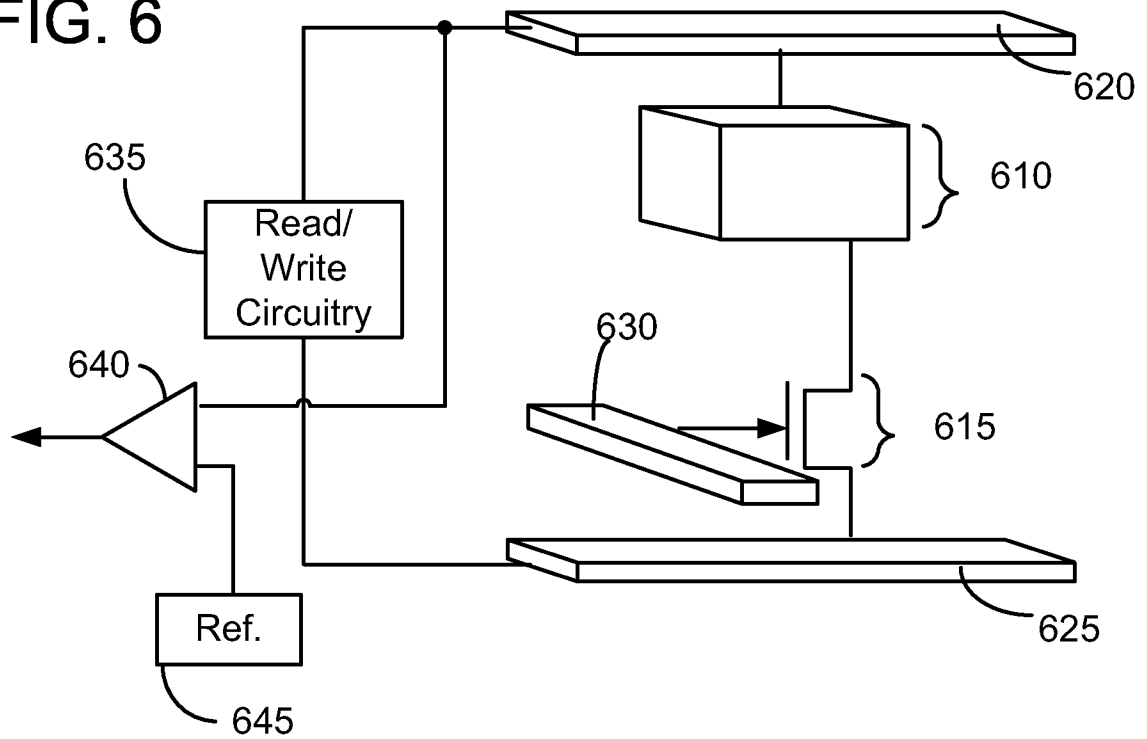


FIG. 7

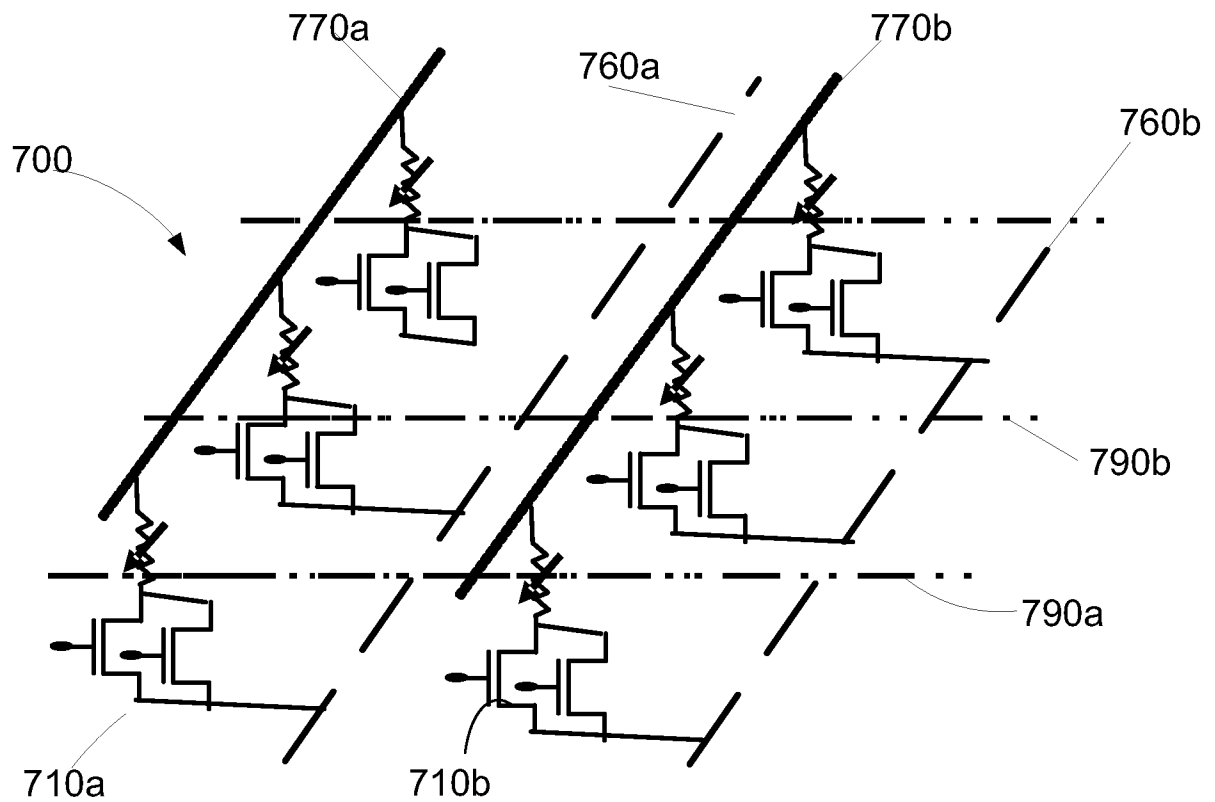

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2010/030466

A. CLASSIFICATION OF SUBJECT MATTER

INV. H01L27/24 H01L27/22

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L G11C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2006/120148 A1 (KIM SUNG-MIN [KR] ET AL) 8 June 2006 (2006-06-08)	15-18
Y	paragraphs [0005], [0014], [0026], [0052], [0054], [0057], [0064], [0065] figures 3,4	1-5,8, 11,13, 14,19,20
Y	US 2006/118913 A1 (YI JI-HYE [KR] ET AL) 8 June 2006 (2006-06-08) paragraphs [0022], [0030], [0040], [0047] figure 2A	1-5,8,14
Y	US 2007/268742 A1 (LIU JUN [US]) 22 November 2007 (2007-11-22) paragraphs [0026], [0027] ----- -/-	19,20

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

10 September 2010

Date of mailing of the international search report

20/09/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Meul, Hans

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2010/030466

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>US 2008/203503 A1 (ASAO YOSHIKI [JP]) 28 August 2008 (2008-08-28) paragraph [0003] figures 9,10</p> <p>-----</p>	11,13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/030466

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006120148 A1	08-06-2006	NONE	
US 2006118913 A1	08-06-2006	CN 1808736 A GB 2422053 A JP 2006165560 A KR 20060062979 A	26-07-2006 12-07-2006 22-06-2006 12-06-2006
US 2007268742 A1	22-11-2007	US 2010008163 A1	14-01-2010
US 2008203503 A1	28-08-2008	JP 2008192636 A	21-08-2008