(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
28 November 2019 (28.11.2019)

WIPO | PCT

(10) International Publication Number
WO 2019/224245 A1

(51) International Patent Classification:
F28D 9/00 (2006.01)

(21) International Application Number:
PCT/EP2019/063212

(22) International Filing Date:
22 May 2019 (22.05.2019)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
18461560.7 24 May 2018 (24.05.2018) EP

(71) Applicant: **VALEO AUTOSYSTEMY SP. Z O.O.** [PL/PL]; ul. Przemyslowa 3, 32 050 SKAWINA (PL).

(72) Inventors: **BELZOWSKI, Michal**; c/o Valeo Autosystemy Sp. z o.o., ul. Przemyslowa 3, 32 050 SKAWINA (PL). **SZOSTEK, Dawid**; c/o Valeo Autosystemy Sp. z o.o., ul. Przemyslowa 3, 32 050 SKAWINA (PL). **POKRYWINSKI, Karol**; c/o Valeo Autosystemy Sp. z o.o., ul. Przemyslowa 3, 32 050 SKAWINA (PL).

(74) Agent: **BIALKOWSKI, Adam**; ZA l'Agiot, 8 rue Louis Lormand, CS 80517 La Verrière, 78322 LE MESNIL SAINT DENIS CEDEX (FR).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: HEAT EXCHANGER

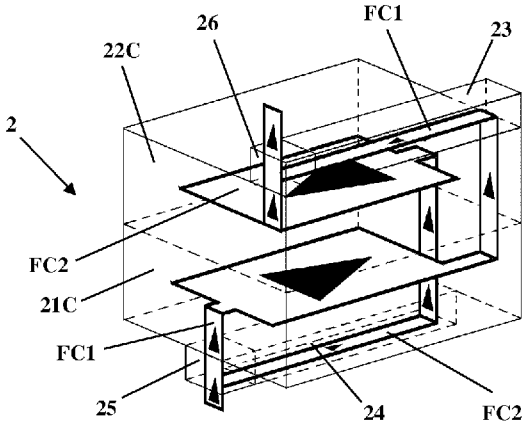

Fig. 4

(57) Abstract: A heat exchanger (1) comprises a core (2), which defines first and second fluid circuits therein. Both fluid circuits are divided into two flow sections (21C, 22C and 21R, 22R). The first fluid circuit is split into first and second sub-circuits. A direction of a first flow of a first fluid through the first flow section (21C) of the first fluid circuit is opposite to a direction of flow of a second fluid through the second flow section (22R) of the second fluid circuit and a direction of a second flow of the first fluid through the second flow section (22C) of the first fluid circuit is opposite to the direction of flow of the second fluid through the first flow section (21R) of the second fluid circuit.

WO 2019/224245 A1

[Continued on next page]

Published:

— *with international search report (Art. 21(3))*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Heat exchanger

FIELD OF INVENTION

The present invention relates to a heat exchanger, especially to a heat exchanger with improved flow scheme of two working fluids.

PRIOR ART

Prior art heat exchangers comprise a core, which defines two fluid circuits therein. A first working fluid flows through a first fluid circuit, while a second working fluid flows through a second fluid circuit. Both fluid circuits can be divided into one or more distinctive flow sections of the same or different sizes, through which the working fluids can flow in the same or opposing directions. Examples of such heat exchangers are disclosed in DE 10 2016 001 607 A1, US 2017/0122669 A1, US 2016/0010929 A1, US 2015/0226469 A1 or US 2013/0213624 A1.

In order to increase heat exchange efficiency and prolong time when a coolant and a refrigerant exchange heat between each other known heat exchangers are divided into multiple flow sections, which increases the length of both fluid circuits. This, however, poses a series of associated problems like pressures drops of the working fluids or increase in the size and weight of the heat exchanger.

AIM OF INVENTON

One aim of the present invention is to provide a heat exchanger with reduced pressure drops of the coolant, while improving heat exchange efficiency.

In particular, the aim of the present invention is to provide a heat exchanger with reduced dimensions and increased power and at the same time offering good balance between power and size.

SUMMARY OF INVENTION

A heat exchanger comprises a core. The core defines a first fluid circuit and a second fluid circuit. The first fluid circuit is divided into first and second flow sections and the second fluid circuit is divided into first and second flow sections. The first flow section of the first fluid circuit coincides with the second flow section of the second fluid circuit and the second flow section of the first fluid circuit coincides with the first flow section of the second fluid circuit. The first fluid circuit is split into first and second sub-circuits connected to each other at an inlet and an outlet of the first fluid circuit, respectively, so that flow of a first fluid is divided into first and second flows throughout the core. The first sub-circuit extends through the first flow section of the first fluid circuit. The second sub-circuit extends through the second flow section of the first fluid circuit. The flow sections of the first fluid circuit and the second fluid circuit, respectively, are configured so that a direction of the first flow of the first fluid through the first flow section of the first fluid circuit is opposite to a direction of flow of a second fluid through the second flow section of the second fluid circuit and a direction of the second flow of the first fluid

through the second flow section of the first fluid circuit is opposite to the direction of flow of the second fluid through the first flow section of the second fluid circuit.

The present invention allow the weight and the size of the heat exchanger to be reduced, while maintaining the same heat exchange efficiency. As the working fluids are used more efficiently the number of the flow passages can be reduced as compared to known heat exchangers.

In the heat exchanger according to the present invention pressure drops are significantly lower. It means that less power is needed to ensure fluid flow, which lead to costs savings not in terms of the heat exchanger itself but in terms of associated equipment, like pumps, which may be less efficient.

The heat exchanger according to the present invention provides very good balance between power and size/mass. Moreover, although the first fluid circuit is divided into two sub-circuits pressure drops and flow resistance are kept low.

BRIEF DESCRIPTION OF DRAWINGS

Fig. 1 shows a side view of a heat exchanger of the present invention;

Fig. 2 shows schematically a longitudinal section view of the heat exchanger of the present invention, showing schematically coolant flow paths through a core, a total flow of a coolant flowing into and out of the core being shown with black-filled arrows;

Figs. 3a and 3b show top views of two examples of shaped plates used in the heat exchanger of the present invention;

Fig. 4 and 5 show a perspective schematic view and a vertical diagram, respectively, of a coolant flow through a core of the heat exchanger; and

Fig. 6 and 7 show a perspective schematic view and a vertical diagram, respectively, of a refrigerant flow through the core of the heat exchanger.

EMBODIMENTS OF INVENTION

A heat exchanger 1 of the present invention comprises a core 2 where heat exchange between two fluids takes place. The heat exchanger 1 also comprises a plurality of inlet and outlet ports 3 to deliver a coolant/first fluid and a refrigerant/second fluid to and out of the core 2.

The core 2 defines therein two fluid circuits, namely a first fluid circuit for the coolant and a second fluid circuit for the refrigerant. Both fluid circuits are fluidly separated from each other. It means that both fluids do not mix. For this purpose the core 2 includes a plurality of shaped plates 4 stacked on top of one another. Each pair of two adjacent shaped plates 4 defines a flow passage 5 therebetween. The first and second fluids, coolant and refrigerant respectively, flow through the flow passages 5. To maximize the heat exchange efficiency the flow passages should be used alternatively, namely a first flow passage for the first fluid, a second flow passage for the second fluid, a third flow passage for the first fluid, etc.

The core 2 also comprises first and second bypass channels 23, 24. Generally, these two bypass channels 23, 24 do not participate in heat exchange between two fluids. The bypass channels 23, 24 are mostly used to split the coolant flow into two parts at an inlet 25 of the first

fluid circuit to the core 2 and bring these two parts of the coolant flow back together at an outlet 26 of the first fluid circuit from the core 2. The inlet 25 and the outlet 26 of the first fluid circuit can be in many cases simply one(s) of the inlet and outlet ports 3. The inlet 25 is connected to the second bypass channel 24 and one vertical channel. The outlet 26 is connected to the first bypass channel 23 and one vertical channel. The inlet 25 and the outlet 26 can be situated at the same or different longitudinal ends of the core 2.

Generally, the shaped plate 4 comprises a bottom 41 and a peripheral wall 42 protruding from the bottom 41. The shaped plate 4 is provided at both its ends with openings 43. The openings 43 of the stacked shaped plates 4 define vertical channels throughout the core 2 at both longitudinal ends of the core 2. The vertical channels formed by the openings 43 are in fluid communication with selected flow passages 5 formed between the shaped plates 4. For this purpose the shaped plate 4 comprises a number of additional features. For example, the shaped plate 4 can comprise a ridge 44 enclosing one or more openings 43. When the shaped plates 4 are stacked the ridge 44 of one shaped plate 4 is in sealed contact with the shaped plate 4 located above it. Thus, a fluid flowing through the opening 43 enclosed by the ridge 44 cannot flow into the fluid passage 5 shown in fig. 3a and can only flow in a vertical direction of the core 2. To allow for the flow of the fluids to the fluid passage 5 in a longitudinal direction of the core 2 the configuration of the ridge 44 is changed so that it no longer encloses the opening 43 concerned, see fig. 3b. Instead, the opening 43 is encircled by a series

of spaced-apart protrusions 45, which allow the fluid to flow therebetween, or even the opening 43 may not be obscured by additional elements so that the opening 43 is in fluid communication with the flow passage 5. The openings 43 of the outermost shaped plates 4 can be connected to the inlet and outlet ports 3.

To terminate the vertical channels at a given level the openings 43 can be closed by plugs or even may not be present in the shaped plates 4. The number of the openings 43 as well as their position and configuration at both longitudinal ends of the shaped plates 4 can be chosen voluntary, depending on the configuration of the core 2 and a flow scheme to be obtained. With the core 2 formed in this way the first and second fluids do not mix and they flow in respective flow passages 5 formed between the shaped plates 4.

As discussed earlier, the core 2 defines two fluid circuits. The first fluid circuit is used for the coolant/first fluid, while the second fluid circuit is used for the refrigerant/second fluid. The coolant flow is shown schematically in figs. 4 and 5. The first fluid circuit is divided by an appropriate configuration of the vertical channels/openings 43 into two flow sections 21C, 22C. The coolant is split at the inlet 25 into two flows FC1, FC2 throughout the core 2. The first flow FC1 is directed to the first flow section 21C of the first fluid circuit through one of the vertical channels formed at a first longitudinal end of the core 2. Next, the first flow FC1 of the coolant flows in the longitudinal direction of the core 2 through the first flow section 21C of the first fluid circuit and its all flow passages 5. Subsequently, at a

second longitudinal end of the core 2 the first flow FC1 of the coolant flows through one of the vertical channels and into the first bypass channel 23 and the outlet 26.

The second flow FC2 of the coolant, having left the inlet 25, flows first through the second bypass channel 24 and then through one of the vertical channels at the second longitudinal end of the core 2. When it leaves the vertical channel the second flow FC2 of the coolant flows into the second flow section 22C of the first fluid circuit. Here, the second flow FC2 of the coolant flows in the longitudinal direction of the core 2 through the second flow section 22C and its all flow passages 5. Finally, the second flow FC2 of the coolant flows out of the second flow section 22C of the first fluid circuit through one of the vertical channels at the first longitudinal end of the core 2 and flows into the outlet 26.

At the outlet 26 the first and the second flows FC1, FC2 of the coolant meet again and mix and a resultant total flow is discharged from the outlet 26 and the core 2 itself.

In other words, the first fluid circuit is divided into two sub-circuits at the position where the coolant enters the core 2 (namely the inlet 25) and the two sub-circuits merge together at the position where the coolant leaves the core 2 (namely the outlet 26).

Generally, the two sub-circuits of the first fluid circuit are connected parallel to each other at the inlet 25 and at outlet 26 of the first fluid circuit to and from the core 2. It means that the total flow of the coolant is divided into two flows FC1, FC2 where the two sub-circuits

separates from one another and the two flows FC1, FC2 mix together where the two sub-circuits combine back again.

The first sub-circuit of the first fluid circuit extends from the inlet 25 to the outlet 26 as follows: the inlet 25 at the first longitudinal end of the core 2, one vertical channel at the first longitudinal end of the core 2, the first flow section 21C of the first fluid circuit, one vertical channel at the second longitudinal end of the core 2, the first bypass channel 23 and the outlet 26 at the first longitudinal end of the core 2. The second sub-circuit of the first fluid circuit extends from the inlet 25 to the outlet 26 as follows: the inlet 25 at the first longitudinal end of the core 2, the second bypass channel 24, one vertical channel at the second longitudinal end of the core 2, the second flow section 22C of the first fluid circuit, one vertical channel at the first longitudinal end of the core 2 and the outlet 26 at the first longitudinal end of the core 2. Generally, one vertical channel, which delivers a fluid from one flow section to another is in fact part of both flow sections.

The second fluid circuit for the refrigerant is shown schematically in figs. 6 and 7. The second fluid circuit is divided into first and second flow sections 21R, 22R. The refrigerant flows via one inlet port 3 and one vertical channel at the first longitudinal end of the core 2 into the first flow section 21R of the second fluid circuit and flows in the longitudinal direction of the core 2 through the first flow section 21R of the second fluid circuit and its all flow passages 5 towards the second longitudinal end of the core 2. Next, the refrigerant is directed through one vertical channel at the second longitudinal end of the

core 2 to the second flow section 22R of the second fluid circuit. Here, the refrigerant flows in the longitudinal direction of the core 2 through the second flow section 22R of the second fluid circuit and its all flow passages 5 towards the first longitudinal end of the core 2 where it enters one vertical channels and flows out of the core 2.

The first flow section 21C of the first fluid circuit coincides with the second flow section 22R of the second fluid circuit and the second flow section 22C of the first fluid circuit coincides with the first flow section 21R of the second fluid circuit. By the term "coinciding" it should be understood that two flow sections overlap so that they occupy essentially the same volume/have the same size (length and cross-section). It does not mean that two flow sections are connected to one another or are in fluid communication so that two working fluids mix.

It should be noted that a direction of the first flow FC1 of the coolant in the first flow section 21C of the first fluid circuit is opposite to a direction of flow of the refrigerant in the second flow section 22R of the second fluid circuit. Additionally, a direction of the second flow FC2 of the coolant in the second flow section 22C of the first fluid circuit is opposite to a direction of flow of the refrigerant in the first flow section 21R of the second fluid circuit. In other words, it is always ensured that the direction of the coolant flow is opposite to the direction of the refrigerant flow in all the flow sections 21C, 22C, 21R, 22R. Moreover, as the coolant flow is split into two flows FC1, FC2 before entering the first flow section 21C of the first fluid circuit, the first and second flows FC1, FC2 of the same temperature flow into the

first and second flow sections 21C, 22C of the first fluid circuit and interact indirectly with the refrigerant flow in both flow sections 21R, 22R of the second fluid circuit. This greatly increases heat exchange efficiency of the heat exchanger 1.

Moreover, as the coolant flow is split into the first and second flows FC1, FC2 the coolant flow inside each of the first and second flow sections 21C, 22C of the first fluid circuit is two times slower that the total flow at the inlet 25 and the outlet 26 of the first fluid circuit and this have a positive effect on pressure drops.

Preferably, the first and second flow sections 21C, 22C of the first fluid circuit, as well as the first and second flow sections 21R, 22R of the second fluid circuit, have the same size (length and cross-section). However, if desirable, it is possible to design the heat exchanger 1 with the first and second flow sections 21C, 22C of the first fluid circuit having different sizes in order to benefit from a pressure drop difference. Preferably, as the flow sections 21R, 22R of the second fluid circuit essentially coincide with and have the size as the flow sections 21C, 22C of the first fluid circuit the flow sections 21R, 22 can also have different sizes compared to one another.

The present invention discussed above is not limited only to heat exchangers consisting of a plurality of shaped plates. The innovative principle of the present invention can be applied to heat exchangers, where flow passages are defined by, for example, a series of flat hollow flow tubes stacked in a pile and defining flow passages therein, a first set of the flat hollow flow tubes being passed by the

coolant while the other being passed by the refrigerant. Another example is a heat exchanger, which incorporates a combination of flat hollow flow tubes and shaped plates. A first set of flow passages is defined inside the flat hollow flow tubes and a second set of flow passages is defined between successive shaped plates. The flat hollow flow tubes and the shaped plates are stacked in a pile so that one flat hollow flow tube is arranged between two successive shaped plates. The coolant flows, for example, through the flat hollow flow tubes and the refrigerant flows through passages defined by two successive shaped plates, or vice versa. In each of these two solutions the fluid circuits each can easily be divided into two flow sections with different directions of flow. The flow sections can be fluidly connected to one another by a variety of additional elements, like hoses, manifolds, etc.

Preferably, all components of the heat exchanger 1 are made of materials suitable for brazing, for example aluminum and its alloys, and are connected to one another by brazing.

Claims

1. A heat exchanger (1) comprising a core (2), said core (2) defining a first fluid circuit and a second fluid circuit, said first fluid circuit being divided into first and second flow sections (21C, 22C) and said second fluid circuit being divided into first and second flow sections (21R, 22R), said first flow section (21C) of said first fluid circuit coinciding with said second flow section (22R) of said second fluid circuit and said second flow section (22C) of said first fluid circuit coinciding with said first flow section (21R) of said second fluid circuit,

characterized in that

said first fluid circuit is split into first and second sub-circuits connected to each other at an inlet (25) and an outlet (26) of said first fluid circuit, respectively, so that flow of a first fluid is divided into first and second flows (FC1, FC2) throughout said core (2), said first sub-circuit extending through said first flow section (21C) of said first fluid circuit, said second sub-circuit extending through said second flow section (22C) of said first fluid circuit,

wherein said flow sections (21C, 22C, 21R, 22R) of said first fluid circuit and said second fluid

circuit, respectively, are configured so that a direction of said first flow (FC1) of said first fluid through said first flow section (21C) of said first fluid circuit is opposite to a direction of flow of a second fluid through said second flow section (22R) of said second fluid circuit and a direction of said second flow (FC2) of said first fluid through said second flow section (22C) of said first fluid circuit is opposite to said direction of flow of said second fluid through said first flow section (21R) of said second fluid circuit.

2. The heat exchanger (1) according to claim 1, **characterized in that** said flow sections (21C, 22C, 21R, 22R) all have the same size.

3. The heat exchanger (1) according to claim 1, **characterized in that** said first flow section (21C) of said first fluid circuit and said second flow section (22R) of said second fluid circuit have the same size and said second flow section (22C) of said first fluid circuit and said first flow section (21R) of said second fluid circuit have the same size, said size of said first flow section (21C) of said first fluid circuit and said second flow section (22R) of said second fluid circuit being different than said size of said second flow section (22C) of said first fluid circuit and said first flow section (21R) of said second fluid circuit.

4. The heat exchanger (1) according to any of the preceding claims, **characterized in that** it comprises first and second bypass channels (23, 24), which split said first fluid circuit into said first and second

sub-circuits, said first sub-circuit extending from said inlet (25) to said outlet (26) through said first flow section (21C) of said first fluid circuit and said first bypass channel (23), said second sub-circuit extending from said inlet (25) to said outlet (26) through said second bypass channel (24) and said second flow section (22C) of said first fluid circuit.

5. The heat exchanger (1) according to any of the preceding claims, **characterized in that** said core (2) comprises a plurality of stacked shaped plates (4).

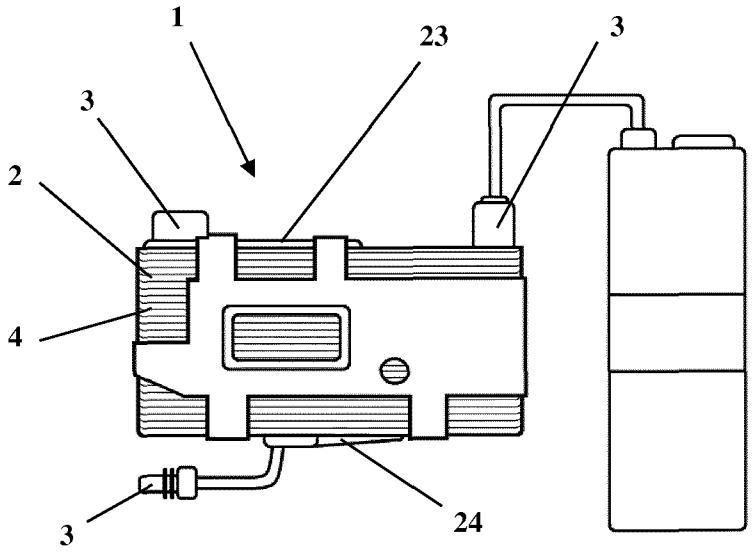

Fig. 1

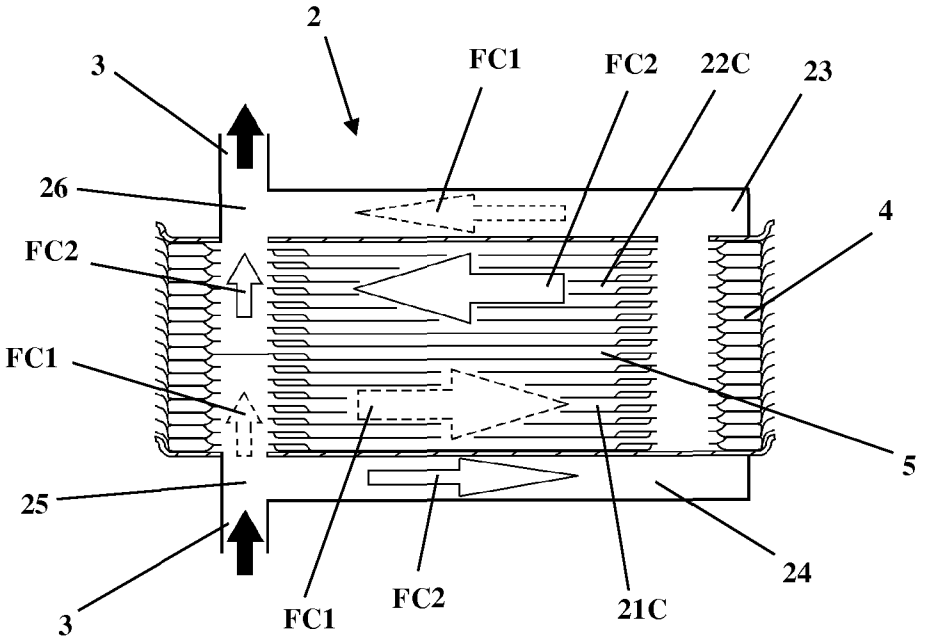

Fig. 2

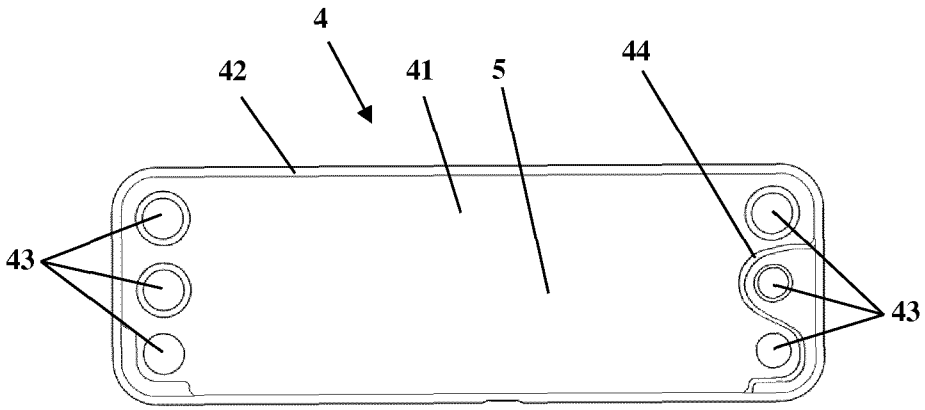

Fig. 3a

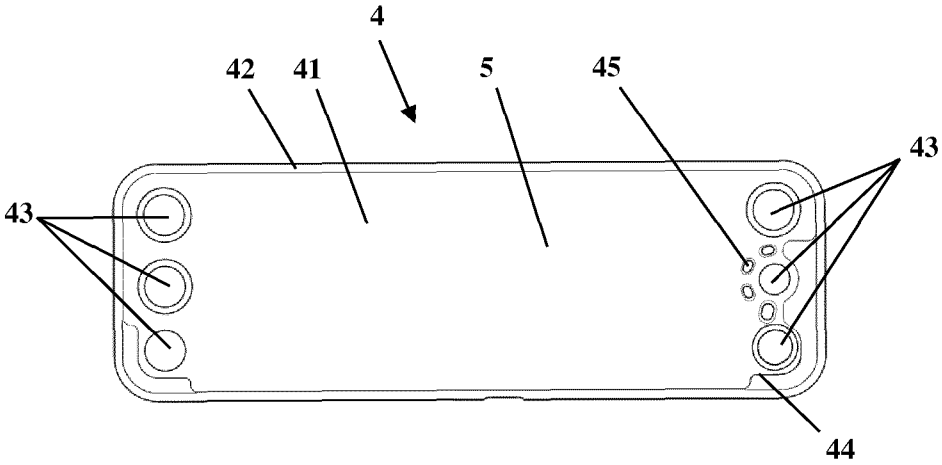

Fig. 3b

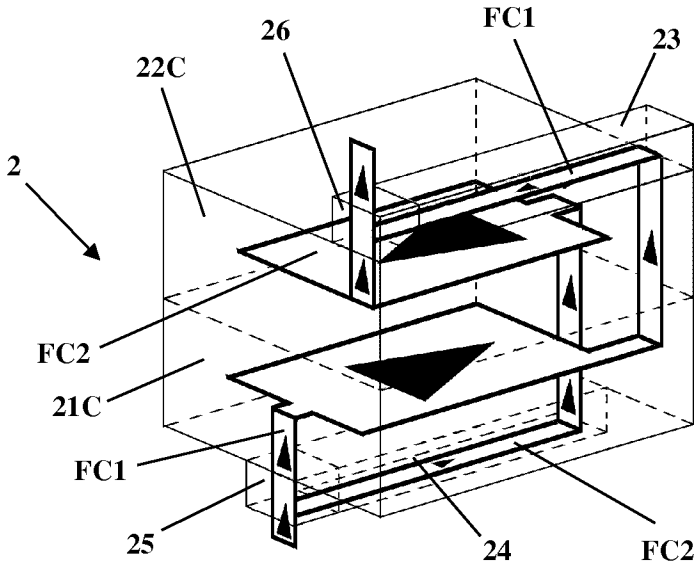
26
FC1
23
22C
2
FC2
21C
FC1
25
24
FC2

Fig. 4

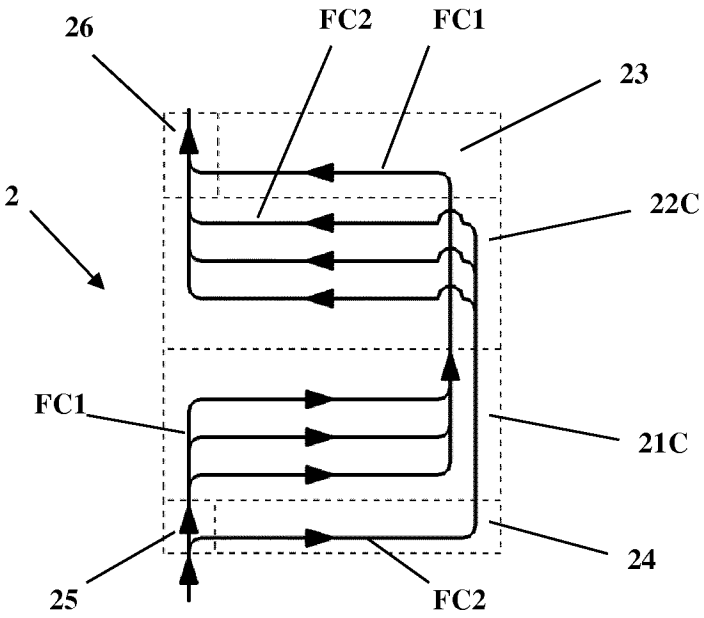
26
FC2
FC1
23
2
22C
FC1
21C
24
25
FC2

Fig. 5

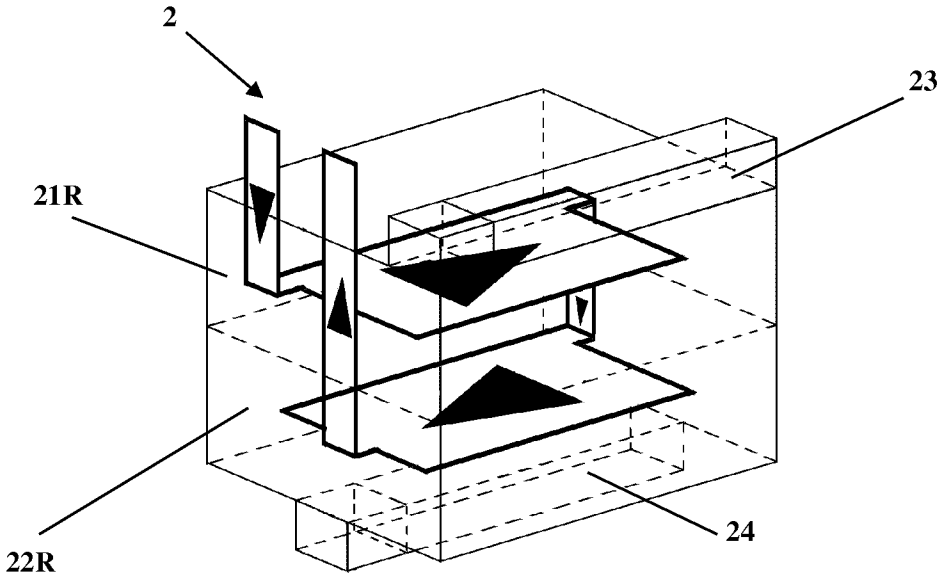

Fig. 6

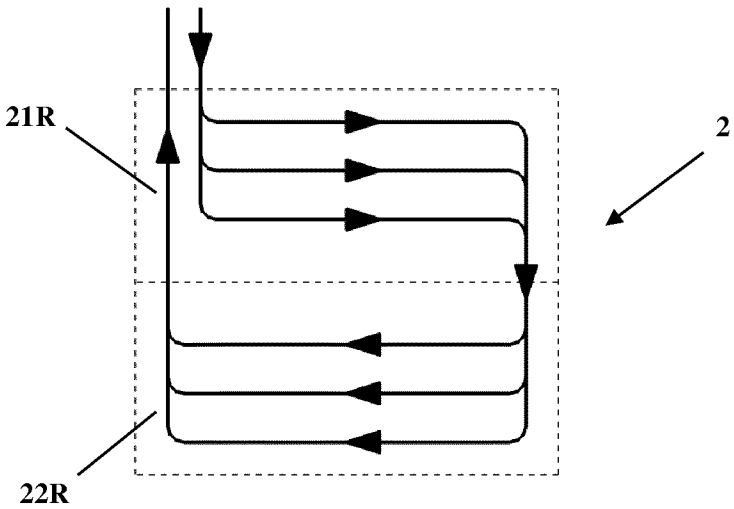

Fig. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/063212

A. CLASSIFICATION OF SUBJECT MATTER
INV. F28D9/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F28D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2008/061362 A1 (DANA CANADA CORP [CA]; SO ALLAN K [CA]; KOZDRAS MARK S [CA]) 29 May 2008 (2008-05-29) the whole document	1-5
A	WO 2014/044520 A1 (BEHR GMBH & CO KG [DE]) 27 March 2014 (2014-03-27) the whole document	1-5
A	DE 10 2012 223722 A1 (BEHR GMBH & CO KG [DE]) 27 June 2013 (2013-06-27) the whole document	1-5
A	US 2006/053833 A1 (MARTINS CARLOS [FR] ET AL) 16 March 2006 (2006-03-16) the whole document	1-5

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
1 August 2019	18/09/2019

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Axters, Michael

1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/EP2019/063212

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2008061362 A1	29-05-2008	CN 101611285 A	23-12-2009
		EP 2089664 A1	19-08-2009
		JP 5257946 B2	07-08-2013
		JP 2010510471 A	02-04-2010
		US 2008121381 A1	29-05-2008
		WO 2008061362 A1	29-05-2008
WO 2014044520 A1	27-03-2014	CN 104641199 A	20-05-2015
		DE 102012217090 A1	27-03-2014
		EP 2909563 A1	26-08-2015
		KR 20150060779 A	03-06-2015
		US 2016161160 A1	09-06-2016
		WO 2014044520 A1	27-03-2014
DE 102012223722 A1	27-06-2013	NONE	
US 2006053833 A1	16-03-2006	AU 2003301834 A1	07-06-2004
		EP 1592930 A1	09-11-2005
		EP 1992891 A1	19-11-2008
		FR 2846733 A1	07-05-2004
		US 2006053833 A1	16-03-2006
		US 2009071189 A1	19-03-2009
		WO 2004042293 A1	21-05-2004