P/00/001
Section 29
P/00/008
Section 29(1)
Regulation 3.1(2)

665917

AUSTRALIA
Patents Act 1990

PATENT REQUEST AND NOTICE OF ENTITLEMENT

We NOHMI BOSAI LTD.

of 7-3, Kudan Minami 4-chome, Chiyoda-ku, TOKYO, JAPAN

being the Applicant and Nominated Person, request the grant of a patent for an invention entitled FIRE DETECTING APPARATUS which is described in the accompanying standard complete specification.

Toshikazu Morita is the actual inventor of the invention.

The nominated person is the assignee of the invention from the inventor.

Convention priority is claimed from the following basic application:

Basic Applicant	Application Number	Application Date	Country	Country Code
Nohmi Bosai Ltd.	5-295668	25 November 1993	Japan	JP

The basic application was the first application made in a Convention country in respect of the invention the subject of this request.

Drawing number recommended to accompany the abstract: 1

Our address for service is: GRIFFITH HACK & CO
168 WALKER STREET
NORTH SYDNEY NSW 2060

Attorney Code: GH

S051135 23/11/94

DATED this 23rd day of November 1994

NOHMI BOSAI LTD.
By their Patent Attorney

GRIFFITH HACK & CO

P22700-U

AU9478995

(12) PATENT ABRIDGMENT (11) Document No. AU-B-78995/94
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 665917

(54) Title
FIRE DETECTING APPARATUS

International Patent Classification(s)
(51)[5] G08B 017/107 G08B 017/00 G08B 017/11 G08B 017/12

(21) Application No. : 78995/94 (22) Application Date : 23.11.94

(30) Priority Data

(31) Number (32) Date (33) Country
5-295668 25.11.93 JP JAPAN

(43) Publication Date : 08.06.95

(44) Publication Date of Accepted Application : 18.01.96

(71) Applicant(s)
NOHMI BOSAI LTD.

(72) Inventor(s)
TOSHIKAZU MORITA

(74) Attorney or Agent
GRIFFITH HACK & CO., GPO Box 4164, SYDNEY NSW 2001

(56) Prior Art Documents
US 5079422
DE 3523232
WO 90/08370

(57) Claim

1. A fire detecting apparatus comprising:

detection means for detecting a physical quantity of a fire phenomenon;

storage means for successively storing a predetermined number of latest detection outputs from said detection means;

calculation means for calculating one of a set of deviations and a set of ratios between the predetermined number of latest detection outputs stored in said storage means and for calculating a value on the basis of particular information in one of the set of deviations and the set of ratios; and

sending means for sending the value calculated by said calculation means as information on a physical quantity of the fire phenomenon.

4. A photoelectric type fire detecting apparatus comprising:

detection means for detecting a physical quantity of smoke;

storage means for successively storing a predetermined number of latest detection outputs from

.../2

said detection means;

calculation means for calculating one of a set of deviations and a set of ratios between the predetermined number of latest detection outputs stored in said storage means and for calculating a value on the basis of particular information in one of the set of deviations and the set of ratios; and

sending means for sending the value calculated by said calculation means as information on a physical quantity of smoke.

7. A thermal-type fire detecting apparatus comprising:

detection means for detecting a physical quantity of heat;

storage means for successively storing a predetermined number of latest detection outputs from said detection means;

calculation means for calculating one of a set of deviations and a set of ratios between the predetermined number of latest detection outputs stored in said storage means and for calculating a value on the basis of particular information in one of the set of deviations and the set of ratios; and

sending means for sending the value calculated by said calculation means as information on a physical quantity of heat.

665917

P/00/011
Regulation 3.2

AUSTRALIA

Patents Act 1990

ORIGINAL

COMPLETE SPECIFICATION

STANDARD PATENT

Invention Title: FIRE DETECTING APPARATUS

The following statement is a full description of this invention, including the best method of performing it known to us:

GH&CO REF P22700-U:DAA:RK

FIRE DETECTING APPARATUS

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION:

This invention relates to a fire detecting apparatus and, more particularly, to a fire detecting apparatus capable of transmitting information on a physical quantity (e.g., analog quantity) of a detected fire phenomenon such as smoke, heat, light of fire, gas, smell, etc., to a receiving section of a fire receiver, a relay unit or the like.

DESCRIPTION OF THE RELATED ART:

Conventionally, an analog type photoelectric fire detector having a smoke detection chamber, a light emitting element and a light receiving element incorporated therein is known as this kind of fire detecting apparatus. The detector detects a physical quantity of smoke in response to a light emitting control signal which is output at predetermined time intervals (e.g., three seconds) from a built-in clock device such as a timer, or when it receives a polling signal which is sent from a receiving unit to call the detector at the predetermined time intervals (e.g., three seconds). The detector then converts a signal related to the physical quantity into a digital signal, for example, and sends this signal to the receiving unit. (See, for example, Japanese Patent Laid-Open No. 249299/1987).

There have been proposed other types of conventional fire detecting apparatuses, e.g., an analog thermal-type fire detector using a thermal element in a measuring circuit section for measuring a temperature or the like, an analog ionization-type fire detector having an ion chamber with a plurality of internal electrodes in a measuring circuit section for measuring the density of smoke or the

like. Operating power is supplied to the measuring circuit section and an output circuit section of these types of detectors only when a match occurs between an address signal input via a transmission line and an address assigned to the detector. (See, for example, Japanese Utility Model Laid-Open No. 178794/1984.)

The conventional fire detecting apparatuses, arranged as described above, entails the following problem. For example, in the case of a photoelectric type fire detector, the light receiving element of the detector may detect external light noise such as camera strobe light during smoke detecting operation, or induced noise may be superimposed on the light receiving output. A noise signal component caused by such noise is sent to the light receiving unit as a physical quantity. As a result, the receiving unit mistakenly determines occurrence of fire although there is actually no fire, thus generating a false alarm.

In the case of a thermal-type fire detector, if the detector is disposed in the vicinity of an air outlet of an air conditioner or in a cookroom, the thermal element is easily affected thermally by a change in the air flow rate, steam generated or the like. Also, external noise can be easily superimposed on an external lead wire of the thermal element or the like. In such a situation, the receiving unit may mistakenly determine occurrence of fire based on an output from the detector, although there is no fire, thus generating a false alarm, as described above.

Further, in the case of an ionization-type fire detector, a mere smoke or the like not resulting from actual fire or a change in an environmental factor such as an air flow in a space where the detector is disposed can easily influence the detector in such a manner that the resistance between electrodes of the detector varies. Also, external noise can easily be superimposed on an output signal from the

detector because the impedance of a switching device connected to an intermediate electrode of the detector is high. It is therefore possible that the receiving unit will mistakenly determine occurrence of fire based on the output from the detector, although there is no fire, thus generating a false alarm, as described above.

SUMMARY OF THE INVENTION

It is an advantage that in an embodiment the present invention may provide a reliable fire detecting apparatus which is not affected by changes in any environmental factors or by external noise which would otherwise cause erroneous fire information to be sent to the receiving unit to generate a false alarm.

In an aspect of the present invention, there is provided a fire detecting apparatus comprising:

detection means for detecting a physical quantity of a fire phenomenon;

storage means for successively storing a predetermined number of latest detection outputs from said detection means;

calculation means for calculating one of a set of deviations and a set of ratios between the predetermined number of latest detection outputs stored in said storage means and for calculating a value on the basis of particular information in one of the set of deviations and the set of ratios; and

sending means for sending the value calculated by said calculation means as information on a physical quantity of the fire phenomenon.

In another aspect of the present invention there is provided a photoelectric type fire detecting apparatus comprising;

detection means for detecting a physical quantity of smoke;

storage means for successively storing a predetermined number of latest detection outputs from said detection means;

calculation means for calculating one of a set of

AUSTRALIA PATENT OFFICE

deviations and a set of ratios between the predetermined number of latest detection outputs stored in said storage means and for calculating a value on the basis of particular information in one of the set of deviations and the set of ratios; and

sending means for sending the value calculated by said calculation means as information on a physical quantity of smoke.

In a further aspect of the present invention there is provided a thermal-type fire detecting apparatus comprising:

detection means for detecting a physical quantity of heat;

storage means for successively storing a predetermined number of latest detection outputs from said detection means;

calculation means for calculating one of a set of deviations and a set of ratios between the predetermined number of latest detection outputs stored in said storage means and for calculating a value on the basis of particular information in one of the set of deviations and the set of ratios; and

sending means for sending the value calculated by said calculation means as information on a physical quantity of heat.

In an embodiment of the present invention, it is possible to provide a reliable high-response fire detecting apparatus which can remove instantaneous noise components and can follow successive changes of the physical quantity of, for example, smoke or heat with respect to time, and which is not influenced by any environmental change, external noise or the like which would otherwise cause

AUSTRALIA PATENT OFFICE

erroneous fire information to be sent to the receiving unit, thus generating a false alarm.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a fire detecting apparatus in accordance with one embodiment of the present invention;

Fig. 2 is a flowchart of the operation of the arrangements shown in Figs. 1 and 5;

Fig. 3 is a flowchart of the operation of the arrangement shown in Fig. 1;

Fig. 4 is a diagram of the operation of the arrangement shown in Fig. 1;

Fig. 5 is a block diagram showing a fire detecting apparatus in accordance with another embodiment of the present invention; and

Fig. 6 is a flowchart of the operation of the arrangement shown in Fig. 5.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will be described below with reference to the drawings.

Fig. 1 illustrates an embodiment of the present invention in which the invention is applied to a photoelectric-type fire detector 2 such as a so-called light-scattering-type smoke-detecting fire detector.

Referring to Fig. 1, the photoelectric type fire detector 2 is connected to a receiving unit 1 such as a fire receiver or a relay unit provided in, for example, a guard room or a disaster prevention center. The photoelectric-type fire detector 2 includes a computation means in the form of a microprocessor unit 3 (hereinafter

AUSTRALIA PATENT OFFICE

referred to as "MPU") for performing various kinds of operational processing described below, and a data bus 4 and a control bus 5 connected to the MPU 3.

The photoelectric-type fire detector 2 also includes a storage means in the form of a read only memory 6 (hereinafter referred to as "ROM") connected to MPU 3 through the data bus 4 and the control bus 5. The ROM 6 has a storage area 61 where a program(s) or the like relating to the flowcharts of Figs. 2 and 3 is previously stored, a storage area 62 where a self-address or the like is previously stored, and a storage area 63 where the relationship between detection outputs from the fire detector and a density of smoke is previously stored as a correlation table (conversion table).

The photoelectric-type fire detector 2 further includes another storage means in the form of a random access memory 7 (hereinafter referred to as "RAM") connected to the MPU 3 through the data bus 4 and the control bus 5. The ROM 7 has a work area 71 used when the MPU 3 performs operational processing or the like, a storage area 72 where a latest set of detection outputs from the detector obtained by performing a predetermined number of (e.g., three) detecting operations is stored, and a storage area 73 where detection data or the like to be sent to the receiving unit 1 is stored.

The photoelectric-type fire detector 2 further includes an interface 8 (hereinafter referred to as "IF") connected to the MPU 3 through the data bus 4 and the control bus 5, a light emitting circuit 9 connected to the IF 8, a light emitting device 10 such as a light emitting diode (LED) connected to the light emitting circuit 9 and driven by an output from the light emitting circuit 9, and a light receiving device 11 such as a photodiode provided in such a position as to be able to receive,

through a light shield member (not shown), light of an optical output from the light emitting device 10 scattered by smoke. The light emitting device 10 is driven by the light emitting circuit 9 so as to intermittently emit light at time intervals of, for example, 2.5 to 3 seconds for a time period such that the light receiving device 11 can receive scattered light emitted from the optical output of the light emitting device 10.

The photoelectric-type fire detector 2 further includes an amplification circuit 12 for amplifying an output from the light receiving device 11, a sample and hold circuit 13 connected to the amplification circuit 12 for sampling and holding the output from the amplification circuit 12, an A/D conversion circuit 14 connected to the sample and hold circuit 13 for converting an output of the circuit 13 from analog form into digital form, an IF 15 connected between the A/D conversion circuit 14 and the data and control buses 4 and 5, an IF 16 connected to the MPU 3 through the data and control buses 4 and 5, and a transmitting/receiving means in the form of a transmitting/receiving circuit 17 which comprises a receiving circuit, a serial-parallel converter, a parallel-serial converter and a transmitting circuit (these are not shown). The components 9 to 14 together constitute a detection means.

The operation of the above-described embodiment of the invention shown in Fig. 1 will now be described with reference to Figs. 2 to 4. Here, it is to be noted that all determinations made in the following process are carried out by the MPU 3.

First, a power supply for the fire detector 2 is turned on by the receiving unit 1 disposed in the guard room or the disaster prevention center. As shown in Fig. 2, in Step S1, initial values are set for the RAM 7, IF 8, IF 15 and IF 16. In Step S2, it is determined whether a signal is input to the transmitting/receiving circuit 17. If NO,

the fire detector 2 is maintained in a standby state until it will receive a signal. Upon receipt of a signal, the process advances to Step S3 wherein a determination is made as to whether the receiving unit 1 is calling the fire detector 2, in other words, it is determined whether a reception address code received from the receiving unit 1 coincides with the address code of the fire detector 2 stored in the storage area 62.

If it is determined in Step S3 that there is no call sent to this fire detector 2, a further call is awaited. When the fire detector 2 is called, the process advances to Step S4 wherein a determination is made as to whether the result of a sum check is OK, that is, it is determined whether the sum of the reception address code and a reception instruction code is equal to a reception sum check code. If not OK, an abnormality in the reception signal is determined and the process returns to Step S2. If OK, the process advances to Step S5 to make a determination as to whether there is an instruction to return detection data. If NO, the process advances to Step S6 to perform processing in accordance with the reception instruction, for example, a function test of the fire detector 2 by increasing the amplification factor of the amplification circuit 12 and examining whether a predetermined value is reached, or by making a determination as to whether light emitting device 10 normally emits light. The process thereafter returns to Step S2 and the above-described operations are repeated.

If there is a return instruction in Step S5, the process advances to Step S7 to read from the storage area 73 of the RAM 7 a detection data code to be sent out. In Step S8, a sum check code is formed. That is, the sum of the reception address code, the reception instruction code, the reception sum check code and the detection data code is set as a sum check code.

In Step S9, the detection data code and the sum check code are sent to the receiving unit 1.

Thereafter, in Step S10 of Fig. 3, a light emitting instruction is output from the MPU 3 to light emitting circuit 9 through the control bus 5 and the IF 15, and the light emitting device 10 is driven by the light emitting circuit 9. The light emitting output is received by the receiving device 11, and the output from the receiving device 11 is amplified by the amplification circuit 12 and then supplied to the sample and hold circuit 13.

In Step S11, a sample and hold instruction is output from the MPU 3 to the sample and hold circuit 13 through the control bus 5 and the IF 15 to make the sample and hold circuit 13 hold the output from the amplification circuit 12. In Step S12, a conversion instruction is output from the MPU 3 to the A/D conversion circuit 14 via the same route to make the A/D conversion circuit 14 convert the analog signal output from the sample and hold circuit 13 into a digital signal.

Thereafter, in Step S13, the MPU 3 reads a detection output from the A/D conversion circuit 14 through the data bus 4 and the IF 15 and stores the detection output at a predetermined position in the storage area 72 of the RAM 7.

For example, the data is stored in the storage area 72 in such a manner that the stored data is successively discarded in the order from the oldest, as shown in Fig. 4. That is, if the storage content is such that, as shown in Fig. 4, a first read detection output SLV3, a second read detection output SLV2, a third or last read detection output SLV1 are stored one after another from the lowest position, the first read detection output SLV3, which was read two times before, is discarded at the time of the next reading.

In Step S14, the MPU 3 reads out the detection output data from the storage area 72 and calculates deviations between the thus read-out detection outputs which have been successively obtained by performing a predetermined number of (e.g., three) detecting operations. That is, the absolute value of a difference between SLV1 and SLV2, the absolute value of a difference between SLV2 and SLV3 and the absolute value of a difference between SLV3 and SLV1 are respectively obtained and are temporarily stored in the storage area 71 of the RAM 7.

In Step S15, the MPU 3 reads from the storage area 71 a plurality of (e.g., two) detection outputs having the smallest deviation and calculates an average of the two detection outputs. That is, the average of the combination of two detection outputs having the minimum deviation.

Finally, in Step S16, the MPU 3 reads out a data code of a smoke density corresponding to the average calculated in Step S15 from the storage area 63 of the ROM 6, and stores the data code in the storage area 73 of the RAM 7.

Thereafter, the process returns to Step 2 to repeat the above-described operations.

Thus, the data stored in the storage area 73 is sent to the receiving unit 1 as a physical quantity of a present fire phenomenon, i.e., smoke in this embodiment.

In this embodiment, as described above, deviations of detection outputs obtained by performing the detecting operation three times are calculated and the average of two of the detection outputs having the smallest deviation is sent to the receiving unit as a physical quantity of smoke, which is one of present fire phenomena. It is therefore possible to remove noise components generated instantaneously and also to follow successive changes of the physical quantity of

smoke with respect to time. Further, a predetermined number of object values for fire determination are rewritten at each sampling time to ensure the desired response characteristic.

Fig. 5 is a block diagram showing another embodiment of the present invention in which the invention is applied to a thermal-type fire detector 2A. Components of this embodiment corresponding to those shown in Fig. 1 are indicated by the same reference symbols in Fig. 5 and will not be described in detail.

Referring to Fig. 5, the thermal-type fire detector 2A is connected to a receiving unit 1 and includes an MPU 3A for performing various kinds of operational processing described below, and a ROM 6A connected to the MPU 3A through a data bus 4 and a control bus 5. The ROM 6A has a storage area 61A where a program(s) or the like relating to the flowcharts of Figs. 2 and 6 is previously stored, a storage area 62 where a self-address or the like of the fire detector 2A is previously stored, a storage area 63A where the relationship between detection outputs from the fire detector 2A and temperatures is previously stored as a correspondence table, and a storage area 64 where non-linear and linear characteristics of detection outputs from the fire detector 2A is previously stored as a correspondence table (conversion table).

The thermal fire detector 2A also includes a thermal element 20 such as a thermistor. One end of the thermal element 20 is connected to a power supply terminal B+ while the other end is grounded through a resistor 21. The point of connection between the thermal element 20 and the resistor 21 is connected to an input terminal of an A/D conversion circuit 14. The thermal element 20, the resistor 21 and the A/D conversion circuit 14 together constitute a detection means. In other

respects, the construction of this embodiment is the same that illustrated in Fig. 1.

The operation of the embodiment of the invention shown in Fig. 5 will be described with reference to Figs. 2 and 6. In this embodiment, too, all determinations in the process described below are carried out by the MPU 3A.

First, a power supply for the fire detector 2A is turned on by the receiving unit 1 in a guard room or a disaster prevention center. In Step S1 of Fig. 2, initial values are set for the RAM 7 and other components. In Step S2, a determination is made as to whether a signal is received at the transmitting/receiving circuit 17. If NO, the fire detector 2A is maintained in a standby state until it will receive a signal. Upon receipt of a signal, the process advances to Step S3 to make a determination as to whether the receiving unit 1 is calling the fire detector 2A, in other words, it is determined whether a reception address code received from the receiving unit 1 coincides with the self-address code of the fire detector 2A stored in the storage area 62.

If it is determined in Step S3 that there is no call sent to this fire detector 2A, a further call is awaited. When the fire detector 2A is called, the process advances to Step S4 to make a determination as to whether the result of a sum check is OK, that is, it is determined whether the sum of the reception address code and a reception instruction code is equal to a reception sum check code. If not OK, an abnormality of the reception signal is determined and the process returns to Step S2. If OK, the process advances to Step S5 wherein a determination is made as to whether there is an instruction to return the detection data. If NO, the process advances to Step S6 to perform processing in accordance with the reception

instruction, for example, a function test of the fire detector 2A by heating the thermal element 20 with a heater (not shown) and examining whether the output of the fire detector 2A is thereby changed to a predetermined value. The process thereafter returns to Step S2 and the above-described operations are repeated.

If there is a return instruction in Step S5, the process advances to Step S7 to read from the storage area 73 of the RAM 7 a detection data code to be sent out. In Step S8, a sum check code is formed. That is, the sum of the reception address code, the reception instruction code, the reception sum check code and the detection data code is set as the sum check code.

In Step S9, the detection data code and the sum check code are sent to the receiving unit 1.

Thereafter, in Step S20 of Fig. 6, a conversion instruction is output from the MPU 3A to the A/D conversion circuit 14 through the control bus 5 and the IF 15 to make the A/D conversion circuit 14 convert the voltage at the connection point between the thermal element 20 and the resistor 21 from analog form into digital form.

In Step S21, the MPU 3A reads a detection output from the A/D conversion circuit 14 through the data bus 4 and the IF 15 and, in Step S22, linearly corrects the detection output thus read on the basis of the correspondence table of the non-linear and linear characteristics of the detection output stored in the storage area 64 of the ROM 6A.

In Step S23, the MPU 3A stores the linearly-corrected detection output at a predetermined position in the storage area 72 of the RAM 7.

The method of storing data in the storage area 72 is the same as that

described above with reference to Fig. 4.

The reason for linearly correcting each detection output before obtaining deviations between the detection outputs is as follows; an ordinary thermal element such as a thermistor is so non-linear in temperature-resistance change characteristic that it is impossible to obtain accurate deviations and an accurate average from the detection outputs not corrected.

In Step S24, the MPU 3A reads out the detection output data from the storage area 72 and calculates deviations between the detection outputs which have been successively obtained by performing a predetermined number of (e.g., three) detecting operations. That is, the absolute value of a difference between SLV1 and SLV2, the absolute value of a difference between SLV2 and SLV3 and the absolute value of a difference between SLV3 and SLV1 are respectively obtained and are temporarily stored in the storage area 71 of the RAM 7.

In Step S25, the MPU 3A reads from the storage area 71 a plurality of (e.g., two) detection outputs having the smallest deviation and calculates an average of the two detection outputs. That is, the average of the combination of two detection outputs having the minimum deviation is calculated.

Finally, in Step S26, the MPU 3A reads out a data code of the temperature corresponding to the average calculated in Step S25 from the storage area 63A of the ROM 6A, and stores the data code in the storage area 73 of the RAM 7.

Thereafter, the process returns to Step 2 to repeat the above-described operations.

Thus, the data stored in the storage area 73 is sent to the receiving unit 1 as a physical quantity of a present fire phenomenon, i.e., heat in this embodiment.

In this embodiment, as described above, deviations of detection outputs obtained by performing the detecting operation three times are calculated and an average of two of the detection outputs having the smallest deviation is sent to the receiving unit as a physical quantity of heat, which is one of present fire phenomena. It is therefore possible to remove noise components generated instantaneously and also to follow successive changes of the physical quantity of heat with respect to time. Further, a predetermined number of object values for fire determination are rewritten at each sampling time to ensure the desired response characteristic.

The above embodiments have been described with respect to the method of calculating deviations of detection outputs obtained by performing the detecting operation three times and sending the average of two of the detection outputs having the smallest deviation to the receiving unit as a physical quantity of a present fire phenomenon. Essentially, any other method will suffice as long as reliable physical quantity information can be obtained. For example, the arrangement may be such that the ratios of successive two of a predetermined number of detection outputs are obtained and an average of the combination of two detection outputs having the minimum ratio is sent to the receiving unit as physical quantity information on a present fire phenomenon. The number of times the detection output is sampled for calculation of the deviations or ratios and the number of detection output values to be averaged are not limited to the above-mentioned numbers, as long as reliable physical quantity information can be obtained.

Although in the above-described embodiments, the method of using the average of the combination of two detection outputs having the minimum deviation or ratio is adopted, any other calculation method will essentially suffice as long as

reliable physical quantity information can be obtained. The maximum, minimum or median value of a combination of a predetermined number of detection outputs having the smallest deviation or ratio may be used.

The above embodiments of the invention have been described with respect to the case in which data is obtained by converting an average value of detection outputs into a smoke density or a temperature by looking up the conversion table stored in the storage area 63 or 63A and is stored and sent to the receiving unit. However, the arrangement may alternatively be such that the average of detection outputs is directly stored and converted into a code sign ' to be sent to the receiving unit, and is converted into a smoke density or a temperature on the receiving unit side.

Also, the above embodiments have been described with respect to the case in which after a call is received from the receiving unit and a detection output is sent to the receiving unit, reading of the detection output is done. However, the arrangement may alternatively be such that the photoelectric-type fire detector or the thermal-type fire detector is provided with a timer and a detection output is read in response to an output of the timer generated at predetermined time intervals of, for example, three seconds.

In the above-described embodiments, the photoelectric-fire sensor or the thermal-type fire sensor is used in a fire detecting apparatus. However, the invention can also be applied to fire detecting apparatuses using any other fire detector, for example, an ionization-type fire detector to achieve the same effect.

Further, in the above-described embodiments, a dip switch or an electrically erasable and programmable ROM may be used in place of the storage area 62, i.e.,

the means for storing the self-address or the like of the fire detector.

The Claims Defining The Invention Are As Follows.

1. A fire detecting apparatus comprising:

detection means for detecting a physical quantity of a fire phenomenon;

storage means for successively storing a predetermined number of latest detection outputs from said detection means;

calculation means for calculating one of a set of deviations and a set of ratios between the predetermined number of latest detection outputs stored in said storage means and for calculating a value on the basis of particular information in one of the set of deviations and the set of ratios; and

sending means for sending the value calculated by said calculation means as information on a physical quantity of the fire phenomenon.

2. A fire detecting apparatus according to claim 1 wherein said calculation means uses an average value of at least two of the predetermined number of latest detection outputs having the smallest deviation or ratio as the value calculated by said calculation means on the basis of particular information in one of the set of deviations and the set of ratios.

3. A fire detecting apparatus according to claim 1 wherein said calculation means uses one of a maximum value, a minimum value, and a median value of at least two of the predetermined number of latest detection outputs having the smallest deviation or ratio as the value calculated by said calculation means on the basis of particular information in one of the set deviations and the set of ratios.

4. A photoelectric type fire detecting apparatus comprising:

detection means for detecting a physical quantity of smoke;

storage means for successively storing a predetermined number of latest detection outputs from

AUSTRALIA PATENT OFFICE

said detection means;

calculation means for calculating one of a set of deviations and a set of ratios between the predetermined number of latest detection outputs stored in said storage means and for calculating a value on the basis of particular information in one of the set of deviations and the set of ratios; and

sending means for sending the value calculated by said calculation means as information on a physical quantity of smoke.

5. A photoelectric type fire detecting apparatus according to claim 4 wherein said calculation means uses an average value of at least two of the predetermined number of latest detection outputs having the smallest deviation or ratio as the value calculated by said calculation means on the basis of particular information in one of the set of deviations and the set of ratios.

6. A photoelectric type fire detecting apparatus according to claim 4 wherein said calculation means uses one of a maximum value, a minimum value and a median value of at least two of the predetermined number of latest detection outputs having the smallest deviation or ratio as the value calculated by said calculation means on the basis of particular information in one of the set of deviations and the set of ratios.

7. A thermal-type fire detecting apparatus comprising:

detection means for detecting a physical quantity of heat;

storage means for successively storing a predetermined number of latest detection outputs from said detection means;

calculation means for calculating one of a set of deviations and a set of ratios between the predetermined number of latest detection outputs stored in said storage means and for calculating a value on the basis of particular information in one of the set of deviations and the set of ratios; and

AUSTRALIA PATENT OFFICE

sending means for sending the value calculated by said calculation means as information on a physical quantity of heat.

8. A thermal-type fire detecting apparatus according to claim 7 wherein said calculation means uses an average value of at least two of the predetermined number of latest detection outputs having the smallest deviation or ratio as the value on the basis of particular information in one of the set of deviations and the set of ratios.

9. A thermal-fire detecting apparatus according to claim 9 wherein said calculation means uses one of a maximum value, a minimum value, and a median value of at least two of the predetermined number of latest detection outputs having a smaller deviation or ratio as the value calculated by said calculation means on the basis of particular information in one of the set of deviations and the set of ratios.

10. A fire detecting apparatus substantially as herein described with reference to any one of figures 1 to 5 of the accompanying drawings.

Dated this 30th day of October 1995

NOHMI BOSAI LTD.

By their Patent Attorneys

GRIFFITH HACK & CO

AUSTRALIA PATENT OFFICE

ABSTRACT OF THE DISCLOSURE

A fire detecting apparatus is designed to have improved reliability by reducing the possibility that the apparatus is influenced by an environmental change, external noise or the like which would otherwise cause erroneous fire information to be sent to a receiving unit to generate a false alarm. The apparatus includes a light emitting device for detecting a physical quantity of one of fire phenomena such as smoke, a light receiving device, an A/D conversion circuit 14, a RAM for successively storing a predetermined number of latest detection outputs from the A/D conversion circuit, an MPU for calculating deviations between the predetermined number of latest detection outputs stored in the RAM and for calculating an average value of at least two of the detection outputs having the smallest deviation, and a transmitting/receiving circuit for sending the average value calculated by the MPU as a physical quantity of the one fire phenomenon.

78995/94

FIG. 1

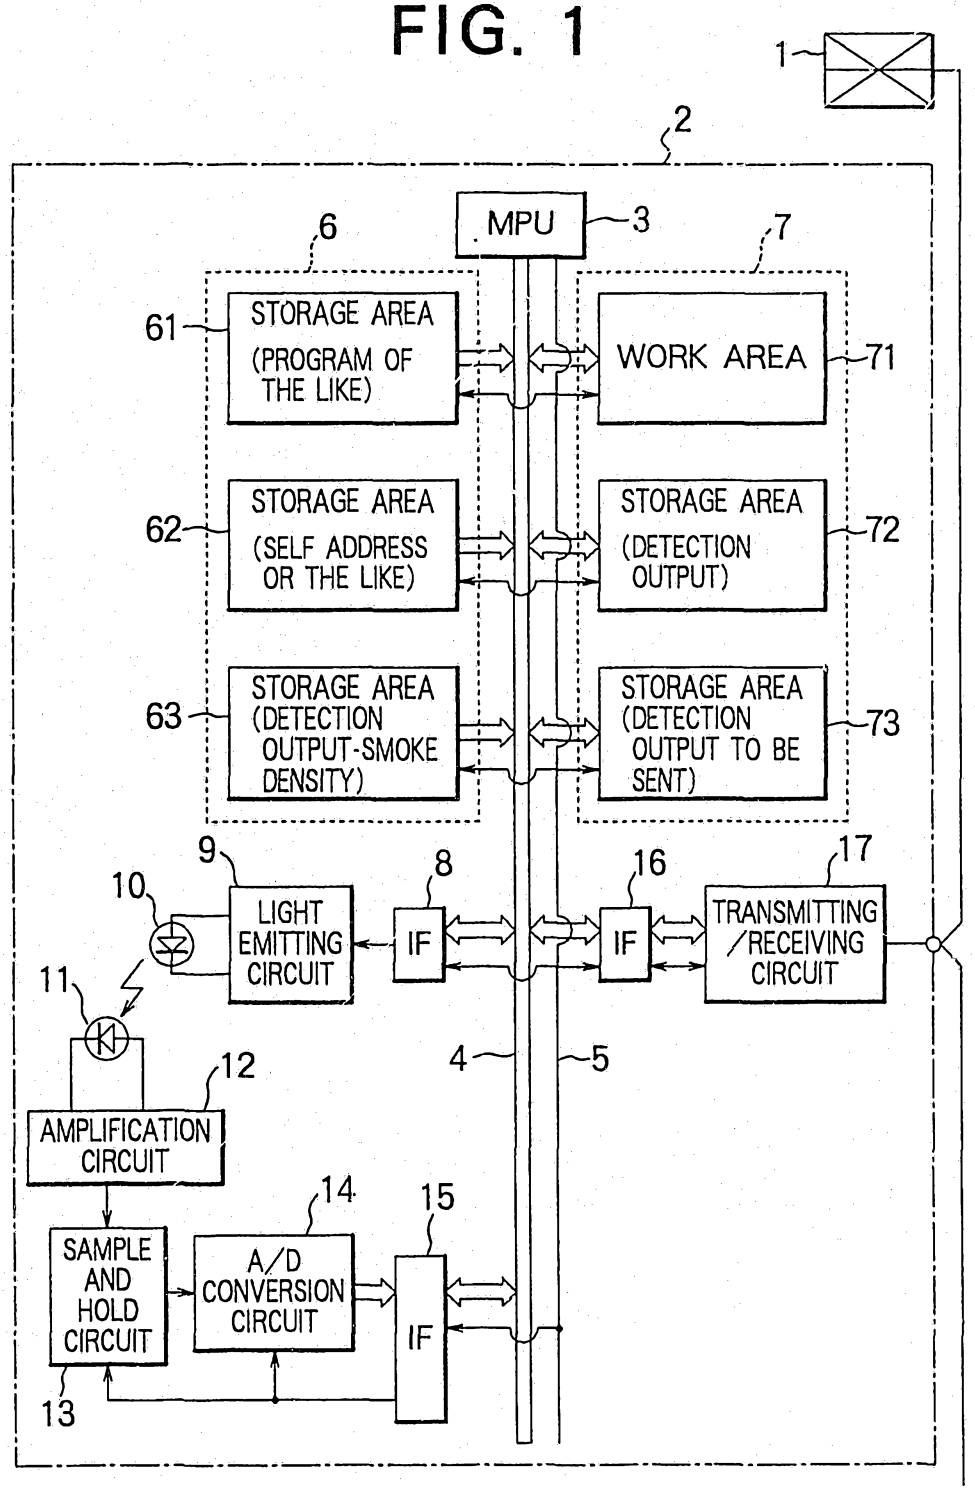


FIG. 2

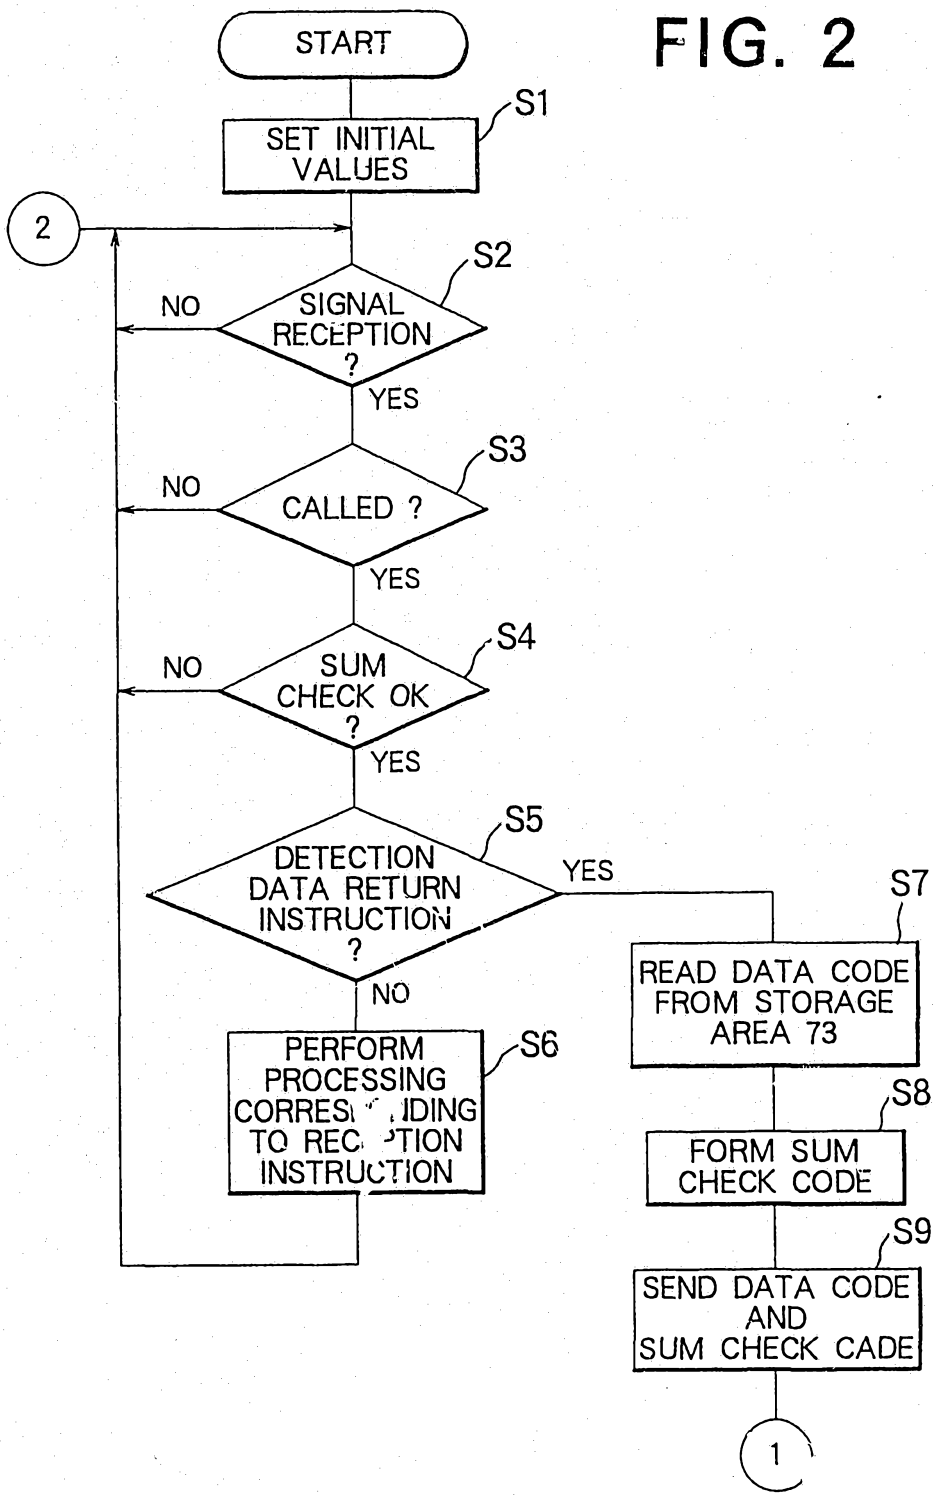

START
SET INITIAL VALUES
S1
2
SIGNAL RECEPTION ?
S2
NO
YES
CALLED ?
S3
NO
YES
SUM CHECK OK ?
S4
NO
YES
DETECTION DATA RETURN INSTRUCTION ?
S5
YES
NO
PERFORM PROCESSING CORRESPONDING TO RECEPTION INSTRUCTION
S6
READ DATA CODE FROM STORAGE AREA 73
S7
FORM SUM CHECK CODE
S8
SEND DATA CODE AND SUM CHECK CADE
S9
1

FIG. 3

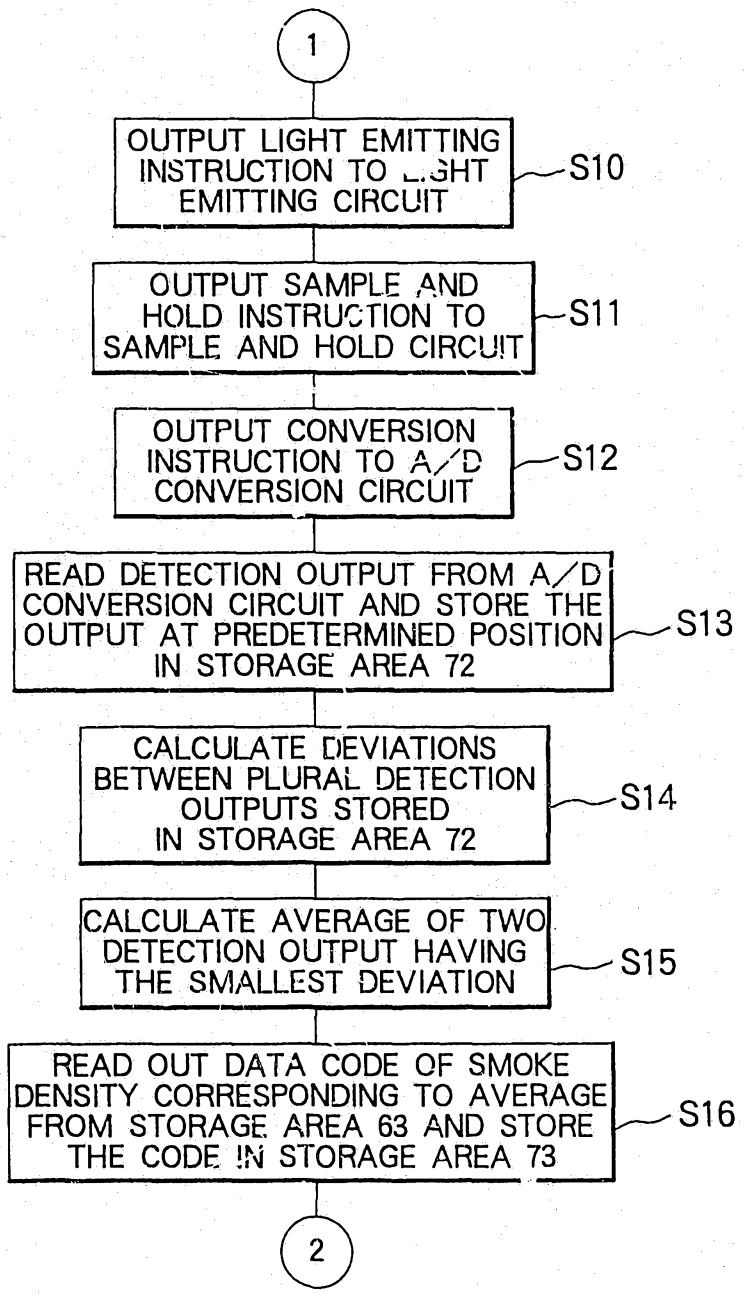

1
OUTPUT LIGHT EMITTING INSTRUCTION TO LIGHT EMITTING CIRCUIT
S10
OUTPUT SAMPLE AND HOLD INSTRUCTION TO SAMPLE AND HOLD CIRCUIT
S11
OUTPUT CONVERSION INSTRUCTION TO A/D CONVERSION CIRCUIT
S12
READ DETECTION OUTPUT FROM A/D CONVERSION CIRCUIT AND STORE THE OUTPUT AT PREDETERMINED POSITION IN STORAGE AREA 72
S13
CALCULATE DEVIATIONS BETWEEN PLURAL DETECTION OUTPUTS STORED IN STORAGE AREA 72
S14
CALCULATE AVERAGE OF TWO DETECTION OUTPUT HAVING THE SMALLEST DEVIATION
S15
READ OUT DATA CODE OF SMOKE DENSITY CORRESPONDING TO AVERAGE FROM STORAGE AREA 63 AND STORE THE CODE IN STORAGE AREA 73
S16
2

FIG. 4

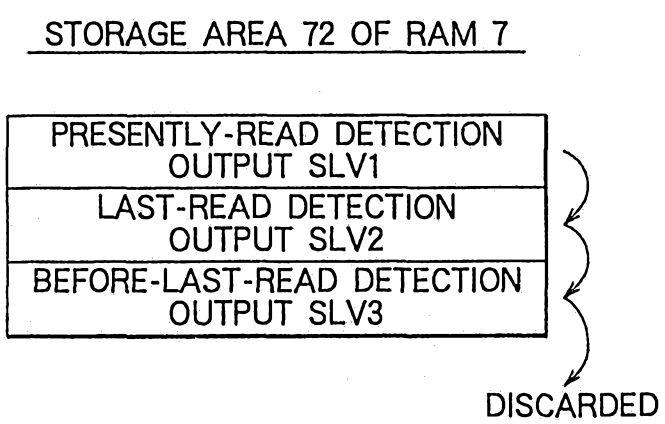

STORAGE AREA 72 OF RAM 7
PRESENTLY-READ DETECTION OUTPUT SLV1
LAST-READ DETECTION OUTPUT SLV2
BEFORE-LAST-READ DETECTION OUTPUT SLV3
DISCARDED

FIG. 5

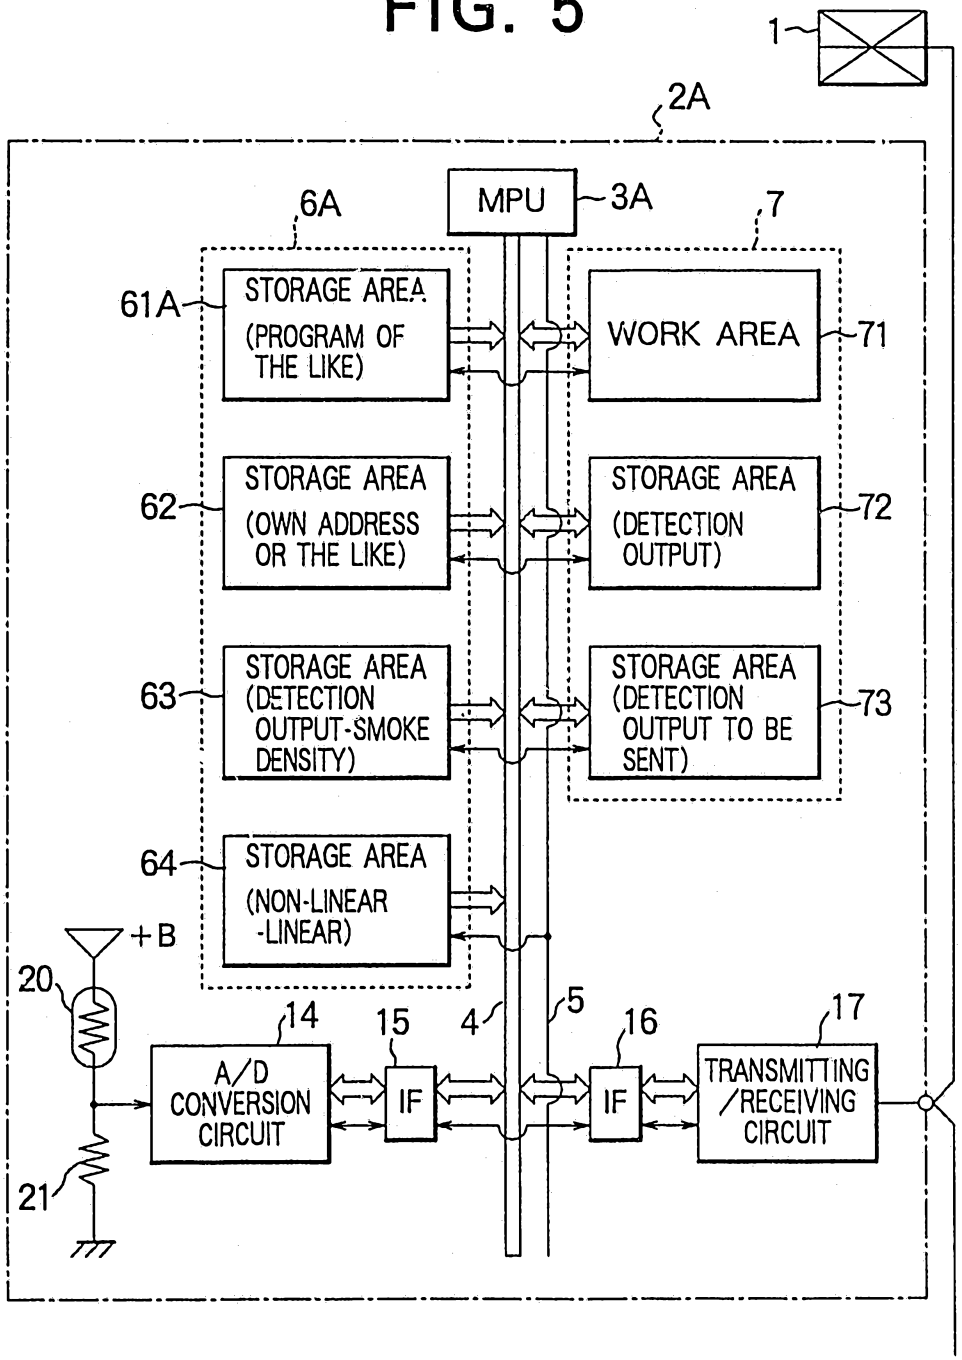
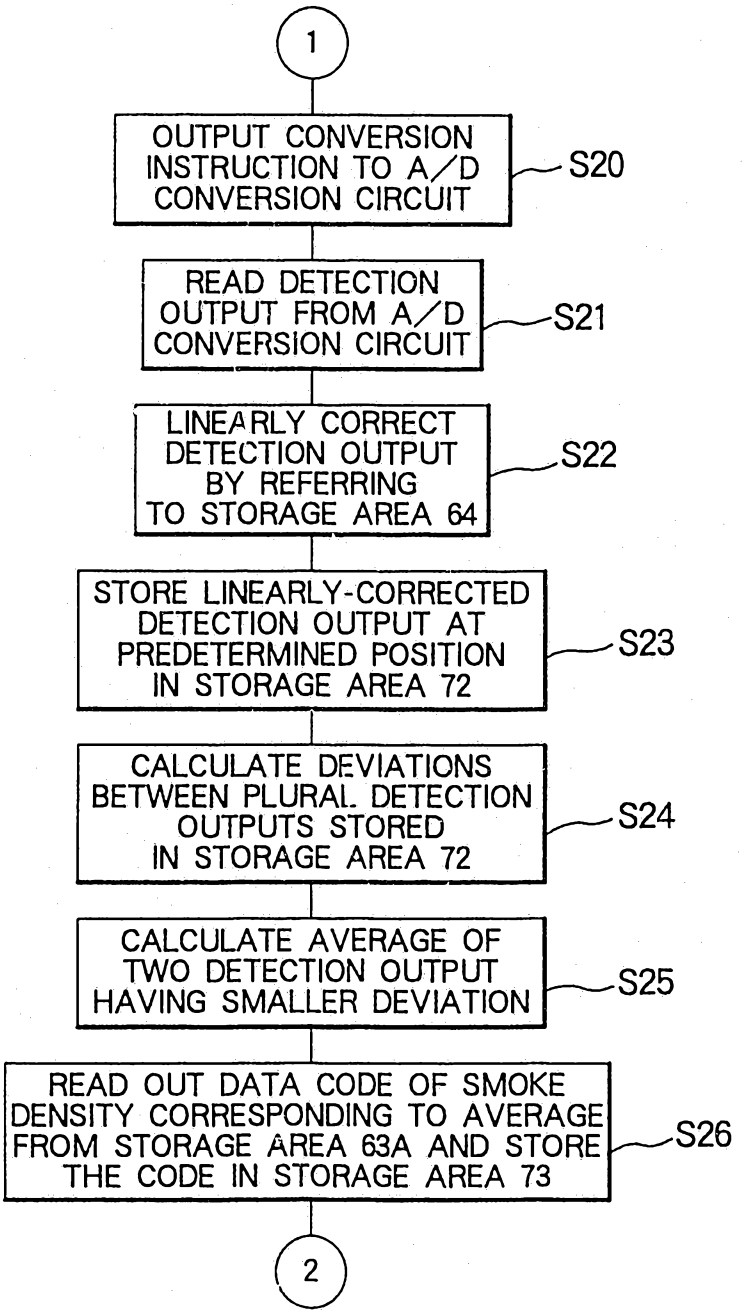

1
2A
6A
MPU
3A
7
61A
STORAGE AREA (PROGRAM OF THE LIKE)
WORK AREA
71
62
STORAGE AREA (OWN ADDRESS OR THE LIKE)
STORAGE AREA (DETECTION OUTPUT)
72
63
STORAGE AREA (DETECTION OUTPUT-SMOKE DENSITY)
STORAGE AREA (DETECTION OUTPUT TO BE SENT)
73
64
STORAGE AREA (NON-LINEAR -LINEAR)
+B
20
21
14
15
4
5
16
17
A/D CONVERSION CIRCUIT
IF
IF
TRANSMITTING /RECEIVING CIRCUIT

FIG. 6


1
OUTPUT CONVERSION INSTRUCTION TO A/D CONVERSION CIRCUIT
S20
READ DETECTION OUTPUT FROM A/D CONVERSION CIRCUIT
S21
LINEARLY CORRECT DETECTION OUTPUT BY REFERRING TO STORAGE AREA 64
S22
STORE LINEARLY-CORRECTED DETECTION OUTPUT AT PREDETERMINED POSITION IN STORAGE AREA 72
S23
CALCULATE DEVIATIONS BETWEEN PLURAL DETECTION OUTPUTS STORED IN STORAGE AREA 72
S24
CALCULATE AVERAGE OF TWO DETECTION OUTPUT HAVING SMALLER DEVIATION
S25
READ OUT DATA CODE OF SMOKE DENSITY CORRESPONDING TO AVERAGE FROM STORAGE AREA 63A AND STORE THE CODE IN STORAGE AREA 73
S26
2