

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 December 2001 (06.12.2001)

PCT

(10) International Publication Number
WO 01/92722 A1

(51) International Patent Classification⁷: **F04B 17/04**

(21) International Application Number: PCT/KR01/00827

(22) International Filing Date: 19 May 2001 (19.05.2001)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
2000/29045 29 May 2000 (29.05.2000) KR

(71) Applicant (for all designated States except US): **LG ELECTRONICS INC. [KR/KR]**; 20, Yido-Dong, Yong-dungpo-Ku, Seoul 150-721 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LEE, Hyuk [KR/KR]**; Jungsanmaeul Apt. 211-902, Ilsan 2-Dong, Ilsan-Gu, Gyunggi-Do, Goyang 411-728 (KR). **PARK, Jung-Sik [KR/KR]**; Hyundai Apt. 602-1601, Gueui

3-Dong, Gwangjin-Gu, Seoul 143-760 (KR). **SONG, Gye-Young [KR/KR]**; Jugong Apt. 804-404, Haan 3-Dong, Gyunggi-Do, Gwangmyong 423-757 (KR). **KU, Bon-Cheol [KR/KR]**; Dong-Bu Apt. 106-1203, Nae-Dong, Gyungsangnam-Do, Kimhae 621-751 (KR).

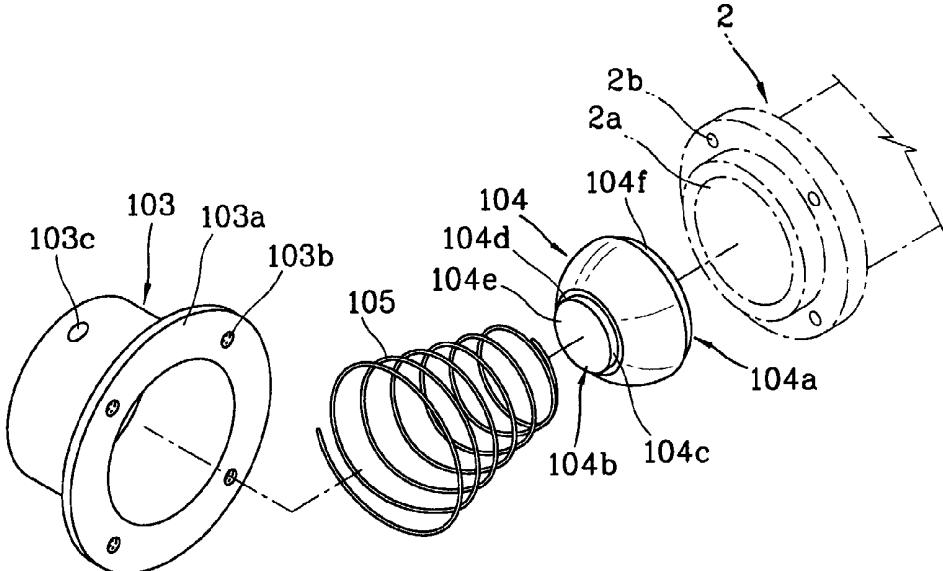
(74) Agent: **PARK, Jang-Won**; Jewoo Building 5th Floor, 200, Nonhyun-Dong, Kangnam-Ku, Seoul 135-010 (KR).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DISCHARGE VALVE APPARATUS FOR RECIPROCATING COMPRESSOR



(57) Abstract: A discharge valve apparatus for a reciprocating compressor comprises a discharge cover having built-in volume so as to cover a front end surface of the cylinder; a discharge valve disposed so as to be contacted/separated to/from the front end surface of the cylinder by a piston which undergoes a reciprocating movement inside the cylinder; and a valve spring having both ends respectively adhered to rear side of the discharge valve and to inner surface of the discharge cover so as to elastically support the rear side of the discharge valve. A rotation radius of the valve spring of a conical type is formed to be gradually reduced or increased so that impacts of a part to other parts during the compression can be prevented. Accordingly, when the valve spring is compressed in accordance with the compression and discharge strokes of the piston, the impacting noise caused by the impacts of the respective parts in the valve spring can be prevented previously.

WO 01/92722 A1



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**DISCHARGE VALVE APPARATUS FOR RECIPROCATING
COMPRESSOR**

TECHNICAL FIELD

5 The present invention relates to a discharge valve apparatus for a reciprocating compressor, and particularly, to a shape of the valve spring of a valve assembly applied to a reciprocating compressor and to a fabrication method for the discharge valve.

10

BACKGROUND ART

Generally, an axial direction discharge valve assembly among valve assemblies of a general reciprocating compressor is a device in which a piston installed as a single body with an armature of a motor undergoes a linear reciprocating movement inside a cylinder, sucks a refrigerant gas, and 15 compresses and discharges the refrigerant gas to moving direction of the piston. In addition, opening/closing speed of the discharge valve which is opened/closed when the piston undergoes the reciprocating movement is closely related to a function of the entire discharge valve assembly.

Figures 1 and 2 are a perspective view and a longitudinal cross-20 sectional view showing an embodiment of the axial discharge valve assembly(hereinafter, referred to as discharge valve assembly) described above.

As shown therein, in the conventional discharge valve assembly, a piston 1 integrated with an armature(not shown) of a motor is inserted into a

cylinder 2, and undergoes a linear reciprocating movement. And the discharge valve assembly comprises: a discharge cover 3 fixedly coupled to front end surface of the cylinder 2 for forming a certain discharge space S2; a discharge valve 4 of hemisphere shape which is installed in the discharge cover 3 for controlling the discharge of the compressed gas by opening/closing the cylinder 2 as contacted/separated to/from the front end surface of the cylinder 2 in the discharge cover 3 while the reciprocating movement of the piston 1; and a valve spring 5 supported between the discharge cover 3 and the discharge valve 4 for elastically supporting the reciprocating movement of the discharge valve 3.

The valve spring 5 is a cylindrical compressed coil spring wound so as to have same spring constant and same rotation radius from starting portion to ending portion, and its one end is adhered to inner bottom surface of the discharge cover 3, and the other end is adhered to rear end of the discharge valve 4.

Unexplained reference numerals 1a designates a refrigerant gas passage, 2a is a coupling hole, 3a is a flange unit, 3b is a discharge hole, 6 is a suction valve, and S1 is a compression space.

Hereinafter, operation of the discharge valve device in the conventional reciprocating compressor will be described.

When the piston 1 integrated with the armature(not shown) of the reciprocating motor(not shown) undergoes a reciprocating movement inside the cylinder 2, the refrigerant gas is sucked into the compression space S1 of the cylinder through the refrigerant gas passage 1a formed inside the

piston 1, then compressed and discharged to outside passing through the discharge space S2 of the discharge cover 3.

As shown in Figure 3A, new refrigerant gas is sucked through the refrigerant passage 1a of the piston 1 during the suction stroke of the piston 5, then the refrigerant gas pushes a suction valve 6 installed on front end of the piston 1, and sucked and compressed in the compression space S1, and after that, discharged to the discharge space S2 at a certain time.

After that, as shown in Figure 3B, the sucked gas in the compression space S1 of the cylinder 2 is compressed by the piston during the 10 compression and discharge strokes of the piston 1, and after that, the gas is discharged into the discharge space S2 while pushing the discharge valve 4 at a certain time. And, the compressed gas filled in the discharge space S2 is pushed by compressed gas which is newly compressed during next compression and discharge strokes of the piston 1, and then discharged out 15 of the discharge valve assembly.

On the other hand, the valve spring 5 is pushed together with the discharge valve 4 during the discharge strokes of the piston 1 and compressed, and then makes the discharge valve 4 return by being stretched at a certain degree during the suction stroke of the piston 1.

20 Hereinafter, a fabrication method for the discharge valve 5 will be described as follows.

As shown in Figure 4, the discharge valve 5 is fabricated using a die-casting method which injects an appropriate medium into a fixed first metal mold 7 and into a movable second metal mold 8 and presses.

At that time, a gate through which the medium is injected is a side gate 9 or a center gate 10 formed on side unit of the discharge valve 5. In addition, a parting line 11 which is generated after the product is molded is formed on surface on which the first metal mold 7 and the second metal mold 8 are 5 contacted each other.

Figure 5 is a perspective view showing the conventional discharge valve 5 formed by the above fabrication method. In Figure 5, the reference numeral 12 designates a pressure face unit contacting with the cylinder 2, and the reference numeral 14 designates a pressure back face unit facing to the 10 pressure face unit and closely supporting the one end of the valve spring 5.

However, there are some problems as follows in the conventional discharge valve device.

The valve spring 5 is pushed to the discharge cover 3 direction with the discharge valve 4 when the compression and discharge strokes of the 15 piston 1 are made because the cylindrical valve spring is used, and entire parts of the valve spring 5 are compressed as closely contacted with each other, whereby a part of the valve spring 5 impacts with next part and impact noise is generated.

Also, the coupled part of the valve spring 5 and the discharge cover 20 3 is free end state, an eccentric force of the valve spring 5 is generated between the inner side surface of the discharge cover 3 and the valve spring 5 having flowability in moving, and therefore the movement of the discharge valve is not concentric with the axial line or a local abrasion is generated between the two members. In addition, the discharge valve is touches with

inner wall surface of the discharge cover when the compression stroke is made, and therefore a noise and abrasion are generated.

In addition, the discharge valve 5 is fabricated by a press method using a metal mold, and the parting line 11 is formed on the pressure face unit 12 5 which contacts to the front end surface of the cylinder 2. And the parting line 11 may generates a burr, and then it is contacted to the inner side surface of the discharge cover 3 when the discharge valve 5 is operated. Therefore, a noise is generated or the movement of the discharge valve 5 is not stable.

Also, in case that the gate of metal mold is formed on side surface of 10 the discharge valve 5, the molded product may be distorted because of flowing characteristics of the injected medium and the movement of the discharge valve is not stable because of inequality in the medium density after molding, whereby the discharge noise is made. In addition, in case that the gate is formed on the pressure face unit 14 direction, there is no machining 15 allowance for post-fabrication, and therefore it is difficult to fabricate.

DETAILED DESCRIPTION OF THE INVENTION

Therefore, an object of the present invention is to provide a discharge valve apparatus for a reciprocating compressor which can block impact noise 20 by preventing respective parts of a valve spring from impacting with each other even if the valve spring is compressed during compression and discharge strokes of a piston.

Also, another object of the present invention is to provide a discharge valve apparatus for a reciprocating compressor in which a molded product

stays adhering to a fixed metal mold by forming a parting line which is formed when the discharge valve is molded on center part of the molded product of the discharge valve.

Also, still another object of the present invention is to provide a
5 discharge valve apparatus for a reciprocating compressor which can easily eject the discharge valve molding by forming a gate passage, which is formed on the metal mold when the discharge valve is molded, on a first metal mold which is fixed.

In order to achieve the above objects, there is provided a discharge
10 valve apparatus for a reciprocating compressor comprising: a discharge cover having a built-in volume so as to cover front end surface of a cylinder; a discharge valve disposed to be contacted/separated to/from the front end surface of the cylinder by a piston which undergoes a reciprocating movement inside the cylinder; and a valve spring having its both ends installed to be
15 adhered to rear surface of the discharge valve and to inner surface of the discharge cover facing to the rear surface of the discharge valve so as to elastically supporting the rear surface of the discharge valve, and the valve spring is formed as a conical type in which a rotation radius is gradually reduced or increased so as to prevent a part from impacting with next part
20 during compression.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a longitudinal cross-sectional view showing an embodiment of a discharge valve apparatus in a conventional reciprocating compressor;

Figure 2 is an exploded perspective view showing an embodiment of the discharge valve apparatus of the conventional reciprocating compressor;

Figure 3A is a longitudinal cross-sectional view showing a suction process by the discharge valve apparatus in the conventional reciprocating
5 compressor;

Figure 3B is a longitudinal cross-sectional view showing a discharge process by the discharge valve apparatus in the conventional reciprocating compressor;

Figure 4 is an exemplary view showing a metal mold for molding a
10 discharge valve in the conventional discharge valve apparatus;

Figure 5 is a perspective view showing a discharge valve molding produced in the metal mold of Figure 4;

Figure 6 is a longitudinal cross-sectional view showing an embodiment of a discharge valve apparatus for a reciprocating compressor according to
15 the present invention;

Figure 7 is an exploded perspective view showing an embodiment of a discharge valve apparatus for a reciprocating compressor according to the present invention;

Figure 8A is a front view showing a valve spring in the discharge valve
20 apparatus for the reciprocating compressor according to the present invention;

Figure 8B is a plan view showing a state when the valve spring in the discharge valve apparatus for the reciprocating compressor is projected on inner wall surface of a discharge cover;

Figure 9 is an exemplary view showing a metal mold for molding the discharge valve in the discharge valve apparatus for the reciprocating compressor according to the present invention;

Figure 10 is a perspective view showing a discharge valve molding 5 produced in the metal mold of Figure 9;

Figure 11A is a longitudinal cross-sectional view showing a suction process by the discharge valve apparatus for the reciprocating compressor according to the present invention; and

Figure 11B is a longitudinal cross-sectional view showing a discharge 10 process by the discharge valve apparatus for the reciprocating compressor according to the present invention.

MODE FOR CARRYING OUT THE PREFERRED EMBODIMENTS

The present invention will now be described with reference to 15 accompanying drawings. In addition, same reference numerals are used for the same components as those of the conventional art.

As shown in Figures 6 and 7, a discharge valve apparatus for a reciprocating compressor according to the present invention comprises: a discharge cover 103 fixedly installed on a certain discharge space S2 which 20 is disposed on front end surface of a cylinder 2 so as to cover the front end surface of the cylinder 2 in which a piston 1 is inserted; a discharge valve 104 disposed inner side of the discharge cover 103 for opening/closing the cylinder 2 by being contacted/separated to/from the front end surface of the cylinder 2 when the piston 1 undergoes a reciprocating movement; and a valve spring

105 having both ends supported by inner surface of the discharge cover 103 and by rear surface of the discharge valve 104 facing to the inner surface of the discharge cover 103.

The discharge cover 103 is formed as a hat having a flange unit 103a including a coupling hole 103b on an opened side so as to be coupled to a flange unit 2a on the front end surface of the cylinder 2 using a bolt, and includes a discharge space S2 larger than a diameter of the discharge valve 104 so that the discharge valve 104 can freely undergo the reciprocating movement with a certain gap d1 between the outer circumferential surface 10 of the discharge valve 104.

Also, a first stepped unit 103d is formed on a part where the inner side surface 103f and the inner wall surface 103g of the discharge cover 103 are closed together in the discharge cover 103, and therefore an abrasion which may be generated by impact of the front end of the valve spring 105 to the inner wall surface 103g of the discharge cover 103 can be prevented. In addition, a second stepped unit 103e next to the first stepped unit 103d is formed, and end of the valve spring 105 is inserted therein.

The discharge valve 104 is formed as a hemisphere. And a pressure face unit 104a in the discharge valve 104 is contacted/separated to/from the front end surface of the cylinder 2, and one end of the valve spring 105 is adhered to a spring insert unit 104c of the pressure back face unit 104b.

Also, the spring insert unit 104c has a vertical portion 104d and a horizontal portion 104e, and thereby the spring insert unit 104c is forcedly inserted into the front end of the valve spring 105 when the discharge valve

104 is operated. Therefore, a structure of not escaping from the valve spring 105 is made.

In addition, an under cutting surface unit 104f of taper shape next to the pressure face unit 104a is formed on the pressure back face unit 104b.

5 Therefore, the ejecting of the discharge valve molding is easy when the discharge valve is fabricated, and a damage on the metal mold can be prevented.

Also, it is desirable that the outer diameter of the discharge valve 104 is smaller than the inner diameter of the discharge cover 103 by more than 10 1mm. Then, a flowing resistance during the linear reciprocating movement of the discharge valve 104 and the abrasion by the contact with the discharge cover 103 caused by the eccentric force of the valve spring 105 can be prevented.

As shown in Figures 8A and 8B, the valve spring 105 is a compressed 15 coil spring of conical shape having one end closely supported by the second stepped unit 103d formed on inner side surface of the discharge cover 103, and the other end inserted into the spring insert unit 104c of the discharge valve 104.

Also, the valve spring 105 is formed as a conical type in which the 20 rotation radius is gradually reduced or increased so as to prevent a part from impacting to next parts during compression. In addition, winding number of the wire which is an important element in deciding elastic force is decided according to a noise characteristic and a pressure dispersion inside the discharge cover. In the present invention, the wire is wound more than twice

in order to prevent the generation of the eccentric force caused by biased application of the elastic force to opened end direction of the valve spring 105, and in order to make the elastic force be applied equally. However, it is desirable that the wire is wound 2.3 times in real application. And accordingly, 5 the moving instability of the discharge valve 104 can be solved.

Also, the valve spring 105 is formed to have a certain gap d2 between the respective wire of the valve spring 105 when the valve spring 105 is projected on the inner wall surface 103g of the discharge cover.

In addition, it is desirable that a wound rotation center of the valve 10 spring 105 and the center of the discharge valve 104 are on same axial line.

Also, a broad end part of the valve spring 105 may be supported by the inner side of the discharge cover 3, and on the contrary, a small end part of the valve spring may be supported by the inner side of the discharge cover 3.

15 And, as shown in Figures 10 and 11, the discharge valve 104 is injection molded through a fixed first metal mold 107 on which a contour making the pressure face unit 112 of the discharge valve 104 is formed, and a second metal mold 108 on which a contour making the pressure back face unit 114 of the discharge valve 104 and the cutting surface unit 116 is formed.

20 Therefore, a parting line 111 is formed between the pressure face unit 112 and the pressure back face unit 114 of the discharge valve 104. In addition, a part where the contour of the pressure back face unit 114 meets the parting line 111 becomes an under cutting surface 116 which is slightly slanted, and therefore the discharge valve molding is separated as adhering

to the movable second metal mold 108 when the metal molds are separated. In addition, the discharge valve molding is ejected by a plurality of eject pins 115 formed on inside of the second metal mold 108.

In addition, a gate through which the medium is injected is formed on 5 the first metal mold 107 having the contour of the pressure surface unit 112 of the discharge valve 104.

As described above, appropriate choosing the positions of the gate 110 and the parting line 111 makes the ejecting of the discharge valve molding be easy.

10 The unexplained reference numerals 1a designates a refrigerant gas passage, 2a is a penetrating hole, 2b is a coupling hole, and a S1 designates a compression space.

General operations of the discharge valve apparatus for the reciprocating compressor according to the present invention are similar to 15 those of the conventional art.

When the piston 1 integrated with an armature(not shown) of a reciprocating motor(not shown) undergoes a reciprocating movement inside the cylinder 2, the refrigerant gas is sucked and compressed inside the compression space S1 of the cylinder 2 through the refrigerant gas passage 20 1a formed inside the piston 1, and then discharged through the discharge space S2 of the discharge cover 103. And the processes are repeated.

As shown in Figure 11A, a new refrigerant gas is sucked through the refrigerant gas passage 1a in the piston 1, compressed in the compression space S1 as pushing the suction valve 6 installed on the front end surface of

the piston 1, and discharged to the discharge space S2 at a certain time point during the suction stroke of the piston 1.

After that, as shown in Figure 11B, the sucked gas filled in the compression space S1 of the cylinder 2 is compressed by being pushed by 5 the piston 1, and discharged to the discharge space S2 as pushing the discharge valve 104 during the compression and discharge strokes of the piston 1. The compressed gas filled in the discharge space S2 is discharged out of the discharge valve assembly being pushed by newly sucked gas during the next compression and discharge strokes of the piston 1.

10 On the other hand, the pressure in the compression space S1 is smaller than the elastic force of the valve spring 105 during the suction stroke of the piston 1, and therefore the valve spring is returned and the discharge valve 104 is adhered to the front end surface of the cylinder 2.

On the contrary, the pressure in the compression space S1 is larger 15 than the elastic force of the valve spring 105 during the compression and discharge strokes of the piston 1, and therefore the discharge valve 104 is pushed and the valve spring 105 is compressed. At that time, the rotation radius of the valve spring 105 is gradually reduced from the discharge cover 103 toward the discharge valve 104 so that a part is not contacted to the other 20 parts, and therefore the noise caused by impacts of respective parts during compression can be prevented.

INDUSTRIAL APPLICABILITY

As so far described, according to the discharge valve apparatus for the

reciprocating compressor of the present invention, the rotation radius of the valve spring is set to be gradually reduced or increased, and then impacts of a part to the other parts is prevented, whereby the impact noise caused by the impacts of the respective during the compression of the valve spring in 5 accordance with the compression and discharge strokes of the piston can be prevented.

Also, one or more stepped units are formed on the discharge cover side where the valve spring is coupled, and therefore the valve spring is closely supported. And then, the eccentric force which may be generated by 10 the continued reciprocating movements of the valve spring can be prevented.

Also, the parting line is formed on center part of the discharge valve and the gate is formed on fixed metal mold which used for fabricating the discharge valve, and therefore the ejecting of the discharge valve becomes easy and the post-fabrication becomes easy because of the characteristic of 15 the discharge valve shape. In addition, a life span of the metal mold is increased, and generation of the burr can be prevented.

In addition, the fabrication metal mold is easy to be ejected when the discharge valve is fabricated by forming an undercutting surface which is tapered. And, the vertical portion and the horizontal portion of same diameter 20 as the inner diameter of the spring are formed on the spring insert unit, whereby the abrasion of the discharge valve caused by the repeated movements can be prevented.

CLAIMS

1. A discharge valve apparatus for a reciprocating compressor comprising:
 - a discharge cover having built-in volume so as to cover front end 5 surface of a cylinder;
 - a discharge valve disposed so as to be contacted/separated to/from the front end surface of the cylinder by a piston which undergoes a reciprocating movement inside the cylinder; and
 - a valve spring having both ends respectively adhered to rear surface 10 of the discharge valve and by inner surface of the discharge cover which is facing the rear surface of the discharge cover so as to elastically supporting the rear surface of the discharge valve,
 - wherein the valve spring is formed as a conical shape in which a rotation radius is gradually reduced or increased so as to prevent a part from 15 impacting to other parts during compression.
2. The apparatus of claim 1, wherein the valve spring is wound more than twice.
3. The apparatus of claim 1, wherein at least one stepped unit is 20 formed inside the discharge cover, and therefore a front end of the valve spring is not contacted to inner wall of the discharge cover, whereby abrasion generation is prevented.

4. The apparatus of claim 3, wherein a stepped unit in which end of the valve spring is inserted is formed successively to the stepped unit.

5. The apparatus of claim 1, wherein a certain gap is formed between wires of the valve spring when the valve spring is projected on the inner wall of the discharge cover.

6. The apparatus of claim 1, wherein a center of the valve spring and a center of the discharge valve are on same axial line.

10

7. The apparatus of claim 1, wherein a gap between an outer diameter of the discharge valve and an inner diameter of the discharge cover is more than 1mm.

15

8. The apparatus of claim 1, wherein the discharge valve comprises:

a plane pressure face unit which is adhered to the front end surface of the cylinder; and

20 a pressure back face unit which is formed protruded on a side facing the pressure face unit so that its diameter is gradually reduced from edge toward the center direction.

9. The apparatus of claim 8, wherein a parting line is formed on a position where the pressure face meets the pressure back face.

10. The apparatus of claim 8, wherein the discharge valve further comprises an undercutting surface unit formed as biased to at least one of the pressure face and the pressure back face.

5 11. The apparatus of claim 8, wherein the pressure back face unit further comprises a spring insert unit so as to be forcedly inserted into the valve spring.

10 12. The apparatus of claim 11, wherein the spring insert unit includes a vertical portion and a horizontal portion.

15 13. The apparatus of claim 1, wherein a gate is formed on fixed metal mold on which the pressure face unit is molded, when the discharge valve is fabricated by an injection molding method.

14. The apparatus of claim 1, wherein a plurality of eject pins are formed on a movable metal mold on which the pressure back face unit is formed, when the discharge valve is fabricated by an injection molding method


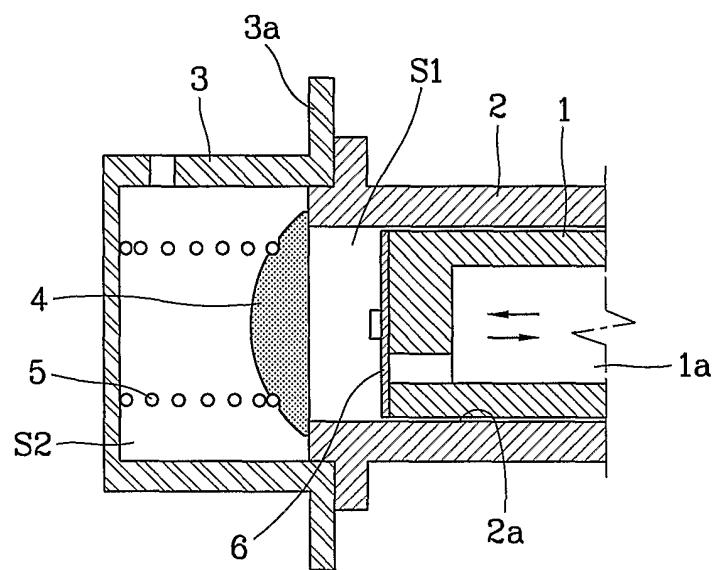
1/7
FIG. 1

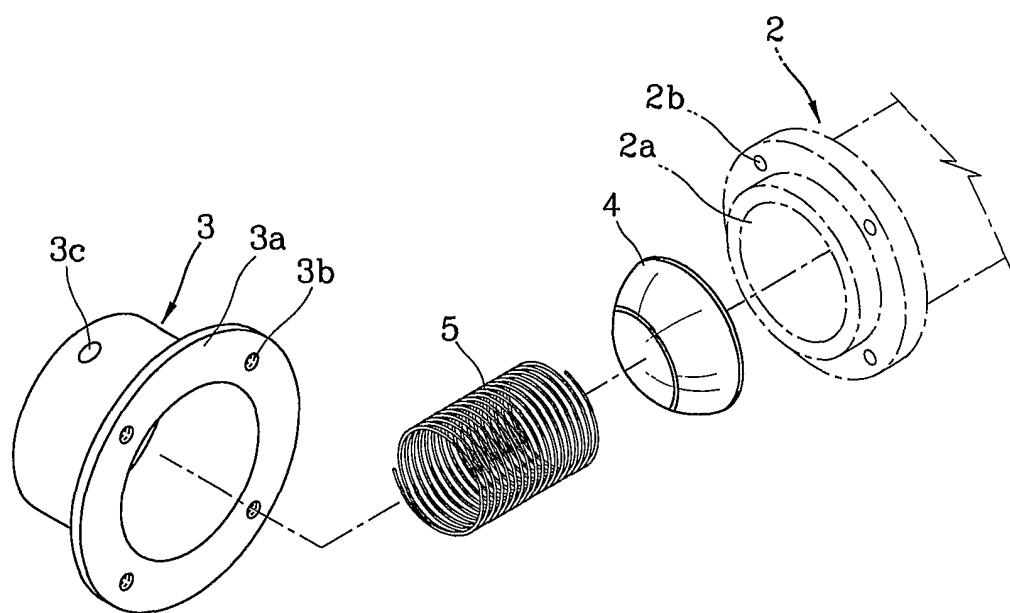FIG. 2



2/7

FIG. 3A


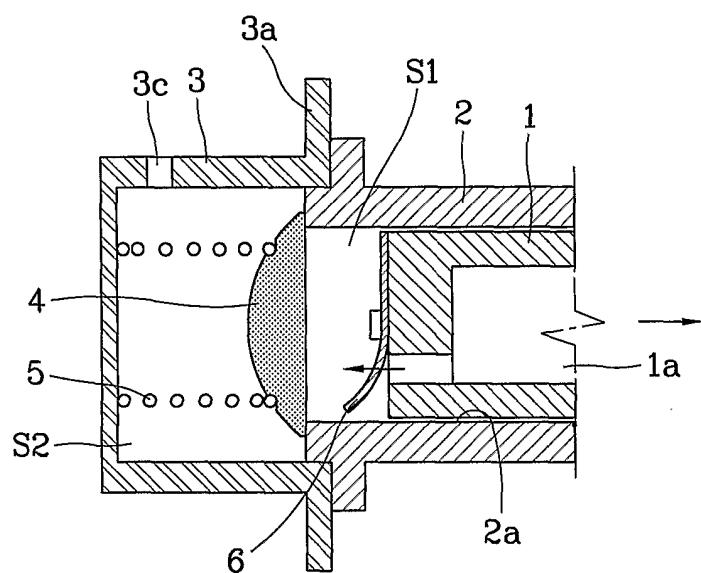


FIG. 3B

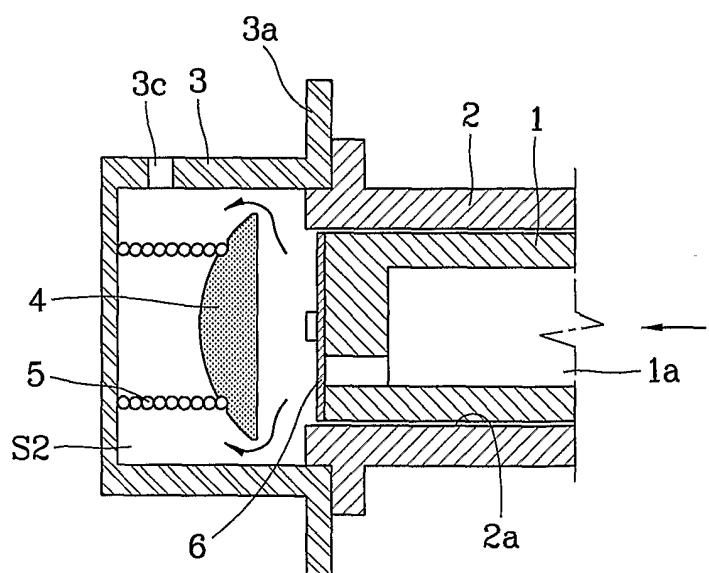

3/7
FIG. 4


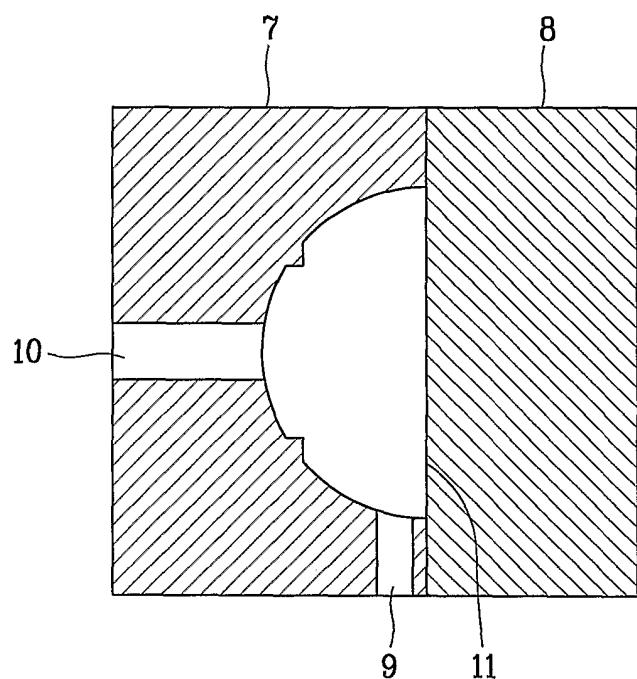


FIG. 5

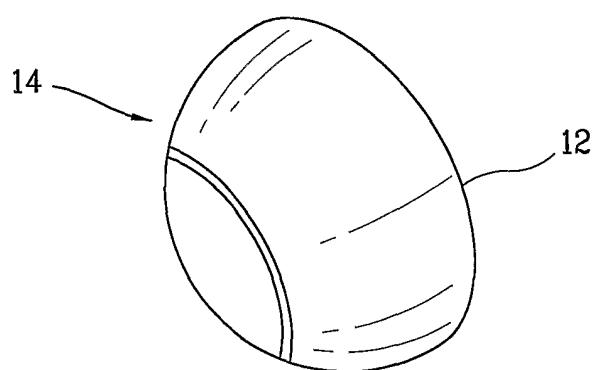

4 / 7

FIG. 6


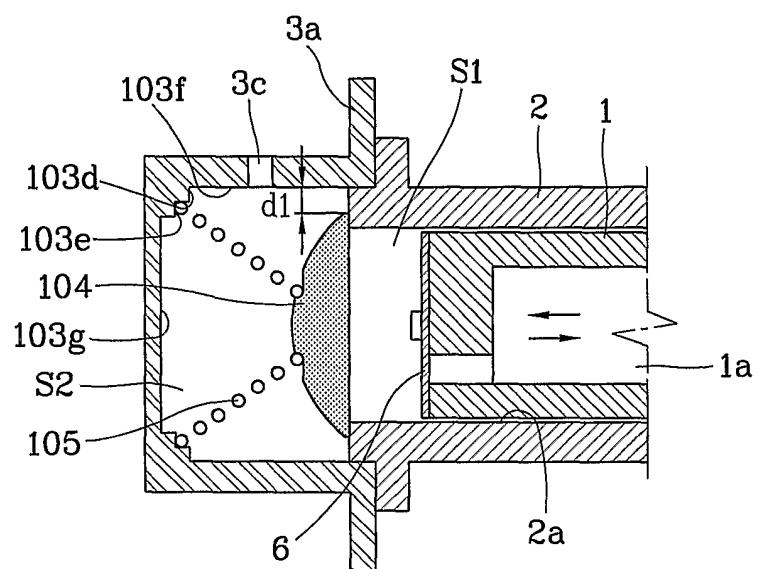


FIG. 7

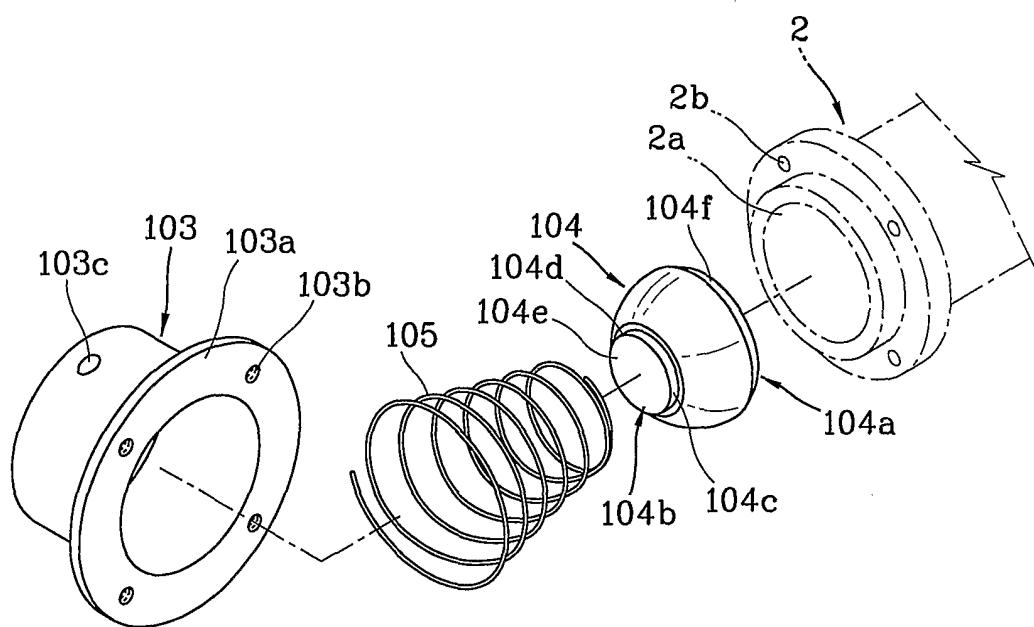

5/7
FIG. 8A


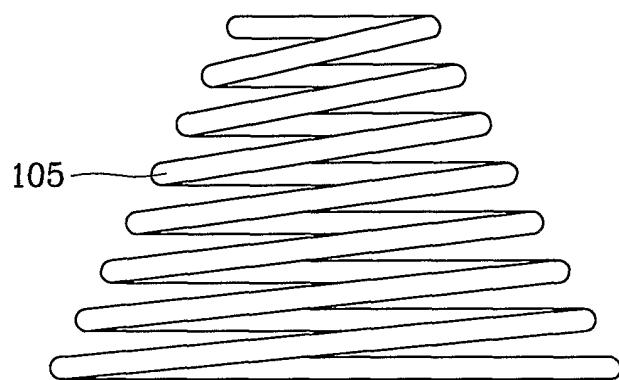


FIG. 8B

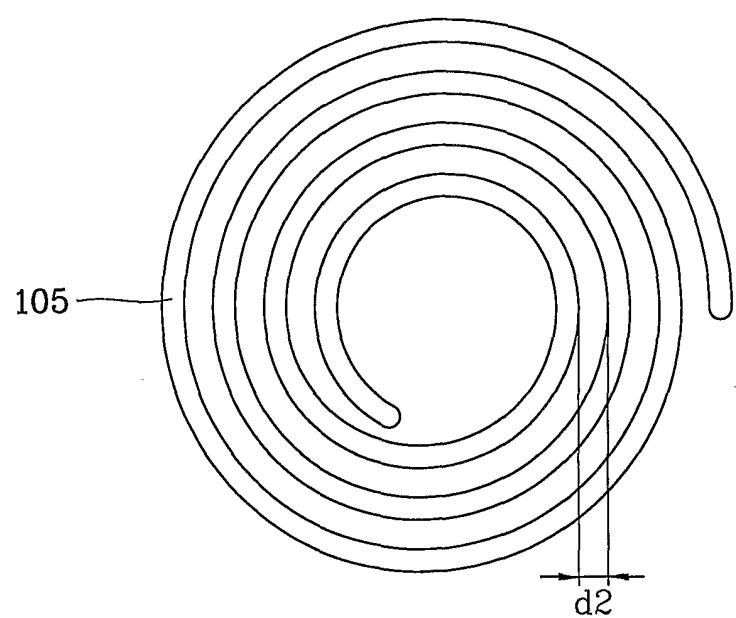


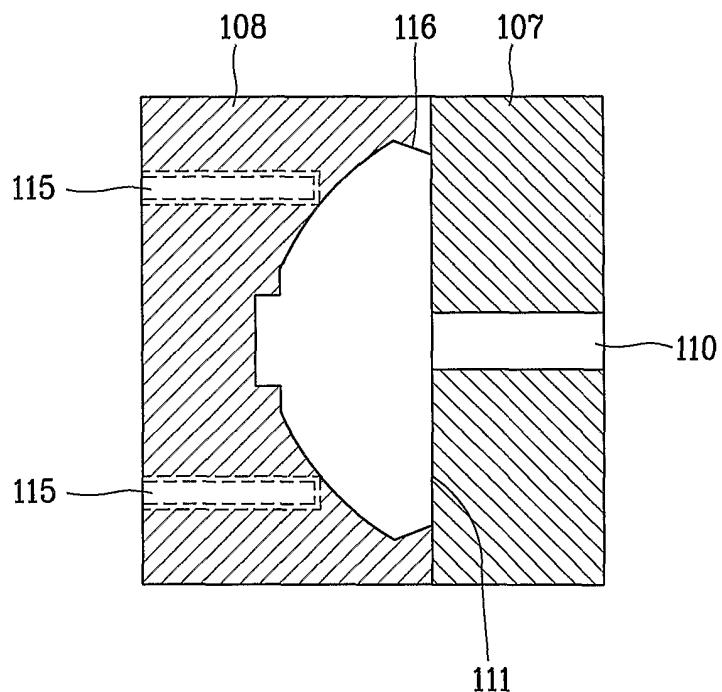
6/7
FIG. 9

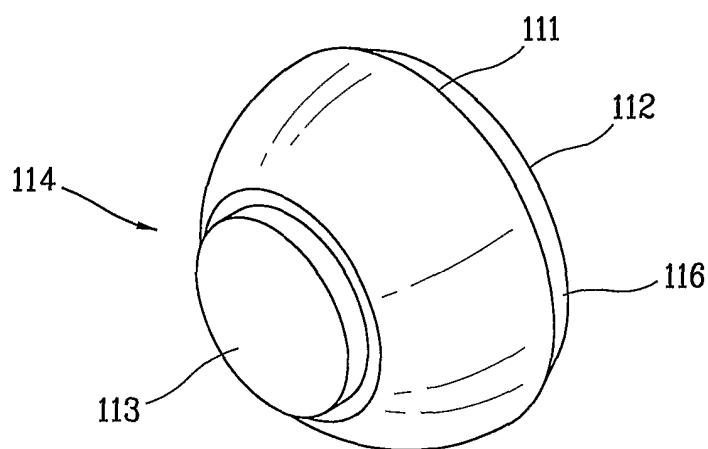FIG. 10



7/7
FIG. 11A


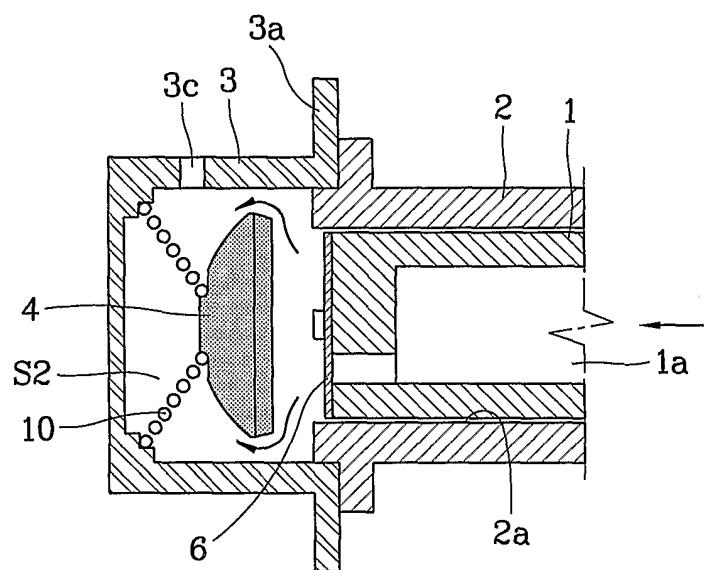


FIG. 11B

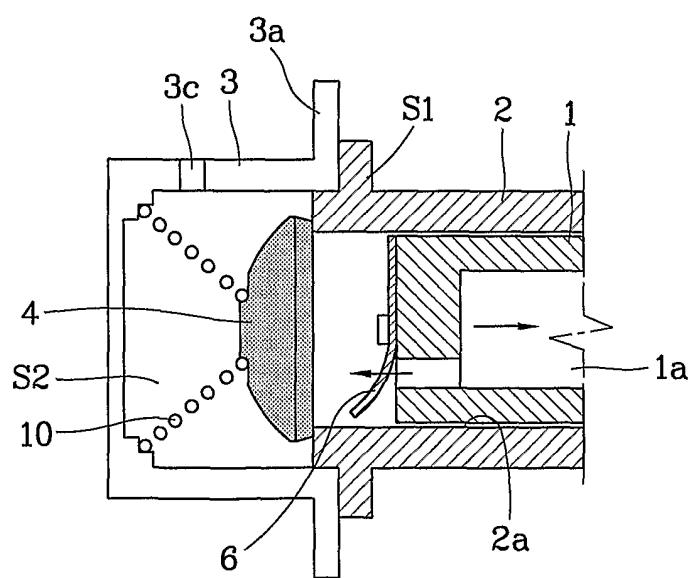

INTERNATIONAL SEARCH REPORT

international application No.

PCT/KR01/00827

A. CLASSIFICATION OF SUBJECT MATTER

IPC7 F04B 17/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7 F04B 17/04, 31/00, 39/02, 39/12,

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Patents and applications for inventions since 1975

Korean Utility models and applications for Utility models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|---|-----------------------|
| A | Patent Abstracts of Japan JP63-183278 A (MATSUSHITA ELECTRIC IND CO. LTD) 28. July 1988 Abstract, Figure | 1 - 14 |
| A | Patent Abstracts of Japan JP59-54785 A (MATSUSHITA ELECTRIC IND CO. LTD) 29. March 1984 Abstract, Figure | 1 - 14 |
| A | Patent Abstracts of Japan JP59-51177 A (MATSUSHITA ELECTRIC IND CO. LTD) 24. March 1984 Abstract, Figure | 1 - 14 |
| A | Patent Abstracts of Japan JP04-134192 A (BROTHER IND CO. LTD) 8. May 1992 Abstract, Figure | 1 - 14 |

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents:
 "A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier application or patent but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed


"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
 "&" document member of the same patent family

Date of the actual completion of the international search
04 SEPTEMBER 2001 (04.09.2001)

Date of mailing of the international search report
05 SEPTEMBER 2001 (05.09.2001)

Name and mailing address of the ISA/KR
Korean Intellectual Property Office
Government Complex-Daejeon, Dunsan-dong, Seo-gu, Daejeon
Metropolitan City 302-701, Republic of Korea
Facsimile No. 82-42-472-7140

Authorized officer
CHUNG, Sung Chan
Telephone No. 82-42-481-5518



INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR01/00827

| C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT | | |
|---|--|-----------------------|
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| A | Kr 97-75353 A (LG ELECTRIC CORP) 10 DECEMBER 1997 Claims 1, 2 Figure 6 | 1 - 14 |
| A | Kr 97-10097 U (LG ELECTRIC CORP) 29 MARCH 1997 Claims 1-3 Figure 4-5 | 1 - 14 |
| A | Kr 97-11403 A (LG ELECTRIC CORP) 27 MARCH 1997 Claims 1 - 8 Figure 13-18 | 1 - 14 |
| A | Kr 97-11402 U (LG ELECTRIC CORP) 29 MARCH 1997 Claims 1-3 Figure 9-13 | 1 - 14 |
| A | Kr 97-75360 A (LG ELECTRIC CORP) 10 DECEMBER 1997 Claims 1, 2 Figure 4 | 1 - 14 |
| A | Kr 99-16945 A (LG ELECTRIC CORP) 15 MARCH 1999 Claims 1, 2 Figure 4 | 1 - 14 |