

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2007211908 B2**

(54) Title
Transconductor and filter circuit

(51) International Patent Classification(s)
H03K 3/023 (2006.01)

(21) Application No: **2007211908** (22) Date of Filing: **2007.08.23**

(30) Priority Data

(31) Number (32) Date (33) Country
11/510443 2006.08.24 US

(43) Publication Date: **2008.03.13**

(43) Publication Journal Date: **2008.03.13**

(44) Accepted Journal Date: **2011.03.24**

(71) Applicant(s)
ITT Manufacturing Enterprises, Inc.

(72) Inventor(s)
Wyatt, Michael

(74) Agent / Attorney
Griffith Hack, Level 29, Northpoint 100 Miller Street, North Sydney, NSW, 2060

(56) Related Art
US 2004/0053590 A1
US 5489873 A

TRANSCONDUCTOR AND FILTER CIRCUIT

ABSTRACT OF THE DISCLOSURE

- 5 A transconductor and filter circuit is described. In one embodiment, a front end module within the transconductor and filter circuit converts a differential input voltage signal into a differential output current and supplies the output current at a differential output. A filter module coupled to the differential output of the front end module receives the differential output current, converts the output current into an
- 10 intermediary differential voltage, and filters the differential voltage to obtain a filtered differential output voltage signal having low output impedance.

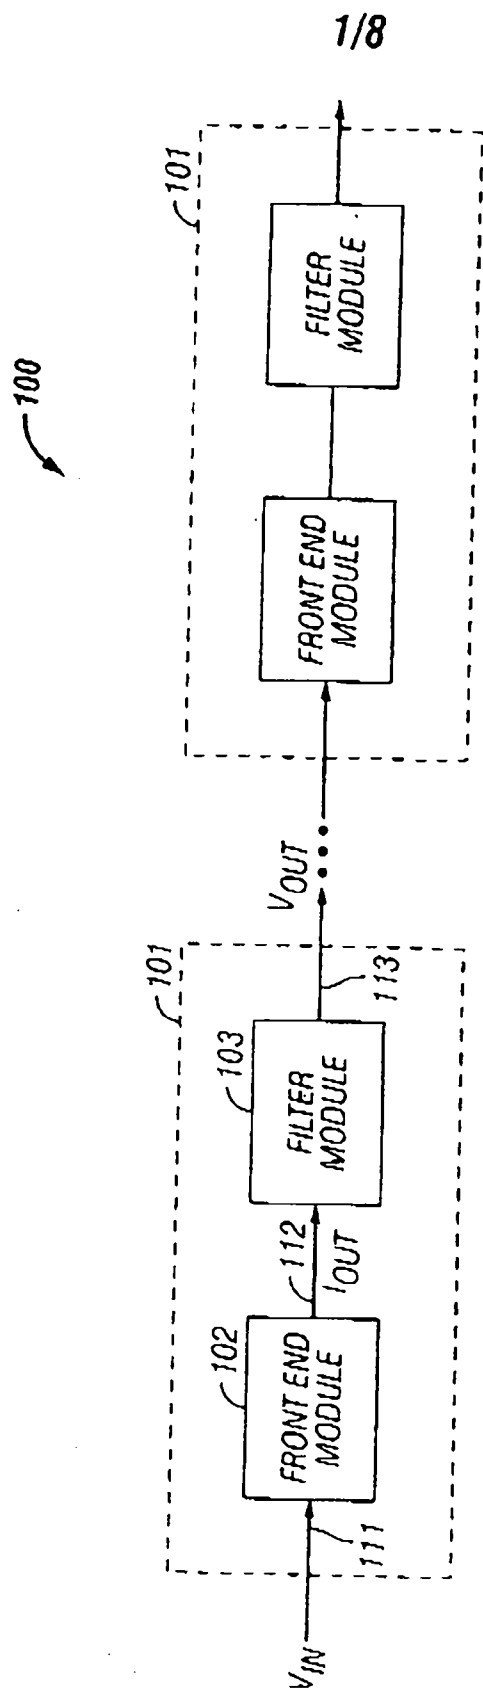


FIG. 1

2007211908 23 Aug 2007

AUSTRALIA
Patents Act 1990

COMPLETE SPECIFICATION
STANDARD PATENT

Applicant(s) :

ITT MANUFACTURING ENTERPRISES, INC.

Invention Title:

TRANSDUCTOR AND FILTER CIRCUIT

The following statement is a full description of this invention, including the best method of performing it known to me/us:

TRANSCONDUCTOR AND FILTER CIRCUIT

5

TECHNICAL FIELD

The invention relates generally to the field of electronic circuits, and more particularly, to a transconductor and filter circuit.

10

BACKGROUND OF THE INVENTION

Numerous circuits are known, which are intended to provide conversion of a differential voltage input signal into an output current. These circuits have proven value in a variety of ever expanding communications applications. One example of such circuits is a triple differential amplifier that uses parallel- or series-connected sets of differential pairs of bipolar transistors whose inputs and outputs are connected in parallel, as described in detail in "The Multi-tanh Principle: A Tutorial Overview," by Barrie Gilbert, published in the IEEE Journal of Solid-State Circuits, Vol. 33, No. 1, January 1998, and incorporated by reference herein.

20 Since the output impedance of such circuits is typically high, solutions have been proposed to lower the output impedance by, for example, buffering the output of the circuit with a pair of emitter followers. However, these solutions do not appear to offer low pass filtering capabilities within the circuit without an increase in power consumption. Thus, there is a need for a circuit that lowers the output impedance and merges the low pass filtering function in the circuit, without adding significant complexity or power consumption.

SUMMARY OF THE INVENTION

In accordance with a first aspect, the present invention provides a circuit comprising:

a front end module for converting a differential input voltage signal into a differential output current and for supplying said output current at a differential output;

5 a filter module coupled to said differential output of said front end module for receiving said output current, converting said output current into a differential voltage and for filtering said differential voltage to obtain a filtered differential output voltage signal;

wherein said filter module further comprises:

10 a plurality of resistor devices, a first end of each resistor device directly coupled in series to a respective line of said differential output of said front end module;

a plurality of emitter followers, a base of each emitter follower directly coupled to a second end of each of said resistor devices;

15 a plurality of capacitor devices, a first end of each capacitor device directly coupled to a respective line of said differential output of said front end module and a second end of each capacitor device directly coupled to a respective emitter of said emitter followers; and

a further capacitor device coupled between each base of the emitter followers.

20 In accordance with a second aspect, the present invention provides a method to manufacture a circuit comprising the steps of:

coupling a filter module to a differential output of a front end module;

said front end module for converting a differential input voltage signal into a differential output current and supplying said output current at said differential output;

25 said filter module for receiving said output current, converting said output current into a differential voltage, and filtering said differential voltage to obtain a filtered differential output voltage signal;

wherein said step of coupling said filter module further comprises the steps of:

30 coupling in series a plurality of resistor devices to said differential output of said front end module, a first end of each resistor device coupled to a respective line of said differential output;

coupling an emitter follower to a second end of each of said resistor devices;

coupling a plurality of capacitor devices between:

35 (a) said differential output of said front end module, each capacitor device coupled to one line of said differential output; and

(b) said emitter followers, each capacitor device coupled to an emitter of each of said emitter followers; and

coupling a further capacitor device between respective bases of said emitter

followers.

In accordance with a third aspect, the present invention provides a method comprising the steps of:

- 5 converting a differential input voltage signal into a differential output current;
 converting said output current into a differential voltage output;
 filtering said differential voltage output to obtain a filtered differential output voltage signal;
 wherein said step of filtering further comprises the steps of:
- 10 coupling in series a plurality of resistor devices to said differential voltage output, a first end of each resistor device coupled to a respective line of said differential voltage output;
- coupling an emitter follower to a second end of each of said resistor devices;
 coupling a plurality of capacitor devices between:
- 15 (a) said differential voltage output of said front end module, each capacitor device coupled to one line of said differential voltage output; and
 (b) said emitter followers, each capacitor device coupled to an emitter of each of said emitter followers; and
 coupling a further capacitor device between respective bases of said emitter
- 20 followers.

In accordance with a fourth aspect, the present invention provides a circuit comprising:
 means for converting a differential input voltage signal into a differential output current;

- 25 means for converting said output current into a differential voltage;
 means for filtering said differential voltage to obtain a filtered differential output voltage signal;
 wherein said filter means further comprises:
- 30 a plurality of resistor devices, a first end of each resistor device directly coupled in series to a respective line providing said differential voltage;
- a plurality of emitter followers, a base of each emitter follower directly coupled to a second end of each of said resistor devices;
- a plurality of capacitor device, a first end of each capacitor device directly coupled to a respective line providing said differential voltage and a second end of each
- 35 capacitor device directly coupled to a respective emitter of said emitter followers; and
 a further capacitor device coupled between each base of the emitter followers.

In accordance with a fifth aspect, the present invention provides a machine-readable media storing a description of a circuit and containing executable instructions, which, when executed, cause a machine to emulate said circuit to perform a method comprising the steps of:

- 5 converting a differential input voltage signal into a differential output current;
 converting said output current into a differential voltage;
 filtering said differential voltage to obtain a filtered differential output voltage
 signal;
- wherein said step of filtering further comprises the steps of:
- 10 coupling in series a plurality of resistor devices to said differential voltage, a
 first end of each resistor device coupled to a respective line providing said differential
 voltage;
- coupling an emitter follower to a second end of each of said resistor devices;
 coupling a plurality of capacitor devices between:
- 15 (a) said differential voltage, each capacitor device coupled to a respective
 line providing said differential voltage; and
- (b) said emitter followers, each capacitor device coupled to an emitter of
 each of said emitter followers; and
- coupling a further capacitor device between respective bases of said emitter
 20 followers.

BRIEF DESCRIPTION OF THE DRAWINGS

25 **Figure 1** is a block diagram illustrating a multistage transconductor and filter circuit according to an exemplary embodiment of the invention;

Figure 2 is a circuit diagram illustrating an exemplary prior art front end module within one stage of the multistage transconductor and filter circuit;

30 **Figure 3** is a graph illustrating the effective transconductance as a function of the differential input voltage for the prior art front end module;

Figure 4 is a circuit diagram illustrating a transconductor and filter circuit according to an exemplary embodiment of the invention;

35 **Figure 5** is a graph illustrating the total transconductance for the transconductor and filter circuit according to an exemplary embodiment of the invention;

Figure 6 is a graph illustrating the effective gain for the transconductor and filter circuit according to an exemplary embodiment of the invention;

Figure 7 is a graph illustrating the voltage gain of a fourth order Butterworth filter for various values of a control current I_{AGC} according to an exemplary embodiment of the invention.

Figure 8 is a flow diagram illustrating a method for low pass filtering within the transconductor and filter circuit according to an exemplary embodiment of the invention.

DETAILED DESCRIPTION

Figure 1 is a block diagram illustrating a multistage transconductor and filter circuit according to an exemplary embodiment of the invention. As illustrated in Figure 1, the multistage transconductor and filter circuit 100 includes multiple similar stages 101. In one embodiment, each stage 101 is a transconductor and filter circuit, which includes a front end module 102 coupled to a filter module 103, as described in further detail below. In an alternate embodiment, the front end module 102 and the filter module 103 may be implemented on separate circuits.

The front end module 102 receives a differential input voltage signal (V_{IN}) 111 and converts the differential input voltage signal 111 into a differential output current (I_{OUT}) 112. The filter module 103 receives the differential output current 112 and outputs a differential output voltage signal (V_{OUT}) 113, which is further supplied to a subsequent stage 101 within the multistage transconductor and filter circuit 100.

Figure 2 is a circuit diagram illustrating an exemplary prior art front end module within one stage of the multistage transconductor and filter circuit. As illustrated in Figure 2, the front end module 102 is a differential amplifier, such as, for example, a triple differential amplifier or "triplet" circuit, as described in further detail in "The Multi-tanh Principle: A Tutorial Overview," by Barrie Gilbert, published in the IEEE Journal of Solid-State Circuits, Vol. 33, No. 1, January 1998, and incorporated by reference herein.

- 10 The front end module 102 includes one or more differential transistor pairs configured to convert V_{IN} 111 into I_{OUT} 112. The front end module 102 shown in Figure 2 includes three differential pairs of transistors 201-202, 203-204, and 205-206, having inputs and outputs coupled in parallel. The emitters of each differential transistor pair 201-202, 203-204, 205-206 are coupled to corresponding collectors of
- 15 transistors 207, 208, 209. The bases of transistors 207, 208, 209 are coupled to receive a bias voltage V_{BIAS} . In one embodiment, the outer differential pairs 201-202 and 205-206 have opposing emitter-area ratios of A and operate at equal tail currents. The center differential pair 203-204 has equal emitter areas, such that a transconductance value g_m of the circuit 102 is centered at $V_{IN}=0$. The emitter bias
- 20 current transmitted to this center pair 203-204 is set to K times the emitter bias current transmitted to the outer pairs, where K is a factor less than 1. For different values of A and K and in order to minimize distortion, the incremental transconductance g_m for the circuit 102 can be maintained at a nearly constant value over a wide range of the differential input voltage signal V_{IN} 111. The g_m value for
- 25 $V_{IN}=0$ can be determined as follows:

$$g_M = g_{M0} \times \frac{1}{2 + K} \times \left\{ \frac{8A}{(1 + A)^2} + K \right\}$$

where g_{M0} is the g_M that would result with $A=1$, that is using the total tail current in a single differential transistor pair. g_{M0} can be calculated as follows:

$$g_{M0} = \frac{qI_C}{kT}$$

- 5 where q is the electron charge, I_C is the total current, k is the Boltzmann constant, and T is the temperature in Kelvins (K).

Figure 3 is a graph illustrating the effective transconductance g_M as a function of the differential input voltage V_{IN} 111 for the prior art front end module 102. As illustrated
 10 in Figure 3, the graphic representations 301, 302, and 303 correspond to the differential transistor pairs 201-202, 203-204, and 205-206, respectively, and are offset due to the performance of each respective differential transistor pair. A composite graphic representation 304 illustrates the transconductance g_M of the front end module 102 as a function of the differential input voltage V_{IN} 111.

15

Figure 4 is a circuit diagram illustrating a transconductor and filter circuit 101 according to an exemplary embodiment of the invention. As illustrated in Figure 4, in one embodiment, the transconductor and filter circuit 101 includes a front end module 102 similar to the front end module described in detail in connection with
 20 Figure 2, having three differential pairs of transistor devices 401-402, 403-404, and 405-406, having inputs and outputs coupled in parallel. Alternatively, the circuit 101 may include any number of differential transistor pairs. The emitters of each differential transistor pair 401-402, 403-404, 405-406 are coupled to corresponding

collectors of transistor devices 407, 408, 409. The bases of transistor devices 407, 408, 409 are coupled to receive a bias voltage V_{BIAS} .

In one embodiment, the differential output current 112 is supplied to the filter module 103 at the output of the front end module 102. The filter module 103 includes resistor devices (R_1) 411, 412, 413 and 414. Each resistor device 411, 412 is coupled from V_{CC} to each output current 112. This arrangement converts the differential output current 112 into an intermediary differential voltage. Each resistor device 413, 414 is coupled in series to one line of the differential output of the front end module 102. In one embodiment, the resistor devices 411, 412, 413 and 414 have an identical resistance value R_1 . The filter module 103 further includes capacitor devices 415 and 416 coupled to the corresponding resistor devices 413 and 414. A further capacitor device 417 is coupled between the two resistor devices 413 and 414. In one embodiment, the capacitor devices 415 and 416 have an identical capacitance value C_1 and the capacitor device 417 has a capacitance value C_2 . In an alternate embodiment, the resistor devices 413, 414 and the capacitor devices 415, 416, and 417 may be implemented on a separate circuit coupled to the front end module 102.

The differential voltage is further supplied to a pair of emitter followers 418, 419. The voltage gain of the emitter followers 418, 419 has a value of less than 1 and provides a low output impedance to drive a subsequent stage 101. The base of each transistor device 418, 419 is coupled to a respective resistor device 413, 414. The emitter of each transistor device 418, 419 is coupled to a corresponding collector of transistor devices 421, 422, which have their bases coupled to receive a bias voltage V_{BIAS} .

In one embodiment, the transfer function of the circuit 101 is calculated as follows:

$$T(S) = \left[\frac{g_M}{\frac{S^2}{\omega_0^2} + \frac{aS}{\omega_0^2} + 1} \right] \times R_1$$

where g_M is the effective transconductance of the circuit 101; ω_0 is the corner
 5 frequency of the filter module 103; a is a coefficient determined by the selection of
 the resistance R_1 , and of the capacitances C_1 , and C_2 ; and g_MR_1 is the effective gain
 of the circuit 101. The low pass filter function can thus be implemented with a
 voltage gain of g_MR_1 .

10 **Figure 5** is a graph illustrating the total transconductance for the transconductor and
 filter circuit 101 according to an exemplary embodiment of the invention. As shown
 in **Figure 5**, the total transconductance g_M , as a function of the differential input
 voltage V_{IN} 111, is a composite of the transconductance values for the
 corresponding differential transistor pairs 401-402, 403-404, 405-406, which are
 15 displaced in center voltage. By broadening the transconductance over the
 differential input voltage V_{IN} 111, the circuit 101 has a broader signal handling range
 before it becomes non-linear.

Figure 6 is a graph illustrating the effective gain for the transconductor and filter
 20 circuit 101 according to an exemplary embodiment of the invention. In one
 embodiment, the effective gain of the circuit 101, which is defined as the differential
 voltage across the two resistors 411 and 412 divided by the differential input voltage
 111, is a function of the transconductance g_M times the value R_1 of the resistors 411,
 412.

Figure 7 is a graph illustrating the voltage gain of a fourth order Butterworth filter for various values of a control current I_{AGC} according to an exemplary embodiment of the invention. As shown in Figure 7, in one embodiment, the voltage gain, in
 5 decibels (dB), varies for a control current I_{AGC} between 0 and 50 microAmps (μA). However, the filter characteristics remain unchanged and are independent of the voltage gain.

In one embodiment, a fourth order Butterworth filter is implemented with two
 10 transconductor and filter circuits 101 cascaded together, as shown in the multistage circuit 100 of Figure 1. The two transconductor and filter circuits 101 are not identical, having different values for the capacitance of capacitors 415, 416, and 417. In an alternate embodiment, a Bessel filter may be implemented using the transconductor and filter circuit 101. In another alternate embodiment, an
 15 approximation of a Gaussian filter may be implemented using the transconductor and filter circuit 101. In yet another alternate embodiment, a transitional filter may be implemented using the transconductor and filter circuit 101. The transfer function of the fourth order Butterworth filter can be calculated according to the following equation:

20
$$T(S) = \frac{1}{S^4 + cS^3 + dS^2 + cS + 1}$$

For $c = 2.61$, $d = 3.41$, and if $S = j\omega = j$, then:

$$T(S) = \frac{1}{j^4 + cj^3 + dj^2 + cj + 1} = \frac{1}{1 - jc - d + jc + 1} = \frac{1}{2 - d} = \frac{1}{\sqrt{2}}$$

Further breaking the 4th order in to two 2nd order equations:

$$\frac{1}{S^2 + aS + 1} \times \frac{1}{S^2 + bS + 1} = \frac{1}{S^4 + cS^3 + dS^2 + cS + 1}$$

Thus equating like terms in powers of S,

$$a + b = c \text{ and } 2 + ab = d$$

$$b = \frac{d-2}{a}$$

$$a + \frac{d-2}{a} = c$$

5

$$a^2 - ca + d - 2 = 0$$

$$a = \frac{c \pm \sqrt{c^2 - 4(d-2)}}{2} = \frac{2.61 \pm \sqrt{(2.61)^2 - 4(3.41-2)}}{2} = 1.843 \text{ or } 0.7674$$

$$b = c - a = 0.7674 \text{ or } 1.843$$

Note: 0.7674 is the high Q case and 1.843 is the low Q case.

- 10 A 2nd order general Sallen-Key type low pass filter has the transfer function:
(see Fig x):

$$T(S) = k \frac{1}{S^2 R_1 R_2 C_1 C_2 + S((1-k)R_1 C_1 + R_2 C_2 + R_1 C_2) + 1}$$

- 15 Where R_1 , R_2 , C_1 & C_2 are component values and k is the amplifier voltage gain.

Normalizing to $j\omega_0 = j$ and $R_1 R_2 C_1 C_2 = \frac{1}{\omega_0^2} = 1$, let $R_1 = R_2 = R$

$$R[(1-k)C_1 + 2C_2] = 1.843 \text{ (or } 0.7674)$$

$$R^2 C_1 C_2 = 1$$

Further normalize to $R = 1$

20

$$[(1-k)C_1 + 2C_2] = 1.843$$

if $C_1 C_2 = 1$

$$(1-k)C_1 + \frac{2}{C_1} = 1.843$$

$$(1-k)C_1^2 - 1.843C_1 + 2 = 0$$

$$C_1 = \frac{\frac{1.843}{(1-k)} \pm \sqrt{\left(\frac{1.843}{1-k}\right)^2 - 4\left(\frac{2}{1-k}\right)}}{2}$$

5

$$\left(\frac{1.843}{1-k}\right)^2 \geq \frac{8}{1-k}$$

$$1.843^2 \geq 8(1-k)$$

Thus, $k \geq 0.5754$. If the coefficient S is 0.7674, then $k \geq 0.9264$.

If the assumption is that $k \approx 0.95$ (emitter follower gain) and for $S = 1.843$, then:

10

$$C_1 = \frac{\frac{1.843}{(1-0.95)} \pm \sqrt{\left(\frac{1.843}{1-0.95}\right)^2 - 4\left(\frac{2}{1-0.95}\right)}}{2} = 1.119 \text{ (normalized low } Q)$$

$$C_2 = \frac{1}{C_1} = 0.8935 \text{ (normalized low } Q)$$

If the assumption is that $k \approx 0.95$ and for $S = 0.7674$, then:

15

$$C_1 = \frac{\frac{0.7674}{(1-0.95)} \pm \sqrt{\left(\frac{0.7674}{1-0.95}\right)^2 - 4\left(\frac{2}{1-0.95}\right)}}{2} = 3.328 \text{ (normalized high } Q)$$

$$C_2 = \frac{1}{C_1} = 0.3005 \text{ (normalized high } Q)$$

Let $R = 2,000$ (circuit value) and desired corner frequency $\omega_0 = 2\pi(15\text{MHz})$.

For $k \geq 0.5754$:

5

$$C_1' = \frac{C_1}{R\omega_0} = 5.936 \text{ pF (circuit value)}$$

$$C_2' = \frac{C_2}{R\omega_0} = 4.74 \text{ pF (circuit value)}$$

For $k \geq 0.9264$:

$$C_1' = \frac{C_1}{R\omega_0} = 17.66 \text{ pF (circuit value)}$$

$$C_2' = \frac{C_2}{R\omega_0} = 1.594 \text{ pF (circuit value)}$$

10

$$T(S) = \frac{1}{S^2 + aS + 1} \quad |T(S)|_{S=j\omega_0} = \left| \frac{1}{ja} \right| = \frac{1}{a} = 0.5426 = -5.31 \text{ dB (low Q case)}$$

$$T(S) = \frac{1}{S^2 + bS + 1} \quad |T(S)|_{S=j\omega_0} = \left| \frac{1}{jb} \right| = \frac{1}{b} = 1.303 = +2.3 \text{ dB (high Q case)}$$

Note that the product of the above $T(S)$ sections yields -3.01dB, the requisite 3dB corner frequency.

- 15 The values of R , C_1' and C_2' are the values used in **Figure x** with two cascaded sections. These values directly map into the differential circuit of **Figure 4** with the exception of C_2' which maps into **Figure 4** with a scale factor of $\frac{1}{2}$ due to the differential nature of **Figure 4**.

20

Figure 8 is a flow diagram illustrating a method for low pass filtering within the transconductor and filter circuit according to an exemplary embodiment of the invention. As shown in Figure 8, at processing block 801, a differential input voltage signal is received. At processing block 802, the differential input voltage signal is converted into a differential output current. At processing block 803, the differential output current is converted into an intermediary differential voltage. Finally, at processing block 804, the intermediary differential voltage is filtered to obtain a filtered differential output voltage signal having low output impedance.

- 10 It is also to be understood that embodiments of the present invention may be implemented not only within a physical circuit (e.g. on a semiconductor chip), but also within machine-readable media. For example, the circuits and designs discussed above may be stored upon and/or embedded within machine-readable media associated with a design tool used for designing semiconductor devices.
- 15 Examples include a netlist formatted in the VHSIC Hardware Description Language (VHDL), Verilog language, or Spice language. Some netlist examples include: a behavioral level netlist, a register transfer level (RTL) netlist, a gate level netlist, and a transistor level netlist. Machine-readable media also include media having layout information such as a GDS-II file. Furthermore, netlist files or other machine-
- 20 readable media for semiconductor chip design may be used in a simulation environment to perform the methods of the teachings described above. Thus, it is also to be understood that embodiments of this invention may be used as or to support a software program executed upon some form of a processing core (such as the CPU of a computer) or otherwise implemented or realized upon or within a
- 25 machine-readable medium, which includes any mechanism for storing or transmitting information in a form readable by a machine (e.g. a computer).

In the foregoing specification, the invention has been described with reference to specific exemplary embodiments thereof. It will, however, be evident that various modifications and changes may be made thereto without departing from the broader spirit and scope of the invention as set forth in the appended claims. The specification and drawings are, accordingly, to be regarded in an illustrative sense rather than a restrictive sense.

In the claims which follow and in the preceding description of the invention, except where the context requires otherwise due to express language or necessary implication, the word "comprise" or variations such as "comprises" or "comprising" is used in an inclusive sense, i.e. to specify the presence of the stated features but not to preclude the presence or addition of further features in various embodiments of the invention.

A reference herein to a prior art document is not an admission that the document forms part of the common general knowledge in the art in Australia.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A circuit comprising:
 - a front end module for converting a differential input voltage signal into a differential output current and for supplying said output current at a differential output;
 - a filter module coupled to said differential output of said front end module for receiving said output current, converting said output current into a differential voltage and for filtering said differential voltage to obtain a filtered differential output voltage signal;
 - wherein said filter module further comprises:
 - a plurality of resistor devices, a first end of each resistor device directly coupled in series to a respective line of said differential output of said front end module;
 - a plurality of emitter followers, a base of each emitter follower directly coupled to a second end of each of said resistor devices;
 - a plurality of capacitor devices, a first end of each capacitor device directly coupled to a respective line of said differential output of said front end module and a second end of each capacitor device directly coupled to a respective emitter of said emitter followers; and
 - a further capacitor device coupled between each base of the emitter followers.
2. The circuit according to Claim 1, wherein said filter module is a low pass filter.
3. The circuit according to Claim 1, wherein said front end module further comprises at least one differential pair of transistor devices having inputs and outputs coupled in parallel.
4. The circuit according to Claim 1, wherein a voltage gain value of said circuit is less than unity.
5. The circuit according to Claim 1, wherein said emitter follower has a voltage gain value of less than unity.

6. The circuit according to Claim 1, wherein each resistor device of said plurality of resistor devices has an identical resistance value.

5 7. The circuit according to Claim 1, wherein said each capacitor device has an identical capacitance value.

8. The circuit according to Claim 1, wherein said resistor devices, said capacitor devices, and said further capacitor device are implemented on a separate circuit.

10

9. A method to manufacture a circuit comprising the steps of:
coupling a filter module to a differential output of a front end module;
said front end module for converting a differential input voltage signal into a differential output current and supplying said output current at said differential output;
15 said filter module for receiving said output current, converting said output current into a differential voltage, and filtering said differential voltage to obtain a filtered differential output voltage signal;

20 wherein said step of coupling said filter module further comprises the steps of:
coupling in series a plurality of resistor devices to said differential output of said front end module, a first end of each resistor device coupled to a respective line of said differential output;

coupling an emitter follower to a second end of each of said resistor devices;
coupling a plurality of capacitor devices between:
25 (a) said differential output of said front end module, each capacitor device coupled to one line of said differential output; and
(b) said emitter followers, each capacitor device coupled to an emitter of each of said emitter followers; and
coupling a further capacitor device between respective bases of said emitter followers.

30

10. The method according to Claim 9, further comprising the step of coupling in

parallel inputs and outputs of at least one differential pair of transistor devices within said front end module, said at least one differential pair of transistor devices to receive and convert said differential input voltage signal into said output current.

5 11. The method according to Claim 9, wherein said filter module is a low pass filter.

12. The method according to Claim 9, wherein said emitter follower has a voltage gain value of less than unity.

10

13. A method comprising the steps of:
 converting a differential input voltage signal into a differential output current;
 converting said output current into a differential voltage output;
 filtering said differential voltage output to obtain a filtered differential output
 15 voltage signal;

wherein said step of filtering further comprises the steps of:
 coupling in series a plurality of resistor devices to said differential voltage
 output, a first end of each resistor device coupled to a respective line of said differential
 voltage output;

20 coupling an emitter follower to a second end of each of said resistor devices;
 coupling a plurality of capacitor devices between:
 (a) said differential voltage output of said front end module, each capacitor
 device coupled to one line of said differential voltage output; and
 (b) said emitter followers, each capacitor device coupled to an emitter of
 25 each of said emitter followers; and

coupling a further capacitor device between respective bases of said emitter
 followers.

14. The method according to Claim 13, wherein said step of converting said
 30 differential input voltage signal further comprises the steps of:
 receiving said differential output voltage signal at a front end module; and
 supplying said differential output current at a differential output of said front end

module.

15. The method according to Claim 14, wherein said step of converting said output current further comprises the steps of receiving said output current at a filter module
5 coupled to said differential output of said front end module.

16. A circuit comprising:
means for converting a differential input voltage signal into a differential output
current;
10 means for converting said output current into a differential voltage;
means for filtering said differential voltage to obtain a filtered differential output
voltage signal;

wherein said filter means further comprises:
a plurality of resistor devices, a first end of each resistor device directly
15 coupled in series to a respective line providing said differential voltage;
a plurality of emitter followers, a base of each emitter follower directly coupled
to a second end of each of said resistor devices;
a plurality of capacitor device, a first end of each capacitor device directly
coupled to a respective line providing said differential voltage and a second end of each
20 capacitor device directly coupled to a respective emitter of said emitter followers; and
a further capacitor device coupled between each base of the emitter followers.

17. A machine-readable media storing a description of a circuit and containing
executable instructions, which, when executed, cause a machine to emulate said circuit
25 to perform a method comprising the steps of:

converting a differential input voltage signal into a differential output current;
converting said output current into a differential voltage;
filtering said differential voltage to obtain a filtered differential output voltage
signal;

30 wherein said step of filtering further comprises the steps of:
coupling in series a plurality of resistor devices to said differential voltage, a
first end of each resistor device coupled to a respective line providing said differential

voltage;

coupling an emitter follower to a second end of each of said resistor devices;

coupling a plurality of capacitor devices between:

(a) said differential voltage, each capacitor device coupled to a respective
line providing said differential voltage; and

(b) said emitter followers, each capacitor device coupled to an emitter of
each of said emitter followers; and

coupling a further capacitor device between respective bases of said emitter
followers.

18. A circuit substantially as herein described, with reference to the accompanying
Figures.

19. A method substantially as herein described, with reference to the
accompanying Figures.

20. A machine-readable media storing a description of a circuit and containing
executable instructions substantially as herein described, with reference to the
accompanying Figures.

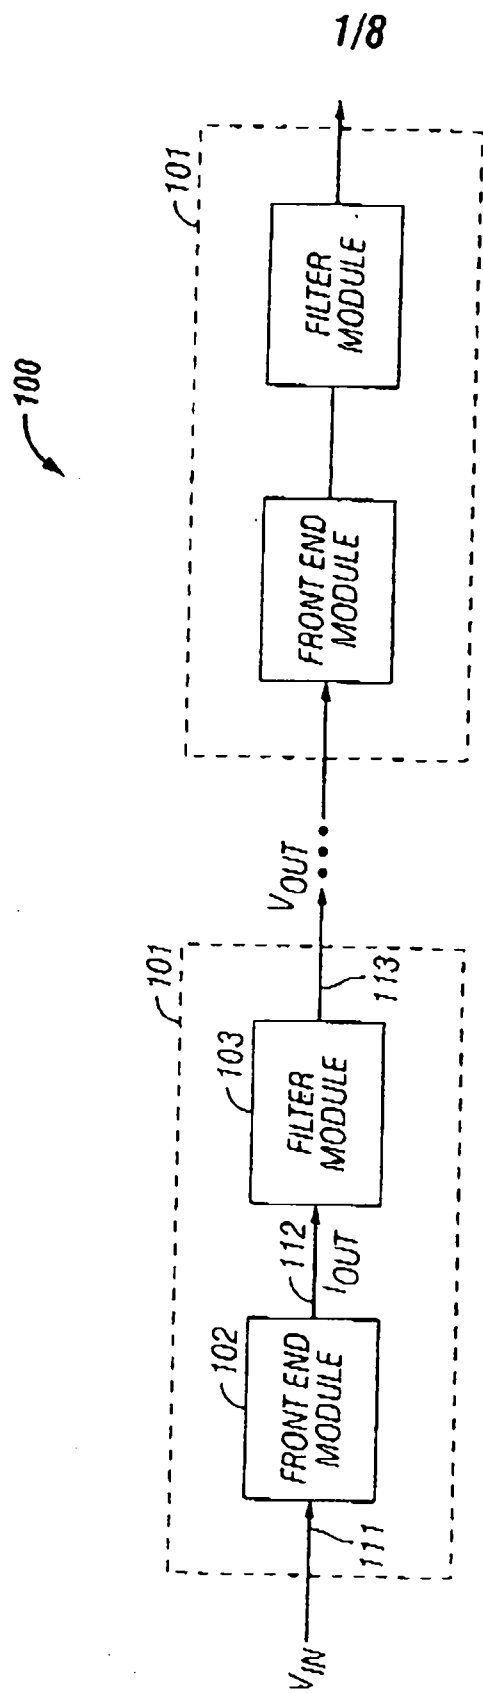


FIG. 1

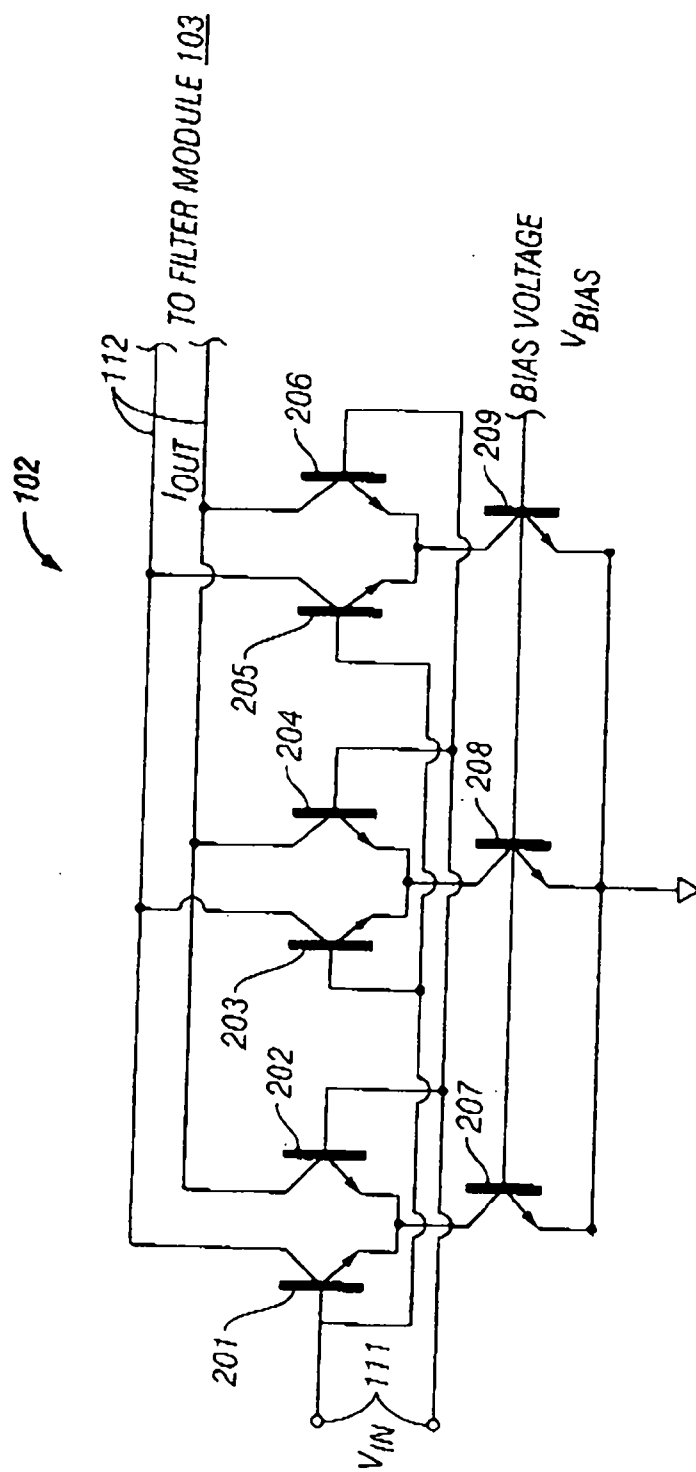


FIG. 2
(Prior Art)

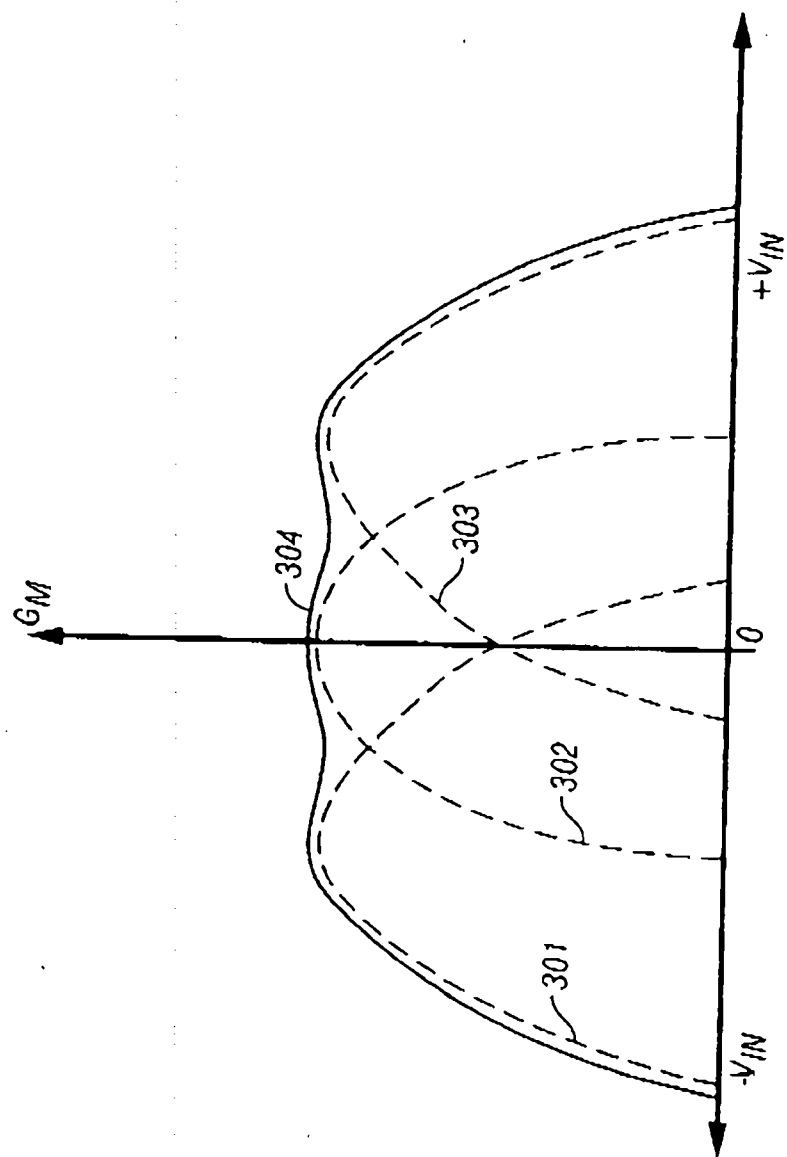


FIG. 3
(Prior Art)

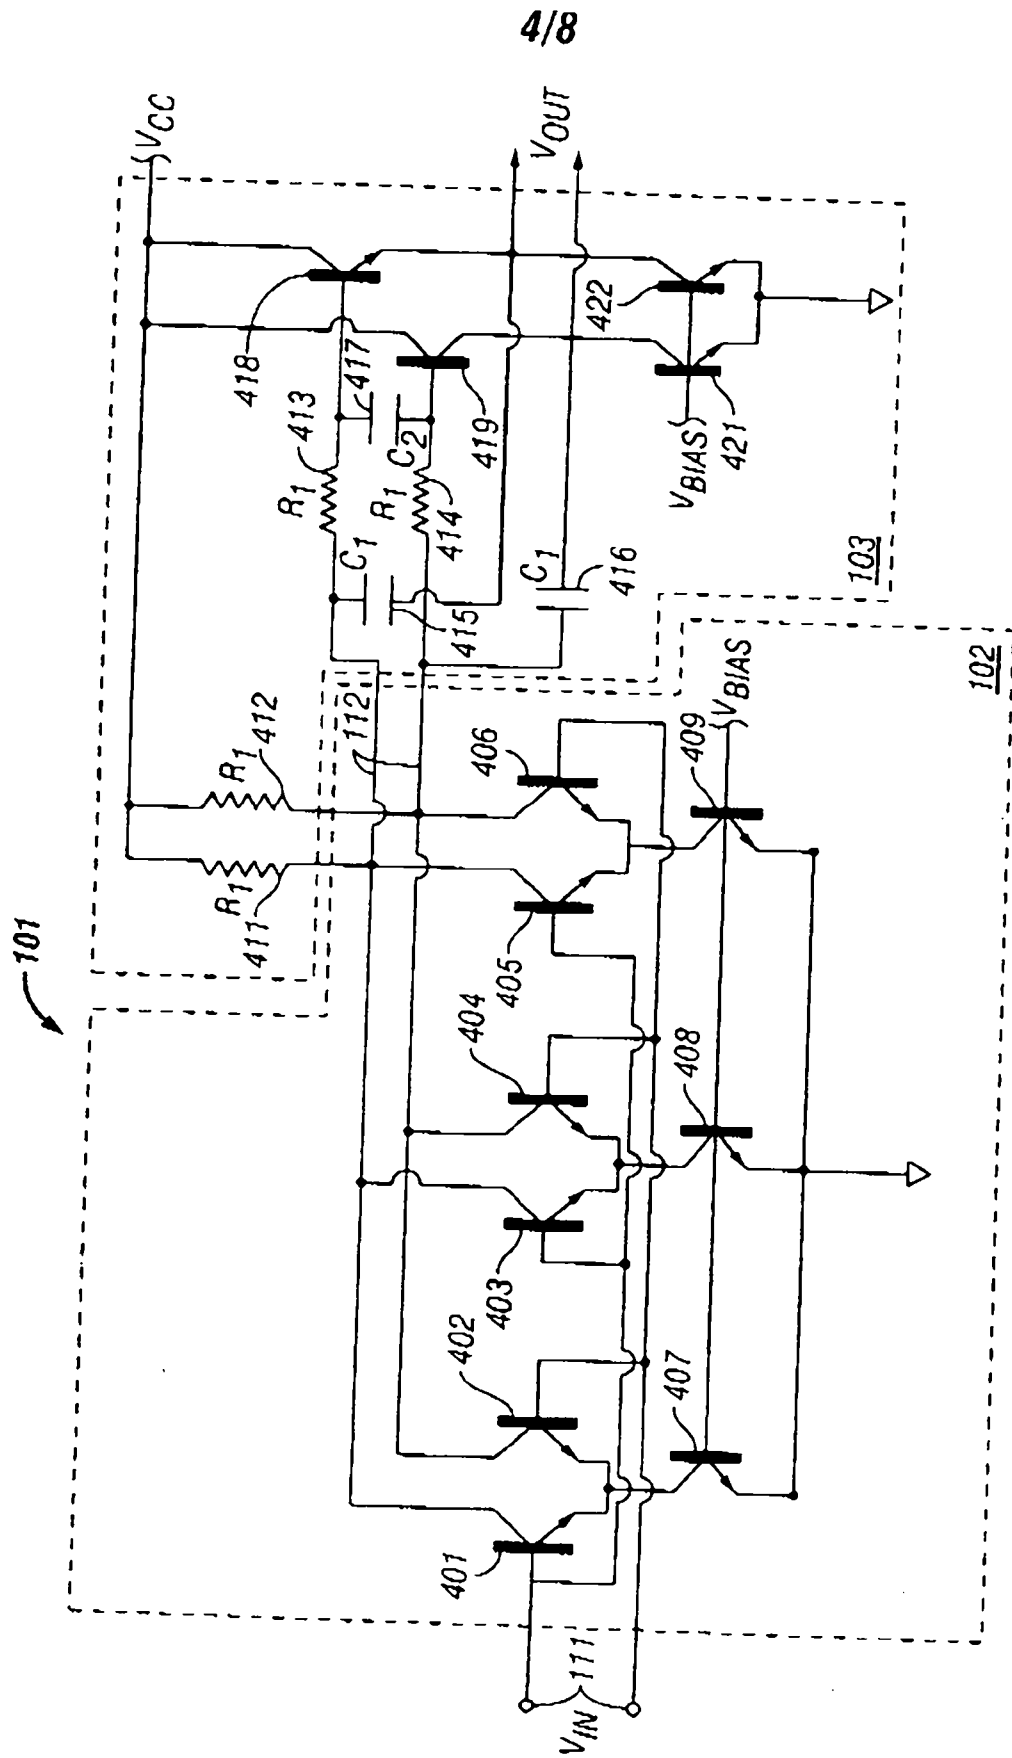


FIG. 4

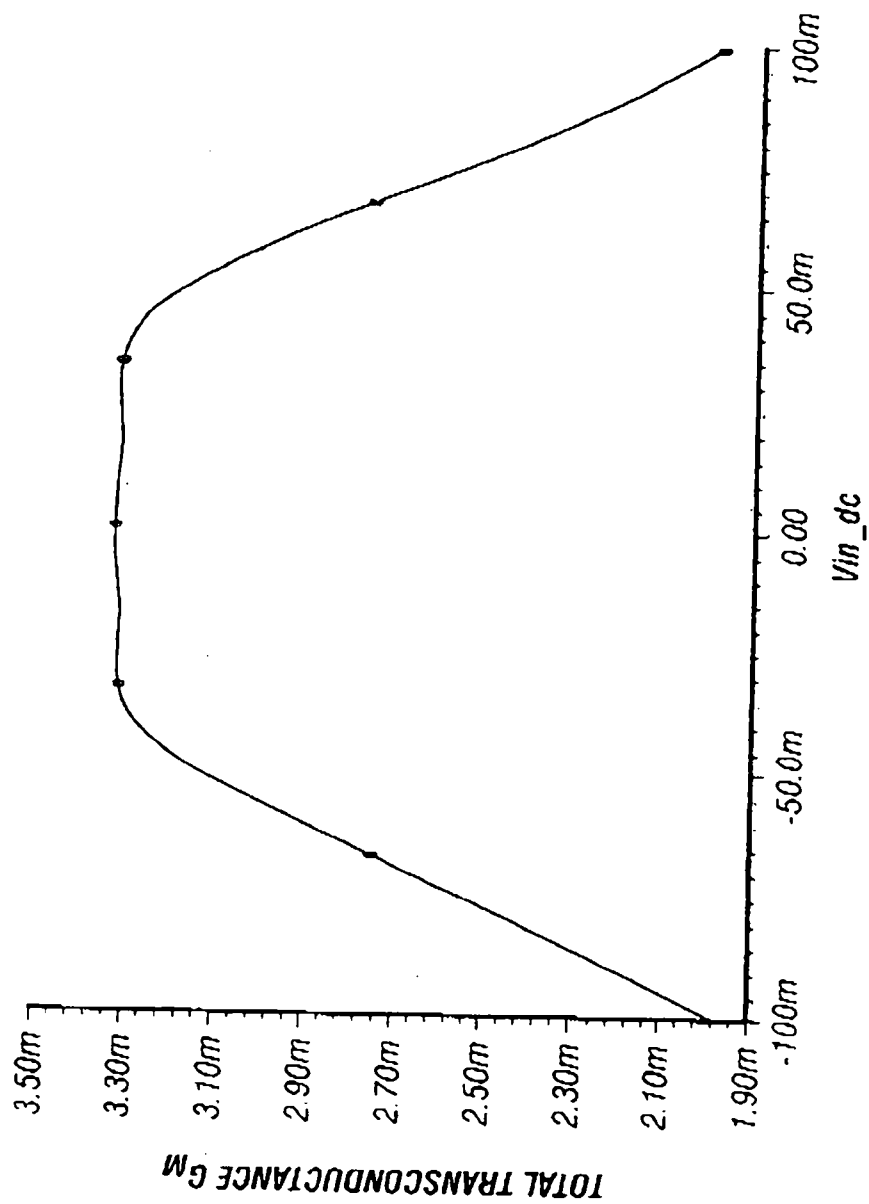


FIG. 5

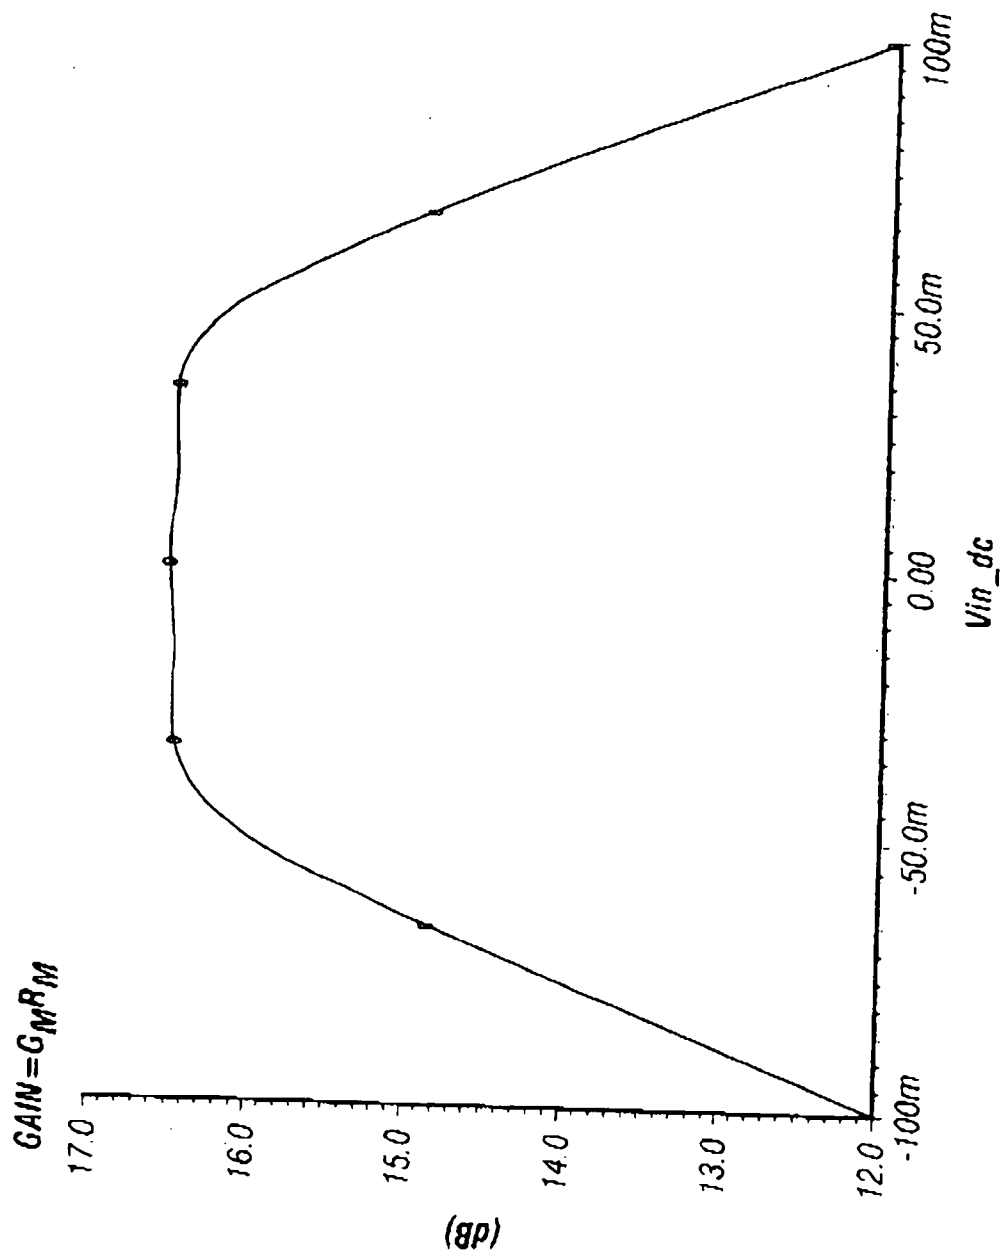


FIG. 6

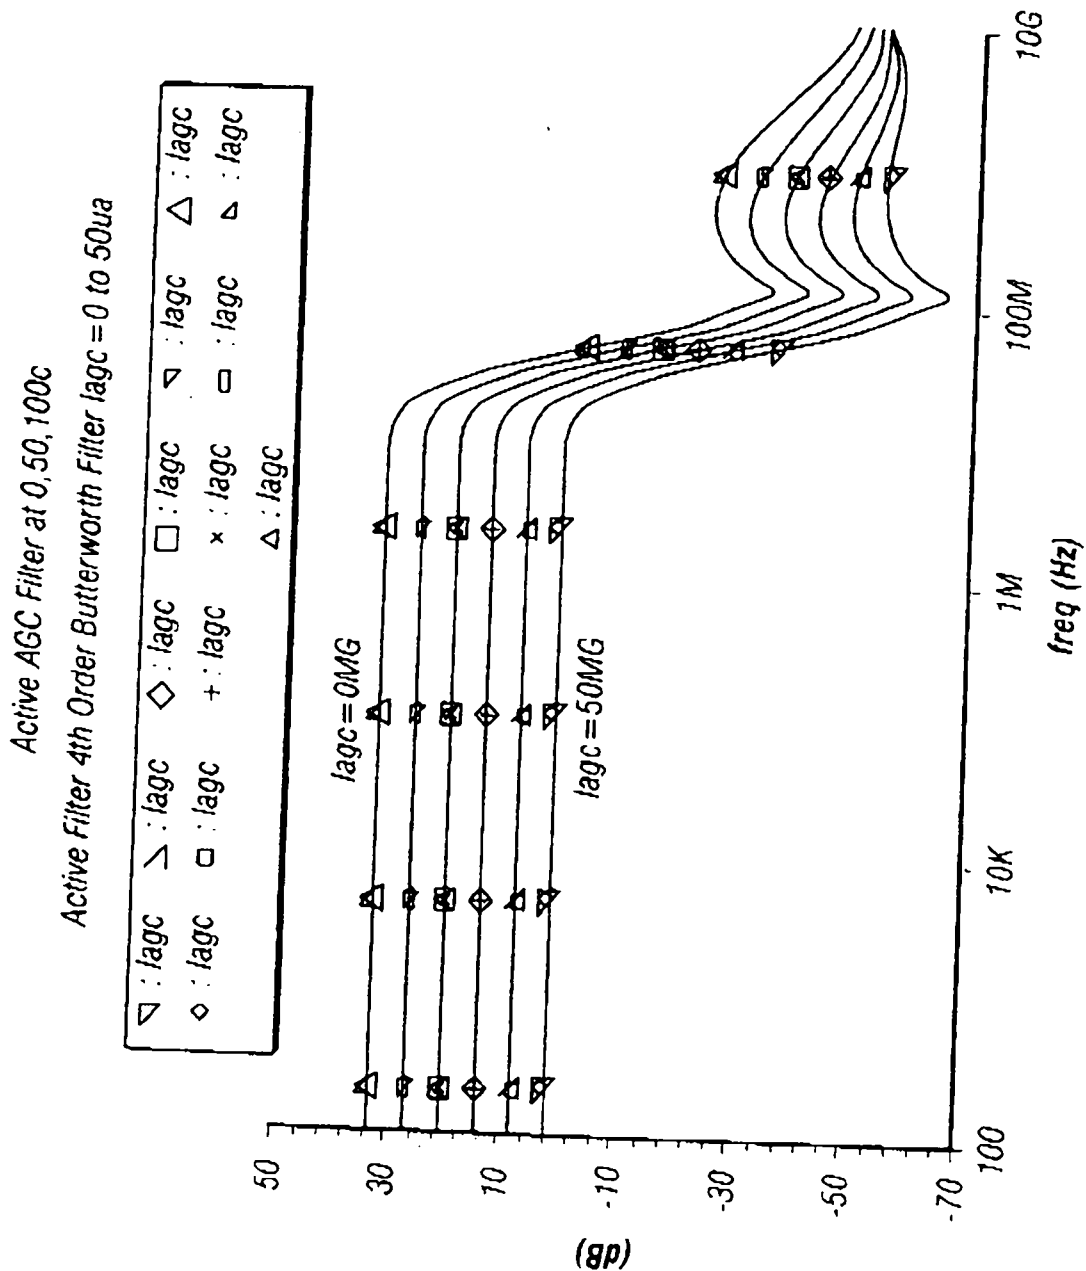


FIG. 7

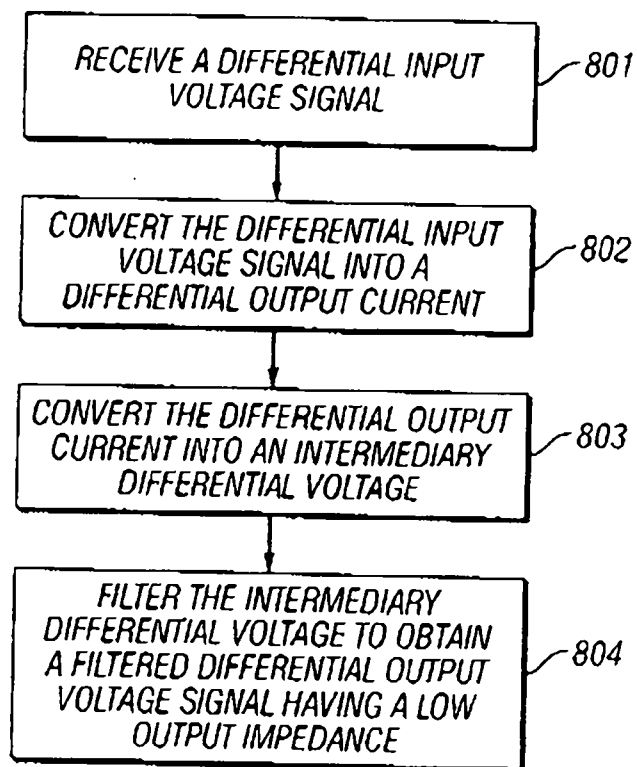


FIG. 8