



- (51) **International Patent Classification:**
C02F 11/14 (2006.01) *C02F 11/12* (2006.01)
- (21) **International Application Number:**
PCT/US2014/047332
- (22) **International Filing Date:**
19 July 2014 (19.07.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/955,963 31 July 2013 (31.07.2013) US
- (71) **Applicant:** ECOLAB USA INC. [US/US]; 370 N. Wabasha Street, St. Paul, Minnesota 55102 (US).
- (72) **Inventors:** DUGGIRALA, Prasad Y.; 3407 Redwing Drive, Naperville, Illinois 60564 (US). CHENG, Weiguo; 2520 Dewes Lane, Naperville, Illinois 60564 (US). MLAMBO, Darlington; 1377 Branchwood Circle, Apt. 203, Naperville, Illinois 60563 (US).
- (74) **Agent:** SORENSEN, Andrew D.; ECOLAB USA INC., 655 Lone Oak Drive, Eagan, Minnesota 55121 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(54) **Title:** ENHANCEMENT OF WASTEWATER SLUDGE DEWATERING USING SOY FLOUR OR SOY PROTEIN

(57) **Abstract:** Dewatering agents and methods of dewatering wastewater slurries are provided. Also disclosed are methods for improving the separation of solids from water. The water may be produced water, raw water, or wastewater, for example. The dewatering agents can be in solutions and the dewatering agent solutions may include flocculants, soy based components, and surfactants. The soy based components can include, for example, soy flour and soy protein.



ENHANCEMENT OF WASTEWATER SLUDGE DEWATERING USING SOY FLOUR OR SOY PROTEIN

BACKGROUND

5 1. Field of the Invention

[0001] This disclosure relates to compositions and methods for the separation of solids from water. More particularly, the disclosure relates to the use of soy based dewatering agent solutions to improve the separation of solids from water.

10 2. Description of the Related Art

[0002] The dewatering of municipal and industrial sludges (slurries) containing suspended organic solids is typically accomplished by mixing the sludge with one or more chemical reagents in order to induce a state of coagulation or flocculation of the solids. The solids are then separated from
15 the water using mechanical devices, such as plate and frame filter presses, belt-filter presses, centrifuges, and the like.

[0003] In a typical municipal sewage plant, wastewater remaining after coarse solids are settled out of the incoming sewage influent is conveyed into a biological clarifying stage, where the dissolved and suspended organic
20 material is decomposed by microorganisms in the presence or absence of air. These processes are referred to as aerobic digestion and anaerobic digestion, respectively.

[0004] The organic matter obtained as a result of this decomposition is largely bound in the form of a mass of microorganisms. This mass is
25 precipitated as an activated sludge. The water may be released into waterways or allowed to seep away in sewage irrigation fields, but the activated sludge must be dewatered prior to disposal.

[0005] The objective of a dewatering process is to maximize the efficiency of water removal, as decreasing the amount of water retained in
30 the dewatered solids (sludge cake) leads to decreased transport and disposal costs. Moreover, obtaining a dry sludge cake after the dewatering process can eliminate the need to subject the cake to an incineration

process, thus eliminating the need for further fuel costs and time expenditure.

BRIEF SUMMARY

[0006] Methods for improving the separation of solids from water are disclosed herein. In one aspect, the method for improving the separation of solids from water comprises the step of adding a dewatering agent solution comprising an effective amount of a soy based component to the water.

[0007] In another aspect, a method for dewatering a wastewater slurry containing solids is disclosed. This method comprises adding a dewatering agent solution comprising an effective amount of a soy based component to the slurry, thereby forming a mixture of water and flocculated solids, and separating the flocculated solids from the water.

[0008] In an additional aspect, a dewatering agent solution for improving the separation of solids from water is disclosed. The dewatering agent solution comprises a soy based component and a surfactant.

[0009] In another aspect, a dewatering agent solution for dewatering a wastewater slurry containing solids is disclosed. The dewatering agent solution comprises a soy based component and a surfactant.

[0010] The foregoing has outlined rather broadly the features and technical advantages of the present disclosure in order for the detailed description that follows to be better understood. Additional features and advantages of the disclosure will be described hereinafter that form the subject of the claims of this application. It should be appreciated by those skilled in the art that the conception and the specific embodiments disclosed may be readily utilized as a basis for modifying or designing other embodiments for carrying out the same purposes of the present disclosure. It should also be realized by those skilled in the art that such equivalent embodiments do not depart from the spirit and scope of the disclosure as set forth in the appended claims.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0011] A detailed description of the invention is hereafter described with specific reference being made to the drawings in which:

[0012] FIG. 1 depicts experimental data showing the effect of flocculant dose, soy flour, and soy flour plus surfactant dewatering agent solutions on the dryness of a sludge cake after a first static press test; and

[0013] FIG. 2 depicts experimental data showing the effect of soy flour on press dewatering with the presence of a cationic flocculant.

DETAILED DESCRIPTION

[0014] Compositions and methods for improving the separation of solids from water are disclosed herein. In certain aspects, the water is selected from produced water, raw water, and wastewater. Compositions and methods for improving the dewatering efficiency of wastewater slurries are also disclosed herein.

[0015] The present inventors have unexpectedly discovered that dewatering and/or separation can be maximized by adding certain dewatering agents to the water and/or the slurries. It is to be understood that throughout the present disclosure, reference to a “dewatering agent” or “dewatering agent solution” can mean a single dewatering agent or dewatering agent solution, or it can mean any combination of two, three, four, or more of the presently disclosed dewatering agents or dewatering agent solutions. Any of the presently disclosed dewatering agents can be added to the water and/or slurry as a solution. If more than one dewatering agent is used in connection with a disclosed method, the dewatering agents or dewatering agent solutions can be added in any order or particular dewatering agents can be added simultaneously in a single solution.

[0016] In certain aspects, the presently disclosed dewatering agent solution comprises soy. Hereinafter, this type of dewatering agent solution can be referred to as a “soy based dewatering agent solution,” or “a dewatering agent solution comprising a soy based component,” and is intended to include all formulations listed in this paragraph. For example, in

one aspect, the presently disclosed dewatering agent solution comprises soy flour. In accordance with the present disclosure, it is to be understood that soy flour comprises about 50% starch and about 50% soy protein. In another aspect, the presently disclosed dewatering agent solution comprises soy protein. In an additional aspect, the dewatering agent solution comprises a combination of soy flour and soy protein. In some aspects, the dewatering agent solution consists of soy protein, meaning it does not include any further additives besides the soy protein. In still further aspects, the dewatering agent solution consists of soy flour, meaning it does not include any further additives besides the soy flour. In other aspects, the dewatering agent solution consists of a combination of soy protein and soy flour, meaning it does not include any further additives besides the combination of soy protein and soy flour.

[0017] A solution of soy flour can be prepared by one of ordinary skill in the art and as an illustrative, non-limiting example, about 10 grams of soy flour can be dispersed into about 90 grams of water. Next, approximately 15 mM of $\text{Na}_2\text{S}_2\text{O}_5$ can be added and the pH of the solution can be adjusted to between about 8 and about 9 by adding a base, such as, but not limited to, 0.1 N NaOH. Without wishing to be bound by any theory, it is hypothesized that the sodium metabisulfite ($\text{Na}_2\text{S}_2\text{O}_5$) assists with the dissolution of the soy flour to release soy proteins. The resulting solution may be stirred for about 1 hour before its addition to the water or wastewater slurry. Again, the foregoing is simply an illustrative example of a method of making a dewatering agent solution comprising soy flour and the particular amounts set forth can be adjusted based upon the amount of dry solids in the water or slurry/sludge.

[0018] A solution of soy protein can be prepared by one of ordinary skill in the art and in certain aspects, it can be prepared in a manner similar to the solution of soy flour. However, when preparing the solution of soy protein, one would not need to add sodium metabisulfite. Soy protein can be easily dissolved into water with the pH adjusted to about 8.

[0019] The effective amounts of dewatering agent in the dewatering agent solution are empirically determined based upon the materials or solids contained in the slurry or the water. With respect to the soy flour or soy protein component of the dewatering agent solution, the dose of the soy component is from about 0.05 lb/ton to about 20 lb/ton, based on pounds of soy per ton of dry solids in the water or the slurry. In further aspects, the dose of the soy component is from about 1 lb/ton to about 15 lb/ton, or from about 2 lb/ton to about 10 lb/ton, based on pounds of soy per ton of dry solids in the water or the slurry. In some aspects, the dose of the soy component is from about 4 lb/ton to about 12 lb/ton and, in other aspects, the dose of the soy component is from about 8 lb/ton to about 12 lb/ton, based on pounds of soy per ton of dry solids in the water or the slurry.

[0020] Although the dewatering agent solution in accordance with certain aspects of the present disclosure is a soy based dewatering agent solution (i.e. a dewatering agent solution comprising a soy component), in other aspects, a dewatering agent solution may comprise a flocculant. Any type of flocculant can be used in accordance with the present disclosure, such as an anionic, cationic, or amphoteric flocculant. In certain aspects, the flocculant is a cationic polymer. Therefore, in certain aspects, a soy based dewatering agent solution can be added to the wastewater slurry or to any body of water containing solids and a separate dewatering agent solution comprising a flocculant, such as a cationic polymer, can be added to the wastewater slurry or other body of water containing solids. In some aspects, the soy based dewatering agent solution can be added first, followed by the subsequent addition of the dewatering agent solution comprising the flocculant. In other aspects, the soy based dewatering agent solution can be added after the addition of the dewatering agent solution comprising the flocculant.

[0021] Cationic polymer flocculants contemplated by the present disclosure can include monomers such as, but not limited to, acrylamide, allyl amine, vinyl amine, dialkylaminoalkyl acrylates, dialkylaminoalkyl acrylate quaternary salts, dialkylaminoalkyl acrylate acid salts,

dialkylaminoalkyl methacrylates, dialkylaminoalkyl methacrylate quaternary salts, and dialkylaminoalkyl methacrylate acid salts. Alkyl groups generally include from about 1 to about 10 carbon atoms. In certain aspects, the alkyl groups include from about 1 to about 7 carbon atoms and, in additional aspects, the alkyl groups include from about 1 to about 4 carbon atoms.

[0022] Specific examples of cationic monomers that can be used in connection with the presently disclosed cationic polymers include, but are not limited to, one or more members selected from the group consisting of dimethylaminoethyl acrylate methyl chloride quaternary salt (DMAEA.MCQ), dimethylaminoethyl acrylate methyl sulfate quaternary salt, dimethylaminoethyl acrylate benzyl chloride quaternary salt, dimethylaminoethyl acrylate sulfuric acid salt, dimethylaminoethyl acrylate hydrochloric acid salt, dimethylaminoethyl methacrylate methyl chloride quaternary salt, dimethylaminoethyl methacrylate methyl sulfate quaternary salt, dimethylaminoethyl methacrylate benzyl chloride quaternary salt, dimethylaminoethyl methacrylate sulfuric acid salt, dimethylaminoethyl methacrylate hydrochloric acid salt, dialkylaminoalkylacrylamides or methacrylamides and their quaternary or acid salts such as acrylamidopropyltrimethylammonium chloride, dimethylaminopropyl acrylamide methyl sulfate quaternary salt, dimethylaminopropyl acrylamide sulfuric acid salt, dimethylaminopropyl acrylamide hydrochloric acid salt, methacrylamidopropyltrimethylammonium chloride, dimethylaminopropyl methacrylamide methyl sulfate quaternary salt, dimethylaminopropyl methacrylamide sulfuric acid salt, dimethylaminopropyl methacrylamide hydrochloric acid salt, diethylaminoethylacrylate, diethylaminoethylmethacrylate, diallyldiethylammonium chloride and diallyldimethyl ammonium chloride (DADMAC).

[0023] In one particular aspect, a dewatering agent solution comprising soy flour is added to the water or wastewater slurry in addition to a dewatering agent solution comprising a copolymer of acrylamide and dimethylaminoethylacrylate methyl chloride. In certain aspects, this copolymer comprises from about 1% to about 15%

dimethylaminoethylacrylate methyl chloride and from about 99% to about 85% acrylamide. In other aspects, the copolymer comprises about 90% acrylamide and about 10% dimethylaminoethylacrylate methyl chloride.

[0024] In certain aspects, the dose of the flocculant is from about 0 lb/ton to about 30 lb/ton or from about 2 lb/ton to about 10 lb/ton, based on pounds of active polymer per ton of dry solids in the water or the slurry. In other aspects, the dose of the flocculant is from about 12 lb/ton to about 30 lb/ton and, in other aspects, the dose of the flocculant is from about 6 lb/ton to about 25 lb/ton, based on pounds of active polymer per ton of dry solids in the water or the slurry.

[0025] The flocculant dewatering agent solution may be in the form of an emulsion, such as a water in oil emulsion with, for example, about 42% polymer actives. The product would need to be made down or "inverted" before use and as one illustrative example, one could invert the polymer in the lab by mixing about 1g of the flocculant into about 99g of water under about 800 rpm stirring for about 30 minutes. This 1% product can then be diluted to a desired concentration (typically between about 0.01% and about 1%) before addition to the water or wastewater slurry. In the field, the product can be inverted using a make-down unit (mixing device) into about a 0.5% to about 1% solution, then post diluted to the desired solution concentration before feeding the solution into the water or wastewater slurry using a feeding pump.

[0026] In accordance with certain aspects of the present disclosure, a dewatering agent solution can also comprise one or more surfactants. Surfactants are compounds that lower the water surface tension, meaning the interfacial tension between water and one other liquid, or that between water and a solid. Surfactants are usually organic compounds that are amphiphilic, meaning they contain both hydrophobic groups (their *tails*) and hydrophilic groups (their *heads*). Therefore, a surfactant contains both a water insoluble component and a water soluble component. Surfactants can carry a cationic charge, an anionic charge, or no charge at all. In one aspect of the present disclosure, the surfactant can be a nonionic surfactant, such

as a triblock copolymer of PEO-PPO-PEO, where PEO (polyethylene oxide) is hydrophilic and PPO (polypropylene oxide) is more hydrophobic. Thus, in one aspect of the present disclosure, a dewatering agent solution can comprise a triblock copolymer of PEO-PPO-PEO. Solutions of surfactants can be made by known processes in the art, such as adding a known amount of surfactant to water and mixing to form the solution.

[0027] In certain aspects, the dose of the surfactant is from about 0 lb/ton to about 5 lb/ton or from about 0.5 lb/ton to about 2 lb/ton, based on pounds of surfactant per ton of dry solids in the water or the slurry. In other aspects, the dose of the surfactant is from about 1 lb/ton to about 3 lb/ton or from about 2 lb/ton to about 4 lb/ton, based on pounds of surfactant per ton of dry solids in the water or the slurry.

[0028] Thus, in certain aspects, a dewatering agent solution for dewatering a wastewater slurry containing solids or for improving the separation of solids from water may comprise a soy based component and a surfactant, and the solvent may be water. The amounts of the soy based component and the surfactant have been outlined above. For example, in one aspect, the solution comprises from about 0.05 lb to about 20 lb of the soy based component per ton of solids in the water or the slurry and in other aspects, the solution comprises from about 8 lb to about 12 lb of the soy based component per ton of solids in the slurry or water. With respect to the surfactant, in one aspect, the solution comprises from about 0.1 lb to about 5 lb of the surfactant per ton of solids in the water or slurry and in an additional illustrative aspect, the solution comprises from about 1 lb to about 4 lb of the surfactant per ton of solids in the slurry or water. In one particular aspect, the soy based component comprises soy flour or soy protein and the surfactant is a triblock copolymer comprising polyethylene oxide and polypropylene oxide.

[0029] In particular aspects of the present disclosure, the dewatering agent solution comprises a mixture of soy flour and/or soy protein with one or more surfactants. For example, in one aspect, a dewatering agent solution comprises soy flour and a surfactant. A representative, illustrative

method of creating this solution comprises adding about 10g soy flour into about 87.5g water, followed by the addition of about 15mM $\text{Na}_2\text{S}_2\text{O}_5$. Next, about 2.5g of the surfactant, such as a triblock copolymer of PEO-PPO-PEO, can be added to the water and the pH of the resulting solution can be adjusted to between about 8 and about 9 by adding a base, such as, but not limited to, 0.1 N NaOH. The solution can be stirred for about 1 hour before addition to the water or a wastewater slurry.

[0030] In any aspect, the presently disclosed methods can simply comprise adding a dewatering agent solution comprising a soy based component, such as soy flour and/or soy protein, to a body of water or a wastewater slurry. However, as noted above, additional dewatering agent solutions can be used. As illustrative examples, any method disclosed herein can include a first, soy based dewatering agent solution, such as a dewatering agent solution comprising soy flour and/or soy protein, a second dewatering agent solution comprising one or more flocculants, and a third dewatering agent solution comprising one or more surfactants. Also, as noted above, a single dewatering agent solution can comprise both a soy based component and a surfactant. The order of addition of each dewatering agent solution into the water or slurry is not critical and thus, the dewatering agent solutions can be added in any order to the water or wastewater slurry.

[0031] Other additives can be used in combination with the presently disclosed dewatering agent solutions. However, it is noted that no additional additives are required for the proper functioning of the presently disclosed dewatering agents. The other additives can include, for example, oxidants, coagulants, and/or enzymes as disclosed in U.S. Patent No. 6,733,674, titled "Method of Dewatering Sludge Using Enzymes," which is incorporated into the present application by reference in its entirety.

[0032] Methods for improving the separation of solids from water are disclosed herein. In one aspect, the method for improving the separation of solids from water comprises the step of adding a dewatering agent solution comprising an effective amount of a soy based component to the water. The

soy based component can be soy protein and/or soy flour. The water may contain, or may have added thereto, a flocculant and/or a surfactant. The water can be any body of water containing solids. In certain aspects, the body of water is selected from the group consisting of produced water, raw water, and wastewater. In a particular aspect, the body of water is wastewater.

[0033] In an additional aspect, a method for dewatering a wastewater slurry containing solids is disclosed. The method comprises the steps of adding a dewatering agent solution comprising an effective amount of a soy based component to the slurry, thereby forming a mixture of water and flocculated solids, and separating the flocculated solids from the water. The soy based component can be soy protein and/or soy flour. The wastewater slurry may contain, or may have added thereto, a flocculant and/or a surfactant.

[0034] The foregoing may be better understood by reference to the following examples, which are presented for purposes of illustration and are not intended to limit the scope of the disclosure.

EXAMPLES

[0035] Example 1: A wastewater sludge/slurry containing 1.6% solids was obtained from the wastewater plant in a paper mill. The slurry was kept in a water bath at a temperature of about 60 °C. A 250 ml sample of the slurry was added into a jar under 500 rpm mixing. A dewatering agent solution comprising soy flour or soy flour + surfactant (triblock copolymer of PEO-PPO-PEO) was also added into the jar and mixed for about 30 seconds. Next, a flocculant copolymer (about 90% acrylamide and about 10% dimethylaminoethylacrylate methyl chloride) at about 1% concentration was added into the jar and mixed for about 15 seconds. The treated slurry was subsequently transferred to a pressing chamber for a press dewatering test. The doses of soy flour tested were about 4lb/ton, about 8lb/ton, and about 12lb/ton, based on dry solids in the slurry. The dose of the components in the dewatering agent solution comprising both soy flour and a surfactant was about 8lb/ton soy flour and about 2lb/ton surfactant, based

on dry solids in the slurry. The dosages tested of the copolymer flocculant were 0, about 6.25lb/ton, about 12.5lb/ton, about 18.75lb/ton, and about 25lb/ton, based on dry solids in the slurry.

[0036] Next, the above-treated slurries were transferred to the press chamber to undergo a first static press test. After the free water was drained, a felt was placed on the top of the sludge and 1 psi pressure was applied for about 1 minute, followed by about 7 psi pressure for about 2 minutes. The sludge cake was then removed from the press chamber and its weight was recorded. The sludge cake was also saved for a second static press test.

[0037] In the second static press test, the sludge cake saved from the first static press test was placed between 2 metal wires and pressed in a static press with a pressure of 0.7 mbar for about 2 minutes. The weight of the resulting cake was then recorded and then the cake was placed into an oven at 105 °C overnight. The dry weight of the cake was then measured. Dryness of the cake was calculated using the following formula:

$$\text{Dryness (\%)} = \text{Dry Weight (g)} / \text{Wet Weight (g)} \times 100.$$

[0038] As can be seen in Figure 1, dryness of the cake from the first static press test increased significantly when the flocculant dose was increased. Addition of soy flour with flocculant increased the dryness of the cake significantly as well. The dewatering agent solution comprising soy flour and surfactant improved the dewatering efficiency further when compared to soy flour itself, although soy flour by itself still resulted in a beneficial dewatering effect.

[0039] As can be seen in Figure 2, dryness of the cake after the second static press test increased much less when flocculant dosage was increased. Particularly, when the flocculant dosage increased from 18.75lb/ton to 25lb/ton, there was no further increase of cake dryness. Addition of soy flour or soy flour plus surfactant solution significantly increased the dryness of the cake. This improvement was more significant at a high flocculant dosage. For example, at a 25lb/ton flocculant dose,

addition of 8lb/ton soy flour increased the dryness of the cake from 31% to 35%.

[0040] All of the compositions and methods disclosed and claimed herein can be made and executed without undue experimentation in light of the present disclosure. While this invention may be embodied in many different forms, there are described in detail herein specific preferred embodiments of the invention. The present disclosure is an exemplification of the principles of the invention and is not intended to limit the invention to the particular embodiments illustrated. In addition, unless expressly stated to the contrary, use of the term “a” is intended to include “at least one” or “one or more.” For example, “a dewatering agent” is intended to include “at least one dewatering agent” or “one or more dewatering agents.”

[0041] Any ranges given either in absolute terms or in approximate terms are intended to encompass both, and any definitions used herein are intended to be clarifying and not limiting. Notwithstanding that the numerical ranges and parameters setting forth the broad scope of the invention are approximations, the numerical values set forth in the specific examples are reported as precisely as possible. Any numerical value, however, inherently contains certain errors necessarily resulting from the standard deviation found in their respective testing measurements. Moreover, all ranges disclosed herein are to be understood to encompass any and all subranges (including all fractional and whole values) subsumed therein.

[0042] Furthermore, the invention encompasses any and all possible combinations of some or all of the various embodiments described herein. It should also be understood that various changes and modifications to the presently preferred embodiments described herein will be apparent to those skilled in the art. Such changes and modifications can be made without departing from the spirit and scope of the invention and without diminishing its intended advantages. It is therefore intended that such changes and modifications be covered by the appended claims.

CLAIMS

What is claimed is:

1. A method for improving the separation of solids from water comprising:

5 adding a dewatering agent solution comprising an effective amount of a soy based component to the water.

2. The method of claim 1, wherein the soy based component comprises soy flour.

10 3. The method of claim 1, wherein the soy based component comprises soy protein.

4. The method of claim 1, wherein the effective amount of the soy based component is from about 0.05 lb/ton to about 20 lb/ton.

15 5. The method of claim 1, further comprising a step of adding a dewatering agent solution comprising an effective amount of a cationic polymer to the water.

20 6. The method of claim 5, wherein the cationic polymer comprises from about 85% to about 99% acrylamide and from about 1% to about 15% dimethylaminoethylacrylate methyl chloride.

25 7. The method of claim 5, wherein the effective amount of the cationic polymer is from about 0.1 lb/ton to about 30 lb/ton.

30 8. The method of claim 1, further comprising a step of adding a dewatering agent solution comprising an effective amount of a surfactant to the water.

9. The method of claim 8, wherein the surfactant is a triblock copolymer comprising polyethylene oxide and polypropylene oxide.

10. The method of claim 8, wherein the effective amount of the surfactant is from about 0.1 lb/ton to about 5 lb/ton.

11. A method for dewatering a wastewater slurry containing solids comprising:

adding a dewatering agent solution comprising an effective amount of a soy based component to the slurry, thereby forming a mixture of water and flocculated solids, and

separating the flocculated solids from the water.

12. The method of claim 11, wherein the soy based component comprises soy flour or soy protein.

13. The method of claim 11, wherein the effective amount of the soy based component is from about 0.05 lb/ton to about 20 lb/ton.

14. The method of claim 11, further comprising a step of adding a dewatering agent solution comprising an effective amount of a cationic polymer to the wastewater slurry.

15. The method of claim 14, wherein the cationic polymer comprises from about 85% to about 99% acrylamide and from about 1% to about 15% dimethylaminoethylacrylate methyl chloride.

16. The method of claim 14, wherein the effective amount of the cationic polymer is from about 0.1 lb/ton to about 30 lb/ton.

17. The method of claim 11, further comprising a step of adding a dewatering agent solution comprising an effective amount of a surfactant to

the wastewater slurry, optionally wherein the effective amount of the surfactant is from about 0.1 lb/ton to about 5 lb/ton.

18. The method of claim 17, wherein the surfactant is a triblock copolymer comprising polyethylene oxide and polypropylene oxide.

19. A dewatering agent solution for improving the separation of solids from water, the solution comprising:

a soy based component; and

a surfactant.

20. The dewatering agent solution of claim 19, wherein the soy based component is present from about 8 lb to about 12 lb per ton of solids in the water and comprises soy flour and/or soy protein, and further wherein the surfactant is present from about 1 lb to about 4 lb per ton of solids in the water and comprises a triblock copolymer comprising polyethylene oxide and polypropylene oxide.

1/2

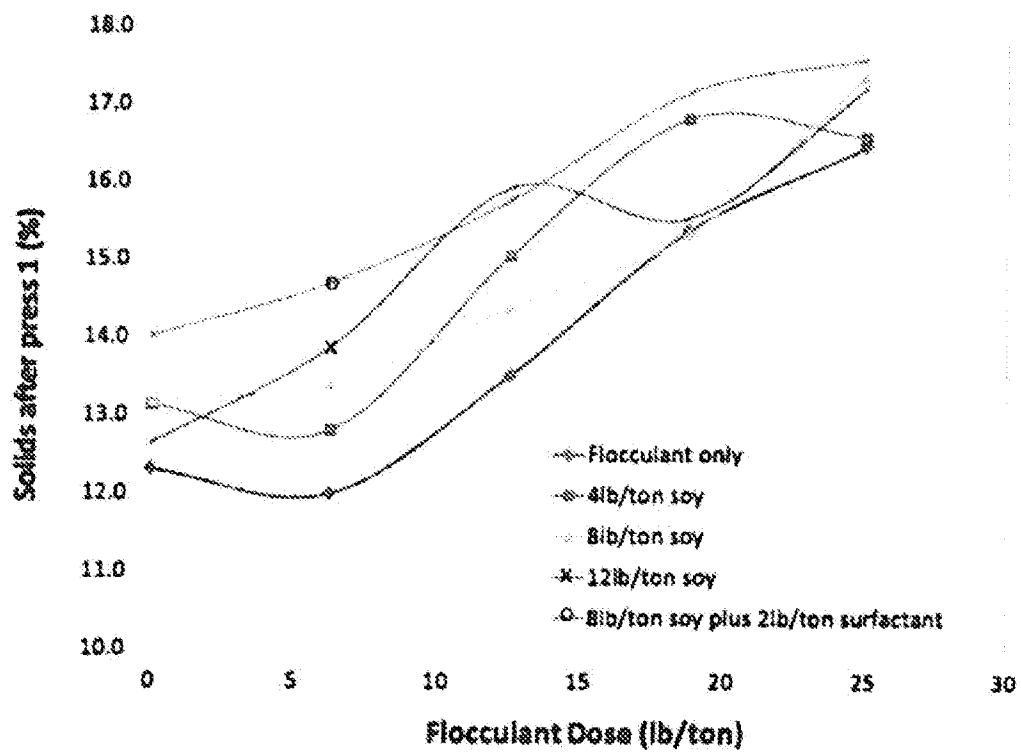


Figure 1

2/2

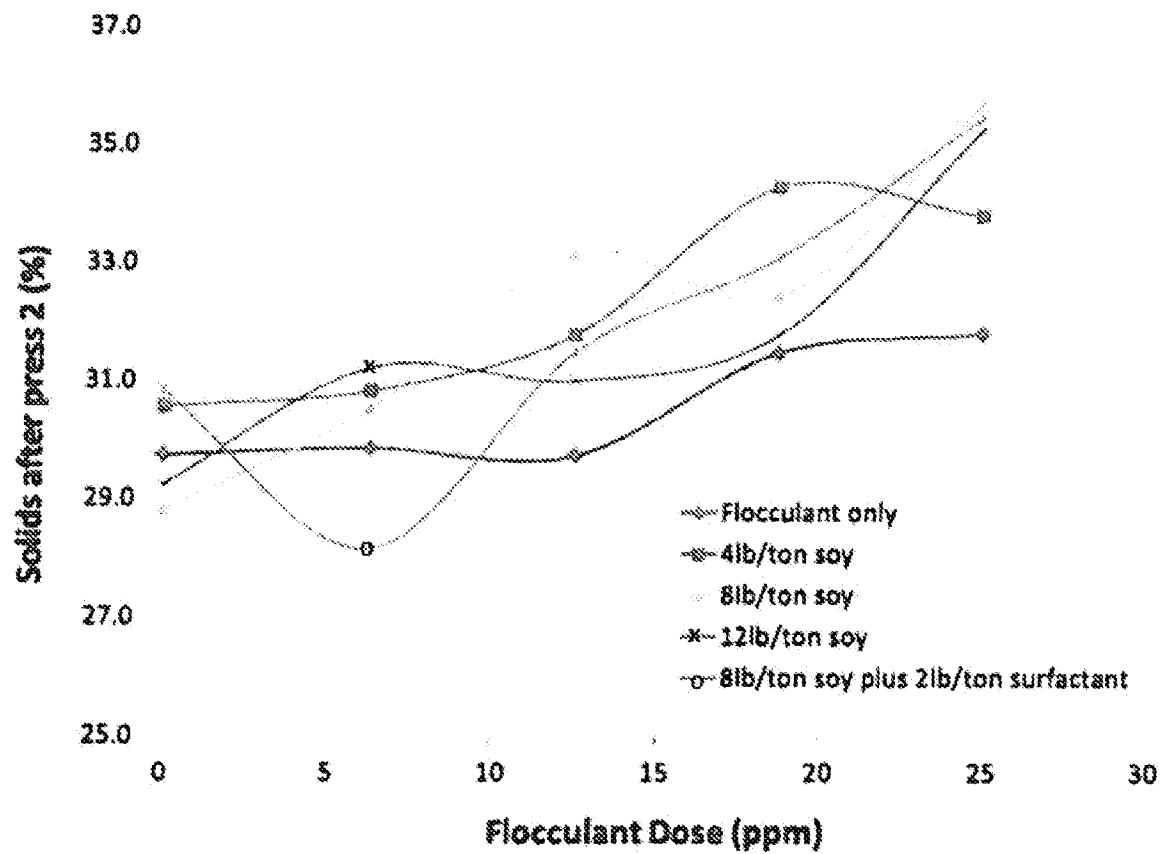


Figure 2

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/047332**A. CLASSIFICATION OF SUBJECT MATTER****C02F 11/14(2006.01)i, C02F 11/12(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C02F 11/14; A23L 1/31; A23J 1/14; C02F 1/54; C02F 1/56; C02F 11/12

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: dewatering agent, soy protein, cationic polymer, surfactant, flocculated solid

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6413433 B1 (MAURY, E. et al.) 2 July 2002 See abstract; and claim 1.	1-20
A	US 3885052 A (STARR, R. P.) 20 May 1975 See abstract.	1-20
A	WO 2013-057267 A1 (ASHLAND LICENSING AND INTELLECTUAL PROPERTY LLC et al.) 25 April 2013 See abstract; and claims 1-5.	1-20
A	US 4713178 A (FONG, D. W. et al.) 15 December 1987 See abstract.	1-20
A	US 3414514 A (BUHL, F. C. et al.) 3 December 1968 See claims 1-9.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 November 2014 (26.11.2014)

Date of mailing of the international search report

26 November 2014 (26.11.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE, Dong Wook

Telephone No. +82-42-481-8163



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/047332

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6413433 B1	02/07/2002	AR 028757 A1 AU 2001-73640 A1 WO 02-18281 A1	21/05/2003 13/03/2002 07/03/2002
US 3885052 A	20/05/1975	None	
WO 2013-057267 A1	25/04/2013	AU 2012-324833 A1 CA 2852606 A1 CN 103889904 A EP 2768779 A1 KR 10-2014-0076585 A MX 2014003684 A US 2014-246377 A1	27/03/2014 25/04/2013 25/06/2014 27/08/2014 20/06/2014 14/05/2014 04/09/2014
US 4713178 A	15/12/1987	US 4713178 A	15/12/1987
US 3414514 A	03/12/1968	None	