




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G11B 20/10, 11/10, 7/00, 7/09, 21/00	A1	(11) International Publication Number: WO 99/39346 (43) International Publication Date: 5 August 1999 (05.08.99)
(21) International Application Number: PCT/US99/02150 (22) International Filing Date: 1 February 1999 (01.02.99) (30) Priority Data: 60/073,284 31 January 1998 (31.01.98) US 09/132,962 12 August 1998 (12.08.98) US 60/108,367 13 November 1998 (13.11.98) US 09/240,954 29 January 1999 (29.01.99) US (71) Applicant: SEAGATE TECHNOLOGY, INC. [US/US]; 920 Disc Drive, Scotts Valley, CA 95066 (US). (72) Inventor: BELSER, Karl, A.; 5544 Drysdale Drive, San Jose, CA 95124 (US). (74) Agent: WARDAS, Mark, A.; Quinta Corporation, 1870 Lundy Avenue, San Jose, CA 95131 (US).		(81) Designated States: CN, JP, KR, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: DETECTION OF PULSE PEAK INSTANCE AND AMPLITUDE IN A STORAGE DRIVE

(57) Abstract

A method of pre-processing sampled data prior to estimating the peak amplitude of a pulse includes averaging of two adjacent sample values. Pre-processing makes the peak amplitude estimation less sensitive to the sampling phase relative to the peak position and consequently allows for the use of a lower sampling period relative to the full-width-half-maximum pulse width for a given peak estimation accuracy. The method incorporates a step in which a base line offset signal is subtracted from an estimated peak value, and multiplying the consequent pulse peak amplitude estimate by a predetermined constant in order to compensate for a systematic change in a final peak amplitude estimate. The multiplying constant may have a value derived from estimated peak values of other detected pulses in order to compensate for a systematic change in the peak amplitude estimate. Offsets in a position error signal derived from such pulses are eliminated by subtracting the estimated peak amplitudes of a pair of proximate (spatially and temporally related) pulses. The difference of another pair of proximate pulses is used to estimate the maximum peak amplitude of each pulse. A position error signal difference is divided by a maximum peak amplitude difference to generate a normalized position error signal that compensates for systematic changes of pulse signal amplitude estimate caused by adjacent sample averaging.

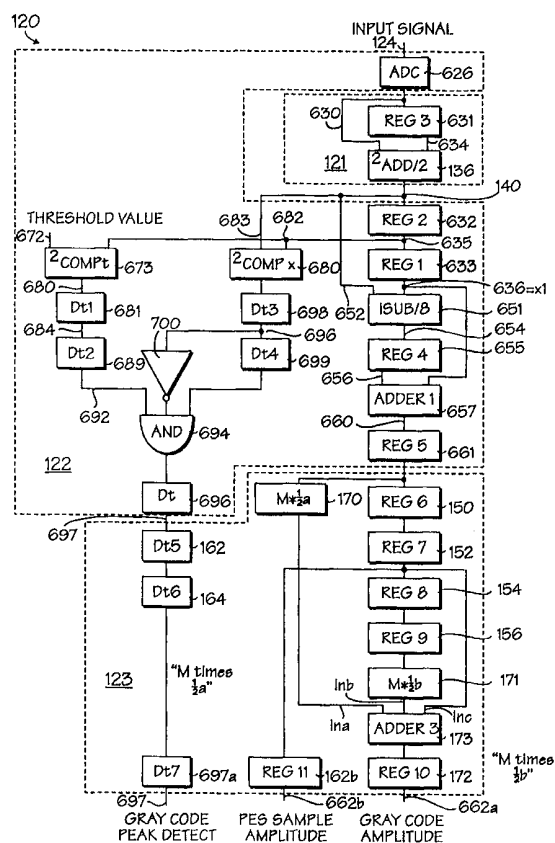

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

DETECTION OF PULSE PEAK INSTANCE AND AMPLITUDE
IN A STORAGE DRIVE

FIELD OF THE INVENTION

5 The invention relates to an improvement in a method and system for estimating pulse peak amplitudes and pulse peak instances (the times or instants at which the amplitude of pulse peak occurs) of serial analog pulse sequences in which the pulses have varying amplitude, pulse widths and base levels in the presence of noise. Specifically, this is a simple but elegant digital processing approach applied to determining pulse peak amplitudes and peak
10 instances of data pulses recovered from stored data retrieved from magneto-optical (MO) drives.

BACKGROUND

With respect to parent case 09/132,962 referenced above and incorporated herein by reference, there is disclosed a typical disk with servo and data sectors. The servo sector is
15 described to have a particular architecture, i.e., a physical arrangement or pattern, of data pits, grouped into patterns. The patterns define radial servo-timing-marks (STM) marks, formed of contiguous pits of constant size between circular inner diameter ID and outer diameter OD boundaries; the patterns form data track and servo sector address marks and Position-Error-Sensing (PES) marks.

20 In the system of 09/132,962, data may be modulated by pit position modulation. Therefore, the data pit and laser spot size must be about the same size to keep pulse amplitude about the same. Returned signal pulses have a narrow full width half height maximum FWHM pulse width at the OD and a wide pulse width at the ID. The circumferential spacing between radii in the servo sector is wider at the OD than at the ID. The pits toward the OD are spaced
25 farther apart laterally than the pits toward the ID, even though they have the same width.

With regard to Figure 6a and 6b in the present application, typical signal pulses that may be recovered from a disk in drive system are depicted. In a typical servo sector, the first digital data to be recovered are the STM pulses. Pulses in such systems exhibit variation in pulse width, peak amplitude, base line displacement from reference zero level, and noise on the
30 waveform. With regard to Figure 4a in the present application, some characteristics of disk drive data pulses not treated by the disclosure 09/132,962 are shown. A signal pulse 452 recovered from an inside data (ID) track has a wider pulse width ID PW 460 than a pulse

width OD PW 462 from a signal pulse recovered from an outside (OD) track OD pulse 454. Even though the peak amplitudes $Apj(ID)$ 464 and $Apj(OD)$ 466 of the ID and OD pulses may be the same, OD PW 462 is narrower than ID PW 460 due to the higher relative speed of the data bit and the read head toward the perimeter of the disk. Variation is also typical in the level of background reflectance which corresponds to the base signal level Base Line1 470. This is indicated by a lower base signal level Base Line2 472. The base line signal level Base Line1 470 appears as an offset β in the signal level, from a zero level reference line 474. The maximum pulse deflections from the Base Line 470 represent the peak amplitude of the pulses, i.e., $Apj(ID)$ 464 for the ID pulse and $Apj(OD)$ 466 for the OD pulse. With component aging and disk contamination build up over time, $Apj(ID)$ 464 and $Apj(OD)$ 466 also decrease. This is indicated by the dashed lines of Figure 4a in the present application. Digital processing of the signals ID pulse 452 and OD pulse 454 require sampling of the signals with an analog to digital converter at clock tick, k , and with a sufficiently small sample period 480, with a analog-to-digital conversion device having a sampling range 484 sufficiently large to cover the Base Line 470 expected. Random system noise 486 on the pulse signals ID pulse 452 and OD pulse 454 adds quantizing noise to any digital signal processing performed by the system 100.

With regard to 09/132,962, a pulse data recovery system is used in a magneto-optic disk drive. A laser spot is directed to a disk surface from a read/write head. Light reflected from the disk surface is received by the head and processed by a signal channel. The magnitude of the reflected signal from the disk surface is a constant (a base line level from a zero level reference) where the surface is flat. Pits formed in the disk surface during a mastering process cause the reflected signal near a pit to decrease as the laser spot passes over the pit edge because of destructive interference.

The resulting magnitude variation from a constant base value to a minimum peak and back to the base value is detected as a pulse signal. Achieving maximum peak pulse amplitude depends on having pit width and spot width of similar size. The pit width can be optimized for maximum signal robustness to width variations by diffraction modeling. One typical case has a pit size of about 350 nm and a 550 nm lambda wavelength laser FWHM spot size of 660 nm. The detected pulse width from the reflection of an illuminating laser beam returned from a pit on the disk surface is related to the size of the laser spot and the size of the pit. Since pits near the OD are traveling at a higher linear speed (constant angular velocity at a greater radius) than those at the ID, the data pulse widths at the OD are correspondingly

narrower. As the disc size and rotation speed are increased to achieve greater data capacity and data transfer rates, the difference between the detected pulse widths near the ID and near the OD becomes greater. In a typical application this could lead to a ratio of pulse widths of 2:1 or greater.

- 5 In 09/132,962, a digital signal processing channel (PDC) for recovering peak pulse amplitude and peak pulse instance is disclosed. The PDC is an invention of a digital circuit implementation of a pulse detection method and system using quadratic interpolation, peak amplitude estimation. The manner of how the previous PDC works in combination with a Pulse Peak Synchronizer (PPS), a Servo Timing Mark Detector (STMD), a servo sector
10 architecture, and cooperating system electronics (DDCS) is briefly summarized here.

The PDC invention of 09/132,962 provides an estimate, $E_p(j)$, for the peak amplitude $A_p(j)$ and an estimate, T_{offset} , for the offset of the peak instance t_{pj} of a detected pulse from a sampling instance, e.g., a sampling clock $SYSCLK$. The estimates $E_p(j)$ and T_{offset} , relative to the center sample of a multi-sample frame, are derived from an equation for a curve fitting
15 parabola when the curve fitting parabola is fit to three adjacent samples of a respective data pulse. When the amplitude of a center sample is greater than or equal to the amplitude of one of the adjacent samples and is greater than the amplitude of the other adjacent sample comparator, logic sub-circuits in the PDC give indication to the system that the peak instance has occurred next to the center sample.

- 20 P_j is sampled asynchronously with $SYSCLK$ having a sampling period T_{clk} more than about $1/5$ and less than about $1/3$ a nominal minimum pulse period T_{psmin} . T_{clk} is provided in the system 100 at such a rate that the each pulse is consecutively sampled above a threshold value.

In a particular embodiment of the invention disclosed in 09/132,962, the pulse waveforms
25 amplitudes are sampled at about 50 MHZ. The pulse amplitudes are sampled with a high-speed A to D Converter (ADC). The sampled amplitude values and identifying sample clock ticks are processed by subsystems of the invention to determine the accurate time estimates of the instance of a data pulse peak relative to the timing of a system logic bit frame. Further processing of sampled data pulse amplitudes and identifying sample clock ticks by
30 embodiments of this invention provide accurate estimates of the instances of the pulse peaks and estimates of the pulse peak amplitudes. These estimates are provided for use by the

detection and control electronics (DDCS) of the disk drive system to enable system performance enhancements, e.g. PES processing and the like.

In 09/132,962, following the detection of a first pulse of an STM in a servo sector, succeeding pulses are evaluated until the detector determines a servo timing mark STM is present. Typically, the first pulse of the STM is pre-qualified (by detecting a succession of logic bit frames containing zeros). Once an STM is detected, information known by the DDCS is available to determine where logic bit data in the servo sector is to be expected relative to the system logic bit frame. The system can then process following values of pulse peak instance and amplitude, e.g. process PES data pulses to follow the data track's eccentric movement.

Each time a pulse peak instance and amplitude estimate is provided by the pulse detection channel of the 09/132,962 disclosure, it is stored by the system. When other predetermined conditions are met, the system processes the stored pulse data estimates to take corrective action.

In 09/132,962, the method and system works well as long as the sampling rate $SYSCLOCK$ is high enough relative to the pulse width, PW , and the $DPS1$ analog pulse waveform being sampled and the PW is wide enough. If the values of at least the three center samples of a five sample group (e.g., $X1, X2, X3, X4, X5$) remain close to a quadratic approximation, the quadratic interpolation gives satisfactory estimates of the peak amplitude and peak instance. However, if the signal pulse width gets too small for the given sampling rate available, the error between the actual values of the outer two of the center three samples (e.g., $X2$ and $X4$) and the values predicted from the quadratic estimation polynomial gets too large and gives inaccurate values for the estimated peak amplitude and pulse peak instance. Inaccurate peak amplitude and instance estimates can cause post-processing electronics in the signal channel to place data bits in the wrong logic bit frame.

This is illustrated with regard to Figure 4b in the present application, which shows a plot of two simulated bit signal waveforms: an ID bit signal 402 and an OD bit signal 404. The signals 402 and 404 are shown located within a system-logic-bit-frame indicated by arrows 410. The bit signals 402 and 404 are shown with wide (ID) and narrow (OD) pulse widths 406 and 408 respectively. The bit signals 402 and 402 are shown as positive going pulses, but may be considered equivalent to negative going pulses as well. The bit frame 410 is divided by five equally spaced sampling times 412 (-2, -1, 0, +1, +2) disposed symmetrically

about center sample 414, i.e., from 0 phase at the center 414 of bit frame 410 to two samples 412 before (+1, +2) and after (-1, -2) center sample 414.

Signals 402 and 404 are shown with respective peak amplitudes 416 (ID) and 418 (OD) measured from base line 126 (i.e., peak-to-valley deflection) centered on the logic bit frame 410. peak amplitudes 416 (ID) and 418 (OD) correspond to the peak amplitude A_{pj} of 09/132,962. The peak amplitudes 416 and 418 in Figure 4b occur in phase with the center sample 414. Signals 402 and 404 are shown having similar peak amplitudes 416 and 418, but differing pulse widths 406 and 408, before processing by the peak detector 120 of the present invention. The peak amplitudes 416 and 416 are shown normalized to a value of 1 measured from a normalized base level of zero.

With respect to Figure 4c in the present application, there is shown is a plot of sample amplitudes, ID1 422, ID2 424, OD1 426, and OD2 428 of signals 402 and 404 after processing by sampling and quantizing according to the peak detector channel, PDC, of 09/132,962. Processed signals ID1 422, ID2 424, OD1 426, and OD2 428 are the results of digitizing and processing as single samples, the bit signals 402 and 404 of Figure 4b at the sample times 412 according to the method of 09/132,962. The results are shown under two cases of different relative phase of the peak amplitudes 416 and 418 with respect to the center sample 414. In the first case, ID1 422 and OD1 426 show peak amplitude estimates $A_{p(ID)1}$ 417 and $A_{p(OD)1}$ 419 when the peak amplitudes 416 and 418 are coincident with the center sample 414. In the second case, peak amplitude estimates $A_{p(ID)2}$ 421 and $A_{p(OD)2}$ 423 are shown when the peak amplitudes 416 and 418 are not coincident with the center sample 414 but instead are out of phase with the center sample 414 by 1/4 of time between adjacent samples 412. Peak amplitude estimates of Figure 4c correspond to the estimated peak amplitude $E_{p'j}$ of 09/132,962.

In the first case (bit signal peak in phase with center sample), the peak estimates of ID and OD bit signals $A_{p(ID)1}$ 417 and $A_{p(OD)1}$ 419 give acceptable results. They have the same value, about 0.98, of the normalized peak amplitude of the bit signals 402 and 404.

However, in the second case (bit signal peak out of phase with center sample by 1/4 sampling time) the peak amplitude estimates $A_{p(ID)2}$ 421 and $A_{p(OD)2}$ 423 of the ID signal 402 and the OD bit signal 404 are different from the in phase estimate, and also greatly different from each other. The out-of-phase peak estimates $A_{p(ID)2}$ 421 and $A_{p(OD)2}$ 423 have relative values of 0.87 and 0.60.

The accuracy of the out-of-phase peak estimate $A_p(ID)$ 2 421 for the ID signal 402 is acceptable. The accuracy of out-of-phase peak estimate $A_p(OD)$ 2 423 is not.

One solution is to use a device for sampling that has a higher sampling rate to achieve the desired accuracy with the narrower OD pulses. Unfortunately, higher speed sampling devices
5 usually come at an exorbitant premium in cost and perhaps are not even available at the sampling rates needed. The challenge is to try to process the signals in a way to improve the peak estimation accuracy with sampling devices of a given sampling rate.

The problem of sampling the pulses then becomes limited by the sampling rate available. As the OD pulse gets narrower, the sampling period (from the Nyquist sampling theorem) must
10 also decrease. For a 5 sample per pulse, this places a limit on the minimum pulse width for a given sampling rate. Consequently, the performance of the sampling device (e.g., an A/D converter) limits the system performance. Therefore, in a real system, the accuracy of the estimation may be 1% at the ID but only 30 % at the OD. This is a sampling theorem problem, in that it may not be possible, or economically feasible to obtain a fast enough
15 sampling rate.

This problem will always be a concern in disk drive performance. As converters get faster, disk speed will be increased correspondingly and the same limitation of OD vs ID pulse width difference will exist.

The statement of the problem then becomes fairly simple: we want to be able to reproduce
20 both the ID and the OD pulse signal with the required accuracy at the minimum sampling rate possible. In a case which requires 5 samples for estimating pulse amplitude and instance we may be limited to how wide the ID pulses can be made at the inner diameter. This occurs because their circumferential spacing from each other is limited by inter-symbol interference, i.e., energy from the tail of a pulse contributing to and distorting the waveform of the
25 adjacent pulse.

A particular ratio of pulse width between ID and OD will establish the required sampling rate.

Attempts have been made to try to put the pulses through a linear analog filter, also known as an Infinite Impulse Response (IIR) filter, to broaden the narrow pulses. This causes too much
30 interference from pulse to pulse, because energy from the previous pulse spills over into the following pulse, e.g., slowly decaying tails from the previous filtered pulse output. This is

particularly problematic, when the tails of preceding data pulses of high amplitude are filtered and broadened, and interfere with following servo burst pulses.

Another concern with using analog circuit solutions is that they take up too much board area and require too many expensive components as disk drive form factors shrink. A solution
5 minimizing parts count and board area is sought. We would like to filter the pulse in a way that stretches the pulse width without adding an infinite impulse response.

In contrast to pulses from the PES marks which may have small or no amplitude depending on the alignment of the read head with the data pits the STM signals have fairly large peak amplitudes as are all data peaks when the head is aligned. A clip level or detection threshold
10 is typically defined by the system for detecting the presence or absence of a pulse, after the amplitude of the pulse peak is determined. The system compares the amplitude of the pulse to the threshold during the system logic bit frame. A logic one is output to the receiving system electronics if the peak amplitude exceeds the threshold, otherwise a logic zero is output for that logic bit frame. The threshold is preferably placed halfway between the top
15 (base line level for a negative going pulse) and bottom (expected peak amplitude) of the pulses. The threshold is preferably adjusted or reset depending on the variation of the peak amplitude of the pulses. The system needs accommodation to the fact that there is varying amplitude of the pulse signal peaks.

In 09/132,962, an analog VGA circuit was used to normalize the pulse amplitudes by means
20 of feedback circuitry from the peak detector PDC to the VGA. Analog VGA circuits tend to take up relatively large area and can be relatively expensive. In the case of analog signal processing, analysis shows that area detection of a differentiated OD signal (e.g., differentiation of the pulse followed by sampling and then an integration step to recover pulse shape without offset) requires at least 20 samples per servo bit period. It also shows that
25 quadratic interpolation from three single adjacent samples will acceptably digitize the amplitude of undifferentiated, narrow OD signal with 10 samples per servo period. A requirement of 10 samples per bit period places undesirable constraints on the sampling rate required with narrow pulses.

Therefore, it would be an advantage to provide a disc drive system which provides a pulse
30 data channel that:

...achieves a desired pulse instance and peak amplitude estimate accuracy at a given sample frequency rate,

...can reduce cost, circuit board area and/or improve accuracy,

...is relatively insensitive to pulse width variation from ID to OD,

5 ...replaces costly and area intensive analog circuitry with relatively low cost, digital integrated circuits,

...reduces area demands for future miniaturization of disk drive electronics,

...compensates for varying pulse base line levels (pulse offset) with component aging and disc reflectivity,

10 ...compensates for varying pulse peak amplitudes with component aging and disc reflectivity.

SUMMARY

A disk drive system in accordance with the present invention includes an output providing an analog signal including a sequence of analog signal data pulses recovered from stored data on a storage disk. The data pulses have pulse widths greater than about width PW, peak magnitudes about $A_p(j)$ deviating from a respective base line and respective peak instances. The base lines, are displaced by base line offset value β from a zero reference level.

The disk drive system includes a digital peak detection channel of the present invention in which an analog input of an analog to digital sampling device receives continuous analog values of the sequence of signal data pulses. The sampling device is responsive to a sampling clock by sampling values $y(k)$ of the analog signals at each one of successive sample clock times ---, $(k-2)$, $(k-1)$, k , $(k+1)$, $(k+2)$, ---. the device converts each analog value $y(k)$ to a corresponding digital value ---, $Y(k-2)$ $Y(k-1)$, $Y(k)$, $Y(k+1)$, $Y(k+2)$,----. The sample clock has a sampling period of about $1/5$ the pulse width expected.

The sampling device outputs sampled digital values ---, $Y(k-2)$ $Y(k-1)$, $Y(k)$, $Y(k+1)$, $Y(k-2)$,----, to a digital sample value averaging device. The sample value averaging device provides an output of successive digital sample average values $X(k-1)$, $X(k)$, $X(k+1)$, --- in which each digital sample average value $X(k)$ is formed from a sequence of 2 adjacent samples, k , $k-1$, and is equal to $[Y(k)+Y(k-1)]/2$.

A peak pulse instance recognition device receives the output of 3 successive sample average values $X(k)$, $X(k-1)$, $X(k-2)$ and provides a digital peak detect output (Pkdet) with a logic signal level at a true logic value when the logic value $((X(k-1) > X(k) \text{ AND } (X(k-1) > X(k-2))))$ is true. This provides to the disk drive control system an indication that a signal pulse peak, $A_p(j)(k_{pk})$ occurred within plus or minus the one sampling period of the sampling time $t(kpk)$. From this instance, $t(kpk)$, other circuitry may derive status changes and computations to direct the system response, (e.g., head position, threshold level setting, and the like) as is known in the art.

The data channel in the disk drive system of the present invention uses three successive average values $X(k-2)$, $X(k-1)$, $X(k)$ are output to corresponding registers REG1, REG2, REG3 that provide corresponding outputs $X1$, $X2$, $X3$ sent to a dual paired input comparator connected to said registers. The comparator provides a peak detect output true logic level when the logic value $((X2 > X1) \text{ AND } (X2 > X3))$ is true. The peak detect output indicates

to the disk drive system that a peak amplitude of a signal pulse has occurred between the sample instance k minus one sampling period and the sample instance k plus one period.

A data pulse peak magnitude estimator computes an estimate $E_p(j)$, of the pulse peak amplitude $A_p(j)$ of a pulse, j , when the peak is detected by a true logic value on the peak
5 detect output.

The peak magnitude detector first calculates a first estimate of the peak pulse value by computing and outputting the result of an estimation algorithm, $X_2 + |X_1 - X_3|/8$. The value X_2 is the center value of three adjacent averaged sample values X_1 , X_2 , X_3 from the digital sample value averaging device. The result of the algorithm is output as the peak estimate
10 $E_p(j)$ through a connection to the disk drive system.

Base line offset for non-PES signal data pulses is removed by a base line offset removal filter which subtracts the offset β , from the first peak estimate value. A preferred embodiment of a digital FIR base line offset removal filter is shown that has an FIR filter function $E_p'j(k) - 1/2[E_p'j(k-2) + E_p'j(k+2)]$. $1/2$ of the common offset values β in each of the estimates $E_p'j(k-2)$ and $E_p'j(k+2)$ are subtracted from the value of $E_p'j(k)$ to cancel the offset β in the center
15 estimate $E_p'j(k)$.

A general logic gate assembly, e.g., an FPGA or DSP receives the output of the peak magnitude estimator and peak instance detector. The functions of the logic gate assembly include compensation functions. These compensation functions compensate for amplitude
20 variation of peak pulse amplitude between ID and OD, and variation of base line offset of the PES pulses and the STM pulses from the servo sectors. Such compensation functions are known and may be implemented by a person having skill in the art of digital design, and are not part of the present invention.

The disk drive system of the present invention includes a plurality of circumferentially
25 spaced apart servo sectors having specific characteristics. The specific characteristics include: at least a multi-bit STM pattern in every servo sector; at least one each A, B, C and D PES pattern in every servo sector; at least one sector locator pattern in every servo sector; and at least one track locator pattern in every servo sector. One embodiment of a simple servo sector architecture is shown for the present invention. The particular type and
30 arrangement of bits in the patterns may be selected for a particular disk system architecture by one having skill in the art of digital system design.

The present invention discloses the computing means for computing $(A-B)/(C-D)$, for providing corrected estimated peak pulse signal values A, B, C, D, and for compensating for a varying alpha scale factor multiplying analog pulse signal values and a varying β offset factor as a generic logic assembly e.g., FPGA, configured by one having skill in the art. Such computing means may also be constructed from other computing devices such as a plurality of individual logic gates, a microprocessor running a stored programs, or a micro-coded processor as is known in the art.

The disk drive system of the present invention also includes a pulse signal threshold setting device for setting the threshold of recognizing the 1/0 threshold of the signal pulses. The pulse signal threshold setting device for the present invention is shown as a block diagram implementing the threshold adjustment function. The design of such a device is within the capability of an ordinary skilled practitioner of digital design and is not part of the present invention. The pulse signal threshold setting device has an input for receiving estimated peak STM pulse values from a sequence of sectors. The threshold setting device implements a threshold algorithm using STM estimated peak pulse values. The threshold algorithm provides a pulse signal threshold value for recognizing the presence of a logic bit in a servo logic bit position from the value of the threshold and the estimated peak value if a peak is detected at that bit position.

In the present invention, an embodiment is shown in which the threshold algorithm is $\frac{1}{2}$ of the average value of the estimated peak STM pulse values received from a sequence of servo sectors.

A particular embodiment includes the following elements:

- 1) A 10 bit 50 MHz ADC . Only 7 of the 10 bits are needed to do the peak amplitude calculation. A VGA is not needed to allow for peak pulse amplitude variation.
- The offset and amplitude variations are accommodated digitally by the wider ADC dynamic range and the compensation functions implemented in and processed by the FPGA front-end electronics other than the read/write head preceding the A-to-D consist of only a preamplifier.

Each digitized sample value is averaged with the previous sample value before supplying it to the peak detection and peak amplitude circuitry of the present invention. This effectively stretches the pulse width of the (narrow) OD servo bit signals. Peak Amplitude and Peak Detect outputs the present invention are processed separately to give the desired Gray code

and PES calculations. The Gray code is passed thorough a (-0.5, 0, 1, 0, -0.5) filter to remove any base level offset. Figure 5 is a simplified block diagram of an embodiment of the APDC of the present invention. Figure 3 shows a simple STM, PES and Gray code servo sector pattern for the purposes of illustration.

- 5 2) A finite impulse response (FIR) filter is used to stretch the pulse width of the sampled signals. It causes the width of a narrow pulse to stretch more than a wide pulse. A first and preferred method is to add successive samples: e.g., a sampler with one bit of delay followed by an adder connected to the sampler output and the delayed sample output. A FIR filter is preferred over an analog (linear) adder. In a linear system with exponential sine and cosine
- 10 eigenvalues, e.g., an Infinite Impulse Response (IIR) filter, the output response of the linear system to an input impulse contains non-zero values extending to infinity: (the Laplace transform of the system has components extending to infinity). In a finite impulse response filter (FIR) after some time, the amplitude of the output goes to zero. Therefore, the effect of adjacent pulses overlapping into following pulses can be minimized.
- 15 The present invention uses two registers and a two-input adder to emulate an FIR filter to take an average of successive pairs of samples i.e., $X(i) = (Y(i) + Y(i-1)) / 2$ and then uses the $X(i)$ -values in the peak instant and amplitude estimation method. That averaging transforms a narrow pulse to an estimated pulse with broader pulse width without changing the estimate of peak instance, although it does change the estimated peak amplitude.
- 20 3) The apparent problem of changing the amplitude is accommodated by a pulse amplitude normalization process that uses amplitude data from reference marks on the disc. In previous systems, OD and ID pulse widths were different, but the peak amplitude was the same. With the FIR filter averaging of this invention, the amplitude of the OD averaged pulse is lower than the averaged ID pulse [since the values average with a pulse that's already
- 25 wide are closer together than those for a pulse whose adjacent values are quite different, i.e., a narrow pulse relative to the sampling period. The invention doesn't change pulse width of the ID pulses much, but significantly expands the width of the narrower OD pulses.

The key is the extra bits of resolution available from the A-to-D converter used in converting the sampled analog pulse waveforms into digital sample values. To achieve a 1% accuracy

30 target, only 6 or 7 bits are needed to get the desired accuracy. Having more sampling bits available is an advantage because no information is lost due to the sampling; when the peak amplitude decreases.

The actual determination of the threshold value, the PES computation and the Gray code detection and decoding may be done in a companion DSP in cooperation with peak amplitude estimates and peak instance estimates provided by the digital peak detector of the present invention. Seven gate signals (STM, A, B, C, D, S and T) tell the DSP when the PES sample
5 AMPLITUDE or GRAY CODE AMPLITUDE values can be read. The DSP uses the STM Gray code amplitude to determine the threshold using some fraction of a low pass filtered amplitude from previous servo sectors. The DSP uses the PES amplitude estimates corresponding to the gates A, B, C, and D to calculate $(A-B)/(C-D)$. The DSP uses the Gray code amplitude estimates corresponding to S and T to decode the digital values. A logical
10 one is recognized to have occurred by the system if the S or T peak pulse amplitude is greater than a calculated threshold value.

The present invention includes reduced circuitry cost and size for pulse amplitude normalization, pulse width normalization, pulse offset elimination.

Furthermore, the present invention includes an undifferentiated OD signal pulse can be
15 satisfactorily digitized with only 5 samples per servo bit period if two adjacent samples of the signal pulse are averaged prior to computing the peak amplitude estimate. The averaged signal amplitude ratio will change between wide ID pulses to narrow OD pulses in the ratio of between about 3:2 to 2:1 because of this averaging.

Also, the present invention includes an improved accuracy of pulse peak amplitude
20 estimation and peak instance estimation is achieved by trading off an increased number of digitizing bits at a given sample rate for a pulse signal sampling A-to-D converter.

Also, in the present invention offset from a zero reference level in the amplitudes of recovered pulse signals is canceled by computing the ratio of a first difference of peak pulse amplitude between a first and second set of radially spaced peak marks and a second
25 difference of peak pulse amplitude pulse between a third and fourth set of radially spaced peak marks amplitude $(A-B)/(C-D)$. A, B, C, D are the peak amplitude estimates from the averaged peak pulse amplitude values received from staggered PES patterns A, B, C, D defined in a servo sector. Scale factor or peak pulse amplitude variation from ID to OD pulses is canceled in the PES signal by computing $(A-B)/(C-D)$. The same amplitude scale
30 factor alpha multiplies A, B, C, and D amplitudes and hence is canceled when $(A-B)/(C-D)$ are calculated. Computation of $(A-B)/(C-D)$ is done digitally in a preferred embodiment at low cost by using otherwise unused gates in an inexpensive FPGA or DSP integrated circuit.

Any offset (base line level) in the Gray code digital information (i.e. track or sector ID) of sampled pulses from data track and servo sector address patterns is canceled by digitally subtracting from a first estimate value of the detected pulse peak amplitude the average of the estimate values of one sample preceding the detected peak and a second sample following the
5 detected pulse.

One embodiment of a simple digital base level offset removal filter is disclosed for averaging a sample two samples before with a sample two samples after the sampling of the detected peak. This is a digital FIR filter having filter coefficients $(-0.5, 0, 1, 0, -0.5)$.

The detection threshold for the Gray code digital information can be controlled by using as a
10 threshold reference half of the low pass filtered amplitude of the servo sector SYNC marks (STM). The SYNC marks are always present at the beginning of every servo sector. Again, the low pass filtering may be done digitally at a low cost using otherwise unused gates in an inexpensive FPGA or DSP integrated circuit.

BRIEF DESCRIPTION OF THE DRAWINGS

15 For a further understanding of the present invention, reference should be had to the following detailed description, taken in conjunction with the accompanying drawings, in which like parts are given like reference numerals and wherein;

Figure 1 illustrates a disk drive system incorporating an embodiment of the present invention.

Figure 2 is a plan schematic view of a servo sector, data sector disk architecture used in the
20 system of Figure 1.

Figure 3 depicts a detailed view of the servo sector in Figure 2.

Figure 4a is a plot of typical pulse signal wave forms from a disk such as that in Figure 2 when operating in the system of Figure 1.

Figure 4b is a plot of two typical ID and OD bit signal waveforms having different pulse
25 widths shown centered within a logic bit frame in an embodiment of the present invention.

Figure 4c is a plot of the ID and OD bit signals of Figure 4b after digitizing and processing as single samples.

Figure 4d is a plot of ID and OD bit signals shown in Figure 4b after digitizing and processing as adjacent sample averages according to the method of the present invention.

Figure 5 is a schematic block diagram of an embodiment of the averaging digital peak detection channel APDC 120 in accordance with the present invention included in the system
5 of Figure 1.

Figure 6a-b is a depiction of recovered pulse waveforms.

Figure 7 shows a schematic block diagram of an STM detector circuit.

Figure 8 illustrates a schematic block diagram of a PPS circuit used in conjunction with the APDC of the present invention.

10 Figure 9 depicts a detailed view of an alternative servo sector architecture for an alternative embodiment of the present invention used in the system of Figure 1.

Figure 10 illustrates an STM detector and a threshold generator circuit.

DETAILED DESCRIPTION OF THE INVENTION

Referring to Figure 1, there is shown an example of an optical disk drive system **100**. A plurality of optical disks **102** (with upper and lower disk surfaces **103**) having respective center holes **Do** are mounted on a drive spindle **104** therethrough. The disks **102** rotate
 5 counter clockwise (indicated by the arrow **M**) with rotating speed r p m. An actuator arm **106** has a distal end that carries flying read-write head **108** above the surface **103** of disk **102**. Rotary actuator assembly **110** is connected to a proximal end of actuator arm **106**. Rotary actuator assembly **110** supports and positions actuator arm **106** and head **108** across the surface of disks **102** by rotary motion thereabout.

10 System **100** of Figure 1 shows signal processing electronics **114** located at some remote distance from the head **108**. Referring to Figure 5 there is included in the signal processing electronics **114** a plurality of new Averaging Pulse Detection Channels (APDC) **120** of the present invention (one shown here) having an input **124** to receive signals **DPS(j)** from the corresponding read head(s) **108**. Alternatively, signal processing electronics **114** including
 15 the pulse detecting channel **120** may be located on the head **108** itself with additional signal processing circuitry (not shown) located remotely.

For the purposes of this discussion it is assumed that reference to the actuator arm **106**, read/write head **108**, and disk surface **103** is understood to apply to each of the plurality of disks **102** of the drive system **100**. Analog data pulse signals **DPS(j)**, retrieved from each
 20 respective disk surface **103** are received by corresponding signal receiving devices in the head **108**. The signals **DPS(j)** from head **108** are transferred along arm **106**, through cable assembly **112** to respective signal detection electronics **114**.

Referring to Figure 5, the structure and operation of a new pulse detection channel APDC **120** will be contrasted with that of the pulse detection channel (PDC) of 09/132,962. The
 25 detection channel **120** is modified from the PDC of 09/132,962 in several ways. First, the VGA **620** is eliminated.

Referring Figures 4a to Figures 6a-b, the data pulses **DPS(j)** have respective pulse widths **460**, **462** at the ID and OD greater than about width **PW** and peak magnitudes **464**, **466** about **Ap(j)** deviating from a respective base line **470**. Each pulse **DPSj** has a respective peak
 30 instance occurring at **tp(j)**. The base line **470** is displaced by base line offset β from a zero reference level **474**. The pulses **DPS(j)** are received in the electronics **114** at the input **124**

and processed by the APDC **120** in combination with additional circuitry described below to detect the time of occurrence **tp(j)** and the magnitudes **464, 466** of the pulse peaks **Ap(j)**.

The APDC **120** has many of the same functional elements as the prior PDC, with some new elements added and one functional element deleted. In Figure 5 of the new APDC **120**,
 5 clocking connections to the sampling clock **SYSCLK** have been omitted for simplicity, but will be understood to clock in the same way as the circuit elements of the prior **PDC**. That is, delay bits and registers have a one clock bit delay between the input and the output, and the sampling ADC **626** samples the value of the analog signal at its input and presents the digital equivalent at its output with a short time delay much less than the period of the sampling
 10 clock **SYSCLK**. It should also be understood that the time delay through the logic elements, e.g., comparator, adder, subtractor, divider, AND gate and inverter is also much less than the sampling clock period.

Comparing Figure 5 of the present invention to 09/132,962, it is seen that the VGA **620** in the PDC has been removed from the circuit of APDC **120** entirely. VGA **620** provided a signal
 15 level normalization function in the peak detect circuit of the prior disclosure. In the present invention, signal level normalization is done by digital means instead of analog means in the prior PDC as explained further below.

Also note particularly, that the peak amplitude estimates for gray code pulses **662a** and **PES** pulses **662b** are routed to separate outputs **662a** and **662b** instead of a common output **662** in
 20 the prior PDC. The explanation of the separate outputs **662a** and **662b** is given further below.

Elements retained from the 09/132,962 peak detector PDC form a first estimating function in combination with the FIR filter **121**. The elements retained from the prior PDC remain as before, with two changes to input connections discussed below. The elements retained are
 25 registers REG2 **632**, REG1 **633**, REG4 **655**, subtractor/divider |SUB|/8 **651**, REG2 **661**; ADDER1 **657**; delay bits DT1 **681**, DT2 **689**, DT3 **698**, DT4 **699**, comparators COMPx **690**, Compt **673**, the three input AND gate 3AND **694**; The elements retained have their respective inputs and outputs connected as described in 09/132,962 before, except as described below.

30 A new element is added between the output **634** of REG3 **631** and the REG2 **632** input. The new element is a two input ADDER/DIVIDER **136**, having inputs **INPUT1** and **INPUT2**

and output **140**. The input of $|SUB|/8$ **651** is still connected with the input of REG2 **632**. Where these were previously connected to output **634** of REG3 **631** they are now connected to ADC output **140**. Also, **INPUT2** of COMPx **690** previously connected to output **634** of REG3 **631** now connects to ADDER/DIVIDER **136** output **140**. The remaining elements are
 5 otherwise connected as in the prior PDC.

In addition to the new functional element register **631** and ADDER/DIVIDER **136** that comprise FIR filter section **121**, additional elements are added to the prior PDC to support desired characteristics of pulse offset elimination and scale factor adjustment for PES and gray code pulses. These additional elements include registers REG6 **150**, REG7 **152**, REG8
 10 **154**, REG9 **156**, REG10 **172**, REG11 **162b**; three Delay bits Dt5 **162**, Dt6 **164**, and Dt7 **697** are added, along with two divide_by_2 amplitude dividers M*1/2A **170**, M*1/2B **172**, and a 3_input ADDER3 **173** having inputs **INa**, **INb**, **INc**.

Connections internal to the remaining elements in the new APDC **120** have also been changed from the 09/132,962 PDC. In APDC **120** the sample output of ADC **626** is
 15 connected to register **631** input in place of the connection to the input of omitted register **631**. The sample output of ADC **626** is also now connected to the one input of the ADDER/DIVIDER **136**. The other input of ADDER/DIVIDER **136** now connects to register **631** output.

Connections to the new ADDER/DIVIDER **136** output **140** replace two of the prior
 20 connections. ADDER/DIVIDER **136** output **140** connects to inputs of two of the remaining elements in place of the prior connections. ADDER/DIVIDER **136** output **140** connects to one input **683** of comparator **690** in place of the prior connection to the output of the omitted register **631**. The input **652** of subtractor/divider **651** connects to output **140** in place of the prior connection to output **634** of the omitted register **631**.

25 These new connections alter the behavior of the APDC **120** from the previous PDC in the following way: At every sampling instant (**i**) **138** in the APDC **120**, the delay register **631** presents to one input of the ADDER/DIVIDER **136**, a previous sample value $Y(i-1)$ of the data pulse **DPS(j)**. Since the other input of the (10 bit) Averaging ADDER/DIVIDER **136** connects directly to the output **630** of the ADC **626** (in this case a 10 bit flash converter), the
 30 averaging ADDER/DIVIDER **136** provides the a 10-bit digital average of $Y(i)$ and $Y(i-1)$, i.e. $[Y(i) + Y(i-1)]/2$ at its output.

Comparing the operation of the APDC **120** with that of the 09/132,962 PDC, it can be seen the computation of an estimate **Ep(j)** of the peak value **Ap(j)** uses the same circuit elements operating in the same way, except that, instead of evaluating the estimate **Ep(j)** based on one sample (**Y(i)**) of **DPSj** at each sample time (**i**), the estimate **Ep(j)** is based on the average of
 5 two samples $X(i) = [Y(i) + Y(i-1)]/2$.

This averaging provides increased sample pulse width to improve the accuracy of estimation for peak amplitude for the narrow pulses at the OD of the disk surface.

In the 09/132,962 PDC pulse signal level normalization was done to compensate for variation of **Psj** pulse amplitudes due to the various causes described above. The VGA **620** provided a
 10 gain controlled analog output **624** to digitizing input **622** of flash analog-to-digital converter **626**. The APDC **120** embodiment of the present invention eliminates the analog VGA for compensating pulse amplitude variation by providing the alternative of a compact, low cost, area efficient digital compensation method described here below.

Prior to the amplitude variation compensation, a first estimate **Ep'(j)** of the peak amplitude is
 15 first computed by a first estimation section **122**

The FIR filter **121** replaces the register **631** in the 09/132,962 PDC. FIR filter **121** is comprised of prior register REG3 **631** having its input connected to output **630** of ADC **626** for receiving digital samples **Y(i-1)**, **Y(i)**, ---therefrom, at each sampling clock instance, **i**, of **SYSCLK** (not shown) as before. At clock (**i**) of **SYSCLK**, (not shown) output **634** of REG3
 20 **631** presents the value **Y(i-1)** to an input **INPUT1** of ADDER/DIVIDER **136** instead of the input of REG2 **632**. That is, the value of the ADC output **630** sampled at the previous clock (**i-1**). The ADDER/DIVIDER **136** has its other input **INPUT2** connected to ADDER output **140**. **INPUT2** receives the value **Y(i)** at clock (**i**). At sampling clock instance (**i**) the ADDER/DIVIDER **136** sums the two samples **Y(i)**, **Y(i-1)** (i.e., the current sample from
 25 ADC **626** and delayed sample from register **631**) at its inputs **input1** and **input2**, divides the sum $Y(i) + Y(i-1)$ by 2 and presents an average **X(i)** of the two samples: $X(i) = [Y(i) + Y(i-1)]/2$ at output **140** of **136**. FIR filter **121** thus provides the average of two successive samples of output **630** of the ADC **626** at every sampling clock instance (**i**).

Average sample values **X(i)** at the output **140** of ADDER/DIVIDER **136** are presented to a
 30 first peak pulse amplitude estimation section **122**. Section **122** is formed of remaining elements from the prior PDC. The remaining elements are registers REG1 **633**, REG2 **632**,

REG4 655, REG2 661, REG4 655, REG5 661; subtractor/divider 651; ADDER1 657; comparator COMPx 690; delay bits Dt1 681, Dt2 689, Dt3 698, Dt4 699, and Dt6 164; inverter 700; and 3 input AND 694. The following is the discussion of the operation of the these elements of the present APDC 120 in terms of the operation of the PDC in the
 5 09/132,962 application except that the values of $X(i)$ are the averaged values of $Y(i)$ and $Y(i-1)$, reference to clock ticks (k) are understood to be equivalent to sample times (i).

At clock tick k ADDER/DIVIDER 136 outputs the average value $X(k)$ nearly instantaneously (relative to the clock period $SYSCLK$) and provides the digitized signal
 10 average $X(k)$ at its output 140. The average value $X(k)$ at output 140 is equivalent to the variable $X3$ in the prior PDC.

$$X(k) = X3$$

Equation 1

The ADDER output 140 provides the digital value $X(k) = X3$ to an input of a second register
 15 REG2 632 that is also clocked by $SYSCLK$. The register REG2 632 receives and stores the value $X(k)$ at the $SYSCLK$ tick k while holding REG2 632 output 635 at its previous value $X(k-1)$. The value $X(k-1)$ is equivalent to the value $X2$ of the 09/132,962 PDC.

$$X(k-1) = X2$$

Equation 2

20

Register REG1 633 receives and stores the value $X(k-1)$ from REG2 632 output 635 at clock tick k and outputs its previously stored value $X(k-2)$ to one input 650 of subtractor/divider 651. $X(k-2)$ is equivalent to the value $X1$ of the 09/132,962 PDC.

$$25 \quad X(k-2) = X1$$

Equation 3

The other input 652 of subtractor/divider 651 receives the value $X(k)$ t(kpk) 140 of ADDER/DIVIDER 136. Subtractor/divider 651 provides $|X(k) - X(k-2)|/8$ at its output 654 as an output value ($|SUB/8|(k)$) at clock tick k .
 30 Thus at every clock cycle k , Subtractor/divider 651 forms the result $|X(k) - X(k-2)|/8$ ($|SUB/8|(k)$) at its output 654.

$$|SUB/8|(k) = |X(k) - X(k-2)|/8 = |X1(k) - X3(k)|/8$$

Equation 4

The subtractor/divider **651** can be implemented as a simple full ADDER with the addition of a 3-bit shift to provide the divide by 8 function. $[\text{SUB}/8](k)$ is equivalent to the relation $|\text{X1}(k) - \text{X3}(k)|/8$ in the 09/132,962 PDC and is the input to a fourth register Reg4 **655**.

- 5 At each clock tick k , REG4 **655** stores the value $[\text{SUB}/8](k)$ and presents the previous computation result $[\text{SUB}/8](k-1)$ to one input **656** of a two input full ADDER1 **657**. ADDER1 **657** receives the output **636** of REG1 **633** (i.e., $\text{X1}(k)$) at its other input **658**.

- At each clock tick k ADDER1 **657** adds the value at the REG1 output **636** ($\text{X1}(k)$) to the
10 previous result $[\text{SUB}/8](k-1)$ from the output **656** of REG4 and outputs the resulting summation $\text{ADDER1}(k)$ at its output **660** to an input of register REG2 **661**.

$$\text{ADDER1}(k) = (\text{X1}(k)) + [\text{SUB}/8](k-1) \quad \text{Equation 5}$$

- 15 However, $\text{X1}(k)$ is also $\text{X2}(k-1)$, so

$$\text{ADDER1}(k) = (\text{X2}(k-1)) + [\text{SUB}/8](k-1) \quad \text{Equation 6}$$

From Equation 4

$$20 \quad \text{ADDER1}(k) = \text{X2}(k-1) + |\text{X1}(k-1) - \text{X3}(k-1)|/8 \quad \text{Equation 7}$$

From equations 1, 2, and 3

$$\text{ADDER1}(k) = \text{Ep}'j = \text{X}(k-2) + |\text{X}(k-3) - \text{X}(k-1)|/8 \quad \text{Equation 8}$$

- 25 This is the same equation as the peak amplitude estimate $\text{Ep}(j)$ as in the 09/132,962 PDC. However, this estimate is different from the previous estimate in several ways. First, it is a more accurate estimate of amplitude because each $\text{X}(k)$ the average of two samples $\text{Y}(k)$ and $\text{Y}(k-1)$. Second, it lowers the effect of noise because averaging samples reduces the noise contribution by the RMS addition. Third, the effective pulse width of the quadratic fitting the
30 three consecutive averaged samples at $(k-1, k-2, k-3)$ is broadened more for narrow pulses (e.g., at the OD of the disk), improving the accuracy of the estimates of peak amplitude and peak instance.

The magnitude of the amplitude estimate at the ADDER1 output **660** is smaller for the same sample values $Y(i)$, because the average of two samples of different magnitude will be smaller than the magnitude of the larger sample alone. However, this is not a disadvantage, since the method of embodiments of this invention includes an amplitude normalization step explained in detail below.

At the next clock tick $k+1$, REG2 **661** outputs the estimate $Ep'j = ADDER1(k)$ at output **662** which is the previous value of its input at clock tick (k).

REG2 **661** will thus hold a first estimate value $Ep'(j)$, of a peak amplitude Apj of pulse Psj , two clock ticks after the following two conditions are true; first, the last average value $X(k-3)$ is received by the ADDER/DIVIDER **136**, and second, there is a peak detected, i.e. at $X(k-2) \geq X(k-3)$ and $X(k-2) > X(k-1)$ corresponding to $X2 \geq X3$ and $X2 \geq X1$ from Eq. 1 above.

To summarize, section **122** includes all the elements of the 09/132,962 peak detection circuit; i.e., ADC **626**, REG2 **632**, REG1 **633**, |SUB|/8 **651**, REG4 **655**, ADDER1 **657**, and REG2 **661**. The operation of these elements is the same as in the 09/132,962 circuit, except that, 1) values $X(i)$ from the output **140** of ADDER/DIVIDER **136** are input to REG2 **632** as the averages of two samples, $Y(i-1)$ and $Y(i)$; and 2) the subtractor/divider |SUB|/8 **651** input and COMPx **690** INPUT2 are connected to the output **140** of ADDER/DIVIDER **136**. In other words, the description of 09/132,962 for processing the samples $X1$, $X2$, and $X3$ is valid for the section **122** embodiment of the present invention with the understanding that the $X1$, $X2$, $X3$ are each the average of two adjacent pulse samples $Y(i)$ and $Y(i-1)$.

The operation of the section **122** in computing preliminary values for the peak pulse amplitude estimates $Ep'j$ are derived from 3 consecutive average values ($X(i-1)$, $X(i)$, $X(i+1)$) of two consecutive digital samples $Y(i-1)$ and $Y(i)$ of the received pulse in the same manner as the PDC of 09/132,962 application determined the actual estimate Epj .

Referring again to Figure 4b, there is shown a plot of two simulated bit signal waveforms: an ID bit signal **402** and an OD bit signal **404**. The signals **402** and **404** are shown with wide (ID) and narrow (OD) pulse widths **406** and **408** respectively. The bit frame **410** is divided

into five sampling times **412** ranging from center sample **414** at 0 to two samples **412** before (+1, +2) and after (-1, -2) center sample **414**.

Signals **402** and **404** are shown with respective peak amplitudes **416** (ID) and **418** (OD) centered on the logic bit frame **410**, that is, with peak amplitudes **416** and **418** at the center sample **414**. Signals **402** and **404** are shown with the same peak amplitudes **416** and **418**, but differing pulse widths **406** and **408**, before processing by the peak detector **120** of the present invention. The peak amplitudes **416** and **416** are shown normalized to a value of 1.

With respect to Figure 4d there is shown is a plot of pulse bit signals ID3 **430**, ID4 **432**, OD3 **434**, OD4 **436** representing input signal waveforms **402** and **404** (e.g., $Y(i)$) processed by the APDC **120** in accordance with the present invention. Signals ID3 **430**, ID4 **432**, OD3 **434**, OD4 **436**, have estimated peak amplitudes $Ap_3(ID)$ **440**, $Ap_4(ID)$ **442**, $Ap_3(OD)$ **444**, $Ap_4(OD)$ **446** respectively, corresponding to the first estimate Ep_j for peak pulse amplitude at output **662** provided by the APDC **120**. $Ap_3(ID)$ **440** and $Ap_4(ID)$ **442** are the results of processing ID bit signal **402** from Figure 4b in two different cases. The first case $Ap_3(ID)$ **440** is with the peak amplitude **416** of ID bit signal **402** sampled at the center sample **414**. The second case, ID2 **424**, is with the peak amplitude **416** sample out of phase with center sample **414** by 1/2 the time between bit samples **412**.

The processed signals ID3 **430**, ID4 **432**, OD3 **434**, OD4 **436** are the results of digitizing and processing as averages of adjacent samples, the bit signals **402** and **404** of Figure 4b at the adjacent sample times **412** according to the method of the First peak pulse amplitude Estimation Section **122** described above. The results are shown under two conditions of different relative phase of the peak amplitudes **416** and **418** with respect to the center sample **414**. In the first case, ID3 **430** and OD3 **434** show results with the peak amplitudes **416** and **418** coincident with the center sample **414**. In the second case, ID4 **432** and OD4 **436** show results with peak amplitudes **416** and **418** out of phase with the center sample **414** by 1/4 of time between samples **412**.

For the ID signal **402**, the accuracy of the maximum value $Ap(ID)_3$ **440** of ID3 **430** (that is the estimate of the peak amplitude for the ID signal **402** with zero phase difference between the peak and the sample time **414**) relative to the peak amplitude **416** of Figure 4b is about 0.875. The accuracy of the maximum value $Ap(ID)_4$ **442** of signal ID4 **432** is (that is, the estimate of the peak amplitude **416** for the ID signal **402** with a phase difference between the

peak and the center sample time **414** of 1/4 sample time **412**) is about 0.81 with respect to the normalized peak of 1.0 from Figure 4b).

For the OD signal **404**, the accuracy of the maximum value $Ap(OD)3$ **444** of signal OD3 **434** (that is the estimate of the peak amplitude **418** for the OD signal **404** with zero phase difference between the peak **418** and the sample time **414**) relative to Figure 4b is about 0.60. On the other hand the accuracy of the maximum value $Ap(OD)4$ **446** of OD4 **436** (that is, the estimate of the OD peak amplitude **418** with a phase difference between the peak **418** center sample time **414** of 1/4 sample time **412**) is about 0.58, which is very close to the value $Ap(OD)3$ **444**.

Thus the APDC **120** of the present invention provides very good agreement for pulse peak amplitude as a function of phase difference between the sampling times **412** and the occurrence of amplitude peaks for both ID and OD signals having a considerable difference in pulse widths.

The averaging of the samples $Y(i)$, $Y(i-1)$ provides the benefits of reduced sensitivity to sampling phase differences discussed above that are desired.

Compensation for variation of amplitude is provided by cooperation with additional system functions described below.

With regard to section **122** of Figure 5 of the present invention compared to application 09/132,962, it is seen that circuit elements for determining the peak pulse amplitude instance are the same for both. Namely, COMPx **690**, COMPt **673**, DT1 **681**, DT3 **698**, DT4 **699**, Dt5 **162**, inverter **700**, 3 input AND **694**, and Dt6 **164**.

The description of the operation of the AP of the present invention is similar to portions of 09/132,962 (page 24, line 11 to page 26 line 17) which is repeated here, with the understanding that values of $X(i)$ in the present invention are the averaged values of $Y(i)$ and $Y(i-1)$ in contrast to those of 09/132,962 which are single sample values. Some corrections of prior typographic anomalies have been made in the present transcription. Some element names have been changed slightly to conform to the present Figures, element reference numbers for co-existing elements remain the same. Reference to peak amplitude instance

PKDET from 09/132,962 has been replaced by reference to a preliminary peak amplitude instance **PKDETP** in the present invention at output **Dtpp 697**.

- A DC threshold level **TH 672** from an output of a threshold register (not shown) is provided from the DDCS to compensate for system variation as referenced above. The threshold level **TH 672** is chosen to disable the generation of peak detection until the peak amplitude of the data pulse signals **Psj** reach an acceptable level. The actual value for **TH 672** will depend on the particular system and environment being considered.
- 10 The threshold level **672** is preferably part of the feedback loop to compensate for the variations in pulse signal amplitude as a result of the averaging process provided by the averaging section **121**.

- When the magnitude of $[X2(k) - TH]$ is greater than 0, **COMPt 673** will output **680** a logic one level to a first Delay bit **DT1 681** that is clocked by **SYSCLK**. **DT1 681** feeds a second Delay bit **DT2 689** having an output **Dt2 691**. Output **Dt2 691** drives one input **692** of a three-input AND gate, **3AND 694**.

- REG2 661** holds a value **Ep'j** of a preliminary estimate of the peak amplitude **Apj**, which approximates a peak of particular pulse **Psj**, two clock ticks **k** after the last **X(i)** value is sampled by the **ADC 626** and there is a peak detected, i.e. at ; $X(k-4) > X(k-3)$ and $X(k-4) > X(k-5)$ corresponding to $X2 \geq X3$ and $X2 > X1$ from Eq. 1 above.

- The comparator **COMPt 673** receives the **REG2 632** output **X2(k) 670** at one input and the DC threshold level **TH 672** from the output of a threshold register (not shown) from the DDCS to compensate for system variation as described above. The threshold level **TH 672** is chosen to disable the generation of peak detection until the peak amplitude of the data pulse signals **Psj** reach an acceptable level. The actual value for **TH** will depend on the particular system and environment being considered.

- 30 When the magnitude of $[X2(k) - TH]$ is greater than 0, **COMPt 673** will provide at output **680** a logic one level to a first Delay bit **Dt1 681** that is clocked by **SYSCLK**. **Dt1 681** feeds a second delay bit **Dt2 689** having an output **Dt2 691**. Output **Dt2 691** drives one input **692** of a three-input AND gate, **3AND 694**.

- A second comparator COMPx 690 receives the output X2(k) 635 of REG2 632 at one input 682 of COMPX1 690 and the output X3, k 634 of REG3 631 at another input of COMPX2 690. When the magnitude of [X3, k - X2(k)] is greater than 0, COMPx 690 outputs a logic one level at its output COMPx 685 to one input of third Delay bit Dt3 698. Dt3 698 feeds a fourth Delay bit Dt4 699 and an input 686 of an inverter Invert 700. Inverter Invert 700 feeds a second input 687 to 3AND 694. Dt4 699 feeds a third input 688 to 3AND 694. Both Dt3 698 and Dt4 699 and Both Dt1 681 and Dt2 689 transfer respective input levels to outputs level with a delay of one clock tick k when clocked by SYSCLK.
- 3AND 694 will output a logic one level at output 3AND output 695 when all three 3AND 694 inputs are logic true. 3AND output 695 feeds a peak detect Delay bit Dp 696 that is clocked by SYSCLK at each clock tick k. Dp 696 outputs 697 a logic one level one clock tick later than a one level on 3AND output 695.
- The output of COMPt 673 at each clock tick k, is the logic value of $|X2(k) > TH|$, i.e. a logic one when X2 635 at clock tick k is greater than TH 672. If the value of X2 635 is not greater than the TH 672 level, then a zero will be propagated through Dt1 681 and Dt2 689 so that, 2 clocks later the 3AND 694 will be disabled and no peak will be detected.
- This ensures that low-level noise is not interpreted as an actual pulse detect. When $X2 > TH$, then the 3AND 694 will be enabled two clocks later, in time for Delay bit Dp 696 to output a valid peak detect level, if one has been detected.

The output PKDETP 697 of Dp 696 is:

$$[INV(Dt3)]AND[Dt4]AND[Dt2](k-1) \quad \text{at clock} = k-1;$$

Equation 9

Where;

$$Dt2(k) = [COMPt(k-2)] = [X2(k-2)] > [TH] = [x(k-4)] > [TH];$$

$$\text{Equation 10}$$

$$COMPx, k = [X2(k)] > [X3(k)];$$

Equation 11

$$[Dt4(k)] = [COMPX(k-2)] = [X2(k-2)] > [X3(k-2)] = [x(k-4)] > [x(k-3)];$$

Equation 12

$$[Dt3]=COMPX(k)-1 = [x(k-3)] > [X(k-2)];$$

5 Equation 13

The logical peak detect level PKDETP 697 is true when:

$$Dp=[INV[[X(k-4)]>[x(k-3)]]] 3AND [[X(k)-5] > [x(k-4)]] 3AND [[X(k)-5] > [TH]];$$

Equation 14

10

It is understood that the circuit of Figure 5 may use registers REG3 631, REG2 632, REG1 633 to store the values from waveforms of Figure 4. The comparator COMPx 690 in combination with the delay of the Delay bit Dt3 698 and the inverter Invert 700 provides both the result of $X2 > X1$ and $X2 \geq X3$ by making the comparison $X3 > X2$ and inverting it at
 15 Invert 700 which yields the desired $X2 \geq X3$. The delay of the $X2 > X1$ comparison by the Delay bit Dt4 699 allows both the necessary comparisons to be applied to the AND gate 3AND 694 at the same time.

20

Figure 5 of the present invention and the signs of the equations 1, 2, 3 and 4 above are described in terms of positive pulses and positive logic. The operation of the invention is equally valid for negative going pulses and negative logic with appropriate adjustment for sign.

25

The APDC 120 circuit will be recognized as a pipeline processing circuit that takes advantage of reusing the same circuitry again and again in different clock cycles for different computations. The results of computations in one cycle are stored and combined with results of computation with the same or different circuit elements in other cycles.

30

An alternate embodiment of the present invention is contemplated in which the logic blocks |SUB|/8 651 and ADDER1 657 are replaced by logic blocks (not shown) that can compute the more accurate estimate of E_{pj} , given by Equation 3 of 09/132,962 . The necessary modifications of the connections and internal logic elements of the blocks |SUB|/8 651 and ADDER1 657 to achieve the above result are within the capability of a circuit engineer having ordinary skill in art.

An Offset Compensation and Scale Factor Compensation circuit section 123 is included in the APDC 120 embodiment of the present invention. Section 123 provides all of the compensation of pulse amplitude offset (Ξ) for the peak pulse estimates \mathbf{Epj} of gray code peak pulse amplitudes \mathbf{Apj} that are output at Gray code amplitude output 662a. Section 123 includes registers REG6 150, REG7 152, REG8 154, REG9 156, REG10 172 and REG11. Also included are delay bits Dt5 162, Dt6 164, Dt7 697a, two multipliers $M*1/2A$ 170 and $M*1/2B$ 172, and a 3-input ADDER3 173.

At clock k , REG6 150 receives the preliminary estimate value $\mathbf{Ep'j(k)}$ of \mathbf{Apj} for Gray code pulses from the output 662 of REG5 661. REG6 150 output 151 drives an input of REG7 152 with a one clock delay, as does REG7 152 output 153 drive an input of REG8 154, REG8 154 output 155 drive an input of REG9 156, REG9 156 output 157 drive an input of the multiplier $M*1/2B$ 172. Each output 151, 153, 154, 156 outputs the value of $\mathbf{Ep'j(k-1)}$ when the preceding output is $\mathbf{Ep'j(k)}$. That is, its output has the value of $\mathbf{Ep'j}$ one clock earlier. After four clocks, the respective outputs 157, 155, 153, 151, and 662 output the corresponding values $\mathbf{Ep'j(k)}$, $\mathbf{Ep'j(k+1)}$, $\mathbf{Ep'j(k+2)}$, $\mathbf{Ep'j(k+3)}$, $\mathbf{Ep'j(k+4)}$. The input \mathbf{INa} is connected to output 153 and receives the value $\mathbf{Ep'j(k+3)}$. The input \mathbf{INb} is connected to output 159 and receives the output of multiplier $M*1/2B$ 172, that is the value $1/2*\mathbf{Ep'j(k)}$. The input \mathbf{INc} is connected to the output of $M*1/2A$ 170 and receives the value $\mathbf{Ep'j(k+5)*1/2}$. The ADDER2 173 performs the function $\mathbf{INa - INb - INc}$ and outputs the result; in this case $\mathbf{Ep'j(k+3) - 1/2*Ep'j(k) - Ep'j(k+5)*1/2}$.

Since any offset β , adding to the pulse amplitudes $\mathbf{Ep'j(k+3)}$, $\mathbf{Ep'j(k)}$, $\mathbf{Ep'j(k+5)}$ will appear equally in all three values input to the ADDER2 173 function, the output of ADDER2 173 at 662a will have the offset, β , removed. When the clock, $k+3$ is the clock near the peak \mathbf{Apj} , $\mathbf{Ep'j(k+3)}$ will be much larger than either of the other two and the value \mathbf{Epj} of the output at 662a will be large.

Thus it is apparent that the method and system of this aspect of the present invention provides a simple, relatively low cost and area efficient removal of offset for the Gray code data pulses.

With regard again to Figure 5, PES preliminary pulse peak amplitude data, $\mathbf{Ep'j}$, is output from the same REG7 152 output 153 as the Gray code data pulses. $\mathbf{Ep'j}$ however bypasses the offset removal portion of section 123 (REG8 154, REG9 156, $M*1/2B$ 172 and

ADDER2 173) and passes directly to the register REG11 162b to be output in phase with the PKDET signal from Dt7 697a.

Operation of the APDC 120 of the present invention in the system 100 proceeds as in 09/132,962 in cooperation with the STMD and PPS circuits of Figure 7 and Figure 8 thereof
5 with the additional requirement that the system 100 be adapted to the separate PES amplitude output from REG11 162b.

With regard to the PPS and STMD circuits from the disclosure of 09/132,962 and the servo sector architecture of thereof, the STMD signals (db0-db11, READ_DATA 895, READ_PES 900, DP1, DP2, DP3, DP4) in combination with a suitable receiving DPS or
10 FPGA circuit may be driven thereby for detecting which pulses are Gray code i.e., track (T) and sector (S) ID and which are PES pulses. The design of suitable logic circuitry in a DPS or FPGA 901 to accept the PKDET signal 697, PES Epj peak amplitude 662b, Gray code Epj peak amplitude 662a, and the cooperating STMD signals of 09/132,962 in order to
15 derive scale factor adjustment signals (not shown) for the Gray code peak amplitude 662a and offset removal (not shown) for PES peak amplitude signals 662b is within the capability of one having ordinary skill in the art of digital circuit design.

In one preferred embodiment of the present peak detect invention, it is assumed an inexpensive 10 bit 50 MHz ADC 626 is available for the ADC 626, that the servo pit time will be 100 ns corresponding to a 10 MHz signal and the servo signal is high pass filtered
20 with a high pass -3dB point, of below 5000 Hz such that the sag over a 1 microsec servo sector is at worst a few percent of the signal amplitude.

An alternate embodiment of the present invention is contemplated in which the logic blocks SUM1 651 and ADDER1 657 compute the more accurate estimate of Epj, given by Equation 3 above. The necessary modifications of the connections and internal logic elements of the
25 blocks SUM1 651 and ADDER1 657 to achieve the above result are within the capability of a circuit engineer having ordinary skill in the art.

It is expected that the actual determination of the threshold value for the APDC 120, the PES computation and the Gray code detection and decoding will be done in a DSP or FPGA. Seven gate signals (STM, A, B, C, D, S and T) may be used by the DSP to determine when
30 the PES SAMPLE AMPLITUDE or GRAY CODE AMPLITUDE values can be read. The DSP may use the STM amplitude to determine the threshold using some fraction of a low pass filtered amplitude signal (not shown) summed from previous servo sectors. The DSP

may use the PES amplitudes corresponding to the above signals and stored values of A, B, C, and D peak amplitudes to calculate (A-B)/(C-D). The DSP or FPGA may use the Gray code amplitudes corresponding to S and T to decode the digital values of track and sector address. A logic one would be recognized if the amplitudes of the S or T signals is greater than a
 5 calculated threshold value.

For example, DSP registers (not shown) for storing peak amplitude data from the STMD pulses, the A, B, C, and D, PES pulses, and the Gray code S and T pulses may be defined in the FPGA. A straight forward calculation in the FPGA (not shown) of (A-B)/(C-D), that is the ratio of the differences between A and B divided by the difference between C and D
 10 yields a PES signal insensitive to offset or scaling factor.

The actual determination of TH may be computed by a DSP or FPGA and supplied to the APDC threshold input from other circuit functions as is known in the art. For example, peak pulse amplitudes **Apj** from the STM pulses received by the system **100** from the output **662** from consecutive sectors **212** may be low pass filtered and used as an input to a threshold
 15 calculating block (not shown) computing the threshold value **Th** as

$$\mathbf{Th} = \mathbf{Ap(ave)}/2$$

Equation 15

$$\mathbf{Ap(ave)} = \sum_{\mathbf{NS}} \mathbf{Apj(n)}/\mathbf{Ns}$$

Equation 16

With regard to Figure 9 and Figure 10 there are shown schematics of an alternate Servo Sector Pattern **700** and Threshold Value Generator **800**. Pattern **700** is designed to work in
 20 cooperation with the APDC **120** of the present invention and the Generator **800** in combination with DSP **901**.

The Servo Sector Pattern **700** includes a four-bit STM pattern formed of first and fourth spaced apart continuous radial lines (radial bar) **702** and **704** of overlapping pits **303**. Radial bars **702** and **704** are spaced apart by two blank bars **703** (i.e., no bits encoded). Immediately
 25 following the bar **704** are four succeeding segmented circumferential PES patterns **706**, **708**, **710**, and **712**. The PES patterns **706**, **708**, **710**, and **712** are formed of contiguous overlapping pits **303** grouped into segments **714** and spaces **716** staggered radially following the sequence of the patterns **311-314**.

The PES patterns are followed immediately in turn, by Sector ID bit (Sb) **718** and Track ID bit (Tb) **720**. Track and Sector ID numbers (not shown) are encoded as the bit **714** and bit **716** of a plurality of sequential servo sectors **212**.

5 Circumferential lengths, **Ls**, of the patterns **706-720** are arranged in an encoding scheme (not shown) typical of that in the art.

The circuit **800** incorporates the function of the PPS circuit of **09/132,962** combined with the function of the **STMD** circuit. Minor changes in the counting logic of circuit **800**, familiar to those skilled in the art of digital arithmetic, are made to accommodate the single bit PES patterns **706-710**. Circuit **800** accepts the Gray code peak detect signal **697** along with the
10 Gray code amplitude signals **662a** and PES amplitude **662b** signals from the APDC **120** and computes and outputs Gray code amplitude values **810** and PES amplitude values **812** to DSP **901**.

DSP **901** (or alternatively an FPGA) provides sufficient digital gates (not shown) configured for implementing some or all of the digital functions shown and described with regard to the
15 Figures and Description herein.

It is to be understood that the above description is illustrative only and not limiting of the disclosed invention. It will be appreciated that it would be possible to modify the size, shape and appearance and methods of manufacture of various elements of the invention or to include or exclude various elements within the scope and spirit of this invention. For
20 example, although an optical disk drive embodiment has been described, the present invention is applicable to detection of signals in magnetic disk drives also. Thus the invention is to be limited only by the claims as set forth below.

Claims

What is claimed:

1. A disc drive comprising: a digital detection circuit, the digital detection circuit
asynchronously sampling an analog data signal derived from information stored on a
5 magneto-optical storage disk and based on the samples detecting a peak value of the
analog data signal.
2. The disc drive of claim 1, wherein the peak value of the analog signal comprises a peak
amplitude and/or a peak position.
3. A method of digitally processing asynchronously sampled data in a disk drive,
10 comprising the steps of:
 averaging two adjacent samples taken from an analog data signal; and
 estimating a peak amplitude of the data signal based on the average of the two
adjacent samples. The method of claim 3, further comprising the step of subtracting a
measured base line value from the estimated peak amplitude to obtain a new estimated
15 peak amplitude.
 The method of claim 4, further comprising the step of multiplying the new peak
amplitude by a constant whose value is known a priori.
4. The method of claim 3, further comprising the steps of:
20 subtracting a measured base line value from the estimated peak amplitude;
 comparing the resulting value to a threshold value that is known a priori; and
 determining whether a bit value representing the data signal is a zero or a one.
5. The method of claim 6, further comprising the step of estimating the base line value by
25 using $\frac{1}{2}$ times a sample value taken before the peak amplitude and $\frac{1}{2}$ times a sample
value after the peak amplitude.
6. The method of claim 6, further comprising the step of setting a threshold value to be $\frac{1}{2}$
times the maximum peak amplitude taken from a plurality of data signals.
7. The method of claim 3, further comprising the steps of:
30 using position error pattern signals obtained from a disk in the disk drive to generate a
difference A-
 B signal and a difference signal C-D; and

dividing the A-B signal by the C-D signal to generate a normalized position error signal (A-B)/(C-D)

to compensate for systematic changes in the data signal.

8. The method of claim 6, wherein the A-B signal is a position error signal and the C-D signal is a maximum peak amplitude signal.

9. In a disk drive system having an output providing an analog signal including a sequence of analog signal data pulses, **DPS(j)**, recovered from stored data on a storage disk, the data pulses having pulse widths greater than about width **Pw**, peak magnitudes of about **Ap(j)** deviating from a respective base line **126** and respective peak instances of **tp(j)**, the base line **126** having a base line offset value β from a zero reference level, a digital peak detection channel comprising:

an analog input of a sampling device receiving continuous analog values of the sequence of analog signal data pulses **DPS(j)**, the sampling device being responsive to a sampling clock by sampling values **y(k)** of said analog signal data pulses **DPS(j)** at each of successive sample clock times ---, **(k-2)**, **(k-1)**, **k**, **(k+1)**, **(k+2)**, --- and converting each said analog value **y(k)** to a corresponding digital value ---, **Y(k-2)**, **Y(k-1)**, **Y(k)**, **Y(k+1)**, **Y(k+2)**,---, the sample clock having a sample period of at least less than about **Pw/5**;

a digital output of the sampling device outputting said sampled digital values ---, **Y(k-2)**, **Y(k-1)**, **Y(k)**, **Y(k+1)**, **Y(k+2)**,---, to an input of a digital sample value averaging device, the sample value averaging device providing an output of successive digital sample average values **X(k-1)**, **X(k)**, **X(k+1)**, --- in which each digital sample average value **X(k)** is formed from a sequence of 2 adjacent samples, **Y(k-1)**, **Y(k)**, and is equal to $[Y(k)+Y(k-1)]/2$;

a peak pulse instance recognition device receiving the output of 3 successive sample average values **X(k)**, **X(k-1)**, **X(k-2)** and providing a digital peak detect output (**Pkdet**) with a logic signal level at a true logic value when the logic value ((**X(k-1)** > **X(k)**) AND (**X(k-1)** > **X(k-2)**)) is true,

whereby the true logic value of the digital peak detect output indicates a signal pulse peak, **Ap(j)(k)** occurred within plus or minus the one sampling period of the sampling time **k**.

10. The disk drive system of claim 11, in which the three successive average values $X(k-2)$, $X(k-1)$, $X(k)$ are output to corresponding registers **REG1**, **REG2**, **REG3** that provide corresponding outputs **X1**, **X2**, **X3**;

a comparator is coupled to said registers, said comparator providing the peak detect output (**Pkdet**) with a logic signal level at a true logic value when the logic value ((**X2** > **X1**) AND (**X2** > **X3**)) is true,

whereby a peak, **Ap(j)**, of a data pulse, **j**, is indicated to have occurred between the sample period k minus one period and the sample period k plus one period.

11. The disk drive system of claim 11, including a data pulse peak amplitude estimator, comprising:

computing means for computing an estimate **Ep(j)**, of pulse peak amplitude **Ap(j)** of a pulse, **j**, having peak **Ap(j)**, detected by a true logic value on the peak detect output.

12. The disk drive system of claim 13, in which a first estimate **Ep'(j)** of estimate **Ep(j)** is computed from an algorithm $\mathbf{Ep'(j)} = \mathbf{X2} + |\mathbf{X1-X3}|/8$ in which **X2** is the center average sample of the three adjacent average samples **X1**, **X2**, **X3**;

a connection providing the estimate **Ep(j)** to the disk drive system.

13. The disk drive system of claim 13, in which a base line offset β measured from a zero reference level to a pulse base line is removed from the first estimate **Ep'j** by an offset removal filter.

14. The disk drive system of claim 15, in which the offset removal filter is a finite input response filter function.

15. The disk drive system of claim 16, in which the finite input response filter function replaces the value of **Ep'j(k)** with $\mathbf{Ep*j} = \mathbf{Ep'j(k)} - 1/2[\mathbf{Ep'j(k-2)} + \mathbf{Ep'j(k+2)}]$,

whereby $\frac{1}{2}$ of common offset values β in each of the estimates **Ep'j(k-2)** and **Ep'j(k+2)** are subtracted from the value of **Ep'j(k)** to cancel the offset β in the center estimate **Ep'j(k)**.

16. The disk drive system of claim 17, in which β offset corrected values of $E_{p'j(k)}$ are provided to one or more corresponding inputs of a general logic gate assembly as the β corrected peak amplitude estimates of pulses selected from the group of the gray code pulses of a servo sector, the **PES** pulses of a servo sector and the **STM** pulses of a servo sector.
17. The disk drive system of claim 17, in which the general logic gate assembly is a **DSP** integrated circuit.
18. The disk drive system of claim 11, comprising:
- a plurality of circumferentially spaced apart servo sectors having said servo sectors structure comprising:
 - at least a four bit **STM** pattern per servo sector;
 - at least one each **A, B, C and D PES** pattern per servo sector;
 - at least one sector number pattern per servo sector;
 - at least one track number pattern per servo sector;
 - computing means for computing $(A-B)/(C-D)$ for each servo sector from estimated values of peak amplitudes of pulses received from said **A, B, C and D PES** patterns in said servo sector;
 - correction means for providing corrected estimated peak pulse signal values **A, B, C, D** to said disk drive system by compensating for a varying alpha scale factor multiplying analog pulse signal values and a varying β offset factor adding to analog pulse signal values.
19. The disk drive system of claim 19, including a pulse signal threshold setting device, comprising:
- an input to the **DSP** receiving estimated peak **STM** pulse values from a sequence of sectors;
 - an algorithm implemented by said **DSP** providing a signal threshold value computed from said estimated peak **STM** pulse values received from said sequence of sectors.

20. The disk drive system of claim 21, in which the algorithm is $\frac{1}{2}$ of the average value of the estimated peak **STM** pulse values received from said sequence of said sectors.

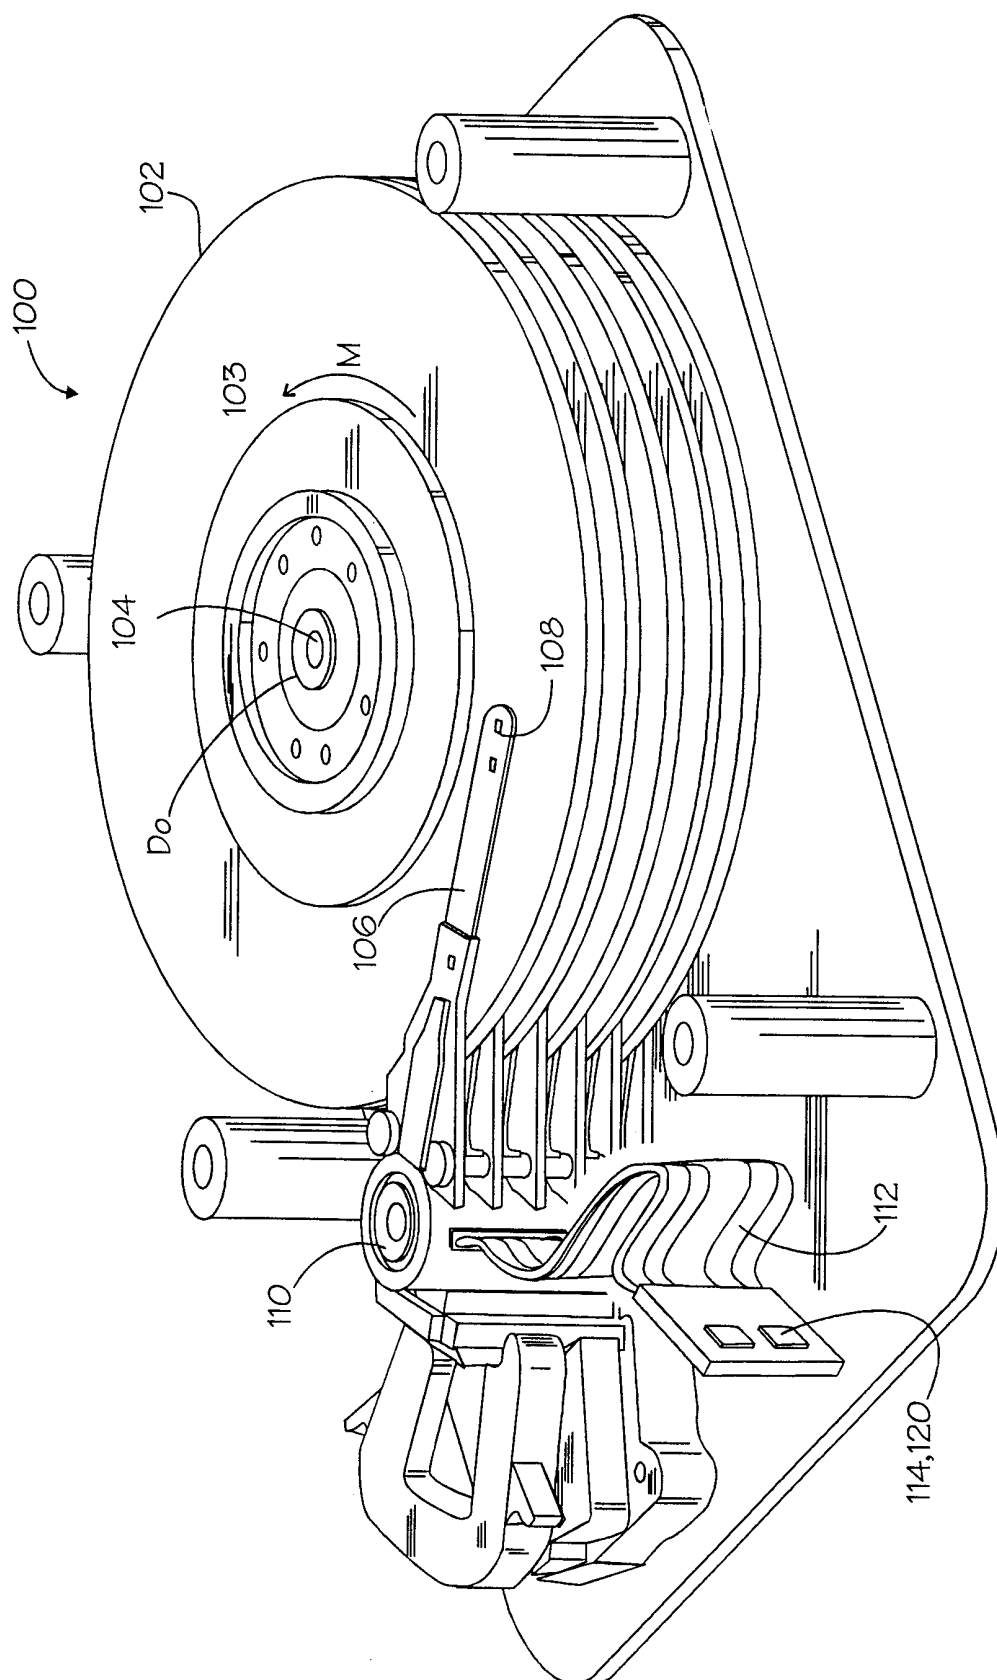


Fig. 1

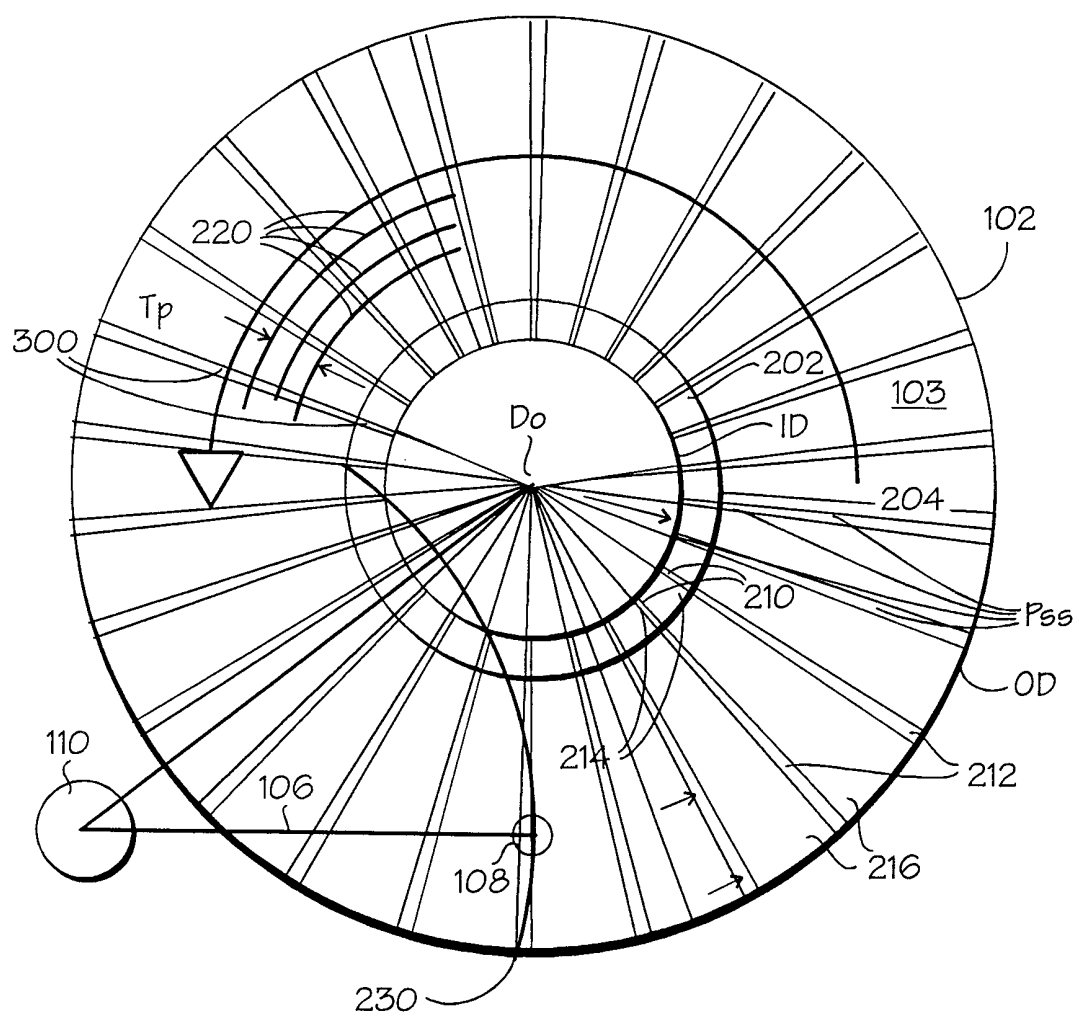


Fig. 2

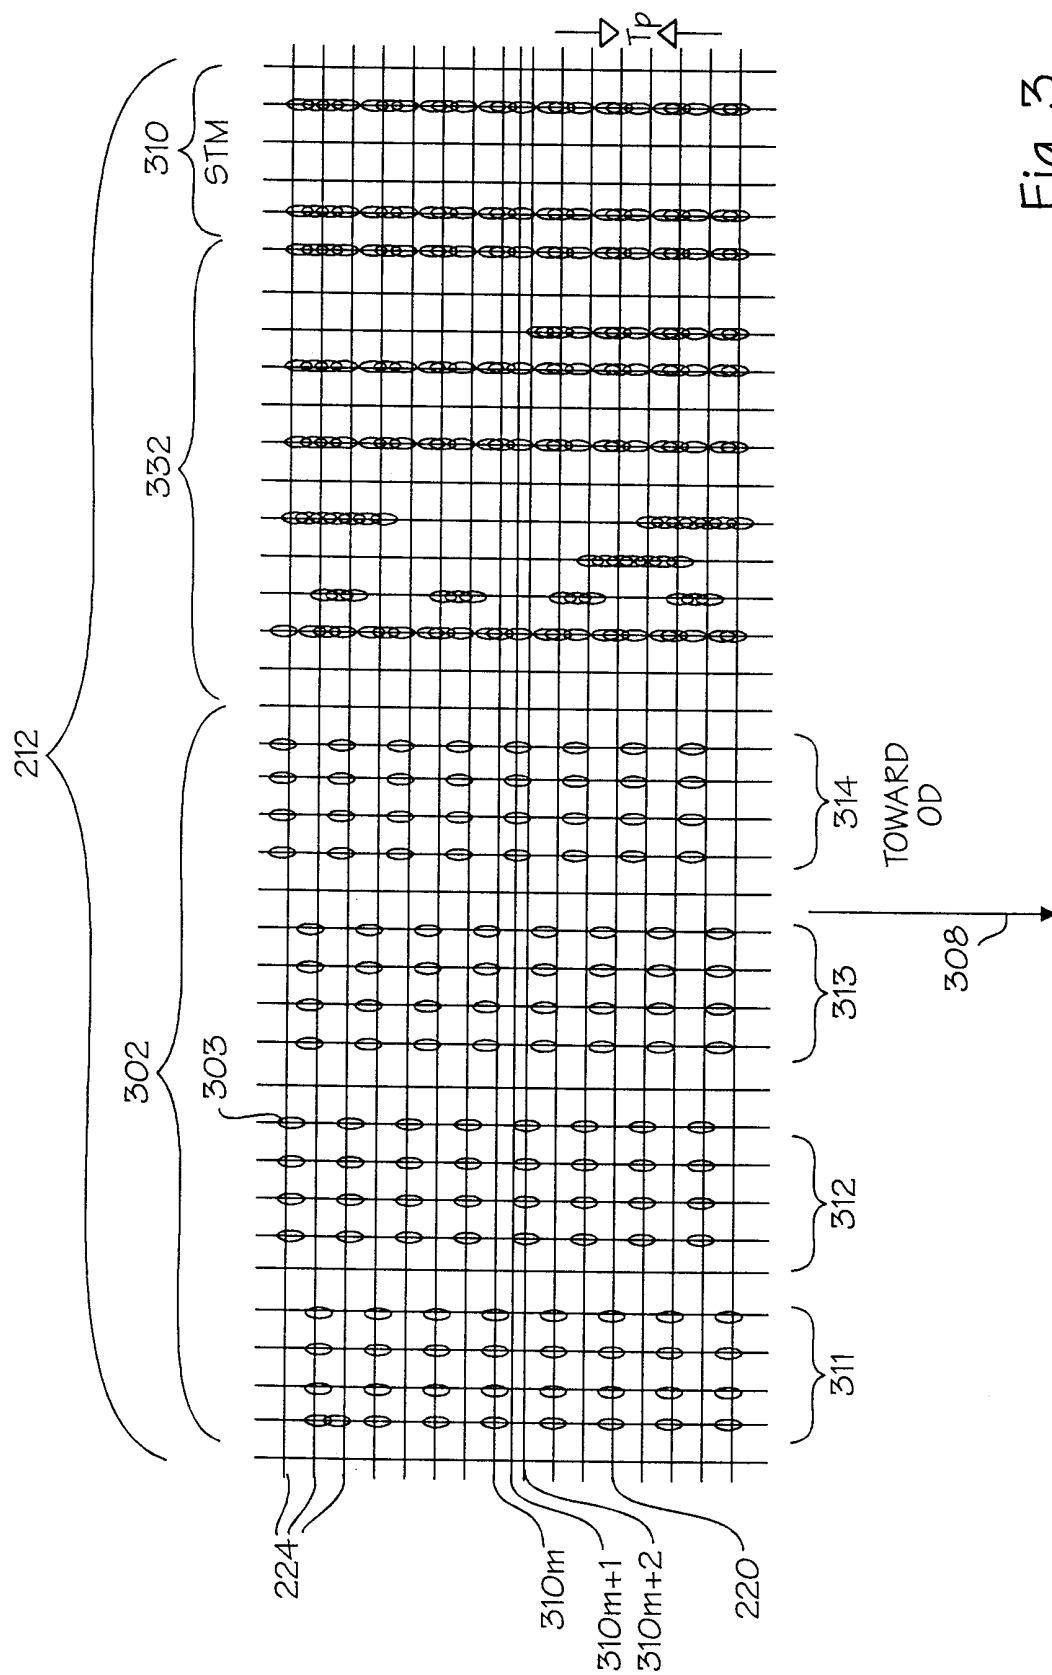


Fig. 3

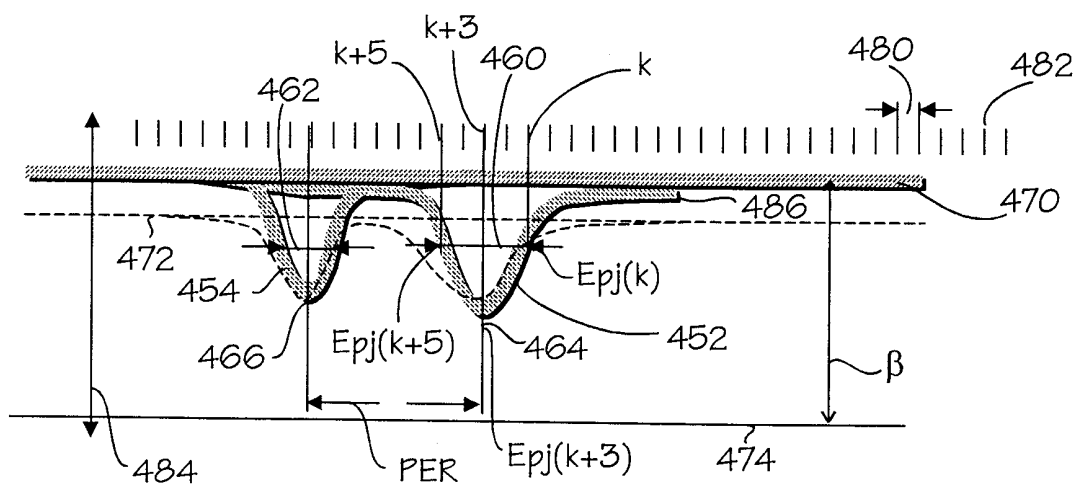


Fig. 4A

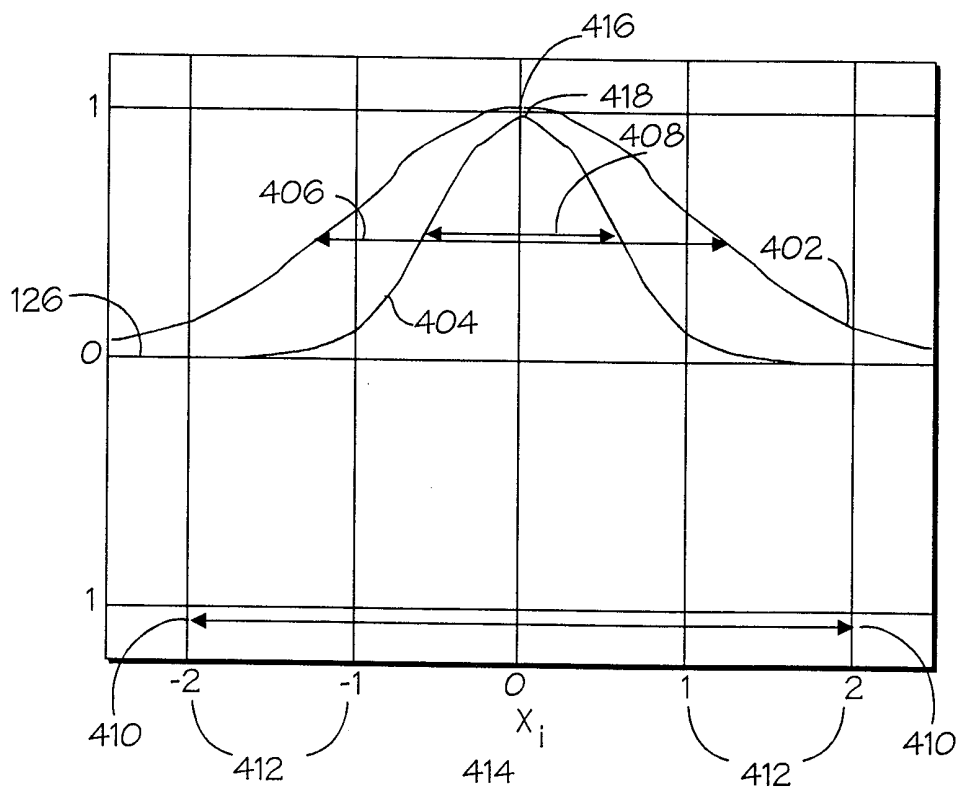
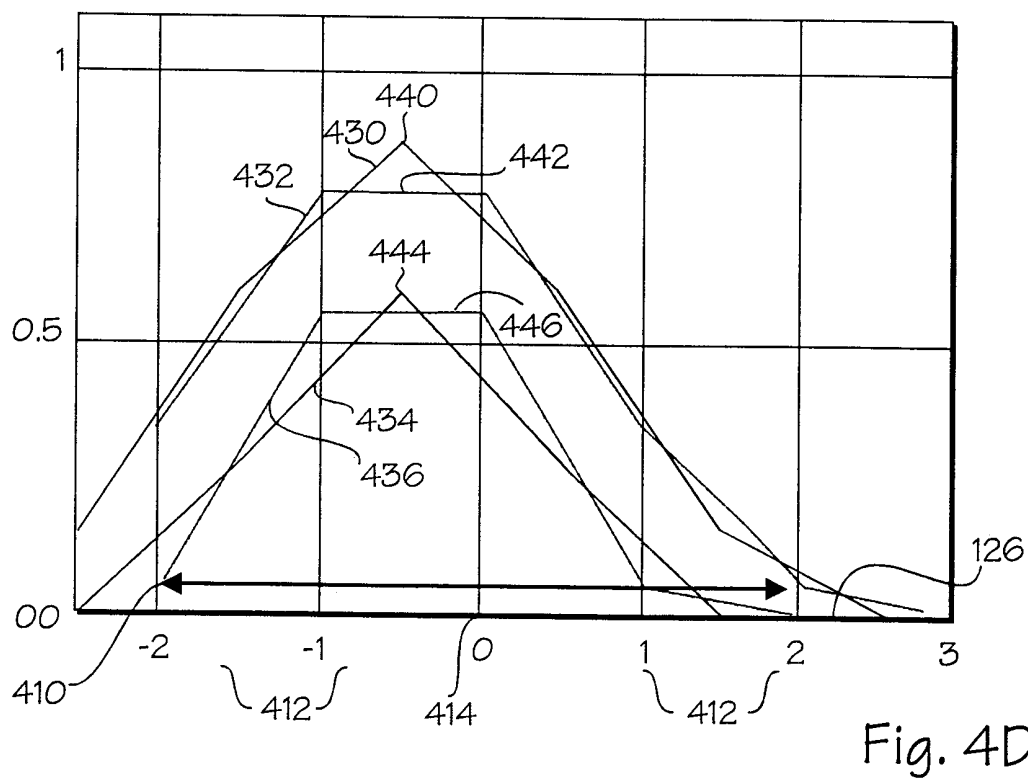
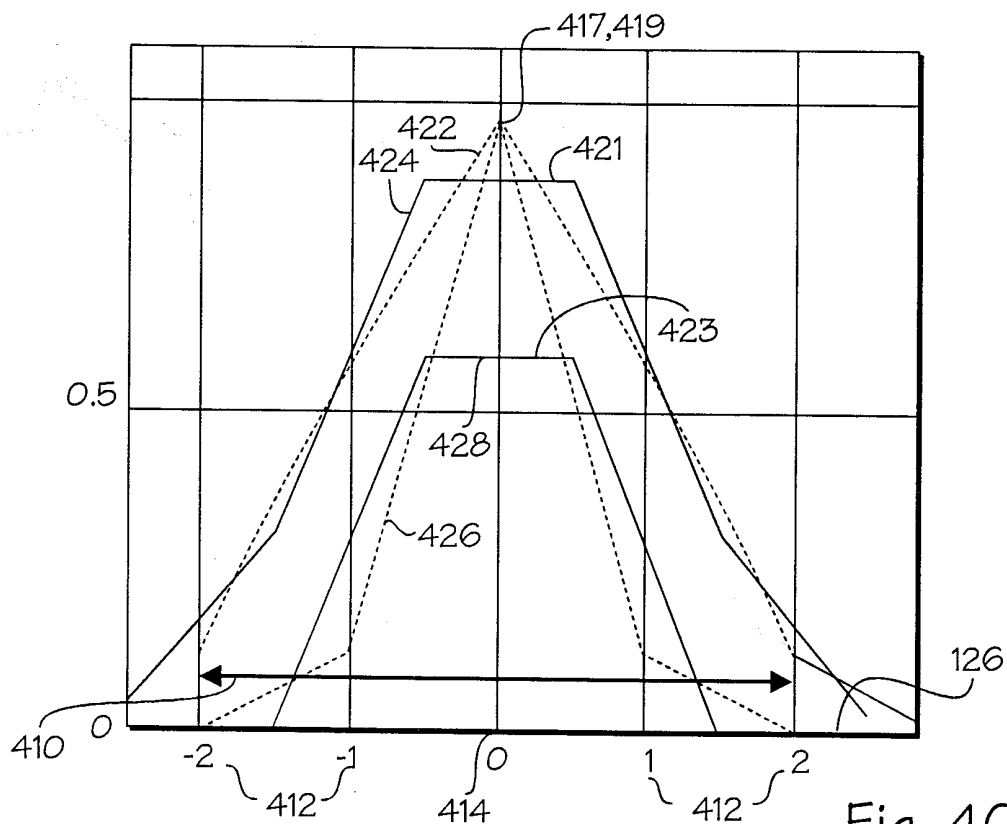


Fig. 4B



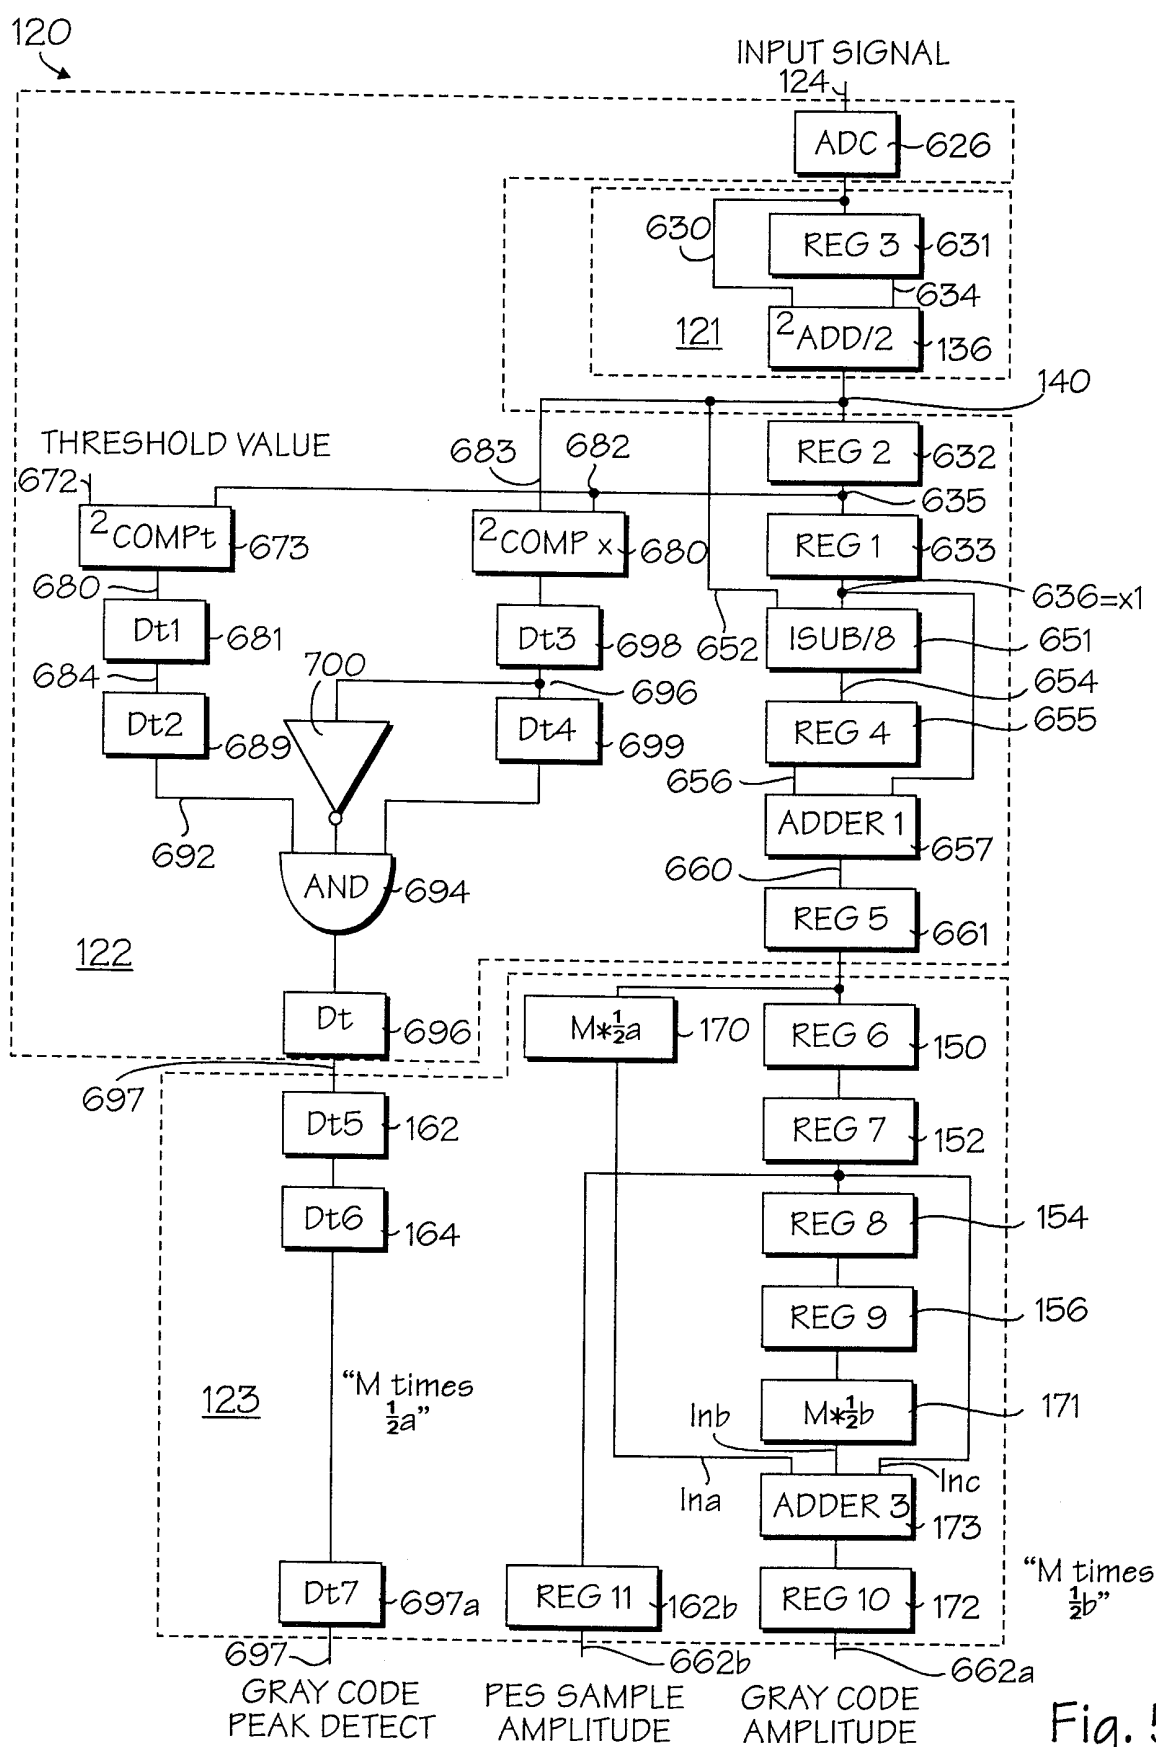


Fig. 5


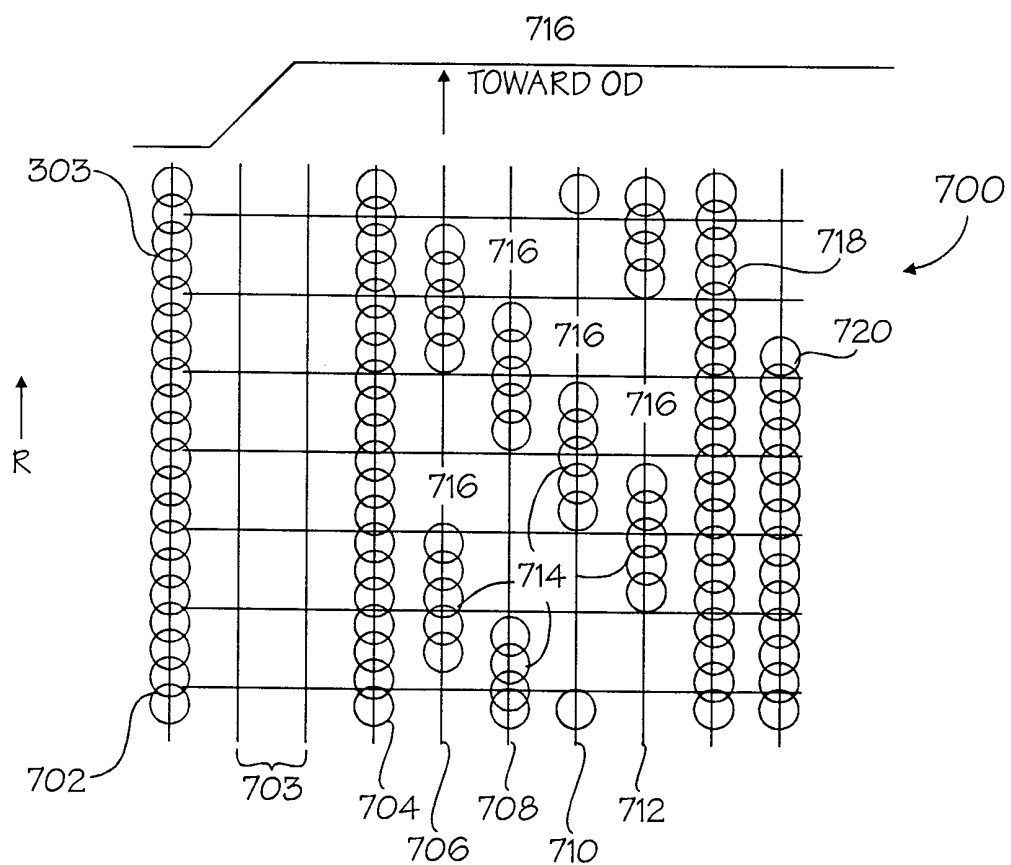


Fig. 9

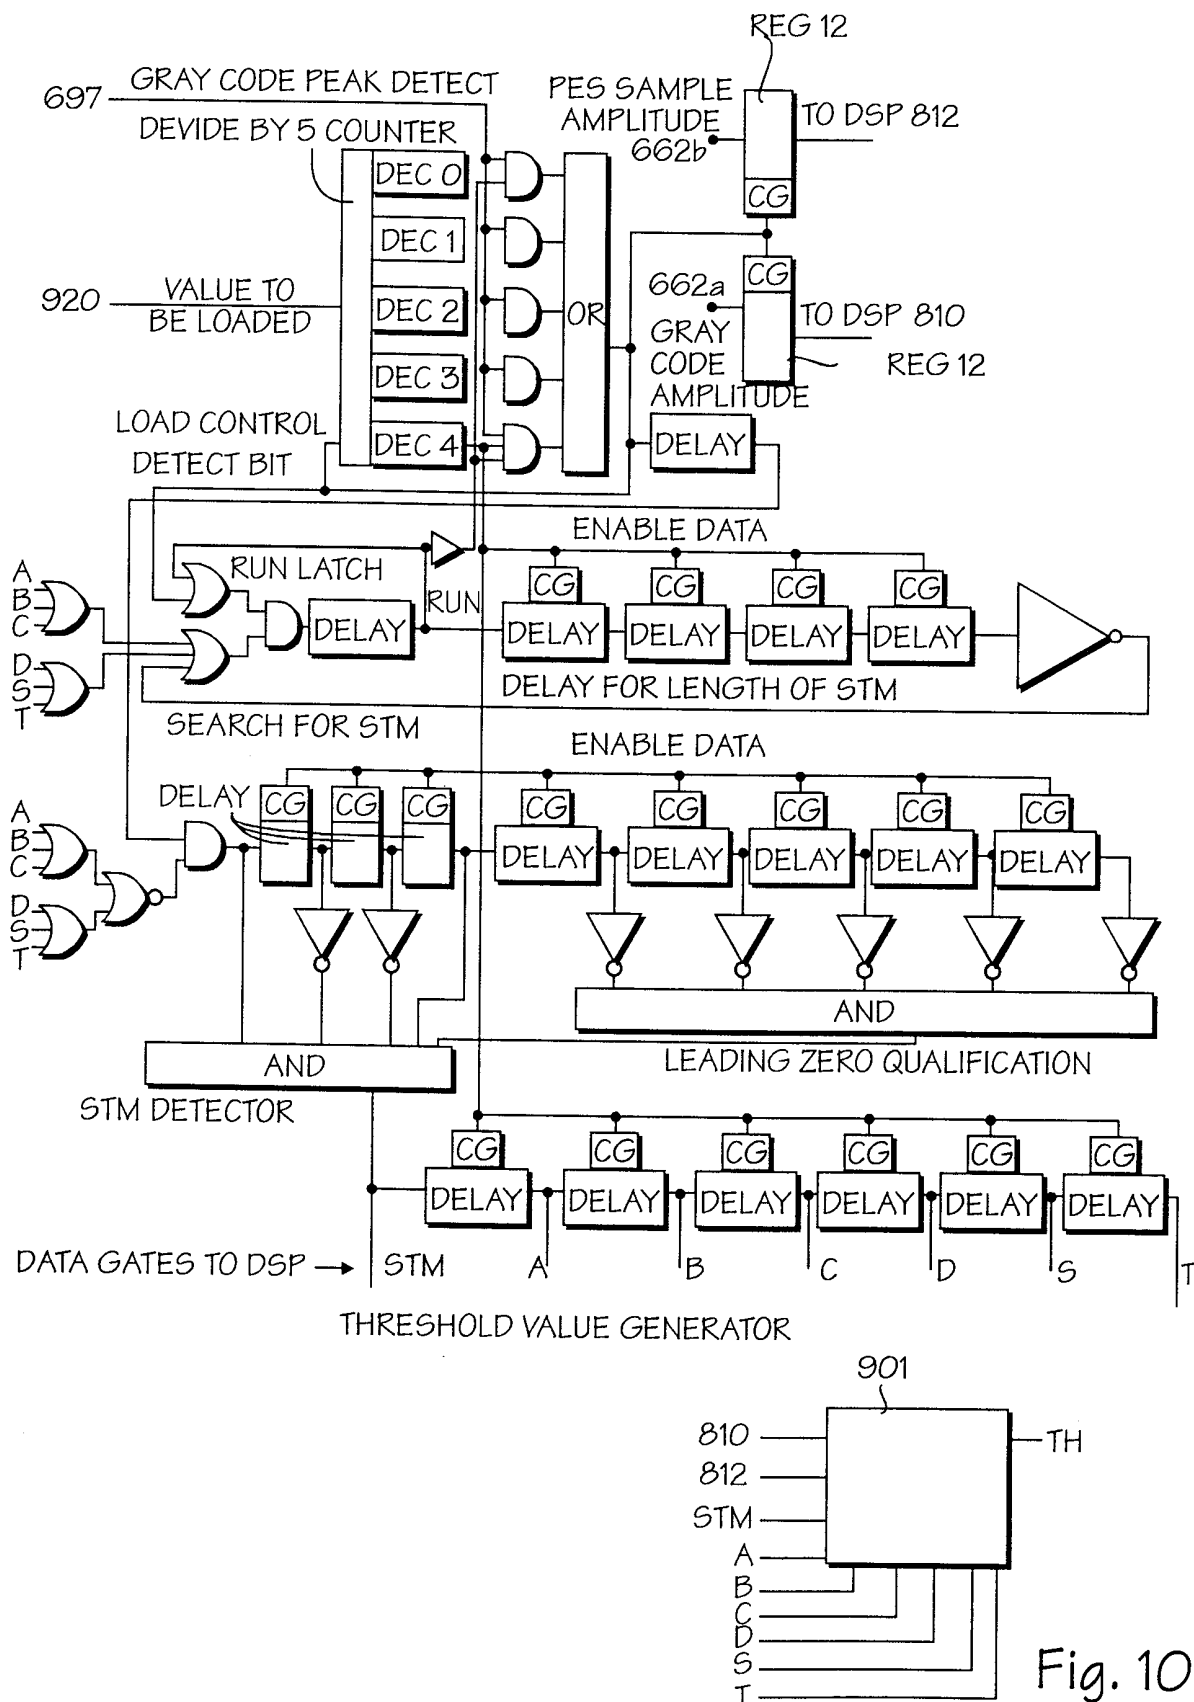

INTERNATIONAL SEARCH REPORT

In ternational Application No

PCT/US 99/02150

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 G11B20/10 G11B11/10 G11B7/00 G11B7/09 G11B21/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 508 993 A (HAYASHI HIDEKI ET AL) 16 April 1996	1,3
A	see claim 1	9
X	US 5 455 813 A (HAYASHI HIDEKI) 3 October 1995	1
A	see the whole document	3,9
A	EP 0 300 826 A (SHARP KK) 25 January 1989 see page 3, line 46 - page 7, line 8; figure 1	1,3,9
A	WO 93 23941 A (CIRRUS LOGIC INC) 25 November 1993 see page 6, line 22 - page 12, line 9; figures 4-11; tables 1,2	1,3,9
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

25 May 1999

Date of mailing of the international search report

02/06/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Brunet, L

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/02150

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 269 727 A (SILICON SYSTEMS INC) 16 February 1994 see figures 5,6 ----	1,3,9
A	US 5 321 559 A (NGUYEN HUNG C ET AL) 14 June 1994 see column 18, line 34 - column 19, line 31 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/02150

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5508993 A	16-04-1996	JP 7262694 A	13-10-1995
US 5455813 A	03-10-1995	JP 6195892 A	15-07-1994
EP 0300826 A	25-01-1989	JP 1025357 A	27-01-1989
		JP 1882789 C	10-11-1994
		JP 6009106 B	02-02-1994
		CA 1287882 A	20-08-1991
		DE 3882176 A	12-08-1993
		DE 3882176 T	10-02-1994
		US 4910517 A	20-03-1990
WO 9323941 A	25-11-1993	US 5329554 A	12-07-1994
		EP 0679309 A	02-11-1995
		JP 2865868 B	08-03-1999
		JP 7508149 T	07-09-1995
GB 2269727 A	16-02-1994	US 5311178 A	10-05-1994
		JP 6162680 A	10-06-1994
US 5321559 A	14-06-1994	EP 0595454 A	04-05-1994
		SG 46216 A	20-02-1998