



US 20140157538A1

(19) **United States**  
(12) **Patent Application Publication**  
**Jimenez et al.**

(10) **Pub. No.: US 2014/0157538 A1**  
(43) **Pub. Date: Jun. 12, 2014**

(54) **PERSONAL CARE IMPLEMENT HAVING A DISPLAY**

**Publication Classification**

- (71) Applicant: **COLGATE-PALMOLIVE COMPANY**, New York, NY (US)
- (72) Inventors: **Eduardo J. Jimenez**, Manalapan, NJ (US); **Dong Ho Yun**, Bayside, NY (US)
- (73) Assignee: **COLGATE-PALMOLIVE COMPANY**, New York, NY (US)

- (51) **Int. Cl.**  
*A46B 9/04* (2006.01)
- (52) **U.S. Cl.**  
CPC ..... *A46B 9/04* (2013.01)  
USPC ..... **15/167.1**


- (21) Appl. No.: **14/183,267**
- (22) Filed: **Feb. 18, 2014**

**Related U.S. Application Data**

- (63) Continuation of application No. 13/433,785, filed on Mar. 29, 2012, now Pat. No. 8,681,008, which is a continuation of application No. 11/853,078, filed on Sep. 11, 2007, now Pat. No. 8,159,352.

(57) **ABSTRACT**

A personal care implement or toothbrush includes a sensor for detecting a position of the toothbrush and orientation display for providing content to a user. The display may be configured to present content in a mirror-image format. The personal care implement may be configured to operate in one or more modes of operation. One or more components may be included for setting variables associated with the modes of operation, for changing an orientation of the displayed content between a mirror-image format and forward-facing format, and for changing the particular mode of operation.

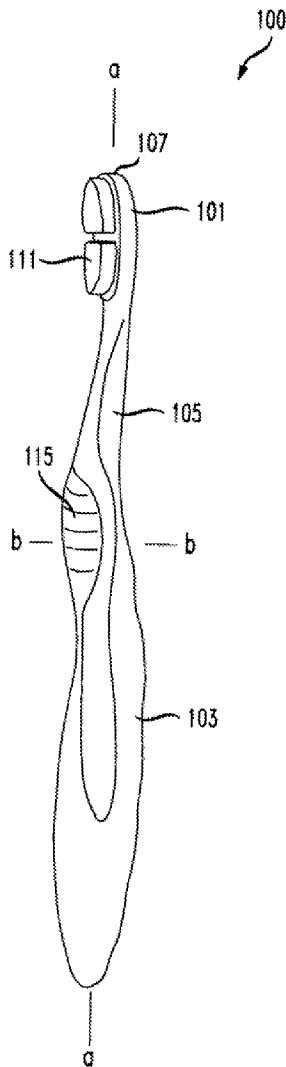

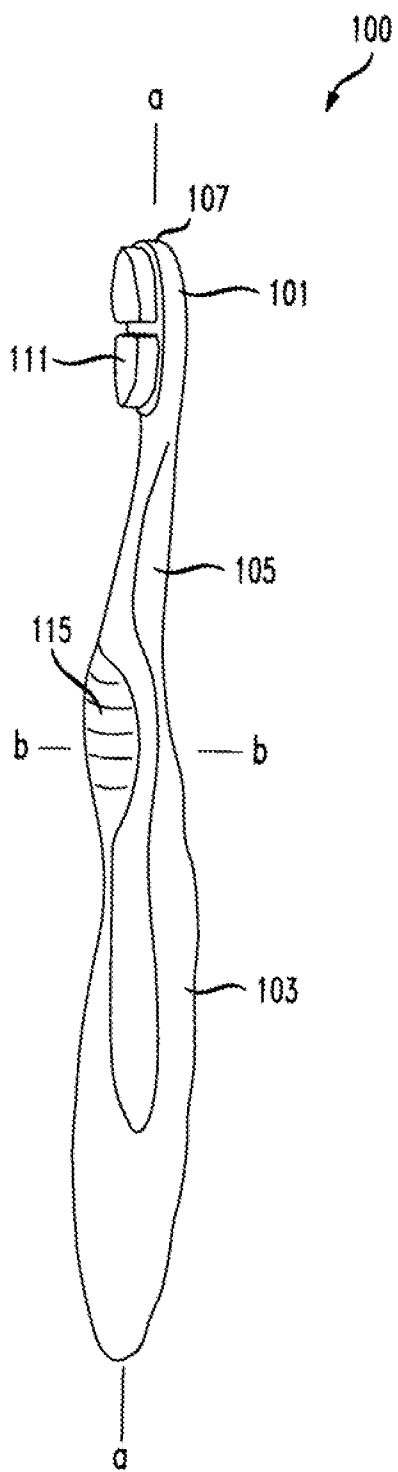


FIGURE 1A

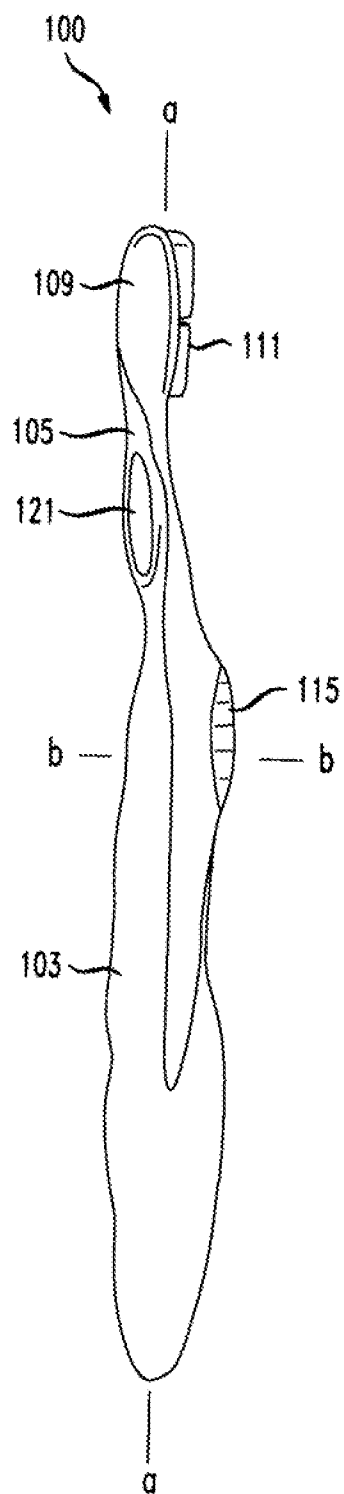


FIGURE 1B

FIGURE 2A

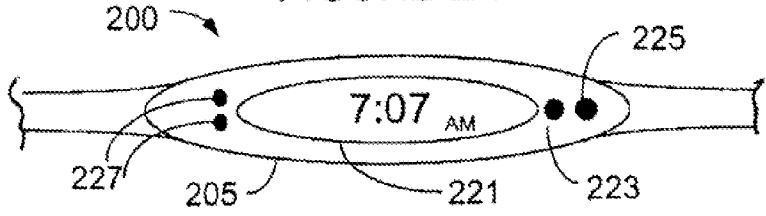


FIGURE 2B

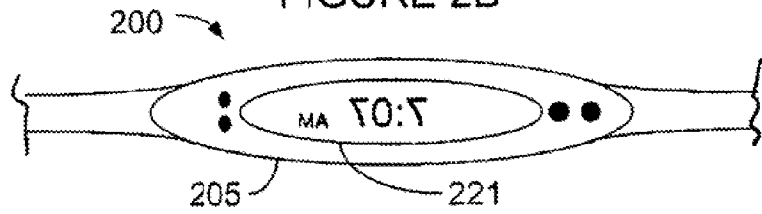


FIGURE 3A

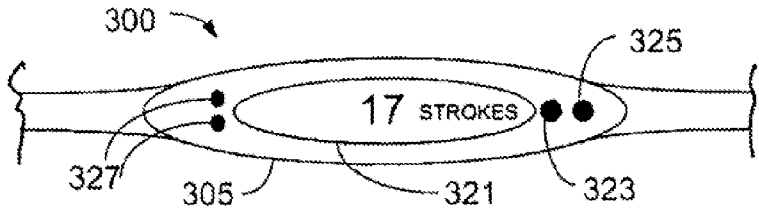


FIGURE 3B

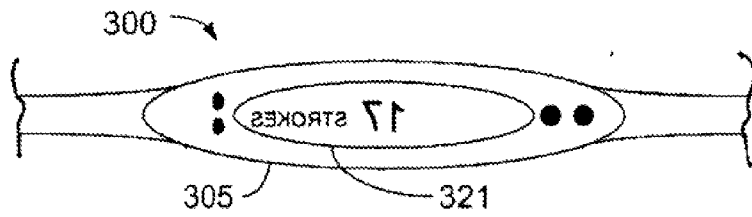


FIGURE 4A

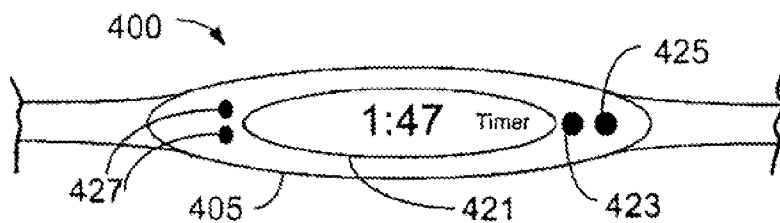


FIGURE 4B

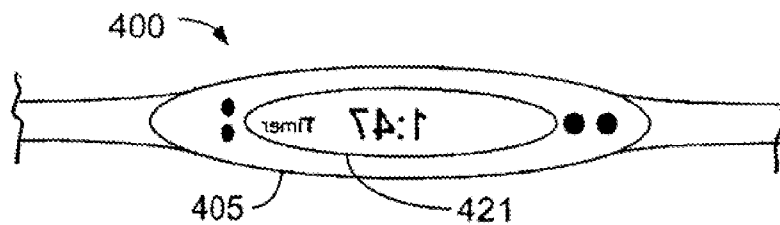


FIGURE 5

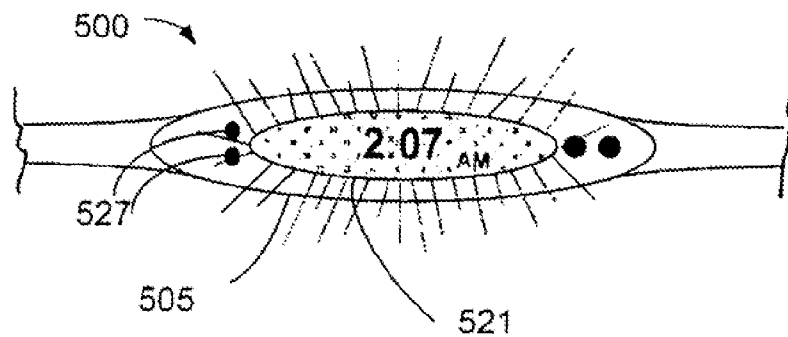


FIGURE 6A

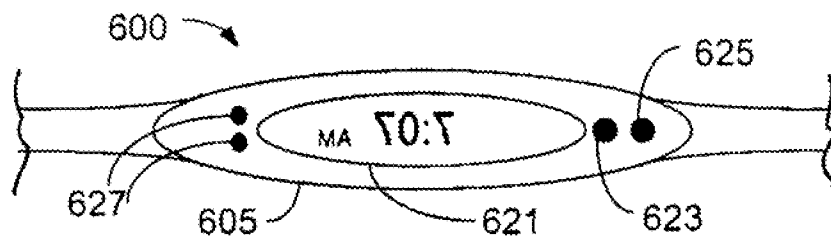
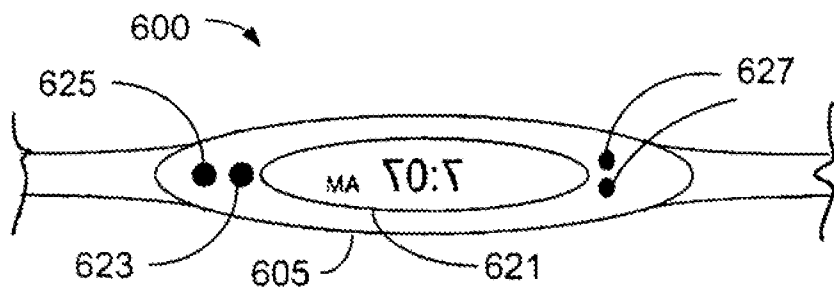


FIGURE 6B



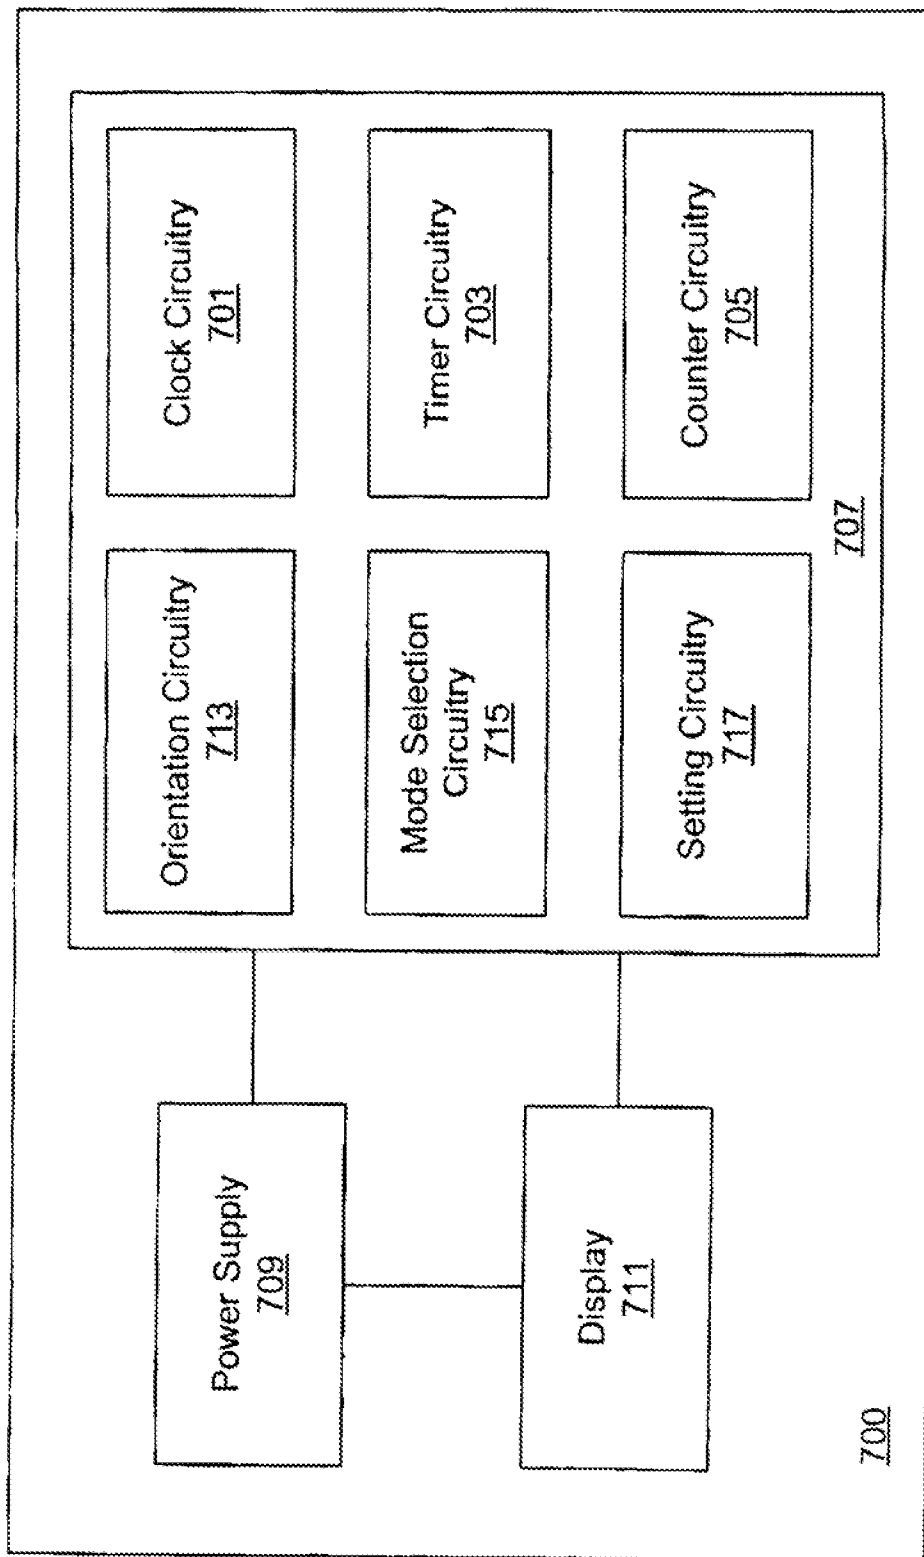


FIGURE 7

## PERSONAL CARE IMPLEMENT HAVING A DISPLAY

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a continuation of U.S. patent application Ser. No. 13/433,785, filed on Mar. 29, 2012, now allowed, which is a continuation of U.S. patent application Ser. No. 11/853,078, filed on Sep. 11, 2007, now U.S. Pat. No. 8,159,352, issued on Apr. 17, 2012, the contents of which is hereby incorporated by reference in their entireties.

### BACKGROUND OF THE INVENTION

[0002] The present invention pertains to a personal care implement, in particular, to a toothbrush with sensors. Tooth brushing is part of a daily oral hygiene activity. Dentists generally recommend that an individual brush his or her teeth for a minimum interval per cleaning, such as two minutes. Despite such recommendations, many individuals, especially young children, do not regularly brush their teeth for the recommended minimum interval.

### BRIEF SUMMARY OF THE INVENTION

[0003] The invention pertains to a personal care implement including a care region for engaging an anatomical region of an organism, a body for gripping the implement and a sensor to detect the position of the personal care implement.

[0004] In a further aspect, the sensor detects a rotation of the body about an axis normal to a longitudinal axis of the body.

[0005] In yet another aspect, the sensor is an accelerometer.

[0006] In another aspect, the personal care implement includes a display to provide information to a user of the implement.

[0007] In another aspect, the personal care implement may include at least one actuator configured to change a mode of operation of the oral care implement.

[0008] In yet another aspect, the implement may include at least one actuator configured to change an orientation of the content on the display of the oral care implement.

[0009] In another aspect, the implement includes a sensor configured to rotate the content being presented upon detection of a rotation of the oral care implement about an axis.

[0010] Other features and advantages of the invention will become apparent from the following description taken in conjunction with the following drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIGS. 1A-1B are perspective front and rear views of an oral care implement, such as a toothbrush, according to one or more embodiments of the invention;

[0012] FIGS. 2A-6B are enlarged views of the implement portions with a display; and

[0013] FIG. 7 is an example functional block diagram of components of the implement with an electronic display system according to one or more embodiments of the invention.

### DETAILED DESCRIPTION OF THE INVENTION

[0014] In the following description, the invention is discussed in terms of a toothbrush (e.g. a form of an oral care implement) but could be in the form of other personal care

implements, such as a hair dryer. The personal care implement is normally used by a human for personal hygiene. For example, a toothbrush can be used for personal hygiene, such as oral care purposes. Further, it is understood that other embodiments may be utilized and structural and functional modifications may be made without departing from the scope of the present invention.

[0015] FIGS. 1A-1B illustrate an oral care implement, such as a toothbrush, generally designated with the reference numeral **100**. The toothbrush **100** generally includes a head **102** and a handle **103**.

[0016] The handle **103** is generally an elongated member dimensioned so that a user can readily grip and manipulate the toothbrush **100**. The handle **103** may be formed of many different shapes, lengths and with a variety of constructions. In one construction, the handle **103** has a neck portion **105** positioned adjacent the head **101**. The neck portion **105** may be a narrowed region on the handle **103** between head **101** and the part of the handle normally gripped by the user. Nevertheless, the neck portion **101** could be the region between the head **101** and the part of the handle normally gripped by the user. In another construction, the handle **103** is integrally formed with the head **101**. Other attachment configurations also are possible.

[0017] The head **101** may include an oral care region comprising one or more tooth cleaning elements **111**. As used herein, the term “tooth cleaning elements” or “cleaning elements” includes any type of structure that is commonly used or is suitable for use in providing oral health benefits (e.g., tooth cleaning, tooth polishing, tooth whitening, massaging, stimulating, etc.) by making contact with portions of the teeth and gums. Such tooth cleaning elements include but are not limited to tufts of bristles that can be formed to have a number of different shapes and sizes and elastomeric cleaning members that can be formed to have a number of different shapes and sizes, or a combination of both tufts of bristles and elastomeric cleaning members.

[0018] In one construction, the one or more tooth cleaning elements **111** are formed from a plurality of bristles. Referring to FIGS. 1A-1B, the tooth cleaning elements **111** are bristle regions having different shapes, however, it is understood that a number of different configurations of oral care implements may be utilized. The one or more tooth cleaning elements **111** may be attached to the head **101** by known methods, such as being fit within recesses formed in the head **101** along a front portion **107** of the toothbrush **100** (FIG. 1A). The head **101** also may be configured to be detached from the neck **105** or handle **103** and replaced with a new head **101** when the previous head **101** wears out and should be replaced.

[0019] In another construction, toothbrush **100** may be a powered toothbrush including a power source that drives a powered element, such as movable cleaning elements **111** with an activation/deactivation or “on/off” button (not shown).

[0020] FIG. 1A illustrates a front portion **107** of the toothbrush **100** and FIG. 1B shows a rear portion **109** of the toothbrush **100**. In the illustrative FIGS. 1A-1B, a thumb gripping portion **115** is also shown. A user may hold the toothbrush **100** with their thumb resting on gripping portion **115**. Thumb gripping portion **115** may be formed of a pliable, cushioning material that is depressible as a user presses their thumb against it. In one or more constructions, as described herein, the thumb gripping portion **115** may serve as an actuator. For example, portion **115** may act as a button to turn

an electronic device associated with the toothbrush 100 “on” and/or “off,” a button to change a mode of operation of an electronic device associated with the toothbrush 100, and/or a button to change an orientation of the content of a display associated with the toothbrush 100.

[0021] Referring to FIG. 1B, display 121 presents symbolic or graphical content for viewing by a user. The symbolic or graphical content may include characters or images associated with digital data. In one construction, the content may include video clips or other moving images and characters for dynamic viewing by a user. Display 121 is disposed within the neck portion 105 on the back portion 109 of the toothbrush 100. In this arrangement, the oral care region is oriented in a first direction (e.g., extending away from the front portion 107) and the display is oriented in a second direction opposed to the first direction. Display 121 may be a liquid crystal display (LCD) or a light emitting diode (LED) type display among other types. For example, display may be an Organic LED that can be tuned to provide a desired luminescent characteristic such as color, temperature, intensity etc. OLED technology can be embedded into the toothbrush molding, or can be applied to the surface of the toothbrush body. It should be understood by those skilled in the art that the present invention is not limited to any particular type of display.

[0022] FIGS. 2A-6B illustrate alternative constructions of the oral care implement, generally designated with the reference numerals 200, 300, 400, 500, and/or 600, respectively. For ease of explanation, similar structures will be referred to with similar reference numerals, using a 200, 300, 400, 500, or 600 series numerals.

[0023] FIGS. 2A-2B illustrate a display region of a toothbrush according to one or more embodiments. As shown in FIG. 2A, a toothbrush 200 includes a display 221 disposed within the neck portion 205. Although shown in the neck portion 205, it should be understood that other areas of the toothbrush 200 may be utilized to house the display 221. For example, the display could be located in the handle region on the side opposite the tooth cleaning elements 111. As shown in FIG. 2A, the content of the display 221 refers to a time of day for clock reading, i.e., 7:07 AM. Display 221 may also present other content such as the current day, month, year, or century; future appointments or meeting reminders. In this arrangement, the display 221 functions as clock device or time piece.

[0024] As shown in FIG. 2A, toothbrush 200 may include two setting actuators 227. In this example, setting actuators 227 may be configured to allow a user to depress, or otherwise engage, one or more of the actuators 227 to set an hour and a minute for the time of day. A single actuator 227 and/or more than two actuators 227 may be utilized for toothbrush 200. For example, a third setting actuator 227 may be included to set the time with a designation of AM or PM.

[0025] One or more additional actuators may be included to perform a variety of functions. As shown in FIG. 2A, two additional actuators 223 and 225 are shown. In this example, actuators 223 and 225 may be push buttons. In other examples, actuators 223, 225, and 227 may be other types of input actuators. For example, they may be a switch or other type of input mechanisms or devices. In this example, actuator 223 may be a mode selection actuator. Actuator 223 allows a user to change the mode of operation of the display 221 to any of a number of different operations. For example, and as described with respect to FIGS. 2A and 2B, depression or other engagement of actuator 223 may change the mode of

operation to present a time of day or clock reading on the display 221. A subsequent engagement of actuator 223, may change the mode of operation to a stroke counter, as illustrated in the example shown in FIGS. 3A and 3B. A further subsequent engagement of actuator 223 may change the mode of operation to a countdown or count-up timer, as illustrated in the example shown in FIGS. 4A and 4B. Nevertheless, the specific order of the engagement events of the actuator 223, does not limit the scope of the invention.

[0026] In one construction, the presented content changes corresponding to the change in time when operating in a mode to display a time of day for clock reading on the display 221. In addition, the designation of AM may change to PM when the 12th hour of the day has been reached. Similarly, the PM designation may change to AM when midnight is reached. Although described herein as a clock reading, the display 221 in this mode of operation may present the current date or future date in lieu of, or in combination with the presented time.

[0027] Returning to the example in FIG. 2A, actuator 225 may serve as an orientation actuator for the content presented in display 221. In one operation, when display 221 is in a forward facing direction for viewing by the user, the content shown on the display 221 in FIG. 2A may be easily read in a left to right direction by the user (e.g., a forward-facing format). However, when the display 221 is in a rear-facing direction away from the user, the content is blocked from the view of the user. Furthermore, in the rear facing arrangement of display 221, when the content is viewed as an image on a reflective surface, the image of the display 221 is reversed with respect to the forward facing direction.

[0028] In a construction of toothbrush 200, upon depression or other engagement of the orientation actuator 225, the content presented on the display 221 is changed to a mirror-image of the original content. Accordingly, the original content shown in the display 221 in FIG. 2A is re-oriented or re-formatted to the content shown in FIG. 2B, where the content is now in a right to left direction. For example, in FIG. 2B, the time of 7:07 AM is still shown, but is now in a mirror-image format. The original content which would normally be read in a left to right direction in the English language is now presented in a right to left direction. In this example, when the content is reversed in the display 221 as seen in FIG. 2B (e.g., in a mirror-image format), the display can be clearly read as 7:07 AM when viewed as a reflected image from a mirrored surface. This configuration is helpful to a user when the display 221 is in a rear-facing direction, such as when the user is brushing in front of a mirror (e.g. a front facing toward a mirror). In this manner, the user can readily determine the information presented on the display by viewing the reflective image in the mirror without having to momentarily stop brushing. Nevertheless, upon depression/engagement of orientation actuator 225, the content in mirror-image format may change to that shown in FIG. 2A for forward face viewing by the user. While the discussion refers to the English language reading direction, the inventive aspects may be practiced in other languages as well, such as Spanish, French, Chinese, Arabic, Russian, French, etc.

[0029] FIGS. 3A-3B illustrate another construction of a toothbrush 300 in which the content relates to a stroke counter. In FIG. 3A, toothbrush 300 includes a display 321 disposed in the body or a neck portion 305 of the toothbrush 300. The stroke counter mode of operation may be obtained by depression of one of the actuators. In this example, upon



engagement of actuator **323**, a user may switch from the time of day operation mode to the stroke counter operation. In the stroke counter mode, the number of brush strokes is tracked and counted by the toothbrush **300**. By using actuators **327**, a user may set a target number of strokes to be counted before an alarm (e.g., a sound or visible notification) is activated and/or the user may set a number of strokes to be counted down before an alarm is deactivated. Different stroke counts may be implemented at one time. For example, a user may track the total number of brush strokes, while also independently tracking the number of strokes in a particular area of his or her mouth. The information may be stored separately to allow a user to monitor his or her brushing habits.

**[0030]** Similar to the mirror-image format of content in FIG. 2B, FIG. 3B illustrates a mirror-image format of the stroke count. Upon depression or other engagement of actuator **325** in FIG. 3A, the content of display **321** may be reversed to show the stroke count, i.e., "17 strokes". A user can readily read at any time how many strokes have been counted or how many strokes remain to be counted via the reflection of the display **321** in a mirrored surface. Any number of different configurations of stroke counting or countdown may be implemented in accordance with aspects of the illustrative embodiments.

**[0031]** FIGS. 4A-4B illustrate another construction of a toothbrush **400** in which the content is a count up or countdown timer. In FIG. 4A, toothbrush **400** includes a display **421** disposed in body or a neck portion **405** of the toothbrush **400**. The timer mode of operation may be obtained by depression of one of the actuators. In this example, upon depression of actuator **423**, a user may switch from the stroke counter mode of operation to the timer mode of operation. In the timer mode of operation, the toothbrush **400** may act as a device to count up to a certain time or to count down from a certain time. This may be useful to individuals who strive to brush their teeth for the recommended total of at least two minutes, twice a day. In one example, an alarm may be configured to alert the user upon the timer reaching the specified end time.

**[0032]** Similar to the mirror-image format of the content in FIGS. 2B and 3B, FIG. 4B illustrates a mirror-image format of the elapsed or remaining brushing time. Upon depression of actuator **425** in FIG. 4A, the content to display **421** may be reversed to show 1:47 in mirror-image format. A user can readily determine how much time remains, whether counting down to zero or counting up to a particular end time, by viewing the display **421** as a reflection in a mirror. Any number of different configurations of counting up or counting down may be implemented in accordance with aspects of the illustrative embodiments.

**[0033]** FIG. 5 illustrates another construction of a toothbrush **500**. In FIG. 5, toothbrush **500** includes a display **521** disposed in body or a neck portion **505** of the toothbrush **500**. In this example, display **521** includes a backlight feature. For example, OLED technology could be used in display **521** of toothbrush **500**. With this feature, the toothbrush **500** may act as a nightlight during certain configurable times of day. As shown in FIG. 5, the backlight of display **521** is illuminated at 2:07 AM. A user may use the illuminated light from the backlight of the display **521** to see around a darkened room for orientation and may be able to tell the time at the same time. This feature may be implemented by depression or other engagement of one of the actuators.

**[0034]** In this example, a user may set the time period in which he/she desires the backlight to be in operation. For

example, utilizing actuators **527**, a user may set the backlight to operate between one or more predefined time periods, such as 11:00 PM to 6:00 AM, although it should be understood that any of a number of other settings may be configured. In an alternative embodiment, a light detection sensor may be included within the toothbrush **500** to detect the ambient light around the toothbrush **500**. In one example, the sensor may be a photodiode or photoconductive sensor enabled read a light level of 0 to 100 Foot-Candles (FC). Upon falling below a particular lighting threshold, the toothbrush **500** may then automatically initiate operation of the backlight on the display **521**. The body of the toothbrush **500** may have a small window (e.g., clear plastic) which receives ambient light for the sensor. For example, the window may be part of display **521** and the sensor may be provided in combination with the display **521**.

**[0035]** FIGS. 6A-6B illustrate another construction of a toothbrush **600**. As shown in FIG. 6A, toothbrush **600** includes a display **621** disposed in a body or in a neck portion **605** of the toothbrush **600**. In this example, the user may operate the toothbrush **600** in a time of day or clock reading mode of operation. Such may be the case where a user has depressed one or more of actuators **623**, **625**, and/or **627**. As shown, the content of the display **621** is in a mirror-image format so the user may readily read the content as a reflection in a mirror. Referring to FIGS. 1A and 6A, the content is shown in which the graphic characters are presented along a longitudinal axis (a-a shown in FIG. 1A) of the display **621** and of the toothbrush **600**. The toothbrush may be rotated clockwise or counter-clockwise about an axis b-b transverse to the longitudinal axis a-a of the toothbrush as shown in FIG. 1A. If the user rotates the toothbrush counter-clockwise 180° about axis b-b, the content of display **621** would be displayed upside down.

**[0036]** Referring to FIG. 6B, when toothbrush **600** is rotated 180° counter-clockwise, the content of display **621** also flips or rotates to maintain the mirror-image format. Therefore, when looking at the reflection of the display **621** in a mirror, a user may properly see the time or other information. Any of a number of different mechanisms may be utilized to track the position of the display and/or toothbrush. For example, a sensor, such as a gyroscopic sensor or an accelerometer, built into the toothbrush **600** may detect the relative change in position of the toothbrush **600** from a first state, to a second state, in which the toothbrush **600** has been rotated 180°. As should be understood, although described with respect to the time of day mode of operation, the description with respect to FIGS. 6A and 6B may be implemented with respect to other modes of operation of the toothbrush.

**[0037]** Referring to FIG. 6B, in an alternative construction, an accelerometer utilizing Micro-Electronic Mechanical System (MEMS) technology could be embedded in the toothbrush during molding, or could take the form of a sticker applied on the toothbrush body. A MEMS accelerometer device generates a signal representative of acceleration in a particular direction ("measurement direction"). The MEMS accelerometer detects gravitational force when not in motion. Accordingly, different altitudes of the MEMS accelerometer device with respect to the vertical can result in different readings which depend on the coincidence of the measurement direction with the direction of the gravitation pull. The detection of different altitudes may be used to detect the position of the toothbrush and the relative change in position from a first state or second state as discussed above.

**[0038]** As described herein with respect to FIG. 7, a control system 707 of the toothbrush 100 may be included to provide content or image data for the display 121. FIG. 7 illustrates a block diagram of components in one or more constructions of toothbrush 100. One or more of the components shown in FIG. 7 may be included within one or more printed circuit boards. Toothbrush 700 includes control system 707, a power supply operatively connected to one or more elements of the system 707; and a display 711 operatively connected to one or more components of the system 707. Power supply 709 may include one or more power components, such as a battery or a wired connection to a power source, providing for electrical power to electrical components of the toothbrush 700.

**[0039]** Clock circuitry 701 may include hardware, software, computer-readable instructions, or other components to allow for tracking of the time of day and/or time of year and for outputting such information in a suitable form for use by the display 711. As such, clock circuitry 701 may include a crystal oscillator for counting seconds. Clock circuitry 701 may be configured to perform the functions for processing signal(s) performing computer-readable instructions, and reading from and writing to a memory (not shown) associated with the toothbrush 700 operating in a clock mode.

**[0040]** Timer circuitry 703 may include hardware, software, computer-readable instructions, or other components to allow for counting up or counting down time and for outputting such information in suitable form for use by the display 711. Timer circuitry 703 may include a crystal oscillator for counting seconds, minutes, etc. Timer circuitry 703 may be configured to perform the functions for processing signal(s) performing computer-readable instructions, and reading from and writing to a memory (not shown) associated with the toothbrush 700 operating in a timer mode.

**[0041]** Counter circuitry 705 may include any hardware, software, computer-readable instructions, or other components to allow for counting up or counting down strokes of the toothbrush 700 and for outputting such information in suitable form for use by the display 711. As such, counter circuitry 705 may include a sensor for detecting movement of the toothbrush. Counter circuitry 705 may be configured to perform the functions for processing signal(s), performing computer-readable instructions, and reading from and writing to a memory (not shown) associated with the toothbrush 700 operating in a stroke counter mode.

**[0042]** Orientation circuitry 713 may include hardware, software, computer-readable instructions, or other components to allow the content of display 711 to be selectively presented in a mirror-image format or forward-facing format, and for outputting such information in suitable form for use by the display 711. For example, orientation circuitry 713 may receive and process an input signal to cause display 711 and/or clock circuitry component 701, timer circuitry component 703, and/or counter circuitry component 705 to display an image on display 711. Orientation circuitry 713 may be configured to perform the functions for processing signal(s) performing computer-readable instructions, and reading from and writing to a memory (not shown) associated with the toothbrush 700 switching between a reversed content display and a non-reversed content display.

**[0043]** Mode selection circuitry 715 may include electrical circuitry, software, computer-readable instructions, or other components to allow for changing the mode of operation of the toothbrush 700. For example, mode selection circuitry 715 may receive and process an input signal to change the

mode of operation from time of day mode of operation to timer mode of operation. Mode selection circuitry 715 may be configured to perform the functions for processing signal(s) performing computer-readable instructions, and reading from and writing to a memory (not shown) associated with the toothbrush 700 switching between different modes of operation.

**[0044]** Setting circuitry 717 may include electrical circuitry, software, computer-readable instructions, or other components to allow for setting one or more features of the toothbrush 700. For example, setting circuitry 717 may receive and process an input signal to set one or more features, such as the time of day, the month or year, the time to count up to, the time to count down from, the strokes to count up to, and/or the strokes to count down from. Setting circuitry component 717 is configured to perform the functions for processing signal(s) performing computer-readable instructions, and reading from and writing to a memory (not shown) associated with setting features of the toothbrush 700.

**[0045]** The inventive aspects may be practiced for a manual toothbrush or a powered toothbrush. While the various features of the toothbrush 100 work together to achieve the advantages previously described, it is recognized that individual features and sub-combinations of these features can be used to obtain some of the aforementioned advantages without the necessity to adopt all of these features.

**[0046]** It is understood that designations such as “first” and “second” are for illustrative purposes and can be interchanged. Further, a care region, such as a personal care region or oral care region, may engage a particular anatomical portion or region of an organism, such as a human body or mammal. The engagement may be physical abutment of the care region of the implement or movement a fluid, such as air or liquid, coming from the care region. In another example, the care region may have light coming from the region which contacts the user’s anatomical portion. In one example, an oral care region may have cleaning elements or may direct a form of ultraviolet light to clean/whiten the teeth of a user. In a hair dyer example (e.g., a form of a personal care implement), a personal care region may include a comb or nozzle for directing forced air—heated or unheated onto a user’s head, such as hair.

**[0047]** While the invention has been described with respect to specific examples including presently preferred modes of carrying out the invention, those skilled in the art will appreciate that there are numerous variations and permutations of the above described systems and techniques. Thus, the spirit and scope of the invention should be construed broadly as set forth in the appended claims.

I claim:

1. A personal care implement defining a longitudinal axis and comprising:

- a head;
- a handle coupled to the head by a neck portion;
- a display configured to present visual content for viewing by a user;
- a sensor arranged on the personal care implement and configured to detect a relative change in orientation of the personal care implement about an axis normal to the longitudinal axis; and
- a control system operatively connected to the sensor and the display, wherein the control system is configured to receive and process signals from the sensor indicative of the relative change in orientation of the personal care

implement, and wherein the control system is configured to change the visual content on the display depending on the detected orientation of the personal care implement.

2. The personal care implement of claim 1, wherein the sensor is selected from the group consisting of an accelerometer, a gyroscopic sensor, a MEMS accelerometer device, and a combination thereof.

3. The personal care implement of claim 1, wherein the personal care implement comprises a toothbrush and the head includes tooth cleaning elements extending therefrom in a first direction.

4. The personal care implement of claim 3, wherein the display is oriented in a second direction opposed to the first direction.

5. The personal care implement of claim 3, wherein the display is included within the neck portion of the toothbrush.

6. The personal care implement of claim 3, further comprising a second sensor configured to track a number of brushing strokes of the toothbrush, wherein the second sensor is operatively connected to the control system, wherein the control system is configured to receive and process signals from

the second sensor and output to the display a counted or remaining number of brushing strokes during a brushing session.

7. The personal care implement of claim 6, wherein the control system actuates an alarm upon the number of brushing strokes reaching a predetermined threshold.

8. The personal care implement of claim 1, further comprising an actuator configured to change a mode of operation of the display.

9. The personal care implement of claim 8, wherein the mode of operation of the display comprises at least two of a clock mode, a timer mode, and a counter mode.

10. The personal care implement of claim 9, wherein when the mode of operation of the display is in the clock mode, a time of day is displayed on the display, wherein when the mode of operation of the display is in the timer mode, a timer is displayed on the display, and wherein when the mode of operation of the display is in the counter mode, a stroke counter is displayed on the display.

11. The personal care implement of claim 8, further comprising an alarm associated with the change of the mode of operation of the display.

\* \* \* \* \*