

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number
WO 01/22647 A1

(51) International Patent Classification⁷: H04L 1/20,
H04B 17/00, 7/005

S-224 68 Lund (SE). STENSTRÖM, Niklas; Fågelsångsgatan 27, S-252 20 Helsingborg (SE).

(21) International Application Number: PCT/EP00/08610

(74) Agent: BOESEN, Johnny, P.; Hofman-Bang A/S, Hans Bekkevolds Allé 7, DK-2900 Hellerup (DK).

(22) International Filing Date:
1 September 2000 (01.09.2000)

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(25) Filing Language: English

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

(26) Publication Language: English


[Continued on next page]

(30) Priority Data:
99610054.1 17 September 1999 (17.09.1999) EP

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventors: KHULLAR, Anders; Trastvägen 20, S-237 37 Bjärred (SE). LINDOFF, Bengt; Klarinetgränden 3B,

(54) Title: METHOD FOR ESTIMATING RESIDUAL NOISE IN A SIGNAL AND APPARATUS UTILIZING THIS METHOD

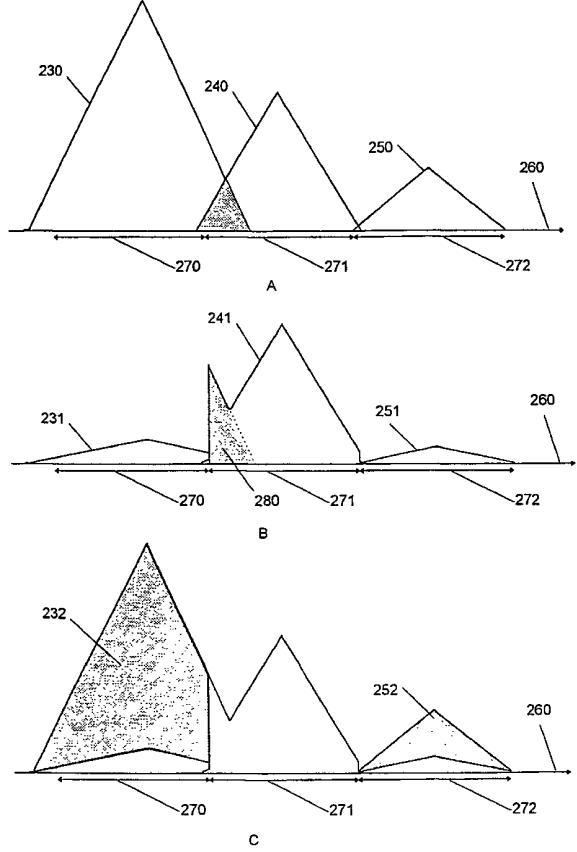

(57) Abstract: The invention relates to: a method for estimating residual noise in the frequency range (271) of a desired part (240) of a signal to a corresponding apparatus and to a mobile telephone utilizing the method. The object of the present invention is to generate a measure for the residual noise in a signal. The problem is solved in that the amplitude of the signal (114) comprising the noise is modified, and the signal (114) is combined with the modified signal (115) to create a noise estimation measure (116). The invention may e.g. be used in digital radio communications systems to contribute to the monitoring of link quality and therefore to improve payload throughput. One of the advantages of the invention is that an indication of link quality at an early stage in the receiver is provided.

WO 01/22647 A1



IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *With international search report.*

METHOD FOR ESTIMATING RESIDUAL NOISE IN A SIGNAL AND APPARATUS UTILIZING THIS METHOD

5 The Technical Field of the Invention:

This invention relates to the estimation of residual noise in a signal. The invention may e.g. be applied for the estimation of link quality in a digital radio 10 communications system.

The invention relates specifically to: A method for estimating residual noise in the frequency range of a desired part of a signal.

15 The invention furthermore relates to: An apparatus for estimating residual noise in the frequency range of a desired part of a signal.

20 The invention moreover relates to: A mobile telephone utilizing the method.

Description of Related Art:

25 The following account of the prior art relates to one of the areas of application of the present invention, cellular digital radio communications systems.

30 Technologies for evolving cellular systems from being dominated by voice telephony to systems being capable of handling large amounts of data as well are being developed. One of the requirements of next-generation cellular systems is the ability to provide mobile access 35 to the Internet using World Wide Web (WWW) applications,

in other words to facilitate 'high speed' packet oriented data transfer.

One such so-called 3rd generation system, is the EDGE system (EDGE = Enhanced Data rates for Global TDMA Evolution, where TDMA = Time Division Multiple Access (or alternatively EDGE = Enhanced Data rates for GSM Evolution)). The EDGE system represents a convergence of the US TDMA system called TIA/EIA-136 and the European 10 GSM system making possible the provision of wireless TDMA-based high data rate packet services for mobile users. A standard based on the EDGE concept, termed UWC-136, has been developed/approved by the European Telecommunications Standards Institute (ETSI) and by the 15 Telecommunications Industry Association (TIA) in North America. Other 3rd generation systems, based on CDMA (Code Division Multiple Access), are likewise in the development phase: cdma2000 (specified by the (TIA)) and WCDMA (specified by ETSI). Under the name IMT-2000 (IMT = 20 International Mobile Telecommunications) these three systems constitute the technology platforms of the International Telecommunications Union (ITU) for 3rd generation mobile communications systems.

25 On the air interface, GSM (and EDGE) relies on a combination of TDMA and Frequency Division Multiple Access (FDMA) in that a multitude of time slots (8 time slots = 1 TDMA frame) is mapped on a multitude of carrier frequencies (for GSM, 125).

30

In the first generation GSM system a data rate of 9.6 kbit/s based on circuit switching was provided using GMSK channel modulation (GMSK = Gaussian Minimum Shift Keying), each channel having a spacing between carriers 35 of 200 kHz. The General Packet Radio Service (GPRS) for GSM constitutes an intermediate step in the development

path towards providing high speed packet mode data transfer for mobile users. GPRS provides peak user data rates between 9 kbit/s and 170 kbit/s by means of time slot concatenation (up to 8) and variable channel coding 5 (4 different). The GPRS protocol and service capabilities are reused in the EDGE system. The EDGE concept improves the data rates, among other things by means of higher level channel modulation and a higher symbol rate. Using 8-PSK modulation (PSK = Phase-Shift Keying), a symbol 10 rate of 3 bits per modulated symbol, and multislot operation, a three-fold increase in user bit rate compared to GPRS may be achieved. A data rate of e.g. 384 kbit/s may be achieved with the same 200 kHz carrier spacing and TDMA frame structure and by combining several 15 (up to 8) time slots. The improvement in data rate comes at the cost of a greater sensibility to noise, including disturbances from adjacent channels (adjacent channel interference). The maximum achievable data rate will generally depend on mobile speed and system load.

20

A digital radio receiver can be regarded as an analogue radio front-end, followed by an AD-converter. A cellular, digital radio system such as GSM or EDGE consists of several frequencies, channels, within the allocated 25 frequency band. For communication, the selected channel needs to be filtered out and it is an advantage to do this in the digital domain. Digital filters are easy to reprogram, inexpensive and do not have filter parameters varying with temperature and voltage.

30

For a GSM channel using GMSK modulation it is OK to filter hard (i.e. e.g. to use a filter with a slightly narrower bandwidth than the 200 kHz carrier spacing of a 35 GSM channel). This is, however, not the case for a corresponding EDGE channel using 8-PSK modulation and an EDGE receiver will consequently have more problems with

adjacent channel interference compared to an ordinary GSM receiver. This type of modulation will also be more sensitive to noise than for example GMSK. Thus: A compromise must be made between the wish to have a 5 broadband filter to include all information and the wish to avoid noise from adjacent channels.

Consequently, a system such as EDGE will depend on an LQC system (LQC = Link Quality Control) to optimise system 10 throughput.

The Quality of Service (QoS) of a digital wireless communications system may be largely related to three areas, namely call handling quality, communication 15 quality and coverage quality. The present invention, when used in a cellular communications system, is primarily related to communication quality, i.e. to such effects as radio channel impairment, transmission delay, echo, background noise, etc. For data transmission, the 20 communication quality may be quantified based on bit error rate and transmission delay. For packet oriented data transmission, bit error rate can be kept low by means of retransmission, resulting, however, in increasing delay and decreasing throughput. To optimize 25 channel throughput, it is therefore of great importance to be able to (dynamically) evaluate the channel quality, and, based hereon, to adjust the essential transmission parameters to the quality of the radio channel.

30 The measurement and reporting of the current link quality are thus most critical tasks that need to be carefully addressed. A report of the presence of a strong interferer would impact the data transmission rate, the amount of error correction overhead, or ultimately result 35 in the choice of a more robust modulation or coding scheme (e.g. from 8-PSK to GMSK channel modulation).

Summary:

It is an object of the present invention to generate a measure for the residual noise in a signal.

5

This is achieved according to the invention in that the amplitude of the signal comprising the noise is modified, and the signal is combined with the modified signal to create a noise estimation measure, as disclosed in claim

10 1.

In the present context the term 'noise' is taken to mean random noise as well as disturbances from other sources. When referred to the application of the invention in a 15 cellular communications system, the term 'noise' includes disturbances from adjacent channels (adjacent channel interference) or from channels using the same channel frequency as the 'selected' or 'desired' one in another cell (co-channel interference).

20

The residual noise estimate is based on the assumption that the amount of signal components present in the frequency ranges outside that of the desired frequency range (e.g. that of the selected channel of a cellular 25 communications system) is a measure for the amount of 'noise' present inside the desired frequency range. The usefulness of the resulting noise measure will in general depend on the structure of the signal. For signals representing the potentially overlapping channels of a 30 communications system and the like, where disturbances from 'adjacent channels' are of major concern, the measure is obtained in a simple way and very useful as an indicator of channel quality.

35 When, as disclosed in claim 2, the noise estimation measure is based on the average power content of the

signal and the modified signal over their frequency spectra, it is ensured that a simple measure for comparing the signals based on well known measurement techniques is provided. Alternatively, the noise estimation measure could be based on the gradient of average power (i.e. the changes over time) of the signals in question or on any other appropriate method.

When, as disclosed in claim 3, the noise estimation measure is based on the average power content of the signal and the modified signal over one or more common ranges of their frequency spectra, it is ensured that a simple measure for comparing the signals is provided, and that the measurement may be concentrated to a relevant part of the frequency range, e.g. the frequency range outside the desired part of the signal.

When, as disclosed in claim 4, the signal is attenuated primarily outside the frequency range of the desired part of the signal, it is ensured that the modification of the signal outside the desired frequency range may be performed in a simple way e.g. by using a filter. The attenuation may e.g. be achieved by means of a bandpass filter that passes the desired frequency range (ideally) unchanged and attenuates all other frequencies. Or, alternatively, it may consist of a low-pass filter, if the desired frequency range is located from a certain frequency and downwards, or of a high-pass filter, if the desired frequency range is located from a certain frequency and upwards. The modification may, however, alternatively take any other appropriate form. It may e.g. consist of an amplification of the signal outside the desired frequency range e.g. by means of one or more frequency selective amplifiers tuned to the relevant frequencies.

When, as disclosed in claim 5, the noise estimation measure is based on the difference in average power content between the signal and the modified signal, it is ensured that a simple method for comparing the signals is 5 provided.

When, as disclosed in claim 6, the signal is a digital signal, it is ensured that the measure and the following processing are more stable over time and against 10 environmental influences, which further promises better performance and lower equipment production costs than corresponding functionality implemented in traditional analogue techniques.

15 When, as disclosed in claim 7, the signal is attenuated primarily outside the frequency range of the desired part of the signal by means of a digital filter, it is ensured that a cost-effective and flexible solution that is readily adapted to changes is achieved.

20 When, as disclosed in claim 8, the noise estimation measure is quantized in a number of different levels each indicating different levels of noise present, it is ensured that the measure may be used to quantify the 25 amount of undesired noise in the signal.

When, as disclosed in claim 9, the desired part of the signal represents a selected channel of a digital cellular radio system, and the noise estimation measure 30 or a postprocessed version thereof is communicated to a link quality control system of said digital cellular radio system as an estimator of current link quality, it is ensured that a simple measure for the current link quality is provided and fed back to the transmission 35 system. Other advantages of the present invention are that the implementation is potentially low-cost and that

a link quality estimate is provided at an 'early stage' of the signal path, i.e. before the signal is demodulated and further processed in the digital demodulator. This 5 conditions allowing a dynamic adaptation of system throughput to current link quality.

When, as disclosed in claim 10, a noise estimation measurement is performed during each of the basic time 10 units (i.e. time slot or burst) of a channel of the digital cellular radio system, and the result is communicated to a link quality control system of the digital cellular radio system as an estimator of current link quality, it is ensured that the link quality may be 15 continuously monitored and corresponding system actions may be taken instantaneously.

When, as disclosed in claim 11, several noise estimation measurements are performed, the results are stored, and 20 the results are evaluated, and a derived trend is communicated to a link quality control system of a digital cellular radio system as an estimator of current link quality, it is ensured that a trend in the link quality may be derived and reported.

25

When, as disclosed in claim 12, the noise estimation measure transferred to the link quality control system is used by the digital cellular radio system to optimize user information channel throughput by adjusting the data 30 transmission rate, the error correction depth and/or the type of modulation, it is ensured that an optimal user throughput considering the current link quality may be achieved.

35 When, as disclosed in claim 13, the noise estimation measure is transferred to the digital demodulator and

used to adjust the receiver algorithm, it is ensured that an optimization of receiver processing and thus power consumption may be achieved.

5 An apparatus for estimating residual noise in the frequency range of a desired part of a signal is furthermore provided by the present invention. When, as disclosed in claim 14, it includes means for modifying the amplitude of the signal comprising the noise, and
10 means for combining the signal with the modified signal to create a noise estimation measure, and means for transferring the measure to a processing unit, it is ensured that a simple measure for the residual noise in a signal is provided.

15 When, as disclosed in claim 15, the means for combining the signal with the modified signal to create a noise estimation measure comprise a power meter for measuring average power content of the signal and the modified
20 signal over one or more common ranges of their frequency spectra, it is ensured that a simple measure for comparing the signals is provided and that the measurement may be concentrated to a relevant part of the frequency range, e.g. the frequency range outside the
25 desired part of the signal

When, as disclosed in claim 16, the means for modifying the amplitude of the signal comprising the noise include means for attenuating the signal primarily outside the
30 frequency range of the desired part of the signal, it is ensured that the modification of the signal outside the desired frequency range may be performed in a simple way, e.g. by using a filter.

35 When, as disclosed in claim 17, the means for combining the signal with the modified signal to create a noise

estimation measure comprise means for computing the difference in average power content between the signal and the modified signal, it is ensured that a simple way of providing the noise estimation measure is achieved.

5

When, as disclosed in claim 18, it is adapted to handle digital signals, it is ensured that the measure and the following processing steps are more stable over time and against environmental influences, which further promises better performance and lower equipment production costs than corresponding functionality implemented in traditional analogue techniques.

10

When, as disclosed in claim 19, the means for attenuating the signal primarily outside the frequency range of the desired part of the signal comprise a digital filter, it is ensured that a cost-effective and flexible solution that is readily adapted to changes is achieved.

15

When, as disclosed in claim 20, it includes means for storing consecutive values of the noise estimation measure, and means for processing the values to extract a trend, and means for communicating the individual values or the extracted trend or postprocessed versions hereof to a quality control system, it is ensured that an appropriate postprocessing of the noise estimation measure may be performed readily. The processing means may e.g. include means for quantizing the noise estimation measure in a number of different levels, i.e. to grade a given measurement value on an appropriate scale according to the expected dynamic range of the values.

A mobile telephone is moreover provided by the present invention. When, as disclosed in claim 21, it contains an apparatus, comprising means for performing the steps of

claim 1, for estimating residual noise in the frequency range of a desired part of a signal, and means for storing, evaluating and transmitting resulting noise estimation measurements or postprocessed versions thereof 5 to a link quality control system of a cellular radio system, it is ensured that the cellular radio system is provided with a link quality estimate that may be used to optimize the user throughput.

10 When, as disclosed in claim 22, it is adapted to perform the noise estimation measurement during each of the basic time units (i.e. time slot or burst) of a channel of the digital cellular radio system, it is ensured that the link quality may be monitored continuously and 15 corresponding system actions may be taken instantaneously.

Brief Description of the Drawings:

20 The invention will be explained more fully below in connection with a preferred embodiment and with reference to the drawings in which:

25 fig. 1 shows the front-end of a receiver for a mobile telephone of a cellular digital radio communications system according to the invention,

30 fig. 2 shows an idealized sketch of the frequency dependence of the received power of the signal before and after the digital filter, and

35 fig. 3 shows a part of a front-end of a receiver for a mobile telephone of a cellular digital radio communications system according to the invention.

Detailed Description of Embodiments:

Fig. 1 shows the front-end of a receiver for a mobile telephone of a cellular digital radio communications system according to the invention.

In fig. 1, 101 denotes the receiver antenna (optionally used together with the transmitter part via a duplexer), 5 and 110 denotes the received radio frequency signal. The received signal 101 is fed to an RX-band filter 102 that filters out the relevant received frequency band, delivering the signal 111 containing the frequency band allocated to the cellular system in question, e.g. the 10 GSM frequency band around 900 MHz or the IMT-2000 frequency band allocated around 1950 MHz. The signal 111 is fed to an analogue demodulator 103 that mixes the 15 relevant part of the frequency band down in the baseband, using a system-given channel frequency 109 for the down-conversion. The output signal 112 from the analogue demodulator 103 is fed to an analogue filter 104 that filters out the frequencies around the relevant channel, 20 resulting in the signal 113. The signal 113 contains noise and disturbances from adjacent channels. An AD-converter 105 (AD = Analogue to Digital) converts the 25 signal 113 to the digital domain in the form of the signal 114. A digital filter 108 filters out the relevant channel 115 from the input signal 114. Using the digital signals before and after the digital filter 108, i.e. 30 signals 114 and 115 as inputs, the Link Quality Estimator 106 measures the difference in average power content between the two input signals and outputs a signal 116 to the signal processing unit 107. The measure 116 represents an indicator of residual noise in the 35 frequency range of the desired signal 115.

The measure 116 may be further processed by the signal processing unit 107. As a result, a message 117 representing the current link quality (or a trend herein) is forwarded to the transmission part 118 of the mobile 5 unit and transmitted to the Link Quality Control system of the digital radio communications system, i.e. to the base station presently allocated to the mobile telephone.

Fig. 2 shows an idealized sketch of the frequency 10 dependence of the received power of the signal before and after the digital filter. The frequency axis is denoted by 260. Although the relevant signals 114 and 115 of fig. 1 are digital, a frequency dependence of the power content corresponding to their analogue representations 15 is shown for illustrative purposes.

The input signal to the digital filter 114 of fig. 1 is schematically depicted in fig. 2.a. The signal contains noise (not indicated) and signal components 230, 250 from 20 adjacent channels, whose signal power is primarily located in the frequency ranges 270 and 272, in addition to the desired signal components 240 of the selected channel 271, i.e. there is undesired amplitude at frequencies outside as well as inside the frequency range 25 of the desired/selected channel 271. The sketch represents a situation with a strongly disturbing neighbouring signal 230 and a moderately disturbing neighbouring signal 250. The grey shaded areas in fig. 2.a represent the frequency ranges where an overlap with 30 the adjacent channels is present. After (non-ideal) filtering of the signal 114 of fig. 1, the resulting signal 115 of fig. 1 primarily has signal amplitude 241 in the frequency range 271 of the desired signal, as schematically illustrated in fig. 2.b (where the signal 35 amplitudes outside the range 271 (mainly components 231 and 251) are somewhat exaggerated for illustrative

purposes). However, a part of the amplitude of the signal in the desired frequency range 271 originates from noise and/or adjacent channels, as indicated by the shaded area 280. By measuring the average power of signal 115 of fig. 5 1 and subtracting it from the average power of signal 114 of fig. 1 (both taken over the entire frequency range of signal 114) we get a measure for the 'noise' (i.e. undesired signal components) in the desired frequency range 271. This is illustrated in fig. 2.c, where the sum 10 of the shaded areas 232 and 252 represents the measure. I.e. we assume that the amount of signal components present in the frequency ranges 270, 272 outside that of the selected channel is a measure for the amount of 'noise' (i.e. primarily undesired signal components from 15 adjacent channels) present inside the frequency range 271 of the selected channel. The usefulness of the resulting noise measure will in general depend on the structure of the signal 114. For signals representing the potentially overlapping channels of a communications system and the 20 like, the measure is certainly very useful.

After filtering, the received signal consists of the signal from the selected channel and additional noise from adjacent channels, not removed by the non-ideal 25 filters (cf. fig. 2.b). The relation in strength between the selected channel and adjacent channels will determine the amount of residual adjacent channel noise. This relation will influence the receiver performance.

30 An estimation of the adjacent channel residual noise will therefore also be useful in the following digital signal processing (block 107 of fig. 1). Receiver algorithms may be tailored to match the interference presence in each single burst.

The measurements of the average power of the signals 114 and 115 of fig. 1 are performed over the frequency range where the signal 114 has a significant amplitude, i.e. ranges 270, 271 and 272 in fig. 2. In a special 5 embodiment of the invention, the frequency range of measurement is restricted to that outside the selected channel (i.e. to the ranges 270, 272). This has the advantage of eliminating the attenuation of the filter in the desired frequency range 271 from the measurement.

10

The output signal 116 of fig. 1 is quantized in the Link Quality Estimator block 106 and takes on one of a relevant number of levels, e.g. 8, in which the range of the possible results is subdivided. The 'scale' of the 15 levels may be linear or logarithmic dependent on the dynamic range of the measurement results. The interpretation of the measurements is as follows: A relatively large absolute difference in average power content represents a relatively large residual noise and 20 hence a relatively low link quality estimate, whereas a relatively small absolute difference in average power content represents a relatively small residual noise and hence a relatively high link quality estimate. This may be illustrated by fig. 2.c, where the shaded area 232, 25 taken alone, represents a relatively large absolute difference in average power content corresponding to a relatively large amount of residual noise in the desired frequency range and correspondingly a relatively low link quality. Similarly, the shaded area 252, taken alone, 30 represents a relatively small absolute difference in average power content corresponding to a relatively small amount of residual noise in the desired frequency range and correspondingly a relatively high link quality.

35 In an alternative embodiment, a part of the evaluation of the difference in average power content between the two

input signals 114 and 115 of fig. 1 to the Link Quality Estimator 106 is performed in the control unit contained in the processing block 107 (cf. 320 in fig. 3).

5 Fig. 3 shows a part of a front-end of a receiver for a mobile telephone of a cellular digital radio communications system according to the invention.

In fig. 3, the signal processing unit 107 is subdivided
10 in control unit 320 and digital demodulator 321 blocks. The signal 115 from the digital filter 108 is fed to the digital demodulator 321 for further processing and to the control unit 320 for possible evaluation and extraction of further information concerning link quality in
15 addition to that of the noise estimation measure signal 116 from the Link Quality Estimator block 106. The control unit 320 includes a Digital Signal Processor (DSP) and memory (e.g. RAM) for the storage of the most recent noise estimation measures, and for the generation
20 of the link quality estimate 117 that is fed to the transmission part 118 of the mobile telephone for transfer to the Link Quality Control system. In a preferred embodiment of the invention, the functions of the control unit and the digital demodulator are
25 integrated in one functional block (cf. 107 of fig. 1).

One use of the residual noise measure 116 according to the invention is to adjust the link quality estimate 117 reported and used by the network for optimising system
30 throughput. This use of the invention would e.g. improve the performance of the LQC concept proposed for the EDGE system.

The digital demodulator 321 demodulates the digital
35 signal 115 and extracts the user-specific information and control information. The control unit 320 (e.g. a DSP

with internal and possibly extra accessible external memory) evaluates the control information. One part of the control information is extracted from the received signal 115 and possibly transferred from the demodulator 5 321 via the connection 319, the other is the noise estimation measure 116 transferred from the Link Quality Estimator 106. Based thereon, the control unit 320 performs the relevant actions, e.g. sends a report 117, via the transmit part 118 of the mobile telephone, to the 10 Link Quality Control system concerning the present channel quality or the trend in channel quality. The latter is based on stored values of recent channel quality data. In a preferred embodiment of the invention, the measured noise estimation values are stored and 15 evaluated in the Link Quality Estimator 106. It may alternatively be stored and evaluated in the control unit 320 of the processing unit 107. Based on a number (e.g. 100) of stored values, the trend may be derived by any one of a variety of standard methods, e.g. by simply 20 taking the average value, or by computing the slope of a straight line fitted to the stored measurements (time, value) and evaluating it together with the most recent measurement value, etc.

25 The link quality estimation data may e.g. be transmitted from the mobile station to its presently allocated base station and hence to the LQC system via one of the logic control channels of the system that carries signalling or synchronization data (as opposed to traffic channels that 30 carry the user speech or data), as symbolized by the signal 117 to the transmit part 118 of the mobile station. In a GSM system, the logic control channels are e.g. termed BCCH (Broadcast Control Channel), CCCH (Common Control Channel), SDCCH (Stand-alone Control 35 Channel), ACCH (Associated Control Channel), the latter having a Slow (SACCH) and Fast (FACCH) version. The SACCH

and FACCH may both be used to transfer signalling data, including e.g. a link quality estimate, during a connection.

- 5 The basic unit of a logic control channel in the GSM and EDGE systems is 184 bits long. To ensure protection against transmission errors, the 184 control bits are mapped onto a 456 bit block by adding check bits and a channel code to provide error correction possibilities.
- 10 The contents of the logical channels are mapped onto and transferred via physical channels. The 456 bit blocks are partitioned in subblocks of 57 bits length, which are interleaved with subblocks of neighbouring 456 bit blocks and mapped onto logical 'bursts' each of 114 bits length.
- 15 By the addition of extra bits for administrative purposes (tail bits and guard period), the logical bursts are mapped onto the physical bursts each of 156.25 bits length (or 577 μ s) for the actual transmission. This is the basic time slot unit for a GSM or EDGE based system
- 20 onto which all normal and control information is to be mapped.

A physical channel in a TDMA system is defined as a time slot with a time slot number in a sequence of TDMA frames. To protect against fading, frequency hopping may be applied. This means that the physical channel is partitioned in both time and frequency so that each burst is transmitted via a different radio frequency (RF) channel. The physical channel is thus defined as a sequence of RF channels and time slots. Each carrier frequency supports eight physical channels mapped onto eight time slots within a TDMA frame.

35 Details of the GSM logical traffic and control channels and their mapping onto physical channels are standardized

in GSM Recommendation R.05 dealing with the 'Physical layer on the radio path'.

The quality measurements (i.e. the noise detection 5 estimate and its further processing) may be performed in each burst or with a certain frequency, e.g. every TDMA frame (= 8 time slots) or every multiframe (= 26 TDMA frames in a GSM system), etc. Alternatively, the measurement frequency may be made dependent on the 10 measurement results following a predefined algorithm (e.g. relatively high quality measures being associated with relatively low measurement frequencies, the measurement frequencies being confined to a certain min-max-range). Similar patterns may be employed for the 15 reporting of the measure to the Link Quality Control system. The link quality measure may be reported via one of the signalling channels of the cellular communications system. Referring to the GSM system: If a relatively slow frequency of reporting is needed (e.g. in reporting 20 trends) the SACCH signal may e.g. be used (1 SACCH is sent per multiframe, each consisting of 26 TDMA frames, i.e. every 120 ms). If an 'instant' reporting is needed (e.g. when reporting per burst) the FACCH signal may be used. The FACCH is inserted instead of user data using a 25 so-called 'stealing flag' to distinguish signalling data from user data within a burst.

In a preferred embodiment of the invention, the report of 30 the current link quality estimates or the trend therein to the Link Quality Control system, is used by the system to decide whether to change parameters concerning the link throughput such as data transmission rate, 'error correction depth' and/or type of modulation (e.g. between 35 8-PSK and GMSK). This decision may be based on other parameters possibly reported by the mobile station as well, e.g. the received level of the channel carrier, the

absolute distance between the base and mobile stations, the bit error ratio before channel decoding, etc.

Another use of the information represented by the 5 residual noise measure is to introduce ways to compensate each burst by signal processing. Each burst will have an estimation of the interference. This information may be used for:

10 * Fast adaptation of for example receiver filtering properties.
* Input data to noise cancellation algorithms.

In a preferred embodiment of the invention, the 15 measurements are performed in each burst and the results are currently reported to the signal processing unit via the connection 319 in fig. 3 and used therein to modify the receiver algorithm to improve receiver performance, e.g. by adjusting the amount of 'data processing' (error 20 correction, etc.) controlled by the link quality estimate. This will enable the use of algorithms, designed to optimize performance at different reception conditions. If e.g. the link quality is good, less complex receiver algorithms may be employed and thus 25 power may be saved. The latter is of particular importance in mobile units such as cellular telephones.

Although the invention has been described in relation to 30 a digital cellular radio communications system using TDMA, it may also be used in all other situations where a measure for the residual noise in a signal is needed, e.g. in other communications systems, be it CDMA based 35 systems, frequency hopping or non frequency hopping systems, analogue systems, etc.

Claims:

1. A method for estimating residual noise in the
5 frequency range (271) of a desired part (240) of a
signal,

characterized in that
the amplitude of the signal (114) comprising the noise is
modified, and the signal (114) is combined with the
10 modified signal (115) to create a noise estimation
measure (116).

2. A method according to claim 1,
characterized in that
15 the noise estimation measure (116) is based on the
average power content of the signal (114) and the
modified signal (115) over their frequency spectra (270,
271, 272).

20 3. A method according to claim 2,
characterized in that
the noise estimation measure (116) is based on the
average power content of the signal (114) and the
modified signal (115) over one or more common ranges
25 (270; 271; 272) of their frequency spectra.

4. A method according to any one of claims 1 to 3,
characterized in that
the signal (114) is attenuated primarily outside (270,
30 272) the frequency range (271) of the desired part (240)
of the signal.

5. A method according to any one of claims 2 to 4,
characterized in that

the noise estimation measure (116) is based on the difference in average power content (232, 252) between the signal (114) and the modified signal (115).

5 6. A method according to any one of claims 1 to 5, characterized in that the signal (114) is a digital signal.

10 7. A method according to any one of claims 4 to 6, characterized in that the signal (114) is attenuated primarily outside (270, 272) the frequency range (271) of the desired part (240) of the signal (114) by means of a digital filter (108).

15 8. A method according to any one of claims 1 to 7, characterized in that the noise estimation measure (116) is quantized in a number of different levels each indicating different levels of noise present.

20 9. A method according to any one of claims 1 to 8, characterized in that the desired part (240) of the signal (114) represents a selected channel of a digital cellular radio system, and 25 the noise estimation measure (116) or a postprocessed version thereof (117) is communicated to a link quality control system of said digital cellular radio system as an estimator of current link quality.

30 10. A method according to claim 9, characterized in that a noise estimation measurement is performed during each of the basic time units (i.e. time slot or burst) of a channel of the digital cellular radio system, and the 35 result (116; 117) is communicated to a link quality

control system of the digital cellular radio system as an estimator of current link quality.

11. A method according to any one of claim 9 or 10,
5 characterized in that
several noise estimation measurements are performed, the results are stored, and the results are evaluated, and a derived trend is communicated to a link quality control system of a digital cellular radio system as an estimator
10 of current link quality.

12. A method according to any one of claims 9 to 11,
characterized in that
the noise estimation measure transferred to the link
15 quality control system is used by the digital cellular radio system to optimize user information channel throughput by adjusting the data transmission rate, the error correction depth and/or the type of modulation.

20 13. A method according to any one of claims 9 to 12,
characterized in that
the noise estimation measure is transferred to a digital demodulator (321) and used to adjust the receiver
algorithm.

25 14. An apparatus for estimating residual noise in the frequency range of a desired part of a signal,
characterized in that
it includes means (108) for modifying the amplitude of
30 the signal (114) comprising the noise, and means (106) for combining the signal (114) with the modified signal (115) to create a noise estimation measure (116), and means (106) for transferring the measure to a processing unit (107).

35 15. An apparatus according to claim 14,

characterized in that the means (106) for combining the signal (114) with the modified signal (115) to create a noise estimation measure (116) comprise a power meter for measuring 5 average power content of the signal (114) and the modified signal (115) over one or more common ranges (270; 271; 272) of their frequency spectra.

16. An apparatus according to claim 14 or 15,
10 characterized in that the means (108) for modifying the amplitude of the signal (114) comprising the noise include means for attenuating the signal primarily outside (270, 272) the frequency range (271) of the desired part (240) of the signal 15 (114).

17. An apparatus according to any one of claim 15 or 16,
characterized in that the means (106) for combining the signal (114) with the modified signal (115) to create a noise estimation measure (116) comprise means for computing the difference 20 in average power content (232, 252) between the signal (114) and the modified signal (115).

25 18. An apparatus according to any one of claims 14 to 17,
characterized in that it is adapted to handle digital signals.

19. An apparatus according to claim 18,
30 characterized in that the means (105) for attenuating the signal primarily outside (270, 272) the frequency range (271) of the desired part (240) of the signal comprise a digital filter.

35

20. An apparatus according to any one of claims 14 to 19,

characterized in that it includes means (106; 107) for storing consecutive values of the noise estimation measure, and means (106; 107) for processing the values to extract a trend, and 5 means (107) for communicating the individual values or the extracted trend or postprocessed versions thereof to a quality control system.

21. A mobile telephone,
10 characterized in that it contains an apparatus, comprising means (106, 108) for performing the steps of claim 1, for estimating residual noise in the frequency range (271) of a desired part (240) of a signal (114), and means (106, 107) for 15 storing, evaluating and transmitting resulting noise estimation measurements or postprocessed versions thereof (116, 117) to a link quality control system of a cellular radio system.

20 22. A mobile telephone according to claim 21,
characterized in that it is adapted to perform a noise estimation measurement during each of the basic time units (i.e. time slot or burst) of a channel of the digital cellular radio system.

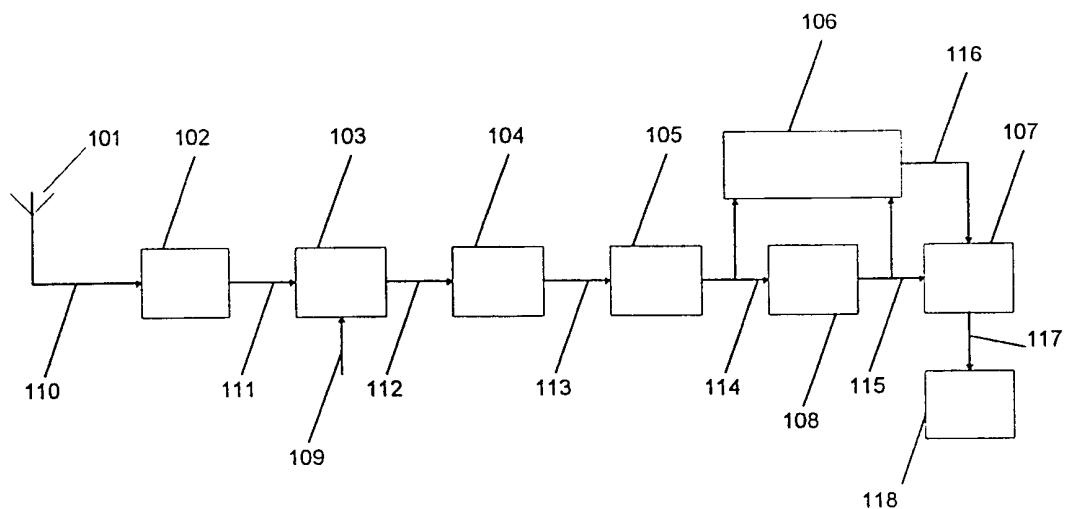


Fig. 1

2/3

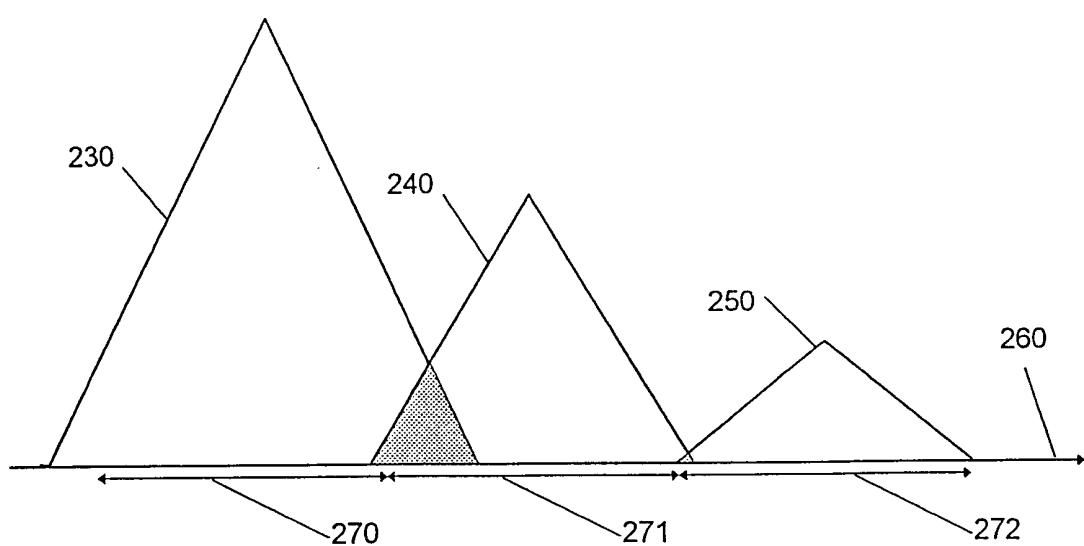


Fig. 2.a

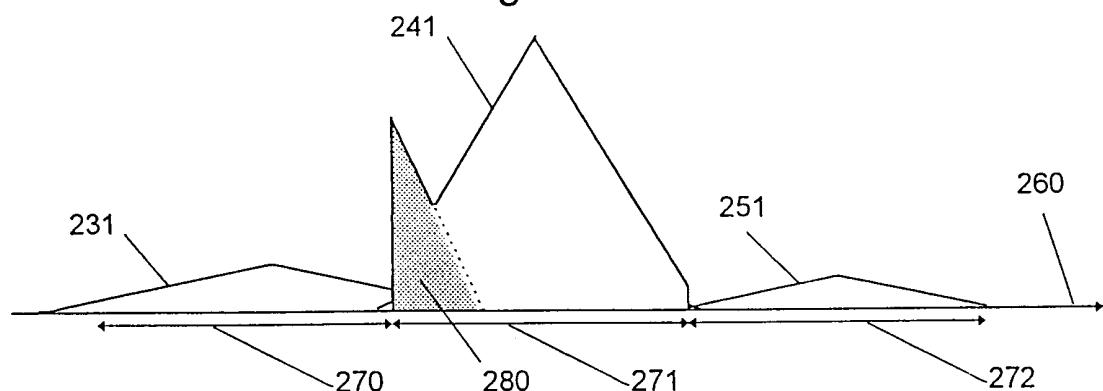


Fig. 2.b

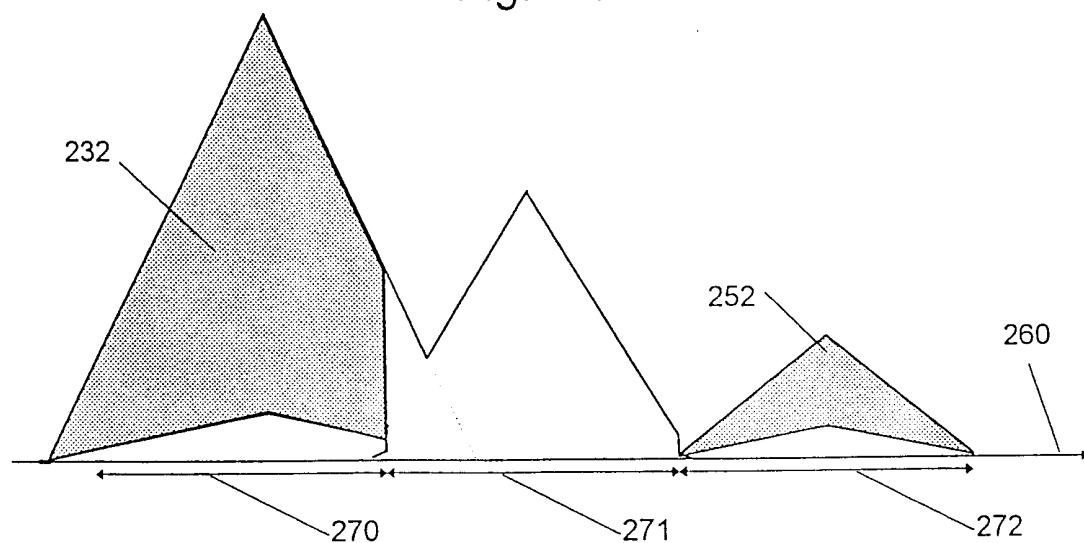


Fig. 2.c

3/3

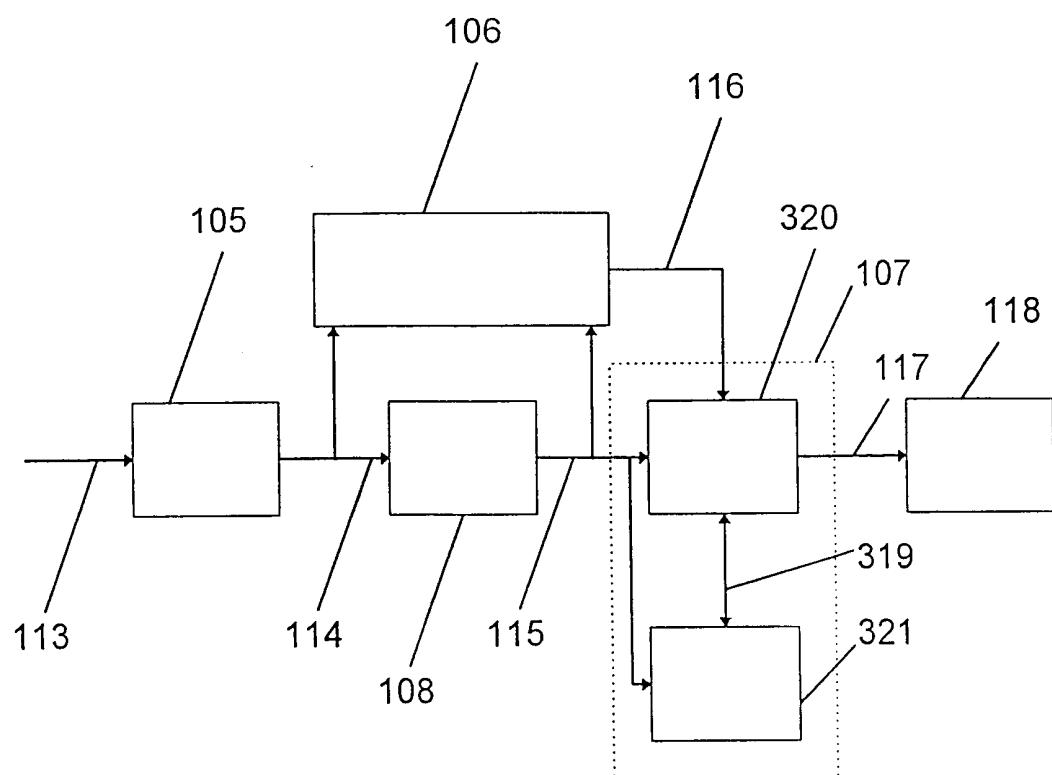


Fig. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/08610

A. CLASSIFICATION OF SUBJECT MATTER		
IPC 7 H04L1/20 H04B17/00 H04B7/005		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC 7 H04L H04B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
EPO-Internal, WPI Data, INSPEC		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 94 28637 A (MOTOROLA INC) 8 December 1994 (1994-12-08) page 5, line 5-17 page 7, line 2 -page 8, line 21 figure 2 ---	1,2,5,6, 9,10,14, 15,17, 18,21,22
X	WO 94 28623 A (MOTOROLA INC) 8 December 1994 (1994-12-08) figures 2,3 page 6, line 20 -page 13, line 6 ---	1,4-8, 14,16-19 -/-
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.		<input checked="" type="checkbox"/> Patent family members are listed in annex.
° Special categories of cited documents :		
A document defining the general state of the art which is not considered to be of particular relevance		
E earlier document but published on or after the international filing date		
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)		
O document referring to an oral disclosure, use, exhibition or other means		
P document published prior to the international filing date but later than the priority date claimed		
T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention		
X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone		
Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.		
& document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
11 December 2000		21/12/2000
Name and mailing address of the ISA		Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Yang, Y

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/08610

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 95 28814 A (ALCATEL MOBILE COMMUNICATION FRANCE) 26 October 1995 (1995-10-26) abstract claims 1,8,9 figure 2 -----	1,9,12, 13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/08610

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
WO 9428637	A 08-12-1994	US 5440582 A		08-08-1995
		AT 183038 T		15-08-1999
		AU 674420 B		19-12-1996
		AU 6909094 A		20-12-1994
		BR 9406692 A		30-01-1996
		CN 1124547 A, B		12-06-1996
		DE 69419918 D		09-09-1999
		DE 69419918 T		16-03-2000
		DK 701752 T		13-03-2000
		EP 0701752 A		20-03-1996
		ES 2136197 T		16-11-1999
		FI 955363 A		08-11-1995
		GR 3031425 T		31-01-2000
		JP 8510881 T		12-11-1996
		PL 311764 A		18-03-1996
-----	-----	-----	-----	-----
WO 9428623	A 08-12-1994	US 5406588 A		11-04-1995
		AU 669301 B		30-05-1996
		AU 6988094 A		20-12-1994
		BR 9405382 A		08-09-1999
		CA 2140026 A		08-12-1994
		CN 1110491 A, B		18-10-1995
		CZ 9500185 A		13-09-1995
		EP 0667055 A		16-08-1995
		HU 72945 A		28-06-1996
		IL 109671 A		18-03-1997
		JP 7509596 T		19-10-1995
		KR 143445 B		17-08-1998
		NZ 267543 A		26-11-1996
		RU 2142669 C		10-12-1999
		US 5469465 A		21-11-1995
-----	-----	-----	-----	-----
WO 9528814	A 26-10-1995	FR 2718906 A		20-10-1995
		AU 697394 B		01-10-1998
		AU 2311295 A		10-11-1995
		AU 4470999 A		11-11-1999
		AU 713891 B		16-12-1999
		AU 9827498 A		04-03-1999
		CA 2187669 A		26-10-1995
		EP 0755615 A		29-01-1997
		EP 0969682 A		05-01-2000
		FI 964043 A		04-12-1996
		JP 9512672 T		16-12-1997
		NZ 284502 A		20-12-1996
		US 6134220 A		17-10-2000
-----	-----	-----	-----	-----