United States Patent [19]

MacTurk

[11] **3,896,545**

[45] **July 29, 1975**

[54] **METHOD OF MAKING A MOLDED WAVEGUIDE FILTER WITH INTEGRAL TUNING POSTS**

[75] Inventor: **William L. MacTurk,** Claremont, Calif.

[73] Assignee: **General Dynamics Corporation,** Pomona, Calif.

[22] Filed: **Aug. 5, 1974**

[21] Appl. No.: **494,693**

Related U.S. Application Data

[63] Continuation-in-part of Ser. No. 406,058, Oct. 12, 1973, abandoned.

[52] **U.S. Cl.** ..... **29/600;** 264/272; 333/73 W

[51] **Int. Cl.²** **H01P 11/00**

[58] **Field of Search** ..... 29/600, 601; 333/73 W, 333/83; 264/104, 272; 249/119, 121, 160, 163, 166

[56] **References Cited**

UNITED STATES PATENTS

1,485,061	2/1924	Ahlgren	249/163
2,592,614	4/1952	Stoddard	29/600
2,826,524	3/1958	Molloy	204/9
2,870,524	1/1959	Kinnear	204/9
3,261,078	7/1966	Hanemann et al.	29/600
3,290,762	12/1966	Ayuzawa et al.	29/600
3,314,130	4/1967	Sheridan	29/600
3,496,498	2/1970	Kawahashi et al.	333/73 W
3,696,314	10/1972	Kell et al.	333/73 W
3,713,051	1/1973	Kell	333/73 R

FOREIGN PATENTS OR APPLICATIONS

798,519	7/1958	United Kingdom	29/600

Primary Examiner—C. W. Lanham
Assistant Examiner—James R. Duzan
Attorney, Agent, or Firm—Albert J. Miller; Edward B. Johnson

[57] **ABSTRACT**

A method for molding a waveguide filter having integral tuning posts.

15 Claims, 13 Drawing Figures

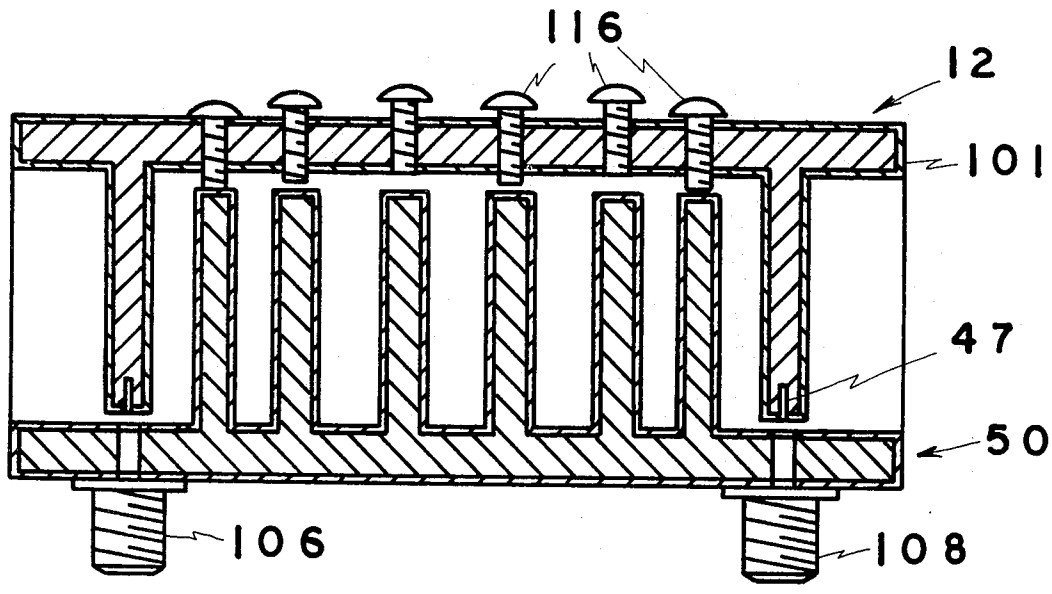
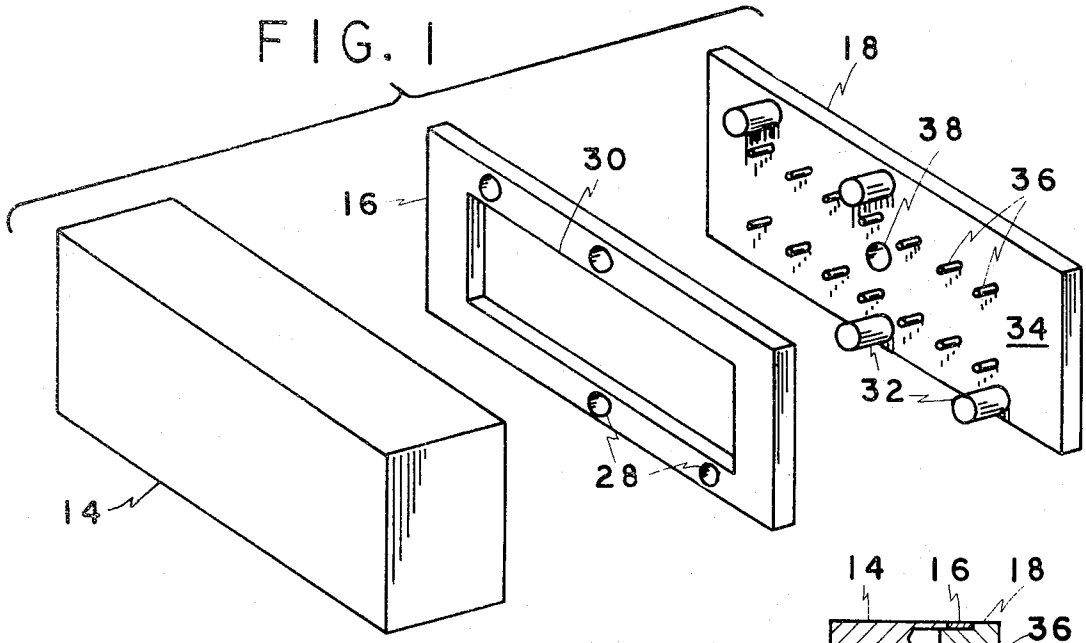


FIG. 1



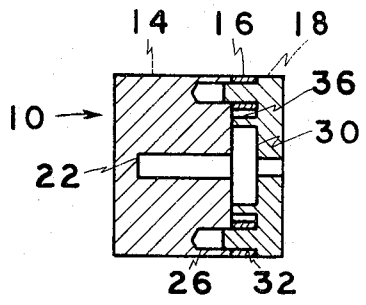


FIG. 3

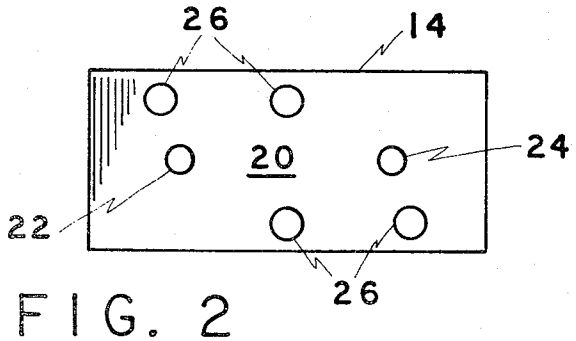


FIG. 2

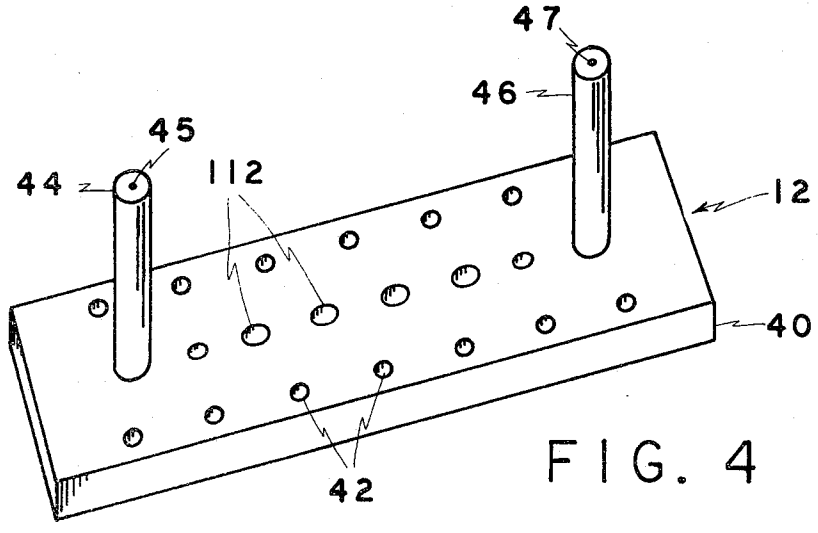


FIG. 4

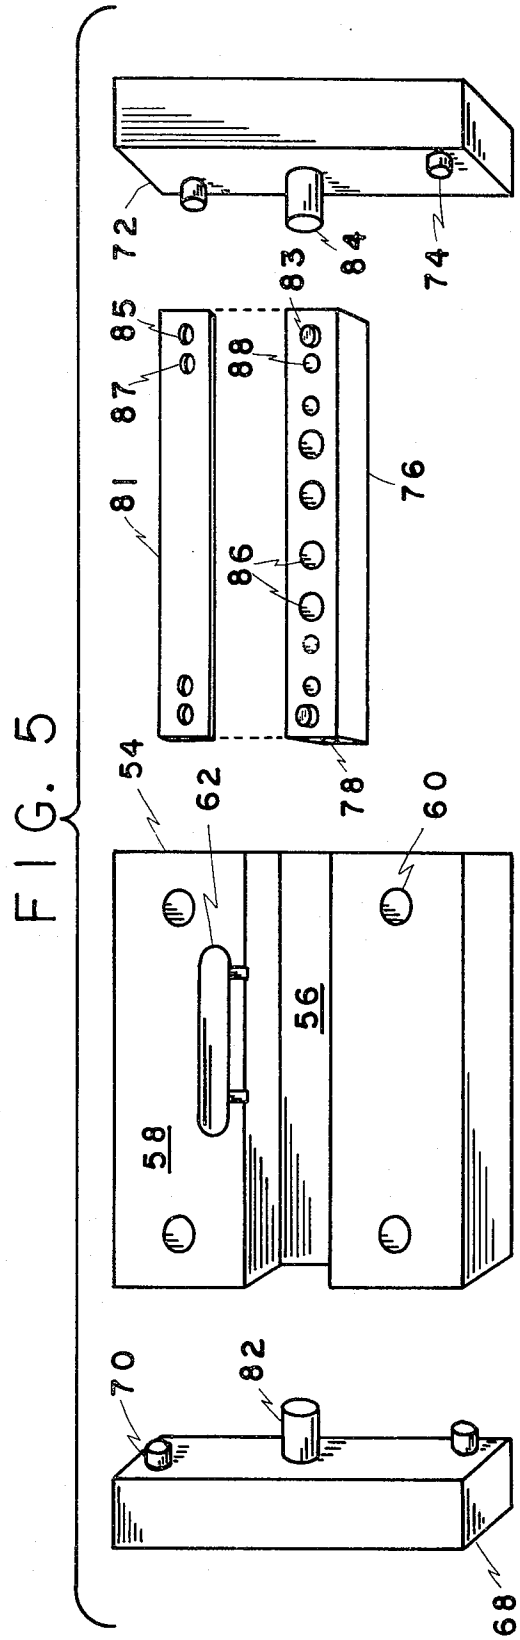


FIG. 5

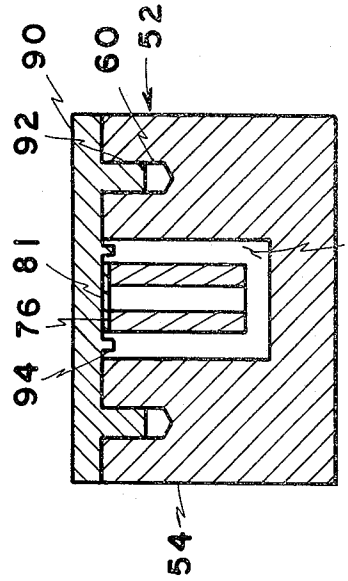


FIG. 7

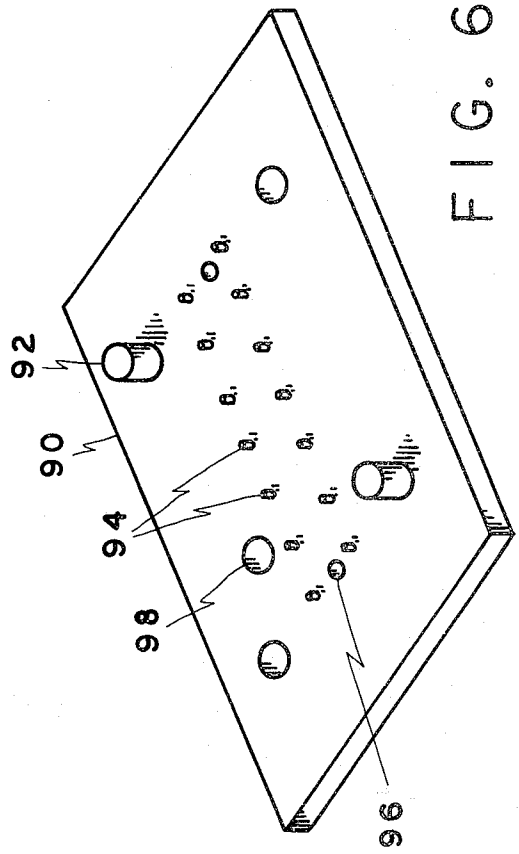


FIG. 6

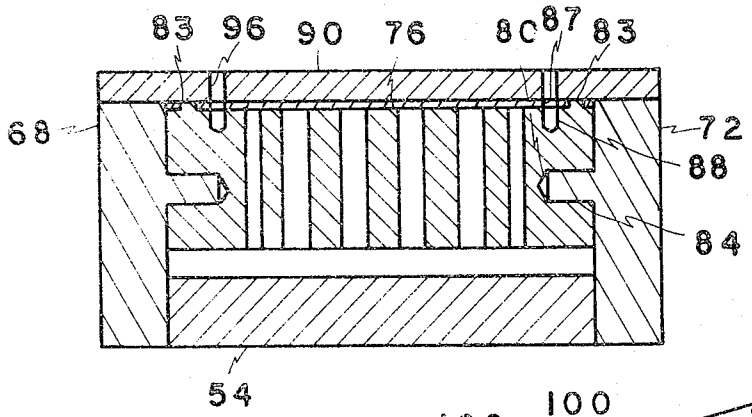


FIG. 8

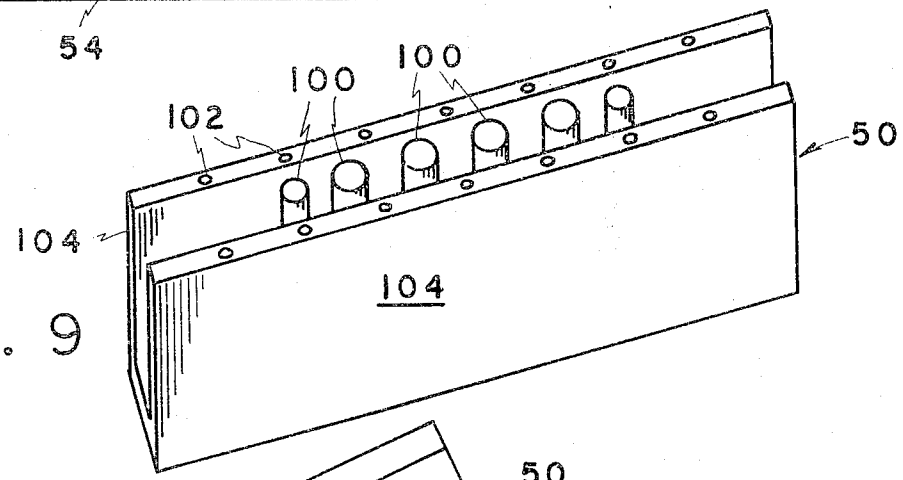


FIG. 9

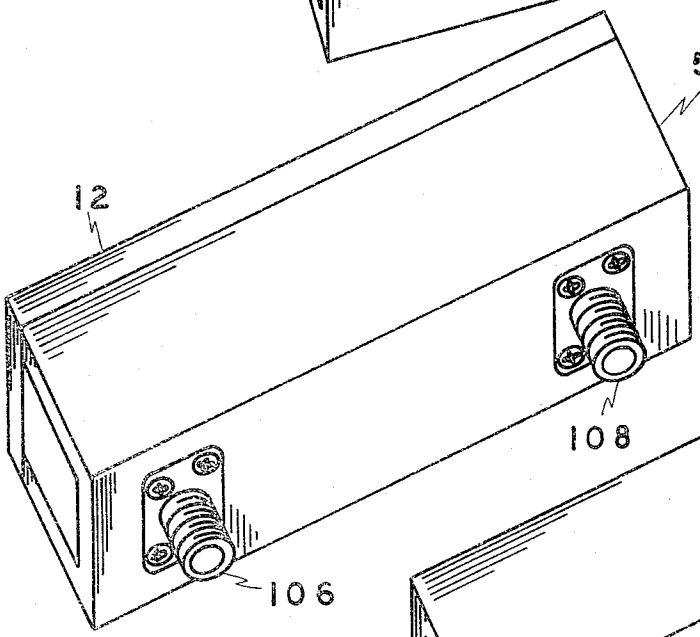


FIG. 10

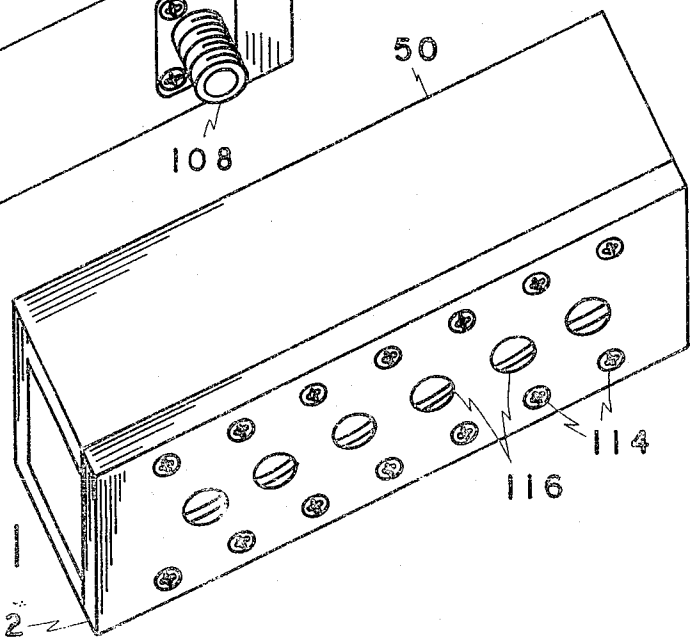


FIG. 11

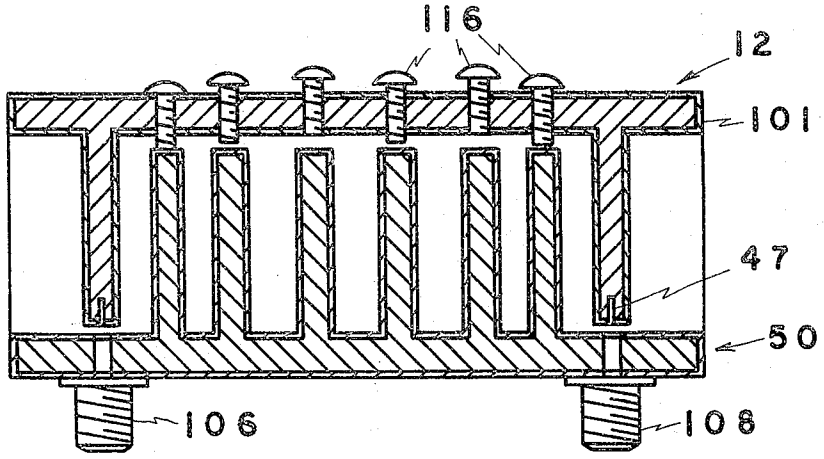


FIG. 12

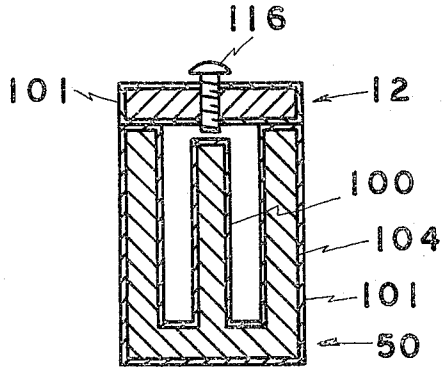


FIG. 13

METHOD OF MAKING A MOLDED WAVEGUIDE FILTER WITH INTEGRAL TUNING POSTS

CROSS REFERENCE TO RELATED APPLICATION

This application is a continuation-in-part of U.S. Pat. application Ser. No. **406,058** filed Oct. **12, 1973,** now abandoned.

BACKGROUND OF THE INVENTION

Waveguides of various electrical characteristics are widely employed in the reception and transmission of electromagnetic waves. One of the many applications found for such waveguides has been missile systems in which size, weight and reliability are extremely important considerations.

While metal waveguides, such as disclosed in U.S. Pat. Nos. **2,592,614; 3,261,078,** and **3,314,130** are suitable for many applications, their weight makes them unsatisfactory for missile applications. Thus, metal coated glass cloth, elastomer, and plastic waveguides such as described in U.S. Pat. Nos. **2,826,524; 3,290,762;** and **2,870,524** have been developed.

When, however, it is desirable to utilize a waveguide as a frequency band pass filter, it is necessary that tuning posts be provided in the interior of the hollow waveguide. Conventional waveguide filters are heavy metal devices machined from aluminum, brass, or copper bronze alloys and containing numerous metal tuning posts. The tuning posts are normally made by inserting metal pins into the metal waveguide and soldering the pins in place. Besides being costly to machine, requiring close mechanical tolerances, and not being conducive to manufacture under production conditions, electrical manfunctions were rather common place from excess solder, pin displacement from soldering temperatures and tolerance error buildup.

With other than metal waveguides, no satisfactory method has been found to provide the tuning posts in the interior thereof. In addition to those patents mentioned above, the following patents were cited in U.S. Ser. No. **406,058:** U.S. Pat. Nos. **3,713,051; 3,696,314; 1,485,061; 3,496,498;** and Great Britain Pat. No. **798,519.**

SUMMARY OF THE INVENTION

The invention provides a method of molding integral tuning posts having metal tuning screws disposed over them in a waveguide filter. The waveguide filter is molded in two pieces, a waveguide body having integral tuning posts and a waveguide cap, which are then assembled into the waveguide filter.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is an exploded view of the mold apparatus for the waveguide filter cap;

FIG. **2** is a plan view of the interior face of the mold of the mold apparatus of FIG. **1**;

FIG. **3** is a cross-sectional view through the mold cavity of the waveguide filter cap mold apparatus of FIG. **1**;

FIG. **4** is a perspective view of a waveguide filter cap produced with the mold apparatus of FIGS. **1–3**;

FIG. **5** is an exploded view of the mold apparatus for the waveguide filter body;

FIG. **6** is a perspective view of the mold cover for the waveguide filter body mold apparatus of FIG. **5**;

FIG. **7** is a widthwise cross-sectional view of the mold cavity of the waveguide filter body mold apparatus of FIGS. **5** and **6**;

FIG. **8** is a lengthwise cross-sectional view of the mold cavity of the waveguide filter body mold apparatus of FIGS. **5** and **6**;

FIG. **9** is a perspective view of a waveguide filter body produced with the mold apparatus of FIGS. **5–8**;

FIG. **10** is a perspective view of a waveguide filter assembled from the waveguide filter cap and waveguide filter body and showing the input and output connectors;

FIG. **11** is a perspective view of the waveguide filter of FIG. **10** showing the tuning screws;

FIG. **12** is a lengthwise cross-sectional view of the assembled waveguide filter of FIGS. **10** and **11** taken through the integral tuning posts.

FIG. **13** is a crosswise cross-sectional view of the assembled waveguide filter of FIGS. **10** and **11** taken through an integral tuning post.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The steel mold assembly **10** shown in FIGS. **1–3** is used to form the waveguide filter cap **12** of FIG. **4.** The mold assembly **10** basically comprises the mold **14,** central plate **16,** and cover plate **18.**

The mold **14** is generally rectangular in form and includes a plurality of holes partially therethrough extending from the interior surface **20** thereof. As shown in FIG. **2,** an input feed post opening **22** and output feed post opening **24** are provided at opposite ends of the interior surface **20.** In addition, a number of mounting holes **26** are provided around the periphery of the interior surface **20** of the mold **14.**

The central plate **16** includes a like number of mounting holes **28** extending therethrough and individually aligned with the corresponding mounting holes **26** in the mold **14.** A rectangular opening **30** in the central plate **16** provides the cavity for the main body or base **40** of waveguide filter cap **12.**

A plurality of mounting pins **32,** corresponding in number to the number of mounting holes **26** and **28** and aligned therewith, are disposed on the interior surface **34** of the cover plate **18.** The pins **32** have a length greater than the thickness of the central plate **16** so as to extend through the mounting holes **28** in the central plate **16** and into the mounting holes **26** in the mold **14.** In addition, a plurality of pins **36** project outward from the interior surface **34** of the cover plate **18** into the cavity **30** of the central plate **16.** The pins **36** have a length equal to the thickness of the central plate **16.** A molding port **38** also extends through the cover plate **18** into the cavity **36.**

As best shown in FIG. **3,** the mold assembly **10** is formed by aligning the mounting holes **26** of the mold **14** and the mounting holes **28** of the central plate **16** with the mounting pins **32** of the cover plate **18.** A clamp means (not shown) may be utilized to hold the mold assembly together if desired.

As stated previously, the base **40** of the waveguide filter cap **12** is formed in the cavity **30** in the central plate **16** between the mold **14** and the cover plate **18.** The plurality of holes **42** which extend through the base **40** result from the pins **36** in the cavity **30.** The input post **44** and output post **46** which extend from the base **40** are formed in the input feed post opening **22** and the

output feed post opening 24 respectively, both in the mold 14 and communicating with the cavity 30.

The waveguide filter cap 12 is formed by the injection of molten plastic under pressure into cavity 30 through the port 38 in the cover plate 18. A Lustran ABS plastic at 425°F at an injection pressure of 600 psig was injected through a cycle time of 60 seconds, made up of injection and boost for 28 seconds and then a holding time of 32 seconds.

The waveguide filter body 50 shown in FIG. 9 is formed in the steel mold assembly 52 of FIGS. 5–8. The mold 54 is a generally rectangular structure having a deep central slot or mold cavity 56. The top surface 58 includes a plurality of mounting holes 60 and a molding fill hole 62 communicating with the cavity 56. Additionally each end of the mold 54 includes a plurality of mounting holes.

End plate 68 having mounting pins 70 to engage mold end mounting holes is disposed at one end of the mold 54 while end plate 72 having mounting pins 74 to engage mold end mounting holes is disposed at the opposite end of the mold 54.

An internal mandrel 76 having end mounting holes 78 and 80 is suspended in the cavity 56 of the mold 54 between the end plates 68 and 72. Mounting pin 82 projecting from end plate 68 into mandrel hole 78 and mounting pin 84 projecting from end plate 72 into mandrel hole 80 position the mandrel 76 in the cavity 56.

A plurality of tuning post holes 86 vertically extend through the mandrel 76. Vertically extending positioning holes 88 partially extend downward into the mandrel 76 at either end thereof. Disposed over the mandrel 76 is a thin shim 82. This shim 82 is positioned on the mandrel 76 by means of upwardly extending pins 83 on the mandrel 76 which extend through holes 85 in the shim 81. The shim 81 also includes positioning holes 87 aligned with the positioning holes 88 in the mandrel 76. A cover plate 90 is disposed over the mold 54 and includes mounting pins 92 aligned with the mounting holes 60 on the top surface 58 of the mold 54. Additionally the cover plate 90 includes positioning holes 96 aligned with the positioning holes 87 in the shim 81 and positioning holes 88 of the mandrel 76 and a molding port 98 aligned with the molding fill hole 62 in the top surface 58 of the mold 54. A plurality of pins 94 project from the cover plate 90 into the cavity between the mandrel 76 and the mold 54.

The mold assembly 52 is formed by assemblying the mold 54 and internal mandrel 76 with shim 84 between end plates 68 and 72 and then placing the cover plate 90 on the top thereof. Pins may be inserted through the positioning holes 96 in the cover plate 90, the positioning holes 87 in the shim 81, to the positioning holes 88 in the mandrel 76. Clamp means may also be required.

The mold cavity formed in the mold assembly 52 is an elongated U-shape, there being clearance between both the sides and the bottom of the internal mandrel 76 and the cavity 56 in the mold 54. This forms the U-shaped waveguide filter body 50 while the tuning post holes 86 in the mandrel form the plurality of tuning posts 100. The pins 94 in the cover plate 90 produce holes 102 at the top of each of the walls 104 of the U-shaped waveguide filter body 50. The shim 81 produces tuning posts which are slightly shorter, e.g., 0.015 inches, than the walls 104.

A Lustran ABS plastic was injected into the mold assembly 52 to form the waveguide body and posts in the same molding sequence used to form the waveguide cap 12. The injection pressure is, however, increased from 600 psig to 800 psig.

Following individual molding, the mold assemblies 10 and 52 are disassembled and the waveguide filter cap 12 and waveguide filter body 50 removed. Any plastic flash is then removed from the molded parts.

In order to connect the OSM input and output connectors 106 and 108 to the base of the U-shaped waveguide filter body 54, a plurality of holes are drilled opposite the input and output posts 44 and 46 respectively. Input and output posts 44 and 46 are also drilled to form holes 45 and 47 respectively to accept the OSM connector pins. In addition, the holes 102 in the walls of the body 50 are tapped. A buttressing mandrel (not shown) may be utilized to maintain the required perpendicularity of the waveguide walls 104 during this drilling and tapping of the holes. Additionally, a plurality of holes, equal to the number of tuning posts, are drilled and tapped in the base 40 of the waveguide filter cap 12, one hole being opposite each tuning post 100. Alternately each of these holes described above may be molded into the waveguide filter cap 12 and waveguide filter body 50 by providing additional pins in the mold assemblies 10 and 52, respectively.

After the drilling and tapping of the holes has been completed, the entire waveguide filter body 50 including tuning posts 100 and the entire waveguide filter cap 12 are first copper plated and then gold plated. Prior to the plating, the glossy surface of the molded plastic is removed by a light vapor hone. An electroless copper coating or deposit of approximately 50×10^{-6} inch is first applied over the waveguide filter body 50 and the cap 12. An approximately 1 mil thick copper plating is then electrodeposited on the waveguide filter body 50 and cap 12 with an 8 amp load current for 40 minutes in a copper tank. A gold flash of 75×10^{-6} inch is then applied for corrosion purposes.

Once plated, the waveguide filter cap 12 is placed over the waveguide filter body 50 as shown in FIGS. 10 through 13. The plating 101 on the waveguide filter cap 12 and waveguide filter body is illustrated in FIGS. 12 and 13. Screws 114 are used to attach the cap 12 to the body 50. Metal tuning screws 116 are then inserted through holes 112 in the waveguide filter cap 12 into position over the tuning posts 100. The OSM input and output connectors 106 and 108 are screwed into place at the base of the waveguide body 50. This effectively completes the waveguide filter assembly.

Since, as shown in FIGS. 12 and 13, the tuning posts 100 are shorter than the walls 104 of the waveguide filter body 50, there is a gap between the top of the posts 100 and the waveguide filter cap 12. The metal tuning screws 116 can be positioned to extend varying distances into this gap. This enables tuning of the waveguide filter to provide the proper bandpass and frequency response by inductively or capacitively coupling each tuning post by adjusting each tuning screw. Filters produced by the process of the present invention are lightweight and susceptible to production manufacture. These plastic waveguide filters are less than half as heavy as a comparable metal waveguide filter and are considerably less expensive to produce. They are also much more electrically reliable.

The plastic, including any heat shrinkage, is dimensionally stable to precisely establish the desired filter band pass. The positioning of the tuning post can be made accurate to .0005 inches, which difference would not be detectable by the electromagnetic field. The center frequency, bandpass, and band width will meet the required engineering specifications. Attentuation versus frequency shows a frequency response within minus 55 db attenuation.

While specific embodiments of the invention have been illustrated and described, it is to be understood that these are provided by way of example only and that the scope of the invention is to be determined by the proper scope of the appended claims.

What I claim is:

1. A method of producing a waveguide filter having integral tuning posts comprising the steps of:
- molding a substantially U-shaped waveguide filter body having integral tuning posts disposed therein, said integral tuning posts being shorter than the walls of said U-shaped waveguide filter body;
- molding a substantially flat waveguide filter cap for the molded waveguide filter body to substantially close the open end of said substantially U-shaped waveguide filter body;
- copper plating the waveguide filter body and the waveguide filter cap;
- gold plating the copper-plated waveguide filter body and the copper-plated waveguide filter cap;
- assembling the plated waveguide filter cap and the plated waveguide filter body to form the waveguide filter; and
- providing adjustable metal tuning screws in said waveguide filter cap to extend over the integral tuning posts of said waveguide filter body.

2. The method of claim 1 wherein the waveguide filter body and waveguide filter cap are molded of a plastic material.

3. The method of claim 2 wherein said plastic material is Lustran ABS plastic.

4. The method of claim 1 wherein said integral tuning posts are approximately **0.015** inches shorter than the wall of said waveguide filter body.

5. The method of claim 1 wherein the molded waveguide filter cap and body are light vapor honed before copper plating.

6. The method of claim 5 wherein said waveguide filter cap and body are copper plated to a thickness of 1 mil over an electroless copper deposit of 50×10^{-6} inch.

7. The method of claim 6 wherein said waveguide filter cap and body are gold plated to a thickness of 75×10^{-6} inch.

8. A method of producing a plastic waveguide filter having integral tuning posts comprising the steps of:
- assembling a steel mold having a mold cavity for a waveguide filter cap, said cavity being substantially rectangular in form to produce the waveguide cap base and having openings therein to produce input and output posts extending from the waveguide cap base and pins projecting into the cavity to produce a plurality of holes in the waveguide cap base;
- injection molding a plastic waveguide filter cap in the waveguide filter cap assembled steel mold;
- disassembling the waveguide filter cap steel mold assembly and removing the molded waveguide filter cap;
- assembling a steel mold having a substantially U-shaped mold cavity for a waveguide filter body, said mold including an internal mandrel having openings therein for forming integral tuning posts in the substantially U-shaped body and pins projecting into the mold cavity to produce a plurality of holes at the top of the legs of the U-shaped body, said internal mandrel including a thin shim disposed over the integral tuning post forming openings to shorten the height of the tuning posts to less than the height of the walls of the U-shaped body;
- injection molding a plastic waveguide filter body in the waveguide filter body assembled steel mold;
- disassembling the waveguide filter body steel mold assembly and removing the molded waveguide filter body;
- drilling and tapping holes in the waveguide filter body and waveguide filter cap for the assembly thereof;
- copper plating the molded waveguide filter cap and the molded waveguide filter body;
- gold plating the copper plated waveguide filter cap and waveguide filter body;
- assembling the plated waveguide filter cap to the U-shaped waveguide filter body to form a generally U-shaped waveguide filter with the integral tuning posts extending therebetween, the assembly having a gap between the top of the tuning posts and the waveguide filter cap; and
- providing adjustable metal tuning screws in said waveguide filter cap to extend into the gap over the integral tuning posts.

9. The method of claim 8 wherein the gap between the top of the integral tuning posts and the waveguide filter cap is approximately **0.015** inches.

10. The method of claim 8 wherein the molded waveguide filter cap and body are light vapor honed before copper plating.

11. The method of claim 8 wherein said waveguide filter cap and body are copper plated to a thickness of 1 mil over an electroless copper deposit of 50×10^{-6} inch.

12. The method of claim 11 wherein said waveguide filter cap and body are gold plated to a thickness of 75×10^{-6} inch.

13. The method of claim 8 wherein input and output connectors are electrically connected to the input and output posts through the base of the U-shaped body.

14. The method of claim 8 wherein said waveguide filter cap steel mold assembly comprises;
- a substantially rectangular mold body having input and output post openings and a plurality of mounting holes extending from the interior surface thereof;
- a central plate having a rectangular opening therein forming a mold cavity communicating with the input and output post openings in said mold body and having mounting holes aligned with the mounting holes of said mold body; and
- a cover plate having mounting pins aligned with and projecting through the central plate mounting holes and into the mold body mounting holes and having a plurality of pins projecting into the mold cavity.

15. The method of claim 8 wherein said waveguide filter body steel mold assembly comprises:

a substantially rectangular mold body having an elongated central slot and a plurality of mounting holes on the ends and top thereof;

an internal mandrel disposed in the elongated central slot of said mold body to form a generally U-shaped mold cavity therewith, said mandrel having mounting openings at both ends thereof and a plurality of tuning post openings therethrough;

a flat shim disposed over the tuning post openings of said internal mandre;

a pair of end plates disposed at either end of said mold body and internal mandrel and having mounting pins to project into the end mounting openings thereof; and

a cover plate disposed over the top of the mold body, mandrel, and end plates and having mounting pins to project into the top mounting openings of the mold body.

* * * * *