



- (51) **International Patent Classification:**
H01R 24/38 (2011.01) *H01R 9/05* (2006.01)
- (21) **International Application Number:**
PCT/US2015/040124
- (22) **International Filing Date:**
13 July 2015 (13.07.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/024,654 15 July 2014 (15.07.2014) US
- (71) **Applicant:** COMMSCOPE TECHNOLOGIES LLC
[US/US]; 1100 CommScope Place, SE, Hickory, North Carolina 28602 (US).
- (72) **Inventor:** PAYNTER, Jeffrey D.; 229 E. Indiana St., Mokense, Illinois 60954 (US).
- (74) **Agents:** CANNON, James, R. et al.; MYERS BIGEL SIBLEY & SAJOVEC, P.A., P.O. Box 37428, Raleigh, North Carolina 27627 (US).


(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** COAXIAL CABLE AND CONNECTOR WITH TUNED CAPACITIVE COUPLING

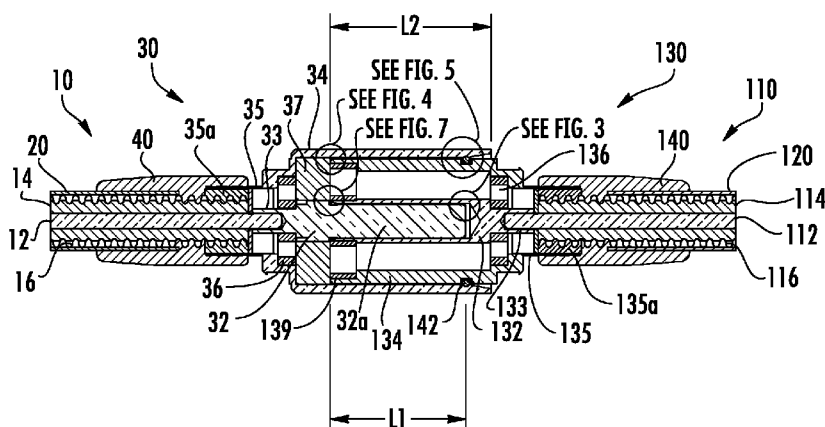**FIG. 1**

(57) **Abstract:** A coaxial connector junction includes first and second coaxial connectors. The first coaxial connector engages the second coaxial connector, a substantially cylindrical member of a first central conductor extension of the first connector being inserted into the cavity of a second central conductor extension of the second connector, and a second outer conductor extension of the second connector being inserted into a first outer conductor extension of the first connector such that a capacitive element is created between the first and second outer conductor extensions by a gap between the first outer conductor extension and the second outer conductor extension. At least one of a length of the gap, an inner diameter of the second outer conductor extension, a thickness and dielectric constant of the capacitive element is selected such that the return loss of the junction is maintained below a preselected level over a preselected frequency range.

COAXIAL CABLE AND CONNECTOR WITH TUNED CAPACITIVE COUPLING

Related Application

[0001] The present application claims priority from and the benefit of U.S. Provisional Patent Application No. 62/024,654, filed July 15, 2014, the disclosure of which is hereby incorporated herein in its entirety.

Field of the Invention

[0002] The present invention is directed generally to electrical cable connectors, and more particularly to coaxial connectors for electrical cable.

Background

[0003] Coaxial cables are commonly utilized in RF communications systems. A typical coaxial cable includes an inner conductor, an outer conductor, a dielectric layer that separates the inner and outer conductors, and a jacket that covers the outer conductor. Coaxial cable connectors may be applied to terminate coaxial cables, for example, in communication systems requiring a high level of precision and reliability.

[0004] Coaxial connector interfaces provide a connect/disconnect functionality between (a) a cable terminated with a connector bearing the desired connector interface and (b) a corresponding connector with a mating connector interface mounted on an electronic apparatus or on another cable. Typically, one connector will include a structure such as a pin or post connected to an inner conductor of the coaxial cable and an outer conductor connector body connected to the outer conductor of the coaxial cable these are mated with a mating sleeve (for the pin or post of the inner conductor) and another outer conductor connector body of a second connector. Coaxial connector interfaces often utilize a threaded coupling nut or other retainer that draws the connector interface pair into secure electro-mechanical engagement when the coupling nut (which is captured by one of the connectors) is threaded onto the other connector.

[0005] Passive Intermodulation Distortion (PIM) is a form of electrical interference/signal transmission degradation that may occur with less than symmetrical interconnections and/or as electro-mechanical interconnections shift or degrade over time. Interconnections may shift due to mechanical stress, vibration, thermal cycling, and/or material degradation. PIM can be an important interconnection quality characteristic, as PIM generated by a single low quality interconnection may degrade the electrical performance of an entire RF system. Thus, the reduction of PIM via connector design is typically desirable.

Summary

[0006] As a first aspect, embodiments of the invention are directed to a coaxial connector junction. The coaxial connector junction comprises a first coaxial connector and a second coaxial connector. The first coaxial connector comprises: a first central conductor extension comprising a substantially cylindrical member; a first outer conductor extension spaced apart from and circumferentially surrounding the first central conductor extension; and a first dielectric spacer interposed between the first central conductor extension and the first outer conductor extension. The second coaxial connector comprises: a second central conductor extension, the second central conductor extension including a substantially cylindrical cavity therein; a second outer conductor extension spaced apart from and circumferentially surrounding the second central conductor extension; and a second dielectric spacer interposed between the second central conductor extension and the second outer conductor extension. The first coaxial connector engages the second coaxial connector, the substantially cylindrical member of the first central conductor extension being inserted into the cavity of the second central conductor extension, and the second outer conductor extension being inserted into the first outer conductor extension such that a capacitive element is created between the first and second outer conductor extensions by a gap between the first outer conductor extension and the second outer conductor extension. At least one of a length of the gap, an inner diameter of the second outer conductor extension, a thickness of the capacitive element, and the dielectric constant of the capacitive element is selected such that the return loss of the connector junction is maintained below a preselected level over a preselected frequency range.

[0007] As a second aspect, embodiments of the invention are directed to a method of improving the return loss of a coaxial connector junction, comprising the steps of: (a) providing first and second coaxial connectors, the first coaxial connector comprising:

- (i) a first central conductor extension comprising a substantially cylindrical member;
- (ii) a first outer conductor extension spaced apart from and circumferentially surrounding the first central conductor extension; and
- (iii) a first dielectric spacer interposed between the first central conductor extension and the first outer conductor extension; and

the second coaxial connector comprising:

- (iv) a second central conductor extension, the second central conductor extension including a substantially cylindrical cavity therein;
- (v) a second outer conductor extension spaced apart from and circumferentially surrounding the second central conductor extension; and
- (vi) a second dielectric spacer interposed between the second central conductor extension and the second outer conductor extension;

wherein the first coaxial connector engages the second coaxial connector, the substantially cylindrical member of the first central conductor extension being inserted into the cavity of the second central conductor extension, and the second outer conductor extension being inserted into the first outer conductor extension such that a capacitive element is created between the first and second outer conductor extensions by a gap between the first outer conductor extension and the second outer conductor extension; and (b) adjusting at least one of a length of the gap, an inner diameter of the second outer conductor extension, a thickness of the capacitive element, and the dielectric constant of the capacitive element such that the return loss of the connector junction is maintained below a preselected level over a preselected frequency range.

[0008] As a third aspect, embodiments of the invention are directed to a coaxial connector junction comprising a first coaxial connector and a second coaxial connector. The first coaxial connector comprises: a first central conductor extension comprising a substantially cylindrical member; a first outer conductor extension spaced apart from and circumferentially surrounding the first central conductor extension; and a first dielectric spacer interposed between the first central conductor extension and the first outer conductor extension. The second coaxial connector comprises: a second central conductor extension, the second central conductor extension including a substantially cylindrical cavity therein; a second outer conductor extension spaced apart from and circumferentially surrounding the second central conductor extension; and a second dielectric spacer interposed between the

second central conductor extension and the second outer conductor extension. The first coaxial connector engages the second coaxial connector, the substantially cylindrical member of the first central conductor extension being inserted into the cavity of the second central conductor extension, and the second outer conductor extension being inserted into the first outer conductor extension such that a capacitive element is created between the first and second central conductor extensions by a gap between the first central conductor extension and the second central conductor extension. At least one of a length of the gap, an inner diameter of the second central conductor extension, a thickness of the capacitive element, and the dielectric constant of the capacitive element is selected such that the return loss of the connector junction is maintained below a preselected level over a preselected frequency range.

[0009] As a fourth aspect, embodiments of the invention are directed to a method of improving the return loss of a coaxial connector junction, comprising the steps of: (a) providing first and second coaxial connectors, the first coaxial connector comprising:

- (i) a first central conductor extension comprising a substantially cylindrical member;
- (ii) a first outer conductor extension spaced apart from and circumferentially surrounding the first central conductor extension; and
- (iii) a first dielectric spacer interposed between the first central conductor extension and the first outer conductor extension; and

the second coaxial connector comprising:

- (iv) a second central conductor extension, the second central conductor extension including a substantially cylindrical cavity therein;
- (v) a second outer conductor extension spaced apart from and circumferentially surrounding the second central conductor extension; and
- (vi) a second dielectric spacer interposed between the second central conductor extension and the second outer conductor extension;

wherein the first coaxial connector engages the second coaxial connector, the substantially cylindrical member of the first central conductor extension being inserted into the cavity of the second central conductor extension, and the second outer conductor extension being inserted into the first outer conductor extension such that a capacitive element is created between the first and second central conductor extensions by a gap between the first central conductor extension and the second central conductor extension; and

(b) adjusting at least one of a length of the gap, an inner diameter of the second central conductor extension, a thickness of the capacitive element, and the dielectric constant of the capacitive element such that the return loss of the connector junction is maintained below a preselected level over a preselected frequency range.

[0010] As a fifth aspect, embodiments of the invention are directed to a coaxial connector junction, comprising a first coaxial connector and a second coaxial connector. The first coaxial connector comprises: a first central conductor extension comprising a substantially cylindrical member; a first outer conductor extension spaced apart from and circumferentially surrounding the first central conductor extension; and a first dielectric spacer interposed between the first central conductor extension and the first outer conductor extension. The second coaxial connector comprises: a second central conductor extension, the second central conductor extension including a substantially cylindrical cavity therein; a second outer conductor extension spaced apart from and circumferentially surrounding the second central conductor extension; and a second dielectric spacer interposed between the second central conductor extension and the second outer conductor extension. The first coaxial connector engages the second coaxial connector, the substantially cylindrical member of the first central conductor extension being inserted into the cavity of the second central conductor extension, and the second outer conductor extension being inserted into the first outer conductor extension such that a capacitive element is created between the first and second outer conductor extensions by a gap between the first outer conductor extension and the second outer conductor extension. The capacitive element in the gap comprises a dielectric layer applied on the second outer conductor extension. The second dielectric spacer includes a flange that extends radially outward toward to protect the dielectric layer of the capacitive element.

[0011] As a sixth aspect, embodiments of the invention are directed to a coaxial connector junction comprising a first coaxial connector and a second coaxial connector. The first coaxial connector comprises: a first central conductor extension comprising a substantially cylindrical member; a first outer conductor extension spaced apart from and circumferentially surrounding the first central conductor extension; and a first dielectric spacer interposed between the first central conductor extension and the first outer conductor extension. The second coaxial connector comprises: a second central conductor extension, the second central conductor extension including a substantially cylindrical cavity therein; a second outer conductor extension spaced apart from and circumferentially surrounding the second central conductor extension; and a second dielectric spacer interposed between the

second central conductor extension and the second outer conductor extension. The first coaxial connector engages the second coaxial connector, the substantially cylindrical member of the first central conductor extension being inserted into the cavity of the second central conductor extension, and the second outer conductor extension being inserted into the first outer conductor extension such that a capacitive element is created between the first and second central conductor extensions by a gap between the first central conductor extension and the second central conductor extension. The capacitive element in the gap comprises a dielectric layer applied on the first central conductor extension. The first coaxial connector further comprises a dielectric cap mounted to a free end of the first central conductor extension, the dielectric cap includes a flange that extends radially outward toward to protect the dielectric layer of the capacitive element.

Brief Description of the Figures

[0012] **Figure 1** is a partial cross-section of the coaxial cable-connector assembly according to embodiments of the invention, the assembly being shown in a mated condition.

[0013] **Figure 2** is a partial cross-section of the coaxial cable-connector assembly of **Figure 1** shown in an unmated condition.

[0014] **Figure 3** is an enlarged partial section of the coaxial cable-connector assembly of **Figure 1**.

[0015] **Figure 4** is an enlarged partial section of the coaxial cable-connector assembly of **Figure 1**.

[0016] **Figure 5** is an enlarged partial section of the coaxial cable-connector assembly of **Figure 1**.

[0017] **Figure 6** is an enlarged partial section of the coaxial cable-connector assembly of **Figure 2**.

[0018] **Figure 7** is an enlarged partial section of the coaxial cable-connector assembly of **Figure 1**.

[0019] **Figure 8** is a graph plotting return loss as a function of frequency for an optimized connector design of **Figure 1** with the gap between the outer conductor extensions filled with conductive material.

[0020] **Figure 9** is a graph plotting return loss as a function of frequency for the connector design of **Figure 8** with the gap between the outer conductor extensions unfilled.

[0021] **Figure 10** is a graph plotting return loss as a function of frequency showing (a) the curve of **Figure 8** and (b) a curve representing the effect of the gap calculated from **Figures 8** and **9**.

[0022] **Figure 11** is a graph plotting return loss as a function of frequency for a non-optimized connector design of **Figure 1** with the gap between the outer conductor extensions filled with conductive material.

[0023] **Figure 12** is a graph plotting return loss as a function of frequency for the connector design of **Figure 11** with the gap between the outer conductor extensions unfilled.

[0024] **Figure 13** is a graph plotting return loss as a function of frequency showing (a) the curve of **Figure 11** and (b) a curve representing the effect of the gap calculated from **Figures 11** and **12**.

[0025] **Figure 14** is a perspective section view of a coaxial cable-connector assembly according to alternative embodiments of the invention, the assembly being shown in a mated condition.

[0026] **Figure 15** is a greatly enlarged perspective section view of the dielectric cap in place in the assembly of **Figure 14**.

[0027] **Figure 16** is a greatly enlarged perspective view of the dielectric spacer in place in the assembly of **Figure 14**.

Detailed Description of Embodiments of the Invention

[0028] The present invention is described with reference to the accompanying drawings, in which certain embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments that are pictured and described herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. It will also be appreciated that the embodiments disclosed herein can be combined in any way and/or combination to provide many additional embodiments.

[0029] Unless otherwise defined, all technical and scientific terms that are used in this disclosure have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. The terminology used in the above description is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used in this disclosure, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will also be understood that when an element (e.g., a device, circuit, etc.) is referred to as being

"connected" or "coupled" to another element, it can be directly connected or coupled to the other element or intervening elements may be present. In contrast, when an element is referred to as being "directly connected" or "directly coupled" to another element, there are no intervening elements present.

[0030] **Figures 1 and 2** illustrate two coaxial cables, designated broadly at **10** and **110**, according to embodiments of the present invention. The cable **10** includes a central conductor **12**, a dielectric layer **14** that circumferentially overlies the central conductor **12**, an outer conductor **16** that circumferentially overlies the dielectric layer **14**, and a polymeric cable jacket **20** that circumferentially overlies the outer conductor **16**. Similarly, the cable **110** includes a central conductor **112**, a dielectric layer **114** that circumferentially overlies the central conductor **112**, an outer conductor **116** that circumferentially overlies the dielectric layer **114**, and a polymeric cable jacket **120** that circumferentially overlies the outer conductor **116**. These components will be well-known to those of skill in this art and need not be described in detail herein. **Figures 1 and 2** illustrate that the outer conductors **16, 116** may be of a corrugated profile; alternatively, the outer conductors **16, 116** may not have a corrugated profile. Both of these outer conductor configurations are known to those of skill in this art and need not be described in detail herein.

[0031] Referring again to **Figures 1 and 2**, the cable **10** includes a plug **30** that enables the cable **10** to be connected with a jack **130** of the mating coaxial cable **110**. **Figure 1** shows the plug **30** and jack **130** in their mated condition; **Figure 2** shows the plug **30** and jack **130** in a largely unmated condition as the jack **130** is being inserted into the plug **30**.

[0032] The plug **30** includes a central conductor extension **32**, an outer conductor extension **34** and an overmold body **40**. The central conductor extension **32** has a generally cylindrical post **32a** and is mounted on and is in electrical contact with the central conductor **12** of the cable **10** via a boss **33**. As can be seen in **Figure 3**, the post **32a** has rounded edges at its free end. The outer conductor extension **34** is mounted in electrical contact with the outer conductor **16** of the coaxial cable **10** via a tail **35** that is soldered to the outer conductor **16** at a solder joint **35a**. The free end **34a** of the outer conductor **34** is bevelled to facilitate insertion of the jack **130** (see **Figure 5**). An annular dielectric spacer **36** is positioned between the central conductor extension **32** and the outer conductor extension **34** near the junction between the central conductor **12** and the central conductor extension **32**. Another annular dielectric spacer **37** abuts the spacer **36** and maintains separation between the central conductor extension **32** and the outer conductor extension **34**. The spacers **36, 37** position the outer conductor extension **34** to be spaced apart from and to circumferentially surround the

central conductor extension **32**. The central conductor extension **32** includes an annular recess **32b** radially inwardly of the spacer **36** (see **Figure 7**). The overmold body **40** surrounds the end of the cable **10** and the portion of the tail **35** that is soldered to the outer conductor **16**.

[0033] As can be seen in **Figure 3**, the post **32a** of the central conductor extension **32** underlies a dielectric layer **44**. In the illustrated embodiment, the dielectric layer **44** is formed of a polymeric shrink sleeve; in one example, the shrink sleeve may be formed of polyester or PTFE. The dielectric layer **44** is typically between about 0.001 and 0.003 inches in thickness. As can be seen in **Figure 7**, the end portion of the sleeve comprising the dielectric layer **44** shrinks into the recess **32b**, which helps to fix the dielectric layer **44** in place.

[0034] Referring again to **Figures 1 and 2**, the jack **130** includes a central conductor extension **132**, an outer conductor extension **134**, and an overmold body **140**. The central conductor extension **132** is mounted on and is in electrical contact with the central conductor **112** of the cable **110** via a boss **133**. The central conductor extension **132** is hollow at its free end, forming a cavity **132a** with a bevelled end **132b** (see **Figures 2 and 6**). The outer conductor extension **134** is mounted in electrical contact with the outer conductor **116** of the coaxial cable **110** via a tail **135** that is soldered to the outer conductor **116** at a solder joint **135a**. As can be seen in **Figure 4**, the outer conductor extension **134** has a rounded edge at its free end. An annular dielectric spacer **136** is positioned between the central conductor extension **132** and the outer conductor extension **134** near the junction between the central conductor **112** and the central conductor extension **132**. Another annular dielectric spacer **139** is located at the free ends of the central conductor extension **132** and the outer conductor extension **134** and maintains separation between the central conductor extension **132** and the outer conductor extension **134**. The spacers **136, 139** position the outer conductor extension **134** to be spaced apart from and circumferentially surround the central conductor extension **132**. The overmold body **140** surrounds the end of the cable **110** and the portion of the tail **135** that is soldered to the outer conductor **116**. Also, an O-ring **142** is located within an annular recess **134a** in the outer conductor extension **134** (see **Figure 5**).

[0035] A dielectric layer **144** overlies the outer conductor extension **134** (see **Figures 4 and 5**). Like the dielectric layer **44**, in the illustrated embodiment, the dielectric layer **144** is formed of a polymeric shrink sleeve; in one example, the shrink sleeve may be formed of polyester or PTFE. The dielectric layer **144** is typically between about 0.001 and 0.003 inches in thickness. As can be seen in **Figure 5**, the end portion of the sleeve comprising the

dielectric layer 144 shrinks into the recess 134a, which helps to fix the dielectric layer 144 in place.

[0036] As shown in **Figure 1**, the central conductor extension 32 and the outer conductor extension 34 of the plug 30 are configured to mate with the central conductor extension 132 and the outer conductor extension 134 of the jack 130. More specifically, the post 32a of the central conductor extension 32 of the plug 30 fits within the cavity 132a of the central conductor extension 132 of the jack 130, while the outer conductor extension 134 of the jack 130 fits within the walls of the partially overlying outer conductor extension 34 of the plug 30. The O-ring 142 is compressed radially inwardly by the outer conductor extension 34, thereby forming a watertight seal between the plug 30 and jack 130 (see **Figure 5**).

[0037] **Figure 3** illustrates that, when the plug 30 and jack 130 are mated, a gap or cavity g1 is formed between the outer surface of the post 32a and the inner surface of the central conductor extension 132. In the illustrated embodiment, both the dielectric layer 44 and an air space are present in the gap g1, although in some embodiments the dielectric layer 44 fills the gap g1 entirely, and in other embodiments the gap g1 may have no explicit dielectric layer 44. The presence of the dielectric layer 44 and/or the air space electrically insulates the central conductor extension 32 of the plug 30 from the central conductor extension 132 of the jack 130, thereby forming a capacitive element between these components (see **Figure 3**). The capacitive element so created can avoid the generation of PIM that can occur in interconnecting coaxial cables.

[0038] Similarly, and as can be seen in **Figure 4**, a gap or cavity g2 is formed between the outer surface of the outer conductor extension 134 of the jack 130 and the inner surface of the outer conductor extension 34 of the plug 30. In the illustrated embodiment, both the dielectric layer 144 and an air space are present in the gap g2, although in some embodiments the dielectric layer 144 fills the gap g2 entirely, and in other embodiments the gap g2 may have no explicit dielectric layer 144. The presence of the dielectric layer 144 and/or the air space electrically insulates the outer conductor extension 134 of the jack 130 from the outer conductor extension 34 of the plug 30, thereby forming a capacitive element between these components that can avoid the generation of PIM.

[0039] In some embodiments, air space in the gap g1 and/or the gap g2 can provide a dampening effect during mating of the plug 30 and the jack 130. For example, if the air space in the gap g2 is between about 0.05 and 0.15 mm, air flow from the cavity of the plug 30 upon insertion of the jack 130 is sufficiently restricted that, as insertion proceeds, an air “cushion” is formed. In some prior connectors, and in particular blind-mated connectors

(such as blind mated interfaces associated with heavy antennae/radio-heads, etc.) there is a danger of the interfaces slamming together and damaging connector parts, brackets, fasteners and the like. With a restricted air flow that creates a built-in air cushion, time is required to allow the air to leak out of the interface. This can produce a “soft” mating, which can eliminate the danger associated with components slamming together.

[0040] As can be seen in **Figure 6**, the rounded outer edge of the free end of the outer conductor extension **134** of the jack **130** can facilitate insertion of the outer conductor extension **134** within the outer conductor extension **34** of the plug **30**. Insertion is also aided by the slight bevelling in the free end **34a** of the outer conductor extension **34** of the plug **30** (see again **Figure 6**). In a similar manner, and as shown in **Figure 3**, the rounded edge of the free end of the post **32a** of the central conductor extension **32** of the plug **30** can facilitate insertion of the central conductor extension **32** within the cavity **132a** of the central conductor extension **132** of the jack **130**.

[0041] Notably, and as can be seen in **Figures 2 and 6**, the outer conductor extension **34** extends farther away from the cable **10** (and deeper into the jack **130**) than does the central conductor extension **32**, such that, when the plug **30** and jack **130** are brought together to mate as in **Figures 2 and 6**, the outer conductor extension **134** of the jack **130** contacts and engages the outer conductor extension **34** prior to engagement of the central conductor extensions **32, 132**. The bevelled end **34a** of the outer conductor extension **34** tends to “center” the jack **130** relative to the plug **30**, thereby facilitating engagement and mating of the central conductor extensions **32, 132**. Engagement of the central conductor extensions **32, 132** is also facilitated by the bevelling of the end **132b** of the central conductor extension **132** (see **Figure 6**).

[0042] As shown in **Figures 1 and 4**, mating of the plug **30** and jack **130** is complete when the jack **130** “bottoms out” against the plug **30**, which occurs when the spacer **139** of the jack **130** contacts the spacer **37** of the plug **30**. As can be seen in **Figure 7**, the spacer **139** extends slightly farther away from the cable **110** (and deeper into the plug **130**) than does the central conductor extension **132**, such that the central conductor extension **132** is prevented from contact and electrical connection with the central conductor **32**, thereby preserving the capacitively coupled electrical connection created by the dielectric layer **44**.

[0043] In addition to the materials discussed above, exemplary materials for the dielectric layers **44, 144** include other polymeric materials, ceramic materials, and glass. The dielectric strength of the materials of the dielectric layers **44, 144** is typically above about 8 MV/m. Although application as a shrink sleeve is illustrated and described herein, the dielectric

layers **44, 144** may be applied in a number of different ways, including painting, spraying, sputter coating, or the like. In some embodiments, the capacitive element is sized and arranged so that it creates capacitance on the order of 10-50 pico farads between the central conductor extensions **32, 34** of the plug **30** and the respective conductor extensions **132, 134** of the jack **130**.

[0044] Although the plug **30** and jack **130** are illustrated herein attached to free coaxial cables **10, 110**, in some embodiments one of these connectors may be mounted within a structure, such as a shoulder plate such as that described in co-pending and co-assigned U.S. Patent Publication No. 2013/0065415, the disclosure of which is hereby incorporated herein by reference, that presents multiple connectors at once. Such a shoulder plate or similar mounting structure may be mounted on an antenna, remote radio head or the like.

[0045] It has been discovered that the geometry of the interface between the central conductor extensions **32, 132** and/or the outer conductor extensions **34, 134** (with the concentric gaps **g1, g2**) can dramatically affect the return loss of the mated plug-jack connection. Factors that may impact the return loss include the length of the overlap of the outer conductor extensions **34, 134** (also called gap length **L2** – see **Figure 1**) and/or the overlap of the central conductor extensions **32, 132** (also called gap length **L1** – also shown in **Figure 1**), the distance between the outer conductor extensions **34, 134** (i.e., the gap **g2**) and/or the inner conductor extensions **32, 132** (i.e., the gap **g1**) and the dielectric constant and thickness of the material(s) (including air) separating the outer conductor extensions **34, 134** and the central conductor extensions **32, 132**. As shown in **Figures 8-13** (explained in detail below), even relatively minor variations in these parameters may dramatically impact the return loss of the mated plug-jack connection, and the impact is highly frequency dependent.

[0046] In many applications, coaxial cables and connectors are used in systems that carry radio frequency ("RF") signals that are within a known frequency range. For such systems, the return loss characteristics of the mated plug-jack connection outside of the frequency range of interest may be of little concern. Accordingly, it may be possible to vary physical parameters of the mated plug-jack connection such as the parameters identified above in order to "tune" the return loss characteristics of the mated connection to have improved return loss over the frequency band of interest. This typically results in some level of degradation to the return loss in other frequency ranges but, as noted above, this degradation may be of little or no concern if the mated plug-jack connection is to be used in a system that does not operate in those frequency bands.

[0047] As an example, typically minimizing the air space between the central conductor extensions and/or the outer conductor extensions can provide a broadband improvement in reflection by reducing the distance between the conductors, thus increasing the capacitance. This reduction in reflection improves return loss. Air gaps may be used when necessary or desirable to allow for ease of insertion given tolerances of the assembled parts.

[0048] In particular, the plug 30 and/or jack 130 may be configured such that the return loss of the assembly is below a preselected range (for example, below 24 or 30 dB) over a preselected frequency range (for example, between 600 MHz and 3.50 GHz). As noted above, parameters such as cavity length, outer conductor extension inner diameter, type of dielectric material, thickness of dielectric material, and/or thickness of the air space may provide an improved or optimized performance.

[0049] In some embodiments of the present invention, the mated plug-jack connection may be designed using conventional design techniques. Then, computer modeling may be used to vary parameters such as the length L2 of the overlap of the outer conductor extensions 34, 134, the gap g2 between the outer conductor extensions 34, 134 and the dielectric constant of the material separating the outer conductor extensions 34, 134 from the values for these parameters that are derived through the conventional design process. These parameters may be varied to provide a plurality of different connector designs and the return loss of the mated plug-jack connection may then be estimated using computer modeling techniques for each such connector designs. Hundreds, thousands or even tens of thousands of connector designs may be simulated to identify parameter sets that provide desired and/or acceptable return loss performance in a frequency band of interest.

[0050] While the above discussion has focused on improving return loss by improving or optimizing the physical parameters of the capacitive coupling interface between the outer conductor extensions 34, 134, it will be appreciated that the same techniques may be used to improve return loss by improving or optimizing the physical parameters of the capacitive coupling interface between the central conductor extensions 32, 132. Thus, it will be appreciated that the exact same techniques may be used to improve the return loss of the mated plug-jack connection by varying the physical parameters of the capacitive coupling interface between the central conductor extensions 32, 132, such as the length L1 of the overlap of the central conductor extensions 32, 132, the gap g1 between the central conductor extensions 32, 132 and the dielectric constant of the material separating the central conductor extensions 32, 132.

[0051] Referring now to **Figures 14-16**, alternative embodiments of a plug, designated broadly at **30'**, and a jack, designated broadly at **130'**, are shown therein. The plug **30'** is similar to the plug **30** with the exception that a dielectric cap **232** is mounted on the end of the post **32a'**. As can be seen in **Figure 15**, the cap **232** has a body **234** with a radially outwardly-extending flange **236**. The body **234** fits within the post **32'**; a nub **235** fits within a notch **32b'** on the inner surface of the post **32a'**. The flange **236** extends radially outwardly beyond the outer surface of the dielectric sleeve **44'** mounted over the outer surface of the post **32a'**. As such, the flange **236** can protect the sleeve **44'** from contact with the central conductor extension **130'** during mating of the plug **30'** and jack **130'**.

[0052] In a similar manner, and as shown in **Figure 16**, the jack **130'** resembles the jack **130** with the exception that the dielectric spacer **139'** has a radially outwardly-extending flange **139a** that extends beyond the outer surface of the dielectric sleeve **144'**. A shoulder **139b** on the spacer **139'** fits within a notch **134a'** in the outer conductor extension **134**. Thus, the flange **139a** can protect the sleeve **144'** from contact with the outer conductor extension **34** during mating of the plug **30'** and the jack **130'**.

[0053] Embodiments of the invention are now described in greater detail in the following non-limiting examples, which are directed to investigation of the outer conductor extensions **34**, **134**.

Examples

[0054] The performance of the plug **30** and the jack **130** can be enhanced by varying the dimensions of the outer conductor extension **134** of the jack **130**. **Figures 8-13** are graphs plotting the return loss of two differently dimensioned plug-jack combinations that follow the general structure of **Figures 1-7** as a function of frequency. **Figures 8-10** relate to a jack **130** (designated Jack A for the purpose of discussion) with an outer conductor extension **134** having an inner diameter **A** of 23 mm. **Figures 11-13** relate to a jack **130** (designated Jack B) with an outer conductor extension having an inner diameter **A** of 22.5 mm.

[0055] **Figures 8** and **11** plot return loss as a function of frequency for plug-jack combinations in which the gap **g2** between the outer conductor extensions **34**, **134** is shorted (via aluminium tape that fills the gap **g2**). Comparing these two figures, it can be seen that, between markers **m1** and **m2**, the curve of **Figure 11** (showing Jack B) has a much lower return loss at **m1** and a generally lower return loss between **m1** and **m3** than does the curve of **Figure 8** (showing Jack A), with only the portion of the curve of **Figure 11** between **m3** and **m2** having a higher return loss than the curve of **Figure 8**.

[0056] **Figures 9 and 12** plot return loss as a function of frequency for plug-jack combinations in which the gap **g2** is present. Surprisingly, the curve of **Figure 9** (showing Jack A) shows a much lower return loss (below -35 dB between markers m1 and m2) than does the curve of **Figure 12** (showing Jack B), which is only below -26 dB between markers m1 and m2).

[0057] **Figure 10** shows, for Jack A, the curve of **Figure 8** (representing the structure with no gap **g2**) and a curve for the gap **g2** itself (calculated by subtracting the curve of **Figure 8** from the curve of **Figure 9**). Similarly, **Figure 13** shows, for Jack B, the curve of **Figure 11** (representing the structure with no gap **g2**) and a curve for the gap **g2** itself (calculated by subtracting the curve of **Figure 11** from the curve of **Figure 12**). It can be seen that the positive effect of the gap **g2** on return loss is much greater for Jack A than for Jack B. As discussed above, similar modifications can be made for the central conductor extensions **32, 132** and the gap **g1**.

[0058] The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the claims. The invention is defined by the following claims, with equivalents of the claims to be included therein.

That Which is Claimed is:

1. A coaxial connector junction, comprising:
 - (a) a first coaxial connector, comprising:
 - a first central conductor extension comprising a substantially cylindrical member;
 - a first outer conductor extension spaced apart from and circumferentially surrounding the first central conductor extension; and
 - a first dielectric spacer interposed between the first central conductor extension and the first outer conductor extension;
 - (b) a second coaxial connector, comprising:
 - a second central conductor extension, the second central conductor extension including a substantially cylindrical cavity therein;
 - a second outer conductor extension spaced apart from and circumferentially surrounding the second central conductor extension; and
 - a second dielectric spacer interposed between the second central conductor extension and the second outer conductor extension;wherein the first coaxial connector engages the second coaxial connector, the substantially cylindrical member of the first central conductor extension being inserted into the cavity of the second central conductor extension, and the second outer conductor extension being inserted into the first outer conductor extension such that a capacitive element is created between the first and second outer conductor extensions by a gap between the first outer conductor extension and the second outer conductor extension; and
wherein at least one of a length of the gap, an inner diameter of the second outer conductor extension, a thickness of the capacitive element, and the dielectric constant of the capacitive element is selected such that the return loss of the connector junction is maintained below a preselected level over a preselected frequency range.
2. The coaxial connector junction defined in Claim 1, wherein the preselected level of return loss is about 30 dB.
3. The coaxial connector junction defined in Claim 1, wherein the preselected frequency range is between about 600 Mhz and 3.50 GHz.

4. The coaxial connector junction defined in Claim 1, wherein the inner diameter of the second outer conductor extension is selected such that the return loss of the connector junction is maintained below the preselected level over the preselected frequency range.

5. The coaxial connector junction defined in Claim 1, wherein the at least one of the length of the gap, the inner diameter of the second outer conductor extension, the thickness of the capacitive element, and the dielectric constant of the capacitive element is selected such that the effect of the presence of the capacitive element alone reduces the return loss in an upper portion of the preselected frequency range.

6. A method of improving the return loss of a coaxial connector junction, comprising the steps of:

(a) providing first and second coaxial connectors, the first coaxial connector comprising:

- (vii) a first central conductor extension comprising a substantially cylindrical member;
- (viii) a first outer conductor extension spaced apart from and circumferentially surrounding the first central conductor extension; and
- (ix) a first dielectric spacer interposed between the first central conductor extension and the first outer conductor extension; and

the second coaxial connector comprising:

- (x) a second central conductor extension, the second central conductor extension including a substantially cylindrical cavity therein;
- (xi) a second outer conductor extension spaced apart from and circumferentially surrounding the second central conductor extension; and
- (xii) a second dielectric spacer interposed between the second central conductor extension and the second outer conductor extension;

wherein the first coaxial connector engages the second coaxial connector, the substantially cylindrical member of the first central conductor extension being inserted into the cavity of the second central conductor extension, and the second outer conductor extension being inserted into the first outer conductor extension such that a capacitive element is created between the first and second outer conductor extensions by a gap between the first outer conductor extension and the second outer conductor extension; and

(b) adjusting at least one of a length of the gap, an inner diameter of the second outer conductor extension, a thickness of the capacitive element, and the dielectric constant of the capacitive element such that the return loss of the connector junction is maintained below a preselected level over a preselected frequency range.

7. The method defined in Claim 6, wherein the preselected level of return loss is about 30 dB.

8. The method defined in Claim 6, wherein the preselected frequency range is between about 696 MHz and 2.70 GHz.

9. The method defined in Claim 6, wherein the inner diameter of the second outer conductor extension is selected such that the return loss of the connector junction is maintained below the preselected level over the preselected frequency range.

10. The method defined in Claim 6, wherein the at least one of the inner diameter of the second outer conductor extension, the thickness of the capacitive element, and the dielectric constant of the capacitive element is selected such that the effect of the presence of the capacitive element alone reduces the return loss in an upper portion of the preselected frequency range.

11. A coaxial connector junction, comprising:

(a) a first coaxial connector, comprising:

a first central conductor extension comprising a substantially cylindrical member;
a first outer conductor extension spaced apart from and circumferentially surrounding the first central conductor extension; and

a first dielectric spacer interposed between the first central conductor extension and the first outer conductor extension;

(b) a second coaxial connector, comprising:

a second central conductor extension, the second central conductor extension including a substantially cylindrical cavity therein;

a second outer conductor extension spaced apart from and circumferentially surrounding the second central conductor extension; and

a second dielectric spacer interposed between the second central conductor extension and the second outer conductor extension;

wherein the first coaxial connector engages the second coaxial connector, the substantially cylindrical member of the first central conductor extension being inserted into the cavity of the second central conductor extension, and the second outer conductor extension being inserted into the first outer conductor extension such that a capacitive element is created between the first and second central conductor extensions by a gap between the first central conductor extension and the second central conductor extension; and

wherein at least one of a length of the gap, an inner diameter of the second central conductor extension, a thickness of the capacitive element, and the dielectric constant of the capacitive element is selected such that the return loss of the connector junction is maintained below a preselected level over a preselected frequency range.

12. The coaxial connector junction defined in Claim 11, wherein the preselected level of return loss is about 30 dB.

13. The coaxial connector junction defined in Claim 11, wherein the preselected frequency range is between about 600 Mhz and 3.50 GHz.

14. The coaxial connector junction defined in Claim 11, wherein the inner diameter of the second central conductor extension is selected such that the return loss of the connector junction is maintained below the preselected level over the preselected frequency range.

15. The coaxial connector junction defined in Claim 11, wherein the at least one of the length of the gap, the inner diameter of the second central conductor extension, the thickness of the capacitive element, and the dielectric constant of the capacitive element is selected such that the effect of the presence of the capacitive element alone reduces the return loss in an upper portion of the preselected frequency range.

16. A method of improving the return loss of a coaxial connector junction, comprising the steps of:

(a) providing first and second coaxial connectors, the first coaxial connector comprising:

(vii) a first central conductor extension comprising a substantially cylindrical member;

- (viii) a first outer conductor extension spaced apart from and circumferentially surrounding the first central conductor extension; and
 - (ix) a first dielectric spacer interposed between the first central conductor extension and the first outer conductor extension; and
- the second coaxial connector comprising:
- (x) a second central conductor extension, the second central conductor extension including a substantially cylindrical cavity therein;
 - (xi) a second outer conductor extension spaced apart from and circumferentially surrounding the second central conductor extension; and
 - (xii) a second dielectric spacer interposed between the second central conductor extension and the second outer conductor extension;

wherein the first coaxial connector engages the second coaxial connector, the substantially cylindrical member of the first central conductor extension being inserted into the cavity of the second central conductor extension, and the second outer conductor extension being inserted into the first outer conductor extension such that a capacitive element is created between the first and second central conductor extensions by a gap between the first central conductor extension and the second central conductor extension; and

(b) adjusting at least one of a length of the gap, an inner diameter of the second central conductor extension, a thickness of the capacitive element, and the dielectric constant of the capacitive element such that the return loss of the connector junction is maintained below a preselected level over a preselected frequency range.

17. The method defined in Claim 16, wherein the preselected level of return loss is about 30 dB.

18. The method defined in Claim 16, wherein the preselected frequency range is between about 696 MHz and 2.70 GHz.

19. The method defined in Claim 16, wherein the inner diameter of the second central conductor extension is selected such that the return loss of the connector junction is maintained below the preselected level over the preselected frequency range.

20. The method defined in Claim 16, wherein the at least one of the length of the gap, the inner diameter of the second central conductor extension, the thickness of the capacitive element, and the dielectric constant of the capacitive element is selected such that the effect of the presence of the capacitive element alone reduces the return loss in an upper portion of the preselected frequency range.

21. A coaxial connector junction, comprising:

(a) a first coaxial connector, comprising:

a first central conductor extension comprising a substantially cylindrical member;
a first outer conductor extension spaced apart from and circumferentially surrounding the first central conductor extension; and

a first dielectric spacer interposed between the first central conductor extension and the first outer conductor extension;

(b) a second coaxial connector, comprising:

a second central conductor extension, the second central conductor extension including a substantially cylindrical cavity therein;

a second outer conductor extension spaced apart from and circumferentially surrounding the second central conductor extension; and

a second dielectric spacer interposed between the second central conductor extension and the second outer conductor extension;

wherein the first coaxial connector engages the second coaxial connector, the substantially cylindrical member of the first central conductor extension being inserted into the cavity of the second central conductor extension, and the second outer conductor extension being inserted into the first outer conductor extension such that a capacitive element is created between the first and second outer conductor extensions by a gap between the first outer conductor extension and the second outer conductor extension;

wherein the capacitive element in the gap comprises a dielectric layer applied on the second outer conductor extension; and

wherein the second dielectric spacer includes a flange that extends radially outward toward to protect the dielectric layer of the capacitive element.

22. A coaxial connector junction, comprising:

(a) a first coaxial connector, comprising:

a first central conductor extension comprising a substantially cylindrical member;

a first outer conductor extension spaced apart from and circumferentially surrounding the first central conductor extension; and

a first dielectric spacer interposed between the first central conductor extension and the first outer conductor extension;

(b) a second coaxial connector, comprising:

a second central conductor extension, the second central conductor extension including a substantially cylindrical cavity therein;

a second outer conductor extension spaced apart from and circumferentially surrounding the second central conductor extension; and

a second dielectric spacer interposed between the second central conductor extension and the second outer conductor extension;

wherein the first coaxial connector engages the second coaxial connector, the substantially cylindrical member of the first central conductor extension being inserted into the cavity of the second central conductor extension, and the second outer conductor extension being inserted into the first outer conductor extension such that a capacitive element is created between the first and second central conductor extensions by a gap between the first central conductor extension and the second central conductor extension;

wherein the capacitive element in the gap comprises a dielectric layer applied on the first central conductor extension; and

further comprising a dielectric cap mounted to a free end of the first central conductor extension, the dielectric cap includes a flange that extends radially outward toward to protect the dielectric layer of the capacitive element.

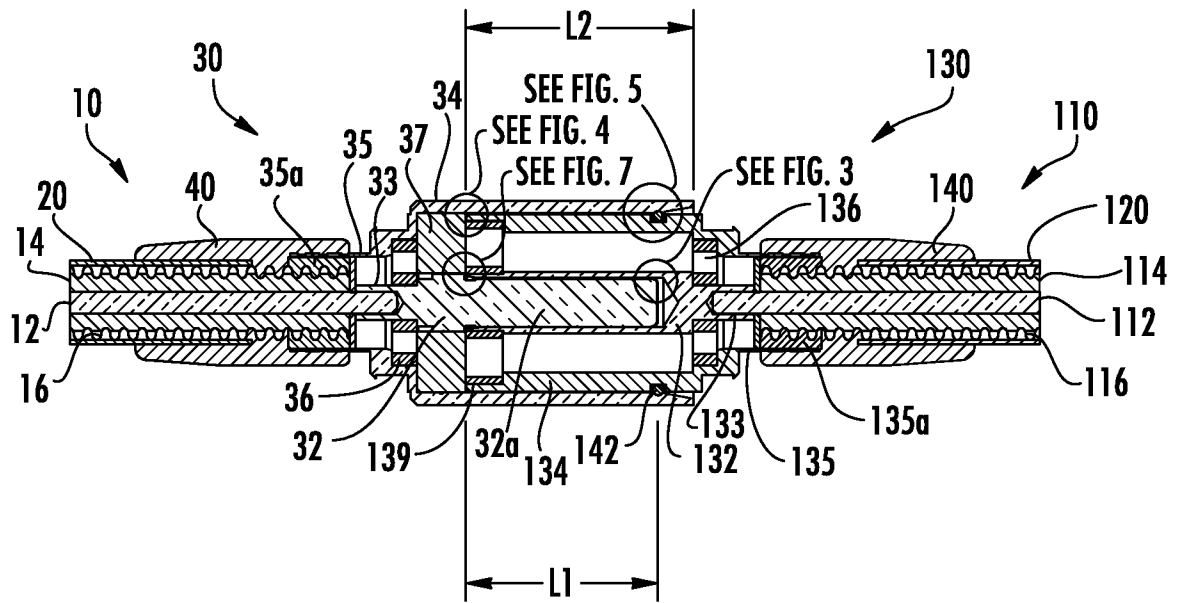


FIG. 1

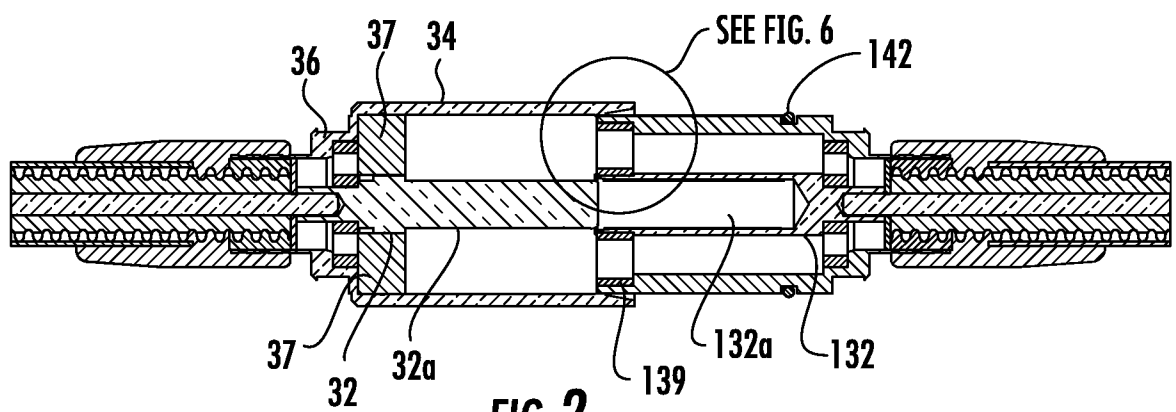


FIG. 2

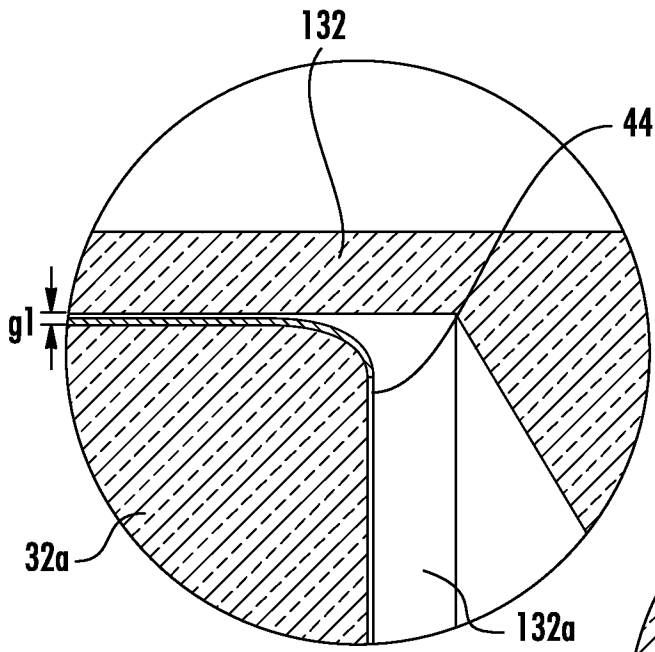


FIG. 3

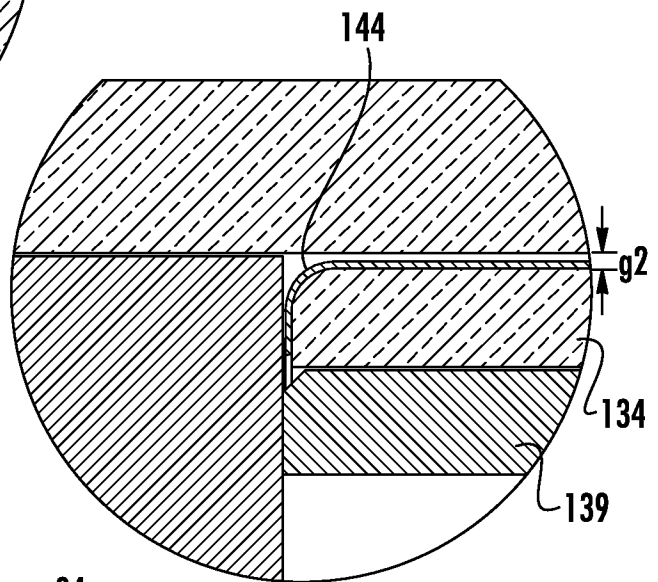


FIG. 4

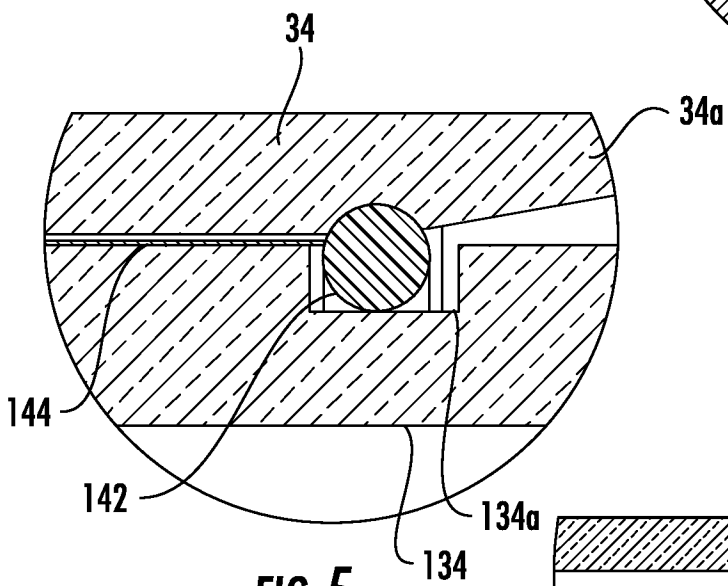


FIG. 5

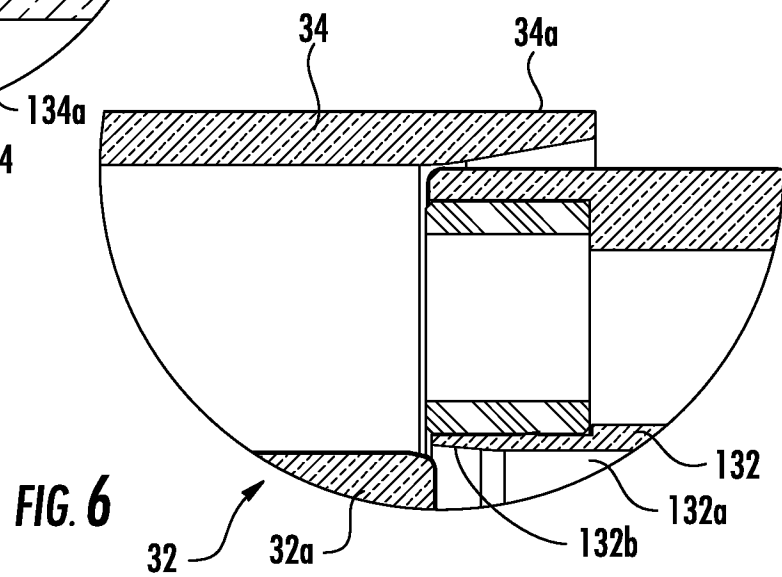
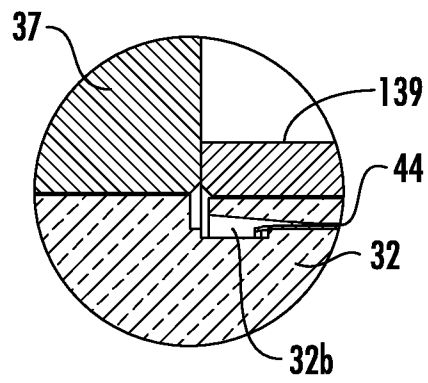
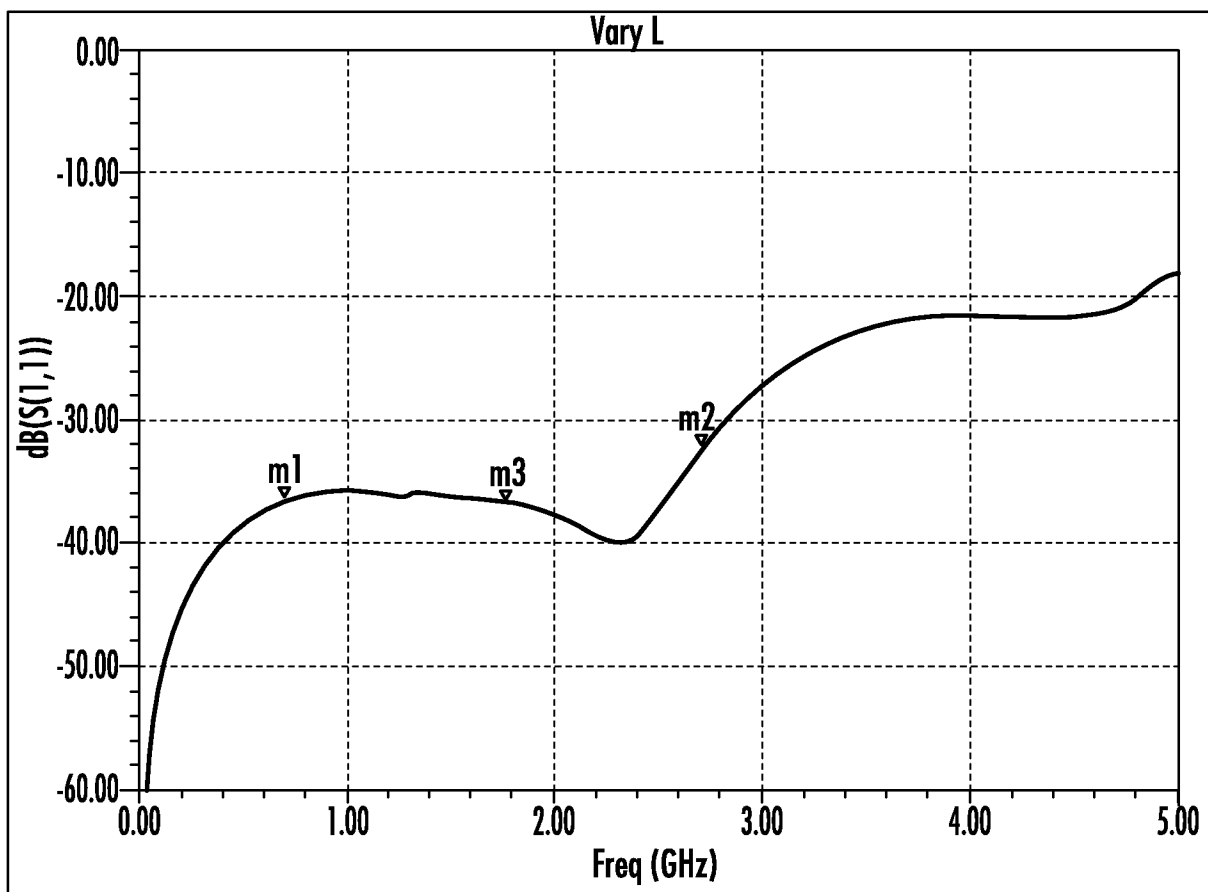


FIG. 6

3/8

**FIG. 7****FIG. 8**

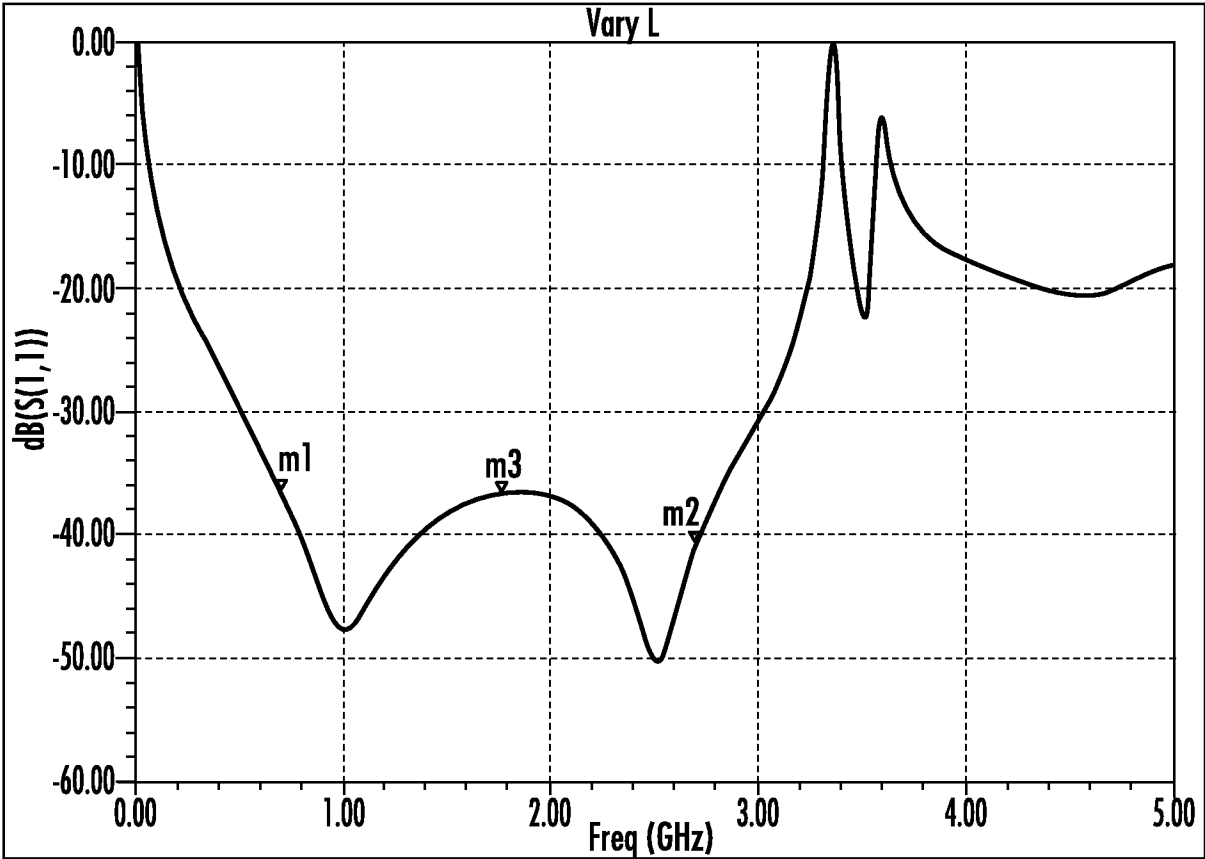


FIG. 9

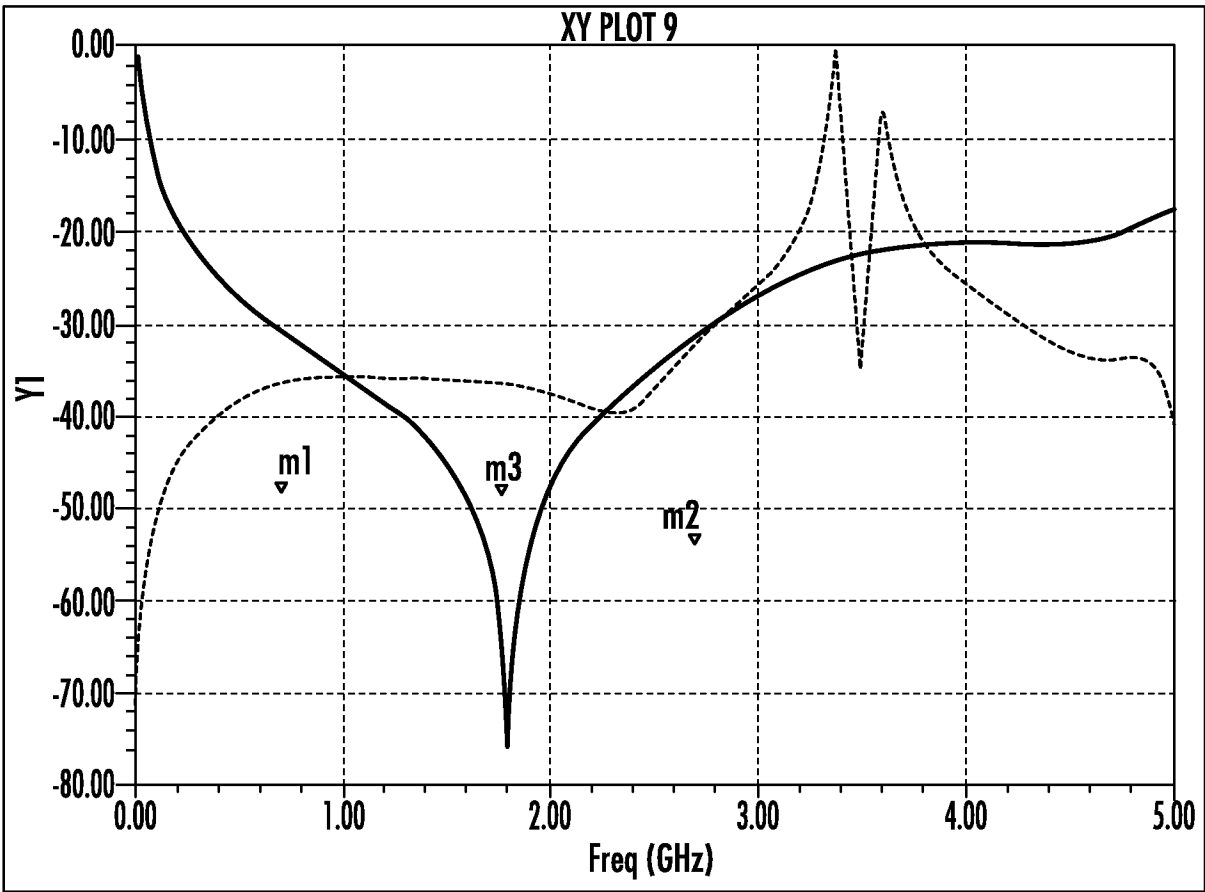
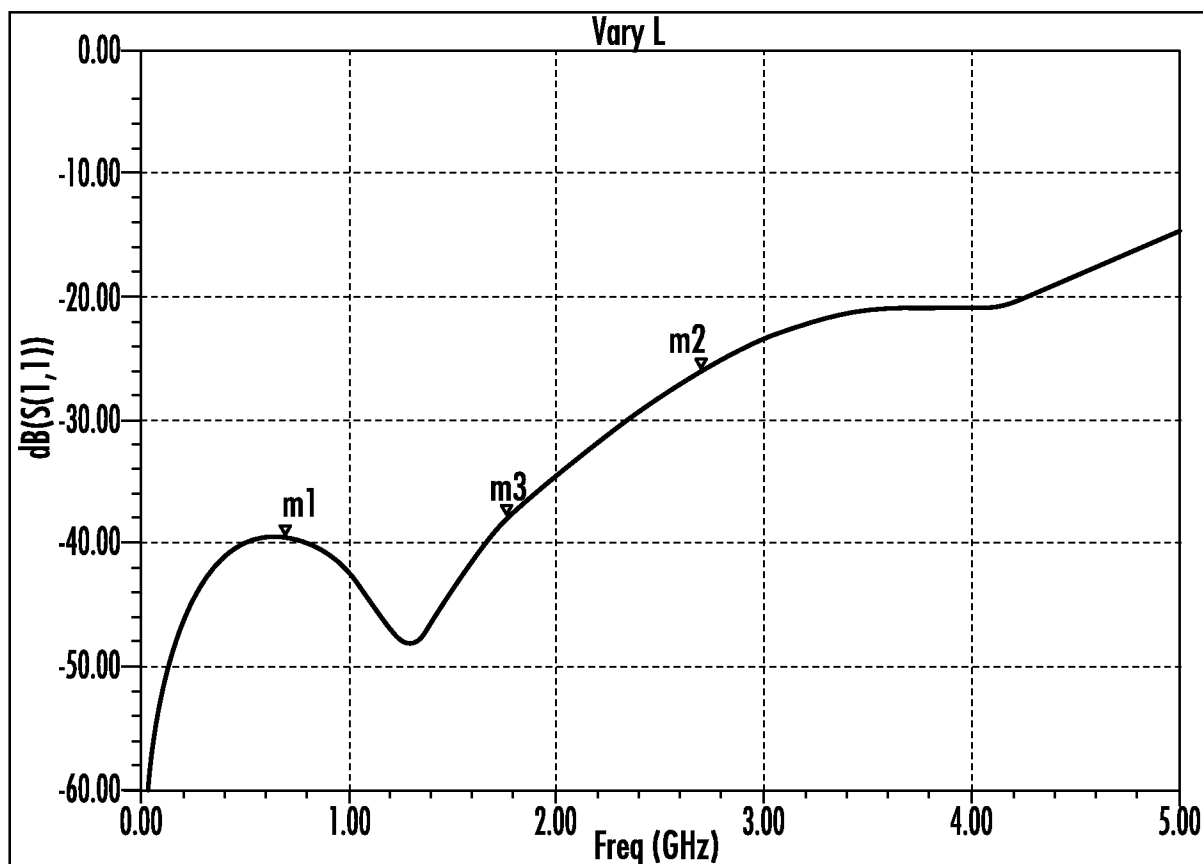
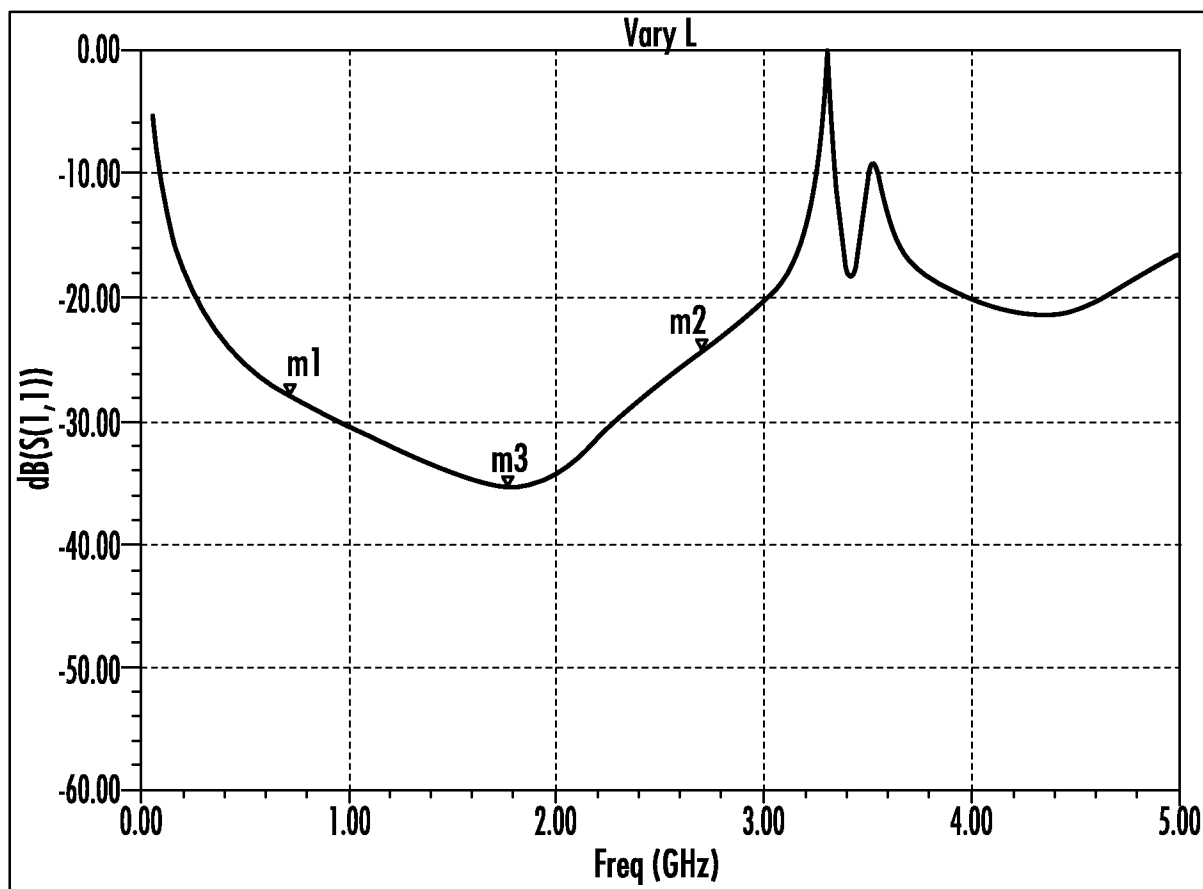


FIG. 10

**FIG. 11****FIG. 12**

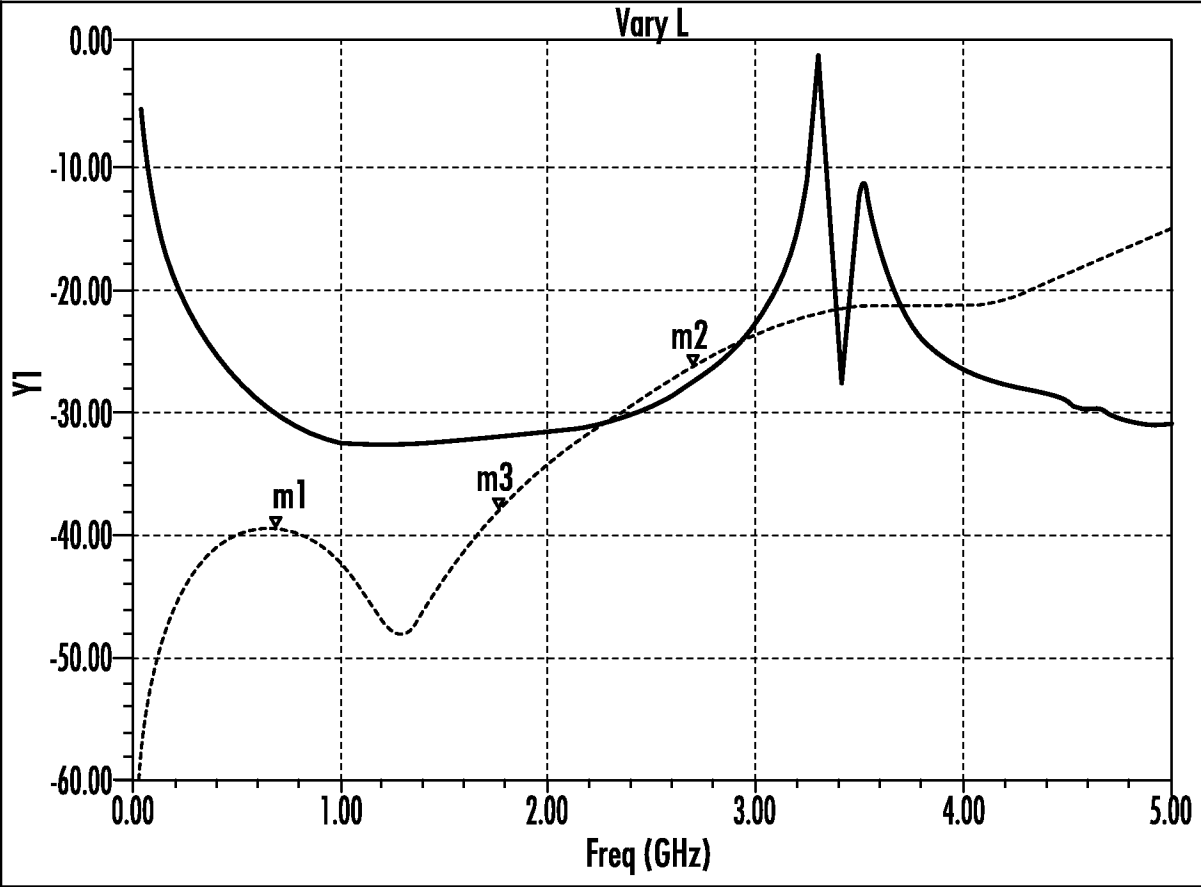


FIG. 13

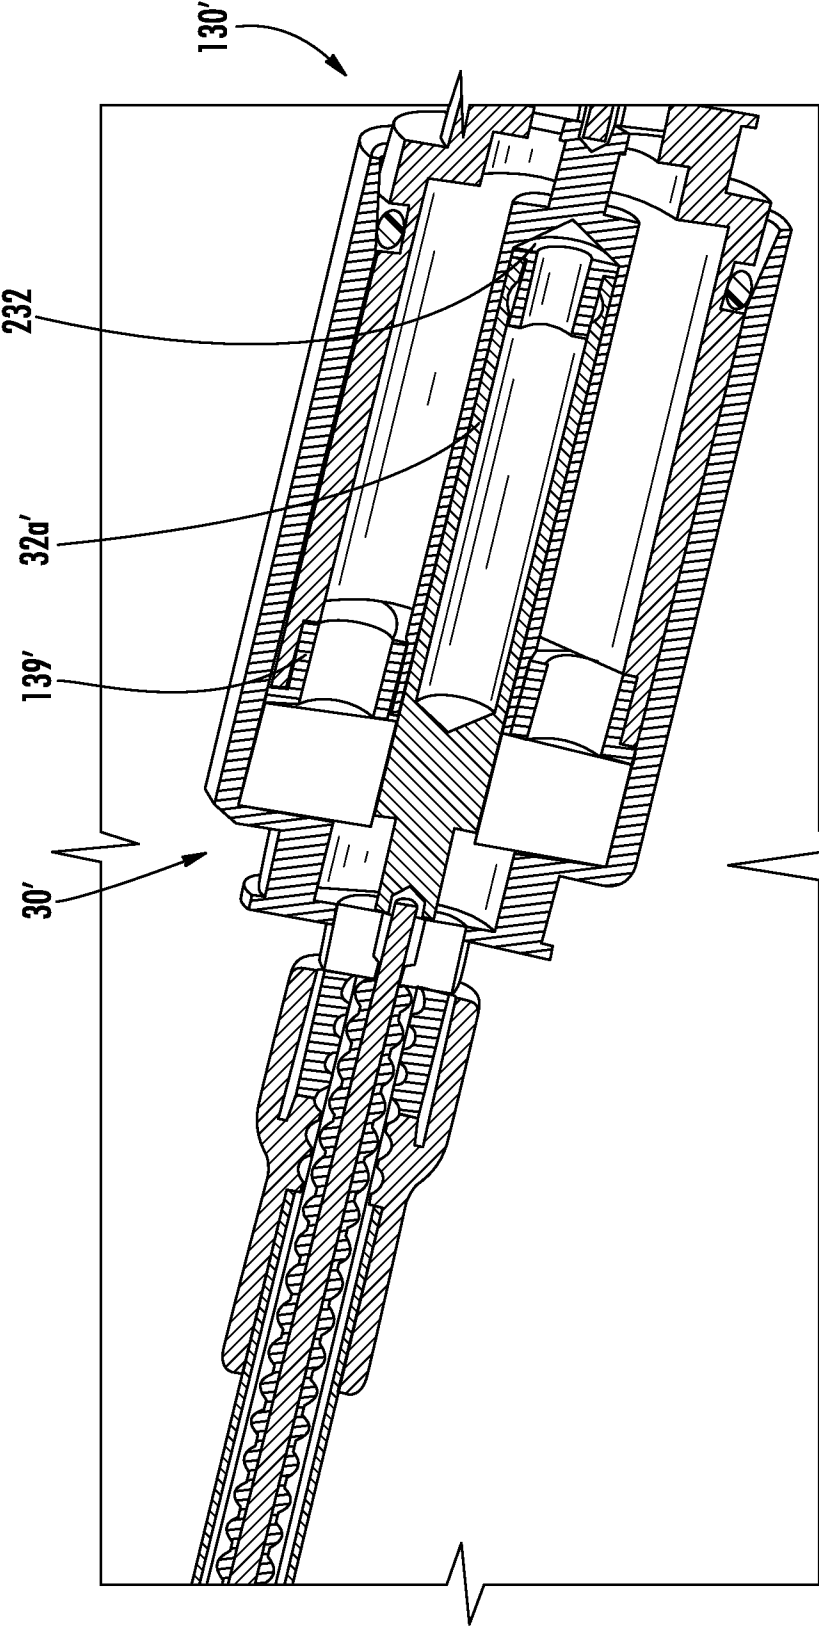


FIG. 14

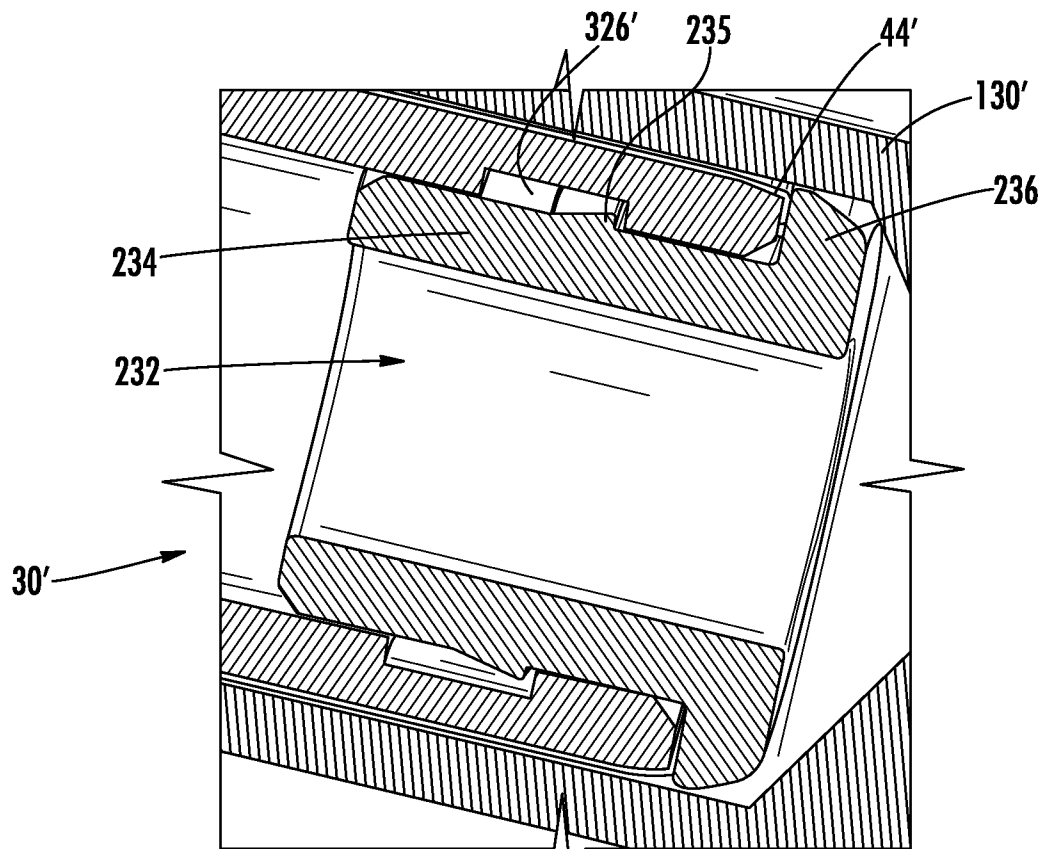


FIG. 15

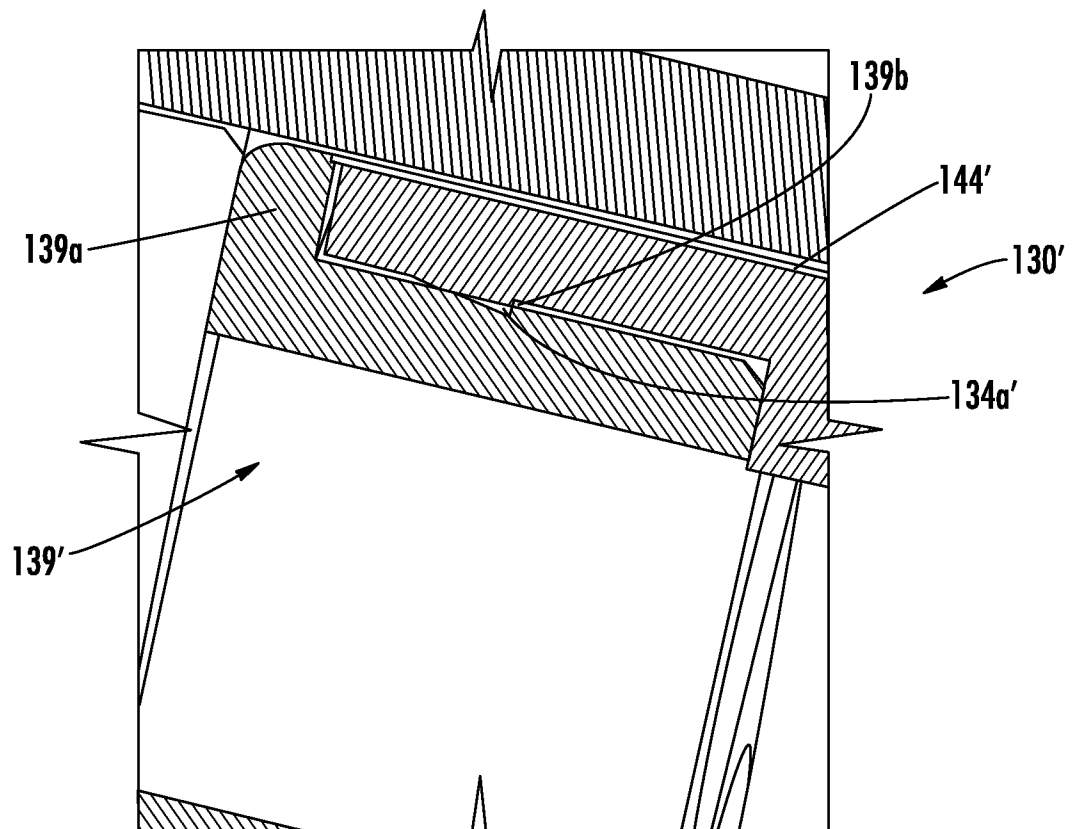


FIG. 16

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/040124**A. CLASSIFICATION OF SUBJECT MATTER****H01R 24/38(2011.01)i, H01R 9/05(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01R 24/38; H03H 7/00; H01R 9/05

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: coaxial, connector, junction, gap, return loss

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011-0256760 A1 (SATOSHI IGARASHI et al.) 20 October 2011 See paragraphs [0056]-[0093]; claim 1; and figures 1-10.	1-22
A	US 2006-0046565 A1 (ROBERT CRAIG HOSLER SR.) 02 March 2006 See paragraphs [0026]-[0034]; claim 1; and figures 4-7c.	1-22
A	US 2010-0273349 A1 (YI-HSIANG CHEN) 28 October 2010 See paragraphs [0014]-[0020]; and figures 2-4C.	1-22
A	US 2010-0007441 A1 (TAKATOSHI YAGISAWA et al.) 14 January 2010 See paragraphs [0035]-[0068]; claim 1; and figures 1-14B.	1-22
A	JP 2012-508431 A (ANDREW LLC.) 05 April 2012 See paragraphs [0013]-[0020]; claims 1-10; and figures 1-6.	1-22



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 October 2015 (27.10.2015)

Date of mailing of the international search report

27 October 2015 (27.10.2015)

Name and mailing address of the ISA/KR


International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 35208,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

PARK, Hye Lyun

Telephone No. +82-42-481-3463



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/040124

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011-0256760 A1	20/10/2011	JP 2011-228088 A JP 5014457 B2 US 8323054 B2	10/11/2011 29/08/2012 04/12/2012
US 2006-0046565 A1	02/03/2006	CN 1744391 A GB 2417618 A GB 2417618 B US 7381089 B2	08/03/2006 01/03/2006 04/03/2009 03/06/2008
US 2010-0273349 A1	28/10/2010	US 7806725 B1	05/10/2010
US 2010-0007441 A1	14/01/2010	JP 2010-021076 A JP 5083081 B2 US 2011-0140800 A1 US 2011-0306237 A1 US 7952449 B2 US 8026774 B2 US 8269576 B2	28/01/2010 28/11/2012 16/06/2011 15/12/2011 31/05/2011 27/09/2011 18/09/2012
JP 2012-508431 A	05/04/2012	CN 102204031 A CN 102204032 A CN 102640357 A CN 102640358 A CN 102640359 A EP 2281328 A2 EP 2281328 A4 EP 2281329 A2 EP 2497155 A1 EP 2497157 A2 EP 2497160 A1 JP 2012-508432 A KR 10-1168135 B1 KR 10-2011-0081055 A TW 201021327 A US 2010-0112853 A1 US 2010-0112855 A1 US 2010-0112856 A1 US 2011-0008998 A1 US 2011-0009000 A1 US 2011-0021074 A1 US 7806724 B2 US 7918687 B2 US 7927134 B2 US 8277247 B2 US 8449327 B2 US 8454383 B2 WO 2010-054021 A2 WO 2010-054021 A3 WO 2010-054026 A2	28/09/2011 28/09/2011 15/08/2012 15/08/2012 15/08/2012 09/02/2011 15/08/2012 09/02/2011 12/09/2012 12/09/2012 12/09/2012 05/04/2012 24/07/2012 13/07/2011 01/06/2010 06/05/2010 06/05/2010 06/05/2010 13/01/2011 13/01/2011 27/01/2011 05/10/2010 05/04/2011 19/04/2011 02/10/2012 28/05/2013 04/06/2013 14/05/2010 12/08/2010 14/05/2010

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/040124Patent document
cited in search reportPublication
datePatent family
member(s)Publication
date

WO 2010-054026 A3	12/08/2010
WO 2011-053438 A1	05/05/2011
WO 2011-053439 A2	05/05/2011
WO 2011-053439 A3	25/08/2011
WO 2011-053440 A1	05/05/2011