




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H03G 3/20, H04B 1/707	A1	(11) International Publication Number: WO 00/13312 (43) International Publication Date: 9 March 2000 (09.03.00)
(21) International Application Number: PCT/SE99/01429 (22) International Filing Date: 23 August 1999 (23.08.99) (30) Priority Data: 09/140,470 26 August 1998 (26.08.98) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: PALENIUS, Torgny; Svalörtsvägen 10, S-246 50 Löddeköpinge (SE). ERIKSSON, Håkan; Iliongränd 35, S-224 72 Lund (SE). (74) Agent: ERICSSON MOBILE COMMUNICATIONS AB; IPR Dept., S-221 83 Lund (SE).	(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: CONTROL OF POWER RATIOS FOR IN-PHASE AND QUADRATURE CHANNELS IN A COMMUNICATIONS SYSTEM

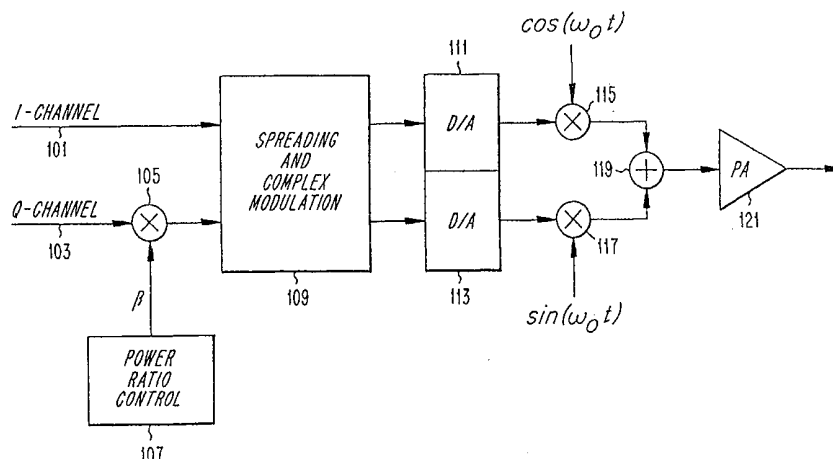

(57) Abstract

A transmitter in a radiocommunications system such as a Wideband Code Division Multiple Access (WCDMA) communications system transmits one set of data on an in-phase (I-) channel and another set of data on a quadrature (Q-) channel. The transmitter generates a gain signal, β , and multiplies the digital data associated with the Q-channel by the gain signal, β . Complexity of the multiplication operation is reduced by limiting the gain signal, β , to a finite number of values that are exactly representable by a predefined number of bits, such as 4-bit values to the right of a binary radix point. Modulation inaccuracy associated with quantization of β can be eliminated by utilizing the same quantized values of β in all components within the radiocommunications system.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

CONTROL OF POWER RATIOS FOR IN-PHASE AND QUADRATURE CHANNELS IN A COMMUNICATIONS SYSTEM

BACKGROUND

The invention relates to radio communications systems use I/Q-
5 modulation, and more particularly to control of a power ratio between the I- and Q-
channels in such a system.

Modulation schemes utilizing In-phase (I) and Quadrature (Q) signal
components are known. In some cases, such as uplink transmissions in the IMT20000
Wideband Code Division Multiple Access (WCDMA) radio communications system
10 standard proposed in Europe and Japan, IQ-modulation is used in a manner whereby
different data channels are transmitted in the I and Q components (henceforth referred
to throughout this disclosure as "I-" and "Q-channels"). In the proposed WCDMA
system, the common control channel (PCCH) is transmitted on the Q-channel at a data
rate of 16 kilobits per second using a spreading factor of 256, while traffic and
15 dedicated control channel (PDCH) is transmitted on the I-channel at a data rate
somewhere between 32 kilobits per second (spreading factor of 128) and 1024 kilobits
per second (spreading factor of 4).

The power requirements on each of these I- and Q-channels are of
course different from one another. Therefore, before spreading and scrambling are
20 applied, the I- and Q-channels have different power levels. It might first be assumed
that the power of the channel will be proportional to the data rate in the channel.
However, this is not necessarily the case because there are different quality of service
requirements on the different channels. The PCCH channel has pilots that may require
a quality of service that differs from that required for the speech or data services
25 multiplexed on the PDCH-channel.

The power levels of the I- and Q-channels are controlled by a common
Power Control algorithm. This algorithm increases or decreases the power in order to
keep the signal power constant at the receiver. To accomplish this, the algorithm
should follow the Rayleigh fading, the lognormal fading and the varying path loss due
30 to the varying distance between the terminal and the base station.

A problem that is encountered derives from the requirement that the terminals in the WCDMA system have a transmitter characterized by good modulation accuracy. To get the exact power difference of, for example, 3 dB between the I and the Q-channels requires that the amplitude ratio in the terminal be

$$\beta = \frac{1}{\sqrt{2}} = 0.707 .$$

5 To effect this power ratio, the data samples in the Q-channel are multiplied by the value of β , and the resultant samples are supplied to spreading and complex modulation circuits, along with data samples from the I-channel.

Implementation of this exact power ratio is problematic because representation of the number 0.707 requires many bits that will need to participate in
10 the multiplication that is performed on each sample that is to be transmitted. As is well-known, the computational burden imposed by a multiplication operation is related to the length of the operands involved. Increased computational burden translates not only into longer computational time, but also increased power requirements for performing the computation.

15 Moreover, when a system, such as the above-described WCDMA system, is designed with the assumption that the values of β may vary continuously, different components in the system (e.g., terminals made by different manufacturers) may introduce different quantization errors when representing β . As a consequence of these mismatches, system performance will be degraded.

20

SUMMARY

It is therefore an object of the present invention to provide a power ratio control strategy that improves performance compared to conventional techniques.

In accordance with one aspect of the present invention, the foregoing and other objects are achieved in methods and apparatuses for use in a transmitter in a
25 radiocommunications system such as a Wideband Code Division Multiple Access (WCDMA) communications system. The transmitter transmits one set of data on an in-phase (I-) channel and another set of data on a quadrature (Q-) channel. The transmitter generates a gain signal, β , and multiplies the digital data associated with the

Q-channel by the gain signal, β . Complexity of the multiplication operation is reduced by limiting the gain signal, β , to a finite number of values that are exactly representable by a predefined number of bits, such as 4-bit values to the right of a binary radix point.

- 5 In another aspect of the invention, modulation inaccuracy associated with quantization of β can be eliminated by utilizing the same quantized values of β in all components within the radiocommunications system.

BRIEF DESCRIPTION OF THE DRAWINGS

- The objects and advantages of the invention will be understood by
10 reading the following detailed description in conjunction with the drawings in which:

FIG. 1 is a block diagram of a radio communications system transmitter that operates in accordance with one aspect of the invention;

- FIG. 2 is a set of graphs depicting, for each of a number of candidate quantization amounts, the required extra transmitted power as a function of the desired
15 gain value β ;

FIG. 3 is a flowchart depicting an exemplary techniques for selecting a β value in accordance with one aspect of the invention;

- FIG. 4 is a set of graphs showing, for each of a number of quantization levels, the resulting modulation accuracy plotted as a function of the ideal gain
20 parameter, β_{IDEAL} .

DETAILED DESCRIPTION

The various features of the invention will now be described with respect to the figures, in which like parts are identified with the same reference characters.

- FIG. 1 is a block diagram of a radio communications system transmitter
25 that operates in accordance with the invention. The transmitter employs I and Q channels as described above in the BACKGROUND section. Data samples associated with the Q channel 103 are supplied to one input of a multiplier 105, the other input of which receives a β value from a power ratio control circuit 107. The multiplier 105 multiplies the Q channel data by β for the purpose of power ratio control, as described
30 earlier. The multiplied Q channel data along with data associated with the I-channel

101 are supplied to a spreading and complex modulation circuit 109. The resulting I and Q channel signals are supplied to respective first and second digital to analog (D/A) converters 111, 113. The analog signals supplied by the first and second D/A converters 111, 113 are supplied to respective first and second mixers 115, 117. The
5 first mixer 115 uses a cosine signal for mixing, whereas the second mixer 117 uses a sine signal for mixing. The outputs from the first and second mixers 115, 117 are combined in combining means 119 (e.g., an adder), the output of which is supplied to a power amplifier 121 for amplification prior to transmission.

In accordance with one aspect of the invention, the transmitter further
10 includes a power ratio control unit 107 that generates values for β in a manner that will now be described. The principles upon which the power ratio control unit 107 operates derive, at least in part, from the fact that in a CDMA-like radiocommunications system, all signals are transmitted simultaneously on the same carrier frequency. All
15 signals other than the desired signal are seen as interference in the receiver. When received by the base station, all received signals should have approximately the same energy per transmitted bit in order to minimize the interference from each user and thereby optimize the capacity of the cell.

In the uplink channel of an IQ-modulated scheme such as the above-mentioned WCDMA system, the spreading factor of the Q-channel is set at 256,
20 whereas the spreading factor of the I-channel may be any of the following: 128, 64, 32, 16, 8 and 4. The purpose of the gain factor, β , is to guarantee an optimization of system capacity. In conventional systems, no restrictions are placed on possible values of β (that is, in conventional systems β is specified as a continuous parameter).

The selection of a value for β can have a great impact on system
25 performance. For example, a measure of speed at which information is transmitted in a CDMA system is the "chip rate." In an exemplary system, the primary chip rate can be $f_c = 4.096$ Mchip/s, with other chip rates of 1.024, 2.048, 8.192 and 16.384
Mchip/s also being defined for use. Referring to FIG. 1, the digital information signal supplied on the Q-channel 103 may have an oversampling rate ("OS") of 4, with each
30 sample being represented by a number of bits N_b . Multiplying each of the resultant samples by β will then require $f_s = f_c \cdot OS = 16.385$ Mops in the 4.096 Mchip/s mode.

Every extra bit in the multiplier (i.e., N_b * number of bits in β) makes each multiplication operation more complex, and in addition adds an extra bit per sample that needs to be transmitted and processed. Consequently, to achieve a power efficient design, the number of bits involved in the multiplication should be minimized.

5 This can be accomplished by restricting β to values that can be accurately represented with a relatively small number of bits. However, as mentioned above, the purpose of the gain factor, β , is to guarantee an optimization of system capacity, and this cannot be accomplished with any arbitrary value of β . Rather, an analysis needs to be performed to determine suitable values of β that can reduce the required computational
10 complexity associated with the multiplication operation, without overly degrading system capacity.

An exemplary analysis is as follows. Assume that in implementations of the exemplary transmitter, β will be in the form of a signal having a finite number of bits. Consequently, where β_{IDEAL} represents an "ideal" value that guarantees the
15 optimized system capacity, the β signal represents the ideal value plus some quantization noise that is introduced by approximating the ideal value with a finite number of bits. That is, $\beta = \beta_{IDEAL} + (\text{quantization noise})$.

In the exemplary embodiment, values for β are selected by allowing β to exactly represent β_{IDEAL} wherever possible (e.g., where $\beta_{IDEAL} = 0.5$, and β is
20 represented by at least one bit to the right of the binary radix point), and in all other cases by rounding β up to the next higher representable number. The reason why always rounding up is preferred over rounding to the closest representable number (which may, in some cases, result in rounding down) is because rounding down causes the I over Q power ratio to decrease. As a consequence, the power in the I-channel
25 would have to be increased in order for its performance to be relatively good with respect to that of the Q-channel. With this strategy for selecting β values in mind, the transmitted extra power when the β value is slightly increased can be calculated for a number of candidate representational bit-sizes for β .

FIG. 2 is a set of graphs depicting, for each of a number of candidate
30 quantization amounts (i.e., the number of bits being used to represent β), the required extra transmitted power (in decibels) as a function of the desired β value. Graphs are shown for 3-, 4-, 5- and 6-bit representations of β . It can be seen from the graphs that

when a 3-bit representation is used, the worst-case required extra transmitted power is about 0.5 dB. By comparison, when a 4-bit representation is used, the worst-case required extra transmitted power is only 0.25 dB, and in most cases it is much less. As the number of bits used to represent β increases, the amount of required extra transmitted power decreases. In determining which value of β is best to use, another factor that is considered is the minimum step-size for adjustment of transmission power. In many radiocommunications systems, transmission power adjustments can only be made in discrete amounts. In the exemplary WCDMA system, the smallest possible transmission power adjustment is 0.25 dB. Consequently, even though the use of 5- or 6-bit representations of β only requires, at most, approximately 0.12 dB (see FIG. 2) of extra transmission power, the radiocommunications system would, in practice, be forced to increase power by 0.25 dB, because smaller adjustments are impossible. Consequently, it is best to represent β using 4-bit values in this case because using more than 4 bits only increases the multiplication complexity without resulting in any additional transmission power savings.

In view of the above, one embodiment of the invention involves quantizing (i.e., representing) β by that number of bits, N_β , that results in the lowest maximum required extra transmission power, P_{EXTRA} , that does not go below a predetermined multiple, K , of the minimum power adjustment amount, ΔP_{ADJ} . In the example described above, $K=1$, so that only the smallest possible power adjustment amount will be required as a result of the quantization of β . In some other instances, however, it may be desirable to choose a different value of K where the benefits of keeping N_β low outweigh the benefits of further reducing the required extra transmission power. One way of selecting a β value, then, is illustrated in the flowchart of FIG. 3. At step 301, the quantization amount, N_β , is initialized to the lowest possible value (i.e., 1). Next, P_{EXTRA} is determined as a function of the given N_β value (step 303). The value of P_{EXTRA} is then compared to the quantity $K \cdot \Delta P_{\text{ADJ}}$ (decision block 305), and if it is greater than or equal ("yes" path out of decision block 305), then the value of N_β is incremented by one (step 307). The rationale behind this step is to test another quantization amount to see if the required extra transmission power can be reduced without dropping below the desired minimum of $K \cdot \Delta P_{\text{ADJ}}$. After adjusting N_β , execution is repeated back at step 303.

When a value of P_{EXTRA} is found that is less than $K \cdot \Delta P_{\text{ADJ}}$ ("no" path out of decision block 305), then too many bits are being used to represent β . The value of N_β is adjusted accordingly back to its previous acceptable level (step 309), and the process of selecting a quantization level for β is complete.

- 5 The following Table 1 illustrates an exemplary set of β values that are selected to be close to the data rate ratios. For each ratio, an ideal value, β_{IDEAL} , is shown, along with the proposed value based on the use of 4-bit representations of β , as determined above.

Table 1

10	I-channel rate (kbps)	Q-channel rate (kbps)	Ratio of symbol rates in I- and Q-channels	Ideal value, β_{IDEAL}	Proposed gain, β , using 4-bit representation	β -steps in dB
	16	0	0	0	Switch off Q- channel	
	16	16	1	1	1	
15	16	32	$\frac{1}{2}$	0.707	0.75	3.52
	16	64	$\frac{1}{4}$	0.5	0.5	2.77
	16	128	$\frac{1}{8}$	0.354	0.375	2.49
	16	256	$\frac{1}{16}$	0.25	0.25	3.52
	16	512	$\frac{1}{32}$	0.177	0.1875	2.5
20	16	1024	$\frac{1}{64}$	0.125	0.125	3.52

- Another factor to consider in selecting an amount of quantization for representing β relates to the effect that this has on modulation inaccuracy. In most cellular telephone systems, for example, standards under which those systems must operate set limits on the amount of modulation inaccuracy that will be acceptable by any given terminal. If a given radiocommunications system operates under a standard that places no restrictions on β values (i.e., the system assumes that β_{IDEAL} is being used), then a terminal that utilizes a quantized value of β will exhibit modulation inaccuracy when compared with signals that the system would expect to be generated. FIG. 4 is a set of graphs showing, for each of a number of quantization levels, the

resulting modulation inaccuracy plotted as a function of the ideal gain parameter, β_{IDEAL} . It can be seen that when 4-bit β values are used, the modulation inaccuracy is about 6%. This is a substantial amount of the usual total acceptable modulation inaccuracy, so that serious restrictions would have to be imposed on other components in the radio terminal in order to avoid exceeding the permissible modulation inaccuracy limitations.

In accordance with another aspect of the invention, the problem of modulation inaccuracy resulting from quantization of β is addressed by designing the entire radiocommunications system based on the quantized values of β , rather than on the unrestricted ideal values, β_{IDEAL} . By requiring each transmitter to use the same, quantized values of β , (e.g., $N_{\beta}=4$), the system no longer perceives any modulation inaccuracy in connection with this quantization. This has the dual effect of eliminating system mismatches that can occur when different manufacturers quantize differently, while making it easier to design terminals without sacrificing system capacity.

Techniques for selecting values for gain, β , have been described above. In use, these β values would be generated by a power ratio control unit 107, as illustrated in FIG. 1. The power ratio control unit 107 may be implemented, for example, as a digital storage device having stored therein the necessary one or more β values. Preferred criteria for selecting quantized values of β have been described, with a particular value, $\beta=4$, being preferred for use in the above-described exemplary WCDMA system. However, it will be recognized by those skilled in the art that other criteria may be used for selecting quantized values of β . For example, one need not always try to find that value of N_{β} that produces the smallest value of P_{EXTRA} that satisfies the relation $P_{\text{EXTRA}} \geq K \cdot P_{\text{ADJ}}$. Instead, there may be other tradeoffs between modulation accuracy and required extra transmission power that might be desired in other instances. The invention covers these aspects as well.

The invention has been described with reference to a particular embodiment. However, it will be readily apparent to those skilled in the art that it is possible to embody the invention in specific forms other than those of the preferred embodiment described above. This may be done without departing from the spirit of the invention. The preferred embodiment is merely illustrative and should not be considered restrictive in any way. The scope of the invention is given by the appended

claims, rather than the preceding description, and all variations and equivalents which fall within the range of the claims are intended to be embraced therein.

WHAT IS CLAIMED IS:

1. An apparatus for use in a transmitter, the apparatus comprising:
means for receiving digital data associated with an in-phase (I-) channel;
means for receiving digital data associated with a quadrature (Q-) channel;
5 channel;
means for generating a gain signal, β ;
means for multiplying the digital data associated with the Q-channel by the gain signal, β ,
wherein the gain signal, β , represents a gain value that is exactly
10 representable by 4-bit signals to the right of a binary radix point.
2. The apparatus of claim 1, wherein the transmitter is for use in a radiocommunications system that requires the use of only those gain values that are exactly representable by 4-bit signals to the right of the binary radix point.
3. The apparatus of claim 1, wherein the gain signal, β , is selected by
15 allowing β to exactly represent an ideal gain value, β_{IDEAL} , whenever the ideal gain value is exactly representable by 4-bit signals to the right of the binary radix point, and in all other cases by rounding β up to the next higher number that is representable by 4-bit signals to the right of the binary radix point.
4. The apparatus of claim 3, wherein the ideal gain value, β_{IDEAL} , is a
20 function of a ratio of a data rate of the digital data associated with the I-channel over a data rate of the digital data associated with the Q-channel.
5. A method for use in a transmitter, the method comprising the steps of:
receiving digital data associated with an in-phase (I-) channel;
receiving digital data associated with a quadrature (Q-) channel;
25 generating a gain signal, β ;
multiplying the digital data associated with the Q-channel by the gain signal, β ,

wherein the gain signal, β , represents a gain value that is exactly representable by 4-bit signals to the right of a binary radix point.

6. The method of claim 5, wherein the transmitter is for use in a radiocommunications system that requires the use of only those gain values that are
5 exactly representable by 4-bit signals to the right of the binary radix point.

7. The method of claim 5, wherein the step of generating a gain signal comprises the steps of:
selecting the gain signal, β , by allowing β to exactly represent an ideal gain value, β_{IDEAL} , whenever the ideal gain value is exactly representable by 4-bit
10 signals to the right of the binary radix point, and in all other cases by rounding β up to the next higher number that is representable by 4-bit signals to the right of the binary radix point.

8. The method of claim 7, wherein the ideal gain value, β_{IDEAL} , is a function of a ratio of a data rate of the digital data associated with the I-channel over a
15 data rate of the digital data associated with the Q-channel.

1/4

FIG. 1

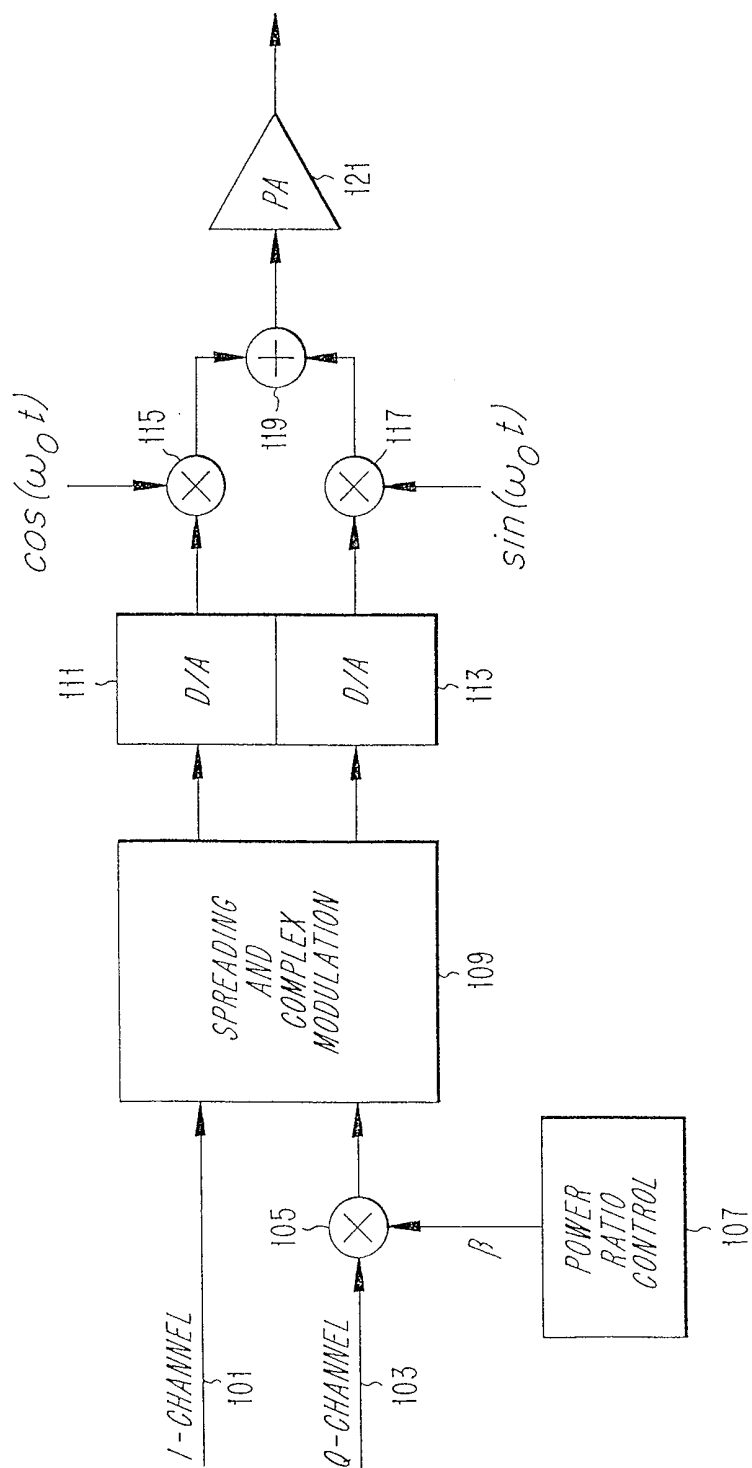


FIG. 2

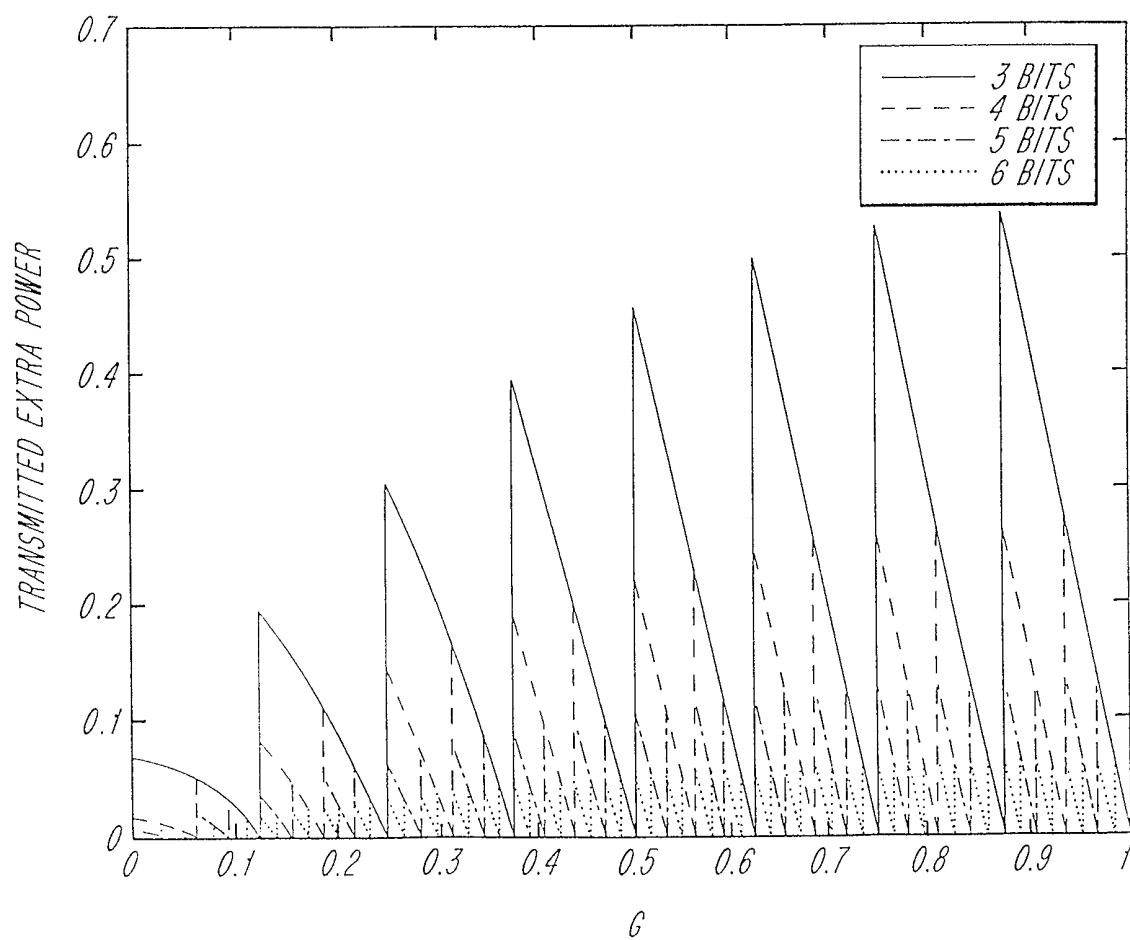


FIG. 3


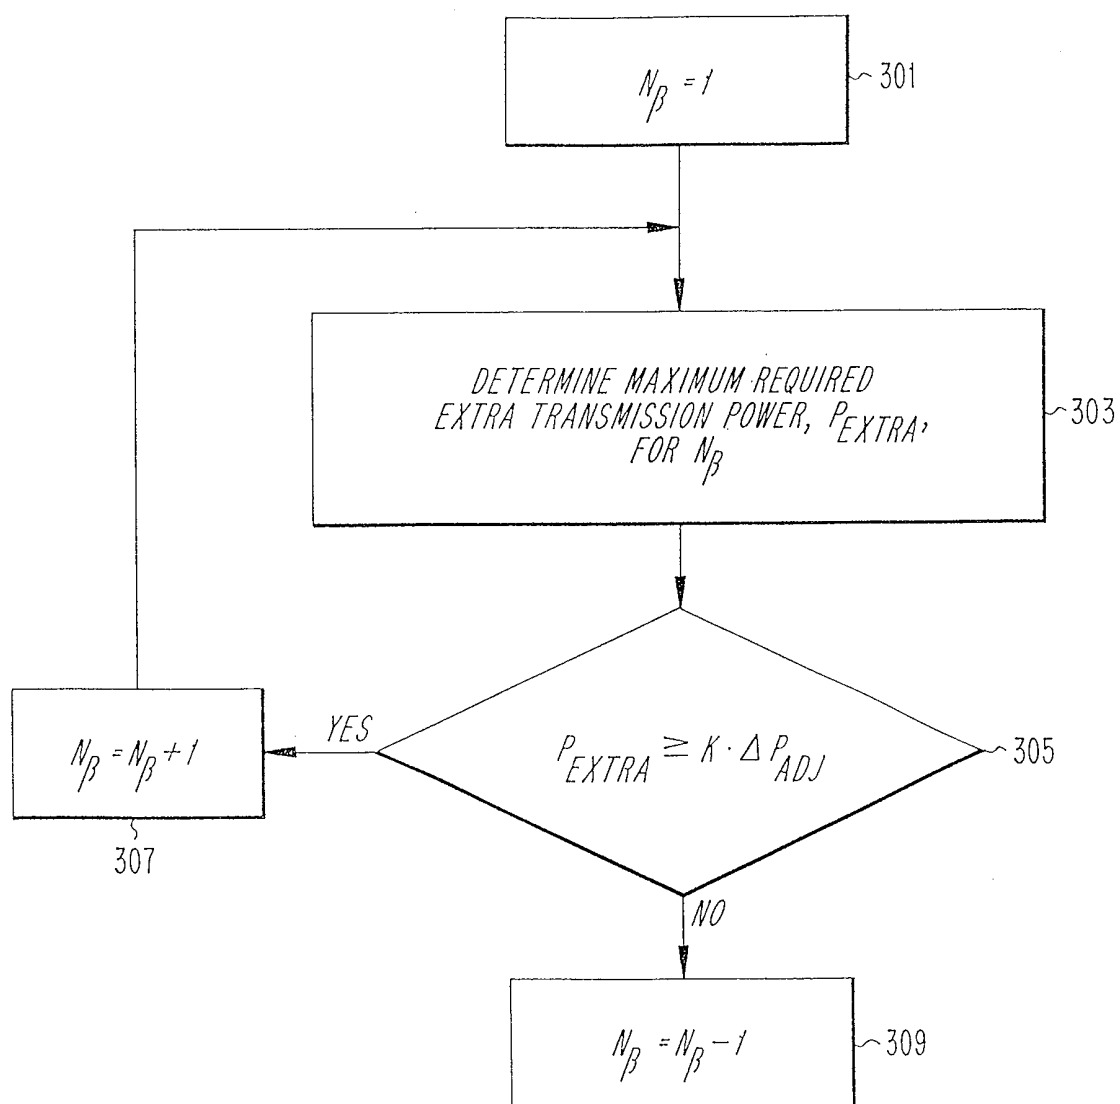


FIG. 4

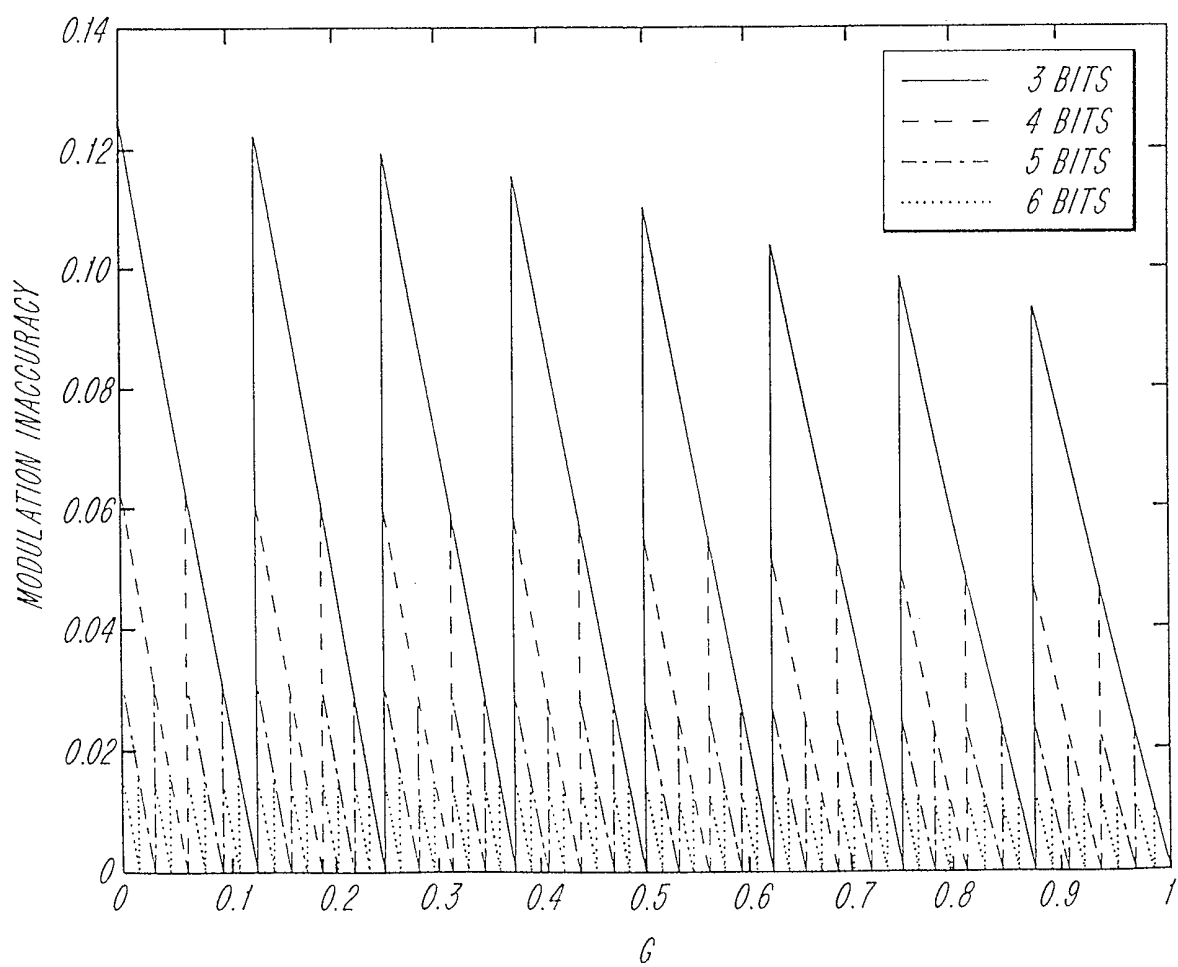

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/SE 99/01429

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H03G3/20 H04B1/707

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H03G H04B H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 784 402 A (FEHER KAMILO) 21 July 1998 (1998-07-21) * abstract * column 8, line 22 - line 23 column 8, line 57 - line 67; figure 8 column 11, line 52 - column 12, line 40; figure 17 column 13, line 25 - line 44; figure 16 column 13, line 55 - column 14, line 8 claim 5 ---	1,5
A	US 5 784 366 A (APELEWICZ TUVIA) 21 July 1998 (1998-07-21) * abstract * column 4, line 26 - line 6; figure 1 claim 1 --- -/--	1,5

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

17 January 2000

Date of mailing of the international search report

21/01/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

López Márquez, T

INTERNATIONAL SEARCH REPORT

Inter. Patent Application No.

PCT/SE 99/01429

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 535 299 A (STRECKMANN GEORGE L ET AL) 13 August 1985 (1985-08-13) column 2, line 37 - line 57 column 4, line 28 -column 5, line 2 column 10, line 43 -column 11, line 6 column 11, line 32 -column 12, line 4 figures 1,6,7 -----	1,5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 99/01429

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5784402 A	21-07-1998	US 5491457 A	13-02-1996
US 5784366 A	21-07-1998	AU 4317097 A	19-03-1998
		EP 0944971 A	29-09-1999
		WO 9809398 A	05-03-1998
		US 5909435 A	01-06-1999
US 4535299 A	13-08-1985	NONE	