

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 December 2008 (24.12.2008)

PCT

(10) International Publication Number
WO 2008/157149 A1

(51) International Patent Classification:
H04K 1/10 (2006.01) *H04L 27/28* (2006.01)

(74) Agents: DRISCOLL, Ben, D. et al.; 1303 East Algonquin Rd., Schaumburg, IL 60196 (US).

(21) International Application Number:
PCT/US2008/066483

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 11 June 2008 (11.06.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
07290745.4 15 June 2007 (15.06.2007) EP

(71) Applicant (for all designated States except US): GENERAL INSTRUMENT CORPORATION [US/US]; 101 Tournament Drive, Horsham, Pennsylvania 19044 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

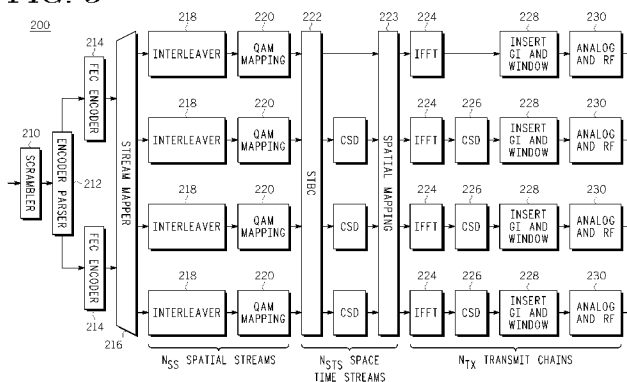
(75) Inventors/Applicants (for US only): ROUQUETT-LEV-EIL, Stephanie [FR/FR]; 12 Rue Du Conseil De L'Europe, F-91300 Massy (FR). DE COURVILLE, Mark, Bernard [FR/FR]; 10 Impasse Reille, F-75014 Paris (FR). LABBE, Patrick [FR/FR]; 2, Passage Du Square, F-92160 Antony, Hauts de Seine (FR).

Published:

— with international search report

(54) Title: METHOD AND APPARATUS USING SOUNDING PPDS TO PROVIDE RANGE EXTENSION TO IEEE 802.11N SIGNALS

FIG. 5



(57) Abstract: A wireless transmitter includes a stream parser for generating a plurality of spatial streams from a digital signal, a space time block coder for mapping each of the spatial streams to a plurality of space-time streams that each include data and a preamble for estimating a channel transfer function, a spatial mapper for spatially expanding each of the space-time streams by applying a spatial expansion matrix to data and to first training symbols to probe a channel experienced by the data and by applying an extension matrix to second training symbols to probe at least one additional dimension of the channel to enable use of beam forming to achieve range extension, the spatial expansion matrix and the extension matrix form an overall matrix that has at least two orthogonal columns with different norms and an analog front end for modulating the spatially expanded space-time streams onto a wireless carrier.

METHOD AND APPARATUS USING SOUNDING PPDU_s TO PROVIDE RANGE EXTENSION TO IEEE 802.11n SIGNALS

Field of the Invention

[0001] The invention relates generally to a spatial mapping operation for sounding PPDU_s in an IEEE 802.11n communication system.

Background of the Invention

[0002] In recent years, wireless data communication in domestic and enterprise environments have become increasingly commonplace and an increasing number of wireless communication systems have been designed and deployed. In particular, the use of wireless networking has become prevalent and wireless network standards such as IEEE 801.11a and IEEE 801.11g have become commonplace.

[0003] The requirement for increasing data rates, communication capacity and quality of services has led to continued research and new techniques and standards being developed for wireless networking. One such standard is the IEEE 801.11n standard which is currently under development. IEEE 801.11n is expected to operate in the 2.4GHz or 5GHz frequency spectrum and promises data rates of around 100Mbps and above on top of the MAC layer. IEEE 801.11n will use many techniques which are similar to the earlier developed IEEE 801.11a and IEEE 801.11g standards. The standard is to a large extent compatible with many of the characteristics of the earlier standards thereby allowing reuse of techniques and circuitry developed for these. For example, as in the previous standards IEEE 801.11a and IEEE 801.11g, IEEE 801.11n will use Orthogonal Frequency Division Multiplex (OFDM) modulation for transmission over the air interface.

[0004] The frame or packet formats employed by the IEEE 801.11 a/g/n standards can be understood with reference to the open system interconnection (OSI) model, which defines the application, presentation, session, transport, network, data link, and physical layers. The data link layer includes a logical link control (LLC) layer and a media access control layer. The MAC layer controls how to gain access to the network, and the LLC layer controls frame synchronization, flow control and error checking. The physical layer

Docket: BCS04307

(PHY) transmits signals over the network. FIG. 1 shows the LLC, MAC and PHY layers along with the IEEE 801.11 a/g/n frames with which they are associated. As shown, each MAC service data unit (MSDU) or frame 11, received from a logic link control layer (LLC) 10, is appended with a MAC header and a frame check sequence (FCS) trailer, at the MAC layer 20, to form a MAC layer protocol data unit (MPDU) or frame 21. At the physical layer, the MPDU is received as a physical layer service data unit (PSDU) or frame 22. At the physical layer 30, a physical layer convergence procedure (PLCP) header, a PLCP preamble, and tail and pad bits are attached to the PSDU frame 22 to form a physical layer protocol data unit (PPDU) or frame 31 for transmission on the channel.

[0005] In order to improve efficiency and to achieve the high data rates, IEEE 801.11n is planned to introduce a number of advanced techniques. For example, IEEE 801.11n communication is expected to be typically based on a plurality of transmit and receive antennas. Furthermore, rather than merely providing diversity from spatially separated transmit antennas, IEEE 801.11n will utilise transmitters having at least partially separate transmit circuitry for each antenna thus allowing different sub-signals to be transmitted from each of the antennas. The receivers may receive signals from a plurality of receive antennas and may perform a joint detection taking into account the number and individual characteristics associated with each of the plurality of transmit antennas and receive antennas. Specifically, IEEE 801.11n has seen the introduction of a Multiple-Transmit-Multiple-Receive (MTMR) antenna concept which exploits Multiple-Input-Multiple-Output (MIMO) channel properties to improve performance and throughput. MIMO processing operates in conjunction with information located in PPDU frame or packet.

[0006] One class of MTMR techniques that is specified in IEEE802.11n is spatial mapping. Spatial mapping techniques include direct mapping, cyclic shift diversity, beamforming and spatial expansion techniques. In spatial expansion, space expanded symbols are transmitted from spatially separate antennas. The spatial expansion provides separate streams for each of the spatially separate antennas. More specifically, the spatial expansion or coding includes encoding a stream of symbols to provide separate encoded streams for separate antennas. Each encoded stream is distinct. For example, differential delays can be imposed upon different streams by imposing different phase rotations on the samples of each of the streams.

Docket: BCS04307

[0007] Spatial mapping techniques can be used to provide range extension i.e., to achieve a higher signal to noise ratio at the receiver, thus allowing data to be properly decoded at a larger distance from the transmitter. One way to provide range extension uses open loop processing, in which the transmitter does not have any knowledge concerning the state of the channel over which the signal is transmitted. Spatial expansion is one spatial mapping technique that employs open loop processing. Alternatively, closed loop processing may be employed, in which the receiver provides the transmitter with channel state information that can be used to further increase the signal to noise ratio of the received signal. One example of a spatial mapping technique that employs closed loop processing is beamforming.

[0008] One problem that arises when spatial mapping techniques are applied to IEEE 801.11n PPDU frames is that long range spatial expansion techniques cannot be applied to sounding PPDU's, thus limiting the range of the future transmissions using beamforming. This problem arises because sounding PPDU's do not fulfil the requirements of the IEEE 801.11n standard, which specifies that the spatial mapping matrix should be formed of orthogonal columns with the same norm.

Brief Description of the Drawings

[0009] FIG. 1 shows the LLC, MAC and PHY layers of the OSI model, along with the IEEE 801.11 a/g/n frames with which they are associated.

[0010] FIG. 2 shows the conventional physical layer preamble in accordance with the IEEE 802.11a/g standards.

[0011] FIG. 3 shows a mixed-mode physical layer preamble in which 802.11a/g and 802.11n devices coexist.

[0012] FIG. 4 shows a green field physical layer preamble in which only 802.11n devices are operable.

[0013] FIG. 5 shows one example of a MIMO Transmitter.

[0014] FIG. 6 shows the pertinent portions of the MIMO transmitter depicted in FIG. 5 that generate the DLTFs and ELTFs as well as the data portion of the PPDU packet.

[0015] FIG. 7 show a number of illustrative spatial expansion schemes for use with long range sounding PPDU's.

[0016] FIG. 8 is a flowchart showing one example of the pertinent steps performed by a

Docket: BCS04307

MIMO transmitter and receiver when using sounding PPDU's such as shown in FIG. 7.

Detailed Description

[0017] As detailed below, particular multiple antenna techniques are provided for increasing the range in an IEEE 802.11n communication system. This increase is achieved by acquiring information concerning the characteristics of the channel that is being used. The multiple antenna techniques facilitate the acquisition of this channel information.

[0018] The techniques described herein can be employed on a variety of different communication methods and devices utilizing Orthogonal Frequency Division Multiplexing (OFDM). In general, OFDM is a block-oriented modulation scheme that maps a number of data constellation points onto a number of orthogonal carriers separated in frequency by BW/N , where BW is the bandwidth of the OFDM symbol and N is the number of tones in the OFDM symbol. OFDM is a technique by which data is transmitted at a high rate by modulating several low bit rate carriers in parallel rather than one single high bit rate carrier. OFDM is particularly useful in the context of Wireless Local Area Network (WLAN), Digital Video Broadcasting (DVB), High Definition Television (HDTV) as well as for Asymmetric Digital Subscriber Lines (ADSL) systems. OFDM can also be useful in satellite television systems, cable television, video-on-demand, interactive services, mobile communication devices, voice services and Internet services. The techniques will be described in the context of the IEEE 802.11n draft standard, which employ OFDM. These techniques relate generally to the PHY layer architecture. The following reference presents the MAC and PHY layer of IEEE 802.11n draft standard: "Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) specifications - Enhancements for Higher Throughput" IEEE P802.11n™/D1.10.

[0019] In order to enable or facilitate reception, the standards of IEEE 802.11a/g as well as 802.11n draft standard prescribe that all data packet are preceded by a physical layer preamble which comprises known data or training symbols that facilitates receiver gain setting, synchronization and channel estimation. The physical layer preamble will be described in more detail with reference to FIG. 2, which shows a conventional frame format 100 in accordance with the IEEE 802.11a/g standards. The frame format 100 comprises a physical layer preamble 110 and a data field 150. As previously noted, in the

Docket: BCS04307

context of the Open Systems Interconnection (OSI) reference model, the physical layer preamble 110 is a part of the PLCP preamble that is incorporated in a PPDU packet. PPDU packets are employed in the part of the physical layer referred to as the PLCP sublayer.

[0020] The preamble 110 includes a Legacy Short Training Field (L-STF) 120 that comprises ten Legacy Short Training Symbols (L-STS). These are used to detect the presence of an incoming signal and to perform initial estimations of, for example, carrier frequency offset. Thereafter, there is a Legacy Long Training Field (L-LTF) 130 comprising two Legacy Long Training Symbols (L-LTS). These OFDM training symbols are used to perform channel estimation (i.e., an estimate of the channel transfer function from the transmitting antenna to each receiving antenna). Channel estimation is employed to determine the effects that the transmission environment has on the transmitted data signals. The channel estimation procedure utilizes the long training symbols, which have a known magnitude and phase, to compensate for signal changes due to the transmission environment. The long training symbols can be analyzed to determine the effects of the environment on the transmitted signal and this information utilized to adjust the data signals appropriately. The preamble 110 also includes a Legacy SIGNAL (L-SIG) field 140. The information in the L-SIG field 140 is needed to transmit general frame format parameters, such as packet length and data rate and the details of the modulation format that is used. The Legacy Short Preamble, Long Preamble and Signal field comprise a legacy header 110. The OFDM symbols carrying the user data are located in the DATA field 150 that follows the SIGNAL field.

[0021] FIG. 3 shows a mixed-mode frame format in which 802.11a/g and 802.11n devices coexist. Similarly, FIG. 4 shows a green field frame format in which only 802.11n devices are operable. The frame format shown in FIG. 3 includes the legacy STS, LTS and SIG fields. In addition a second SIG field, denoted the High-Throughput SIG field (HT-SIG) 145, is provided, as well as a High Throughput Short Training Field (HT-STF) 147 and a High Throughput Long Training Field (HT-LTF) 149. The HT-STF 147 is used to set the AGC and for acquisition tasks when operating in a green field mode. The HT-LTF 149, which is used to provide the receiver with some knowledge of the MIMO channel, includes two parts: Data LTFs (DLTFs) that are used to measure the channel experienced by the data and to decode the data portion of the PPDU; and

Docket: BCS04307

Extension LTFs (ELTFs) that are used to probe additional spatial dimensions of the channel which are not utilized in the data portion of the PPDU. The number of DLTFs is denoted N_{DLTF} and the number of ELTFs is denoted N_{ELTF} . The total number of HT-LTFs, denoted N_{LTF} , is

$$N_{LTF} = N_{DLTF} + N_{ELTF}$$

[0022] The aforementioned 802.11n draft specification currently prescribes that N_{LTF} shall not exceed 5.

[0023] FIG. 5 shows one example of a MIMO Transmitter 200. The MIMO transmitter 200 includes a scrambling block 210 for scrambling the data at the bit level to prevent long strings of zeros or ones, an encoder parsing block 212 for demultiplexing the scrambled bits among N_{ES} FEC encoders, and N_{ES} FEC encoding blocks 214 for encoding the data to enable error correction. A stream parsing block 216 receives divides the output from the FEC encoding blocks 214 into blocks that will be sent to different interleaver and mapping devices. The sequences of the bits sent to the interleaver are called spatial streams. The number of spatial streams is denoted N_{SS} . Interleaver blocks 218 interleave the bits of each spatial stream to prevent long sequences of noisy bits from entering the FEC decoder. QAM mapping blocks 220 map the sequence of bits in each spatial stream to constellation points. A space time block coder (STBC) 222 maps the N_{SS} spatial streams to different transmit chains by providing N_{STS} space time streams. The number of transmit chains is denoted N_{TX} . Optionally, a spatial mapping block 223 may receive the spatial streams from the STBC 222. The spatial mapping block 223 can perform direct mapping, spatial expansion (to transmit the N_{STS} streams over N_{TX} antennas using an open-loop solution), space time block coding (STBC) and beam forming (to transmit the N_{STS} space time streams over N_{TX} antennas using some knowledge of the channel between the transmitter and the receiver). Inverse fast Fourier transform block 224 convert a block of constellation points to a time domain block. Cyclic shift insert blocks 226 insert the cyclic shift into each of the time domain blocks and guard interval insertion blocks 228 insert the guard interval into each time domain block. The guard interval insertion blocks 228 may include windowing to smooth the edges of each symbol to increase spectral decay. Finally, the symbols are forwarded to an analog front end 230 for modulating the spatially expanded space-time streams onto a wireless carrier.

[0024] The spatial mapping block allows the transmission of N_{STS} space-time streams on

Docket: BCS04307

N_{TX} antennas, with N_{TX} greater than or equal to N_{STS} . The spatial mapping operation is characterized by a matrix that can vary from one subcarrier to another and that is composed of two submatrices, one characterizing the spatial mapping applied to the 1st part of the LTFs and to the data, and the second one characterizing the spatial mapping applied to the 2nd part of the LTFs. In particular, The mapping between space time streams and transmit chains is defined by the columns of an antenna map matrix Q_k for subcarrier k . The first N_{STS} columns define the spatial mapping applied to the DLTFs and used for data transmission and the next N_{ESS} columns (up to $N_{TX} - N_{STS}$ columns) define the spatial mapping applied to the ELTFs. Thus, for the purpose of defining the HT-LTFs, Q_k is an $N_{TX} \times (N_{STS} + N_{ESS})$ dimension matrix. Columns 1... N_{STS} of Q_k are excited by the DLTFs and columns $N_{STS} + 1 \dots N_{STS} + N_{ESS}$ are excited by the ELTFs, where $N_{STS} + N_{ESS} \leq N_{TX}$ is the total number of spatial streams being probed by the HT-LTFs.

[0025] In accordance with the IEEE 802.11n standard, at a minimum, the number of HT-LTFs that are transmitted should be equal to the number of space time streams that are transmitted. In this way computation of the space equalization can be achieved at the receiver. When the number of spatial streams N_{ss} is less than the number of transmit antennas N_{TX} , there are not enough HT-LTFs to allow the receiver to recover a full characterization of the MIMO channel, even though the resulting MIMO channel measurement is sufficient for receiving the HT-data. However, in some cases it is desirable to obtain as full a characterization of the channel as possible, thus requiring the transmission of a sufficient number of HT-LTFs to sound (i.e., measure channel characteristics using training symbols) the full dimensionality of the channel. MIMO channel measurement performed in this manner is referred to as MIMO channel sounding. The available channel dimension may be probed by a sounding PPDU.

[0026] The combination of the DLTFs and ELTFs only lead to a full characterization of the channel if the spatial expansion matrix is formed of orthogonal columns with the same norm. Unfortunately, this prevents the use of sounding PPDU's with a number of different spatial expansion schemes that are important to ensure the use of open-loop range extension. Such spatial expansion schemes include, for example, the transmission of space time block coding over 3 or 4 antennas, with simple duplication of 1 or 2 space-time streams combined with cyclic shift diversity. Another example of such a spatial transmission scheme includes the transmission of 2 or 3 space-time streams using SDM,

Docket: BCS04307

again with simple duplication of 1 or 2 space-time streams combined with cyclic shift diversity.

[0027] As detailed below, a method and apparatus are provided to allow sounding PPDU's to achieve open-loop range extension when the overall matrix of spatial mapping is not formed of orthogonal columns with same norm. To accomplish this, a long range spatial expansion scheme is applied to the data, combined with the application of an appropriate extension scheme to the ELTFs in order to probe additional dimensions of the channel. The design of both schemes is made conjointly to enable a low complexity characterization of the full channel after estimation of the sub-channels experienced by the DLTFs and the ELTFs. These schemes are characterized by the spatial expansion matrix Q_D that is applied to the data and to the DLTFs. They are also characterized by the extension matrix Q_E that is applied to the ELTFs. These matrices, which must be known at the receiver, may include cyclic shift diversity and they may differ from sub-carrier to sub-carrier. The overall matrix formed from the spatial expansion matrix and the extension matrix need not be formed of orthogonal columns that have the same norm.

[0028] FIG. 6 shows the pertinent portions of a MIMO transmitter that generates the DLTFs and ELTFs as well as the data portion of the PPDU in accordance with the techniques described herein. Preamble generation block 310 generates N_{DLTF} DLTFs and incorporates them into each of the N_{STS} space time streams. Spatial mapping block 320 (e.g., spatial mapping block 223 in FIG. 5) receives the N_{STS} time streams and generates the N_{TX} transmit chains using the spatial expansion matrix Q_D . Likewise, preamble generation block 330 generates N_{ESS} ELTFs for each of the N_{ESS} extra dimensions to be probed. Spatial mapping block 340 receives the N_{ESS} spatial streams and, using the spatial expansion matrix Q_E , incorporates them into the N_{TX} transmit chains. Also shown in FIG. 5 is data generation block 350, which generates the data that will be incorporated into each of the N_{STS} space time streams. The spatial mapping block 320 receives the N_{STS} data time streams and again incorporates them into the N_{TX} transmit chains using the spatial expansion matrix Q_D .

[0029] The number N_{DLTF} of Data LTFs and the number N_{ELTF} of Extension LTFs are

Docket: BCS04307

respectively determined by the number N_{STS} of Space-Time Streams and the number N_{ESS} of extra spatial dimensions that are to be probed. That is, as shown in the table below for the case where N_{LTF} does not exceed 5, the number of data and Extension LTFs are a function of either the number of space time streams N_{STS} or the number of extension spatial streams N_{ESS} .

N_{STS} or N_{ESS}	N_{DLTF} or N_{ELTF}
1	1
2	2
3	4
4	4

[0030] The LTFs are designed to enable use of low complexity channel estimators by using a single symbol that is replicated with different weights and delays. This LTF symbol is transmitted with the appropriate weights and delays during $N_{LTF}=N_{DLTF}+N_{ELTF}$ symbol times over the $N_{STS}+N_{ESS}$ dimensions that are to be probed. The appropriate weights for the channel estimation of the N_{STS} (resp. N_{ESS}) dimensions using N_{DLTF} (resp. N_{ELTF}) symbols are determined by the $N_{STS} \times N_{DLTF}$ (resp. $N_{ESS} \times N_{ELTF}$) top left submatrix $\tilde{P}_{N_{STS}}$ extracted from the HT-LTF mapping matrix P_{HTLTF} :

$$P_{HTLTF} = \begin{bmatrix} 1 & -1 & 1 & 1 \\ 1 & 1 & -1 & 1 \\ 1 & 1 & 1 & -1 \\ -1 & 1 & 1 & 1 \end{bmatrix}$$

[0031] Throughout the HT-SIG, HT-STF and HT-LTF fields, cyclic shift is applied to prevent beamforming when similar signals are transmitted in different spatial streams. The same cyclic shift is also applied to these streams during the transmission of the data portion of the PPDU. The cyclic shift values to be used during these High-Throughput portions of the PPDU packet are specified by IEEE802.11n draft specification as follows:

Docket: BCS04307

N_{STS}	Cyclic shift value for STS 1	Cyclic shift value for STS 2	Cyclic shift value for STS 3	Cyclic shift value for STS 4
1	0ns	-	-	-
2	0ns	-400ns	-	-
3	0ns	-400ns	-200ns	-
4	0ns	-400ns	-200ns	-600ns

[0032] At the receiver, channel estimation is performed to the signal that is observed during the transmission of the DLTFs. Channel estimation is performed as follows. For each receive antenna and each subcarrier, the signal received during N_{DLTF} symbol times to estimate N_{STS} streams can be written as:

$$Y = HCP_s + noise \quad \text{or} \quad Y^T = s\tilde{P}^T CH^T + noise,$$

where s is the BPSK symbol on this given subcarrier of the known training sequence, $\tilde{P}_{N_{STS}}$ corresponds to the weights applied to this symbol, C ($N_{STS} \times N_{STS}$) denotes the diagonal matrix related to the cyclic shifts applied to the DLTFs, and H ($1 \times N_{STS}$) is the channel to be estimated.

[0033] Zero-Forcing channel estimation in the frequency domain can then performed by applying the channel estimator

$$G_{N_{STS}} = (s\tilde{P}^T C)^+ = s^* C^* (\tilde{P}\tilde{P}^T)^{-1} \tilde{P}$$

to the received vector Y^T to get the channel estimate:

$$\hat{H}^T = G_{N_{STS}} Y^T$$

[0034] This equation can be rewritten as:

$$\hat{H} = YG_{N_{STS}}^T$$

$G_{N_{STS}}$ defines a class of generic estimators to estimate 1, 2, 3 or 4 equivalent channels. These equivalent channels may correspond to the exact channels if no spatial expansion is

Docket: BCS04307

applied to the LTFs or to the channels experienced by the data LTFs (HQ_D) or the Extension LTFs (HQ_E) if segmented LTFs are applied.

[0035] At the receiver, the channel estimator G_{NSTS} is applied to the signal observed during the transmission of the DLTFs, which provides an estimate of HQ_D that corresponds to the channel experienced by the data and which will be used for decoding of the data. Similarly, the channel estimator G_{NESS} is applied to the signal observed during the transmission of the ELTFs, which gives an estimate of HQ_E . Note that these operations use the estimators that are already implemented for estimation of 1, 2, 3 or 4 channels.

[0036] The exact channel H can then be recovered from the concatenation of the estimated channels: $[HQ_D HQ_E] = HQ$ with $Q = [Q_D Q_E]$, if the matrix Q_E is chosen such that the matrix Q has orthogonal columns. The receiver can then feedback to the transmitter CSI matrices, non compressed steering matrices or compressed steering matrices, in order to perform beamforming during subsequent data transmission.

[0037] Several illustrative Spatial Expansion schemes for long range sounding PPDU are presented in FIG. 7. These schemes correspond to the simple duplication of one or two of the STS, and can be applied to the transmission of 2 STS SDM or STBC on 3 or 4 transmit antennas, or to the transmission of 3 STS SDM on 4 antennas. In this case the columns of the matrix Q_D form an orthogonal basis, but do not have the same norm. The techniques presented above allow these long range Spatial Expansion schemes to be applied to sounding PPDU. For each Spatial Expansion scheme, the illustrative spatial expansion schemes are characterized by a matrix Q_E such that the resulting overall matrix $Q = [Q_D Q_E]$ can be easily inverted to recover the exact channel H . The inverse of this matrix is also given for each scheme in FIG.86.

[0038] FIG. 8 is a flowchart showing one example of the pertinent steps performed by the MIMO transmitter and receiver. In step 400 the transmitter generates the DLTF symbols that are incorporated in the PPDU frame or packet. Likewise, in steps 405 and 410 the transmitter generates the ELTF symbols and the data symbols, respectively, which are also incorporated in the PPDU frame or packet. In step 415 the transmitter (e.g., spatial mapping block 223 in the transmitter of FIG. 5) applies the spatial expansion matrix Q_D to the DLTF symbols. Similarly, in step 420 the transmitter applies the spatial expansion matrix Q_D to the data symbols. In step 425, however, the transmitter applies the extension

Docket: BCS04307

matrix Q_E to the ELTF symbols. Once the packet is completed with the addition of the appropriate higher level frames (e.g., LLC and MAC frames), the packet can be transmitted in step 430 by, e.g., analog front-end 230 in the transmitter of FIG. 5). At the receiver, the packet undergoes processing to estimate the values for HQ_D and HQ_E . Specifically, in step 435 the receiver uses the known values for Q_D and the known DLTF symbols to estimate the value for HQ_D , from which the data can be decoded in step 450. Likewise, in step 440 the receiver uses the known values for Q_E and the known ELTF symbols to estimate the value of HQ_E . Finally, in step 445 the receiver uses the estimated value of HQ_D and HQ_E to estimate the channel transfer function H itself. As previously mentioned, the channel transfer function H may be used to calibrate the receiver and/or to provide feedback (e.g., CSI matrices or steering matrices) to the transmitter so that beamforming may be employed during subsequent transmissions between the transmitter and receiver.

[0039] Although a specific architecture has been described in connection with FIGs. 5-6 herein, including specific functional elements and relationships, it is contemplated that the systems and methods herein may be implemented in a variety of ways. For example, functional elements may be packaged together or individually, or may be implemented by fewer, more or different devices, and may be either integrated within other products, or adapted to work with other products externally. When one element is indicated as being responsive to another element, the elements may be directly or indirectly coupled.

[0040] The processes described above, including that shown in FIG. 8, may be implemented in a general, multi-purpose or single purpose processor. Such a processor will execute instructions, either at the assembly, compiled or machine-level, to perform that process. Those instructions can be written by one of ordinary skill in the art following the descriptions herein and stored or transmitted on a computer readable medium. The instructions may also be created using source code or any other known computer-aided design tool. A computer readable medium may be any medium capable of carrying those instructions and includes a CD-ROM, DVD, magnetic or other optical disc, tape, silicon memory (e.g., removable, non-removable, volatile or non-volatile), packetized or non-packetized wireline or wireless transmission signals.

[0041] It will furthermore be apparent that other and further forms of the invention, and

Docket: BCS04307

embodiments other than the specific embodiments described above, may be devised without departing from the spirit and scope of the appended claims and their equivalents, and it is therefore intended that the scope of this invention will only be governed by the following claims and their equivalents.

Docket: BCS04307

Claims

1. A wireless transmitter, comprising:
 a stream parser for generating a plurality of spatial streams from a digital signal;
 a space time block coder (STBC) for mapping each of the spatial streams to a plurality of space-time streams that each include data and a preamble for estimating a channel transfer function;
 a spatial mapper for spatially expanding each of the space-time streams by applying a spatial expansion matrix to data and to first training symbols used in the preamble to probe a channel experienced by the data and by applying an extension matrix to second training symbols used in the preamble to probe at least one additional dimension of the channel to enable use of beamforming to achieve range extension, wherein the spatial expansion matrix and the extension matrix form an overall matrix that has at least two orthogonal columns with different norms; and
 an analog front end for modulating the spatially expanded space-time streams onto a wireless carrier.

2. The wireless transmitter of claim 1 wherein the number of space-time streams is equal to 2 and a number of transmit chains is equal to 3, and wherein the spatial expansion matrix Q_D and the extension matrix Q_E are as follows:

$$Q_D = \begin{matrix} & \begin{matrix} 1 & 0 \\ 0 & 1 \\ 1 & 0 \end{matrix} \end{matrix} \sqrt{\frac{2}{3}} \quad Q_E = \begin{matrix} & \begin{matrix} -1 \\ 0 \\ 1 \end{matrix} \end{matrix} \frac{1}{\sqrt{2}}$$

$$D_{1,1,e^{j\theta_k}} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 1 & 0 \end{bmatrix} \sqrt{\frac{2}{3}} \quad D_{1,1,e^{j\theta_k}} = \begin{bmatrix} -1 \\ 0 \\ 1 \end{bmatrix} \frac{1}{\sqrt{2}}$$

· $D_{\alpha_1, \dots, \alpha_n} = \text{diag}(\alpha_1, \dots, \alpha_n)$ is a diagonal matrix

· $\theta_k = -2\pi k \Delta_F \tau_{CS}$ where Δ_F is the subcarrier frequency spacing and τ_{CS} is related to a delay applied to a transmit chain

Docket: BCS04307

3. The wireless transmitter of claim 11 wherein the number of space-time streams is equal to 2 and a number of transmit chains is equal to 4, and wherein the spatial expansion matrix Q_D and the extension matrix Q_E are as follows:

$$Q_D = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 1 & 0 \\ 0 & 1 \end{bmatrix} \quad Q_E = \frac{1}{\sqrt{2}} \begin{bmatrix} -1 & 0 \\ 0 & -1 \\ 1 & 0 \\ 0 & 1 \end{bmatrix}$$

· $\alpha_1, \dots, \alpha_n = \text{diag}(\alpha_1, \dots, \alpha_n)$ is a diagonal matrix

· $\theta_k = -2\pi k \Delta_F \tau_{CS}$ where Δ_F is the subcarrier frequency spacing and τ_{CS} is related to a delay applied to a transmit chain.

4. The wireless transmitter of claim 1 wherein the number of space-time streams is equal to 3 and a number of transmit chains is equal to 4, and wherein the spatial expansion matrix Q_D and the extension matrix Q_E are as follows:

$$Q_D = \frac{\sqrt{3}}{2} \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \\ 1 & 0 & 0 \end{bmatrix} \quad Q_E = \frac{1}{\sqrt{2}} \begin{bmatrix} -1 \\ 0 \\ 0 \\ 1 \end{bmatrix}$$

· $\alpha_1, \dots, \alpha_n = \text{diag}(\alpha_1, \dots, \alpha_n)$ is a diagonal matrix

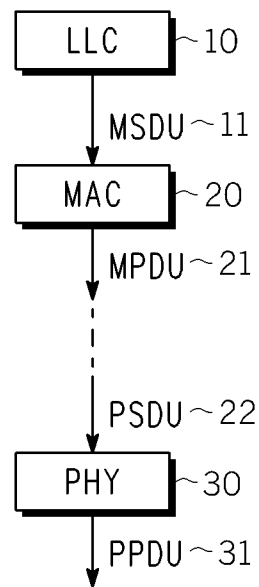
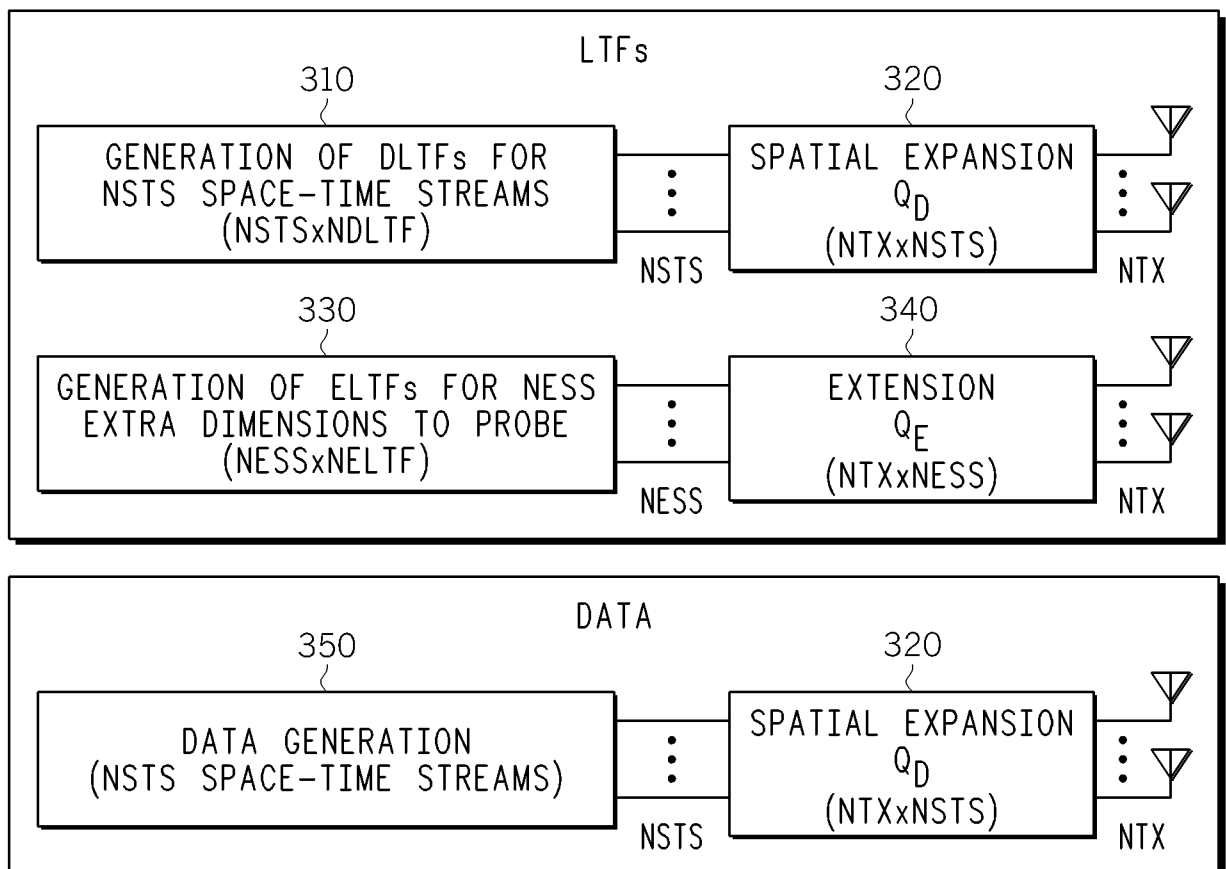
Docket: BCS04307

$\cdot \theta_k = -2\pi k \Delta_F \tau_{CS}$ where Δ_F is the subcarrier frequency spacing and τ_{CS} is related to a delay applied to a transmit chain

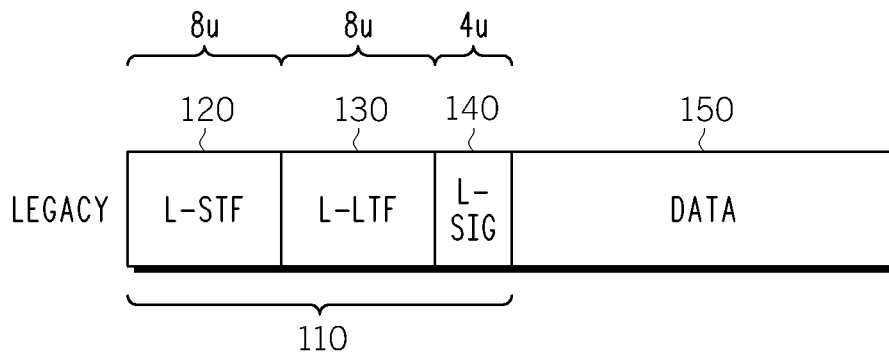
5. The wireless transmitter of claim 1 wherein the STBC is further configured to apply cyclic shifts to each transmit chain.

6. The wireless transmitter of claim 1 wherein the spatial streams generated by the stream parser include sounding PPDU's that are used to measure channel characteristics.

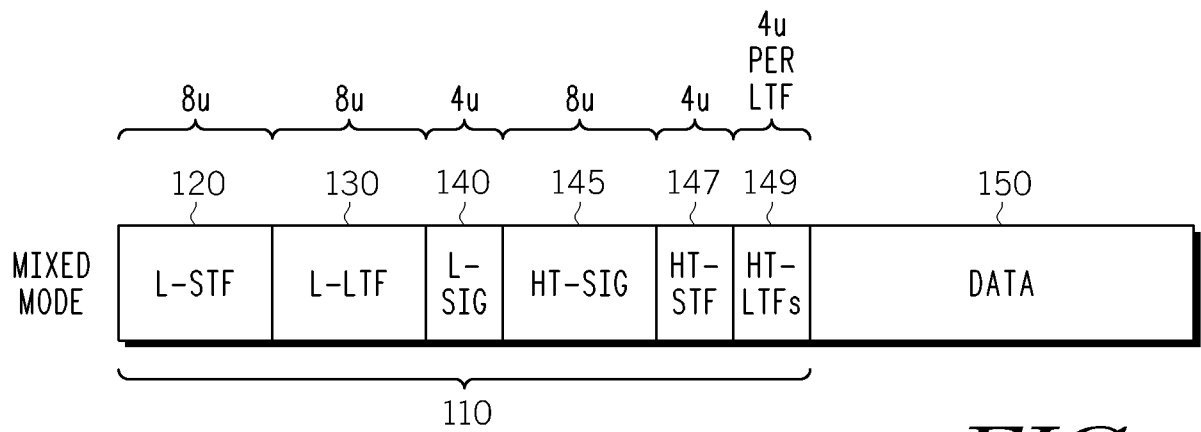
7. The wireless transmitter of claim 6 wherein the sounding PPDU's are compatible with IEEE 802.11 standards.

**FIG. 1****FIG. 6**

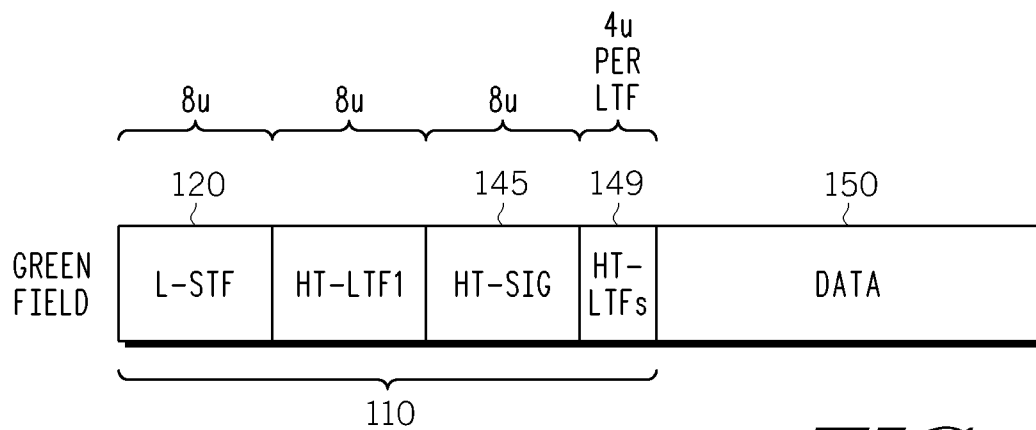
2/5



100

FIG. 2

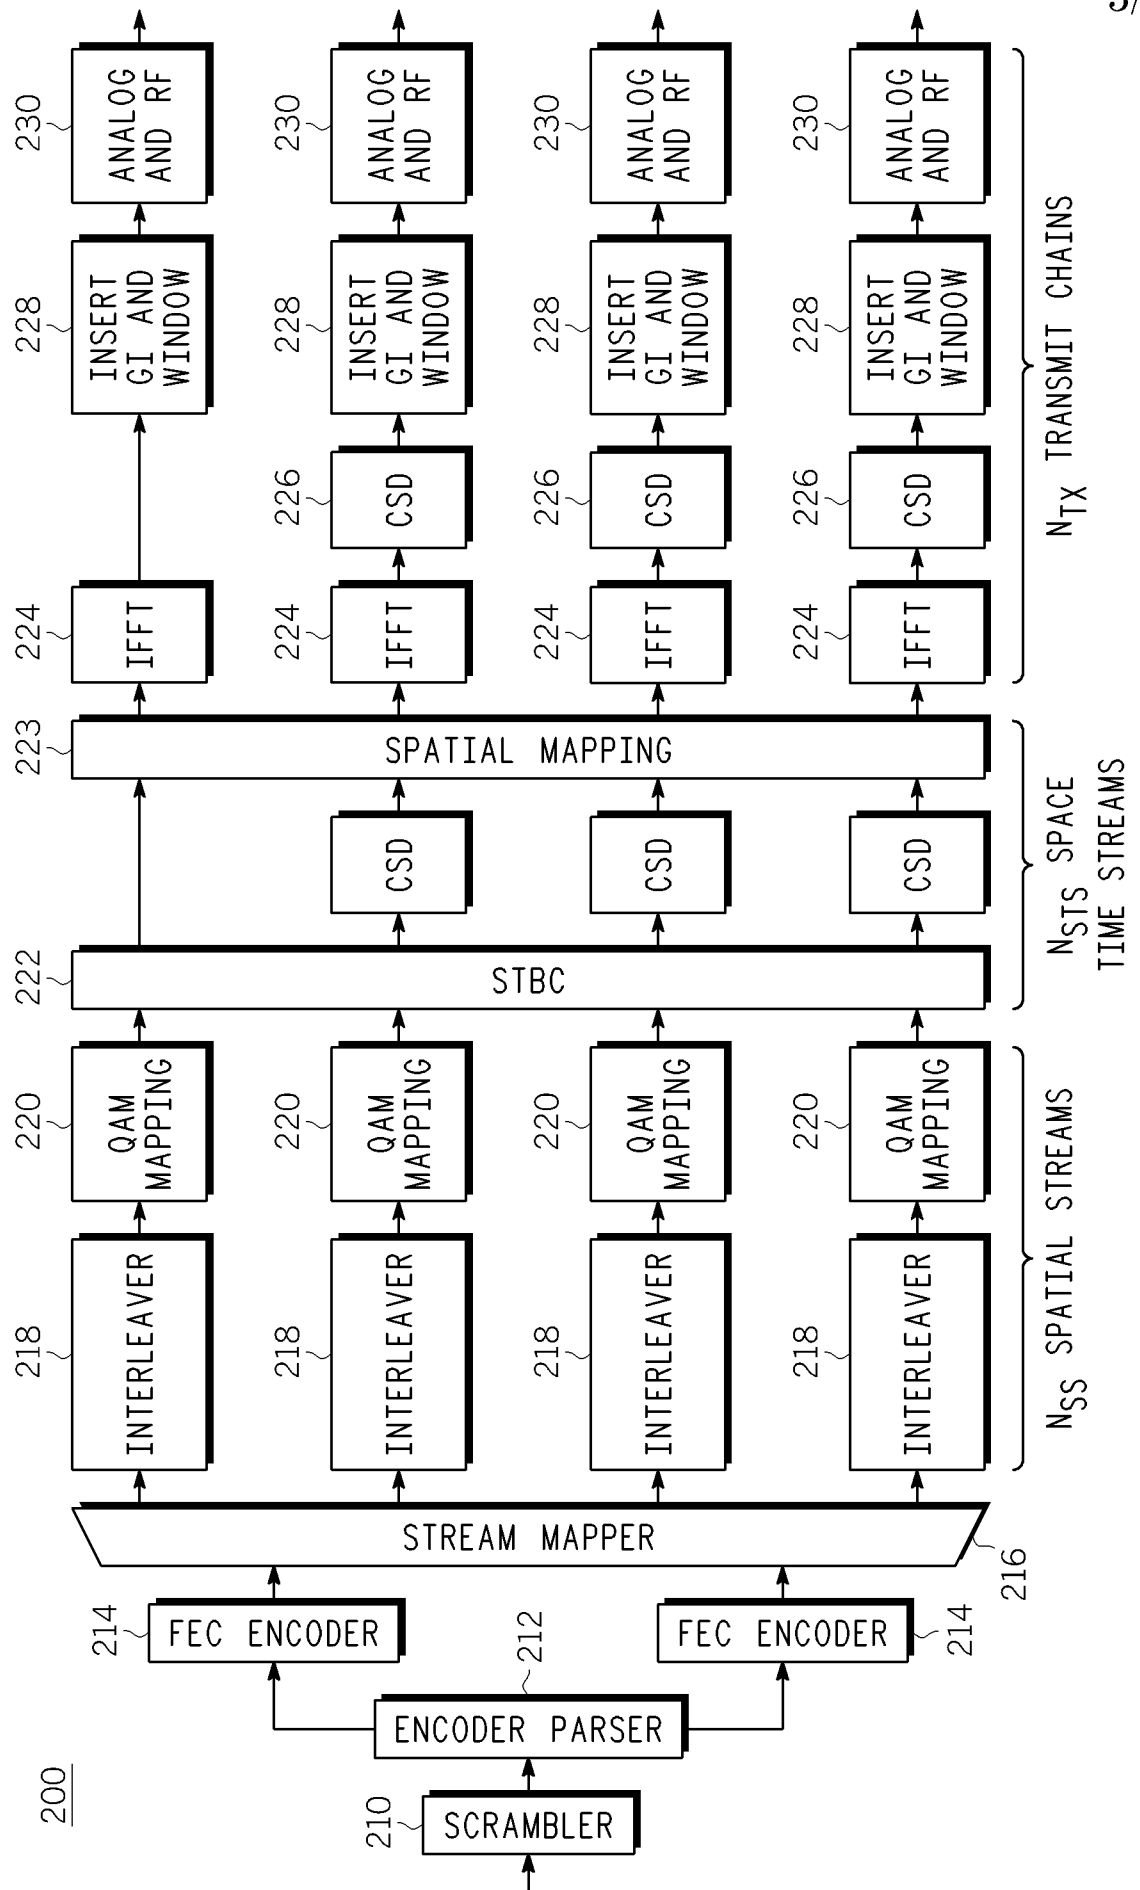
110

FIG. 3

110

FIG. 4

FIG. 5

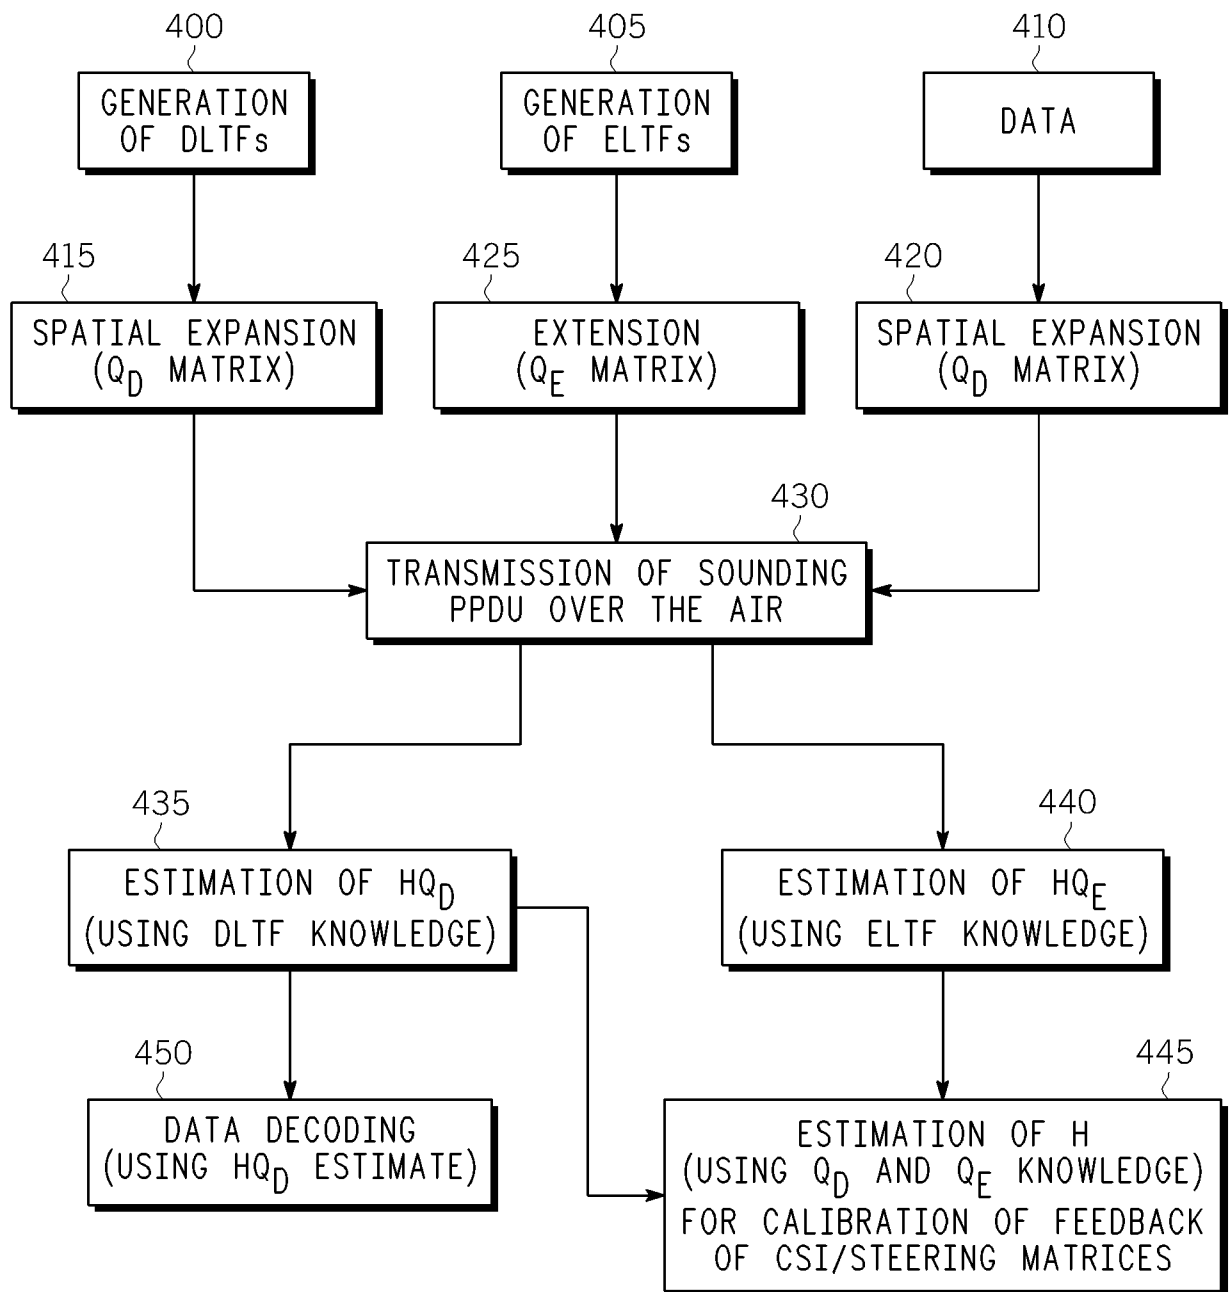


NTX NSTS	3Tx				4Tx			
	q_D	q_E	Q	Q^{-1}	q_D	q_E	Q	Q^{-1}
2STS	STBC/SDM	$D \begin{bmatrix} 1 & 0 \\ 1,1e^{j\theta_k} & 0 \end{bmatrix} \frac{1}{\sqrt{3}} \sqrt{\frac{2}{3}}$	$D \begin{bmatrix} -1 & 1 \\ 0 & \frac{1}{\sqrt{2}} \end{bmatrix} \frac{1}{\sqrt{2}}$	$D \begin{bmatrix} 1 & 0 & -1 \\ 0 & 1 & 0 \\ 1,1e^{j\theta_k} & 1 & 0 \end{bmatrix} \sqrt{\frac{2}{3}}, \sqrt{\frac{1}{2}}$	$D \begin{bmatrix} 1 & 0 \\ 1,1e^{j\theta_k} & 0 \end{bmatrix} \frac{1}{\sqrt{2}}$	$D \begin{bmatrix} -1 & 0 \\ 0 & -1 \\ 0 & 1 \end{bmatrix} \frac{1}{\sqrt{2}}$	$D \begin{bmatrix} 1 & -1 \\ 1 & 1 \end{bmatrix} \otimes I_2 \frac{1}{\sqrt{2}}$	Q^H
	STBC/SDM	$D \begin{bmatrix} 1 & 0 \\ 1,1e^{j\theta_k} & 0 \end{bmatrix} \frac{1}{\sqrt{2}}$	$D \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \frac{1}{\sqrt{2}}$	$D \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \frac{1}{\sqrt{2}}$	$D \begin{bmatrix} 1 & 0 \\ 1,1e^{j\theta_k} & 0 \end{bmatrix} \frac{1}{\sqrt{2}}$	$D \begin{bmatrix} -1 & 0 \\ 0 & -1 \\ 0 & 1 \end{bmatrix} \frac{1}{\sqrt{2}}$	$D \begin{bmatrix} 1 & -1 \\ 1 & 1 \end{bmatrix} \otimes I_2 \frac{1}{\sqrt{2}}$	Q^H
3STS					q_D	q_E	Q	Q^{-1}
	SDM	$D \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 1,1e^{j\theta_k} & 0 & 1 \end{bmatrix} \frac{\sqrt{3}}{2}$	$D \begin{bmatrix} -1 \\ 0 \\ 1 \end{bmatrix} \frac{1}{\sqrt{2}}$	$D \begin{bmatrix} 1 & 0 & -1 \\ 0 & 1 & 0 \\ 1,1e^{j\theta_k} & 0 & 1 \end{bmatrix} \frac{1}{\sqrt{2}}$	$D \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 1,1e^{j\theta_k} & 0 & 1 \end{bmatrix} \frac{\sqrt{3}}{2}, \frac{1}{2}, \frac{1}{2}, \sqrt{2}$	$D \begin{bmatrix} 1 & 0 & -1 \\ 0 & 1 & 0 \\ 1,1e^{j\theta_k} & 0 & 1 \end{bmatrix} \frac{1}{\sqrt{2}}$	$D \begin{bmatrix} 1 & -1 \\ 1 & 1 \end{bmatrix} \otimes I_2 \frac{1}{\sqrt{2}}$	Q^H

- $(a_1, \dots, a_n) = \text{diag}(a_1, \dots, a_n)$ IS A DIAGONAL MATRIX
- $\theta_k = -2\pi k \Delta_f \tau_{CS}$ WHEN Δ_f IS THE SUBCARRIER FREQUENCY SPACING
- F_3 IS THE 3x3 FOURIER MATRIX, $\omega = e^{j\frac{2\pi}{3}}$
- I_2 IS THE 2x2 IDENTITY MATRIX
- $\otimes$ IS THE KRONECKER PRODUCT

FIG. 7

5/5

**FIG. 8**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 08/66483

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H04K 1/10; H04L 27/28 (2008.04)

USPC - 375/260

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

USPC: 375/260

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

USPC: 375/260, 267; 370/334; 455/67.11, 67.12 (keyword limited - see terms below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST(USPT,PGPB,EPAB,JPAB); DialogPRO(Engineering); Google Scholar

Search Terms: 802.11n, PPDU, wireless, stream, spatial stream, stream parser, STBC, space time stream, matrix, spatial mapper, expansion matrix, extension matrix, analog front end, wireless carrier, cyclic shift, sounding

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2007/0064830 A1 (Choi et al.) 22 March 2007 (22.03.2007) entire document especially Figs. 1-3, para [0010]-[0028], [0065]-[0069], and [0088]-[0097]	1 and 5-7
Y	US 2007/0127587 A1 (Ouyang et al.) 07 June 2007 (07.06.2007) para [0004], [0052], [0063], [0072] and [0087]	1 and 5-7
Y	US 2004/0253926 A1 (Gross) 16 December 2004 (16.12.2004) para [0033]	1 and 5-7

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 July 2008 (22.07.2008)

Date of mailing of the international search report

05 AUG 2008

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774