




(22) Date de dépôt/Filing Date: 2008/10/07
(41) Mise à la disp. pub./Open to Public Insp.: 2009/07/02
(45) Date de délivrance/Issue Date: 2015/04/14
(62) Demande originale/Original Application: 2 710 153
(30) Priorité/Priority: 2007/12/20 (US61/015,316)

(51) Cl.Int./Int.Cl. *H04W 72/04* (2009.01),
H04L 1/18 (2006.01)
(72) Inventeurs/Inventors:
WAGER, STEFAN, FI;
BERGMAN, JOHAN, SE;
ENBUSKE, HENRIK, SE;
PRADAS, JOSE, SE
(73) Propriétaire/Owner:
TELEFONAKTIEBOLAGET L M ERICSSON (PUBL), SE
(74) Agent: ERICSSON CANADA PATENT GROUP

(54) Titre : LIBERATION DE RESSOURCES RADIO DE CANAL COMMUN SPECIALISE AMELIORE (E-DCH)
(54) Title: RELEASING COMMON ENHANCED DEDICATED CHANNEL, E-DCH, RADIO RESOURCES

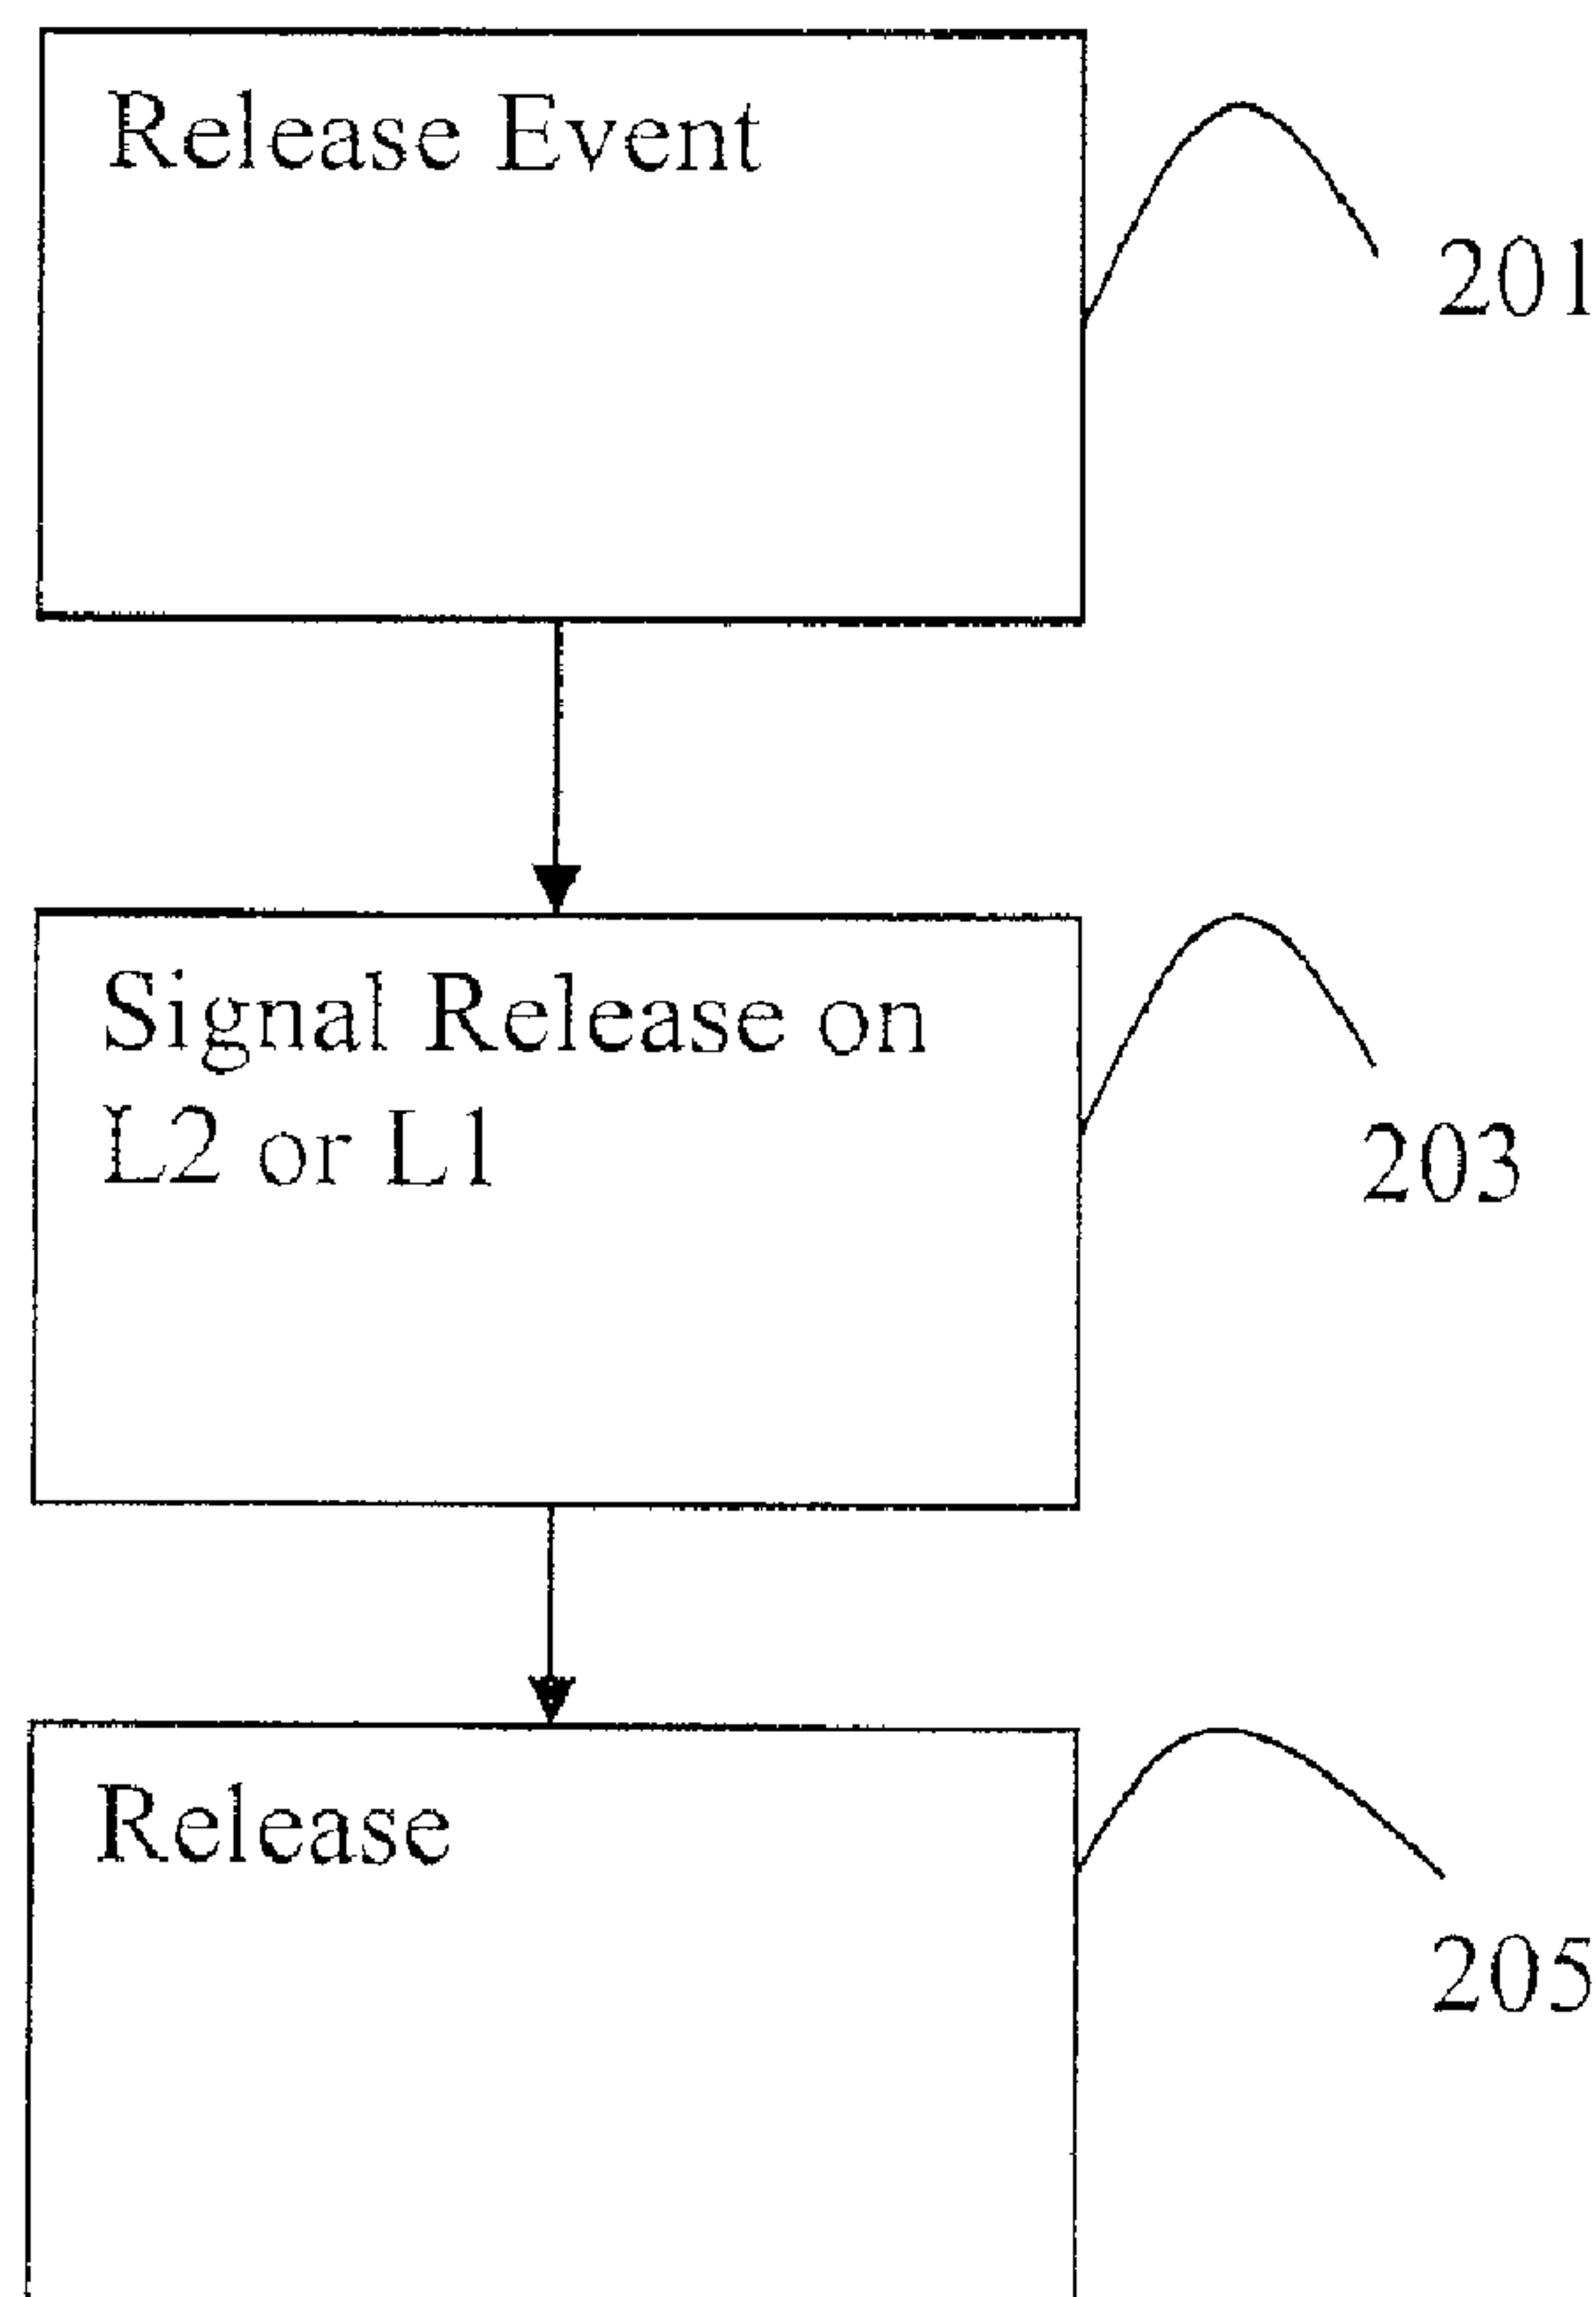

(57) Abrégé/Abstract:

In a method and a system for managing resources in a cellular radio system comprising an Enhanced Dedicated Channel, the release of the common E-DCH resources is signaled between UE and NodeB using existing signaling fields on Layer 2 (L2) or



(57) **Abrégé(suite)/Abstract(continued):**

Layer 1 (L1). These signaling fields are already in use in CELL_ DCH, but their interpretation is changed for users in CELL FACH. In another embodiment, a grant on E-AGCH indicating INACTIVE on all HARQ processes is sent as a release command to the UE. In still another embodiment, the common E-DCH resource is released upon expiry of a release timer.

In a method and a system for managing resources in a cellular radio system comprising an Enhanced Dedicated Channel, the release of the common E-DCH resources is signaled between UE and NodeB using existing signaling fields on Layer 2 (L2) or Layer 1 (L1). These signaling fields are already in use in CELL_DCH, but their interpretation is changed for users in CELL_FACH. In another embodiment, a grant on E-AGCH indicating INACTIVE on all HARQ processes is sent as a release command to the UE. In still another embodiment, the common E-DCH resource is released upon expiry of a release timer.

RELEASING COMMON ENHANCED DEDICATED CHANNEL, E-DCH, RADIO RESOURCES

5

TECHNICAL FIELD

The present invention relates to a method and a device for allocating E-DCH resources in a
10 cellular radio system.

BACKGROUND

In release 8 of the third generation partnership project (3GPP), work is ongoing to improve
the uplink performance in the so called CELL_FACH state. CELL_FACH is a Radio
15 Resource Control (RRC) state in which the User Equipment (UE) is known on cell level (i.e.
has a cell id), has a layer 2 connection but no dedicated physical layer resource associated
therewith. Instead, common physical layer resources are shared between different User
Equipments in the CELL_FACH state.

20 One planned uplink improvement planned for future improvement of cellular radio systems
is to activation also in CELL_FACH of the Enhanced Dedicated Channel (E-DCH) physical
channel, which is normally used as a dedicated physical layer channel in CELL_DCH state
with one separate E-DCH resource allocated per user. This can be performed by using a
pool of E-DCH resources that can be temporarily assigned to a user in the CELL_FACH
25 state. Such a pool of E-DCH resources can be termed common E-DCH resources. E-DCH
resources are conventionally managed by a Radio Network Controller (RNC). However the
pool of common E-DCH resources is to be managed by the radio base station NodeB to
speed up the allocation of resources by not having to involve the RNC in the allocation
procedure. The common E-DCH configurations are broadcasted to UEs located in a cell.

In Fig. 1 common E-DCH transmission in CELL_FACH state is shown. The procedure to access the common E-DCH channel in CELL_FACH starts in a manner corresponding to Rel-99 Random Access Channel (RACH) transmission, with preamble power ramping using randomly selected preamble signatures. Having detected the preamble, the NodeB
 5 acknowledges reception using an Acquisition Indication Channel (AICH) sequence. It also informs the UE which common E-DCH resource it has assigned to the UE.

A common E-DCH resource is defined by:

- 10 an Up -Link (UL) scrambling code
- an E-DCH Radio Network Temporary Identifier (E-RNTI)
- a Fractional - Dedicated Physical CHannel (F-DPCH) code and timing offset
- E-DCH Absolute Grant Channel (E-AGCH)/ E-DCH Relative Grant Channel (E-RGCH)/
- E-DCH HARQ Acknowledgement Indicator CHannel (E-HICH) codes and signatures, and
- 15 High Speed Dedicated Physical Control Channel (HS-DPCCH) parameters such as power offsets and Channel Quality Indicator (CQI).

In the currently proposed architecture the set of common E-DCH resources available in each cell is limited. Also, it will not be possible to indicate an unlimited number of configurations
 20 in the AICH response and also NodeB and air interface resources need to be reserved for each common E-DCH resource. Hence, the E-DCH resources needs to be efficiently used

In accordance with the above, there exist a need for a method and a system that is able to efficiently use E-DCH resources.

25

SUMMARY

It is an object of the present invention to provide a method and a system that is able to efficiently use E-DCH resources.

This object and others are obtained by the method, a User Equipment and a node as set out in the appended claims. In order to make more efficient use of the E-DCH resources it has been recognized that it is advantageous if each UE can release the common E-DCH resource as quickly as possible after a completed transmission. In addition it has been recognized that
5 in some error cases also be beneficial for the NodeB to have a mechanism to release common E-DCH configurations for use by a new user.

In accordance with the present invention a fast and effective method of signaling the release of common E-DCH resources between UE and NodeB is provided.

10


In accordance with the present invention the release of the common E-DCH resources is signaled between UE and NodeB using existing signaling fields on Layer 2 (L2) or Layer 1 (L1). These signaling fields are already in use in CELL_DCH, but can be given a different meaning for users in CELL_FACH.

15

There is provided a method of releasing a common Enhanced Dedicated Channel (E-DCH) resource in a Wideband Code Division Multiple Access (WCDMA) radio base station connectable to a User Equipment (UE) in a CELL_FACH state, comprising the step of sending a grant on an E-DCH Absolute Grant Channel (E-AGCH) indicating INACTIVE
20 on all Hybrid Automatic Repeat Request (HARQ) processes as a release command to the UE.

There is also provided a Wideband Code Division Multiple Access (WCDMA) radio base station connectable to a User Equipment (UE), the radio base station being adapted to release a common Enhanced Dedicated Channel (E-DCH) resource for the UE in a CELL_FACH
25 state, wherein the radio base station is adapted to send a grant on an E-DCH Absolute Grant Channel (E-AGCH) indicating INACTIVE on all Hybrid Automatic Repeat Request (HARQ) processes as a release command to the UE.

3 a

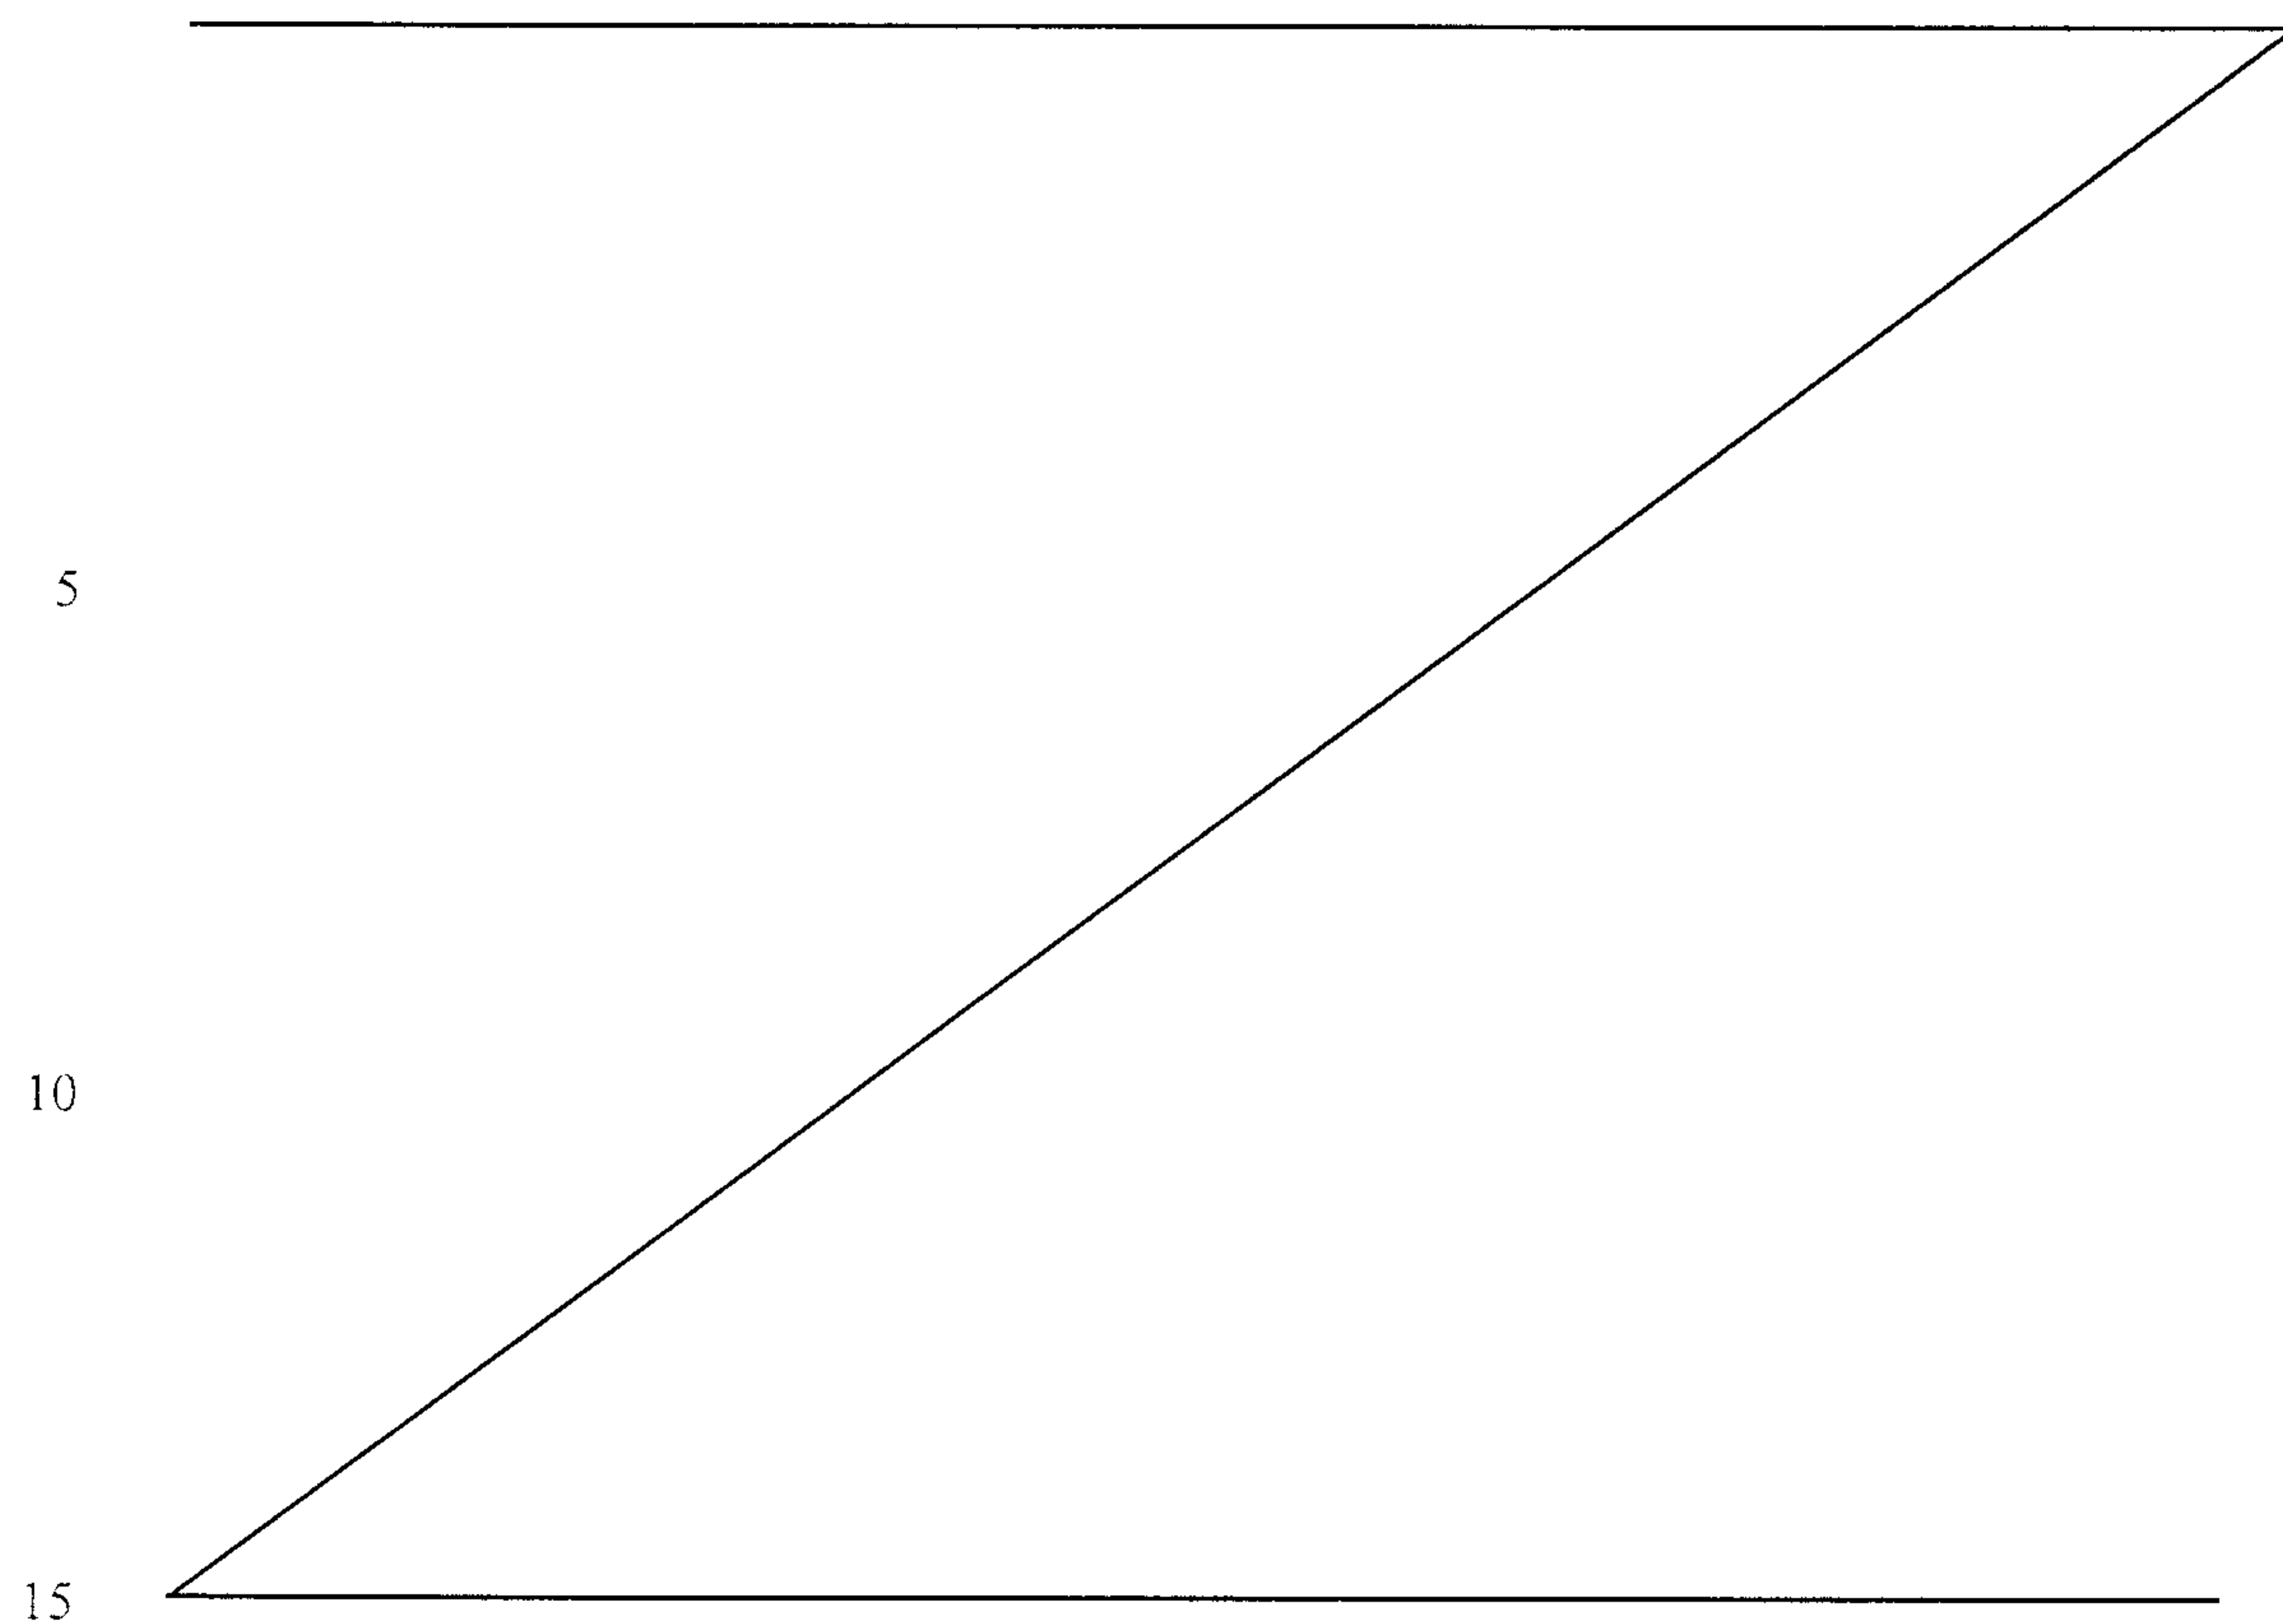

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in more detail by way of non-limiting examples and with reference to the accompanying drawings, in which:

- Fig. 1 is a view illustrating common E-DCH transmission in CELL_FACH,
- 20 - Fig. 2 is a view illustrating a cellular radio system,
- Fig. 3 is a flow chart illustrating steps performed when releasing a common E-DCH resource,
- Fig. 4 is a flow chart illustrating steps performed when releasing a common E-DCH resource, and
- 25 Fig. 5 is a flow chart illustrating steps performed when releasing a common E-DCH resource.

DETAILED DESCRIPTION

In Fig.2, a general view of a WCDMA system 100 is depicted. The system 100 comprises a base station (Node B) 101. The base station 101 serves a number of mobile terminals, usually termed User Equipment (UE) 103, located within the area covered by the base station 101. The base station 101 is also connected to a radio network controller node (RNC) 105. The RNC 105 typically also includes a Radio link controller node (RLC) 107. The RLC 107 is among other things responsible for detecting errors. The system 100 also comprises a power control unit 109, which preferably is co-located or an integral part of the base station 101.

In release 6, the WCDMA specification is extended with a new uplink transport channel, the Enhanced Dedicated Channel (E-DCH). The enhanced uplink (EUL) is a natural complement to High Speed Downlink Packet Access (HSDPA) for high-performance packet-data applications.

In accordance with the present invention the release of the common E-DCH resources is signaled between UE and NodeB using existing signaling fields on Layer 2 (L2) or Layer 1 (L1). These signaling fields are already in use in CELL_DCH, but their interpretation is changed for users in CELL_FACH.

In accordance with one embodiment of the present invention the UE can trigger release of an E-DCH resource. For example once a UE in CELL_FACH transmitting on a common E-DCH resource has emptied its Radio Link Protocol transmit buffer, it can be configured to include the Scheduling Information (SI) field in the last Media Access Control (MAC) Packet Data Unit (PDU), indicating buffer status = 0. In particular the Total E-DCH Buffer Status (TEBS) can be set to 0. For users in CELL_FACH, the NodeB can be configured to interpret such a field as a signal that the UE has finished transmission, and will release the common E-DCH resource. In particular the radio base station NodeB can release the common E-DCH resource as soon as all Hybrid Automatic Repeat Request (HARQ)

processes are finished. It can be observed that even when the HARQ process carrying the last MAC PDU with the SI field have completed, there may still be previous HARQ processes that have not yet completed. In accordance with one embodiment the NodeB is configured to release the common E-DCH resource, making it available for use by other users, once all HARQ processes have finished or when the reordering timer T1 has expired for the last MAC PDU.

In another embodiment of the present invention, the E-DCH - Transport Format Combination Identifier (E-TFCI) or the Happy bit on the physical layer control channel E-DPCCH is used to indicate release of the common E-DCH resource. As these indicators can be more error prone, such indicators can in one embodiment be used in combination with the SI field in the MAC PDU.

In accordance with one embodiment the UE is configured to release the common E-DCH resources once it has received an ACK for all HARQ processes, or reached the maximum number of HARQ transmissions. Also when the common E-DCH resources are released and new data is received from higher layer to be transmitted, the UE can be configured to start transmission by transmitting preambles to request a new common E-DCH resource.

To cover for error cases, like signaling errors or if a UE has moved out of coverage, the NodeB can also use a release timer to release the common E-DCH resource. For example, the release timer can be started when the common E-DCH resource is assigned to a UE. Once Uplink transmission has been detected, the timer is stopped and preferably reset. Detection of uplink transmission can for example be based on thresholds for the estimated Bit Error Rate (BER) or Signal to Noise Ratio (SNR) or similar of the up link DPCCH channel. If the uplink DPCCH is lost during transmission, due to e.g. a user has moved out of coverage, the timer is again started. If the uplink DPCCH is not detected from the user until the release timer expires, the common E-DCH resource is released in NodeB. Once the

E-DCH resource is released by the radio base station NodeB, the E-DCH resource is released for use by other UEs.

5 The radio base station NodeB may also be configured to stop a UE from transmitting on a common E-DCH resource by sending a grant on E-AGCH indicating INACTIVE on all HARQ processes as a release command. The UE is then configured to interpret such a signaling as a signal to release the common E-DCH resource. As a consequence, when the UE receives a grant on E-AGCH indicating INACTIVE on all HARQ processes the UE releases the common E-DCH resource, which then is available for use by other UEs.

10

In Fig. 3 a flow chart illustrating steps performed when releasing a common E-DCH resource is shown. First in a step 201 it is determined in a User Equipment that a common E-DCH resource is to be released. An event triggering the release of an E-DCH can for example be a UE in CELL_FACH transmitting on a common E-DCH resource has emptied its Radio Link Protocol transmit buffer. Next, in a step 203, the UE signals to the radio base station the release of a common Enhanced Dedicated Channel (E-DCH) resource. In particular the signaling of the release of the common Enhanced Dedicated Channel (E-DCH) resource can be signaled Layer 1 or Layer 2 fields used in a CELL_DCH state, for other purposes. For example the release can be signaled by including the Scheduling Information (SI) field in the last Media Access Control (MAC) Packet Data Unit (PDU). In response the a signaled release of a common Enhanced Dedicated Channel, E-DCH, resource from a UE the radio base station NodeB releases the corresponding common Enhanced Dedicated Channel, E-DCH, resource, in a step 205 which then can be used for another user.

25

In Fig. 4 a flow chart illustrating steps performed when releasing a common E-DCH resource is shown. First in a step 301 it is determined in a radio base station Node B that a common E-DCH resource is to be released. Next, in a step 303, the radio base station NodeB stops a UE from transmitting on a common E-DCH resource by sending a grant on

E-AGCH indicating INACTIVE on all HARQ processes as a release command. The UE is then configured to interpret such a signaling as a signal to release the common E-DCH resource in a step 305. As a consequence, when the UE receives a grant on E-AGCH indicating INACTIVE on all HARQ processes the UE releases the common E-DCH resource, which then is available for use by other UEs.

In Fig. 5 a flow chart illustrating steps performed when releasing a common E-DCH resource is shown. First in a step 401 a release timer is started when the common E-DCH resource is assigned to a UE. Once Uplink transmission has been detected, the timer is stopped and preferably reset in a step 403. Detection of uplink transmission can for example be based on thresholds for the estimated Bit Error Rate (BER) or Signal to Noise Ratio (SNR) or similar of the up link DPCCH channel. If the uplink DPCCH is lost during transmission, due to e.g. a user has moved out of coverage, the timer is again started. If the uplink DPCCH is not detected from the user until the release timer expires, the common E-DCH resource is released in a step 405 in NodeB. Once the E-DCH resource is released by the radio base station NodeB, the E-DCH resource is released for use by other UEs.

By using the method UE and radio base station as described herein a fast and reliable release of common E-DCH is obtained. This in turn will increase the E-DCH capacity in CELL_FACH.

CLAIMS

1. A method of releasing a common Enhanced Dedicated Channel (E-DCH) resource in a Wideband Code Division Multiple Access (WCDMA) radio base station connectable to a User Equipment (UE) in a CELL_FACH state, comprising the step of sending a grant on an E-DCH Absolute Grant Channel (E-AGCH) indicating INACTIVE on all Hybrid Automatic Repeat Request (HARQ) processes as a release command to the UE.
2. The method according to claim 1, comprising the additional step of releasing the common E-DCH resource upon expiry of a release timer.
3. The method according to claim 2, wherein the release timer is started when the common E-DCH resource is assigned to a UE.
4. The method according to claim 2 or 3, wherein the release timer is stopped when Uplink transmission has been detected.
5. A Wideband Code Division Multiple Access (WCDMA) radio base station connectable to a User Equipment (UE), the radio base station being adapted to release a common Enhanced Dedicated Channel (E-DCH) resource for the UE in a CELL_FACH state, wherein the radio base station is adapted to send a grant on an E-DCH Absolute Grant Channel (E-AGCH) indicating INACTIVE on all Hybrid Automatic Repeat Request (HARQ) processes as a release command to the UE.
6. The radio base station according to claim 5, wherein the radio base station is further adapted to release the common E-DCH resource upon expiry of a release timer.
7. The radio base station according to claim 6, wherein the radio base station is adapted to start the release timer when the common E-DCH resource is assigned to a UE.

8. The radio base station according to claim 6 or 7, wherein the radio base station is adapted to stop the release timer when Uplink transmission has been detected.

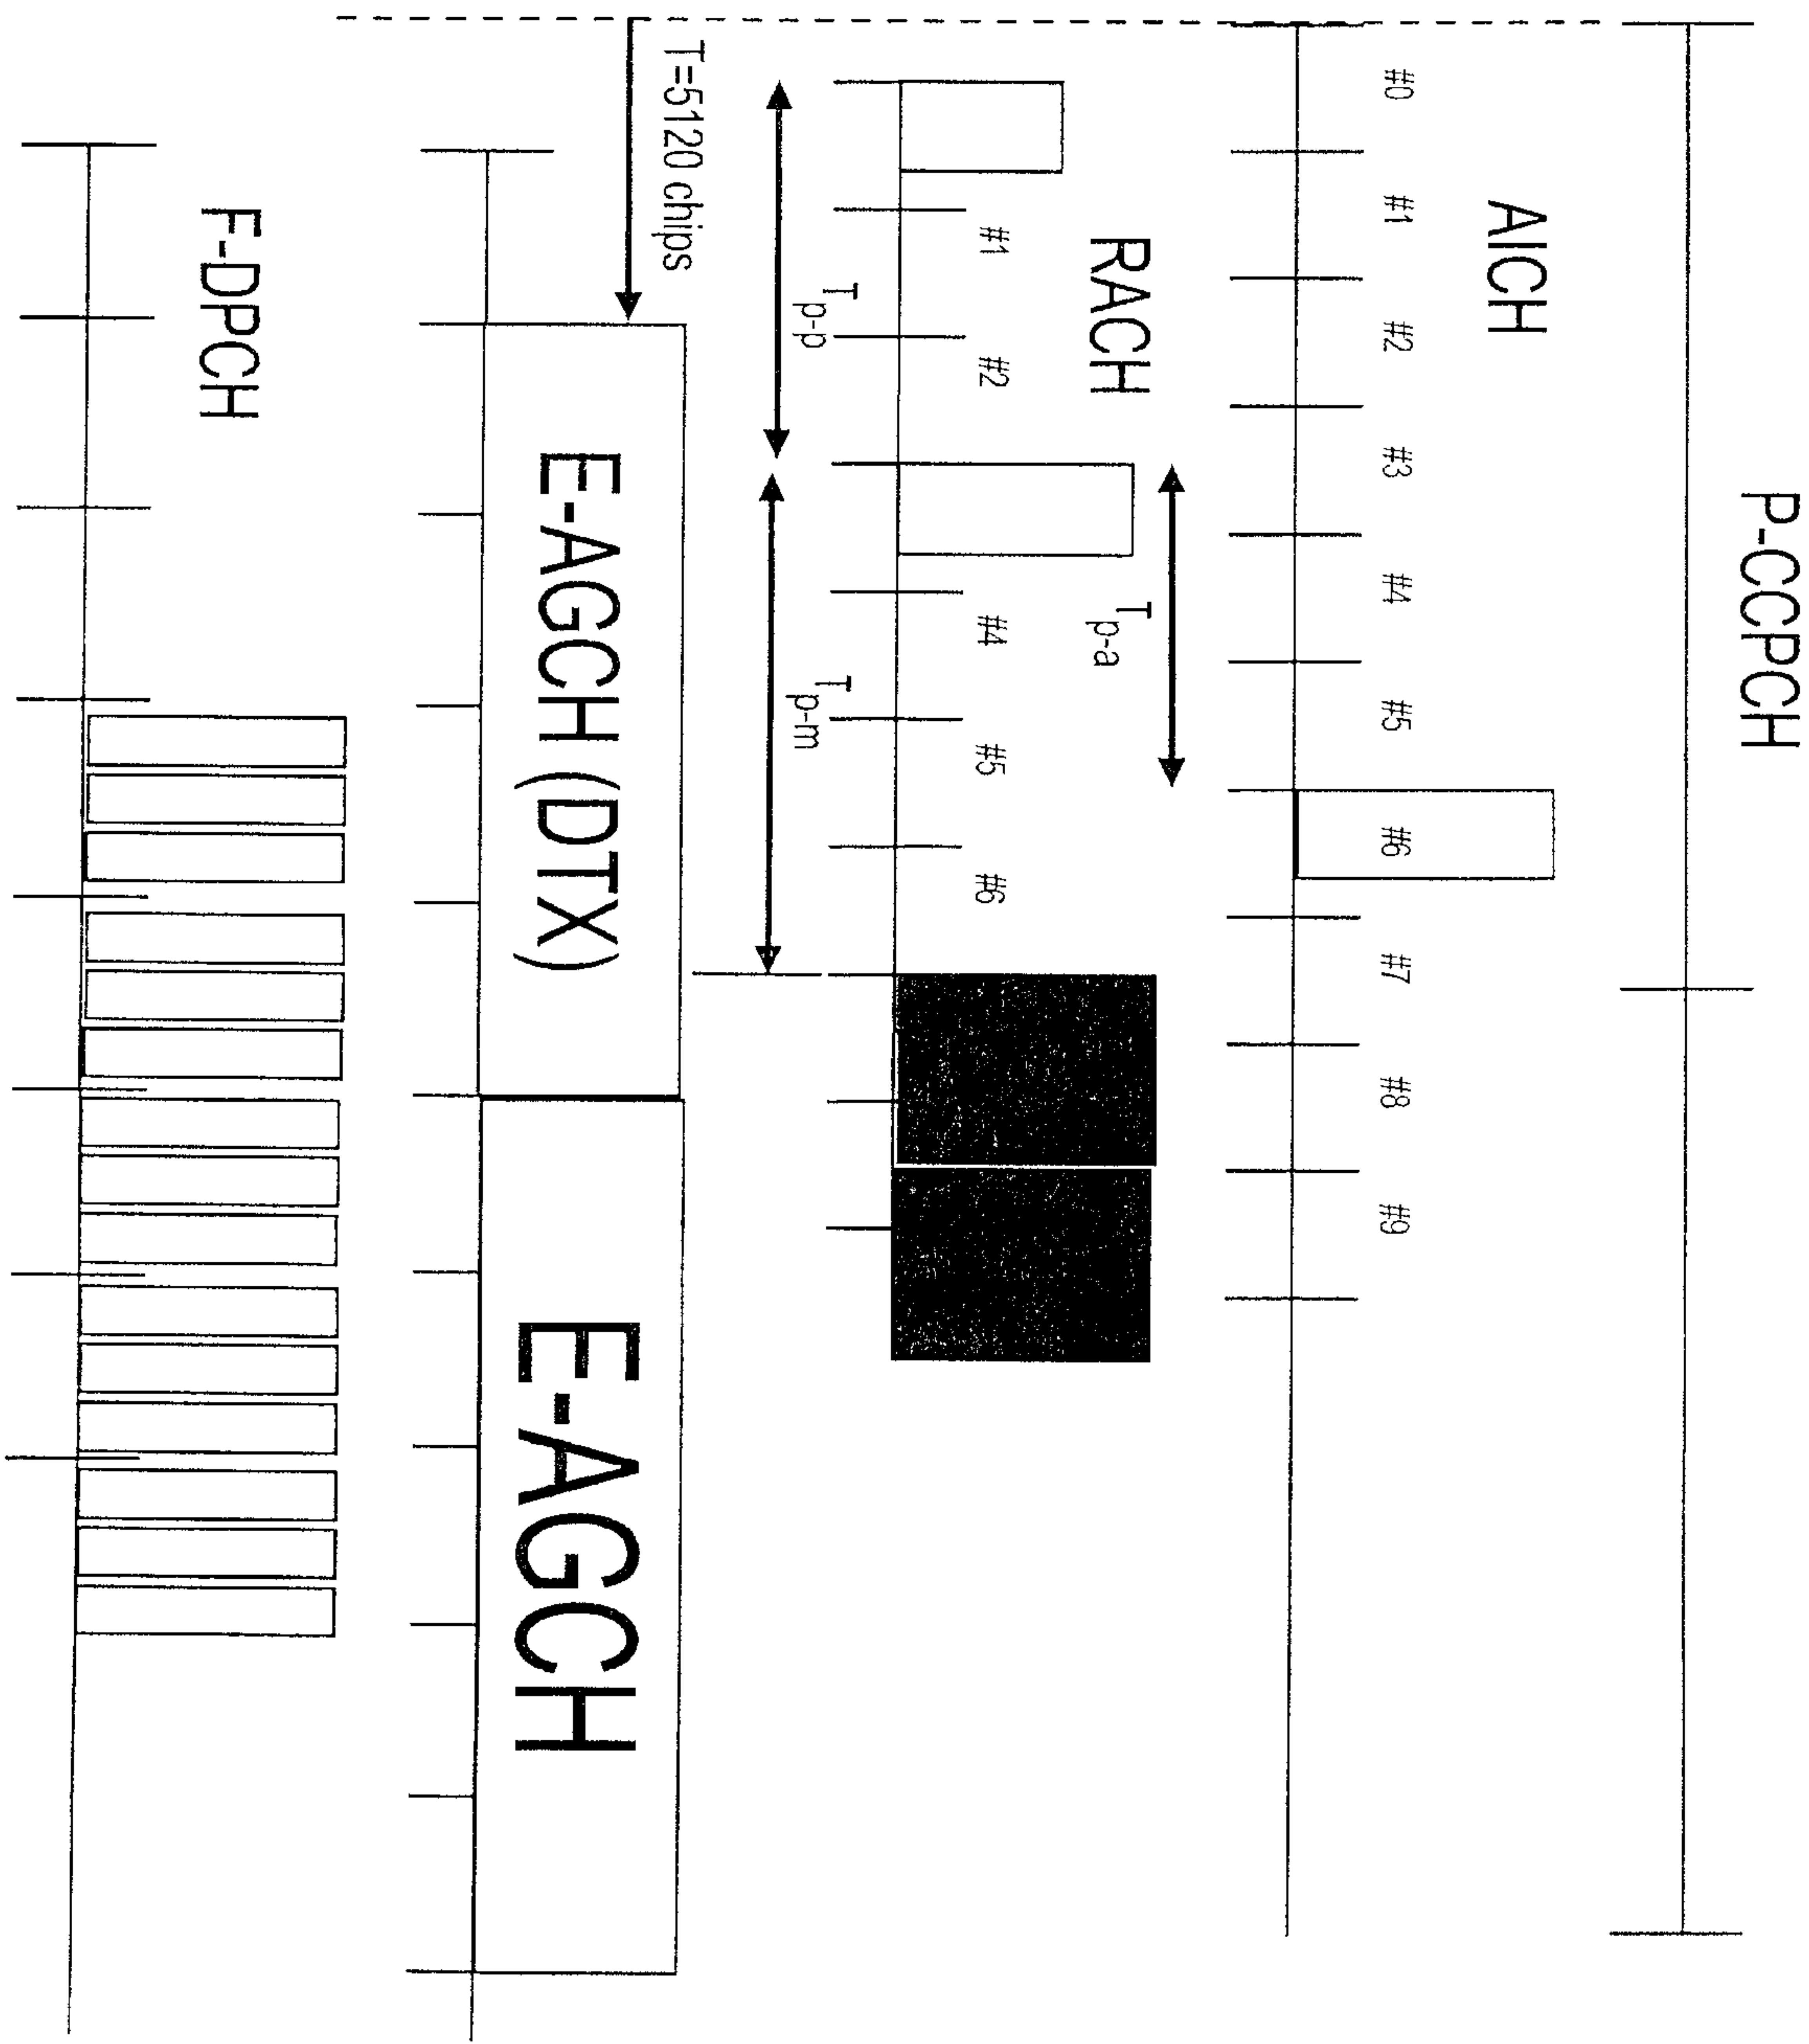


Fig. 1

2/5

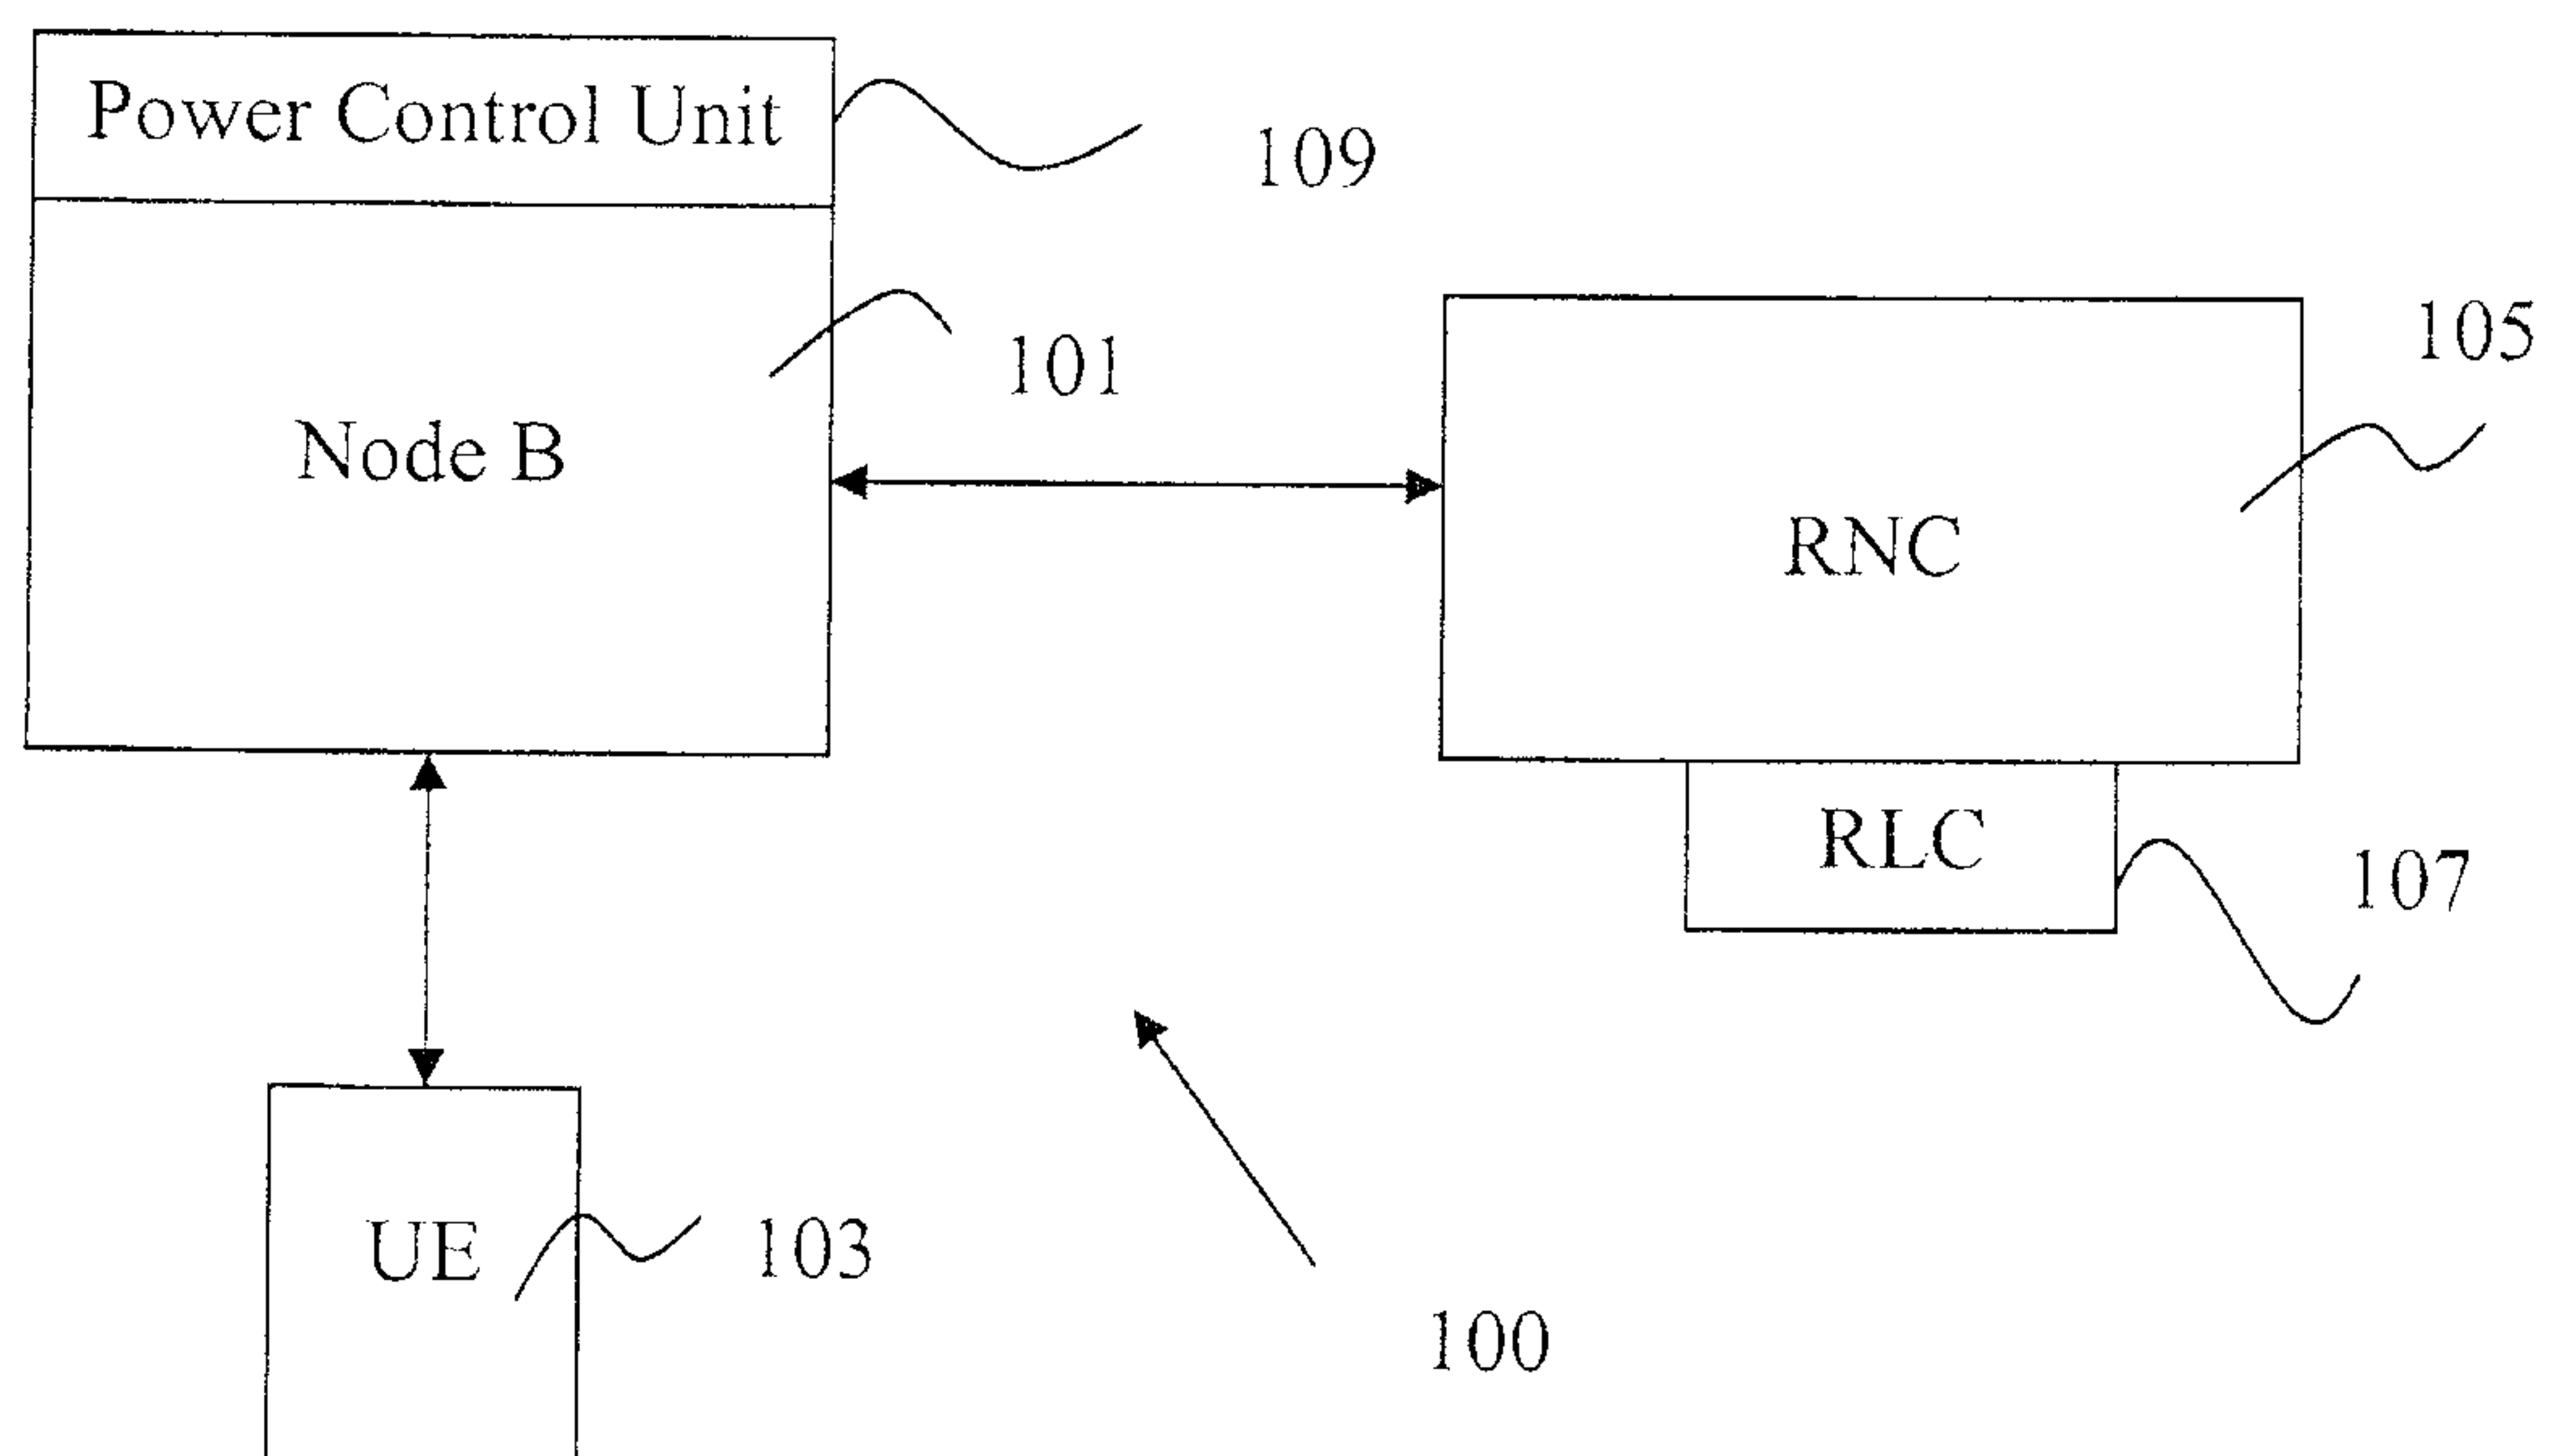


Fig. 2

3/5

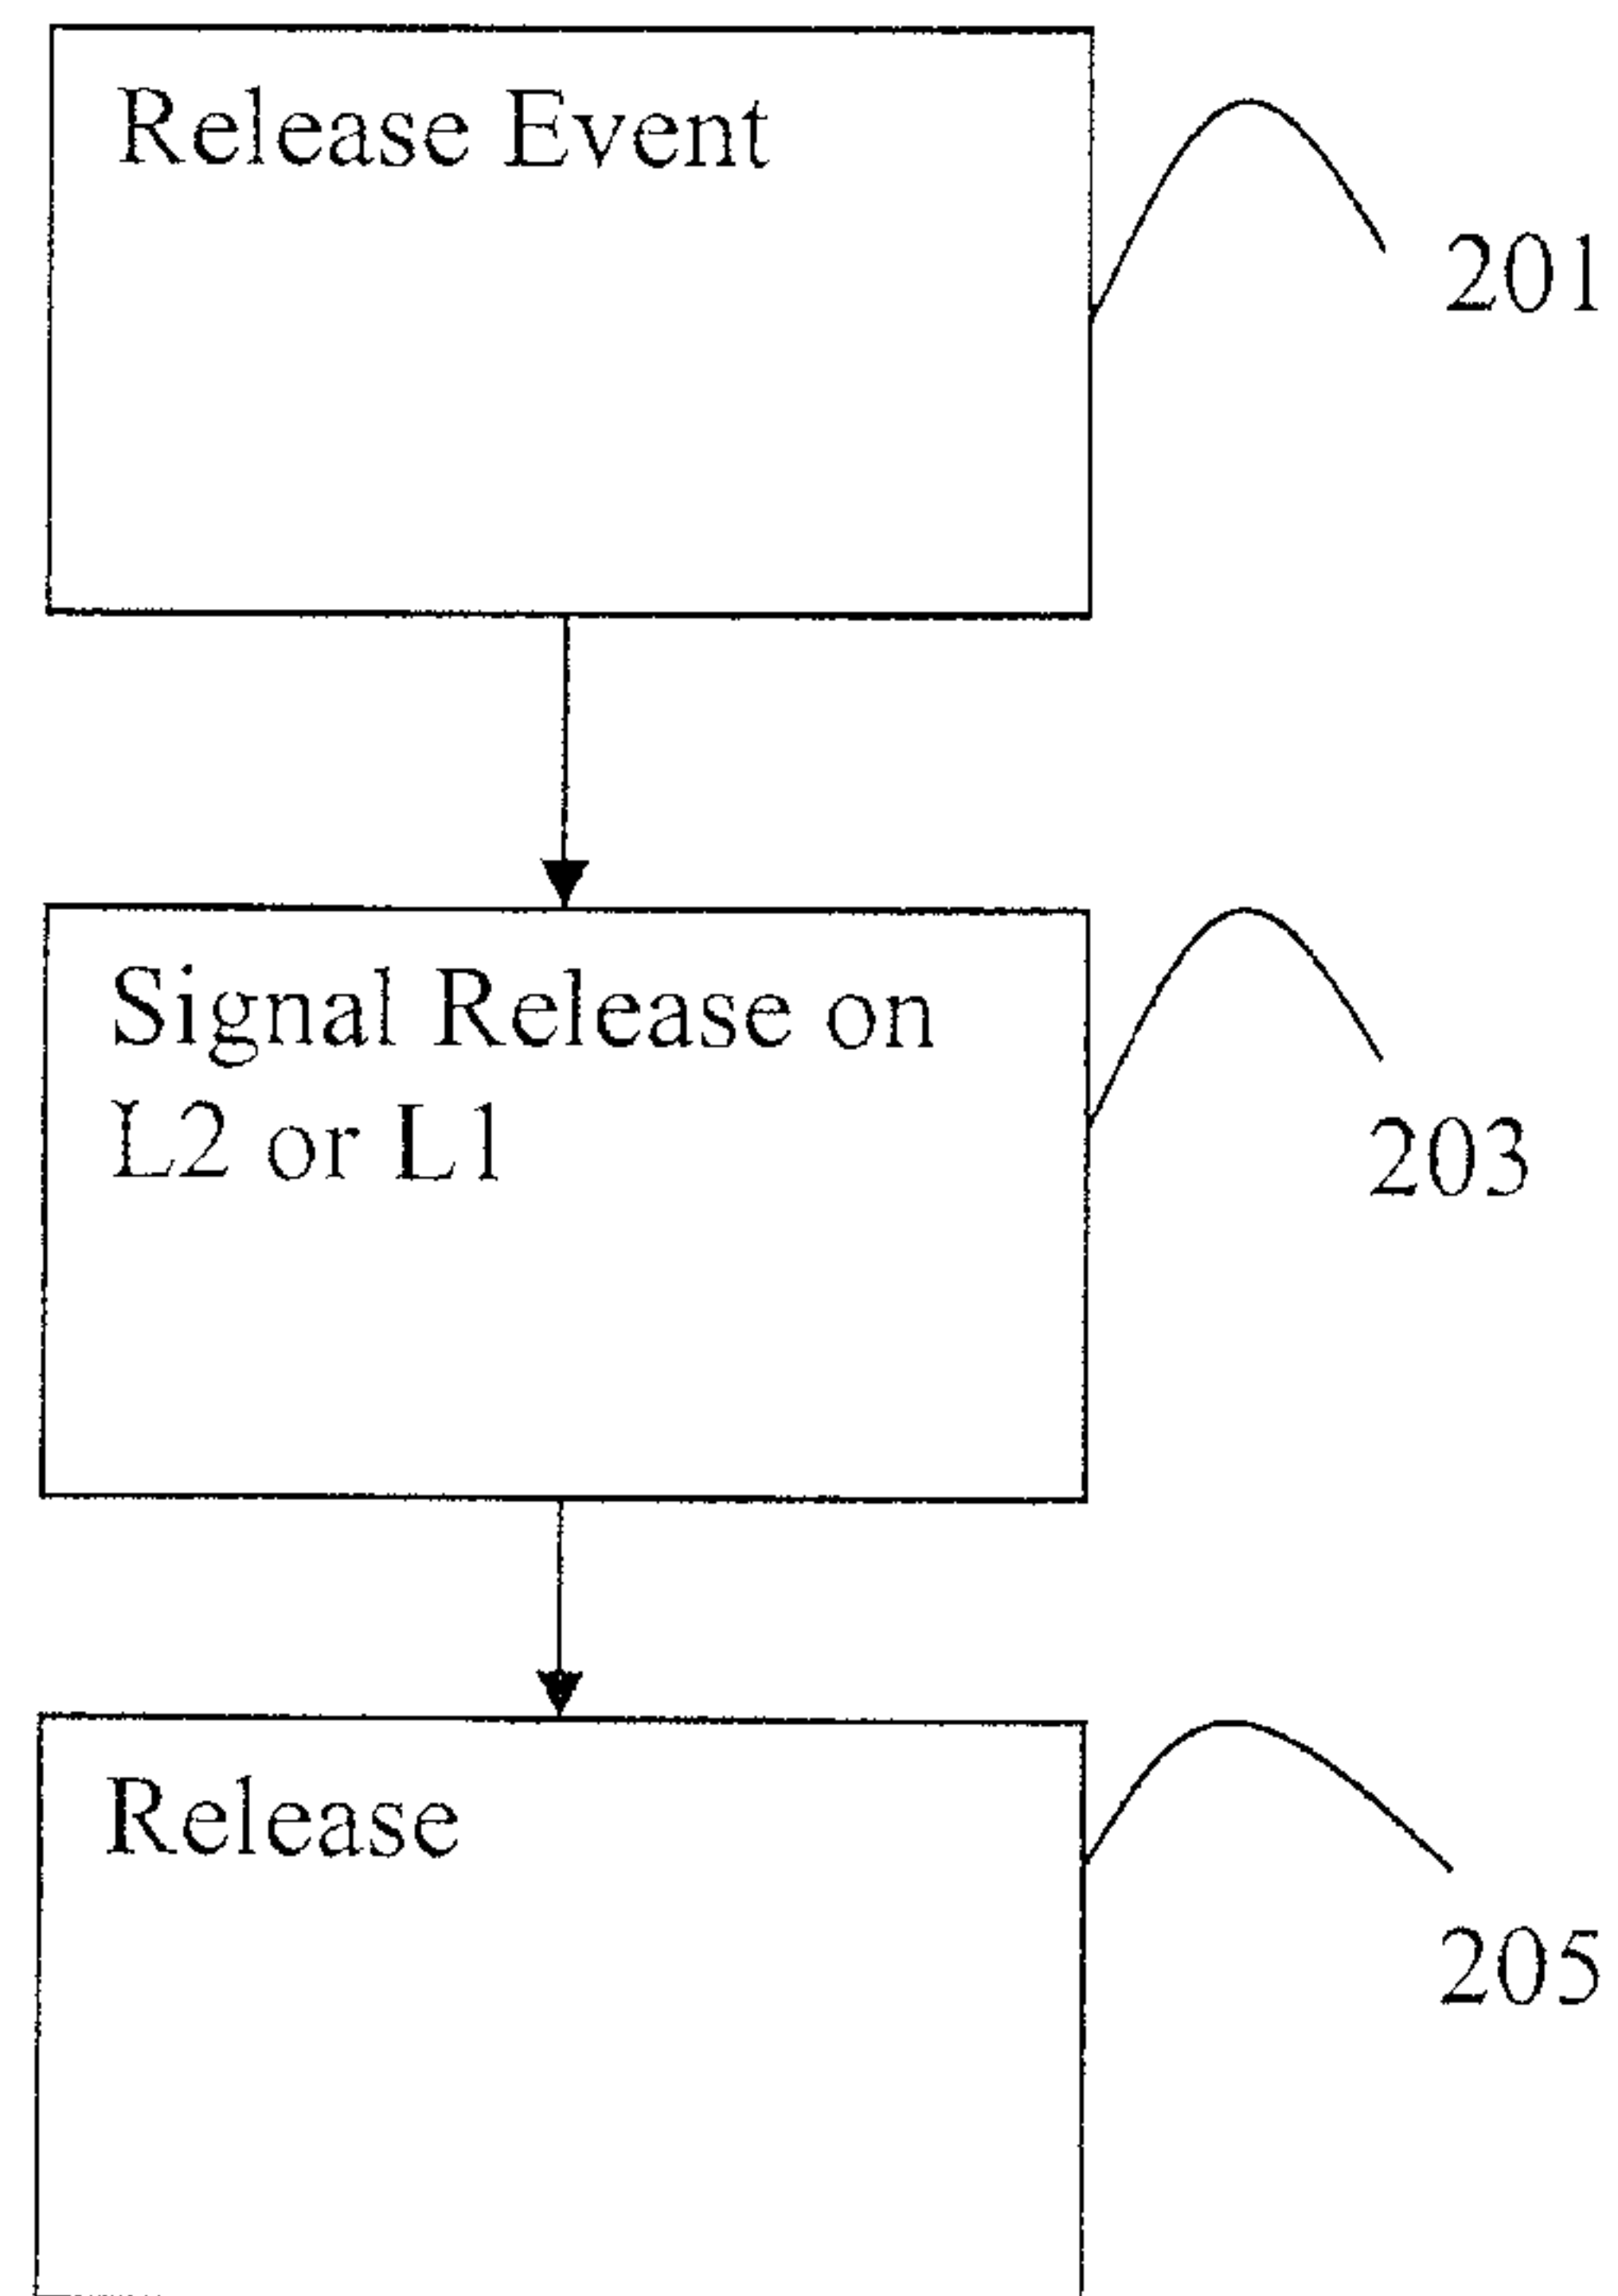


Fig. 3

4/5

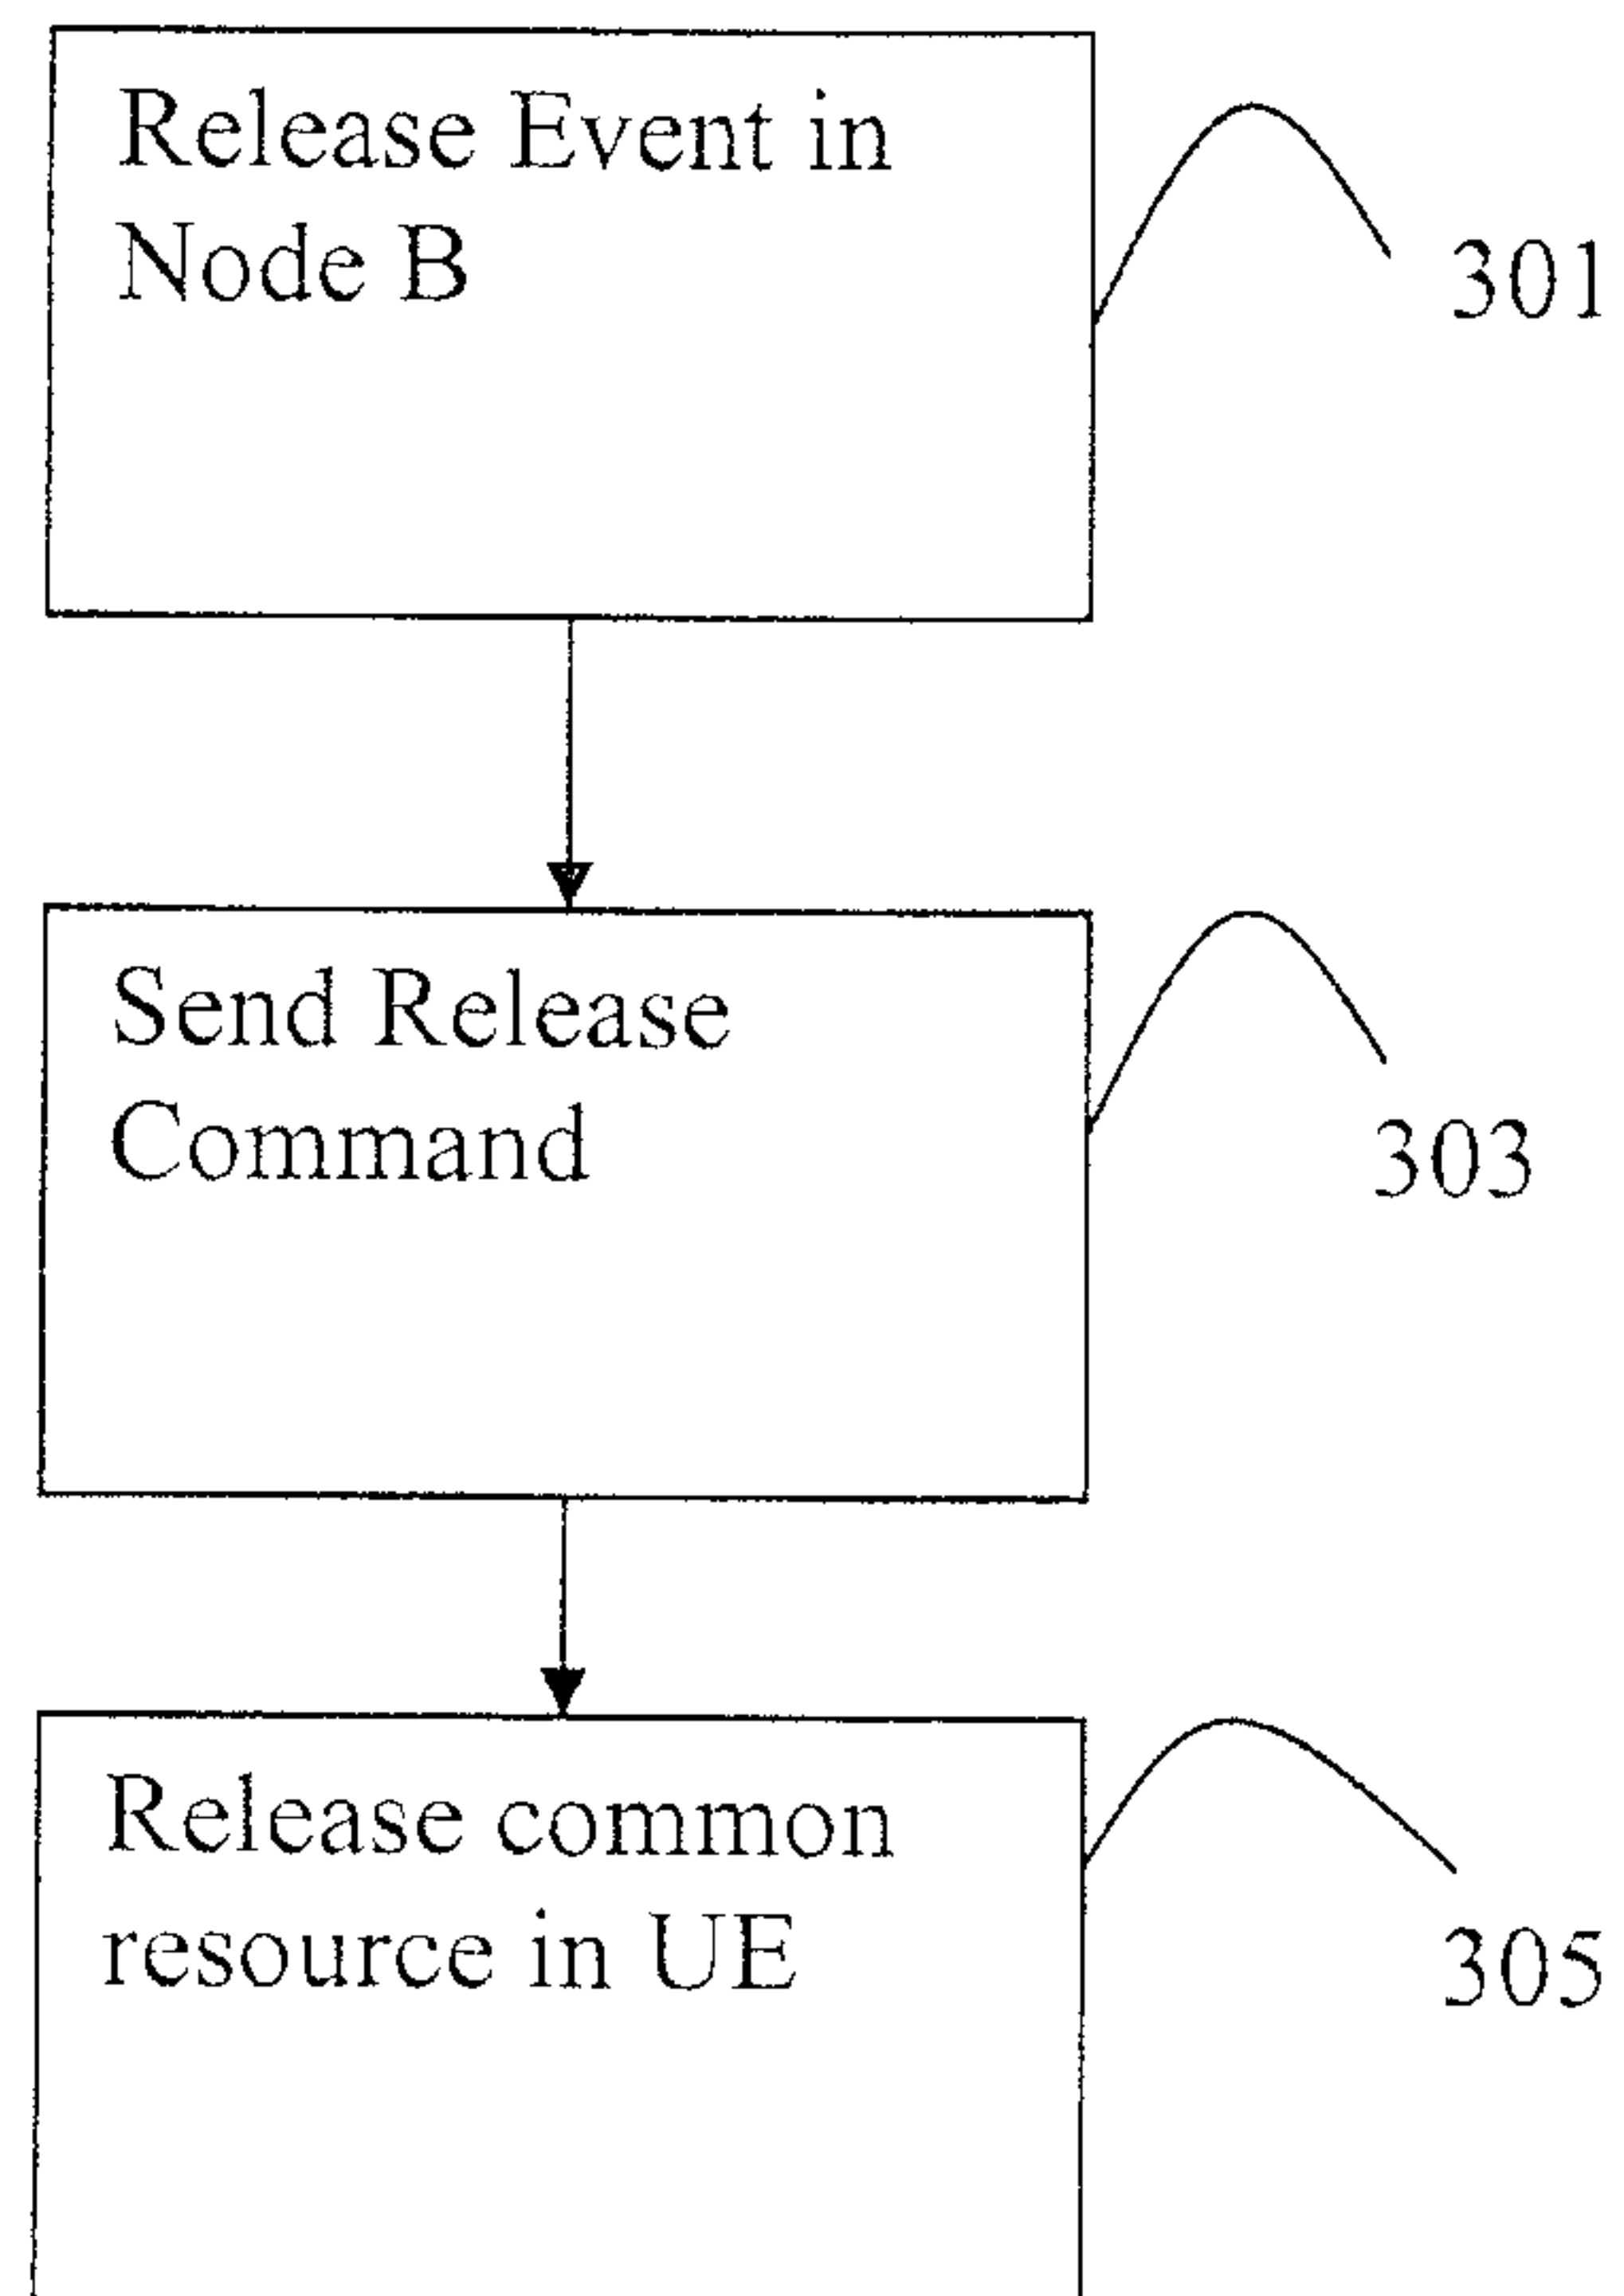


Fig. 4

5/5

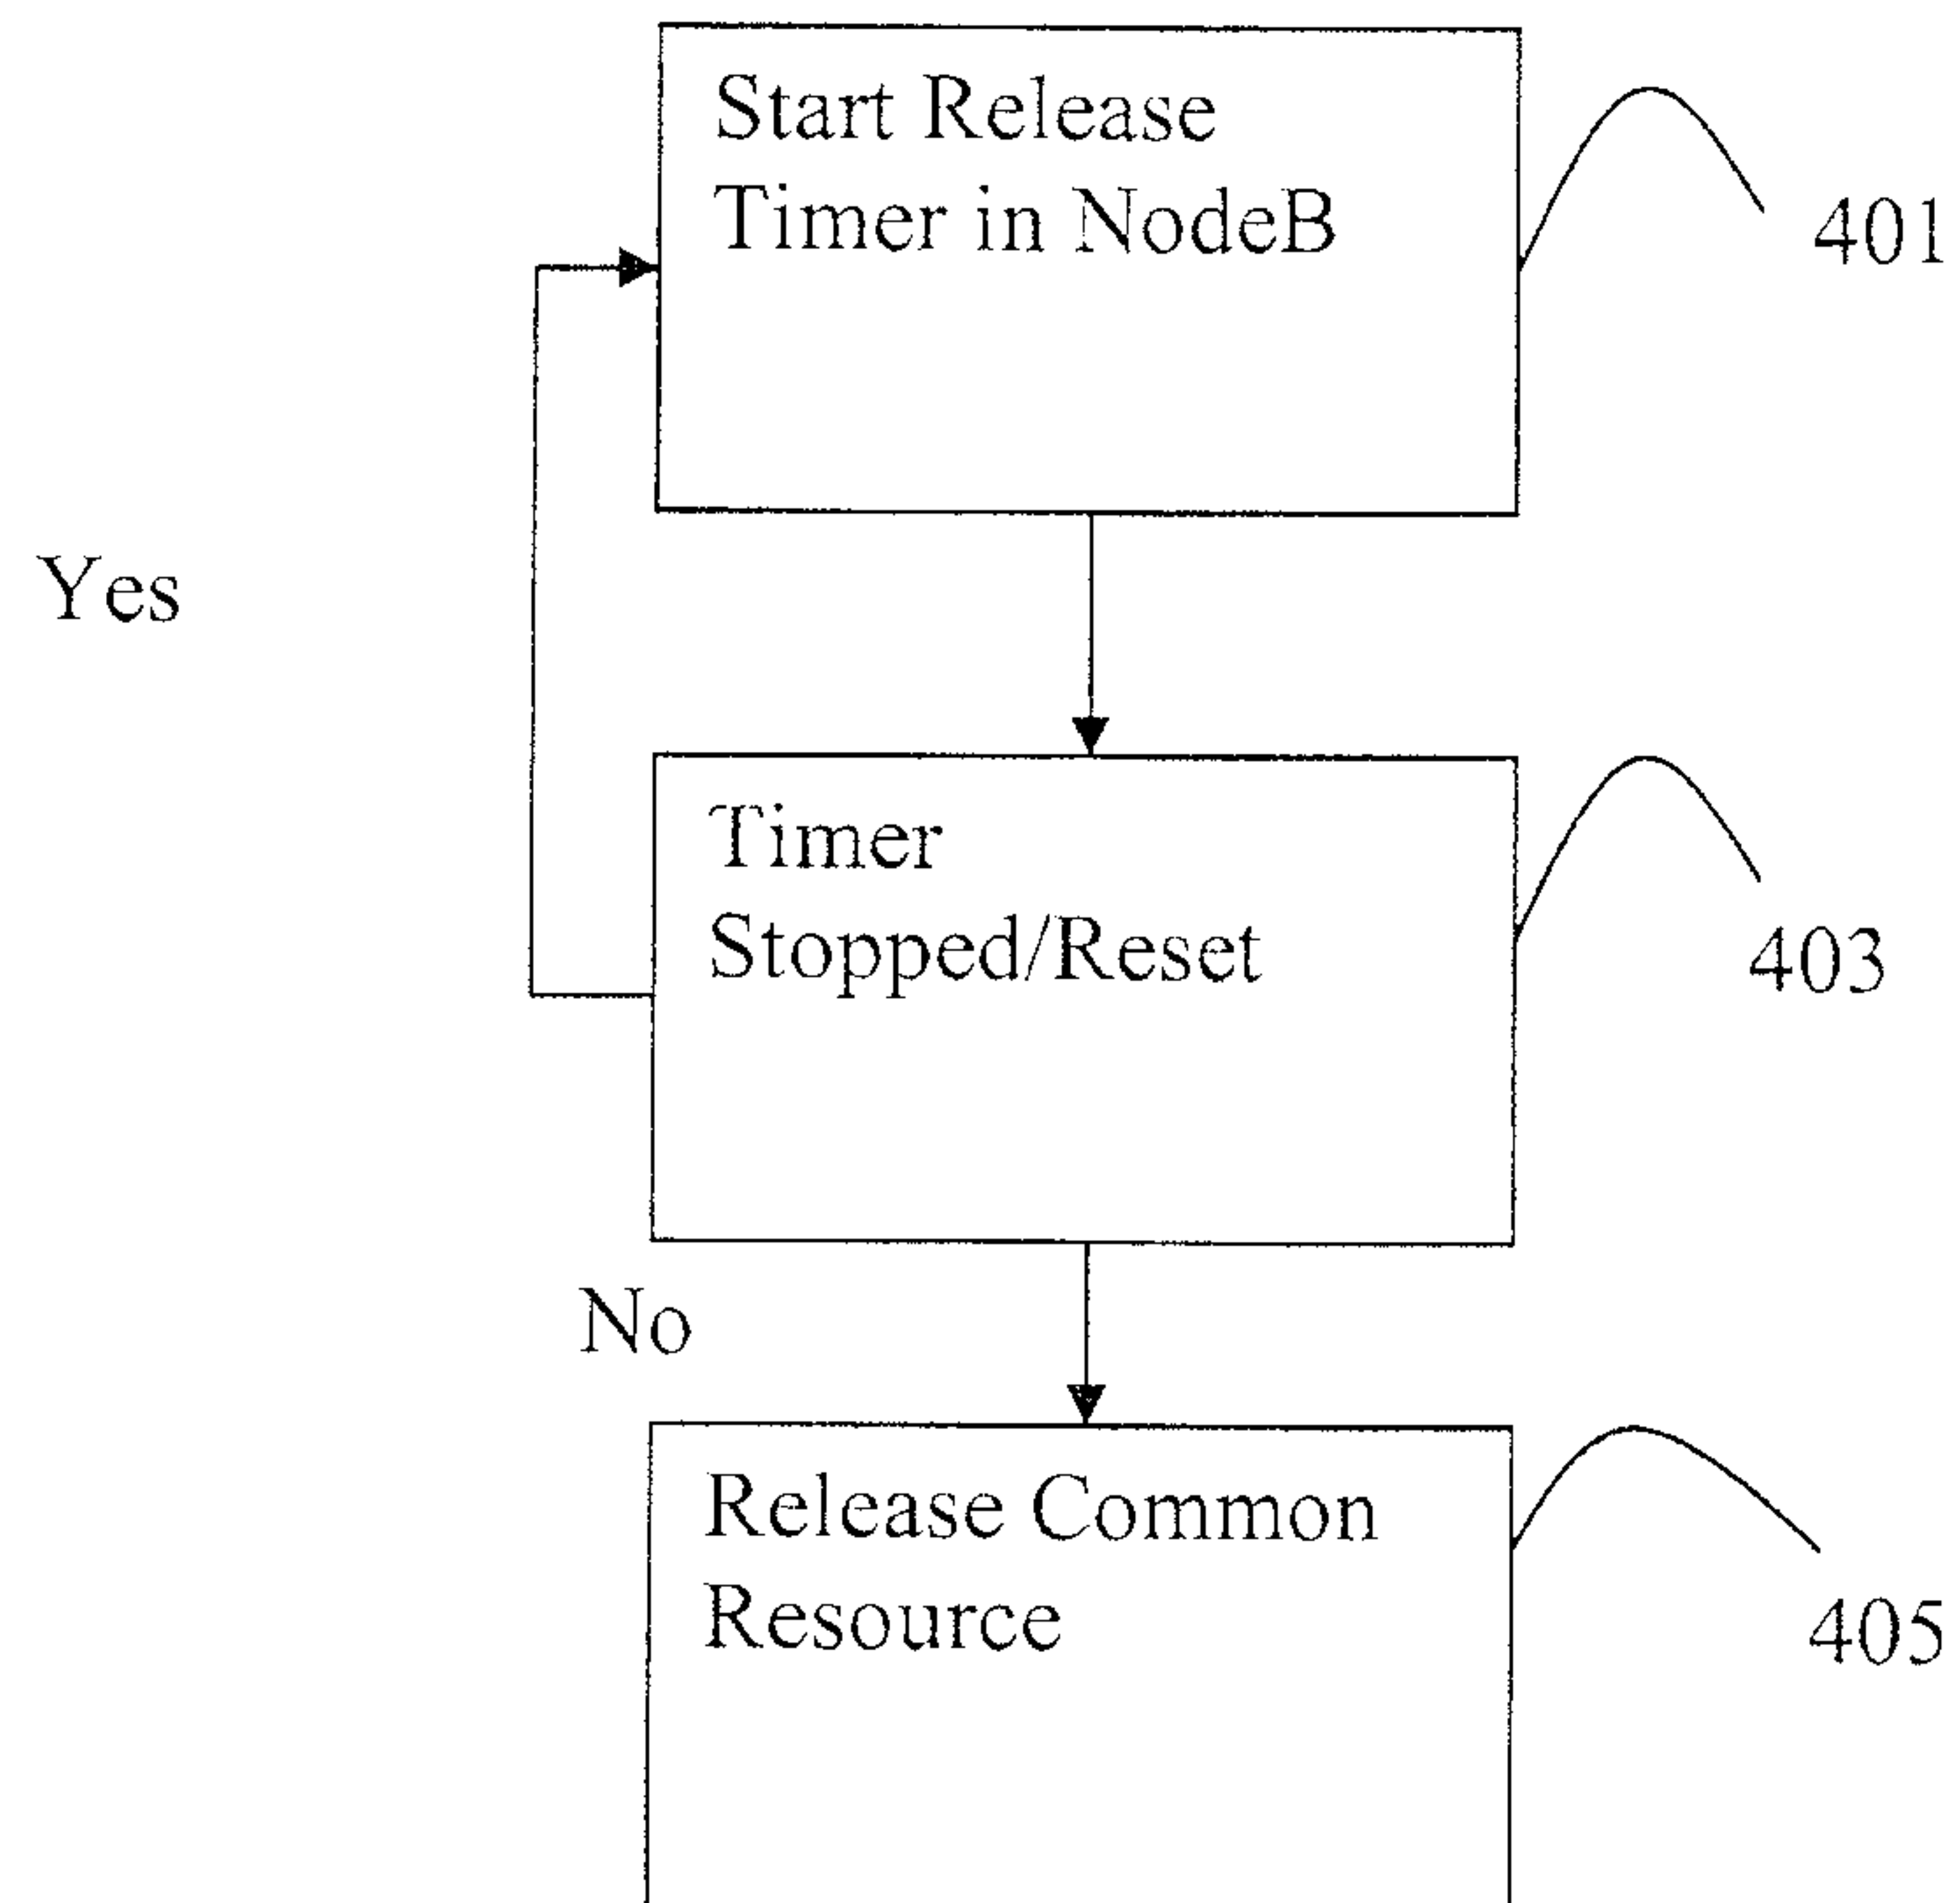


Fig. 5

Release Event

201



Signal Release on
L2 or L1

203



Release

205