

(19)



NL Octrooi Centrum

(11)

2003450

(12) **C OCTROOI**

(21)

Aanvraagnummer: **2003450**

(51)

Int.Cl.:

H02J 5/00 (2006.01)

H02M 7/5387 (2007.01)

(22)

Aanvraag ingediend: **08.09.2009**

(43)

Aanvraag gepubliceerd:

-

(47)

Octrooi verleend:
09.03.2011

(45)

Octrooischrift uitgegeven:
16.03.2011

(73)

Octrooihouder(s):

Technische Universiteit Delft te Delft.

(72)

Uitvinder(s):

Fredrik Frank Arie van der Pijl
te Amsterdam.

Johannes Abraham Ferreira te Den Haag.

Paul Bauer te Delft.

Miquel Castilla te El Prat de Llobregat (ES).

(74)

Gemachtigde:


Drs. M.J. Hatzmann c.s. te Den Haag.

(54)

An adaptive controlling method, an adaptive controller and a computer program product.

(57)

The invention relates to an adaptive controlling method for controlling energy supplied by an electrical source to a resonance tank that is connectable to an electric load. The method comprises the step of determining an energy amount to be supplied to the tank, based on information of energy in the resonance tank.

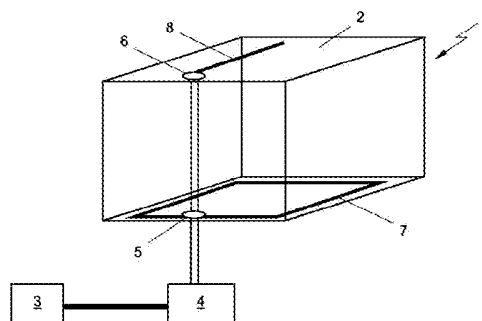

NL C 2003450

Dit octrooi is verleend ongeacht het bijgevoegde resultaat van het onderzoek naar de stand van de techniek en schriftelijke opinie. Het octrooischrift komt overeen met de oorspronkelijk ingediende stukken.

P89108NL00

Title: An adaptive controlling method, an adaptive controller and a computer program product

The invention relates to an adaptive controlling method for controlling energy supplied by an electrical source to a resonance tank connectable to an electric load.

A resonant tank includes at least one inductance and at least one
5 capacitance so that electrical energy can be stored in the tank. In certain applications a resonance tank can be used as an intermediate electrical energy reservoir that is fed by a particular electrical source and that might be loaded by a varying electrical load.

Since the signal behavior of the electrical source and a desired
10 electrical behavior at the electrical load side typically do not coincide with the electrical signals in the resonant tank, an input converter and an output converter is interconnected between the resonant tank on one side, and the source and the load on the other side, respectively. The converter is arranged for transforming the frequency of the signal as well as controlling a desired
15 amplitude at the load, so that an electrical load such as a domestic appliance may function properly. Thereto, in prior art systems, a voltage at the load is controlled, so that a variety of load impedances can be coupled to the resonance tank while maintaining voltage requirements.

It is an object of the invention to improve an adaptive controlling
20 method for controlling energy supplied by an electrical source to a resonance tank connectable to an electric load. Thereto, the method according to the invention further comprises the step of determining an energy amount to be supplied based on information of energy in the resonance tank.

The invention is at least partially based on the insight that voltage
25 controlled converters are not optimal from an energetic point of view. An accurate study of such a system reveals that in general more energy is

supplied to the resonance tank than is needed in a particular situation, thereby causing more copper losses in the tank than would be necessary.

The invention is further at least partly based on the insight that energy information of the resonance tank includes in principle all information
5 regarding matching the source and the one or multiple number of electrical loads.

It appears that, by determining an energy amount to be supplied to the tank, based on information of energy in the resonance tank, a more efficient control of energy to the tank and the load can be obtained, thus
10 leading to an energy supply system having an improved performance from an energetic point of view. As a consequence, components and materials used in the chain from the source to the load are optimally used.

According to an embodiment according to the invention, a buffer component of the resonance tank energy is controlled to remain strictly
15 positive, so that the tank always contains enough energy to supply the electrical loads connected to it. As an alternative, the buffer component of the tank energy is allowed to become negative temporarily, thus achieving a very energy efficient scheme. However, energy requirements at the load side are then weakened.

20 According to a further embodiment according to the invention, a buffer component of the resonance tank energy is minimized in the controlling process, so that an excess of energy in the resonance tank is counteracted, thus providing an energy efficient system.

Further, the invention relates to an adaptive controller.

25 The invention also relates to a computer program product. A computer program product may comprise a set of computer executable instructions stored on a data carrier, such as a CD or a DVD. The set of computer executable instructions, which allow a programmable computer to carry out the method as defined above, may also be available for downloading
30 from a remote server, for example via the Internet.

Other advantageous embodiments according to the invention are described in the following claims.

By way of example only, an embodiment of the present invention will now be described with reference to the accompanying figures in which

5 Fig. 1 shows a schematic perspective view of an electric supply network according to the invention;

 Fig. 2 shows a schematic view of a part of the electric supply network of Fig. 1;

 Fig. 3 shows a simple electric scheme of the partial electric supply
10 network of Fig. 2;

 Fig. 4 shows a more detailed electric scheme of the partial electric supply network of Fig. 2;

 Fig. 5 shows an inductive connection of a load to the electric supply network of Fig. 1;

15 Fig. 6 shows a number of energy plots; and

 Fig. 7 shows a flow chart of a method according to the invention.

The figures are merely schematic views of a preferred embodiment according to the invention. In the figures, the same reference numbers refer to equal or corresponding parts.

20 Figure 1 shows a schematic perspective view of an electric supply network 1 arranged in a rectangular shaped chamber 2. Via a monitoring element 4 the network 1 is connected to a grid point 3 of a public electric power supply system. From the monitoring element 4, a mains line extends towards the chamber 2. The mains line includes distribution points 5, 6 branching off
25 electric supply lines 7, 8 that are located near the floor and the ceiling respectively. Electric loads, such as domestic electrical appliances, can be connected to the electric supply lines 7, 8 in an inductive manner, as explained in more detail below.

 Figure 2 shows a schematic view of a part 9 of the electric supply
30 network 1. Here, a distribution point 5 is connected to an electric supply line 7

at the floor of the chamber 2. The distribution point 5 includes a capacitor that is arranged in series with the electric supply line 7. The electric supply line 7 is formed as an electrically conducting wire in a closed loop, so that the line 7 and the capacitor form a resonance circuit, also called LC-circuit or resonance tank. The distribution point 5 also includes a converter for converting electrical energy from the electrical source, e.g. a harmonic 50 Hz signal, into electrical energy having a central frequency at the resonance frequency of the resonance tank. The converter comprises an adaptive controller according to the invention for controlling energy supplied by an electrical source, viz. from the grid point 3, to the resonance tank connectable to an electric load.

In order to connect an electrical load to the electric supply line 7, a magnetic ferrite kernel 10a-c can be shifted around a section of the electric supply line 7 that forms a primary coil. Through the opening of the magnetic ferrite kernel 10a-c also a secondary coil 11a-c extends so that a transformer element is formed. The secondary coil 11a-c is connected to an output converter 12a-c for converting the resonance signal to a harmonic signal that is suitable for powering the electrical load 13a-c, viz. a 230 V, 50 Hz signal. Since the electrical load 13a-c is inductively connected, there is no danger for an electrical short cut.

Figure 3 shows a simple electric scheme of the partial electric supply network 9. Here, the resonant power converter including the controller for controlling electrical energy supplied to the resonance tank is represented by a controlled electrical source 14. Further, the capacitor C_r , included in the grid point 5, is shown as well as the inductor L_r representing the coil 7. The resonance tank C_r , L_r is connected in series with electrical loads 13a-b. Obviously, also another number of electrical loads might be connected to the resonance tank, e.g. a single load or three loads.

Figure 4 shows a more detailed electric scheme of the partial electric supply network 9. The inductance representing the electric supply line is replaced by a more complex inductor circuit 7 while the controlled electrical

source 14 is separated in an electrical source 14a and a converter including a switching stage 14b and the controller for controlling the energy supplied to the resonance tank. The switching stage 14b is interconnected between terminals of the electrical source 14a and the resonance tank, respectively. The controller drives switching stage 14b switching elements, e.g. semiconductor switches, preferably high power MOSFET switches. At the load side, the output converter 12a-b includes a switching stage that is controlled to generate a desired electrical signal from the resonance signal in the resonance tank. The secondary coil 11a is inductively connected to the primary coil via a magnetic coupling 15.

Figure 5 shows an exemplary inductive connection of a load to the electric supply network 1. Advantageously, the coil of the electric supply line 7 has an elongated structure such that an offset between electrically conducting elements of the coil is small with respect to the length of said conducting elements, so that magnetic fields by the individual electrically conducting elements mutually substantially cancel. In the shown embodiment in Fig. 5, a first section 22 of the coil including conducting elements wherein, during use, electrical currents flow in a particular direction 20, surround a second section 23 of the coil including conducting elements wherein electrical currents flow in an opposite direction 21. By arranging the coil in such a way, a first section 22 of conducting elements or wires surround a second section 21 of conducting elements or wires, and a net magnetic field outside the electric supply line 7 substantially vanish. Further, the electric supply line 7 can be split, e.g. by using a clamp, at least locally, so that the inner section 21 of conducting elements or wires can be pulled locally out of the surrounding outer section 22 of elements. The magnetic ferrite kernel 10 can then be moved between the first and second section of the primary coil, so that the magnetic field can be coupled to the secondary coil 11.

During operation of the adaptive controller according to the invention, information of energy in the resonance tank is used as a basis for determining an energy amount to be supplied to the resonance tank.

Figure 6 shows a number of energy plots associated with energy in the resonance tank as a function of time. The upper left plot shows the inductive energy E_{Lr} as a function of time t . Similarly, the upper right plot shows the capacitive energy E_{Cr} as a function of time t . The lower left plot shows the total energy (inductive energy E_{Lr} and capacitive energy E_{Cr}) as a function of time. As expected, the total energy is mainly constant meeting an ideal situation wherein the amount of energy that is input to the resonance tank is equal to the energy that is output to the loads. Due to a disturbance with respect to the ideal situation, a harmonic ripple is present in the total energy. The lower right plot shows the energy E_{in} (dashed line) that is input to the tank and the energy E_{out} (solid line) that is output from the tank.

It is noted that the ripple in the total energy is associated with an instantaneous buffer component of the resonance tank energy. In the process of controlling an amount of energy to be supplied to the tank, the instantaneous buffer component might be set strictly positive while the component is also minimized.

Advantageously, a filtered increase of resonance tank energy is integrated and subsequently controlled to a value depending on energy supplied to the resonance tank. As an example, said value might be related to the supplied energy in a linear or quadratic way. Depending on a particular application, a proper relation of said value with the supplied energy can be established. Further, the time scale of the filtering process is then different, preferably larger than the time scale of the integrating process, so that a filtered increase of the instantaneous energy buffer component is integrated and related to said value depending on energy supplied to the resonance tank.

Resonance tank energy information can be determined by measuring at least one physical parameter associated with the resonance tank.

A control objective, such as relating a filtered increase of resonance tank information to a value depending on energy supplied to the resonance tank, can be implemented in various ways, e.g. depending on the converter type and switch stage type. As an example, pulse width modulation (PWM), phase-shift modulation (PSM) or frequency modulation (FM) can be employed. Also a combination is possible. As a further example, a quantum conversion (QC) modulation method can be used wherein the modulation is controlled synchronous with the resonance frequency of the resonance tank.

Further, different control algorithms can be applied, both linear and non-linear. As an example, a controller based on sliding-mode control theory is explained in more detail below. In order to arrive at a specific controlling method, one or more control objects have to be rewritten as a valid sliding surface.

A key observation is that the tank transfers energy from one quantum period to the next, although each of the tank components discharges completely during a (quantum) period. Next important observation is the fact that the resonant inductor L_r can not transfer energy between periods, because by definition a consecutive period starts with zero current, and therefore with an energetic empty resonant inductor. The buffer energy is rewritten into (3).

$$\int \overline{\Delta E_{LC}(t)} dt = \overline{E_{buf}} = \int_0^t \left(v_r \cdot i_r + \left[i_r \cdot L \frac{di_r}{dt} \right] \right) dt = \overline{v_r i_r} \quad (3)$$

The right-hand side of (1) is provided in (4).

$$\overline{E_{buf}} = \alpha' \cdot \overline{E_{in}} \quad (4)$$

The input sliding surface – related to the input converter – then follows in (5) as the difference of equations (3) and (4).

$$S_{input} = \frac{\omega_c}{s + \omega_c} v_r \text{sgn}(i_r) \bar{i}_r - \alpha' \frac{\omega_c}{s + \omega_c} v_{in} \text{sgn}(i_r) \bar{i}_r \quad (5)$$

The purpose of (5) is to become zero, which implies that (5) can be divided by
 5 the average of i_r .

$$S_{input} = \frac{\omega_c}{s + \omega_c} v_r \text{sgn}(i_r) - \frac{\omega_c}{s + \omega_c} \alpha' v_{in} \text{sgn}(i_r) \quad (6)$$

While surface (6) is the basic sliding surface, a rewritten form is better suited
 10 for mathematical analysis. First step is to rewrite the second right hand term
 in (6) into (7).

$$v_{in} \text{sgn}(i_r) \equiv V_{in} u_p \quad (7)$$

15 In (7), the DC input voltage is denoted V_{in} and the control input is denoted by
 u_p . The left term is rewritten by noting that

$$\frac{\omega_c}{s + \omega_c} v_r \text{sgn}(i_r) \approx C \cdot \bar{i}_r, \quad (8)$$

20 where C is a constant dependent on the resonant capacitor value and the
 angular resonant frequency: $C = \frac{2}{\pi} \cdot \omega_c \cdot C_r$.

The motivation behind the (close) approximation (8) is that applying
 the low-pass filter on $v_r \text{sgn}(i_r)$ is equivalent to the average of i_r (up to the
 constant C), when accepting the loss of phase information between voltage and
 25 current. Though, one of the strengths of quantum conversion is that phase
 information is not used at all, because switching occurs only at zero resonant

current. If for example the control method would be applied to a different conversion method than quantum conversion (e.g., PWM or FM, see previous paragraph), (8) would not be true.

Substitution of (7) and (8) in sliding surface (6) leads to the
 5 rewritten sliding surface (9). Note that phase information is also discarded from the second right hand term by only using the magnitude of the filter.

$$S_p = \bar{i}_r - \alpha \left| \frac{\omega_c}{s + \omega_c} \right| \frac{u_p}{C_r} V_{in} = \bar{i}_r - \alpha u_p V_{in} \quad (9)$$

10 Interpreting (9), the first right hand side term represents the buffer energy in the resonant tank when it is multiplied by the resonant current. The second term represents a fraction α of the supplied energy, when also multiplied by the resonant current. Note that both terms originally contained the same resonant current factor i_r , which has been left out of the equation,
 15 but the energetic origin of the terms is still clear.

The intuitive reason that (9) ‘works’ is that the supplied energy reacts little more slowly than the buffer tank energy. For example, adopting the common control law (10), it is clear that the buffer will grow faster than the average supplied energy when $S_p > 0$ and as a result S_p becomes < 0 , and
 20 vice versa.

$$u_p = \begin{cases} 1, & S_p > 0 \\ 0, & S_p < 0 \end{cases} \quad (10)$$

In the following a formal proof of the validness of (candidate) sliding
 25 surface (9) is provided. In sliding-mode control theory the following 3 conditions must be formally met to guarantee stable closed-loop operation: Reaching condition, Existence condition and Stability condition.

Reaching considers the fact that the control law must assure to reach the sliding surface (in finite time) starting from all possible initial states. Existence means that the system dynamics must be able to stay at the sliding surface once it is reached. The stability condition considers internal stability of the closed-loop system. Sliding mode control design effectively linearizes the non-linear plant system, but those invisible reminiscent terms must be checked on stability also.

We start with forming the closed-loop system dynamics with the help of the sliding surfaces. First step is to put S_p equal to zero. Rewriting (9) with $S_p=0$ results in (11).

$$\alpha \omega_c u_p = (s + \omega_c) \bar{i}_r = \frac{d\bar{i}_r}{dt} + \omega_c \bar{i}_r \quad (11)$$

Substituting for $\frac{d\bar{i}_r}{dt}$ in (11) in the averaged state-space model (i.e., (0a) and (0b)) leads to the following expression for u_p in (12). The terms u_{sj} denote the control variables of the output switching bridges.

$$\bar{u}_p = \frac{\left(r_r - \frac{\pi^2}{4} \omega_c L_r \right) \bar{i}_r + \sum_{j=1}^m \frac{v_{ojref}}{n} \bar{u}_{sj}}{v_i - \frac{\pi^2}{4} \omega_c L_r \alpha} \quad (12)$$

Substituting (12) in (0a) leads to a linear first-order differential expression in $\bar{i}_r^2$, which is given in (13). [Intermediate steps to arrive at this equation are given in Appendix 1].

$$\frac{d\bar{i}_r^2}{dt} = \frac{2\omega_c}{v_i - \frac{\pi^2}{4} \omega_c L_r \alpha} \left(\alpha \sum_{j=1}^m \left(\frac{1}{2} C_{oj} \frac{dv_{ojref}^2}{dt} + \frac{v_{ojref}^2}{r_{oj}} \right) - (v_i - r_r \alpha) \bar{i}_r^2 \right) \quad (13)$$

Equation (13) contains the entire dynamics of the closed-loop system. Consulting linear system analysis, stability of the linear system is assured when

5

$$-(v_i - r_r \alpha) < 0 \text{ and } \frac{2\omega_c}{v_i - \frac{\pi^2}{4}\omega_c L_r \alpha} > 0.$$

Rewriting the latter equations leads to the stability condition for α in (14).

$$\alpha < \min \left\{ \frac{v_i}{r_r}, \frac{v_i}{\frac{\pi^2}{4}\omega_c L_r} \right\} \quad (14)$$

10

This shows the upper bound of α for which the system is stable. Result of choosing α larger than the bound in (14) is an unlimited increase of stored energy in the primary circuit. There is no lower bound from a stability point of view, because we look from the primary side (assuming the secondary side dynamics being situated at the sliding surface) and the system will converge to zero-power throughput in the worst case. See Fig. x2 for an illustration.

15

The existence conditions will put a lower bound for α , in order to assure stable regime; enough input power to supply the secondary sides.

For the outputs the existence conditions are straightforward:

20

$$-1 < u_{sj} < 1 \quad \rightarrow \quad \bar{i}_r > \max_{j=1\dots n} \left| C_{oj} \frac{dv_{ojref}}{dt} + i_{oj} \right| \quad (15)$$

Condition (15) simply states that the input current must be larger than load current plus the current through the output filter capacitor.

25

The input existence condition is the most interesting one. The conditions follow from the fact that the equivalent input control parameter must be between 0 and 1: $0 < u_{p,eq} < 1$.

Setting the equivalent input larger than 0 leads to (16).

5

$$r_r > \frac{\pi^2}{4} \omega_c L_r \quad (16)$$

Note that in (16) the radial frequency is the cut-off frequency of the low-pass filter and not the resonant frequency. Equation (16) reflects the idea that the
10 ‘filtered’ impedance of the averaged resonant tank must be smaller than the loss resistance in order to have enough real damping. In other words, the resonant tank must be able to release its energy fast enough.

The remaining condition, $u_{p,eq} < 1$, reveals when the buffer-energy percentage in the resonant tank is enough to assure local stability.

15 Substituting for $u_{p,eq}$ the expression in (12) and rewriting, the final condition follows in (17).

$$\left(v_i + \frac{\pi^2}{4} \omega_c L_r \bar{i}_r \right) \bar{i}_r > \left(r_r \bar{i}_r + \frac{\pi^2}{4} \omega_c L_r \alpha \right) \bar{i}_r + \sum_{j=1}^m \frac{1}{2} C_{oj} \frac{dv_{ojref}^2}{dt} + \frac{v_{ojref}^2}{r_{oj}} \quad (17)$$

20 Expression (17) has the structure of an energy balance. On the right hand side, ‘loss’ terms are present. To be precise, from left to right: copper loss energy, virtual resonant tank energy, filter capacitor energy and load energy. The ‘virtual’ energy will be explained shortly. On the left hand side of (17) source terms are present. The left-most term is clearly the averaged input energy,
25 while the right term represents the averaged stored resonant tank energy.

The virtual energy term with α turns out to be a safety measure. It represents the dynamics of the resonant tank in essence. The momentary resonant tank energy can not be viewed as a term completely available (to
 5 compensate instantaneously) for the loss energies, because when the tank is empty it must be charged, before it can transfer energy again.

The control parameter α is a function of $\bar{i}_r$ (and vice versa) through the sliding surface and the state-space dynamics. The only problem to advance further into an explicit condition for α is that $\bar{i}_r$ is a function of its own
 10 derivative; see (13). The resulting first order differential equation is difficult to solve analytically, due to the non-homogeneous sinusoidal output terms.

The following simplification is justified by the fact that interest is in a (rough) design guidance value for α ; in practice the value for α will be tuned by observation. Returning to expression (13), the simplification consists of
 15 assuming zero ripple in $i_r(t)$, which makes the left hand side of (13) equal to 0. Rewriting (13) results in an approximate expression for $\bar{i}_r$ as a function of α :

$$\bar{i}_r \approx \sqrt{\frac{\alpha}{V_i - r_r \alpha} \sum_{j=1}^m P_{oj}} \quad (18)$$

In (18), P_{oj} replaces $\frac{1}{2} C_{oj} \frac{dv_{ojref}^2}{dt} + \frac{v_{ojref}^2}{r_{oj}}$. Substitution of (18) in (17) and
 20 rearranging terms leads to design condition (19).

$$\left(V_i - \frac{\pi^2}{4} \omega_c L_r \alpha \right) \left(\frac{\alpha}{V_i - r_r \alpha} \sum_{j=1}^m P_{oj} \right)^{\frac{1}{2}} > \left(r_r - \frac{\pi^2}{4} \omega_c L_r \right) \left(\frac{\alpha}{V_i - r_r \alpha} \sum_{j=1}^m P_{oj} \right) + \sum_{j=1}^m P_{oj} \quad (19)$$

In the following the previous design conditions are applied to a design

example. Table 1 shows values for the parameters as introduced in Fig. 4.

Table I

Parameter values for two-clamp cable prototype as referred to in Fig. 4

Symbol	QUANTITY	Value
V_i	input DC voltage	600 [V]
L_r	input side leakage inductance	40 [uH]
r_r	peak value of flux linkage	2 [Ω]
r_{o1}, r_{o2}	output load resistances	240 [Ω]
ω_c	radial resonant frequency	100k [Hz]
U_{o1}, U_{o2}	required output voltages	240 [V]
P_{o1}, P_{o2}	required output powers	240 [W]
n	number of clamps	2

5

Stability is assured when (14) applies:

$$\alpha < \min \left\{ \frac{600}{2}, \frac{600}{\frac{\pi^2}{4} 2\pi \cdot 10^5 \cdot 40 \cdot 10^{-6}} \right\} \approx 9.7$$

- 10 The sliding surface for the output exists if (15) holds, where expression (18) is substituted for $\bar{i}_r$:

$$\sqrt{\frac{\alpha}{600 - 2\alpha}} 480 > 1 \rightarrow \alpha > 1.24$$

The input sliding surface exists if (19) holds:

$$\left(600 - \frac{\pi^2}{4} 2\pi \cdot 10^5 \cdot 40 \cdot 10^{-6} \cdot \alpha\right) \left(\frac{480\alpha}{600 - 2\alpha}\right)^{\frac{1}{2}} > \left(2 - \frac{\pi^2}{4} 2\pi \cdot 10^5 \cdot 40 \cdot 10^{-6}\right) \left(\frac{480\alpha}{600 - 2\alpha}\right) + 480 \rightarrow 0.8 < \alpha < 9.7$$

5 Combining the previous conditions, the design solution gives:

$$1.24 < \alpha < 9.7 \quad (20)$$

Whereas α represents the fraction of the input energy that is used for the
10 buffer energy in the tank, the best (i.e., most energy efficient) solution for α is the minimum allowed value in (20).

Figure 7 shows a flow chart of an embodiment of the method according to the invention. An adaptive controlling method is used for controlling energy supplied by an electrical source to a resonance tank
15 connectable to an electric load. The method comprises the step 100 of determining an energy amount to be supplied based on information of energy in the resonance tank.

The adaptive controlling method for controlling energy supplied by an electrical source to a resonance tank connectable to an electric load can be
20 performed using dedicated hardware structures, such as FPGA and/or ASIC components. Otherwise, the method can also at least partially be performed using a computer program product comprising instructions for causing a processor of the computer system to perform the above described one or more steps of the method according to the invention. All steps can in principle be
25 performed on a single processor. However it is noted that at least one step can be performed on a separate processor, e.g. the step of minimizing a buffer component of the resonance tank energy.

The invention is not restricted to the embodiments described herein. It will be understood that many variants are possible.

It is noted that the electric supply network according to the invention might in principle be arranged in building rooms having an arbitrary
5 room geometry, such as in a house or in an office.

It is further noted that the resonance tank can be formed otherwise, e.g. as a capacitor arranged in parallel with the coil of the electric supply line. Further, the electrical loads might be arranged in parallel with the resonance tank.

10 The resonance tank can not only be implemented as a first order LC-circuit but also as a higher order circuit including more than two reactive elements.

It is also noted that, as an alternative to an inductive connection, one or more electrical loads might be connected to the resonance tank by using
15 an electrically conducting connection without eliminating the operation of the adaptive controller according to the invention.

Other such variants will be obvious for the person skilled in the art and are considered to lie within the scope of the invention as formulated in the following claims.

Conclusies

1. Adaptieve regelwerkwijze voor het regelen van energie die wordt toegevoerd door een elektrische bron aan een resonantietank die kan worden aangesloten op een elektrische belasting, waarbij de werkwijze de stap omvat van het bepalen van een energiehoeveelheid die moet worden toegevoerd,
5 gebaseerd op informatie van energie in de resonantietank.
2. Adaptieve regelwerkwijze volgens conclusie 1, waarbij een buffercomponent van de resonantietank-energie wordt geregeld om strikt positief te blijven.
3. Adaptieve regelwerkwijze volgens conclusie 2, waarbij de
10 buffercomponent van de resonantietank-energie in het regelproces wordt geminimaliseerd.
4. Adaptieve regelwerkwijze volgens één der voorgaande conclusies 1-3, waarbij een gefilterde toename van resonantietank-energie wordt geïntegreerd en vervolgens wordt geregeld naar een waarde die afhangt van naar de
15 resonantietank toegevoerde energie.
5. Adaptieve regelwerkwijze volgens conclusie 4, waarbij de tijdschaal van het filter- en integratieproces verschillend is.
6. Adaptieve regelwerkwijze volgens conclusie 4 of 5, waarbij de waarde die afhangt van de toegevoerde energie op een lineaire of kwadratische manier
20 daaraan gerelateerd is.
7. Adaptieve regelwerkwijze volgens één der voorgaande conclusies, voorts omvattende het meten van tenminste één fysische parameter voor het bepalen van energie-informatie van de resonantietank.
8. Adaptieve regelaar voor het regelen van energie die wordt toegevoerd
25 door een elektrische bron aan een resonantietank die kan worden aangesloten op een elektrische belasting, waarbij, waarbij de regelaar is ingericht voor het bepalen van een energiehoeveelheid die moet worden toegevoerd, gebaseerd op informatie van energie in de resonantietank.

9. Adaptieve regelaar volgens conclusie 8, waarbij de regelaar is ingericht voor het besturen van een schakelbank die tussen aansluitpunten van de elektrische bron en de resonantietank is aangesloten.
10. Elektrisch toevoernetwerk, omvattende een adaptieve regelaar volgens
5 conclusie 9, en de daarop aangesloten resonantietank.
11. Elektrisch toevoernetwerk volgens conclusie 10, waarbij de resonantietank een LC-circuit omvat.
12. Elektrisch toevoernetwerk volgens conclusie 10 of 11, waarbij een spoel van het LC-circuit inductief koppelbaar is met de elektrische belasting.
- 10 13. Elektrisch toevoernetwerk volgens conclusie 12, waarbij de spoel inductief koppelbaar is een meervoudig aantal elektrische belastingen.
14. Adaptieve regelaar volgens conclusie 12 of 13, waarbij de spoel een langwerpige structuur heeft zodat een afstand tussen elektrisch geleidbare elementen van de spoel klein is ten opzichte van de lengte van de geleidende
15 elementen.
15. Computer programma product voor het regelen van energie die wordt toegevoerd door een elektrische bron aan een resonantietank die kan worden aangesloten op een elektrische belasting, waarbij het computer programma product voor een computer leesbare code omvat om een processor de stap te laten
20 uitvoeren van het bepalen van een energiehoeveelheid die moet worden toegevoerd, gebaseerd op informatie van energie in de resonantietank.

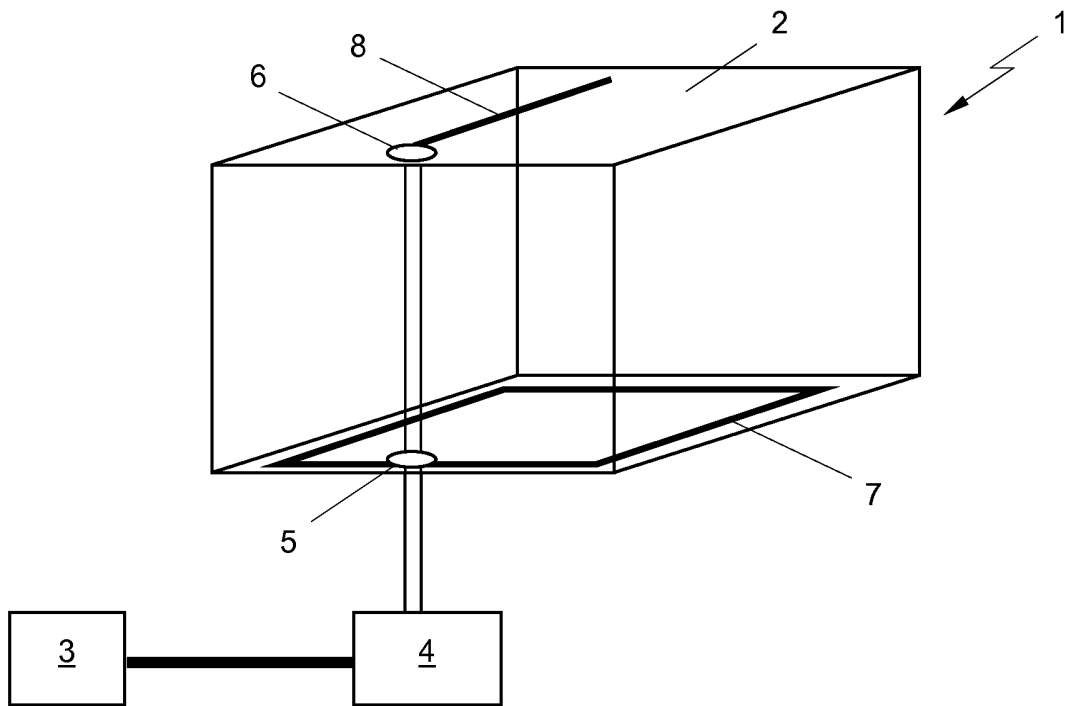


Fig. 1

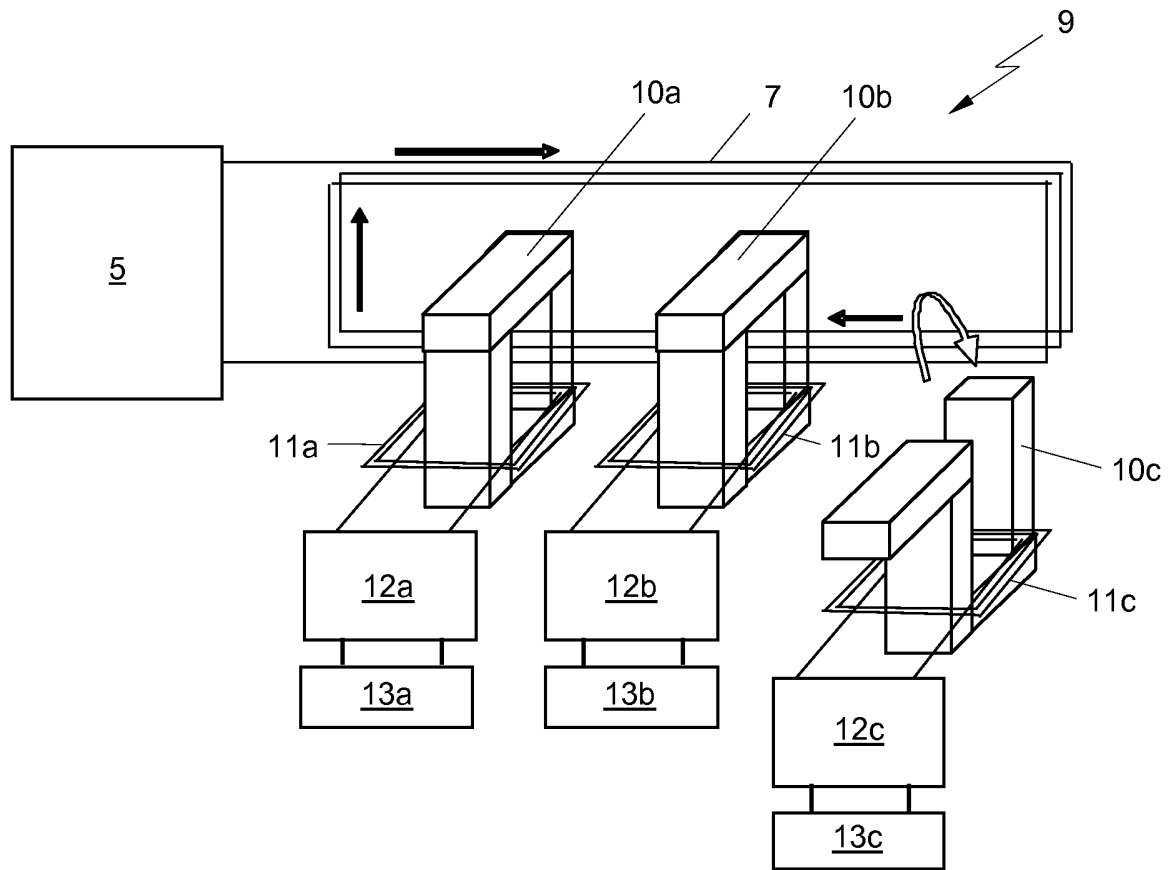


Fig. 2

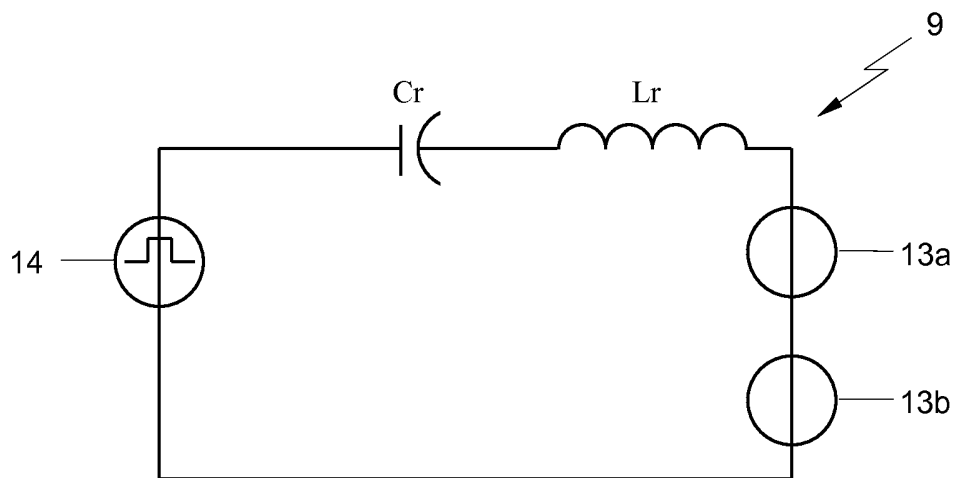


Fig. 3

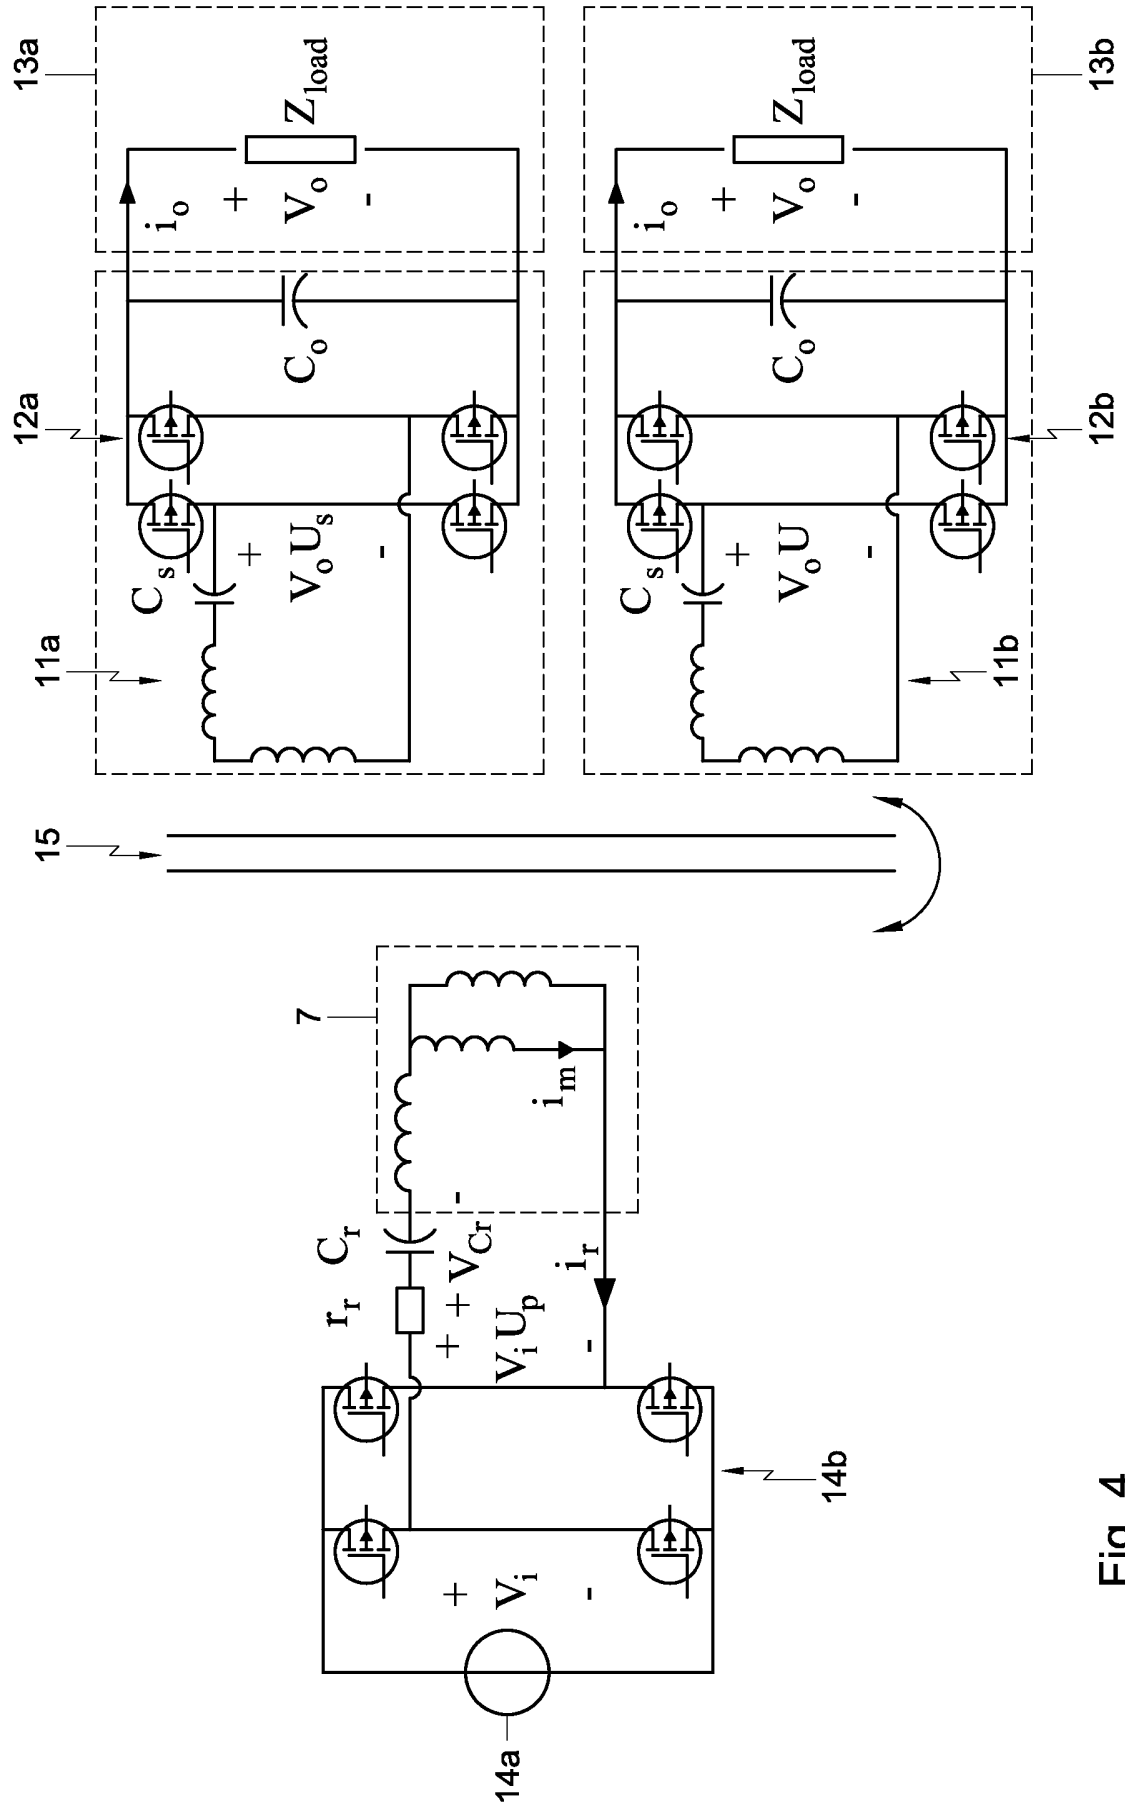


Fig. 4

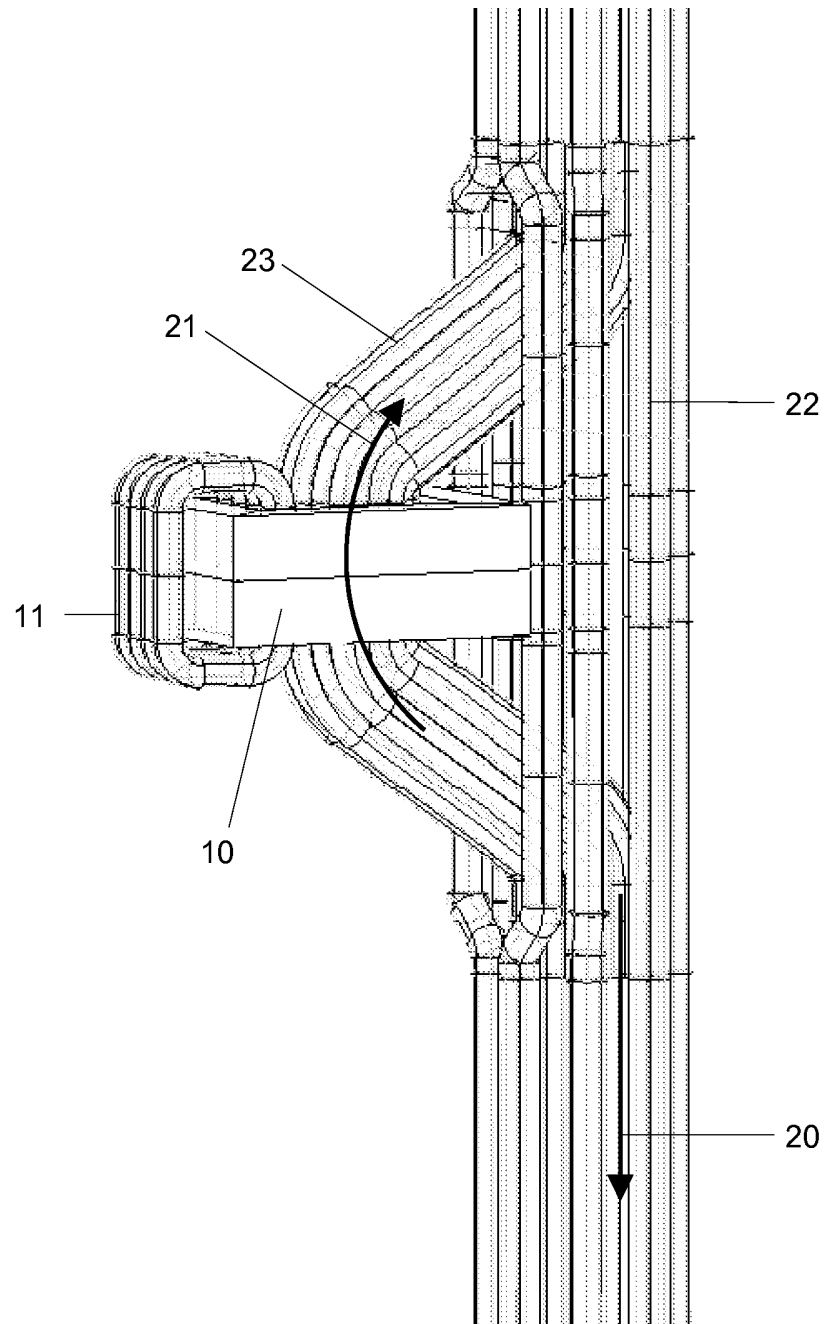


Fig. 5

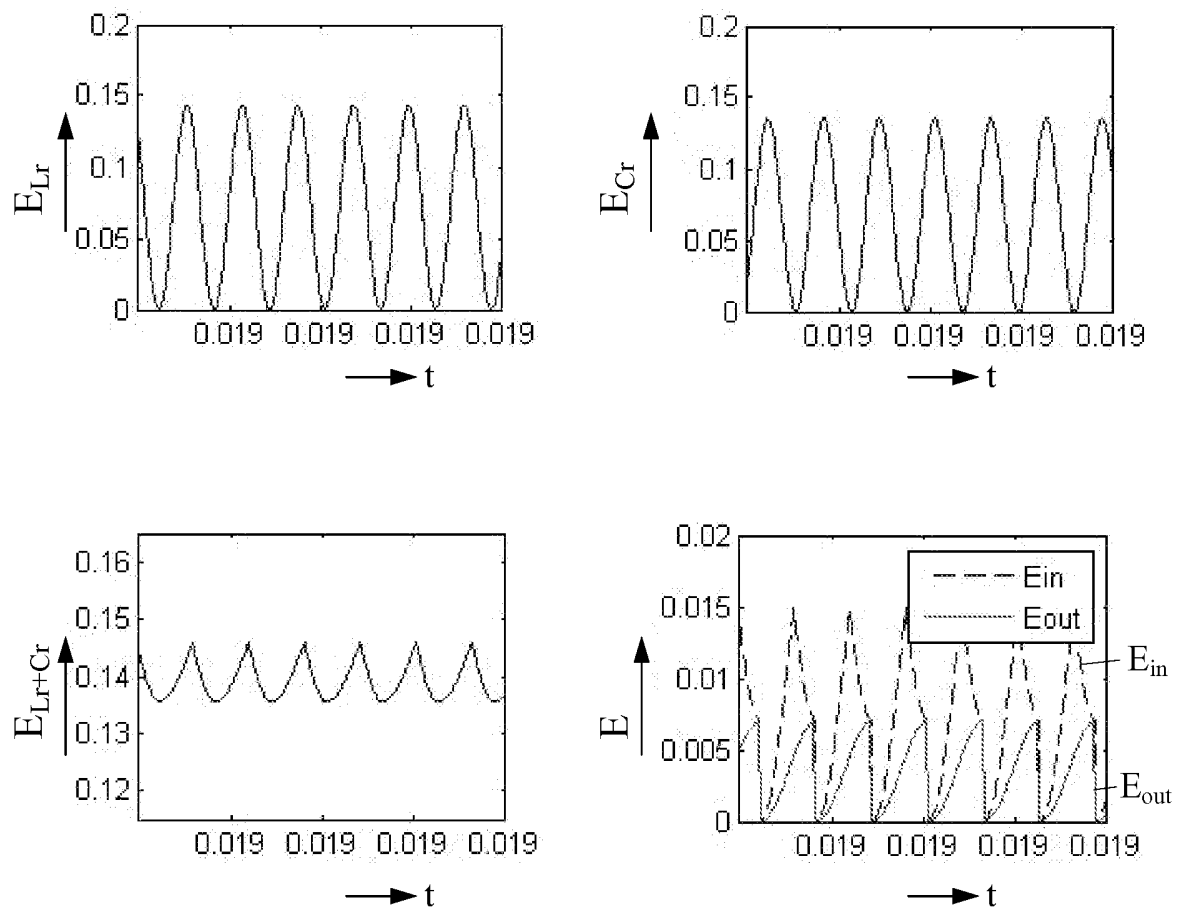


Fig. 6

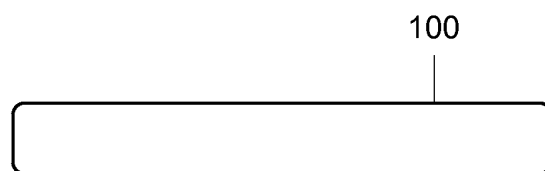


Fig. 7

SAMENWERKINGSVERDRAG (PCT)

RAPPORT BETREFFENDE NIEUWHEIDSONDERZOEK VAN INTERNATIONAAL TYPE

IDENTIFICATIE VAN DE NATIONALE AANVRAGE		KENMERK VAN DE AANVRAGER OF VAN DE GEMACHTIGDE	
		P89108NL00	
Nederlands aanvraag nr.		Indieningsdatum	
2003450		08-09-2009	
		Ingeroepen voorrangsdatum	
Aanvrager (Naam)			
Technische Universiteit Delft			
Datum van het verzoek voor een onderzoek van internationaal type		Door de Instantie voor Internationaal Onderzoek aan het verzoek voor een onderzoek van internationaal type toegekend nr.	
27-01-2010		SN 53562	
I. CLASSIFICATIE VAN HET ONDERWERP (bij toepassing van verschillende classificaties, alle classificatiesymbolen opgeven)			
Volgens de internationale classificatie (IPC)			
H02J5/00		H02M7/5387	
II. ONDERZOCHE GEBIEDEN VAN DE TECHNIEK			
Onderzochte minimumdocumentatie			
Classificatiesysteem	Classificatiesymbolen		
IPC8	H02J	H02M	
Onderzochte andere documentatie dan de minimum documentatie, voor zover dergelijke documenten in de onderzochte gebieden zijn opgenomen			
III.	☐	GEEN ONDERZOEK MOGELIJK VOOR BEPAALDE CONCLUSIES (opmerkingen op aanvullingsblad)	
IV.	☐	GEBREK AAN EENHEID VAN UITVINDING (opmerkingen op aanvullingsblad)	

**ONDERZOEKSRAPPORT BETREFFENDE HET
RESULTAAT VAN HET ONDERZOEK NAAR DE STAND
VAN DE TECHNIEK VAN HET INTERNATIONALE TYPE**

Nummer van het verzoek om een onderzoek naar
de stand van de techniek
NL 2003450

A. CLASSIFICATIE VAN HET ONDERWERP

INV. H02J5/00 H02M7/5387
ADD.

Volgens de Internationale Classificatie van octrooien (IPC) of zowel volgens de nationale classificatie als volgens de IPC.

B. ONDERZOCHETE GEBIEDEN VAN DE TECHNIEK

Onderzochte minimum documentatie (classificatie gevolgd door classificatiesymbolen)
H02J H02M

Onderzochte andere documentatie dan de minimum documentatie, voor dergelijke documenten, voor zover dergelijke documenten in de onderzochte gebieden zijn opgenomen

Tijdens het onderzoek geraadpleegde elektronische gegevensbestanden (naam van de gegevensbestanden en, waar uitvoerbaar, gebruikte trefwoorden)

EPO-Internal, COMPENDEX, INSPEC

C. VAN BELANG GEACHTE DOCUMENTEN

Categorie °	Geciteerde documenten, eventueel met aanduiding van speciaal van belang zijnde passages	Van belang voor conclusie nr.
X	VAN DER PIJL F F A ET AL: "Quantum Control for an Experimental Contactless Energy Transfer System for Multiple Users" POWER ELECTRONICS SPECIALISTS CONFERENCE, 2007. PESC 2007. IEEE, IEEE, PISCATAWAY, NJ, USA, 17 juni 2007 (2007-06-17), bladzijden 343-349, XP031218313 ISBN: 978-1-4244-0654-8 * het gehele document * ----- -/--	1-15

☒ Verdere documenten worden vermeld in het vervolg van vak C.

☐ Leden van dezelfde octrooifamilie zijn vermeld in een bijlage

*** Speciale categorieën van aangehaalde documenten**

A niet tot de categorie X of Y behorende literatuur die de stand van de techniek beschrijft

D in de octrooiaanvraag vermeld

E eerdere octrooi(aanvraag), gepubliceerd op of na de indieningsdatum, waarin dezelfde uitvinding wordt beschreven

L om andere redenen vermelde literatuur

O niet-schriftelijke stand van de techniek

P tussen de voorrangsdatum en de indieningsdatum gepubliceerde literatuur

T na de indieningsdatum of de voorrangsdatum gepubliceerde literatuur die niet bezwarend is voor de octrooiaanvraag, maar wordt vermeld ter verheldering van de theorie of het principe dat ten grondslag ligt aan de uitvinding

X de conclusie wordt als niet nieuw of niet inventief beschouwd ten opzichte van deze literatuur

Y de conclusie wordt als niet inventief beschouwd ten opzichte van de combinatie van deze literatuur met andere geciteerde literatuur van dezelfde categorie, waarbij de combinatie voor de vakman voor de hand liggend wordt geacht

Z lid van dezelfde octrooifamilie of overeenkomstige octrooipublicatie

Datum waarop het onderzoek naar de stand van de techniek van internationaal type werd voltooid

30 maart 2010

Verzenddatum van het rapport van het onderzoek naar de stand van de techniek van internationaal type

Naam en adres van de instantie

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

De bevoegde ambtenaar

Braccini, Roberto

**ONDERZOEKSRAPPORT BETREFFENDE HET
RESULTAAT VAN HET ONDERZOEK NAAR DE STAND
VAN DE TECHNIEK VAN HET INTERNATIONALE TYPE**

Nummer van het verzoek om een onderzoek naar
de stand van de techniek
NL 2003450

C.(Vervolg). VAN BELANG GEACHTTE DOCUMENTEN		
Categorie °	Geciteerde documenten, eventueel met aanduiding van speciaal van belang zijnde passages	Van belang voor conclusie nr.
X	FREDRIK F A VAN DER PIJL ET AL: "Design of an Inductive Contactless Power System for Multiple Users" THE 2006 IEEE INDUSTRY APPLICATIONS CONFERENCE FORTY-FIRST IAS ANNUAL MEETING, CONFERENCE RECORD OF, IEEE, PISCATAWAY, NJ, US, 1 oktober 2006 (2006-10-01), bladzijden 1876-1883, XP031026279 ISBN: 978-1-4244-0364-6 * het gehele document * -----	1-15
X,P	FREDRIK F A VAN DER PIJL ET AL: "Implementation of an adaptive sliding-mode control for a quantum series-resonant converter" POWER ELECTRONICS AND APPLICATIONS, 2009. EPE '09. 13TH EUROPEAN CONFERENCE ON, IEEE, PISCATAWAY, NJ, USA, 8 september 2009 (2009-09-08); bladzijden 1-10, XP031541387 ISBN: 978-1-4244-4432-8 * het gehele document * -----	1-15
X	CASTILLA M ET AL: "Dynamic response optimization of quantum series-parallel resonant converters using sliding mode control" POWER ELECTRONICS SPECIALISTS CONFERENCE, 2000. PESC 00. 2000 IEEE 31ST ANNUAL 18-23 JUNE 2000, PISCATAWAY, NJ, USA, IEEE, deel 2, 18 juni 2000 (2000-06-18), bladzijden 702-707, XP010518744 ISBN: 978-0-7803-5692-4 * het gehele document * -----	1-15
X	CASTILLA M ET AL: "A Comparative Study of Sliding-Mode Control Schemes for Quantum Series Resonant Inverters" IEEE TRANSACTIONS ON INDUSTRIAL ELECTRONICS, IEEE SERVICE CENTER, PISCATAWAY, NJ, USA, deel 52, nr. 9, 1 september 2009 (2009-09-01), bladzijden 3487-3495, XP011268832 ISSN: 0278-0046 * het gehele document * -----	1-15



OCTROOICENTRUM NEDERLAND

WRITTEN OPINION

File No. SN53562	Filing date (day/month/year) 08.09.2009	Priority date (day/month/year)	Application No. NL2003450
International Patent Classification (IPC) INV. H02J5/00 H02M7/5387			
Applicant Technische Universiteit Delft te Delft			

This opinion contains indications relating to the following items:

- ☒ Box No. I Basis of the opinion
- ☐ Box No. II Priority
- ☒ Box No. III Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- ☐ Box No. IV Lack of unity of invention
- ☐ Box No. V Reasoned statement with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- ☐ Box No. VI Certain documents cited
- ☐ Box No. VII Certain defects in the application
- ☒ Box No. VIII Certain observations on the application

	Examiner Braccini, Roberto
--	-------------------------------

WRITTEN OPINION

Application number
NL2003450

Box No. I Basis of this opinion

1. This opinion has been established on the basis of the latest set of claims filed before the start of the search.
2. With regard to any **nucleotide and/or amino acid sequence** disclosed in the application and necessary to the claimed invention, this opinion has been established on the basis of:
 - a. type of material:
 - ☐ a sequence listing
 - ☐ table(s) related to the sequence listing
 - b. format of material:
 - ☐ on paper
 - ☐ in electronic form
 - c. time of filing/furnishing:
 - ☐ contained in the application as filed.
 - ☐ filed together with the application in electronic form.
 - ☐ furnished subsequently for the purposes of search.
3. ☐ In addition, in the case that more than one version or copy of a sequence listing and/or table relating thereto has been filed or furnished, the required statements that the information in the subsequent or additional copies is identical to that in the application as filed or does not go beyond the application as filed, as appropriate, were furnished.
4. Additional comments:

WRITTEN OPINION

Application number
NL2003450

Box No. III Non-establishment of opinion with regard to novelty, inventive step and industrial applicability

The questions whether the claimed invention appears to be novel, to involve an inventive step, or to be industrially applicable have not been examined in respect of

☒ the entire application

☐ claims Nos. 1-15

because:

☐ the said application, or the said claims Nos. relate to the following subject matter which does not require a search (*specify*):

☒ the description, claims or drawings (*indicate particular elements below*) or said claims Nos. 1-15 are so unclear that no meaningful opinion could be formed (*specify*):

see separate sheet

☒ the claims, or said claims Nos. 1-15 are so inadequately supported by the description that no meaningful opinion could be formed (*specify*):

see separate sheet

☐ no search report has been established for the whole application or for said claims Nos.

☐ a meaningful opinion could not be formed as the sequence listing was either not available, or was not furnished in the international format (WIPO ST25).

☐ a meaningful opinion could not be formed without the tables related to the sequence listings; or such tables were not available in electronic form.

☒ See Supplemental Box for further details.

Box No. VIII Certain observations on the application

see separate sheet

Re Item III

Non-establishment of opinion with regard to novelty, inventive step and industrial applicability

- 1 Independent claims 1, 8 and 15 do not meet the requirement of clarity because the matter for which protection is sought is not clearly defined. The claim attempts to define the subject-matter in terms of the result to be achieved, which merely amounts to a statement of the underlying problem (determining an energy amount to be supplied based on information of energy in the resonant tank), without providing the technical features necessary for achieving this result.

In fact, the determination of the energy amount to be supplied to the load is merely defined by its non-specified dependency on a non-specified information of energy in the resonant tank and therefore amounts to a mere desideratum rather than stating in clear and concise manner the technical features necessary to define the subject-matter for which protection is sought.

- 2 Independently of the above reasoning, claims 1-15 are not supported by the description, as its scope is broader than justified by the description and drawings.

In particular, independent claims 1, 8 and 15 broadly define the above-mentioned feature in terms of an allowable desideratum.

However, the description and drawings convey the impression that this feature can only be carried out in a particular way, namely by means of equations (1) to (20), and no alternative means are envisaged.

Hence, claims 1, 8 and 15 are not supported by the description. The remaining dependent claims similarly contravene the requirement of clarity and support by the description.

- 3 Moreover, it is clear from the what is stated or implied in the description, that the features corresponding to equations (1)-(20) are essential to the definition of the invention. Since independent claims 1, 8 and 15 do not contain these features, they do not meet the requirement of clarity that any independent claim must contain all the technical features essential to the definition of the invention.

- 4 The vague and imprecise statement in the description on page 16, lines 17-19, implies that the subject-matter for which protection is sought may be different to that defined by the claims, thereby resulting in lack of clarity when used to interpret them.
- 5 In view of the above unclarities, it is not at present practicable to carry out a full examination of the application particularly regarding novelty and inventive step.
- 6 However, the attention of the applicant is drawn to the fact that, in view of their broad formulation, the subject-matter of claims 1 and 8 is deprived of novelty by any of the documents cited in the search report, each showing a control method for a resonant converter, wherein control is carried out at least based on information of energy in the resonant tank (e.g. resonant current).

Re Item VIII

Certain observations on the application

- 7 The passage at page 10, lines 21-22 of the description mentions an "Appendix 1" which does not exist or at least does not form part the application documents as originally filed.