

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 200135063 B2
(10) Patent No. 754356

(54) Title
Apparatus and method for measurement of communication quality in CDMA system

(51)⁷ International Patent Classification(s)
H04L 001/20 H04J 013/02
H04B 007/216 H04Q 007/22

(21) Application No: **200135063**

(22) Application Date: **2001.04.06**

(30) Priority Data

(31) Number	(32) Date	(33) Country
2000-105485	2000.04.06	JP
2000-105486	2000.04.06	JP
2001-53033	2001.02.27	JP

(43) Publication Date : **2001.10.11**

(43) Publication Journal Date : **2001.10.11**

(44) Accepted Journal Date : **2002.11.14**

(71) Applicant(s)
NTT DoCoMo, Inc.

(72) Inventor(s)
Tetsuro Imai; Shinichi Mori

(74) Agent/Attorney
SPRUSON and FERGUSON,GPO Box 3898,SYDNEY NSW 2001

(56) Related Art
EP 907259

APPARATUS AND METHOD FOR MEASUREMENT OF COMMUNICATION QUALITY IN CDMA SYSTEM

Abstract

5

In order to perform synchronization detection with high speed, high precision and high reliability and to measure communication quality (propagation characteristics) at high precision and high efficiency, a mobile station (202) includes synchronization detecting portion (221) for detecting synchronization chip timing of channel to be measured, a synchronization chip timing information portion (225) accumulating information of detected synchronization chip timing, a correlation detecting portion (222) deriving a correlation value between spreading code of the channel to be measured and a received signal for performing communication with a base station (201) and measurement of communication quality with taking the detected synchronization chip timing as a reception chip timing, a time series generating portion (223) for generating a time series data of received signal vector after correlation detection, and a communication quality calculating portion (224) for calculating communication quality from generated time series data.

10

15

AUSTRALIA

PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

ORIGINAL

Name and Address of Applicant :	NTT DoCoMo, Inc. 11-1, Nagatacho 2-chome Chiyoda-ku Tokyo 100-6150 Japan
Actual Inventor(s):	Tetsuro Imai, Shinichi Mori
Address for Service:	Spruson & Ferguson St Martins Tower, Level 35 31 Market Street Sydney NSW 2000
Invention Title:	Apparatus and Method for Measurement of Communication Quality in CDMA System

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

IP Australia

Documents received on:

- 6 APR 2001

Batch No:

Sydney

APPARATUS AND METHOD FOR MEASUREMENT OF COMMUNICATION QUALITY
IN CDMA SYSTEM

This application is based on Patent Application Nos. 2000-105485 filed April 6, 2000, 2000-105486 filed April 6, 2000 and 2001-53033 February 27, 2001 in Japan, the content of which is incorporated hereinto by reference.

5

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

10 The present invention relates generally to a method and an apparatus for measurement of communication quality in a mobile communication system using a CDMA cellular system. More particularly, the invention relates to a method and an apparatus for measuring desired signal power, interference signal power, SIR and propagation paths
15 between transmitter and receiver, as communication quality. Also the invention relates to a method and a system for detection of synchronization suitable for measuring communication quality using channels spread by
20 relatively long known spreading code constantly transmitted by installed base stations.

DESCRIPTION OF THE RELATED ART

25 In CDMA cellular system, it is required to detect a synchronization chip timing of a channel to measure, namely a reception chip timing in conventional measurement

of communication quality (propagation characteristics). It should be noted that the reception chip timing is premised to match with a position of a path between transmitter and receiver in time effective for

5 communication. Next, for setting a correlation detector called as finger for the reception chip timing for deriving a received signal vector in the reception chip timing from a correlation value.

Fig. 1 shows a process for deriving a desired signal power and an interference signal power. The signal vector set forth above is a sum of the desired signal and the interference signal. Therefore, a received signal vector obtained within a certain given period (normally about 3 to 5 symbols) is summed and averaged to take obtained vector as a desired signal vector. The desired signal power is derived as a power of the desired signal vector. The interference signal vector is derived from a variance of the received signal vector with taking the desired signal vector as reference. Here, the chip length to be used in correlation is referred to as one symbol.

Effective paths between transmitter and receiver presents in about three to five paths in urban area in general (here, chip rate is about 4 Mcps). Accordingly, in order to obtain the desired signal power, the interference signal power and SIR for all of the effective paths, corresponding number of fingers are required to be not effective. On the other hand, vector averaging is

included during process of measurement, it is essential that the symbol to be used for averaging is "a symbol which can be regarded to have the same phase of the desired signal vector". Normally, the symbol continuous in time is used.

5 However, the condition is different when a transmit diversity is applied to the channel to be measured.

For example, when the channel to be measured is taken as a common pilot channel when the transmit diversity is applied, at first, the received signal vector after
10 correlation detection is added and subtracted by preceding and following symbols to separate into received signal vector per each transmission antenna. Next, the desired signal power and the interference signal power are derived by performing the foregoing calculation per each received
15 signal vector. By combining the desired signal power and the interference signal power obtained for each transmission antenna, the desired signal power and the interference signal power upon use of the transmit diversity is derived.

20 During this process, the received signal vector for each transmission antenna can be obtained only at every two symbol period. Accordingly, number of samples to be used in averaging, namely number of received signal vectors, becomes smaller in comparison with the case where
25 the transmit diversity is not applied, to degrade measurement precision for each transmission antenna. When number of samples is set to be the same number as that

when the transmit diversity is not applied, phase variation of the desired signal vector due to fading becomes not ignorable. Naturally, the measurement precision for each transmission antenna is lowered, the
5 measurement precision after final combination is also lowered.

On the other hand, when a measurement system is installed on a mobile measurement vehicle for measuring communication quality while moving, the path position
10 between transmitter and receiver is moved per each path according to movement of the mobile measurement vehicle. Accordingly, upon measuring, detection of reception chip timing has to be constantly performed and position of the
finger has to be updated. When updating speed is low
15 relative to movement of the path, the reception chip timing and path position can be offset. Therefore, obtained measured value cannot be correct.

As a method for detection of synchronization chip timing, namely a method that the mobile equipment detects
20 of synchronization with the connecting base station at a preceding stage to perform measurement of communication quality, so-called 3-step cell search method is used in a wide band CDMA (hereinafter referred to as W-CDMA) cellular system. More particularly, so-called 3-step
25 cell search method is a method performing detection of synchronization using three channels of PSCH (Primary Synchronization CHannel), SSCH (Secondary

Synchronization CHannel), CPICH (Common Pilot CHannel) transmitted from the base station. A cause why three channels are used by the 3-step cell search method is that the code of the channel transmitted from the base station
5 (scrambling code) is unknown.

However, in measurement system or the like, in which the base station as object for measurement (objective scrambling code), the 3-step cell search method cannot be effective synchronization detection method. For example,
10 when CPICH transmitted from the base station is used as channel to be measured, detection of synchronization may be performed by using only scrambling code, in which CPICH of the base station as object for measurement is spread.

On the other hand, when it is not necessary to perform
15 communication between the base station and the mobile equipment immediately after detection of synchronization and when the synchronization chip timing may be determined with a certain range, complete synchronization detection is not required. Furthermore, it is possible to perform
20 measurement of a service area by installing pseudo base station in advance of actual installation of the base station. In such case, it is not efficient to transmit three channels corresponding PSCH, SSCH and CPICH by the pseudo base station for measurement.

25 By the conventional method, for measuring communication quality (propagation characteristics) at high precision, correlation detectors called as fingers

are provided in number corresponding to number of the paths,
and installation position of each finger (reception chip
timing) has to be certainly matched with the position of
the path. Also, it is not efficient for constraint
5 condition for number of samples and sampling interval upon
deriving the desired signal power, the interference signal
power in each reception chip timing.

On the other hand, it is not efficient in that number
of samples and sampling interval are different depending
10 upon whether transmit diversity is applied or not.

Furthermore, in the conventional method, upon
performing detection of synchronization of the channel to
be measured, channel other than the channel to be measured
is required to be inefficient.

15

SUMMARY OF THE INVENTION

The present invention has been worked out the
problems set forth above. It is therefore an object of
20 the present invention is to provide a communication
quality measuring method and an apparatus for measurement
of communication quality (propagation characteristics)
with high precision and high efficiency by taking all chip
timing in a range set at a reception chip timing detected
25 in a preliminary step of measurement, and generating two
time series having several period of time difference from
a received signal vector of the same chip timing obtained

within a certain given period.

According to a 1st aspect of the invention, the communication quality

measuring method in CDMA cellular system detecting a
reception chip timing of a channel to be measured and
15 measuring communication quality, comprises: time series
generating step of generating two series of data consisted
of a time series data of a detected value and a time series
data delayed for one, two or more periods, with respect
to the reception chip timing where the detected value
20 becomes the same; matrix calculation step of deriving
covariant matrix of the two series data generated in the
time series generating step; first power calculating step
of deriving a desired signal power and an interference
signal power in the reception chip timing from eigenvalues
25 of the covariant matrix; and SIR calculating step deriving
a SIR at the reception chip timing from the desired signal
power and the interference signal power. With this method,

the desired signal power, the interference signal power and SIR can be measured without restriction of sample number and sampling interval in series.

According to a 2nd aspect of the invention, a communication
5 quality measuring method in CDMA cellular system detecting
a reception chip timing of a channel to be measured and
measuring communication quality, comprising: time series
generating step of generating two series of data consisted
of a time series data of a detected value and a time series
10 data delayed for one, two or more periods, with respect
to the reception chip timing where the detected value
becomes the same; adding step of deriving an add vector
from addition of received signal vector between two points
close in reception timing when the two series data
15 generated in the time series generating step becomes a
particular correlation value; subtracting step of
deriving a difference vector from a difference of received
signal vectors between two points close in reception
timing; second power calculation step of deriving a
20 desired signal power and an interference signal power by
averaging the add vectors and the difference vectors; and
SIR calculating step deriving a SIR at the reception chip
timing from the desired signal power and the interference
signal power. With this method, the desired signal power,
25 the interference signal power and SIR can be simply and
precisely measured without restriction of sample number
and sampling interval in series.

According to a 3rd aspect of the invention, in the 1st and 2nd invention, a communication quality measuring method in CDMA cellular system further comprises third power calculation step of deriving an averaged desired signal power and an averaged interference signal power by performing averaging in a given period from the desired signal power and the interference signal power obtained in a first power calculation step and the second power calculation step, and in the SIR calculation step, the SIR is derived from the averaged desired signal power and the averaged interference signal power.

According to a 4th aspect of the invention, in the 1st and 2nd invention, when the channel to be measured is plural and only one correlation detector is useful, correlation detection of a plurality of channels are performed in time division for generating two series generated in the same reception chip timing per channel.

According to a 5th aspect of the invention, in the 4th invention, a communication quality measuring method in CDMA cellular system further comprises fourth power calculation step of deriving an averaged desired signal power and an averaged interference signal power by averaging a given period from the desired signal power and the interference signal power obtained in the first power calculation step and a second power calculation step, and in the SIR calculation step, the SIR is derived from the averaged desired signal power and the averaged interference signal power.

According to a 6th aspect of the invention, in the 3rd invention, when the channel to be measured is plural and only one correlation detector is useful, in the third power calculating step, the averaged desired signal power and the average interference signal power are derived in time division, and in the SIR calculation step, the SIR of a plurality of channels are derived in time division.

According to a 7th aspect of the invention, in the 1st and 2nd invention, the communication quality measuring method in CDMA cellular system further comprises path detection step of deriving paths of transmitter and receiver to be effective for communication from a value of the SIR obtained in the SIR calculation step. With this method, judgment whether the measured reception chip timing from the measured based on the value of measured SIR matches the position of the path effective for communication, or not, is facilitated. On the other hand, when all chip timing in the measurement window including the detected reception chip timing are taken as object for measurement, effective path can be derived from the value of SIR of each chip.

According to an 8th aspect of the invention, a communication quality measuring apparatus in CDMA cellular system detecting a reception chip timing of a channel to be measured and measuring communication quality, comprising: time series generating means for generating two series of data consisted of a time series data of a detected value

and a time series data delayed for one, two or more periods,
with respect to the reception chip timing where the
detected value becomes the same; matrix calculation means
for deriving covariant matrix of the two series data
5 generated in the time series generating means; first power
calculating means for deriving a desired signal power and
an interference signal power in the reception chip timing
from eigenvalues of the covariant matrix; and SIR
calculating means deriving a SIR at the reception chip
10 timing from the desired signal power and the interference
signal power. With this method, the desired signal power,
the interference signal power and SIR can be measured
without restriction of sample number and sampling interval
in series.

15 According to a 9th aspect of the invention, a communication
quality measuring apparatus in CDMA cellular system
detecting a reception chip timing of a channel to be
measured and measuring communication quality, comprises:
time series generating means for generating two series of
20 data consisted of a time series data of a detected value
and a time series data delayed for one, two or more periods,
with respect to the reception chip timing where the
detected value becomes the same; adding means for deriving
an add vector from addition of received signal vector
25 between two points close in reception timing when the two
series data generated in the time series generating means
becomes a particular correlation value; subtracting means

for deriving a difference vector from a difference of received signal vectors between two points close in reception timing; second power calculation means for deriving a desired signal power and an interference signal power by averaging the add vectors and the difference vectors; and SIR calculating means deriving a SIR at the reception chip timing from the desired signal power and the interference signal power. With this method, the desired signal power, the interference signal power and SIR can be simply and precisely measured without restriction of sample number and sampling interval in series.

According to a 10th aspect of the invention, in 8th or 9th invention, the communication quality measuring apparatus in CDMA cellular system further comprises third power calculation means for deriving an averaged desired signal power and an averaged interference signal power by performing averaging in a given period from the desired signal power and the interference signal power obtained in the first power calculation means and a second power calculation means.

According to an 11th aspect of the invention, in 8th or 9th invention, when the channel to be measured is plural and only one correlation detector is useful, the time series generating means derives the averaged desired signal power and the average interference signal power in time division, and the SIR calculation means derives the SIR of a plurality

of channels in time division.

According to a 12th aspect of the invention, in the 11th invention, the communication quality measuring apparatus in CDMA cellular system further comprises fourth power calculation means for deriving an averaged desired signal power and an averaged interference signal power by averaging a given period from the desired signal power and the interference signal power obtained in the first power calculation means and a second power calculation means.

10 According to a 13th aspect of the invention, in the 10th invention, the communication quality measuring apparatus in CDMA cellular system comprises third power calculation means for deriving an averaged desired signal power and an averaged interference signal power by performing averaging in a given period from the desired signal power and the interference signal power obtained in a first power calculation means and the second power calculation means.

According to a 14th aspect of the invention, the communication quality measuring apparatus in CDMA cellular system further comprises path detection means for deriving paths between transmitter and receiver to be effective for communication from a value of the SIR obtained in the SIR calculation means. With this construction, judgment can be done easily whether the reception chip timing measured from the value of the measured SIR matches with the position of the path effective for communication or not. Also, when all chip timing in the measurement window including the

detected reception chip timing is taken as object for measurement, effective paths can be derived from the value of SIR of each chip.

According to a 15th aspect of the invention, a communication
5 quality measuring method detecting reception chip timing
of channel to be measured repeatedly transmitted a
transmission symbol series of a known pattern and
performing measurement of communication quality,
comprises: correlation detection step of performing
10 correlation detection of received signal using a code
series spreading the channel to be measured; delay step
of delaying one of received series detected in the
correlation detection step for one, two or more symbol
period within a range where mutual correlation between
15 transmission symbol series is 1 and influence of a
propagation path can be regarded as the same; vector
calculation step of calculating difference vector and add
vector from difference value and add value of respective
received signal vectors of the same reception chip timing
20 in the other received series detected by the correlation
detection step and the received series provided delay in
the delay step; and communication quality calculation step
of calculating a desired signal power, an interference
signal power and SIR from the difference vector and the
25 add vector calculated in the vector calculation step.
With this method, by providing a time difference within
a range where the correlation between the transmission

symbol series is 1 and influence of the propagation path can be regarded as the same, the desired signal power, the interference signal power and SIR can be simply and precisely measured.

- 5 According to a 16th aspect of the invention, a communication quality measuring method detecting reception chip timing of channel to be measured repeatedly transmitted transmission symbol series of respectively different known pattern using common spreading code from different
- 10 antennas upon use of transmit diversity and performing measurement of communication quality, comprises:
- correlation detection step of performing correlation detection of received signal using a code series spreading the channel to be measured; delay step of delaying one of
- 15 received series detected in the correlation detection step for one, two or more symbol period within a range where mutual correlation between transmission symbol series in the different antennas is 1 and influence of a propagation path can be regarded as the same; vector calculation step
- 20 of calculating difference vector and add vector from difference value and add value of respective received signal vectors of the same reception chip timing in the other received series detected by the correlation
- 25 detection step and the received series provided delay in the delay step; and communication quality calculation step of calculating a desired signal power, an interference signal power and SIR from the difference vector and the

add vector calculated in the vector calculation step.
With this method, the desired signal power, the
interference signal power and SIR of the channel to be
measured and applying the transmit diversity, can be
5 measured precisely and easily.

According to a 17th aspect of the invention, in the 15th
invention, the communication quality measuring apparatus
further comprises vector selection step of selecting only
result of calculation at the same reception chip timing
10 of received symbol matching respective transmission
symbols of the different antenna among difference vector
and add vector calculated in the vector calculation step
when a mutual correlation between transmission symbol
series is smaller than one.

15 According to an 18th aspect of the invention, in the 16th
invention, the communication quality measuring apparatus
further comprises vector selection step of selecting only
result of calculation at the same reception chip timing
of received symbol matching respective transmission
20 symbols of the different antenna among difference vector
and add vector calculated in the vector calculation step
when a mutual correlation between transmission symbol
series in the different antenna is smaller than one.

According to a 19th aspect of the invention, a communication
25 quality measuring apparatus detecting reception chip
timing of channel to be measured repeatedly transmitted
a transmission symbol series of a known pattern and

performing measurement of communication quality,
comprises: correlation detection means for performing
correlation detection of received signal using a code
series spreading the channel to be measured; delay means
5 for delaying one of received series detected in the
correlation detection step for one, two or more symbol
period within a range where mutual correlation between
transmission symbol series is 1 and influence of a
propagation path can be regarded as the same; vector
10 calculation means for calculating difference vector and
add vector from difference value and add value of
respective received signal vectors of the same reception
chip timing in the other received series detected by the
correlation detection step and the received series
15 provided delay in the delay step; and communication
quality calculation means for calculating a desired signal
power, an interference signal power and SIR from the
difference vector and the add vector calculated in the
vector calculation step. With this method, by providing
20 a time difference within a range where the correlation
between the transmission symbol series is 1 and influence
of the propagation path can be regarded as the same, the
desired signal power, the interference signal power and
SIR can be simply and precisely measured.

25 According to a 20th aspect of the invention, a communication
quality measuring apparatus detecting reception chip
timing of channel to be measured repeatedly transmitted

transmission symbol series of respectively different known pattern using common spreading code from different antennas upon use of transmit diversity and performing measurement of communication quality, comprises:

- 5 correlation detection means for performing correlation detection of received signal using a code series spreading the channel to be measured; delay means for delaying one of received series detected in the correlation detection step for one, two or more symbol period within a range where
- 10 mutual correlation between transmission symbol series in the different antennas is 1 and influence of a propagation path can be regarded as the same; vector calculation means for calculating difference vector and add vector from difference value and add value of respective received
- 15 signal vectors of the same reception chip timing in the other received series detected by the correlation detection step and the received series provided delay in the delay step; and communication calculation quality means for calculating a desired signal power, an
- 20 interference signal power and SIR from the difference vector and the add vector calculated in the vector calculation step. With this method, the desired signal power, the interference signal power and SIR can be measured more precisely. With this method, the desired
- 25 signal power, the interference signal power and SIR of the channel to be measured and applying the transmit diversity, can be measured precisely and easily.

According to a 21st aspect of the invention, in the 19th invention, the communication quality measuring apparatus further comprises vector selection means for selecting only result of calculation at the same reception chip
5 timing of received symbol matching respective transmission symbols of the different antenna among difference vector and add vector calculated in the vector calculation step when a mutual correlation between transmission symbol series is smaller than one. With this
10 construction, the desired signal power, the interference signal power and SIR can be measured more precisely.

According to a 22nd aspect of the invention, in the 19th invention, the communication quality measuring apparatus further comprises vector selection means for selecting
15 only result of calculation at the same reception chip timing of received symbol matching respective transmission symbols of the different antenna among difference vector and add vector calculated in the vector calculation step when a mutual correlation between
20 transmission symbol series in the different antenna is smaller than one. With this construction, the desired signal power, the interference signal power and SIR can be measured more precisely. With this construction, the desired signal power, the interference signal power and
25 SIR can be measured more precisely.

According to a 23rd aspect of the invention, for measuring communication quality in a mobile receiving station in a

mobile communication system employing a CDMA cellular system, using channel spread with spreading code and constantly transmitted from a base station, a synchronization detecting method in CDMA cellular system
5 comprises the step of: in the mobile receiving station, determining a synchronization chip timing of a channel to be measured by detecting partial correlation value between spreading code to be measured and a received signal. With this method, since the partial correlation value is
10 derived between the spreading code of the channel to be measured and the received signal, three channels are not required for synchronization detection.

According to a 24th aspect of the invention, in the 23rd invention, a matched filter is used upon detection of the
15 partial correlation value and a synchronization chip timing of the channel to be measured is detected by sequentially rewriting the code in the matched filter. With this method, synchronization detection using the partial correlation value can be performed at high speed,
20 high precision and high reliability.

According to a 25th aspect of the invention, in the 23rd and 24th inventions, an averaging period and sampling period are preliminarily set in advance of performing the synchronization detection, and the synchronization chip
25 timing of the channel to be measured is determined on the basis of a value derived by averaging of detected plurality of partial correlation values in the averaging period by

detecting the partial detection values per set sampling period.

According to a 26th aspect of the invention, in the 25th invention, upon averaging process of the detected plurality of partial correlation values, the synchronization chip timing of the channel to be measured is determined using an averaged value by preliminarily calculating the averaged value by power averaging process or vector averaging process.

10 According to a 27th aspect of the invention, in the 26th invention, the synchronization chip timing of the channel to be measured is determined by enabling setting of process of the averaging process for a plurality of times and using the averaged value derived by a plurality of times of averaging process by the same or different averaging method in each process.

According to a 28th aspect of the invention, the steps of performing synchronization chip timing detection process for a plurality of times as defined in any one of 23rd to 20 27th, and making judgment whether synchronization chip timing of a channel to be measured is to be determined using an average value of a plurality of timing value and a standard deviation value, the synchronization chip timing of the channel to be measured is determined with providing 25 a given range, or synchronization detection is to be performed again. With this method, correctness of the detected synchronization chip timing can be easily judged.

Also, upon performing measurement of communication quality using the measurement window, position and width of the window can be determined.

According to a 29th aspect of the invention, for measuring
5 communication quality in a mobile receiving station in a mobile communication system employing a CDMA cellular system, using channel spread with spreading code and constantly transmitted from a base station, a synchronization detecting device in CDMA cellular system
10 comprises: the mobile receiving station including means for determining a synchronization chip timing of a channel to be measured by detecting partial correlation value between spreading code to be measured and a received signal. With this method, since the partial correlation value is
15 derived between the spreading code of the channel to be measured and the received signal, three channels are not required for synchronization detection.

According to a 30th aspect of the invention, in the 29th invention, the means includes a matched filter is used upon
20 detection of the partial correlation value and a synchronization chip timing of the channel to be measured is detected by sequentially rewriting the code in the matched filter. With this construction, synchronization detection using partial correlation can be performed at
25 high speed, high precision and high reliability.

According to a 31st aspect of the invention, the 29th and 30th inventions, the means preliminarily sets an averaging

period and sampling period in advance of performing the synchronization detection, and determines the synchronization chip timing of the channel to be measured on the basis of a value derived by averaging of detected plurality of partial correlation values in the averaging period by detecting the partial detection values per set sampling period.

According to a 32nd aspect of the invention, in the 31st invention, upon averaging process of the detected plurality of partial correlation values, the means determines the synchronization chip timing of the channel to be measured using an averaged value by preliminarily calculating the averaged value by power averaging process or vector averaging process.

According to a 33rd aspect of the invention, in the 32nd invention, the means determines the synchronization chip timing of the channel to be measured by enabling setting of process of said averaging process for a plurality of times and using the averaged value derived by a plurality of times of averaging process by the same or different averaging device in each process.

According to a 34th aspect of the invention, a synchronization detecting device in CDMA cellular system comprises means for performing synchronization chip timing detection process for a plurality of times as defined in any one of the 29th to 33rd inventions, and making judgment whether synchronization chip timing of a channel to be measured

is to be determined using an average value of a plurality of timing value and a standard deviation value, the synchronization chip timing of the channel to be measured is determined with providing a given range, or

5 synchronization detection is to be performed again. With this method, correctness of the detected synchronization chip timing can be easily judged. Also, upon performing measurement of communication quality using the measurement window, position and width of the window can
10 be determined.

According to a 35th aspect of the invention, in a mobile communication system employing CDMA cellular system using a common pilot channel constantly transmitted from a base station in a mobile communication system upon use of
15 transmit diversity for measuring communication quality in a mobile station being measured, a synchronization detecting device comprises: the mobile station separating received signal vector obtained by correlation detection of received signal per symbol into received
20 signal vector per transmission antenna by performing addition and subtraction before and after symbol, and determining synchronization chip timing on the basis of a value derived by addition of the received signal vector in power. With this method, since the partial correlation
25 value is derived between the spreading code of the channel to be measured and the received signal, three channels are not required for synchronization detection.

According to a 36th aspect of the invention, in the 35 invention,
the synchronization chip timing is determined on the basis
of a value derived by addition of an average vector derived
by averaging received signal vector per each of a plurality
5 transmission antenna obtained over a plurality of period
with taking a unit where symbol pattern of signals
transmitted from a plurality of transmission antenna
becomes orthogonal between antennas.

According to a 37th aspect of the invention, synchronization
10 detecting method in CDMA system determining
synchronization chip timing on the basis of a value derived
by performing synchronization chip timing detection
process defined in 35th or 36th invention for a plurality
of times and performing addition of obtained plurality of
15 powers.

According to a 38th aspect of the invention, in a mobile
communication system employing CDMA cellular system using
a common pilot channel constantly transmitted from a base
station in a mobile communication system upon use of
20 transmit diversity for measuring communication quality in
a mobile station being measured, a synchronization
detecting device comprises: the mobile station separating
received signal vector per separating received signal
vector obtained by detecting correlation per symbol by
25 performing addition and subtraction before and after
symbol, and determining synchronization chip timing on the
basis of a value derived by addition of the received signal

vector in power. With this method, since the partial correlation value is derived between the spreading code of the channel to be measured and the received signal, three channels are not required for synchronization detection.

5 According to a 39th aspect of the invention, in the 38th invention, the means determines the synchronization chip timing on the basis of a value derived by addition of an average vector derived by averaging received signal vector per each of a plurality transmission antenna obtained over
10 a plurality of period with taking a unit where symbol pattern of signals transmitted from a plurality of transmission antenna becomes orthogonal between antennas.

 According to a 40th aspect of the invention, a synchronization detecting device in CDMA system determining
15 synchronization chip timing on the basis of a value derived by performing synchronization chip timing detection process defined in 38th or 39th inventions for a plurality of times and performing addition of obtained plurality of power.

20 According to a 41st aspect of the invention, in a mobile communication system employing CDMA cellular system using a common pilot channel constantly transmitted from a base station in a mobile communication system upon use of transmit diversity for measuring communication quality in
25 a mobile station being measured, a communication quality measuring method comprises: in the mobile station, received signal vector obtained by correlation detection

of received signal per symbol being separated into received signal vector per transmission antenna by performing addition and subtraction before and after symbol, and a desired signal power, an interference signal power and SIR being calculated by deriving add vector and difference vector of two received signal vectors spaced for a plurality of symbol periods per transmission antenna, and performing averaging process of the add vector and the difference vector. With this method, when the symbol period for deriving the add vector and the difference vector at two symbols, when the phase variation of the desired signal vector due to fading within the two symbol period can be ignored, measuring precision can be improved in proportion to sample number.

According to a 42nd aspect of the invention, in the 41st invention, the add vector and the difference vector are derived from the received signal vector of one transmission antenna and the desired signal power, the interference signal power and SIR are derived by adding a predetermined correction value.

According to a 43rd aspect of the invention, in the 42nd invention, the desired signal power and the interference signal power are averaged, and the desired signal power, the interference signal power and SIR are calculated by adding a predetermined correction value.

According to a 44th aspect of the invention, in a mobile communication system employing CDMA cellular system using

a common pilot channel constantly transmitted from a base station in a mobile communication system upon use of transmit diversity for measuring communication quality in a mobile station being measured, a communication quality measuring apparatus comprising: the mobile station includes means for receiving received signal vector obtained by correlation detection of received signal per symbol being separated into received signal vector per transmission antenna by performing addition and subtraction before and after symbol, and calculating a desired signal power, an interference signal power and SIR by deriving add vector and difference vector of two received signal vectors spaced for a plurality of symbol periods per transmission antenna, and performing averaging process of the add vector and the difference vector. With this method, when the symbol period for deriving the add vector and the difference vector at two symbols, when the phase variation of the desired signal vector due to fading within the two symbol period can be ignored, measuring precision can be improved in proportion to sample number.

According to a 45th aspect of the invention, in the 44th invention, the means derives the add vector and the difference vector from the received signal vector of one transmission antenna and derives the desired signal power, the interference signal power and SIR by adding a predetermined correction value.

According to a 46th aspect of the invention, in the 45th invention, the means averages the desired signal power and the interference signal power, and calculates the desired signal power, the interference signal power and SIR by adding a predetermined correction value.

As set forth above,

the communication quality (propagation characteristics) can be measured with high precision by generating the time series data of the received signal vector at the same reception chip timing obtained in certain given period and the time series data shifted the data in time for several periods. Also, by performing communication quality measurement using the measurement window, without depending upon variation of the path between transmitter and receiver (number and position) to be caused in actual environment, moving measurement of the communication quality at high precision and high efficiency becomes possible and path number and positions thereof can also be measured accurately.

On the other hand, since only channel to be measured is used, synchronization detection for measurement can be done at high speed, high precision and high reliability. Also, in case of synchronization detection under the premise of communication quality measurement using the measurement window, only position and window width of the measurement window is required. Thus, complete synchronization

detection is not required.

Furthermore,
even when transmit diversity is applied, synchronization
detection at high speed, high precision and high
5 reliability. Also, measurement of the communication
quality at high precision can be done at high speed and
high efficiency.

The above effects, features and
advantages of the present invention will become more
10 apparent from the following description of embodiments
thereof taken in conjunction with the accompanying
drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

15

Fig. 1 is an illustration showing a process for
deriving a desired signal power and an interference signal
power;

Fig. 2 is a block diagram showing an overall
20 construction of a W-CDMA type mobile communication system,
to which the present invention is applied;

Fig. 3 is an illustration showing a frame
construction of CPICH;

Fig. 4 is an illustration showing a principle of
25 operation of the first embodiment of a synchronization
detecting method according to the present invention;

Fig. 5 is an explanatory illustration of an operation

in the case when a matched filter is used in a correlation detecting portion of a mobile station, to which the present invention is applied;

Fig. 6 is an illustration showing a principle of operation of the second embodiment of the synchronization detecting method according to the present invention;

Fig. 7 is an illustration showing the case where a power averaging process as an equalizing process in the second embodiment of the synchronization detection method;

Fig. 8 is an illustration showing a received signal power distribution after power averaging process as the equalizing process;

Fig. 9 is a flowchart showing a synchronization chip timing detection procedure by the power averaging process;

Fig. 10 is an illustration of the case where vector averaging process is performed as equalizing process in the second embodiment of the synchronization detecting method;

Fig. 11 is an illustration showing a distribution after performing vector averaging process as equalizing process;

Fig. 12 is a flowchart showing a synchronization chip timing detection procedure by the vector averaging process;

Fig. 13 is an illustration showing a principle of operation of the third embodiment of a synchronization

detecting method according to the present invention;

Fig. 14 is a flowchart showing a synchronization chip timing detection procedure in the third embodiment of the synchronization detecting method;

5 Fig. 15 is an illustration showing a principle of operation of the fourth embodiment of a synchronization detecting method according to the present invention;

Fig. 16 is an illustration showing a frame structure of CPICH and the received signal in the case where a
10 transmit diversity is applied;

Fig. 17 is an illustration showing a principle of operation of the fifth embodiment of a synchronization detecting method according to the present invention;

Fig. 18 is a flowchart showing a synchronization chip
15 timing detection procedure in the sixth embodiment of the synchronization detecting method;

Fig. 19 is a block diagram showing an overall construction of the mobile station, to which the present invention is applied;

20 Fig. 20 is an illustration showing a principle of operation of the first embodiment of a communication quality measuring method according to the present invention;

Fig. 21 is an illustration showing a principle of
25 operation of the second embodiment of a communication quality measuring method according to the present invention;

Fig. 22 is an illustration showing a result of simulation in the second embodiment of the communication quality measuring method;

Fig. 23 is an illustration showing a principle of operation of the third embodiment of a communication quality measuring method according to the present invention;

Fig. 24 is an illustration showing a result of simulation in the third embodiment of the communication quality measuring method;

Fig. 25 is an illustration showing a principle of operation of the fourth embodiment of a communication quality measuring method according to the present invention;

Fig. 26 is an illustration showing a principle of operation of the fifth embodiment of a communication quality measuring method according to the present invention;

Fig. 27 is an illustration showing a principle of operation of the sixth embodiment of a communication quality measuring method according to the present invention;

Figs. 28A and 28B are illustrations showing a result of simulation in the fifth embodiment of the communication quality measuring method;

Fig. 29 is a block diagram showing an overall construction of a mobile communication system applying

transmit diversity;

Fig. 30 is an illustration for explaining process for explaining correlation detection process in one embodiment of the present invention;

5 Fig. 31 is an illustration for explaining a correlation detection process in one embodiment of the present invention;

Fig. 32 is an illustration for explaining a delay process one embodiment of the present invention;

10 Fig. 33 is an illustration for explaining a vector calculation process in one embodiment of the present invention;

Fig. 34 is an illustration for explaining a vector selection process and communication quality calculating process in one embodiment of the present invention;

15 Fig. 35 is an illustration showing CPICH upon use of transmit diversity in the mobile communication system using W-CDMA system;

Fig. 36 is an illustration showing a principle of operation of the first embodiment of the communication quality measuring method while transmit diversity is applied, according to the present invention;

20 Fig. 37 is an illustration showing a principle of operation of the second embodiment of the communication quality measuring method while transmit diversity is applied, according to the present invention;

Fig. 38 is an illustration showing CPICH upon non-use

of transmit diversity in the mobile communication system using W-CDMA system;

Fig. 39 is an illustration showing a principle of operation of the third embodiment of the communication quality measuring method while transmit diversity is used, according to the present invention;

Fig. 40 is an illustration showing a result of simulation in the third embodiment of the communication quality measuring method upon use of transmit diversity;

Fig. 41 is an illustration showing a principle of operation of the fourth embodiment of the communication quality measuring method while transmit diversity is applied, according to the present invention; and

Fig. 42 is an illustration showing a result of simulation in the fourth embodiment of the communication quality measuring method upon use of transmit diversity.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

At first, detection of synchronization as a method for detecting a synchronization chip timing will be explained and then measurement of communication quality will be explained.

(1) Synchronization Detecting Method

Fig. 2 shows an overall construction of a W-CDMA type mobile communication system, to which the present

invention is applied. The mobile communication system is constructed with a base station 201 and a mobile station 202. The mobile station 202 includes a synchronization detecting portion 221 detecting a synchronization chip timing of a channel to be measured for communication with the base station and measuring a communication quality, a synchronization chip timing information portion 225 for accumulating information of detected synchronization chip timing, a correlation detecting portion 222 for deriving a correlation value between a spreading code of the channel to be measured and a received signal for communication with the base station and measuring of communication quality, a time series generating portion 223 for generating a time series data of a received signal vector after correlation detection, and a communication quality calculating portion 224 for calculating a communication quality from the generated time series data. The synchronization detecting portion 221 includes a synchronization timing candidate generating portion 2210 for establishing blocks of all chip timings which can be synchronized and generating synchronization timing candidates, a partial correlation detecting portion 2211 deriving a partial correlation with a reception signal for the synchronization timing candidate, and a synchronization chip timing determining portion 2212 for determining synchronization chip timing from the partial correlation values of respective candidate timings.

Fig. 3 shows a frame construction of CPICH (common pilot channel). In one frame, a hundred fifty symbols are contained. One frame is 10 msec. period. In the shown embodiment, as the channel to be measured, CPICH

5 constantly transmitted from each base station is used. Namely, in the synchronization detecting method using only channel to be measured, the partial correlation between the spreading code of the channel to be measured and the received signal and a peak value where the partial
10 correlation becomes maximum, is derived for detecting synchronized chip timing. Here, a matched filter is used for correlation detection and the partial correlation value is derived with sequentially varying the code to be written for achieving high speed synchronization chip
15 timing.

While other embodiments will be explained later, improvement of precision of the synchronization detection can be achieved by averaging the obtained correlated value at every given interval and detecting the synchronization
20 chip timing. Furthermore, reliability can be improved by repeating detection of synchronization chip timing for several times and determining the synchronization chip timing to be an object for measurement using the detected values of the synchronization chip timing, determining the
25 synchronization chip timing with providing a certain range, or by making judgment whether synchronization detection has to be performed again or not.

On the other hand, in the embodiment of synchronization detection which will be described later, a time resolution of a synchronization timing is assumed as one chip length for simplification. However, when the synchronization timing is detected in greater detail, the synchronization detection method according to the present invention may be performed with setting sampling rate at X times of that in one chip length for over-sampling.

Fig. 4 shows a principle of operation of the first embodiment of the synchronization detection method according to the present invention. In the first embodiment, an object for partial correlation is set at 256 chip length. When CPICH is taken as the channel to be measured, a chip timing, at which synchronization can be established, is 38400. Initially, the chip timing are blocked per symbol. Then, as synchronization timing, 150 candidates are generated with reference to symbol numbers of leading ends of the frames. Thereafter, partial correlation between each code of synchronization timing candidate and the received signal is sequentially derived as shown in Fig. 4 to obtain a power delay file per each synchronization timing candidate. Finally, chip timing where a candidate having the maximum peak among respective of obtained candidates of power delay profiles, is retrieved to take the obtained timing as the synchronization chip timing of the channel to be measured.

In W-CDMA system, a plurality of channels are

transmitted at the same frequency, all channels other than the channel to be measured become interfering channels. Considering process gain, power of the interference signal is restricted for chip length to be used for ordinary
5 correlation detection. In the embodiment shown in Fig. 4, partial correlation is performed at 256 chip length (1 symbol = 256 chips), the process gain is 256, and an average power of the interference signal becomes $1/256$.

In the first embodiment of the synchronization
10 detection method, when the received signal power of the chip timing matching with an effective path position for communication is higher than or equal to a received signal power at other timing, detection of the synchronization chip timing is successful. Accordingly, by setting the
15 chip length (unit for blocking) for partial correlation longer, probability of success in detection of the synchronization chip timing becomes higher.

Fig. 5 is explanatory illustration of operation in the case where a matched filter is used in the correlation
20 detecting portion of the mobile station, to which the present invention is applied. The matched filter is used for calculation of partial correlation to rewrite code in the matched filter per $1/15$ msec. As shown in Fig. 5, rewriting code to be written in the matched filter is
25 consisted of 256 chips extracted among 150 timing candidates #1 to #150.

By the first embodiment, a period required for

detecting the synchronization chip timing can be 10 msec.

Next, the second embodiment of the synchronization detection method will be explained. In the second embodiment, equalizing process in the synchronization
5 detecting portion 221 shown in Fig. 2 will be described. In the mobile communication system, it is generally influenced by multi-path fading, the power of the received signal (correlation detected value) fluctuates significantly. Also, since partial correlation is used
10 for correlation detection, precision in correlation detection is not always high.

Fig. 6 shows principle of operation of the second embodiment of the synchronization detection method according to the present invention. In the second
15 embodiment, the partial correlation value of each synchronization timing candidate within a given period is averaged to detect synchronization chip timing using obtained average value. Accordingly, assuming that number of samples of respective timing candidate within
20 the equalizing period is N , a period required for detection of the synchronization chip timing becomes $N \times 10$ msec. As an averaging method, there are a method to perform power averaging process and a method to perform vector averaging process.

25 Fig. 7 shows the case where the power averaging process is performed as equalizing process in the second embodiment of the synchronization detecting method. A

received signal vector at a timing t of the synchronization timing candidate # i and its chip number k in the symbol, is assumed as $(I_{i_k}(t), Q_{i_k}(t))$, the synchronization timing candidate after equalization is # i , and a power at chip
5 number k in its symbol is assumed as P_{i_k} .

In the power averaging process, the instantaneous received signal power is calculated from the received signal vector of each synchronization timing candidate, and subsequently, N in number of the calculated received
10 signal power is averaged per synchronization timing candidate. By the power value after equalization thus obtained, the synchronization chip timing of the channel to be measured is determined. The power averaging process is characterized in that when sample number N is increased,
15 a standard deviation of the received signal power at a timing other than the true synchronization chip timing becomes smaller (note that the average value is held unchanged).

Fig. 8 shows a received signal power distribution
20 after performing power averaging process as the equalizing process. After detection of partial correlation for a certain scrambling code at 256 chip length and averaging power in sample number 5, 10 and 15, Fig. 8 shows a distribution of the power value of the received signal at
25 a timing other than true synchronization chip timing. However, fading is not added. As can be appreciated from Fig. 8, when the sample number N is increased, the standard

deviation of the power value of the received signal in the true synchronization chip timing becomes smaller. As a result, probability of success of detection of synchronization becomes high.

5 Fig. 9 shows a synchronization chip timing detection procedure in the power averaging process. At step S1, synchronization detection is initiated. At step S2, synchronization timing candidate is set ($i = 0$). At step S3, partial correlation calculation is performed. At step
10 S4, received signal power is calculated. At step S5, check is performed whether $i < \max i$ is satisfied or not. At step S6, i is incremented. At step S7, check is performed whether $k < N$ is satisfied or not. At step S8, k is incremented. At step S9, power averaging is performed at
15 all synchronization timing candidate or all chip timing. At step S10, retrieval of the maximum power of the received signal is performed for all synchronization timing candidate or all chip timing. At step S11, the synchronization chip timing is determined. At step S12,
20 synchronization detection is terminated.

Fig. 10 shows the case where the vector averaging process as the equalizing process in the second embodiment of the synchronization detection method. In the vector averaging process, the received signal vector of each
25 synchronization timing candidate is averaged respectively on I side and Q side (N in number). Subsequently, the received signal power is calculated from the values of I

and Q after averaging, the synchronization chip of the channel to be measured is determined. Since the vector averaging process is premised in that the phase rotation of the desired signal vector due to fading in the averaging
5 period can be ignored, in the example shown in Fig. 10, a sampling interval per one synchronization timing candidate is set at $1/15$ msec.

In the foregoing vector averaging process, by increasing number of samples to be averaged, the average
10 value of the power of the received signal other than the true synchronization chip timing becomes small (standard deviation is unchanged).

Fig. 11 shows a received signal power distribution after performing vector averaging process as the
15 equalizing process. After detection of partial correlation for a certain scrambling code at 256 chip length and averaging power in sample number 5, 10 and 15, Fig. 11 shows a distribution of the power value of the received signal at a timing other than true
20 synchronization chip timing. However, fading is not added. As can be appreciated from Fig. 11, when the sample number N is increased, the average value of the power of the received signal in the true synchronization chip timing becomes smaller. As a result, probability of success of
25 detection of synchronization becomes high.

Fig. 12 shows a synchronization chip timing detection procedure in the vector averaging process. At

step S21, synchronization detection is initiated. At step S22, synchronization timing candidate is set ($i = 0$). At step S23, partial correlation calculation is performed. At step S24, check is performed whether $k < N$ is satisfied
5 or not. At step S25, k is incremented. At step S26, vector average is derived for all chip timing of synchronization timing candidate # i . At step S27, the power values are calculated for all chip timing of the synchronization timing candidate # i . At step S28, check is performed
10 whether $i < \max i$ is satisfied or not. At step S29, i is incremented. At step S30, retrieval of the maximum power of the received signal is performed for all synchronization timing candidate or all chip timing. At step S31, the synchronization chip timing is determined.
15 At step S32, synchronization detection is terminated.

Fig. 13 shows a principle of operation of the third embodiment of the synchronization detection method according to the present invention. The third embodiment of the synchronization detection method is further
20 improvement of the second embodiment set forth above. Namely, process of equalizing process can be set for a plurality of times. Even in each process, using the average value obtained by averaging for a plurality of times by the same or different averaging method, the
25 synchronization chip timing of the channel to be measures is determined.

In the third embodiment, averaging operation is

repeated twice. At the first stage of averaging, N1 in number of vector averaging process is performed per synchronization timing candidate. Subsequently, the power value is derived from the received signal vector
5 after vector averaging for deriving N2 in number of averaged values. At the second stage, the chip timing where the received signal power after averaging becomes maximum, is detected to the synchronization chip timing of the channel to be measured.

10 In the third embodiment, at first, in the first stage averaging, the average value of the received signal power in the synchronization chip timing other than the true synchronization chip timing becomes small for N1 in number of samples. Subsequently, by averaging in the second
15 stage, the standard deviation becomes smaller than N2 in number of samples. As a result, probability of success in detection of synchronization becomes further higher in comparison with the case of one time of averaging operation. In the third embodiment, a period required for
20 synchronization detection is $(N1 \times N2 \times 10)$ msec.

Fig. 14 shows a synchronization chip timing detection procedure in the third embodiment of synchronization detection method. At step S41, synchronization detection is initiated. At step S42,
25 synchronization timing candidate is set ($i = 0$). At step S43, partial correlation calculation is performed. At step S44, check is performed whether $k1 < N1$ is satisfied

or not. At step S45, k_1 is incremented. At step S46, vector average is derived for all chip timing of synchronization timing candidate # i . At step S47, the power values are calculated for all chip timing of the synchronization timing candidate # i . At step S48, check is performed whether $i < \max i$ is satisfied or not. At step S49, i is incremented. At step S50, check is performed whether $k_2 < N_2$ is satisfied or not. At step S51, k_2 is incremented. At step S52, power averaging is performed at all synchronization timing candidate or all chip timing. At step S53, retrieval of the maximum power of the received signal is performed for all synchronization timing candidate or all chip timing. At step S54, the synchronization chip timing is determined. At step S55, synchronization detection is terminated.

Furthermore, the fourth embodiment of the synchronization detection method will be explained. The fourth embodiment determines the synchronization chip timing of the channel to be measured by performing synchronization chip timing detection process in the foregoing first to third embodiments for a plurality of times and using the averaged value of a plurality of synchronization chip timing values and the standard deviation value. Therefore, in the fourth embodiment, check is performed whether the detected synchronization chip timing is reasonable or not.

Fig. 15 shows a principle of operation of the fourth

embodiment of the synchronization detection method according to the present invention. M in number of synchronization chip timings detected after averaging are prepared. Then, the synchronization chip timing as object
5 for measurement is checked. It should be noted that, in the fourth embodiment, complete synchronization detection is not required and it is only required to have a value falling within certain range (measurement window).

The fourth embodiment is premised in that
10 measurement of all chip timing in measurement window is performed after synchronization detection. At first, an averaged value of M in number of detected synchronization chip timings. Subsequently, using the average value thus derived, the standard deviation is derived. As an
15 averaged value derived centered at the measurement window, the value of the derived standard deviation falls within the measurement window width, measurement becomes possible to take the detection successful. On the other hand, when the derived standard deviation does not fall
20 within the measurement window, judgment is made that probability of failure of detection is high to again initiate synchronization detection.

Next, explanation will be given for the synchronization detection method in the case where
25 transmit diversity is applied in CPICH.

Fig. 16 shows the frame structure of CPICH and the received signal in the case where the transmit diversity

is applied. α_1 is a vector variation amount depending upon propagation path from the transmission antenna #1 of the base station to the mobile station, α_2 is a vector variation amount depending upon propagation path from the transmission antenna #2 of the base station to the mobile station. These are varied from time to time according to movement of place of the mobile station. On the other hand, the signal transmitted from each antenna of the base station is provided modulation of A or -A per symbol. This pattern is determined uniquely. It should be noted that symbol modulation pattern when the transmit diversity is not applied, is the same as that of the antenna #1.

CPICH transmitted from the antenna #1 and the antenna #2 are influenced by each propagation path. In the mobile station, the signals in combined form are received. Accordingly, the signal of symbol #0 transmitted from the base station is received in the mobile receiving station as expressed by the following equation:

$$R(0) = \sqrt{P_{t1}} \alpha_1(0) \cdot A + \sqrt{P_{t2}} \alpha_2(0) \cdot A + N(0) \quad (1)$$

wherein $R(0)$ is the received signal vector after correlation detection, P_{t1} and P_{t2} are transmitting power of CPICH in respective transmission antennas, $N(0)$ is interference signal vector.

The synchronization detection is detection of the position of symbol #0 in the mobile receiving station. It

should be noted that communication quality measurement upon use of transmit diversity which will be discussed later, is derivation of the desired signal power as expressed by:

5

$$\langle P_{t1} |\alpha_1|^2 + P_{t2} |\alpha_2|^2 \rangle \quad (2)$$

and the interference power as expressed by:

10 $\langle |N|^2 \rangle \quad (3)$

wherein $\langle \rangle$ expresses an average.

Next, the received signal vector combined as expressed by the foregoing expression (1) will be separated into the received signal vector from each transmission antenna. For separation, two continuous symbols are used. Assuming (i)th symbol (wherein i is even number) as a symbol to be a reference, the received signal vector r_1 and r_2 from each antenna is expressed by:

20

$$r_1(i) = \frac{R(i+1) + R(i)}{2A} \approx \sqrt{P_{t1}} \alpha_1(i) + \frac{N(i+1) + N(i)}{2A} \quad (4)$$

$$r_2(i) = (-1)^{i/2+1} \frac{R(i+1) - R(i)}{2A} \approx \sqrt{P_{t2}} \alpha_2(i) + (-1)^{i/2+1} \frac{N(i+1) - N(i)}{2A}$$

25 The foregoing equation (4) use approximations of $\alpha_1(i +$

1) $\hat{=} \alpha_1(i)$ and $\alpha_2(i + 1) \hat{=} \alpha_2(i)$.

Fig. 17 shows a principle of operation of the fourth embodiment of the synchronization detection method according to the present invention. The synchronization detection detects leading position (synchronization chip timing) of CPICH from the received signal. #0 to #149 in Fig. 17 are synchronization timing candidates generated by the synchronization timing candidate generating portion 2210 shown in Fig. 2. It should be noted that unit for blocking is one symbol. Calculation of correlation with the received signal is performed by sequentially extracting objective symbol number among the synchronization timing candidates #0 to #149 and using spreading code (256 chip length) corresponding to the symbol number.

For example, assuming an average number of vector is N_1 , from the synchronization timing candidate #i, $2N_1 + 1$ in number of symbols in series from $2(N_1 + 1)i$ is selected for correlation calculation. When matched filter is used in correlation calculation, a timing to finish correlation calculation for all of the synchronization timing candidates is $T_1 = 10 \times (2N_1 + 1)$ [ms].

Next, from the obtained received signal vector $R(i)$ and $R(i + 1)$, the received signal vector from each transmission antenna is separated using the foregoing equation (4). Here, number of received signal vectors after separation belonging in the same synchronization

timing candidates is N_1 in number per one transmission antenna. These N_1 in number of received signal vectors averaged per transmission antenna, and finally, obtained two average vectors are summed in power. Fig. 17 shows
5 the case where the number of vector average N_1 is 2. In practice, the foregoing calculation is performed for all of 256 chips. On the other hand, the foregoing calculation is executed with over-sampling of X times of one symbol, calculation is performed for number of samples of $256 \times$
10 X . The synchronization chip timing is determined by synchronization timing candidate having the maximum power value and the chip number in the symbol.

Fig. 18 shows the synchronization chip timing detection procedure in the sixth embodiment of the
15 synchronization detection method. In the shown embodiment, except for the period required for calculation, a period from initiation of synchronization detection to finishing thereof is $T_1 = 10 \times (2N_1 + 1) \times N_2$ [ms].

At step S61, synchronization detection is
20 initiated. At step S62, synchronization timing candidate is set ($i = 0$). At step S63, partial correlation calculation is performed. At step S64, check is performed whether $k_1 < 2N_1 + 1$ is satisfied or not. At step S65, k_1 is incremented. At step S66, received signal vector
25 is separated per antenna with respect to all chip timings of the synchronization timing candidates. At step S67, vector averages of the received signal vectors are derived.

At step S68, the averaged received signal vector is converted into the power value per antenna and then the power values of respective antennas are summed.

At step S69, check is performed whether $i < \max i$ is satisfied or not. At step S70, i is incremented. At step S71, $k1$ is reset to 0. At step S72, check is performed whether $k2 < N2$ is satisfied or not. At step S73, $k2$ is incremented. At step S74, $k1$ is reset to 0. At step S75, power averaging is performed at all synchronization timing candidates or all chip timing. At step S76, retrieval of the maximum power of the received signal is performed for all synchronization timing candidates or all chip timing. At step S77, the synchronization chip timing is determined. At step S78, synchronization detection is terminated.

(2) Communication Quality Measuring Method

Next, the measurement method of communication quality will be explained. Fig. 19 shows overall construction of the mobile station, to which the present invention is applied. The mobile station 202 has the same construction as that of Fig. 2. The communication quality calculating portion 224 includes matrix calculation means 2301 for deriving covariant matrix from two time series data in the received signal vector generated in the time series generating portion 223 and performing calculation of eigenvalues, power calculating means 2302 for calculating the desired signal power and the interference

signal value using the eigenvalues, and SIR calculating means for deriving SIR.

On the other hand, using a control portion 2304 as component of the mobile communication system, a path
5 between transmitter and receiver effective for communication is derived using the SIR value derived in the SIR calculation means to control the synchronization chip timing information portion 225 for achieving measurement of more precise value.

10 In the shown embodiment, with reference to the synchronization chip timing obtained in the synchronization detecting portion, all chip timings in a certain range are taken as object for measurement. Namely, communication quality measurement using the measurement
15 window is performed.

Fig. 20 shows a principle of operation of the first embodiment of the communication quality measuring method according to the present invention, a chip length to perform correlation detection and the measurement window
20 width is taken as one symbol. Here, consideration is given for chip timing k presenting in the measurement window. In order to derive the desired signal power and the interference signal power in the chip timing k, a series 1 is established by arranging the received signal vector
25 of the chip timing 1 in a certain given period (averaged period, and a series 2 is established by a time series data of the received signal vector distanced from the series

2 for several symbols.

Next, covariant matrix of the series 1 and the series 2 is derived to calculate eigenvalues thereof. By performing operation shown in Fig. 20 using the eigenvalues thus derived, the desired signal power and the interference signal power at the chip timing k can be derived as averaged values within the averaging period. It should be noted that the operation for deriving the powers from the eigenvalues shown in Fig. 20 is effective only when correlation between two series is relatively high. In other words, the foregoing operation is only effective when the time difference between two series is sufficiently small relative to a variation of the desired signal vector due to multi-path fading. In the shown embodiment, there is no limitation in sampling interval (data interval in one series) and number of samples (number of data in one series).

It should be noted that greater number of samples within the averaging period results in closer value to the true value. On the other hand, SIR in the chip timing k can be derived from a ratio of the obtained desired signal power and the interference signal power. On the other hand, in case of communication quality measurement not using the measurement window, the synchronization chip timing obtained by the synchronization detecting portion may be measured as the chip timing k .

Fig. 21 shows a principle of operation of the second

embodiment of the communication quality measurement method according to the present invention. When correlation between two series, namely when the correlation value is greater than or equal to 0.85, the
5 desired signal power and the interference signal power can be derived from an add vector and difference vector relative to the received signal vectors having reception timing close to each other between time series. More preferably, at the correlation value greater than or equal
10 to 0.9, the desired signal power and the interference signal value are derived at comparable precision as the first embodiment of Fig. 20. Further preferably, at the correlation value greater than or equal to 0.95, the desired signal power and the interference signal value are
15 derived at comparable precision as the first embodiment of Fig. 20 and with more simple calculation method.

In the shown embodiment, a time difference between time series (delay time difference) as one symbol, the add vector and difference vector are derived from the received
20 signal vector between adjacent symbols. At first, using N in number of difference vector within the averaging period, the interference signal power is derived by operation shown in Fig. 21. Next, the desired signal power is derived using N in number of add vectors within the
25 averaging period and already derived interference signal power. From a ratio of the derived desired signal power and the interference signal power, SIR in the averaging

period can be derived. Even in the shown embodiment, similarly to the first embodiment shown in Fig. 20, there is basically no limitation for the sampling interval and the sampling number.

5 In the shown embodiment, in the time series generating portion 223 shown in Fig. 19, in addition to generation of two time series data of the received signal vector, generation of time series data of the add vector and difference vector is also performed. It should be
10 noted that, in the shown embodiment, since the eigenvalues are not required, matrix operation shown in Fig. 19 becomes unnecessary.

 Fig. 22 shows a result of simulation in the second embodiment of the communication quality measuring method.
15 Namely, Fig. 22 shows examples of the result of output of the desired signal power and the interference signal within the measurement window derived by simulation. In the simulation, it is assumed that two signals, in which a certain code is spread, arrive with 5 chip delay. Namely,
20 the position of the first path is tenth chip and the position of the second path is fifteenth chip. The signal arriving at the second path acts as interference signal in the first path and the signal arriving at the first path acts as interference signal in the second path. The
25 averaging period is 1500 symbols and the sampling interval is 1 symbol. It should be noted that the power of the signal arriving at the second path is set to be 5 dB lower

than the power of the signal arriving at the first path. The correlation detection is performed with four times over-sampling of 256 chip length.

Fig. 23 shows a principle of operation of the third embodiment of the communication quality measuring method according to the present invention. In the shown embodiment, by averaging the desired signal power and the interference signal power derived in the foregoing first and second embodiments, more stable value (average value) can be obtained. In the shown embodiment, at first, an average values of the desired signal power and the interference signal power are derived per N_1 in number of chips in the average period using the methods in the first and second embodiments (primary averaging). Then, as secondary averaging, N_2 in number of desired signal powers and the interference signal powers obtained by the primary averaging are averaged in power. It should be noted that SIR in the averaging period is derived from a ratio of the derived desired signal power and the interference signal power.

Fig. 24 shows a result of simulation by the third embodiment of the communication quality measuring method. Condition of simulation is the same as those of Fig. 22 except for averaging method. Averaging sample number is 5 in the primary averaging and 300 in the second averaging. The averaging period in total is 1500 symbols. Comparing with the results shown in Fig. 22, it should be appreciated

that more stable values can be obtained.

Fig. 25 shows a principle of operation of the fourth embodiment of the communication quality measuring method according to the present invention. In the shown

5 embodiment, number of channels to be measured is assumed to be M . The reason why the same channels are continuous for two symbols, is that two series data are required by the averaging methods in the first and second embodiments. As shown in Fig. 25, with taking two symbols as set,
10 measurement of other channel within the sampling period becomes possible. In a certain given period, measurement data of a plurality of channels can be obtained at substantially the same. In the prior art using the vector averaging, since there is a limitation that "phase
15 variation of the desired signal vector due to multi-path fading in the averaging period, should be ignorable." Therefore, when number of channels to be measured is large number and the averaging period is relatively long, time multiplexing of other channel within the sample period is
20 difficult.

Fig. 26 shows a principle of operation of the fifth embodiment of the communication quality measuring method according to the present invention. In the shown
embodiment, primary average is derived by time
25 multiplexing of other channels within sampling period of one channel. Then, secondary averaging (averaging in power) is performed from the result obtained by the primary

averaging.

Fig. 27 shows a principle of operation of the sixth embodiment of the communication quality measuring method according to the present invention. In the shown
5 embodiment, at first, primary averaging is performed per one channel, and other channels are multiplexed in the secondary averaging period to obtain the values after secondary averaging of respective channels.

Figs. 28A and 28B show the results of simulation in
10 the fifth embodiment of the communication quality measuring method. Fig. 28A is a profile of obtained received signal power performing simulation in the same condition as Figs. 22 and 24. The averaging method performs only averaging in power per chip. Fig. 28B is
15 a profile of SIR per each chip derived using the desired signal power and the interference signal power obtained from Fig. 22. Conventionally, the position of the path to be effective in communication is detected as the synchronization chip timing from the peak where the power
20 becomes maximum by deriving the received signal power per chip in the synchronization detecting portion 221 shown in Fig. 19, as shown in Fig. 28A.

In Fig. 28A, since the desired signal power is set relatively higher than the interference signal power, the
25 path position can be easily detected from the peak value thereof. However, according to increase of the interference signal power, judgment whether the peak value

is the actual path position or not, is difficult. On the other hand, it is not possible to distinguish whether the peak is results in presence of the path or the peak is results in fluctuation of noise only by the peak value of the power. When error is present in the synchronization chip timing in the synchronization detecting portion 221, precision in measurement is degraded since the measurement is performed at a chip timing different from the path position effective for communication, in the communication quality measuring portion 224.

On the other hand, in the shown embodiment, the synchronization chip timing obtained in the synchronization detecting portion 221 is taken as the reception chip timing to measure SIR by the first and second embodiments. In the control portion 2304 shown in Fig. 19, judgment is made whether the reception chip timing is offset from the path position effective for communication from the measured SIR value or not. If judgment is made that the reception chip timing is offset from the path position, the synchronization chip timing information portion 225 shown in Fig. 19 is controlled to modify the synchronization chip timing.

On the other hand, in case of the communication quality measurement premised by the measurement window, for all chip timing in the measurement window, the desired signal power, the interference signal power and SIR are measured. Therefore, SIR profile shown in Fig. 28B is

obtained. In Fig. 28B, $SIR < 0$ is certainly established at positions where the path is not present, and $SIR > 0$ is established at positions where the path is present. In the control portion 2304 shown in Fig. 19, the peak value
5 where $SIR > 0$ is established is detected to detect the path position effective for communication.

When judgment is made that the position of the measuring window and the window width are not appropriate, modification of the position of the measuring window and
10 the window width is performed by controlling the synchronization chip timing information portion 225 of Fig. 19. By such control, even when the path position between transmitter and receiver is moved by movement of the mobile station, the position of the window is modified following
15 movement of the path. As a result, moving measurement of the communication quality can be realized without causing degradation of precision.

(3) Communication Quality Measuring Method Upon Use of 20 Transmit Diversity

Fig. 29 shows overall construction of the mobile communication system applying transmit diversity. The mobile station 202 has the same construction as that shown in Fig. 2. The time series generating portion 223 is
25 constructed with a delay circuit 3301 delaying the received signal vector after correlation detection for a predetermined delay symbol number, a vector calculation

portion 3302 deriving a difference vector and add vector from difference and sum of the received signal vector, and a vector selecting portion 3303 selecting vector for performing calculation by the communication quality
5 calculating portion 224.

When communication is performed applying transmit diversity as the channel to be measured, the channel repeatedly transmitted a known symbol series of respectively different patterns using common spreading
10 code is assumed from two different antennas of the radio base station. When the communication applying transmit diversity is not performed, the channel repeatedly transmitted a known transmission symbol series is assumed. While two antennas of the radio base stations are located
15 close to each other, the distance of the antennas is set to make the spatial correlation small. At receiving point in the service area, the signal reaches as a signal influenced by independent propagation path. The signals transmitted from two antennas are received by the antenna
20 at the reception point as combined in vector in space.

Fig. 30 is an illustration for explaining process for explaining correlation detection process in one embodiment of the present invention. In general, a transmission series $s_1(t)$ from the antenna #1 and a
25 transmission series $s_2(t)$ from the antenna #2 are subject to respectively independent fading $c_1(t)$ and $c_2(t)$. These two series are received after combination in the space.

Accordingly, ignoring transmission delay, a received series becomes $r(t) = c_1(t) * s_1(t) + c_2(t) * s_2(t)$. Here, considering a time range where influences of the propagation paths are regarded as the same, fading can be
5 regarded as constant, $c_1(t) = c_1$ and $c_2(t) = c_2$. Therefore, the received series becomes a given value per combination of the transmission series $s_1(t)$ and $s_2(t)$.

For example, when the symbol of the transmission series of the antenna #1 at a certain timing is assumed
10 as A and the symbol of the transmission series of the antenna #2 at the certain timing is assumed as A, the received series becomes X. When the symbol of the transmission series of the antenna #1 at a certain timing is assumed as A and the symbol of the transmission series
15 of the antenna #2 at the certain timing is assumed as B, the received series becomes Y. As set forth above, in a time range where the influence of the propagation path is regarded as constant, the received series is determined only depending upon the transmission series.

20 In this circumstance, in the transmission series, if the regular pattern is periodically and repeatedly transmitted, certain series pattern is repeated in the same period in the received series. At this time, when a correlation value between the received series and the
25 delayed received series delayed for a period of the regular series pattern is derived, the derived value becomes 1. Namely, the delayed received series delayed for the period

of the transmitted series pattern and the received series are completely matched and the mutual correlation between the series becomes 1. Here, on transmission side, a unit where the known series pattern is repeated for a plurality
5 of times is defined as frame.

Fig. 31 shows a process of correlation detection in one embodiment of the present invention. A symbol as correlation unit taking $t_{j+1} + i\Delta\tau$ as leading end of the received series $r'(t)$, is assumed as $r'(t_{j+1} + i\Delta\tau)$, and
10 correlation detection process is performed by the correlation detector, such as matched filter set the code $m(t_{j+1} + i\Delta\tau)$ spreading respective of corresponding symbol, the received signal vector series $r(t_{j+1} + i\Delta\tau)$ after correlation can be obtained. Thus, the received signal
15 vector is assumed as $r_k(t_{j+1} + i\Delta\tau)$. It should be noted that $\Delta\tau$ is a period of one symbol length, j is a repetition number of the series pattern in one frame, i is symbol number in the pattern, k is a reception chip timing in the symbol. On the other hand, it is assumed that information
20 of the leading end position, the symbol position and so on of the channel frame to be measured are already known.

Fig. 32 shows a delay process in one embodiment of the present invention. With a preliminarily set delay symbol number I , by delaying the received signal vector series after correlation detection for delay symbol number
25 I , the delayed received signal vector series is generated. The delay symbol number I is set at integer multiple of

the repetition period of the transmission series pattern.

Fig. 33 shows vector calculation process in one embodiment of the present invention. In two time series data of the received signal vector series $r(t)$ after correlation and the delayed received signal vector series $r(t - I\Delta\tau)$ delayed for delay symbol number I , the received signal vector $r_k(t_{j+1} + i\Delta\tau)$ in the reception chip timing k in the symbol and from difference and sum of the received signal vector series $r_k(t_{j+1} + i\Delta\tau - I\Delta\tau)$, namely $r_k(t_j + i\Delta\tau)$ at the same reception chip timing, at which the series is delayed for delay symbol I , difference vector and add vector are derived. The add vector becomes $\alpha_{i,k}(t_j) = r_k(t_{j+1} + i\Delta\tau) + r_k(t_j + i\Delta\tau)$ and the difference vector becomes $\beta_{i,k}(t_j) = r_k(t_{j+1} + i\Delta\tau) - r_k(t_j + i\Delta\tau)$.

Fig. 34 shows a process of vector selection and a process of communication quality calculation in one embodiment of the present invention. The vector selection selects output of the vector calculation process to be input to the communication quality calculation process by a preliminarily set vector selection information $sel_{i,k}(t_j)$, namely the difference vector and the add vector. The vector selection information is information ON = 1 and OFF = 0 per symbol.

The communication quality calculation uses input add vector $\alpha'_{i,k}(t_j)$ and the difference vector $\beta'_{i,k}(t_j)$. From an average of the difference vector, the interference signal power is derived, and from an average of the add

vector and the average of the difference vector, the desired signal power is derived. SIR is derived from a ratio of the desired signal power and the interference signal power.

5 Fig. 35 shows CPICH upon use of the transmit diversity in the mobile communication system using W-CDMA cellular system. CPICH is consisted of 150 symbols per one frame, a symbol series consisted of four symbols (A, A, A, A) is transmitted from the antenna #1 and a symbol series
10 consisted of four symbols (A, B, B, A) is transmitted from the antenna #2. Since the transmission symbol series is once reset per one frame, regularity of the four symbol period is not continued at the boundary of the frame. Therefore, in order to obtain a series where the
15 correlation of the transmission symbol series becomes 1, the delay period has to be set at one frame. However, in case of the series provided such long delay should go beyond the range where the influence of the propagation path is constant to make it difficult to derive correct add vector
20 and difference vector.

 In order to avoid this, there are a method for selecting only correct add vector and the difference vector by setting the delay period to four symbols to avoid frame boundary, the delay period symbol is taken as one
25 symbol, and a method for selecting only correct add vector and the difference vector appearing every other symbol with taking one symbol as the delay period symbol.

Fig. 36 shows a principle of operation of the first embodiment of the communication quality measuring method upon use of the transmit diversity according to the present invention. The synchronization detection is calculated with taking four symbols as the delay period. Among 150 symbols in one frame, 146 symbols matches symbol of the series 2, 4 symbols from the frame boundary do not match with the symbols in series 2. Therefore, the correlation value of the series 1 and the series 2 can not be 1. Since this make is difficult to derive correct add vector and difference vector, by setting the vector information of part of unmatched symbol in the frame boundary in the vector selection process, result of correct calculation can be obtained in the communication quality calculating process.

Fig. 37 shows a principle of operation of the second embodiment of the communication quality measuring method upon use of the transmit diversity according to the present invention. Communication quality is calculated with tasking one symbol as delay period. In the series 1, excluding first symbol from the leading end of the frame, odd number order symbol match with the symbols in the series 2, but even number order symbols from the leading end of the frame do not match. Therefore, the correlation value of the series 1 and series 2 does not become 1. With leaving this, correct add vector and the difference vector can be calculated. Therefore, by setting vector

information to $\text{off} = 0$ for the first and even number order symbols from the leading end of the frame, correct result of calculation can be obtained in the communication quality calculation process.

5 Fig. 38 shows CPICH when transmit diversity is not applied in the mobile communication system used in W-CDMA cellular system. The pilot channel is consisted of 150 symbols for one frame. A symbol series consisted of four symbols (A, A, A, A) is repeatedly transmitted only from
10 the antenna #1 with taking four symbol as a period. While the transmission symbol series is reset per one frame, since symbol is constant, non-continuous at the frame boundary is not generated. Therefore, by applying any delay period, correlation of the transmission symbol
15 series becomes 1. Accordingly, at arbitrary delay period where time correlation of the propagation path becomes small, correct add vector and difference vector can be derived.

20 This demonstrates capability of correct measurement of the desired signal power and the interference signal power when the transmit diversity is not applied using either the method of calculating the communication quality with taking four symbols as delay period as shown in Fig. 36 or the method of calculating the communication quality
25 with taking one symbol as delay period as shown in Fig. 37. Accordingly, even when the base stations applying the transmit diversity and the base stations not applying the

transmit diversity are present, it becomes unnecessary to change calculation method and the calculation method is used commonly.

Fig. 39 shows a principle of operation of the third
5 embodiment of the communication quality measuring method upon use of the transmit diversity according to the present invention. With taking CPICH as channel to be measured upon use of the transmit diversity, the communication
10 quality measuring method which does not require the vector selecting portion 223 shown in Fig. 29, is illustrated. The synchronization chip timing detected by the
synchronization detecting portion 221 and accumulated in the synchronization chip timing information portion 225 is taken as reception chip timing. Then, detection of
15 correlation is performed with modifying the spreading code of a reference signal adapting to the symbol number of the received signals. The received signal vector for each transmission antenna is calculated from the foregoing
equation (4) using the received signal vector obtained by
20 correlation detection.

Next, the add vector and the difference vector are generated per each transmission antenna. The desired
signal power and the interference signal power upon use
of transmit diversity are derived from the add vector and
25 the difference vector for each antenna. In Fig. 39, N upon deriving the desired signal power and the interference
signal power is number of samples of the add vector or the

difference vector per one transmission antenna. For example, when the averaging period is 150 symbols (number of symbols in one frame), for example, N becomes 74. On the other hand, in Fig. 39, correlation detection is performed from the leading end of the frame for simplification, correlation detection is not necessarily performed from the leading end.

Fig. 40 shows the result of simulation in the third embodiment of the communication quality measuring method upon use of transmit diversity. Under the premise of synchronization quality measurement using the measuring window, 4 times of over-sampling points is performed for the chip timing. Simulation is performed to set the received power of the desired signal at 0 dBm (-3 dBm for each antenna), the received power of the interference signal at -100 dBm, and the path position between transmitter and receiver at tenth chip in the measurement window. From Fig. 40, at set path position between transmitter and receiver, the desired signal power and the interference signal power can be calculated with high precision.

Fig. 41 shows a principle of operation of the fourth embodiment of the communication quality measuring method upon use of the transmit diversity according to the present invention. With taking CPICH as the channel to be measured upon applied of transmit diversity, the communication quality measuring method not requiring the vector

selecting process 223 of Fig. 29 will be explained. In the shown embodiment, from the received signal vector obtained from correlation detection, only received signal vector for one transmission antenna is derived from the foregoing equation (4). Here, the transmission antenna to be selected is either antenna #1 or antenna #2. Calculation is simple as the antenna #1 is selected. In Fig. 41, the antenna #1 is selected as the selected transmission antenna.

10 Next, for the obtained received signal vector in one transmission antenna, the add vector and the difference vector are generated. The desired signal power and the interference signal power upon use of transmit diversity are calculated from the add vector and the difference vector. In Fig. 41, N upon deriving the desired signal power and the interference signal power is number of samples of the add vector or the difference vector per one transmission antenna. For example, when the averaging period is 150 symbols (number of symbols in one frame), for example, N becomes 74. On the other hand, upon derivation of the desired signal power and the interference signal power, $(P_{t1} + P_{t2})/P_{t1}$ is a correlation value which is a known value. Here, P_{t1} and P_{t2} are transmitting power of CPICH in each transmission antenna.

25 It should be noted that, in Fig. 41, correlation detection is performed from the leading end of the frame for simplification. However, correlation detection can be

not necessarily performed from the leading end.

Fig. 42 shows a result of simulation in the fourth embodiment of the communication quality measuring method upon use of transmit diversity. Condition of simulation is the same as Fig. 40. Fig. 42 shows the value before correction by the transmitting power. At the path position between the transmitter and receiver, it can be appreciated that the desired signal power and the interference signal power are calculated at -3 dB lower than the set values. On the other hand, the correction value is $(P_{t1} + P_{t2})/P_{t1} = 2$ (3 dB). Accordingly, by adding the correction value of 3 dB, the desired signal power and the interference signal power can be correctly measured.

The claims defining the invention are as follows:

~~WHAT IS CLAIMED IS:~~

1. A communication quality measuring method in CDMA cellular system detecting a reception chip timing of a channel to be measured and measuring communication quality,
5 comprising:

time series generating step of generating two series of data consisted of a time series data of a detected value and a time series data delayed for one, two or more periods,
10 with respect to said reception chip timing where the detected value becomes the same;

matrix calculation step of deriving covariant matrix of said two series data generated in said time series generating step;

15 first power calculating step of deriving a desired signal power and an interference signal power in said reception chip timing from a eigenvalue of said covariant matrix; and

SIR calculating step deriving a SIR at said reception
20 chip timing from said desired signal power and said interference signal power.

2. A communication quality measuring method in CDMA cellular system as claimed in claim 1, which further
25 comprises

third power calculation step of deriving an averaged desired signal power and an averaged interference signal

power by performing averaging in a given period from said desired signal power and said interference signal power obtained in said first power calculation step and a second power calculation step, and

5 in said SIR calculation step, said SIR is derived from said averaged desired signal power and said averaged interference signal power.

3. A communication quality measuring method in CDMA
10 cellular system as claimed in claim 2, wherein when the channel to be measured is plural and only one correlation detector is useful,

 in said third power calculating step, said averaged
desired signal power and said average interference signal
15 power are derived in time division, and

 in said SIR calculation step, said SIR of a plurality
of channels are derived in time division.

4. A communication quality measuring method in CDMA
20 cellular system as claimed in claim 1, wherein when the channel to be measured is plural and only one correlation detector is useful,

 correlation detection of a plurality of channels is
performed in time division for generating two series
25 generated in the same reception chip timing per channel.

5. A communication quality measuring method in CDMA

cellular system as claimed in claim 4, which further comprises

fourth power calculation step of deriving an averaged desired signal power and an averaged interference
5 signal power by averaging a given period from said desired signal power and said interference signal power obtained in said first power calculation step and a second power calculation step, and

in said SIR calculation step, said SIR is derived
10 from said averaged desired signal power and said averaged interference signal power.

6. A communication quality measuring method in CDMA cellular system as claimed in claim 1, which further
15 comprises:

path detection step of deriving paths between transmitter and receiver to be effective for communication from a value of said SIR obtained in said SIR calculation step.

20

7 A communication quality measuring method in CDMA cellular system detecting a reception chip timing of a channel to be measured and measuring communication quality, comprising:

25 time series generating step of generating two series of data consisted of a time series data of a detected value and a time series data delayed for one, two or more periods,

with respect to said reception chip timing where the detected value becomes the same;

adding step of deriving an add vector from addition of received signal vectors between two points close in reception timing when said two series data generated in said time series generating step becomes a particular correlation value;

subtracting step of deriving a difference vector from a difference of received signal vectors between two points close in reception timing;

second power calculation step of deriving a desired signal power and an interference signal power by averaging said add vectors and said difference vectors; and

SIR calculating step deriving a SIR at said reception chip timing from said desired signal power and said interference signal power.

8. A communication quality measuring method in CDMA cellular system as claimed in claim 7, which further comprises

third power calculation step of deriving an averaged desired signal power and an averaged interference signal power by performing averaging in a given period from said desired signal power and said interference signal power obtained in a first power calculation step and said second power calculation step, and

in said SIR calculation step, said SIR is derived

from said averaged desired signal power and said averaged interference signal power.

9. A communication quality measuring method in CDMA
5 cellular system as claimed in claim 8, wherein when the
channel to be measured is plural and only one correlation
detector is useful,

in said third power calculating step, said averaged
desired signal power and said average interference signal
10 power are derived in time division, and

in said SIR calculation step, said SIR of a plurality
of channels are derived in time division.

10. A communication quality measuring method in CDMA
15 cellular system as claimed in claim 7, wherein when the
channel to be measured is plural and only one correlation
detector is useful,

correlation detection of a plurality of channels are
performed in time division for generating two series
20 generated in the same reception chip timing per channel.

11. A communication quality measuring method in CDMA
cellular system as claimed in claim 10, which further
comprises

25 fourth power calculation step of deriving an
averaged desired signal power and an averaged interference
signal power by averaging a given period from said desired

signal power and said interference signal power obtained in said first power calculation step and a second power calculation step, and

in said SIR calculation step, said SIR is derived
5 from said averaged desired signal power and said averaged interference signal power.

12. A communication quality measuring method in CDMA cellular system as claimed in claim 7, which further
10 comprises:

path detection step of deriving paths between transmitter and receiver to be effective for communication from a value of said SIR obtained in said SIR calculation step.

15

13. A communication quality measuring apparatus in CDMA cellular system detecting a reception chip timing of a channel to be measured and measuring communication quality, comprising:

20 time series generating means for generating two series of data consisted of a time series data of a detected value and a time series data delayed for one, two or more periods, with respect to said reception chip timing where the detected value becomes the same;

25 matrix calculation means for deriving covariant matrix of said two series data generated in said time series generating means;

first power calculating means for deriving a desired signal power and an interference signal power in said reception chip timing from eigenvalues of said covariant matrix; and

5 SIR calculating means deriving a SIR at said reception chip timing from said desired signal power and said interference signal power.

14. A communication quality measuring apparatus in CDMA
10 cellular system as claimed in claim 13, which further comprises:

 third power calculation means for deriving an averaged desired signal power and an averaged interference signal power by performing averaging in a given period from
15 said desired signal power and said interference signal power obtained in said first power calculation means and a second power calculation means.

15. A communication quality measuring apparatus in CDMA
20 cellular system as claimed in claim 14, wherein when the channel to be measured is plural and only one correlation detector is useful,

 said third power calculating means derives said averaged desired signal power and said average
25 interference signal power in time division, and

 said SIR calculation means derives said SIR of a plurality of channels in time division.

16. A communication quality measuring apparatus in CDMA cellular system as claimed in claim 13, wherein when the channel to be measured is plural and only one correlation
5 detector is useful,

correlation detection of a plurality of channels is performed in time division for generating two series generated in the same reception chip timing per channel.

10 17. A communication quality measuring apparatus in CDMA cellular system as claimed in claim 16, which further comprises:

fourth power calculation means for deriving an averaged desired signal power and an averaged interference
15 signal power by averaging a given period from said desired signal power and said interference signal power obtained in said first power calculation means and a second power calculation means.

20 18. A communication quality measuring apparatus in CDMA cellular system as claimed in claim 13, which further comprises

path detection means for deriving a path between transmitter and receiver to be effective for communication
25 from a value of said SIR obtained in said SIR calculation means.

19. A communication quality measuring apparatus in CDMA cellular system detecting a reception chip timing of a channel to be measured and measuring communication quality, comprising:

5 time series generating means for generating two series of data consisted of a time series data of a detected value and a time series data delayed for one, two or more periods, with respect to said reception chip timing where the detected value becomes the same;

10 adding means for deriving an add vector from addition of received signal vector between two points close in reception timing when said two series data generated in said time series generating means becomes a particular correlation value;

15 subtracting means for deriving a difference vector from a difference of received signal vectors between two points close in reception timing;

 second power calculation means for deriving a desired signal power and an interference signal power by
20 averaging said add vectors and said difference vectors;
and

 SIR calculating means deriving a SIR at said reception chip timing from said desired signal power and said interference signal power.

25

20. A communication quality measuring apparatus in CDMA cellular system as claimed in claim 19, which further

comprises

third power calculation means for deriving an averaged desired signal power and an averaged interference signal power by performing averaging in a given period from
5 said desired signal power and said interference signal power obtained in a first power calculation means and said second power calculation means.

21. A communication quality measuring apparatus in CDMA
10 cellular system as claimed in claim 20, wherein when the channel to be measured is plural and only one correlation detector is useful,

said third power calculating means derives said averaged desired signal power and said average
15 interference signal power in time division, and

said SIR calculation means derives said SIR of a plurality of channels in time division.

22. A communication quality measuring apparatus in CDMA
20 cellular system as claimed in claim 19, wherein when the channel to be measured is plural and only one correlation detector is useful,

correlation detection of a plurality of channels is performed in time division for generating two series
25 generated in the same reception chip timing per channel.

23. A communication quality measuring apparatus in CDMA

cellular system as claimed in claim 22, which further comprises

fourth power calculation means for deriving an averaged desired signal power and an averaged interference
5 signal power by averaging a given period from said desired signal power and said interference signal power obtained in said first power calculation means and a second power calculation means.

10 24. A communication quality measuring apparatus in CDMA cellular system as claimed in claim 19, which further comprises

path detection means for deriving a path between transmitter and receiver to be effective for communication
15 from a value of said SIR obtained in said SIR calculation means.

25. A communication quality measuring method in CDMA cellular system detecting reception chip timing of channel
20 to be measured repeatedly transmitted a transmission symbol series of a known pattern and performing measurement of communication quality, comprising:

correlation detection step of performing correlation detection of received signal using a code
25 series spreading said channel to be measured;

delay step of delaying one of received series detected in said correlation detection step for one, two

or more symbol period within a range where mutual correlation between transmission symbol series is 1 and influence of a propagation path can be regarded as the same;

vector calculation step of calculating difference
5 vector and add vector from difference value and add value
of respective received signal vectors of the same
reception chip timing in the other received series
detected by said correlation detection step and the
received series provided delay in said delay step; and
10 communication quality calculation step of
calculating a desired signal power, an interference signal
power and SIR from said difference vector and said add
vector calculated in said vector calculation step.

15 26. A communication quality measuring method in CDMA
cellular system as claimed in claim 25, which further
comprises

vector selection step of selecting only result of
calculation at the same reception chip timing of received
20 symbol matching respective transmission symbols among
difference vector and add vector calculated in said vector
calculation step when a correlation between the other
received series detected in said correlation detection
step and the received series delayed in said delay step
25 is smaller than one.

27. A communication quality measuring method in CDMA

cellular system detecting reception chip timing of channel to be measured repeatedly transmitted transmission symbol series of respectively different known pattern using common spreading code from different antennas upon use of
5 transmit diversity and performing measurement of communication quality, comprising:

correlation detection step of performing correlation detection of received signal using a code series spreading said channel to be measured;

10 delay step of delaying one of received series detected in said correlation detection step for one, two or more symbol period within a range where mutual correlation between transmission symbol series in said different antennas is 1 and influence of a propagation path
15 can be regarded as the same;

vector calculation step of calculating difference vector and add vector from difference value and add value of respective received signal vectors of the same reception chip timing in the other received series
20 detected by said correlation detection step and the received series provided delay in said delay step; and

communication quality calculation step of calculating a desired signal power, an interference signal power and SIR from said difference vector and said add
25 vector calculated in said vector calculation step.

28. A communication quality measuring method in CDMA

cellular system as claimed in claim 27, which further comprises

vector selection step of selecting only result of calculation at the same reception chip timing of received symbol matching respective transmission symbols of the different antenna among difference vector and add vector calculated in said vector calculation step when a mutual correlation between transmission symbol series in said different antenna is smaller than one.

10

29. A communication quality measuring apparatus in CDMA cellular system detecting reception chip timing of channel to be measured repeatedly transmitted a transmission symbol series of a known pattern and performing

15 measurement of communication quality, comprising:

correlation detection means for performing correlation detection of received signal using a code series spreading said channel to be measured;

delay means for delaying one of received series detected in said correlation detection step for one, two or more symbol period within a range where mutual correlation between transmission symbol series is 1 and influence of a propagation path can be regarded as the same;

vector calculation means for calculating difference vector and add vector from difference value and add value of respective received signal vectors of the same reception chip timing in the other received series

detected by said correlation detection step and the received series provided delay in said delay step; and communication quality calculation means for calculating a desired signal power, an interference signal power and SIR from said difference vector and said add vector calculated in said vector calculation step.

30. A communication quality measuring apparatus in CDMA cellular system as claimed in claim 29, which further comprises

vector selection means for selecting only result of calculation at the same reception chip timing of received symbol matching respective transmission symbols among difference vector and add vector calculated in said vector calculation step when a correlation between the other received series detected in said correlation detection step and the received series delayed in said delay step is smaller than one.

31. A communication quality measuring apparatus in CDMA cellular system detecting reception chip timing of channel to be measured repeatedly transmitted transmission symbol series of respectively different known pattern using common spreading code from different antennas upon use of transmit diversity and performing measurement of communication quality, comprising:

correlation detection means for performing

correlation detection of received signal using a code series spreading said channel to be measured;

delay means for delaying one of received series detected in said correlation detection step for one, two
5 or more symbol period within a range where mutual correlation between transmission symbol series in said different antennas is 1 and influence of a propagation path can be regarded as the same;

vector calculation means for calculating difference
10 vector and add vector from difference value and add value of respective received signal vectors of the same reception chip timing in the other received series detected by said correlation detection step and the received series provided delay in said delay step; and

15 communication quality calculation means for calculating a desired signal power, an interference signal power and SIR from said difference vector and said add vector calculated in said vector calculation step.

20 32. A communication quality measuring apparatus in CDMA cellular system as claimed in claim 31, which further comprises

vector selection means for selecting only result of calculation at the same reception chip timing of received
25 symbol matching respective transmission symbols of the different antenna among difference vector and add vector calculated in said vector calculation step when a mutual

correlation between transmission symbol series in said different antenna is smaller than one.

33. For measuring communication quality in a mobile
5 receiving station in a mobile communication system
employing a CDMA cellular system, using channel spread
with spreading code and constantly transmitted from a base
station, a synchronization detecting method in CDMA
cellular system comprising the step of:

10 in said mobile receiving station, determining a
synchronization chip timing of a channel to be measured
by detecting partial correlation value between spreading
code to be measured and a received signal.

15 34. A synchronization detecting method in CDMA cellular
system as claimed in claim 33, wherein a matched filter
is used upon detection of said partial correlation value
and a synchronization chip timing of the channel to be
measured is detected by sequentially rewriting the code
20 in said matched filter.

35. A synchronization detecting method in CDMA cellular
system as claimed in claim 34, wherein an averaging period
and sampling period are preliminarily set in advance of
25 performing said synchronization detection, and the
synchronization chip timing of the channel to be measured
is determined on the basis of a value derived by averaging

of detected plurality of partial correlation values in said averaging period by detecting the partial detection values per set sampling period.

5 36. A synchronization detecting method in CDMA cellular system as claimed in claim 35, wherein upon averaging process of said detected plurality of partial correlation values, the synchronization chip timing of the channel to be measured is determined using an averaged value by
10 preliminarily calculating said averaged value by power averaging process or vector averaging process.

37. A synchronization detecting method in CDMA cellular system as claimed in claim 36, wherein the synchronization
15 chip timing of the channel to be measured is determined by enabling setting of process of said averaging process for a plurality of times and using the averaged value derived by a plurality of times of averaging process by the same or different averaging method in each process.

20

38. A synchronization detecting method in CDMA cellular system as claimed in claim 33, wherein an averaging period and sampling period are preliminarily set in advance of performing said synchronization detection, and the
25 synchronization chip timing of the channel to be measured is determined on the basis of a value derived by averaging of detected plurality of partial correlation values in

said averaging period by detecting the partial detection values per set sampling period.

39. A synchronization detecting method in CDMA cellular
5 system as claimed in claim 38, wherein upon averaging
process of said detected plurality of partial correlation
values, the synchronization chip timing of the channel to
be measured is determined using an averaged value by
preliminarily calculating said averaged value by power
10 averaging process or vector averaging process.

40. A synchronization detecting method in CDMA cellular
system as claimed in claim 39, wherein the synchronization
chip timing of the channel to be measured is determined
15 by enabling setting of process of said averaging process
for a plurality of times and using the averaged value
derived by a plurality of times of averaging process by
the same or different averaging method in each process.

20 41. A synchronization detecting method in CDMA cellular
system comprising the steps of performing synchronization
chip timing detection process for a plurality of times as
defined in any one of claims 33 to 40, and making judgment
whether synchronization chip timing of a channel to be
25 measured is to be determined using an average value of a
plurality of timing value and a standard deviation value,
the synchronization chip timing of the channel to be

measured is determined with providing a given range, or synchronization detection is to be performed again.

42. For measuring communication quality in a mobile receiving station in a mobile communication system employing a CDMA cellular system, using channel spread with spreading code and constantly transmitted from a base station, a synchronization detecting device in CDMA cellular system comprising:

10 said mobile receiving station including means for determining a synchronization chip timing of a channel to be measured by detecting partial correlation value between spreading code to be measured and a received signal.

15 43. A synchronization detecting device in CDMA cellular system as claimed in claim 42, wherein said means includes a matched filter is used upon detection of said partial correlation value and a synchronization chip timing of the channel to be measured is detected by sequentially
20 rewriting the code in said matched filter.

44. A synchronization detecting device in CDMA cellular system as claimed in claim 43, wherein said means preliminarily sets an averaging period and sampling period
25 in advance of performing said synchronization detection, and determines the synchronization chip timing of the channel to be measured on the basis of a value derived by

averaging of detected plurality of partial correlation values in said averaging period by detecting the partial detection values per set sampling period.

5 45. A synchronization detecting device in CDMA cellular system as claimed in claim 44, wherein upon averaging process of said detected plurality of partial correlation values, said means determines the synchronization chip timing of the channel to be measured using an averaged value
10 by preliminarily calculating said averaged value by power averaging process or vector averaging process.

46. A synchronization detecting device in CDMA cellular system as claimed in claim 45, wherein said means
15 determines the synchronization chip timing of the channel to be measured by enabling setting of process of said averaging process for a plurality of times and using the averaged value derived by a plurality of times of averaging process by the same or different averaging device in each
20 process.

47. A synchronization detecting device in CDMA cellular system as claimed in claim 42, wherein said means
preliminarily sets an averaging period and sampling period
25 in advance of performing said synchronization detection, and determines the synchronization chip timing of the channel to be measured on the basis of a value derived by

averaging of detected plurality of partial correlation values in said averaging period by detecting the partial detection values per set sampling period.

5 48. A synchronization detecting device in CDMA cellular system as claimed in claim 47, wherein upon averaging process of said detected plurality of partial correlation values, said means determines the synchronization chip timing of the channel to be measured using an averaged value
10 by preliminarily calculating said averaged value by power averaging process or vector averaging process.

49. A synchronization detecting device in CDMA cellular system as claimed in claim 48, wherein said means
15 determines the synchronization chip timing of the channel to be measured by enabling setting of process of said averaging process for a plurality of times and using the averaged value derived by a plurality of times of averaging process by the same or different averaging device in each
20 process.

50. A synchronization detecting device in CDMA cellular system comprising means for performing synchronization chip timing detection process for a plurality of times as
25 defined in any one of claims 42 to 49, and making judgment whether synchronization chip timing of a channel to be measured is to be determined using an average value of a

plurality of timing value and a standard deviation value, the synchronization chip timing of the channel to be measured is determined with providing a given range, or synchronization detection is to be performed again.

5

51. In a mobile communication system employing CDMA cellular system using a common pilot channel constantly transmitted from a base station in a mobile communication system upon use of transmit diversity for measuring communication quality in a mobile station being measured, a synchronization detecting method in CDMA cellular system comprising:

said mobile station separating received signal vector obtained by correlation detection of received signal per symbol into received signal vector per transmission antenna by performing addition and subtraction before and after symbol, and determining synchronization chip timing on the basis of a value derived by addition of the received signal vector in power.

20

52. A synchronization detecting method in CDMA cellular system as claimed in claim 51, wherein the synchronization chip timing is determined on the basis of a value derived by addition of an average vector derived by averaging received signal vector per each of a plurality transmission antenna obtained over a plurality of period with taking a unit where symbol pattern of signals

transmitted from a plurality of transmission antenna becomes orthogonal between antennas.

53. A synchronization detecting method in CDMA cellular
5 system determining synchronization chip timing on the
basis of a value derived by performing synchronization
chip timing detection process defined in claim 51 or 52
for a plurality of times and performing addition of
obtained plurality of power.

10

54. In a mobile communication system employing CDMA
cellular system using a common pilot channel constantly
transmitted from a base station in a mobile communication
system upon use of transmit diversity for measuring
15 communication quality in a mobile station being measured,
a synchronization detecting device in CDMA cellular system
comprising:

said mobile station includes means for separating
received signal vector per separating received signal
20 vector obtained by detecting correlation per symbol by
performing addition and subtraction before and after
symbol, and determining synchronization chip timing on the
basis of a value derived by addition of the received signal
vector in power.

25

55. A synchronization detecting device in CDMA cellular
system as claimed in claim 54, wherein said means

determines the synchronization chip timing on the basis of a value derived by addition of an average vector derived by averaging received signal vector per each of a plurality of transmission antenna obtained over a plurality of period
5 with taking a unit where symbol pattern of signals transmitted from a plurality of transmission antenna becomes orthogonal between antennas.

56. A synchronization detecting device in CDMA cellular
10 system determining synchronization chip timing on the basis of a value derived by performing synchronization chip timing detection process defined in claim 54 or 55 for a plurality of times and performing addition of obtained plurality of power.

15

57. In a mobile communication system employing CDMA cellular system using a common pilot channel constantly transmitted from a base station in a mobile communication system upon use of transmit diversity for measuring
20 communication quality in a mobile station being measured, a communication quality measuring method in CDMA cellular system comprising:

in said mobile station, received signal vector obtained by correlation detection of received signal per
25 symbol being separated into received signal vector per transmission antenna by performing addition and subtraction before and after symbol, and

a desired signal power, an interference signal power and SIR being calculated by deriving add vector and difference vector of two received signal vectors spaced for a plurality of symbol periods per transmission antenna, and performing averaging process of said add vector and said difference vector.

58. A communication quality measuring method in CDMA cellular system as claimed in claim 57, wherein said add vector and said difference vector are derived from the received signal vector of one transmission antenna and said desired signal power, said interference signal power and SIR are derived by adding a predetermined correction value.

59. A communication quality measuring method in CDMA cellular system as claimed in claim 58, wherein said desired signal power and said interference signal power are averaged, and said desired signal power, said interference signal power and SIR are calculated by adding a predetermined correction value.

60. In a mobile communication system employing CDMA cellular system using a common pilot channel constantly transmitted from a base station in a mobile communication system upon use of transmit diversity for measuring communication quality in a mobile station being measured,

a communication quality measuring apparatus in CDMA cellular system comprising:

5 said mobile station includes means for receiving received signal vector obtained by correlation detection of received signal per symbol being separated into received signal vector per transmission antenna by performing addition and subtraction before and after symbol, and calculating a desired signal power, an interference signal power and SIR by deriving add vector and difference vector of two received signal vectors spaced for a plurality of symbol periods per transmission antenna, and performing averaging process of said add vector and said difference vector.

15 61. A communication quality measuring apparatus in CDMA cellular system as claimed in claim 60, wherein said means derives said add vector and said difference vector from the received signal vector of one transmission antenna and derives said desired signal power, said interference signal power and SIR by adding a predetermined correction value.

25 62. A communication quality measuring apparatus in CDMA cellular system as claimed in claim 61, wherein said means averages said desired signal power and said interference signal power, and calculates said desired signal power, said interference signal power and SIR by adding a

predetermined correction value.

63. A communication quality measuring method in CDMA cellular system,
said method being substantially as described herein in relation to any one embodiment
5 with reference to Figs. 1 - 42.

64. A communication quality measuring apparatus in CDMA cellular
system, said apparatus being substantially as described herein in relation to any one
embodiment with reference to Figs. 1 - 42.

10 65. A synchronization detecting method in CDMA cellular system, said
method being substantially as described herein in relation to any one embodiment with
reference to Figs. 1 - 42.

15 DATED this Fifth Day of April, 2001

NTT DoCoMo, Inc.

Patent Attorneys for the Applicant

SPRUSON & FERGUSON

20

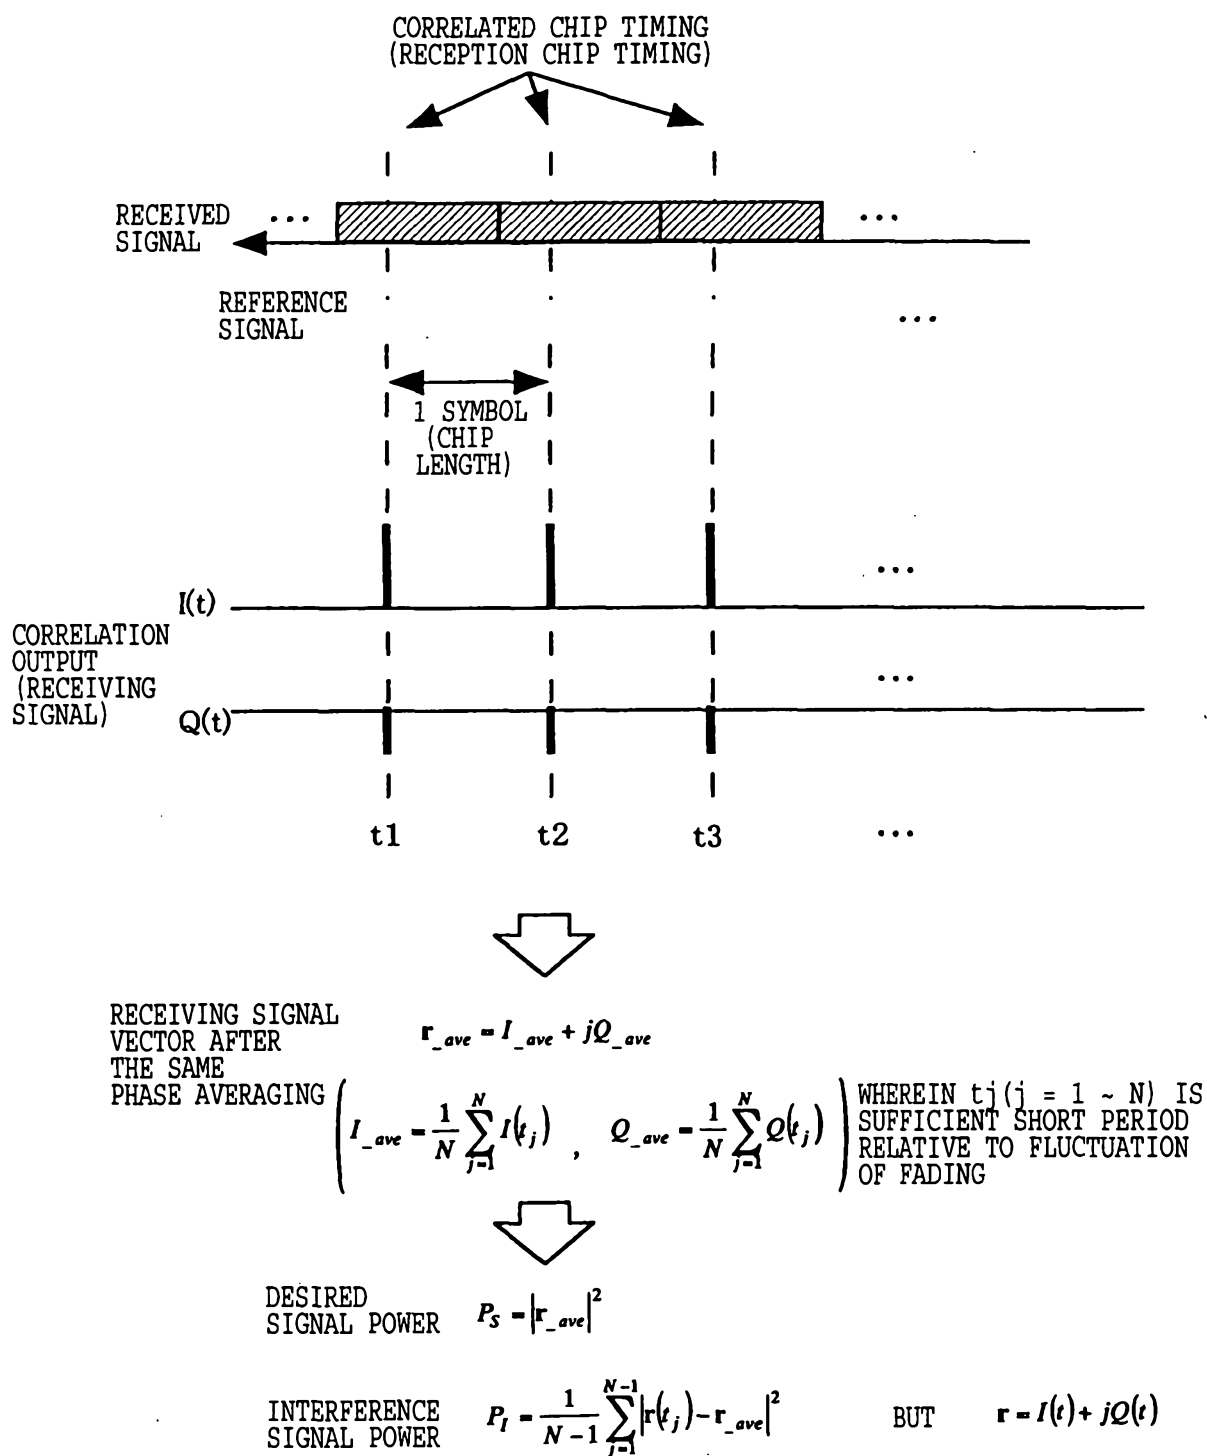


FIG.1

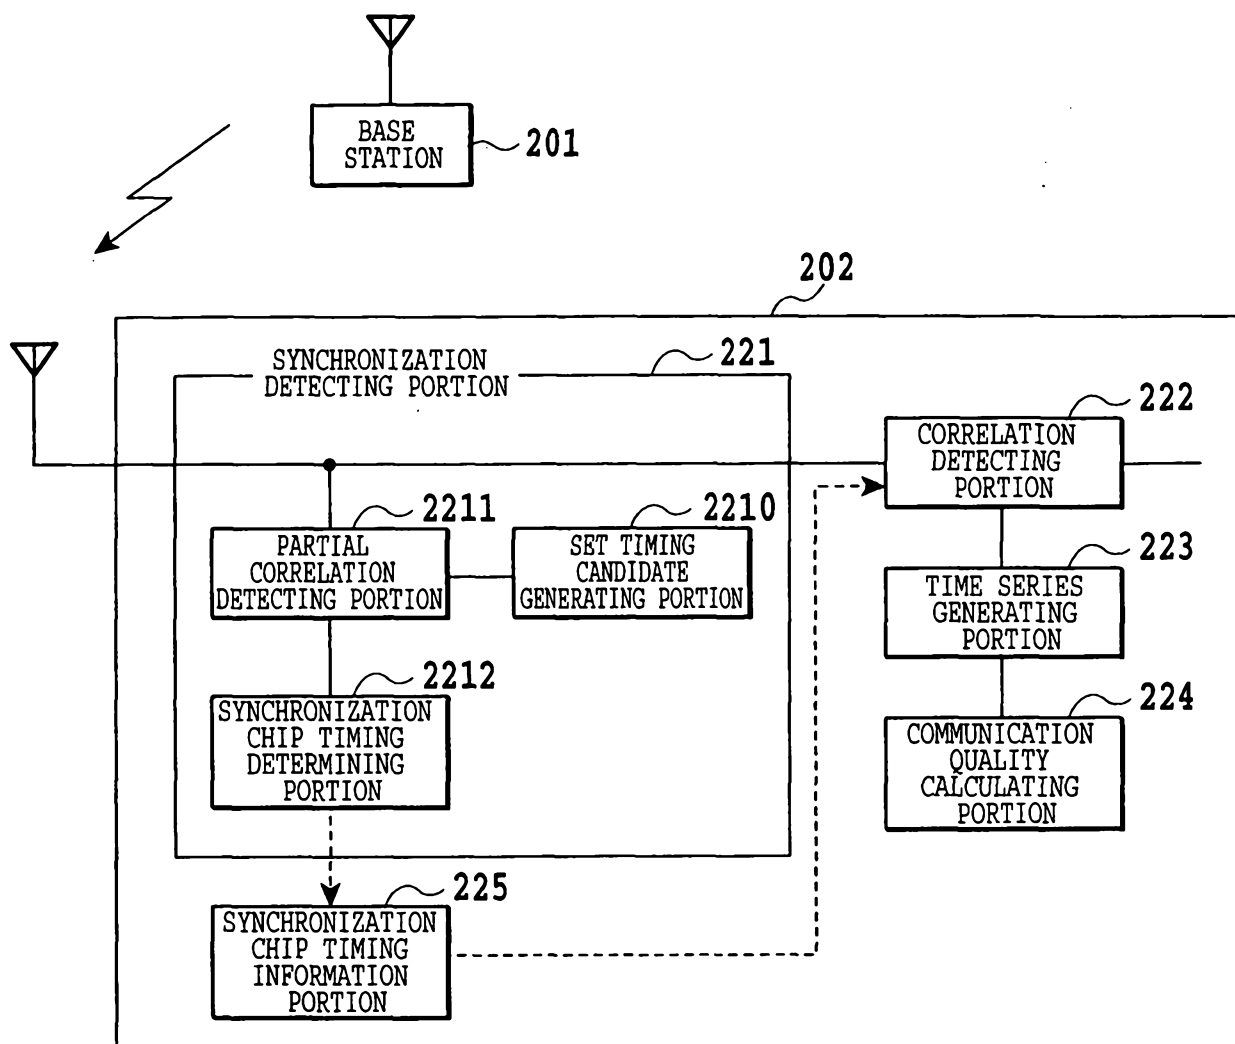


FIG. 2


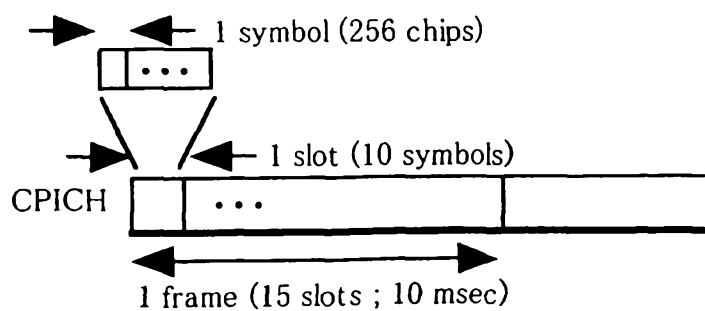


FIG. 3


00 04 01 35083

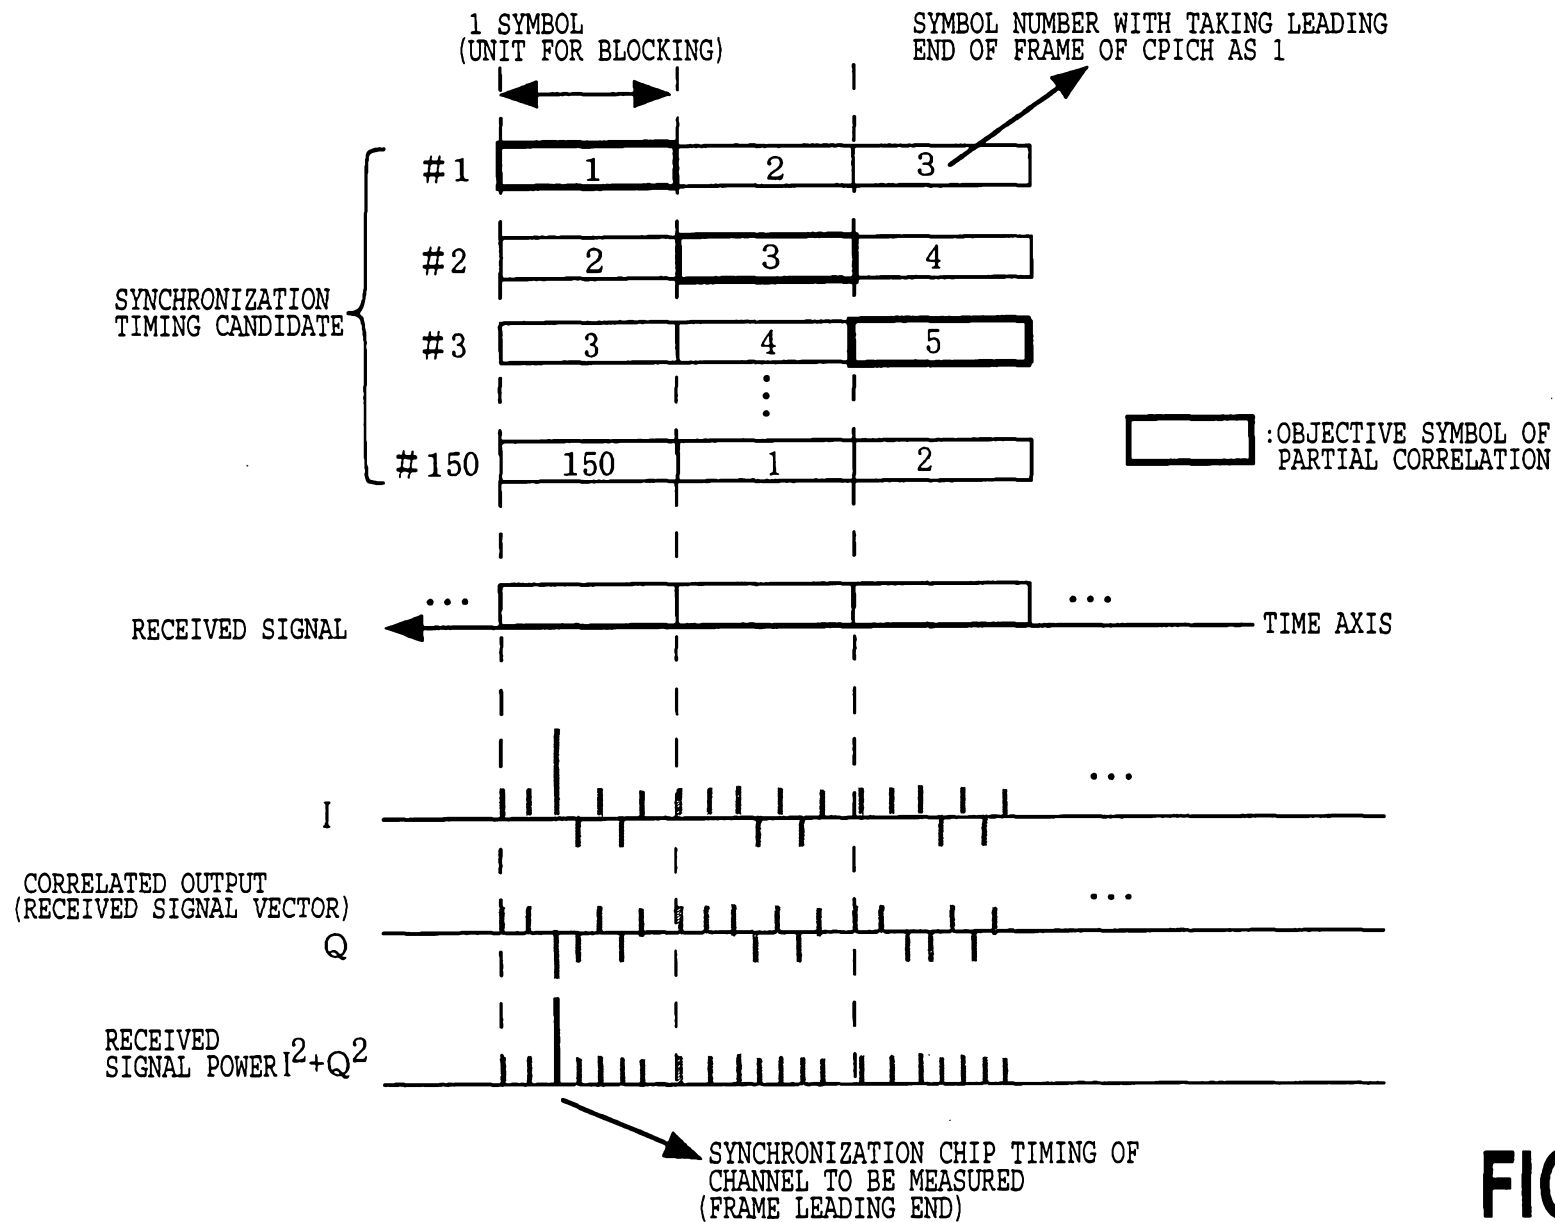

3/41

FIG.4


00 04 01 35003

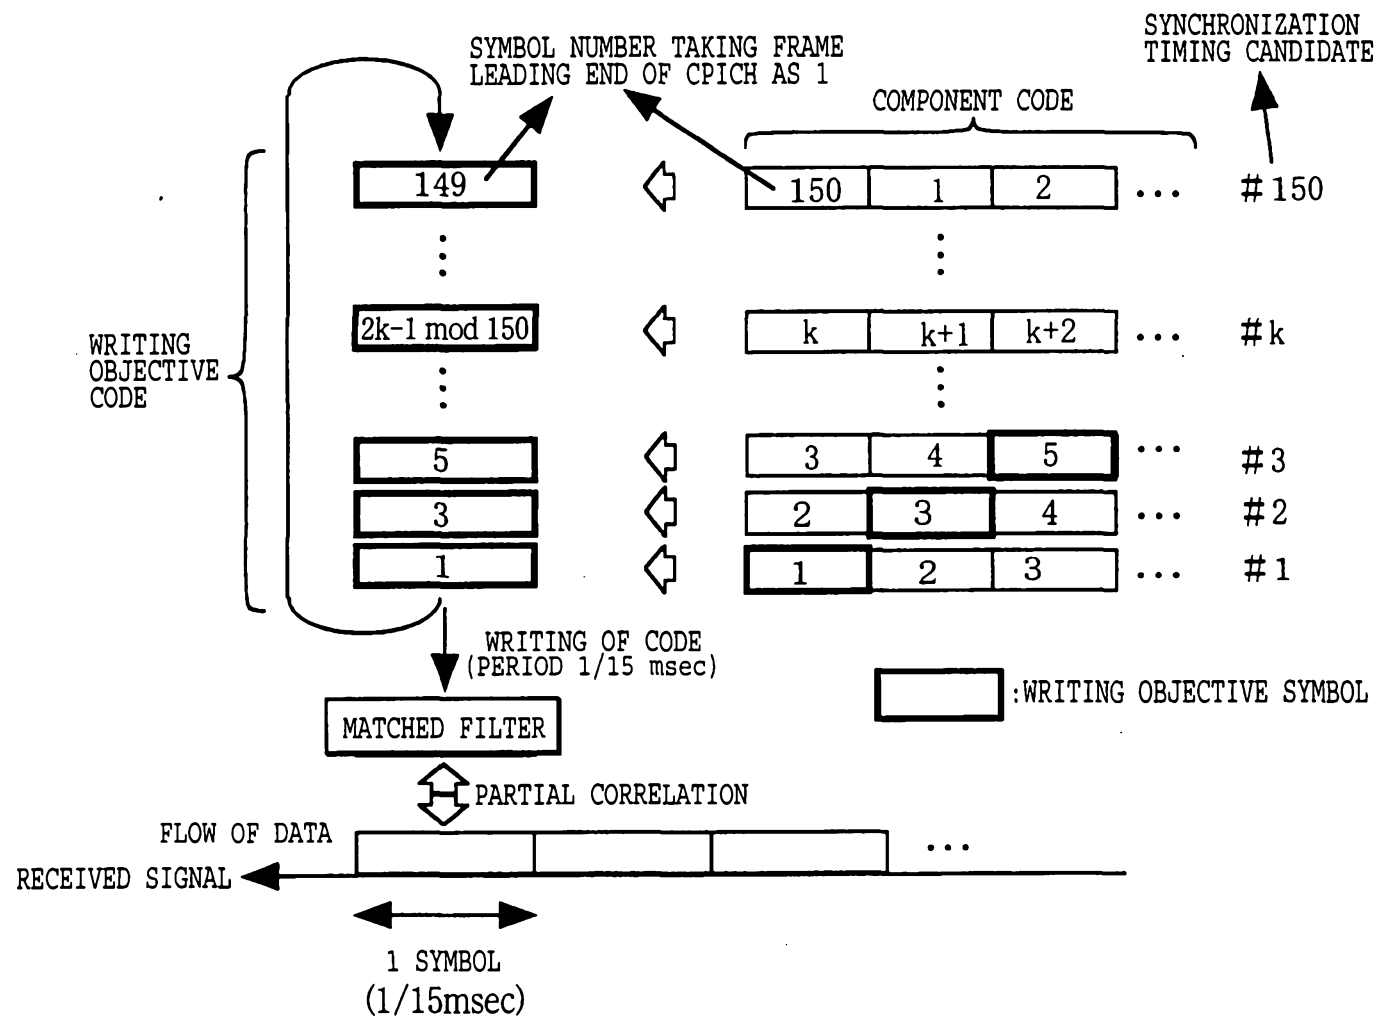

4/41


FIG.5

00 04 01 35063

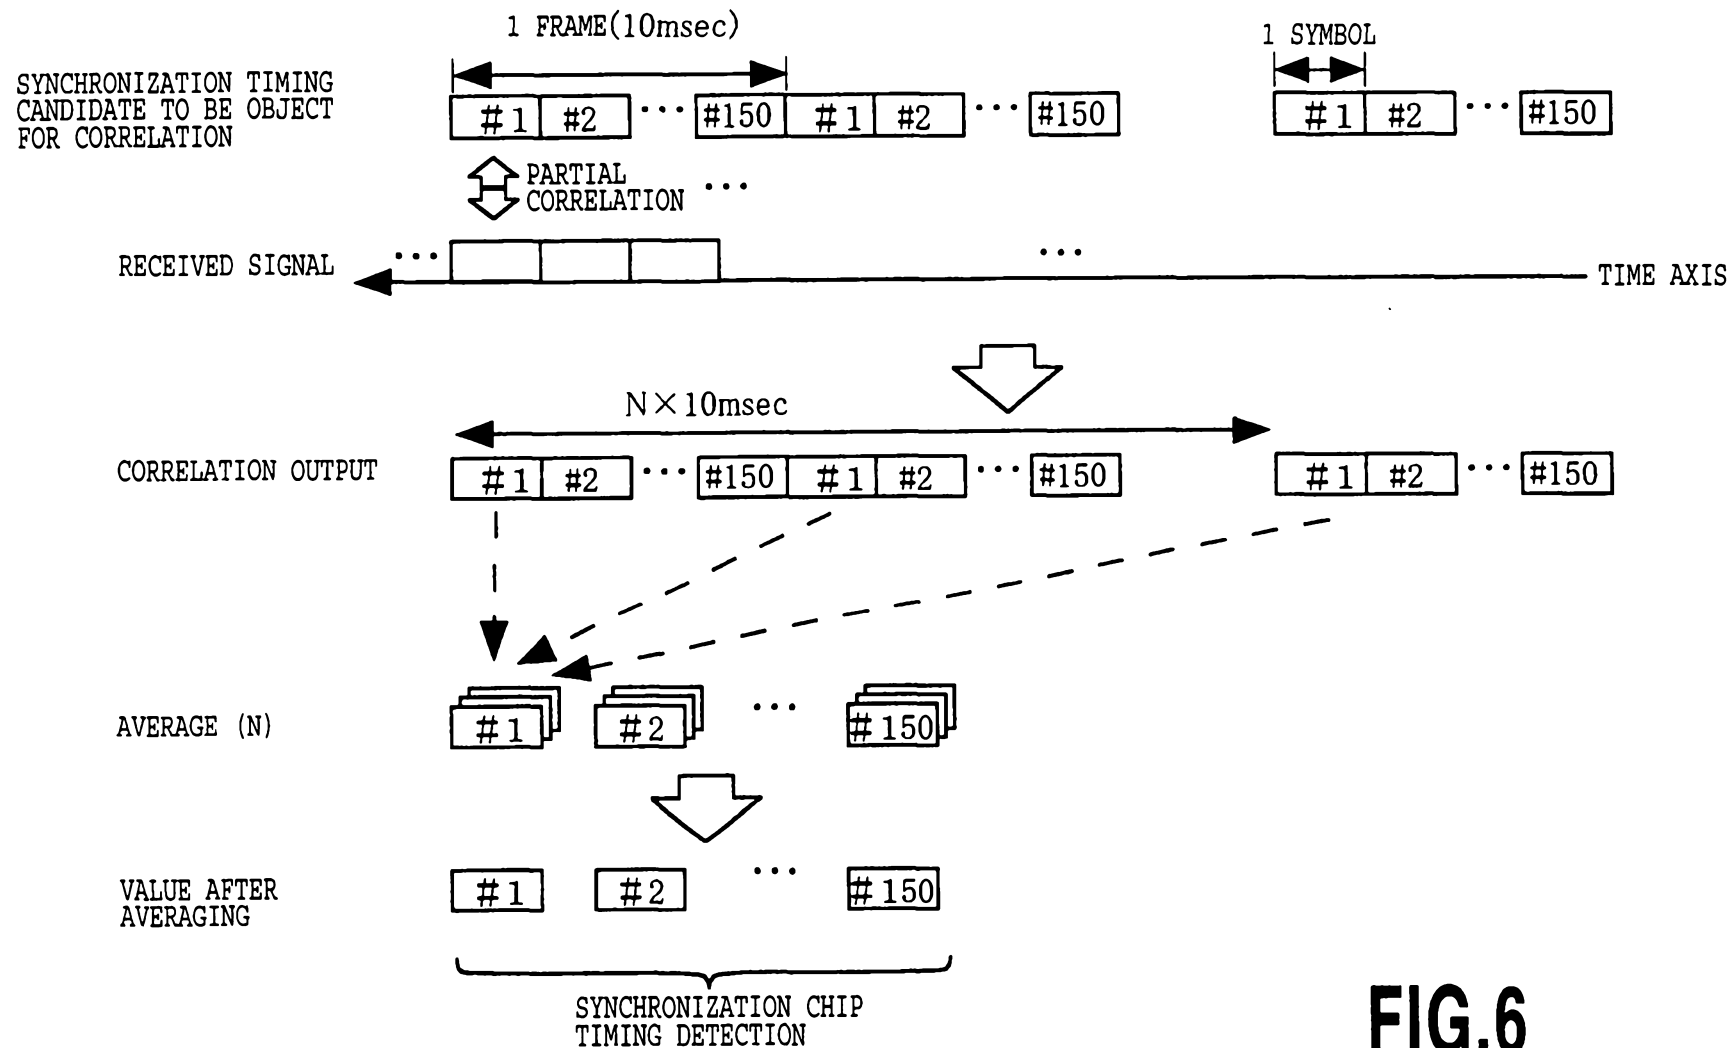

5/41

FIG.6

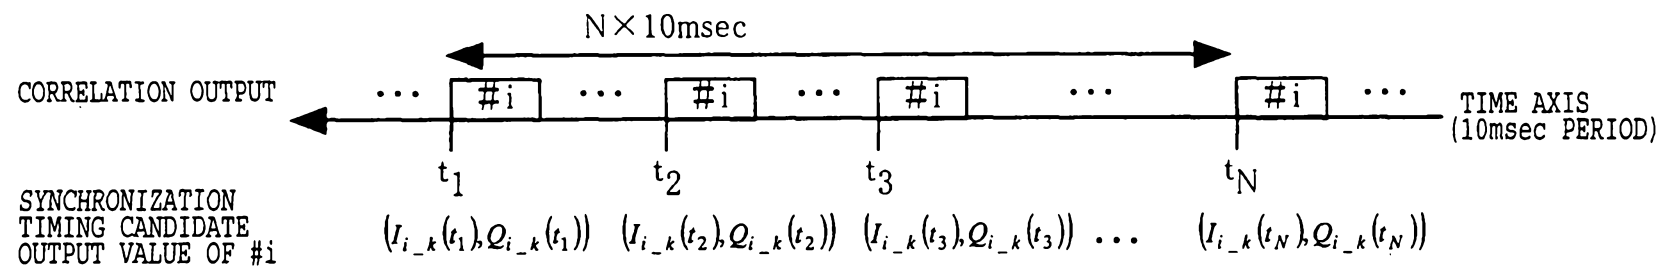

POWER AVERAGE (N)

$$P_{i-k} = \frac{1}{N} \sum_{j=1}^N \{I_{i-k}(t_j)^2 + Q_{i-k}(t_j)^2\}$$

DETECT SYNCHRONIZATION CHIP TIMING FROM RECEIVED SIGNAL POWER
 P_{i-k} ($i = 1, \dots, 150$; $k = 1, \dots, 256$) TO BE MAXIMUM

FIG.7

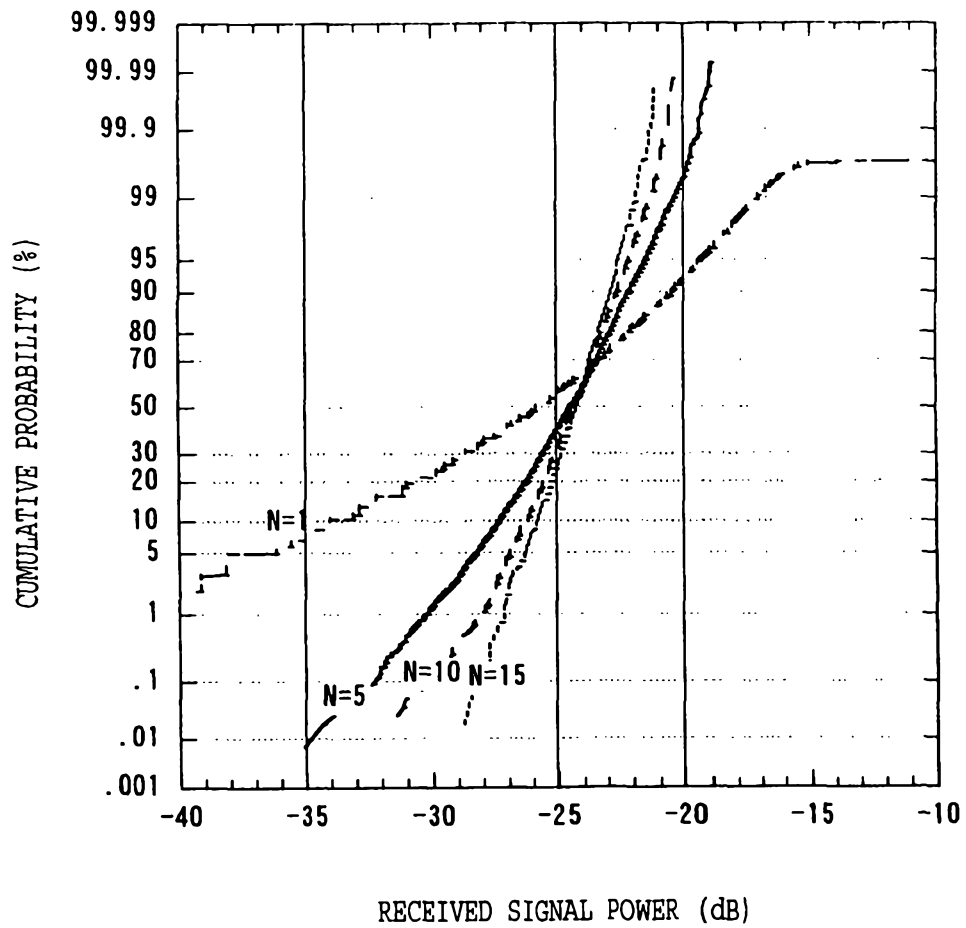


FIG.8

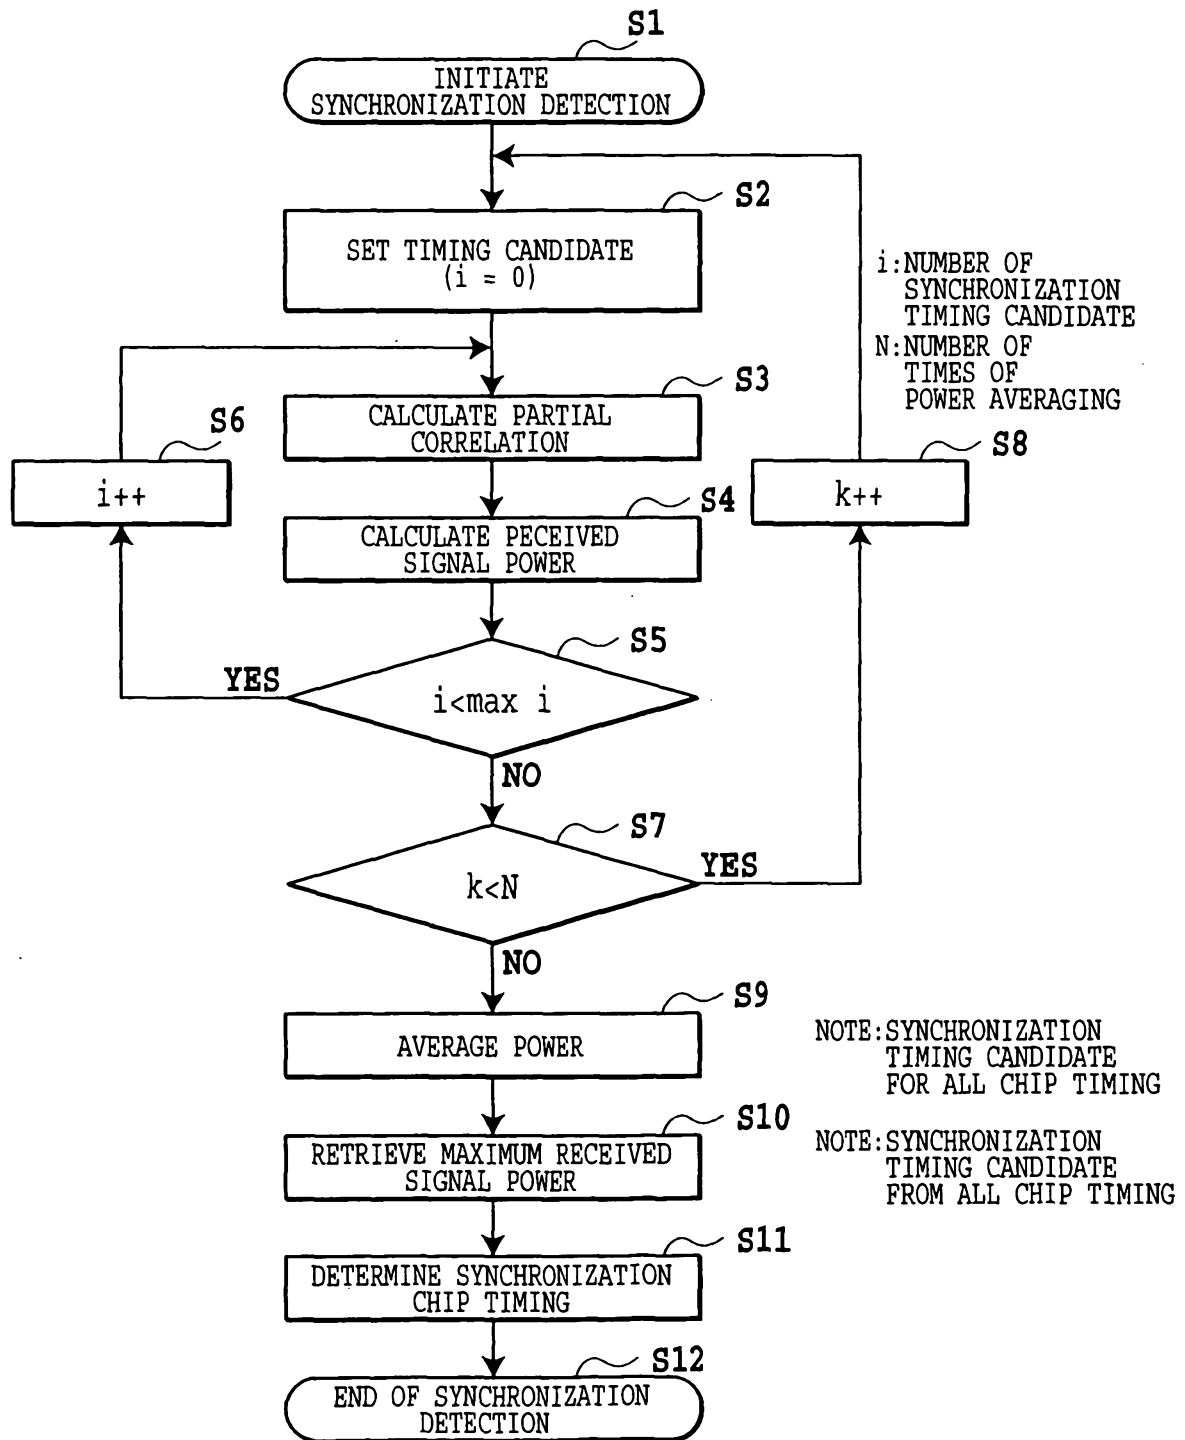


FIG.9

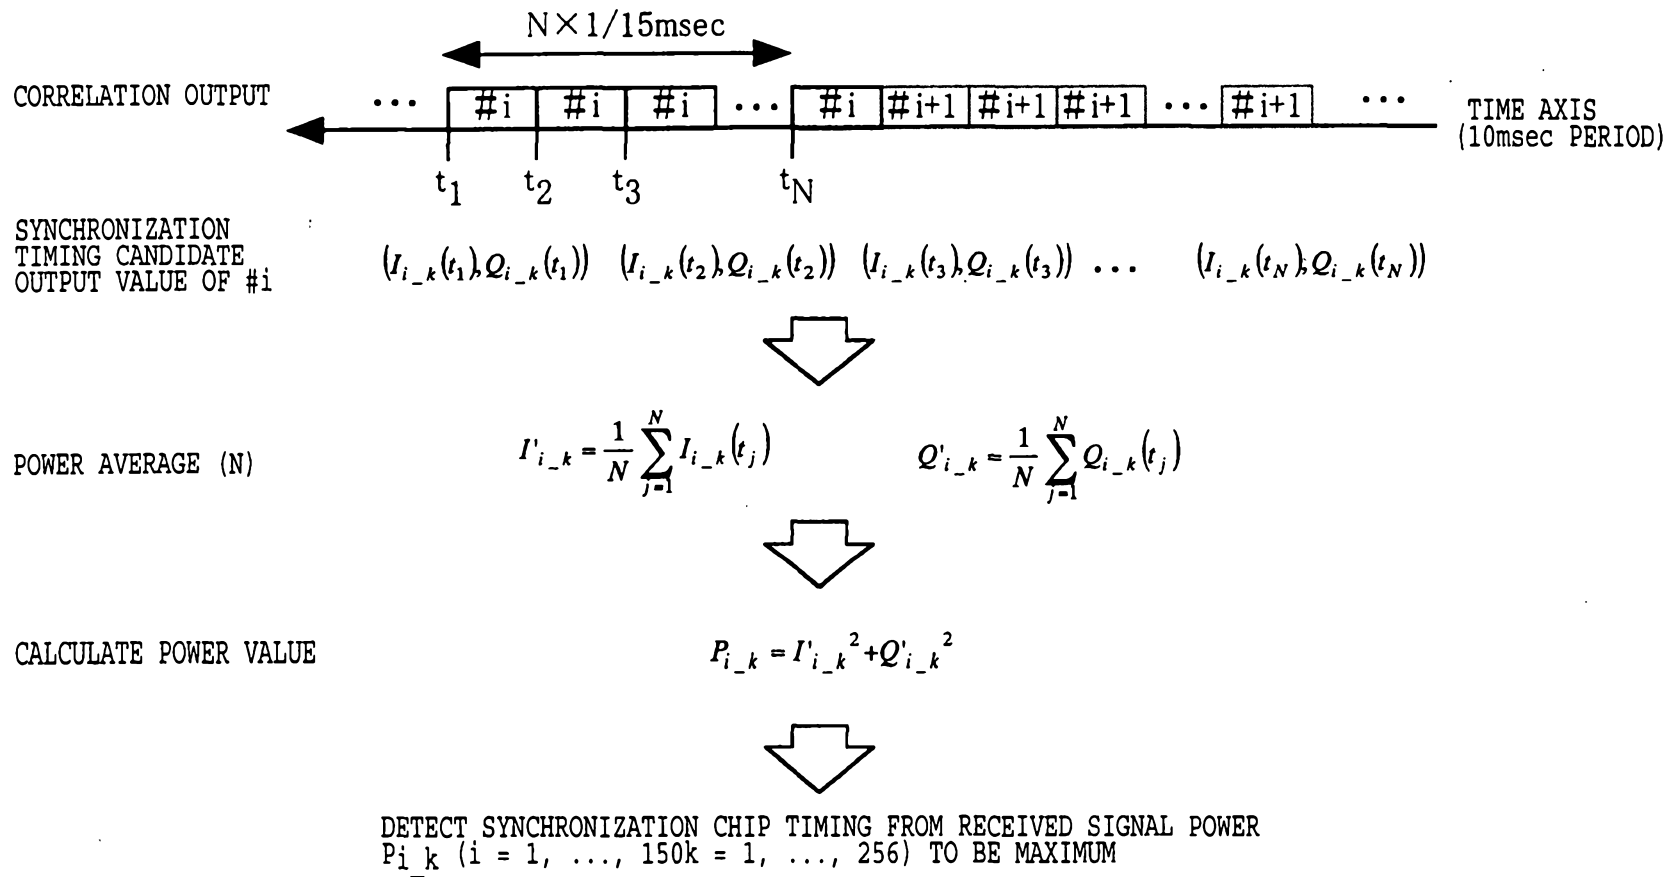


FIG.10

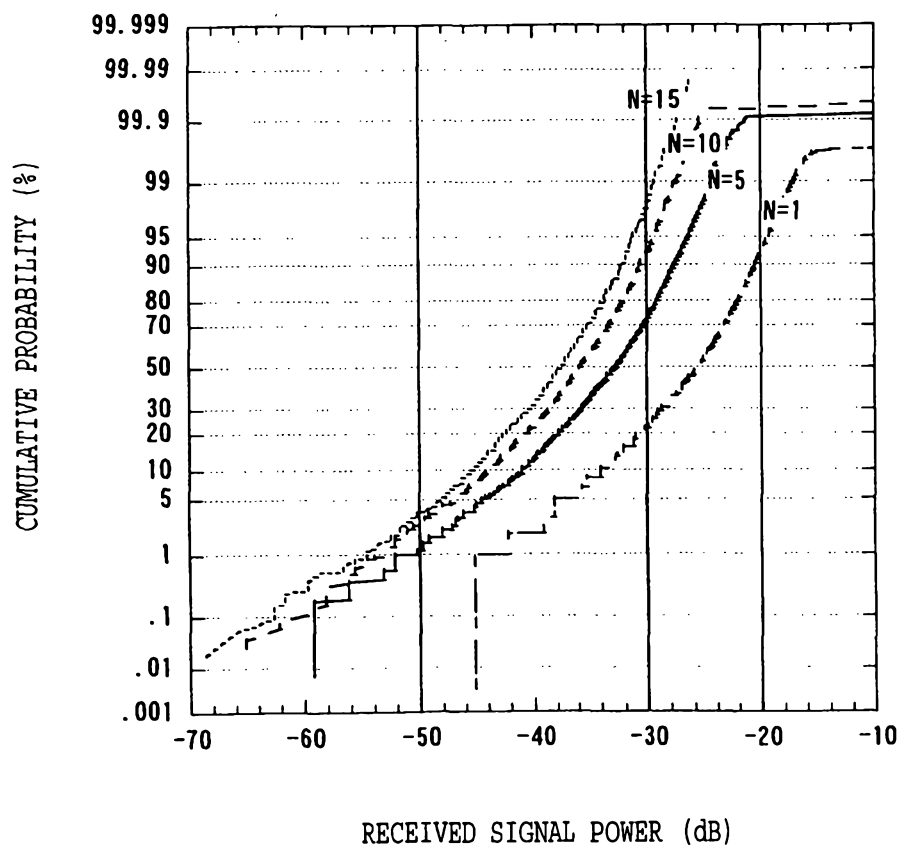


FIG.11

11/41

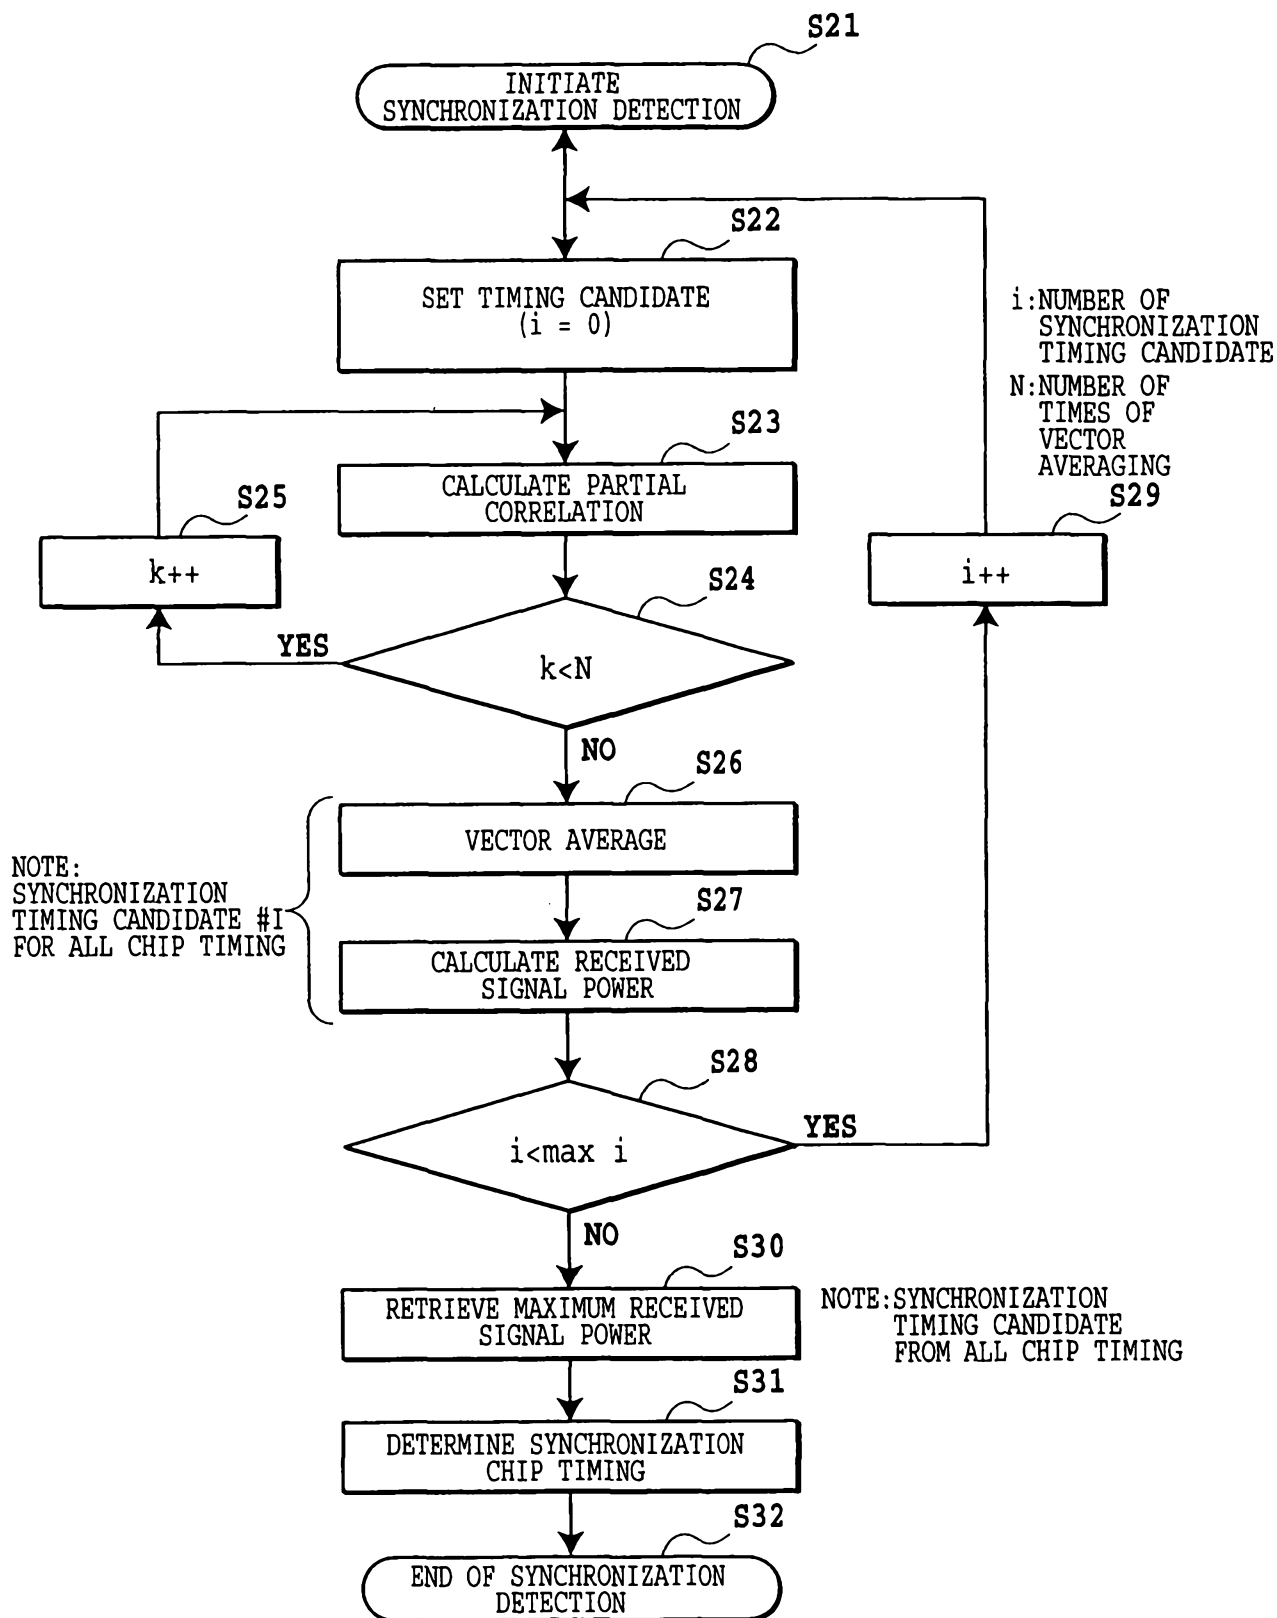


FIG.12

12/41

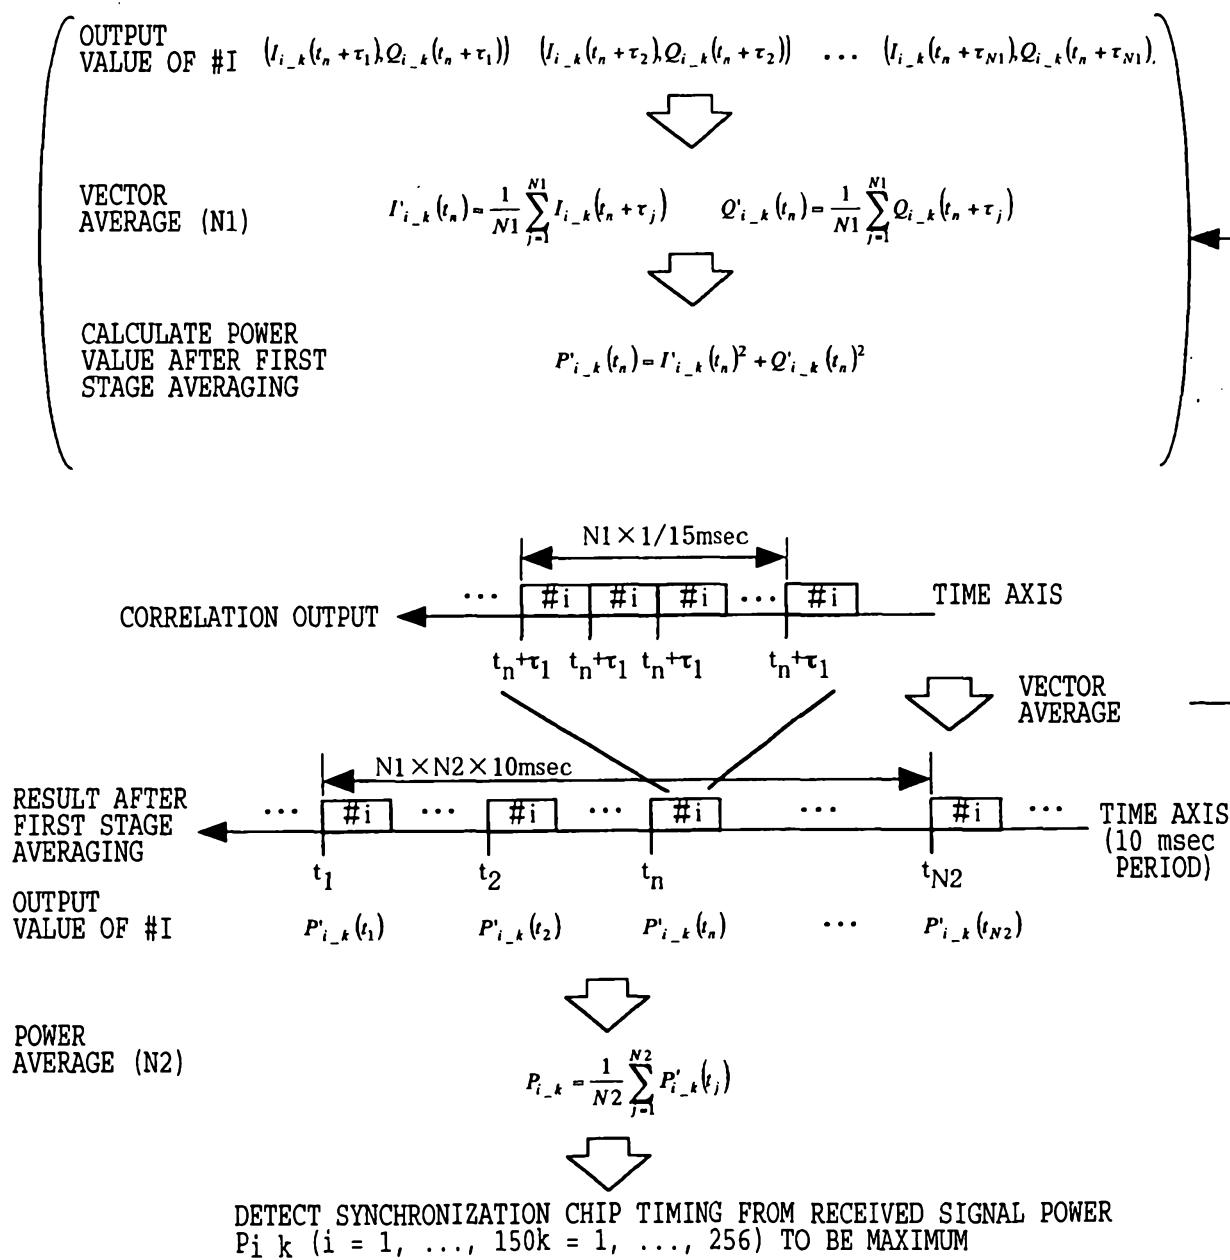


FIG.13

13/41


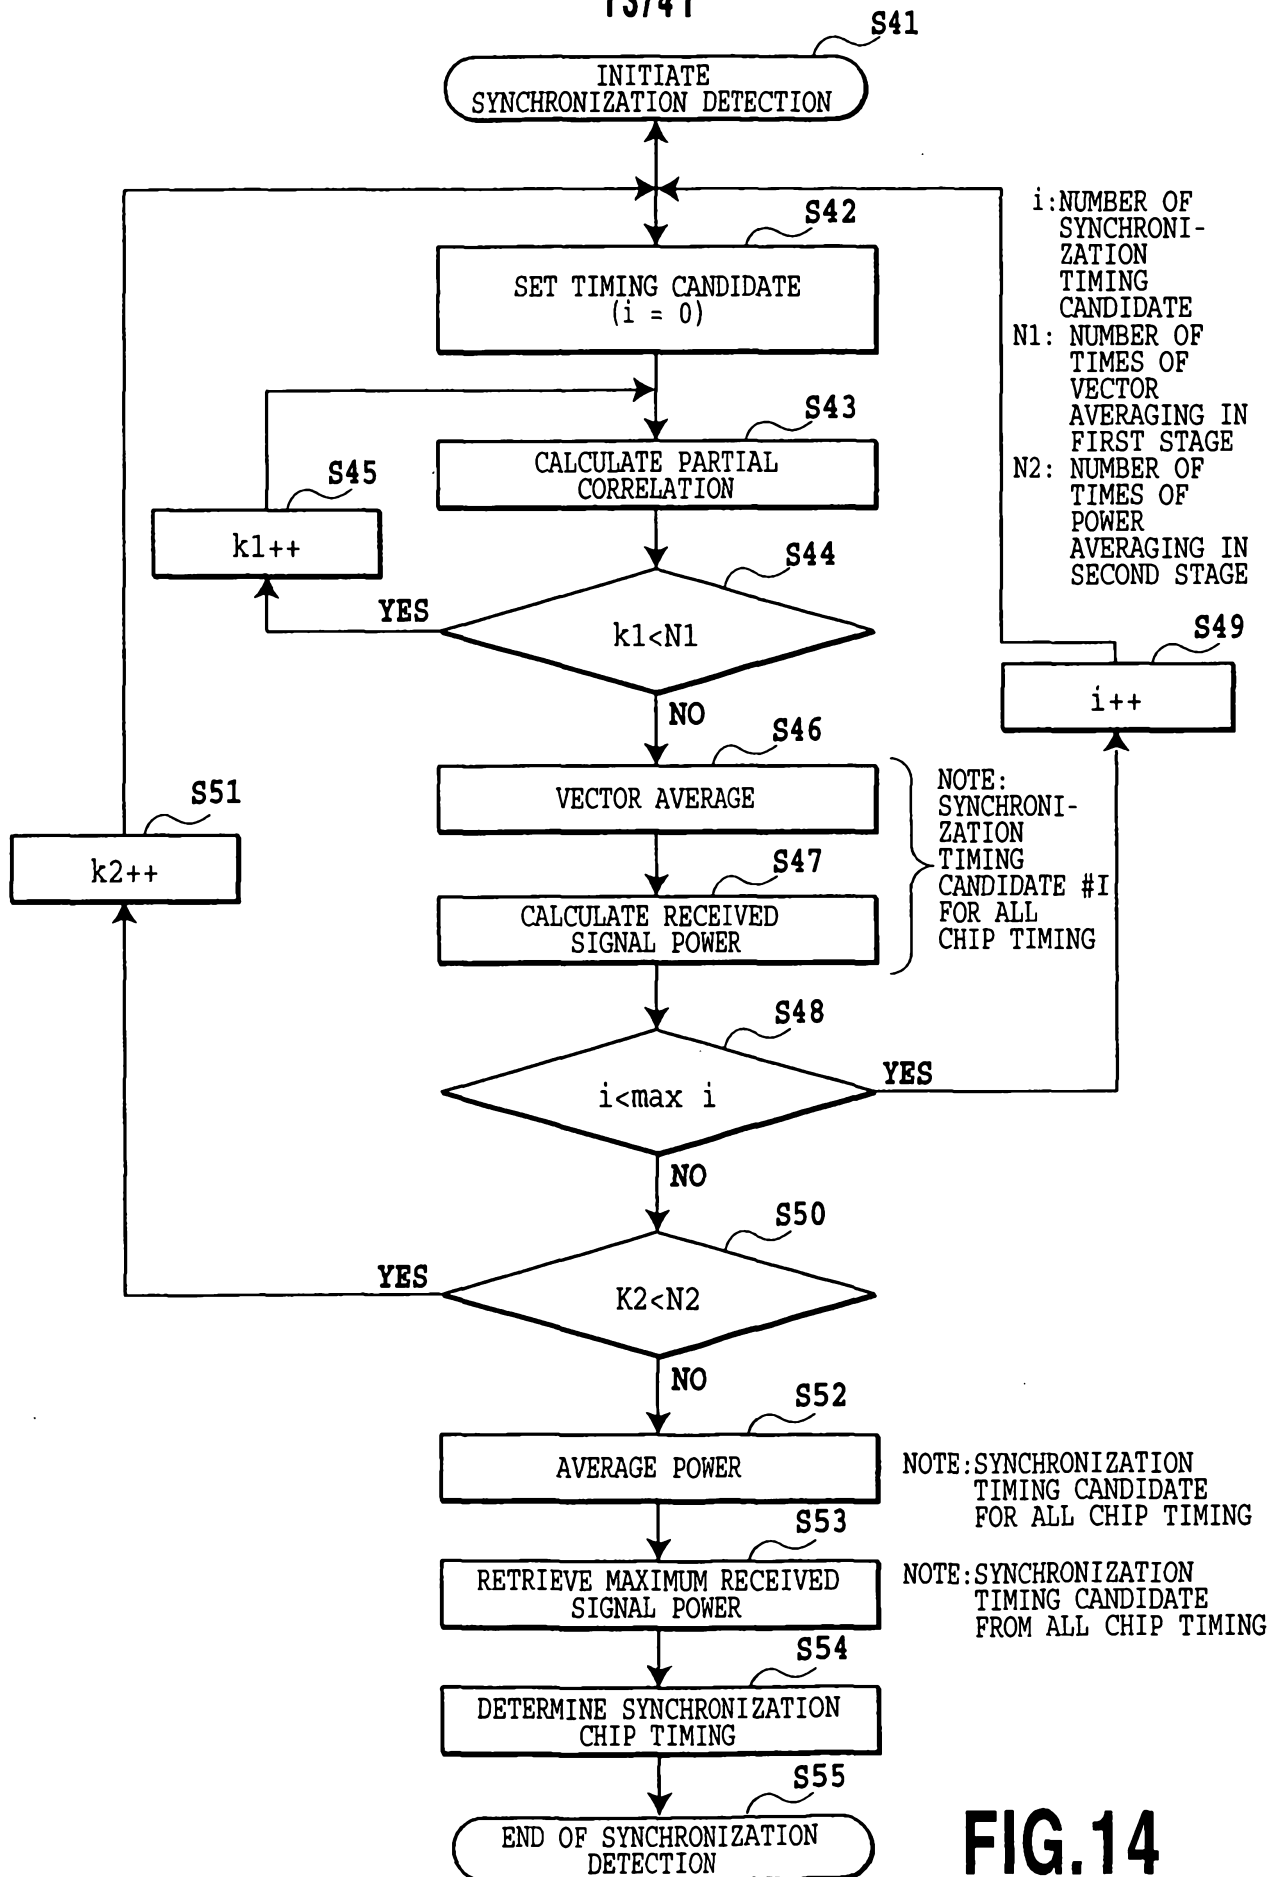


FIG.14

14/41

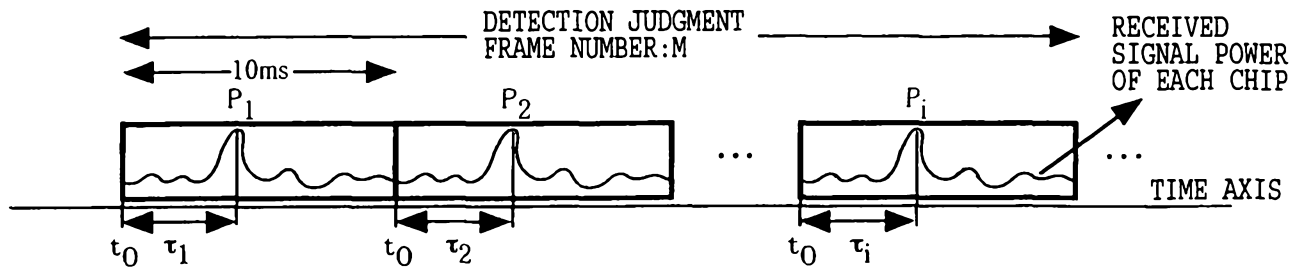

t_0 : VIRTUAL FRAME LEADING END
 p_i : POWER IN DETECTED SYNCHRONIZATION
 CHIP TIMING
 τ_i : DETECTED SYNCHRONIZATION CHIP TIMING

CALCULATE FOR JUDGMENT

AVERAGE VALUE OF SYNCHRONIZATION CHIP TIMING	STANDARD DEVIATION OF SYNCHRONIZATION CHIP TIMING
$T_m = \frac{\sum_{i=1}^M P_i \cdot \tau_i}{\sum_{i=1}^M P_i}$	$T_s = \sqrt{\frac{\sum_{i=1}^M P_i \cdot (\tau_i - T_m)^2}{\sum_{i=1}^M P_i}}$

DETECTION JUDGMENT

$t_s \leq N_{cp} \rightarrow$ A DETECTION SUCCESSFUL
 $t_s > N_{cp} \rightarrow$ A DETECTION FAILED




- START MEASUREMENT BY MEASUREMENT WINDOW SHOWN IN RIGHT SIDE WHEN DETECTION SUCCESSFUL
- PERFORM SYNCHRONIZATION DETECTION AGAIN WHEN DETECTION FAILED

DETERMINE MEASUREMENT WINDOW

MEASUREMENT
WINDOW T_w

$$T_m - N_{cp} \leq T_w \leq T_m + N_{cp}$$



NOTE: DEFINITION OF NCP
 MEASURE 256 CHIPS BY MEASURING PORTION
 $\rightarrow N_{cp} = 256/2$
 MEASURE 512 CHIP
 $\rightarrow N_{cp} = 512/2$

FIG.15

FRAME CONFIGURATION OF CPICH UPON USE OF TRANSMIT DIVERSITY



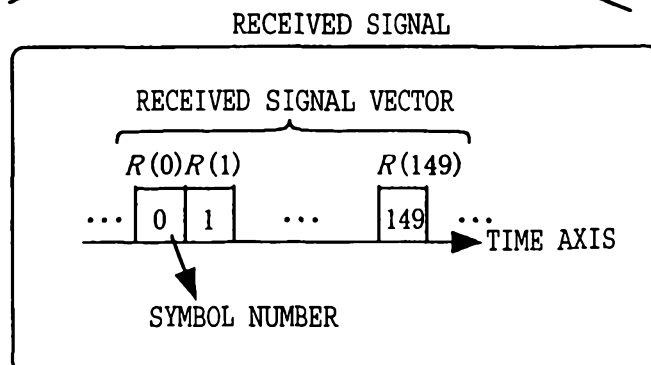


FIG.16

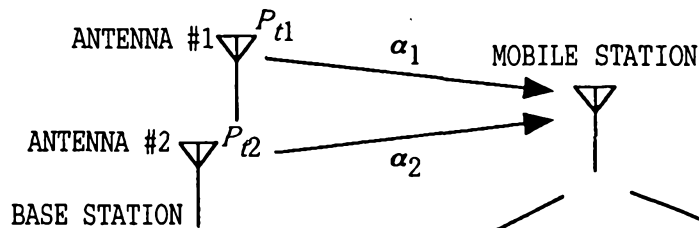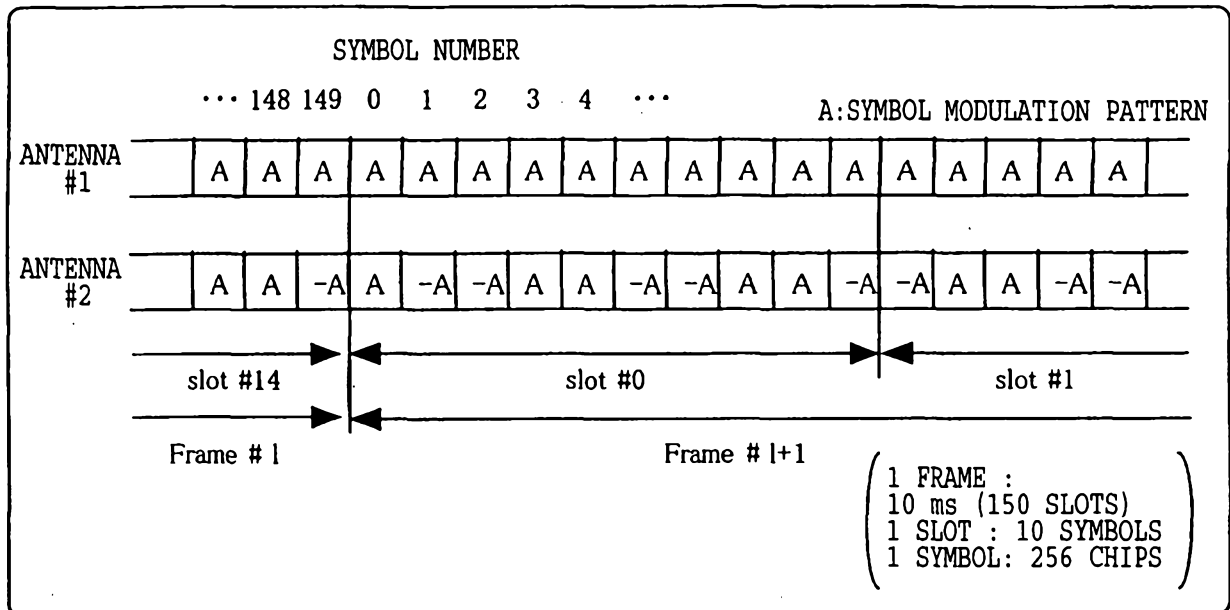

17/41

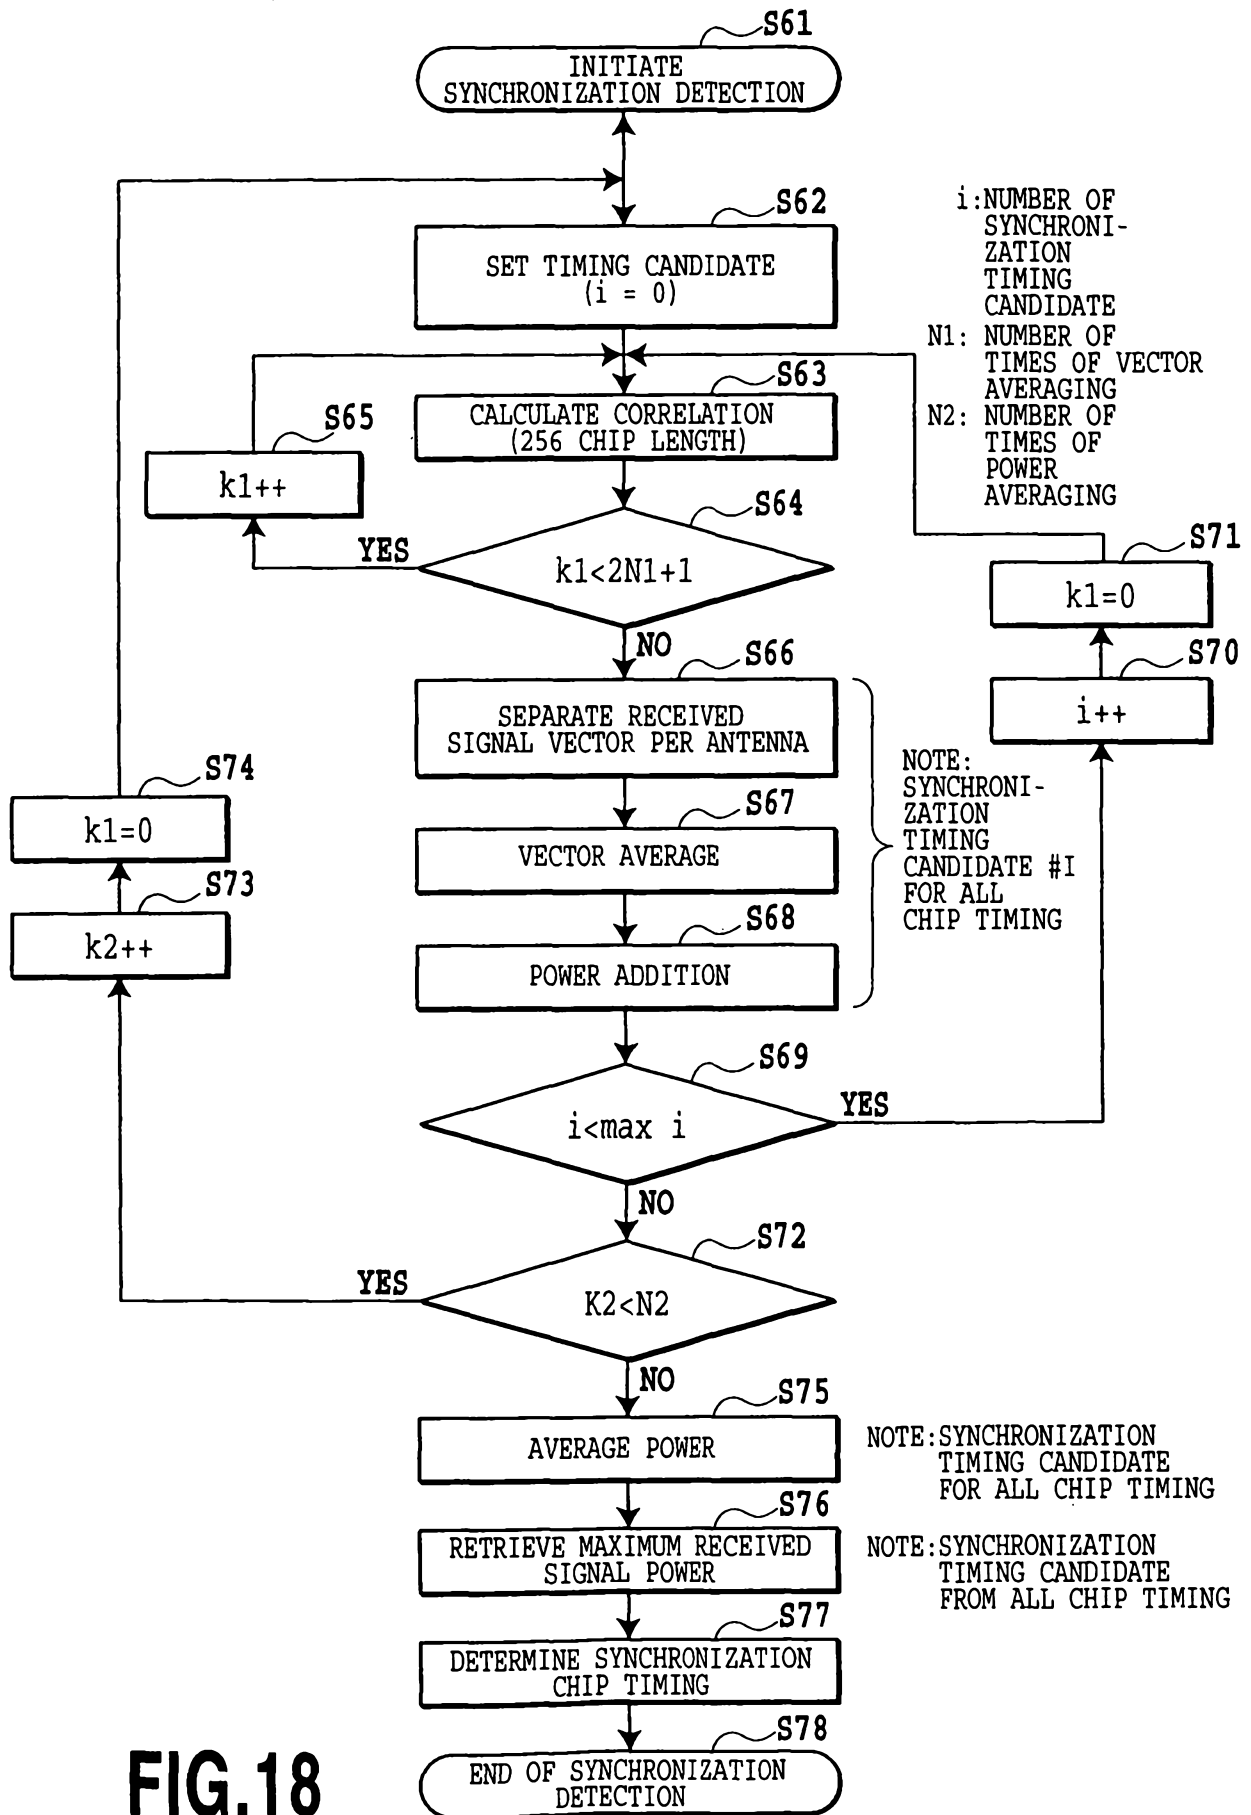


FIG.18


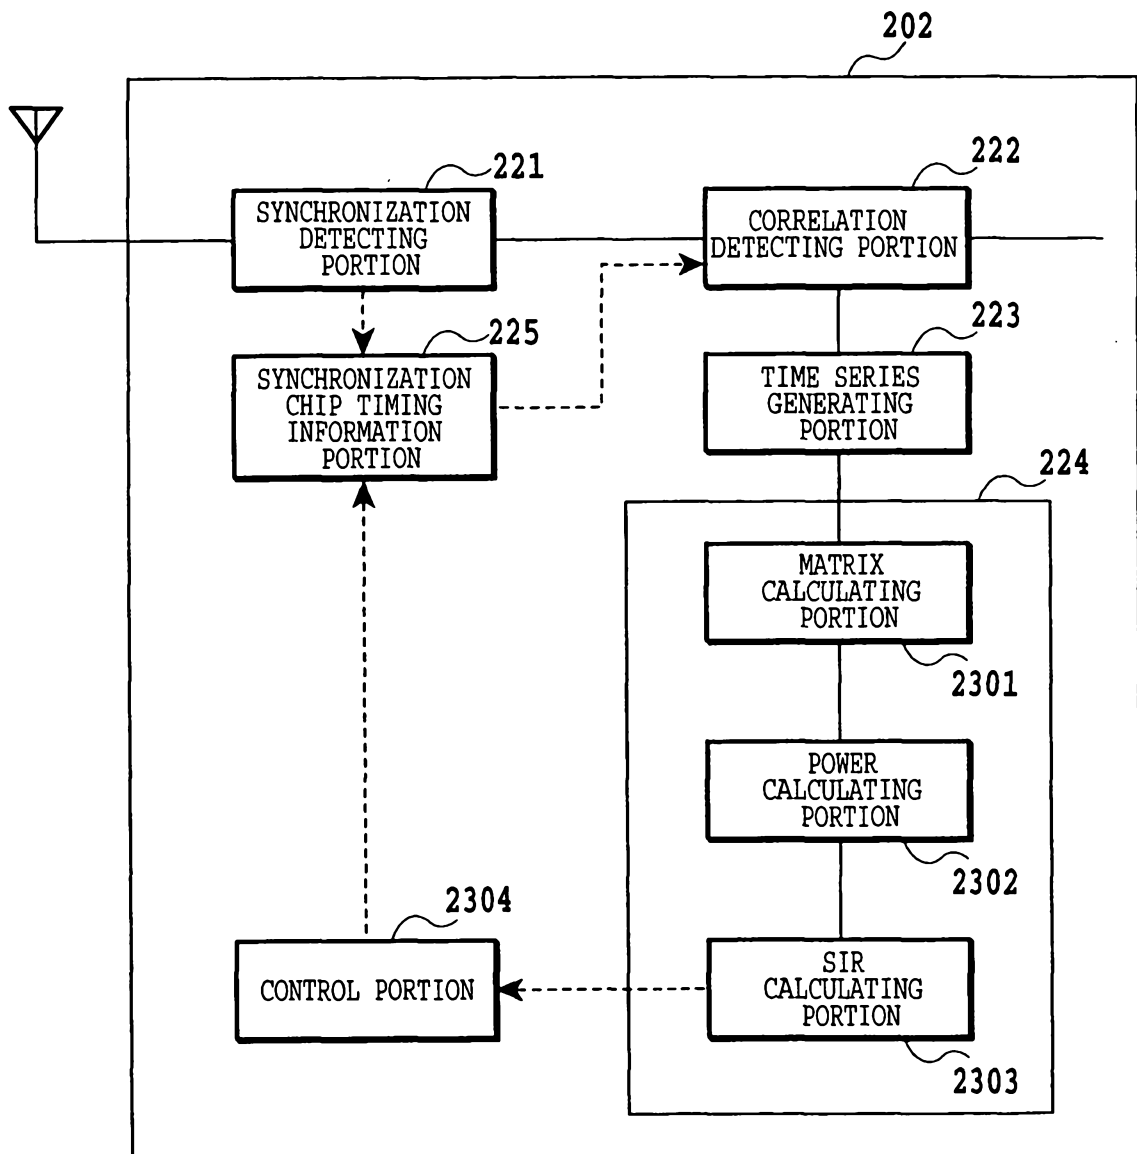


FIG.19

19/41

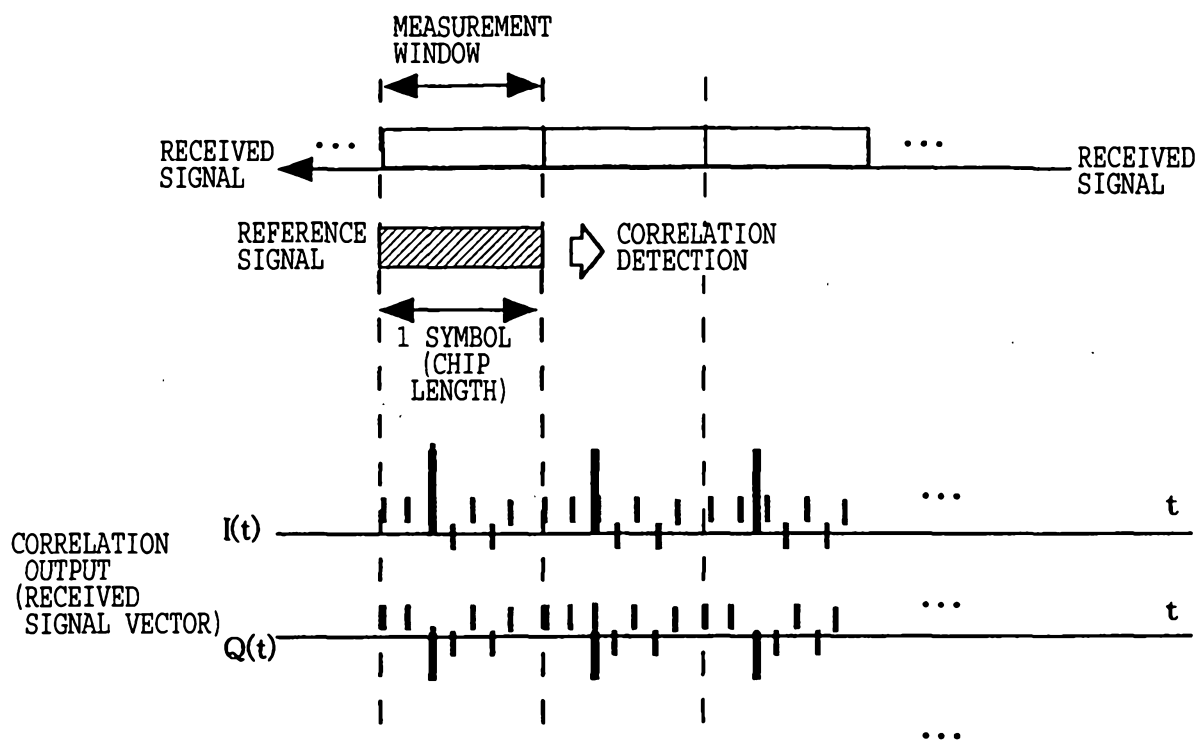

THE SAME RECEPTION CHIP TIMING

RECEIVED SIGNAL VECTOR OF CHIP TIMING k

$$\begin{cases} \text{SERIES 1 } r_{-k}(t) = I_{-k}(t) + jQ_{-k}(t) \\ \text{SERIES 2 } r_{-k}(t + n\Delta\tau) = I_{-k}(t + n\Delta\tau) + jQ_{-k}(t + n\Delta\tau) \end{cases} \text{ WHEREIN } \Delta\tau \text{ IS } 1 \text{ SYMBOL PERIOD}$$

COVARIANT MATRIX OF SERIES 1 AND 2

$$R_{rr} = \begin{bmatrix} \langle r_{-k}(t) \cdot r_{-k}^H(t) \rangle & \langle r_{-k}(t) \cdot r_{-k}^H(t + n\Delta\tau) \rangle \\ \langle r_{-k}(t + n\Delta\tau) \cdot r_{-k}^H(t) \rangle & \langle r_{-k}(t + n\Delta\tau) \cdot r_{-k}^H(t + n\Delta\tau) \rangle \end{bmatrix} \rightarrow \text{EIGENVALUE } \lambda_1, \lambda_2 \ (\lambda_1 > \lambda_2)$$

CHIP TIMING k

DESIRED SIGNAL POWER

INTERFERENCE SIGNAL POWER


$$P_{S_{-k}} = \frac{\lambda_1 - \lambda_2}{2}$$

$$P_{I_{-k}} = \lambda_2$$

(WHEREIN $N\Delta\tau$ IS SUFFICIENTLY SHORT PERIOD FOR FLUCTUA)

FIG.20

20/41

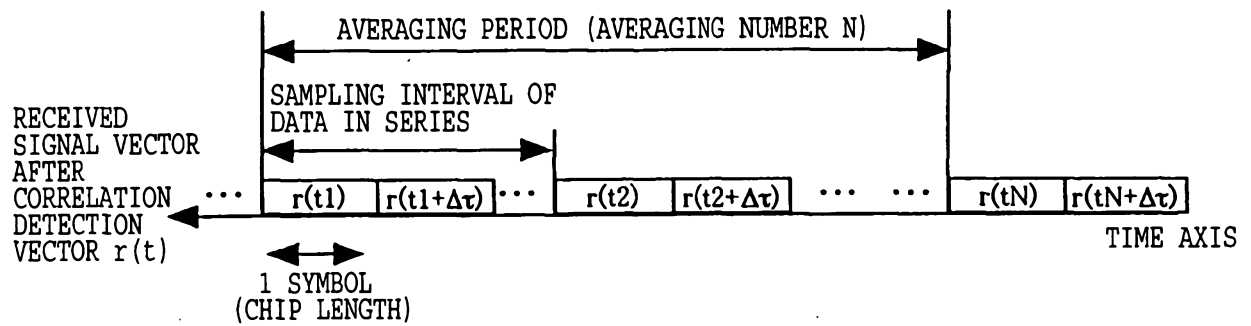

RECEIVED SIGNAL VECTOR OF CHIP TIMING $r_k(t1)$

{	SERIES 1	$r_k(t1)$	$r_k(t2)$	...	$r_k(tN)$
	SERIES 2	$r_k(t1+\Delta\tau)$	$r_k(t2+\Delta\tau)$	...	$r_k(tN+\Delta\tau)$



ADD VECTOR $\alpha_k(t) = r_k(t) + r_k(t+\Delta\tau)$

DIFFERENCE VECTOR: $\beta_k(t) = r_k(t) - r_k(t+\Delta\tau)$



CHIP TIMING k

DESIRED SIGNAL POWER

INTERFERENCE SIGNAL POWER

$$P_{S_k} = \frac{|P'_{S_k} - P_{I_k}|}{2}$$

$$P_{I_k} = \frac{1}{N} \sum_{j=1}^N \frac{|\beta(t_j)|^2}{2}$$

WHEREIN

$$P'_{S_k} = \frac{1}{N} \sum_{j=1}^N \frac{|\alpha(t_j)|^2}{2}$$

FIG.21


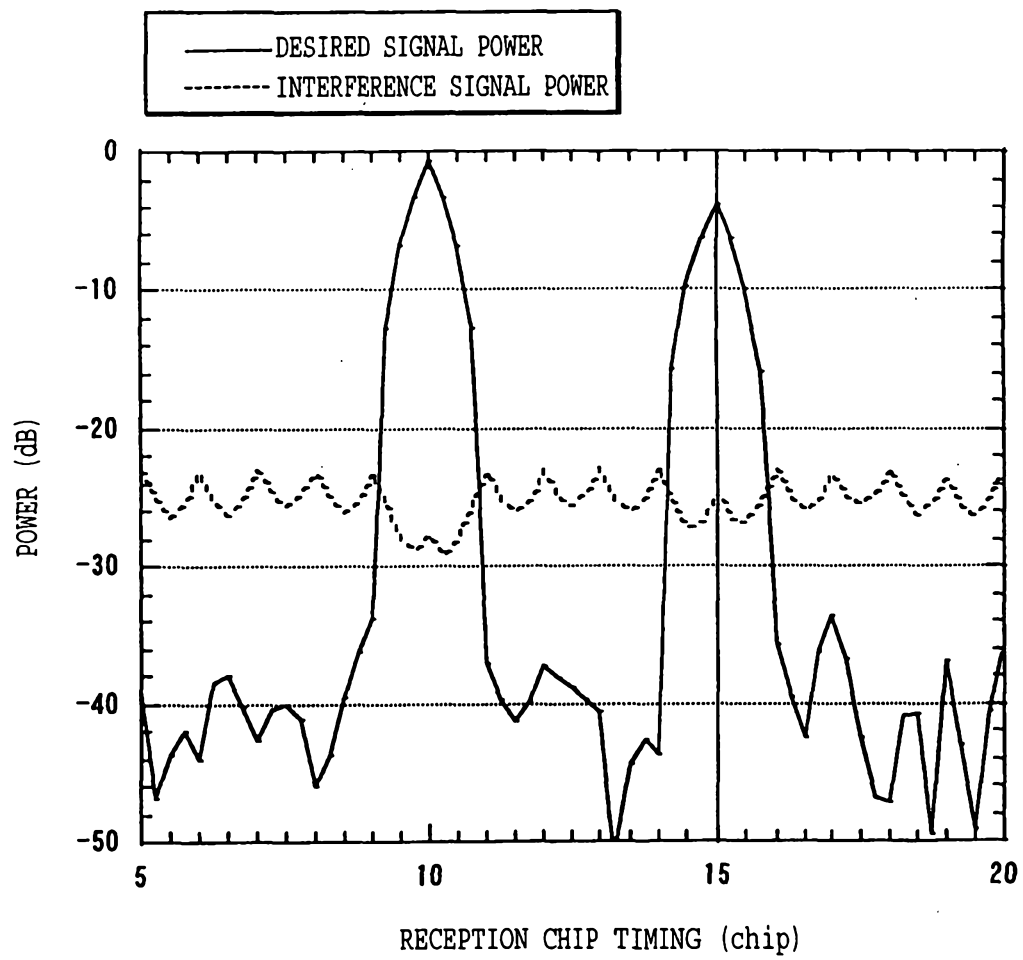


FIG.22

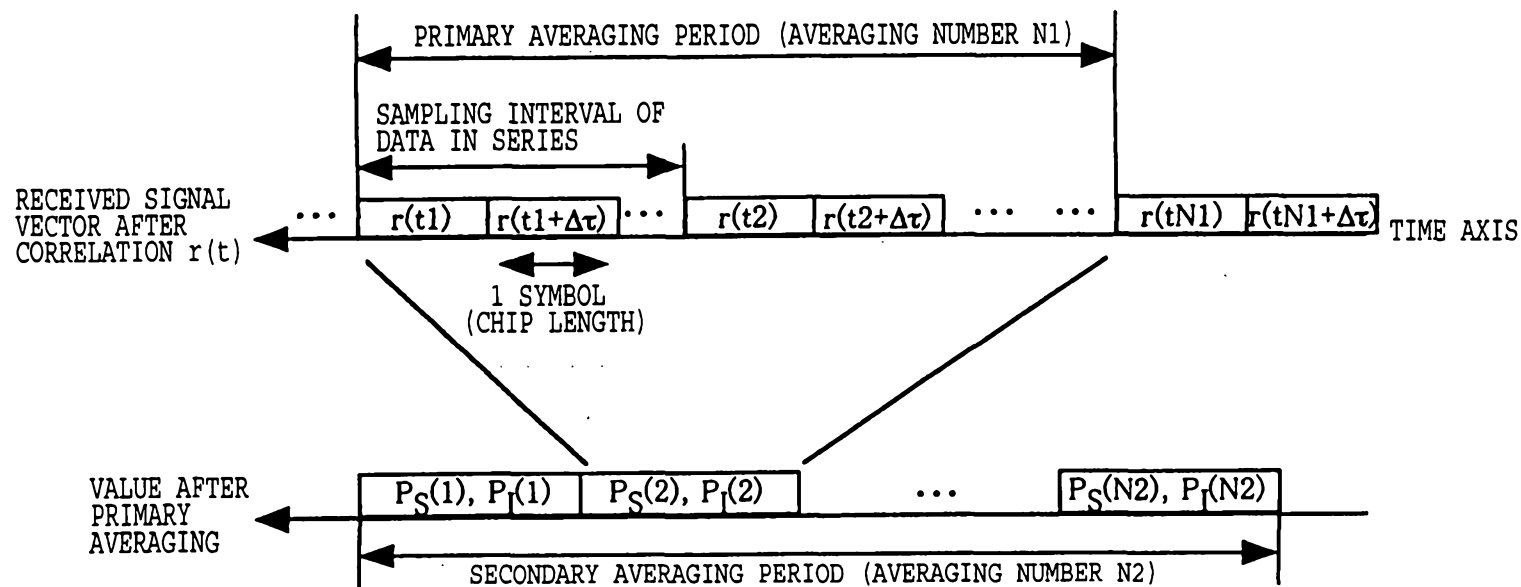

22/41

CHIP TIMING k OF AFTER SECONDARY AVERAGING

DESIRED SIGNAL POWER

$$P_{S_k} = \frac{1}{N2} \sum_{j=1}^{N2} P_{S_k}(j)$$

INTERFERENCE SIGNAL POWER

$$P_{I_k} = \frac{1}{N2} \sum_{j=1}^{N2} P_{I_k}(j)$$

FIG.23

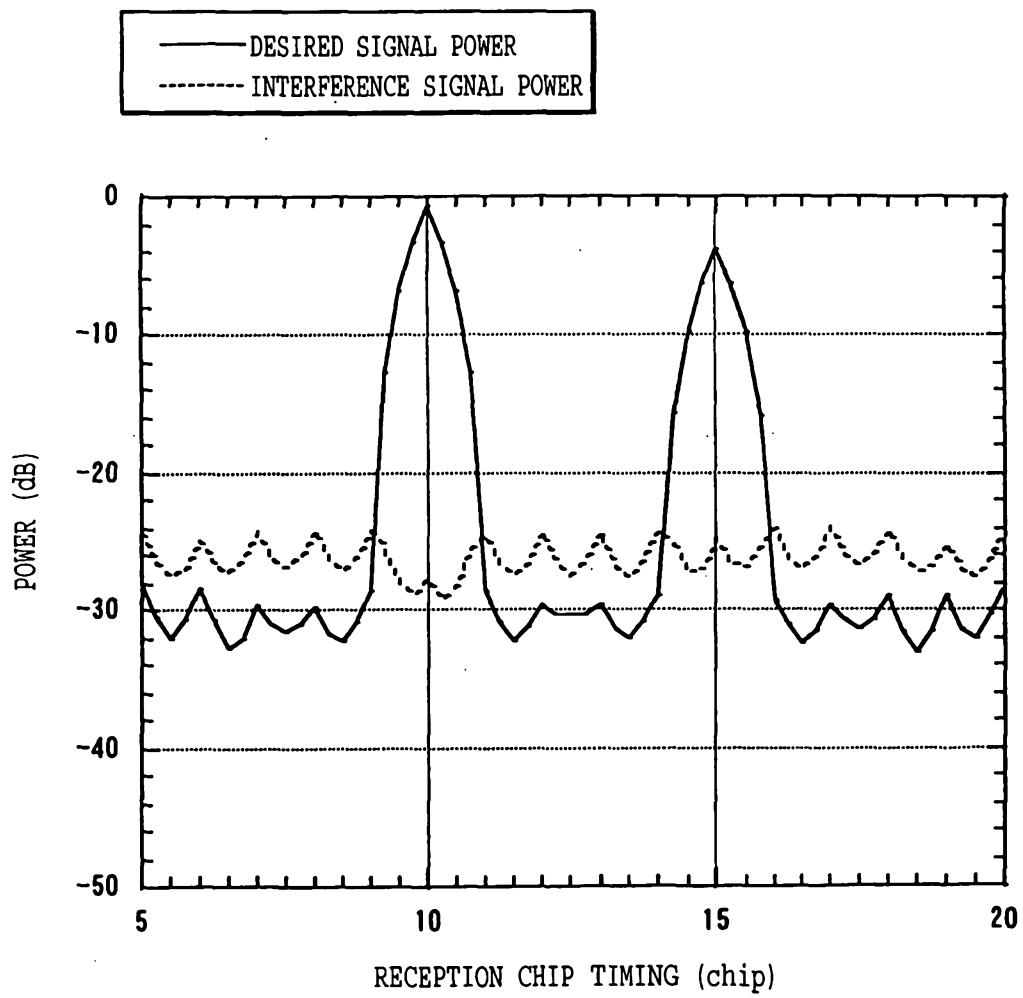


FIG.24

06 04 01 35083


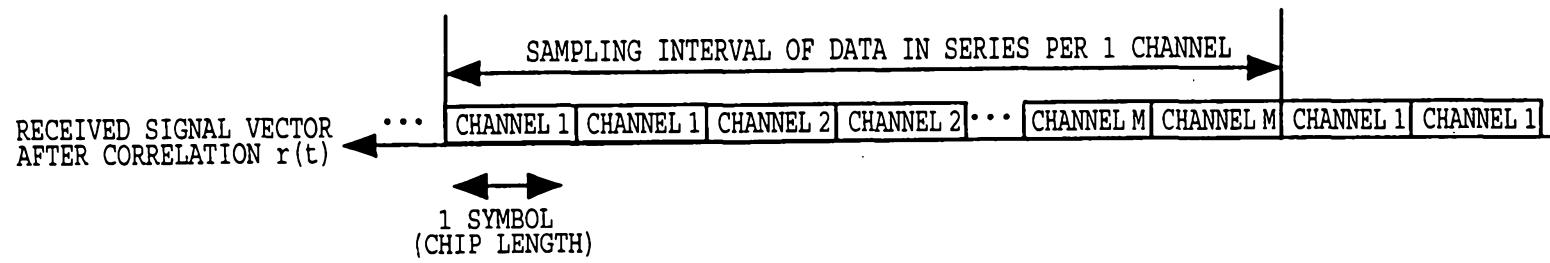


FIG.25

24/41


06 04 01 35063

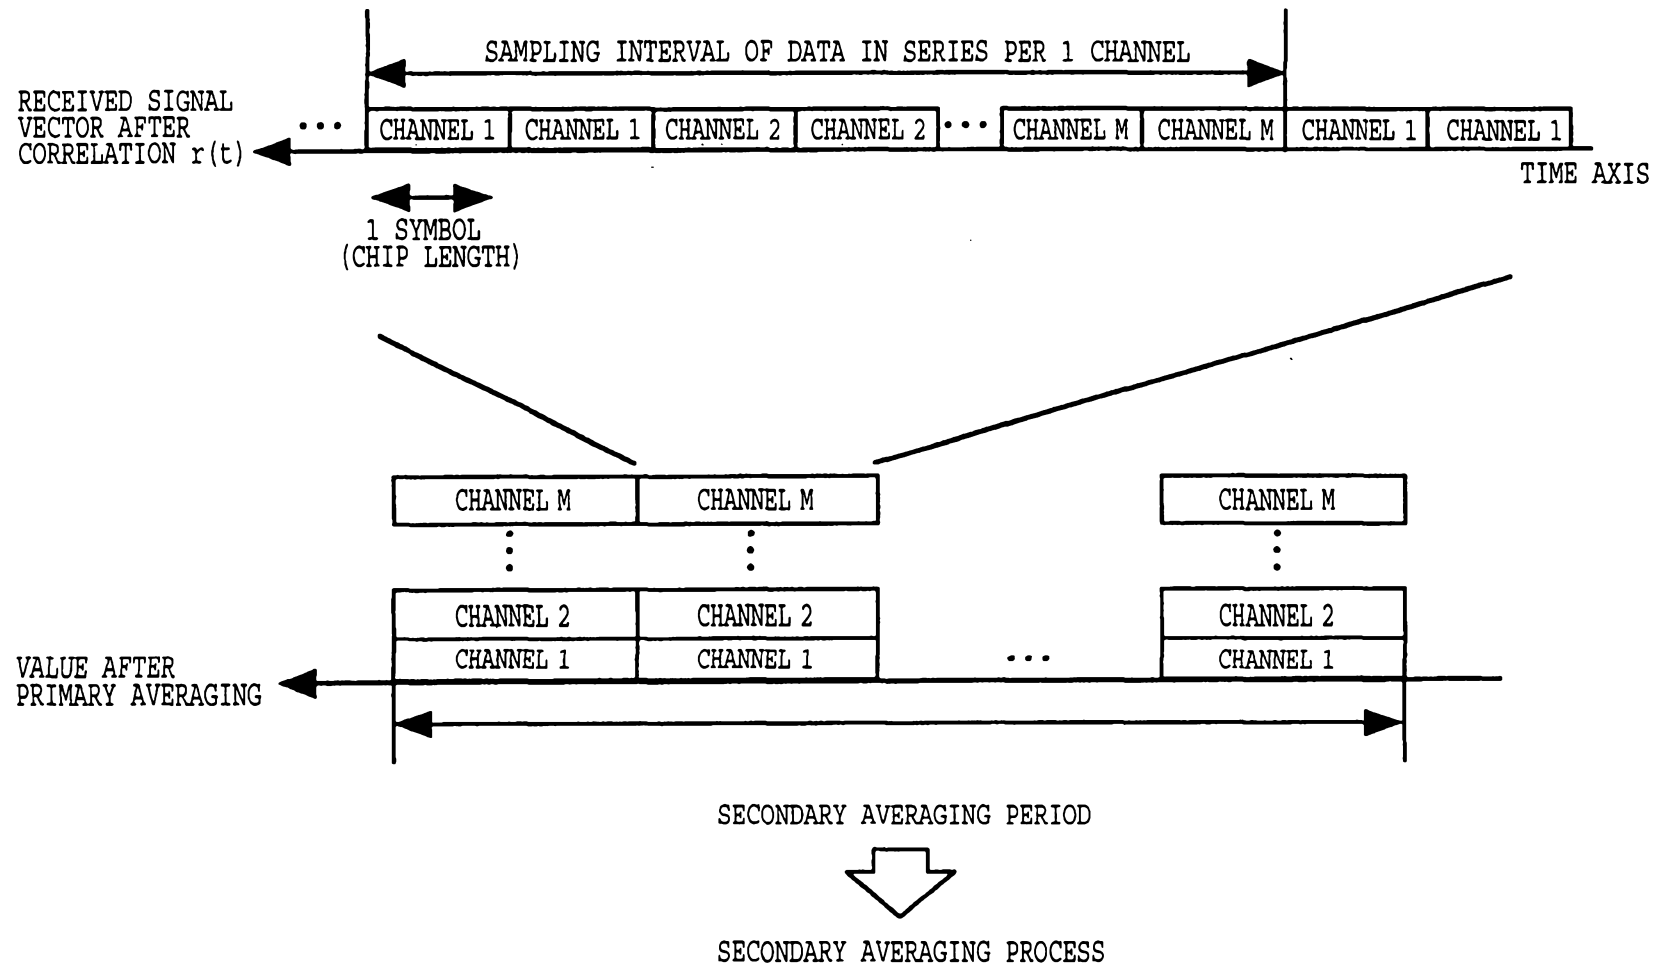

25/41

FIG.26

06 04 01 35003

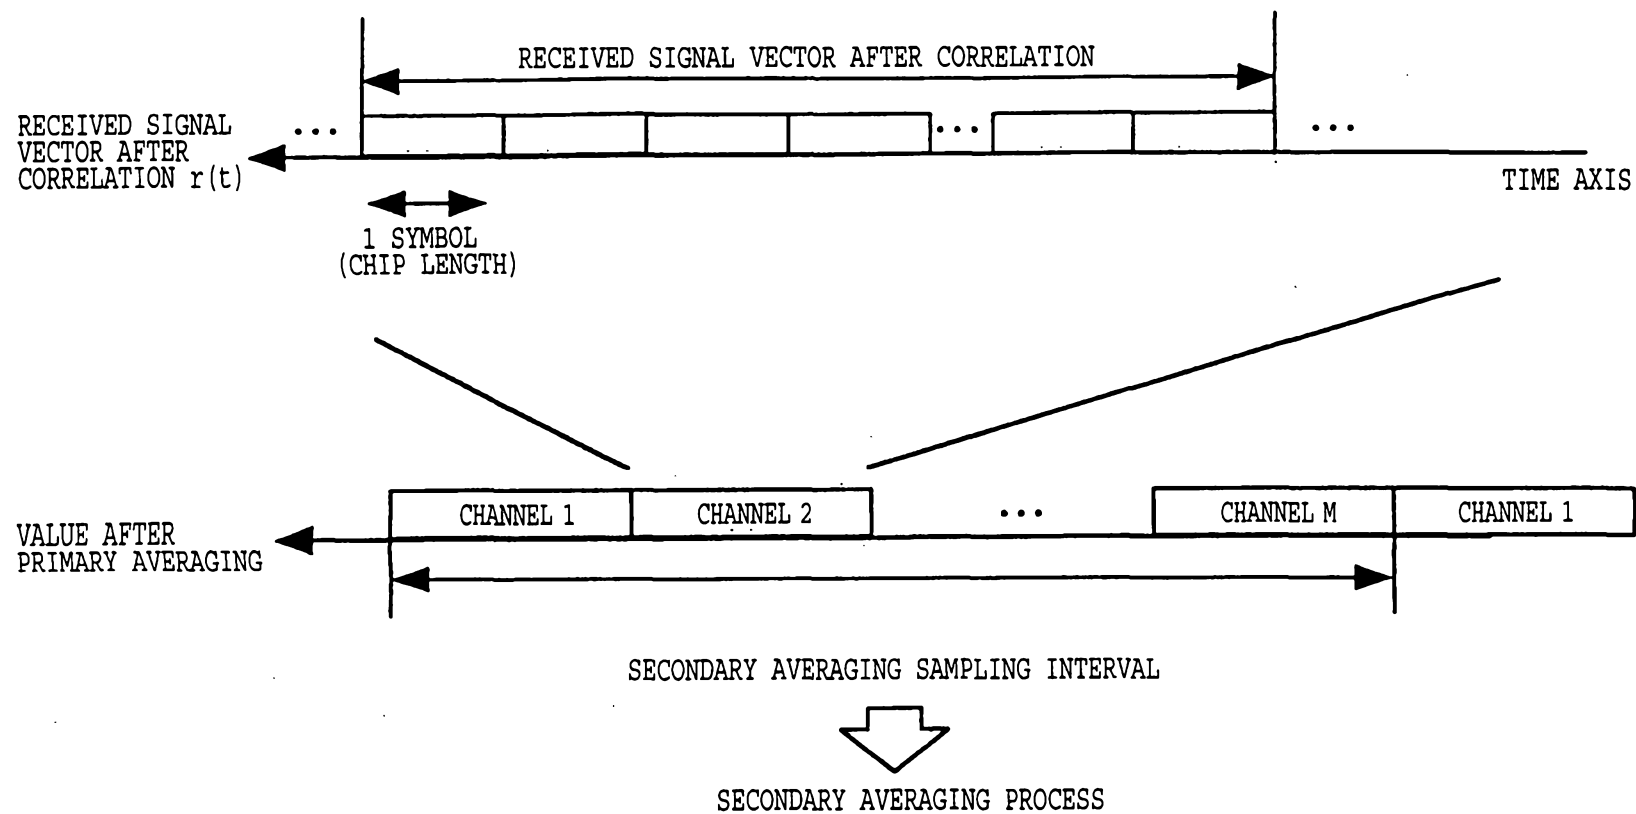

26/41

FIG.27

27/41

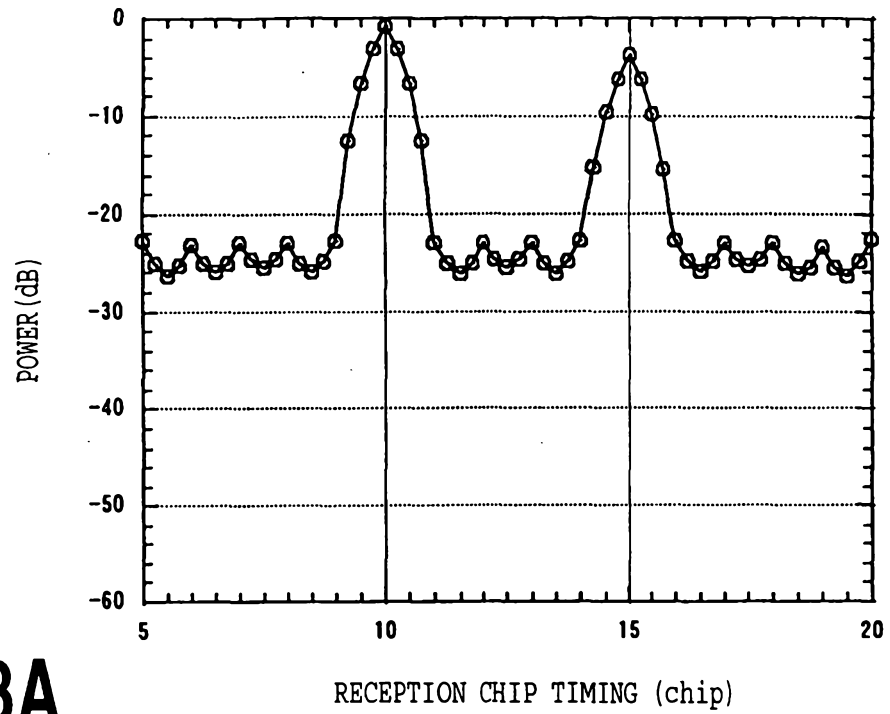


FIG.28A




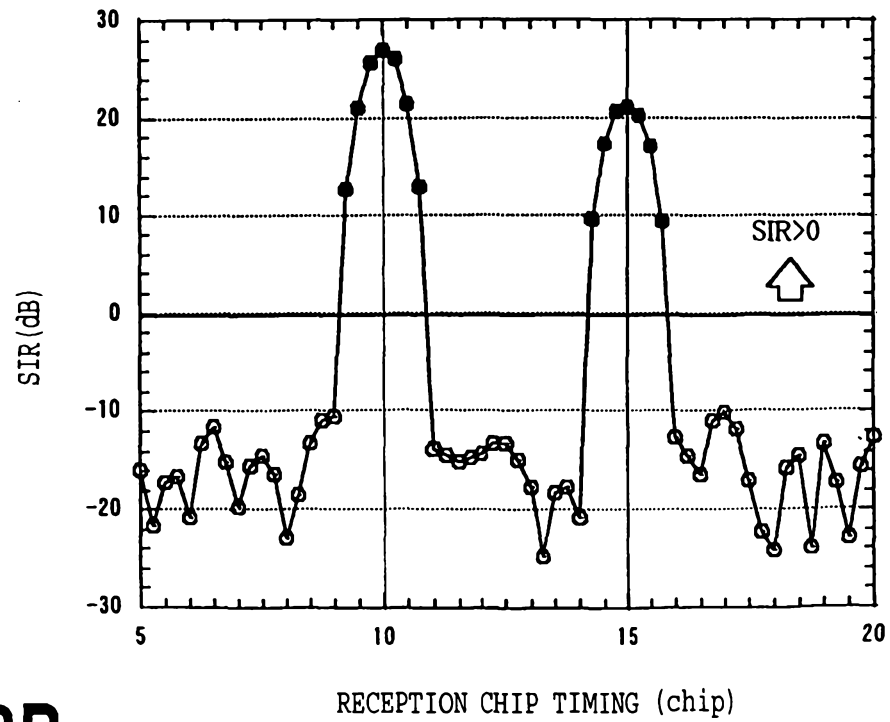


FIG.28B

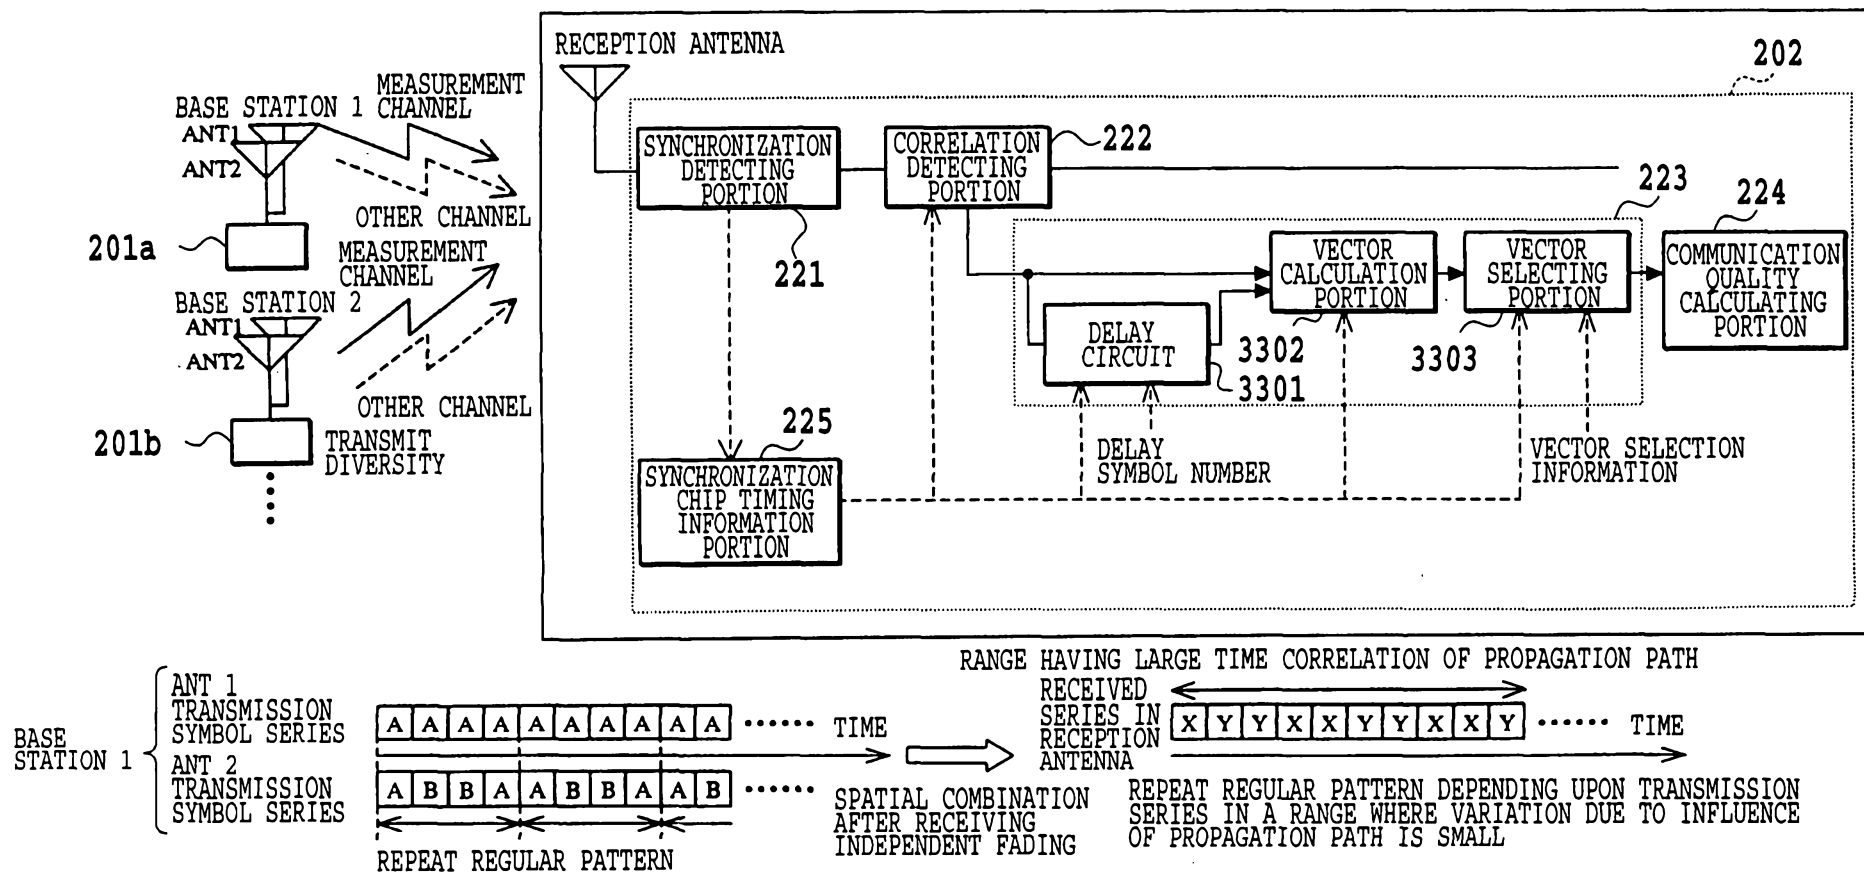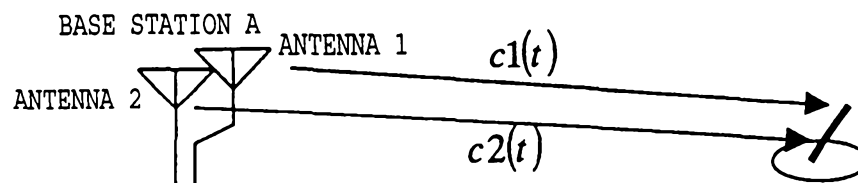

※ A, B ARE TRANSMISSION SYMBOLS AND X, Y ARE RECEPTION SYMBOLS

FIG.29

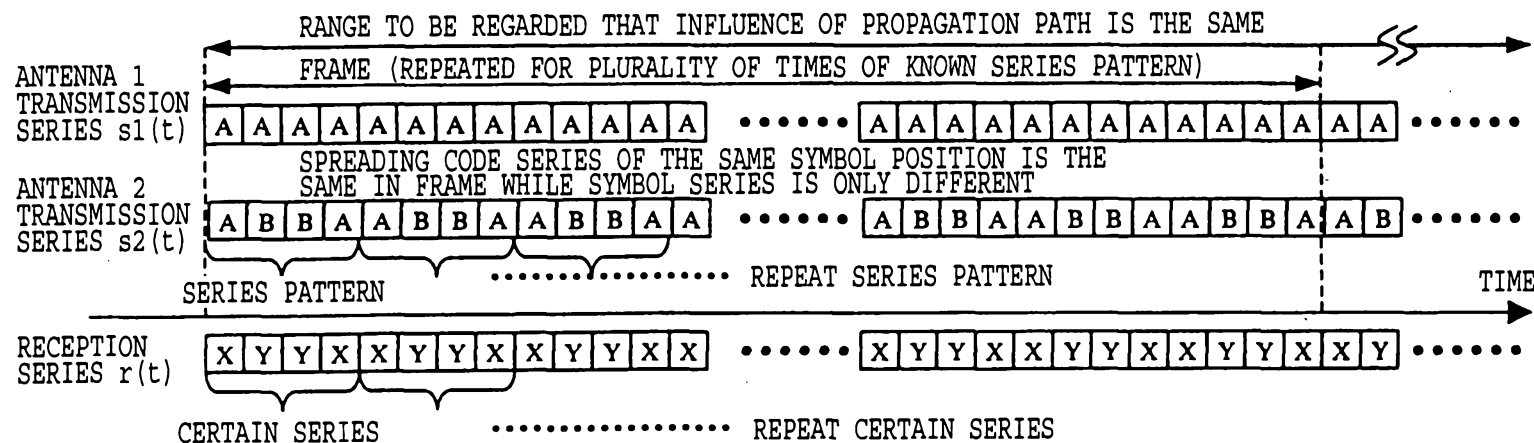

$$r(t) = c_1(t) \cdot s_1(t) + c_2(t) \cdot s_2(t)$$


IN RAGE WHERE TIME CORRELATION OF PROPAGATION PATH BECOMES LARGE, $c_1(t) \approx c_1$
 $c_1(t)$ AND $c_2(t)$ CAN BE REGARDED AS CONSTANT $c_2(t) \approx c_2$

IN RAGE WHERE TIME CORRELATION OF PROPAGATION PATH BECOMES LARGE

WHEN TRANSMISSION SYMBOL (ANTENNA 1, ANTENNA 2) = (A, A) $r(t) = c_1 \cdot A + c_2 \cdot A = (c_1 + c_2) \cdot A = Y$

WHEN TRANSMISSION SYMBOL (ANTENNA 1, ANTENNA 2) = (A, B) $r(t) = c_1 \cdot A + c_2 \cdot B = (c_1 + c_2 \cdot B/A) \cdot A = X$

FIG.30

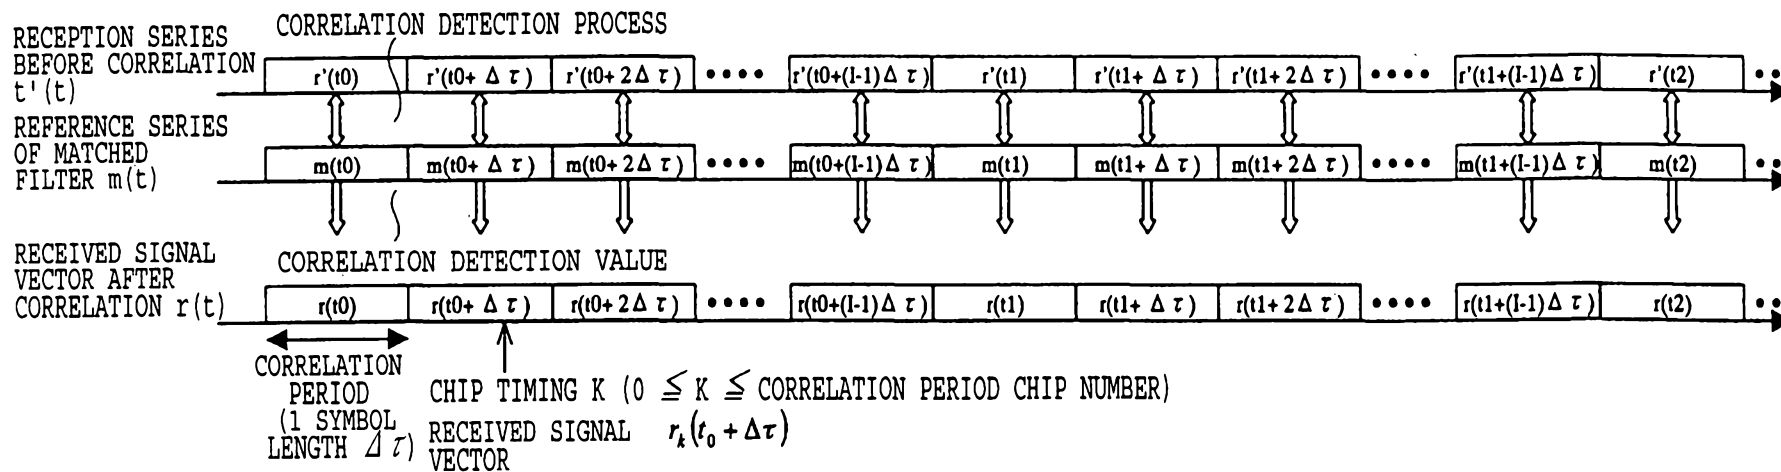

30/41

FIG.31




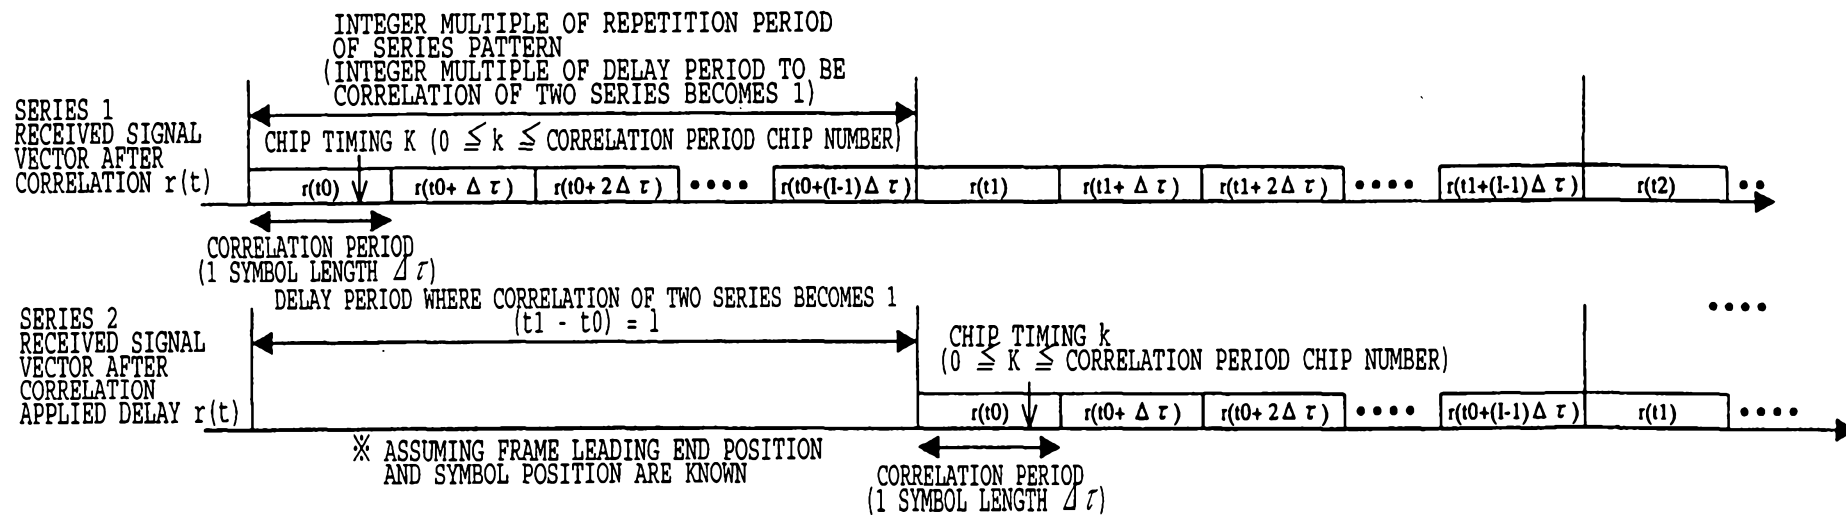


FIG.32

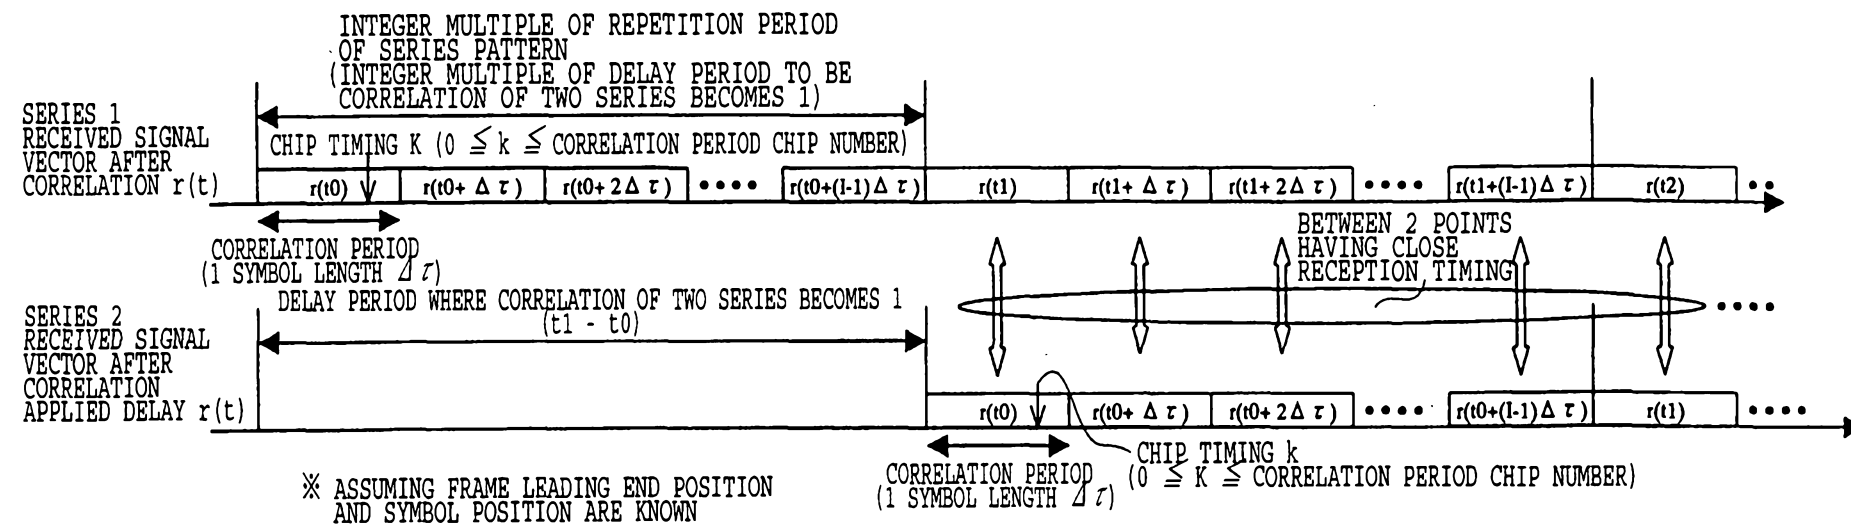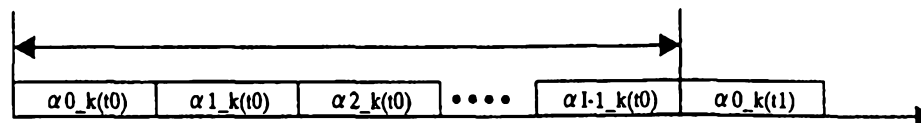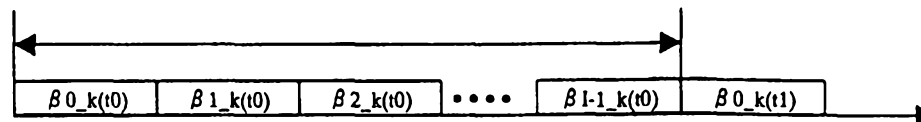

ADD VECTOR SERIES

DIFFERENCE VECTOR
SERIESRECEIVED SIGNAL
VECTOR OF K
CHIP TIMING $r_k(t_1)$


SERIES 1 $r_k(t_1)$ $r_k(t_1 + \Delta\tau)$ $r_k(t_1 + 2\Delta\tau)$ $\dots$ $r_k(t_1 + (I-1)\Delta\tau)$ $r_k(t_2)$ $\dots$

SERIES 2 $r_k(t_0)$ $r_k(t_0 + \Delta\tau)$ $r_k(t_0 + 2\Delta\tau)$ $\dots$ $r_k(t_0 + (I-1)\Delta\tau)$ $r_k(t_1)$ $\dots$



ADD VECTOR: $\alpha_{i_k}(t_j) = r_k(t_{j+1} + i\Delta\tau) + r_k(t_j + i\Delta\tau)$ DIFFERENCE VECTOR: $\beta_{i_k}(t_j) = r_k(t_{j+1} + i\Delta\tau) - r_k(t_j + i\Delta\tau)$

FIG.33

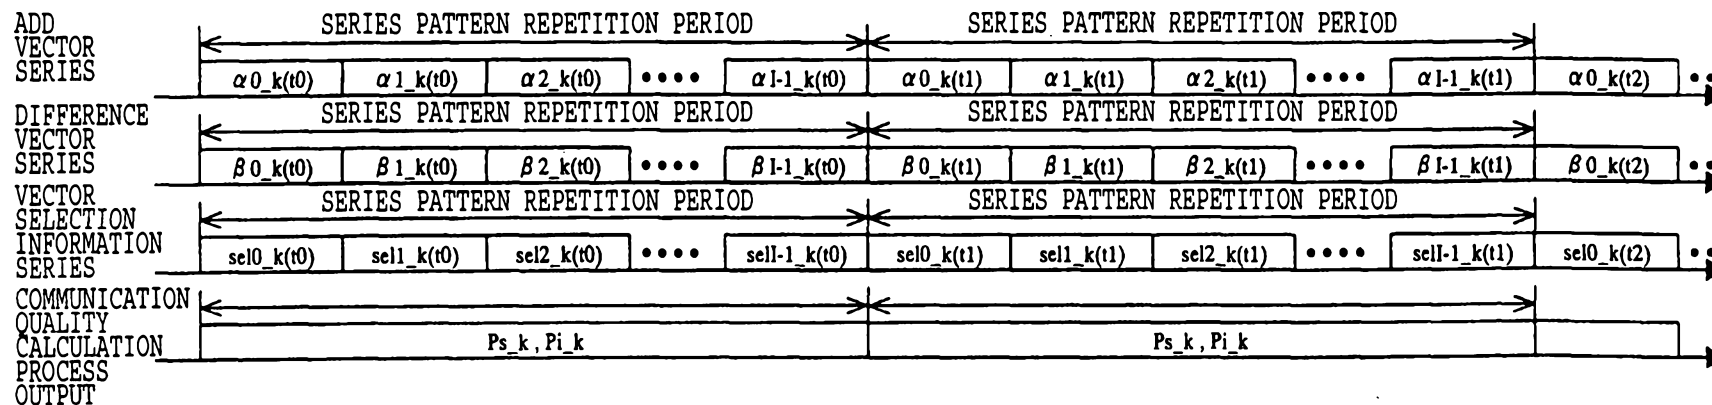

ADD VECTOR AFTER SELECTION $\alpha'_{i_k}(t_j) = sel_{i_k}(t_j) \cdot \alpha_{i_k}(t_j)$

DIFFERENCE VECTOR AFTER SELECTION $\beta'_{i_k}(t_j) = sel_{i_k}(t_j) \cdot \beta_{i_k}(t_j)$

VECTOR SELECTION INFORMATION $\begin{cases} sel_{i_k}(t_j) = 1 \text{ SELECTION ON} \\ sel_{i_k}(t_j) = 0 \text{ SELECTION OFF} \end{cases}$

DESIRED SIGNAL POWER $P_{s_k} = \frac{|P'_{s_k} - P_{i_k}|}{2}$

WHEREIN $P'_{s_k} = \frac{1}{N} \sum_{j=0}^{J-1} \sum_{i=0}^{I-1} \frac{|\alpha'_{i_k}(t_j)|^2}{2}$

I IS DELAY SYMBOL NUMBER

J IS SERIES PATTERN REPETITION NUMBER OF AVERAGING RANGE


N IS SELECT ON NUMBER IN AVERAGING RANGE

INTERFERENCE SIGNAL POWER $P_{i_k} = \frac{1}{N} \sum_{j=0}^{J-1} \sum_{i=0}^{I-1} \frac{|\beta'_{i_k}(t_j)|^2}{2}$

※ WHEN AVERAGING PERIOD IN COMMUNICATION QUALITY CALCULATION PROCESS IS SERIES PATTERN REPETITION PERIOD

FIG.34

06 04 01 35063

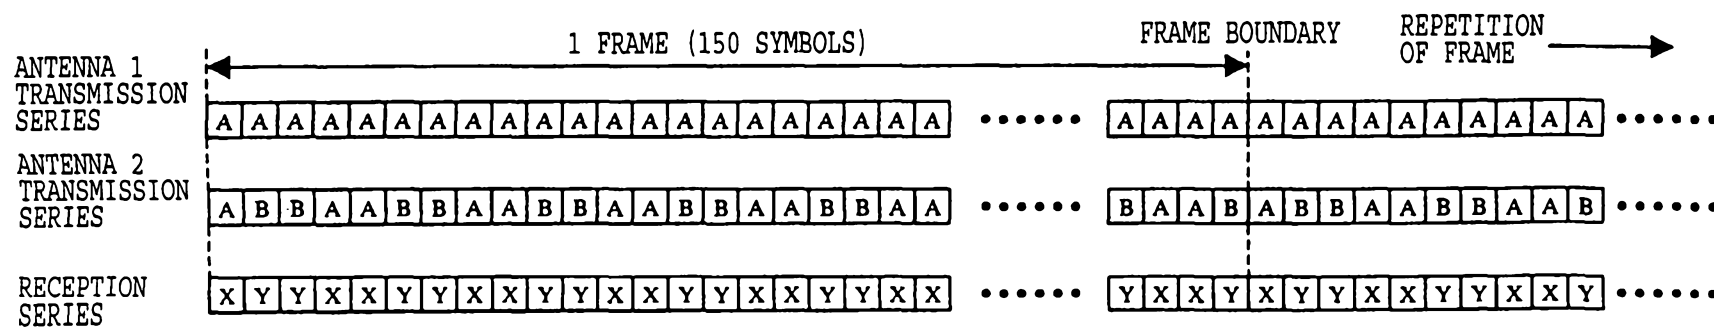

34/41

FIG.35


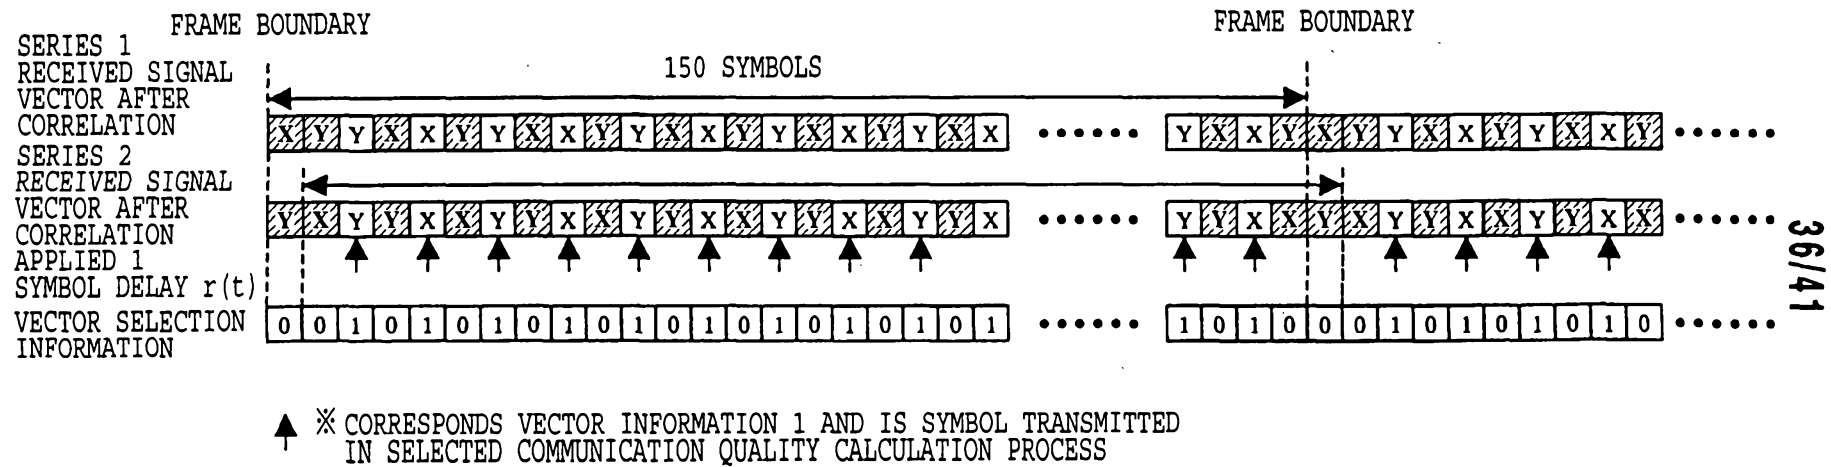



FIG.37

06 04 01 35063

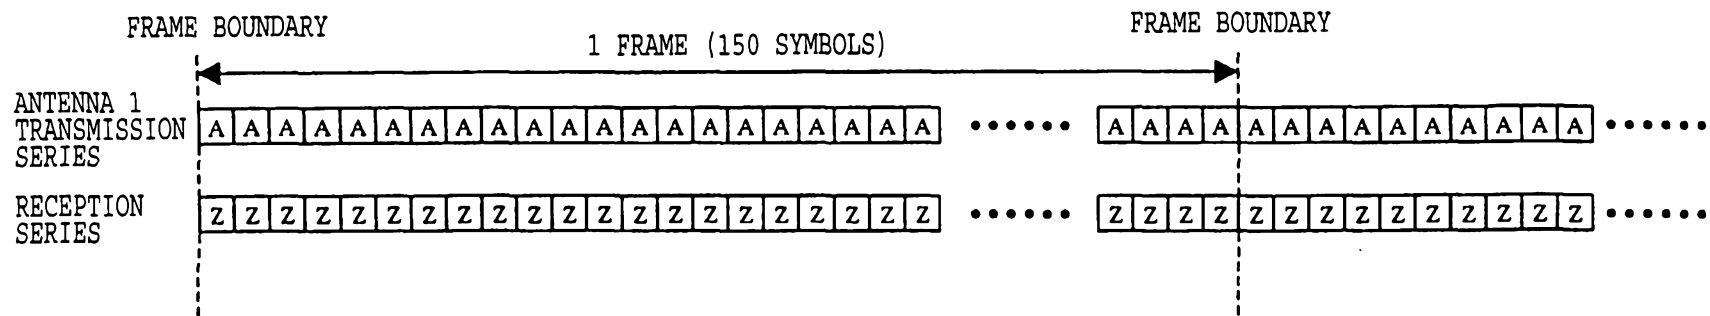

37/41

FIG.38

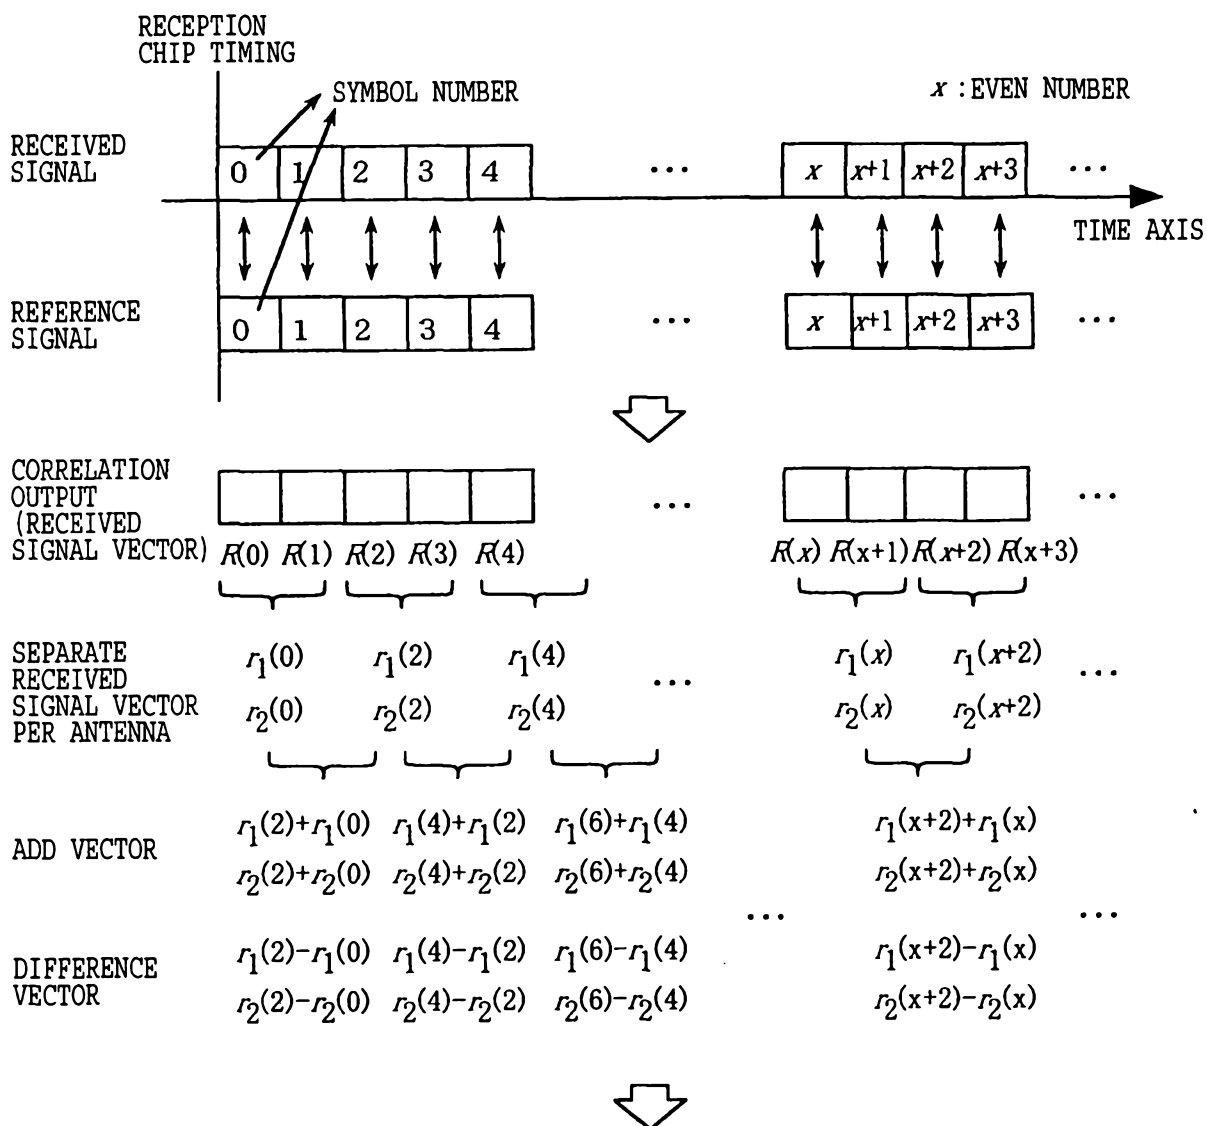

DESIRED SIGNAL
POWER

$$P_s = \frac{|P_s' - P_i|}{2}$$

BUT,

$$P_s' = \frac{1}{N} \sum_{j=0}^{N-1} \frac{|r_1(2j+2) + r_1(2j)|^2 + |r_2(2j+2) + r_2(2j)|^2}{2}$$

INTERFERENCE
SIGNAL POWER

$$P_i = \frac{1}{N} \sum_{j=0}^{N-1} \frac{|r_1(2j+2) - r_1(2j)|^2 + |r_2(2j+2) - r_2(2j)|^2}{2}$$

FIG.39

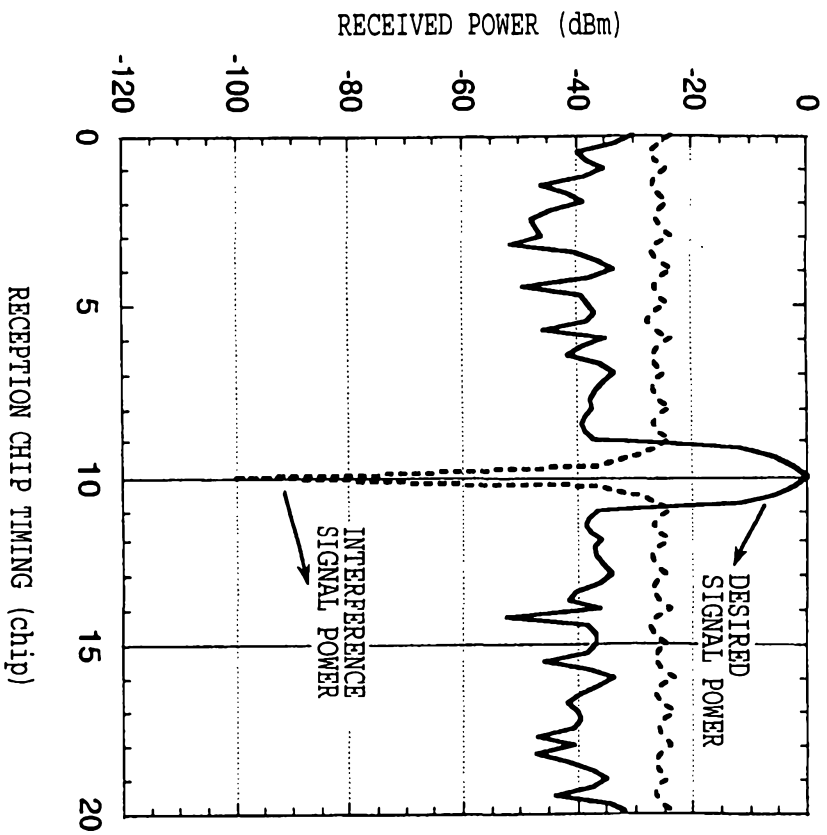


FIG.40

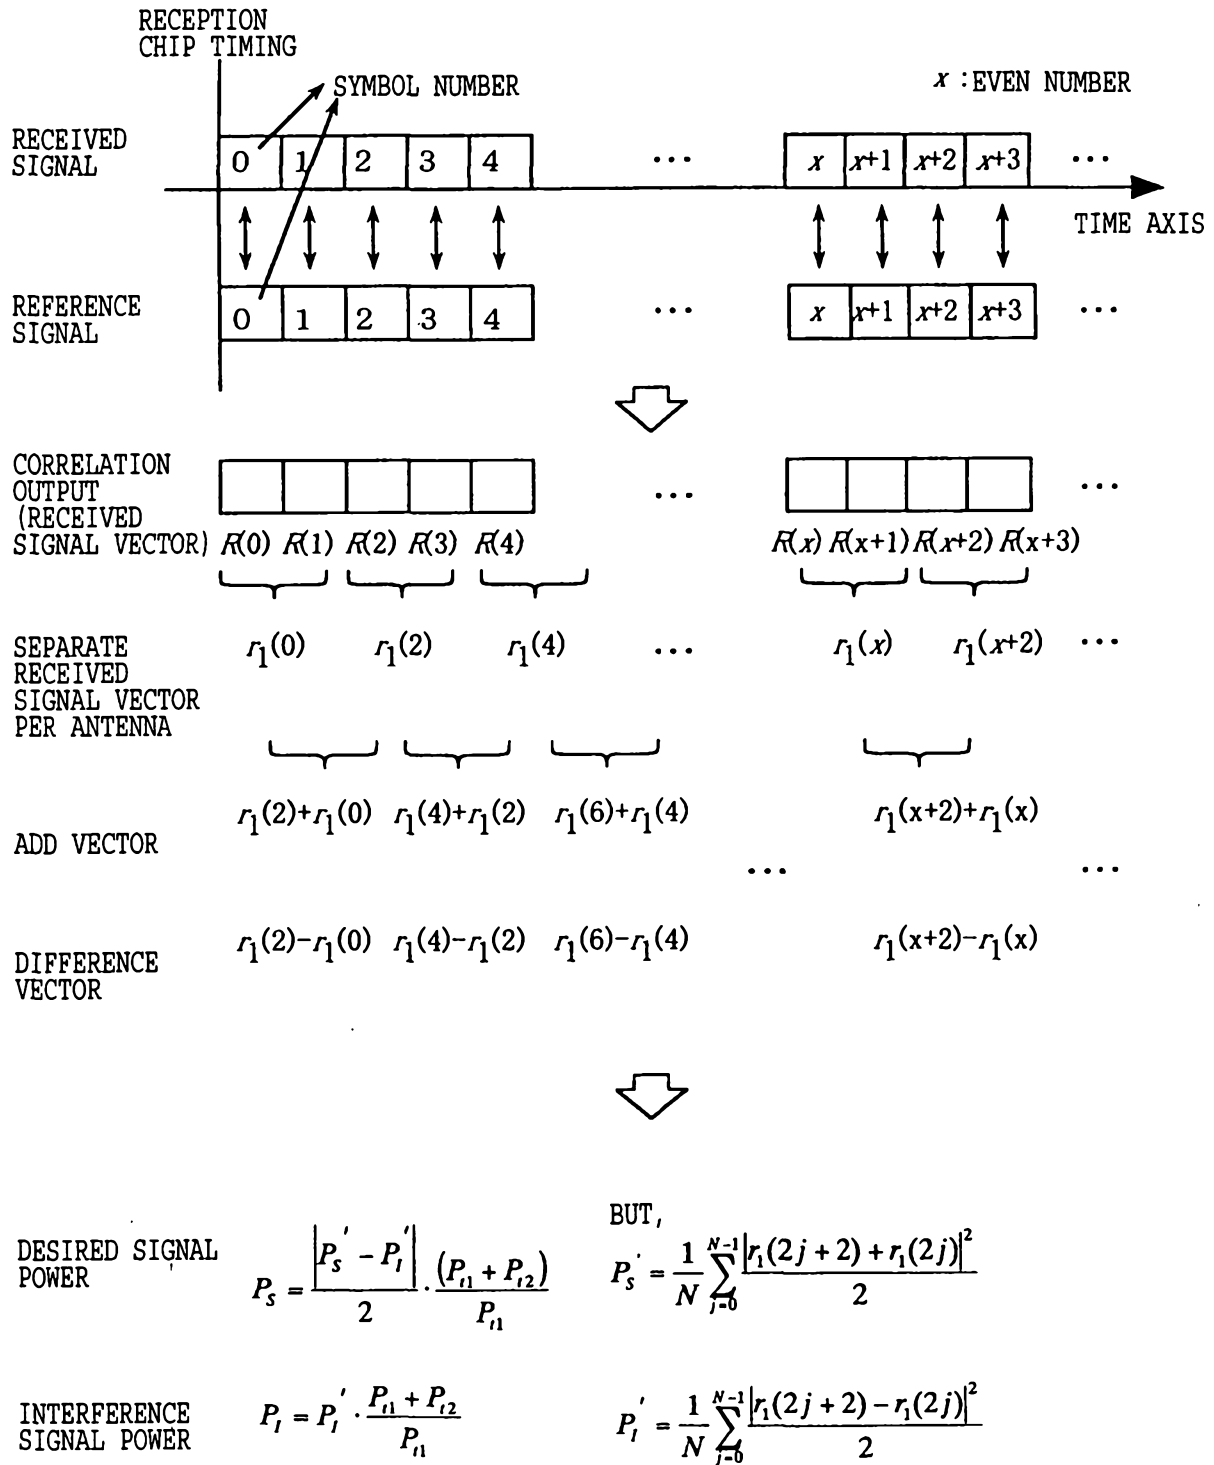


FIG.41

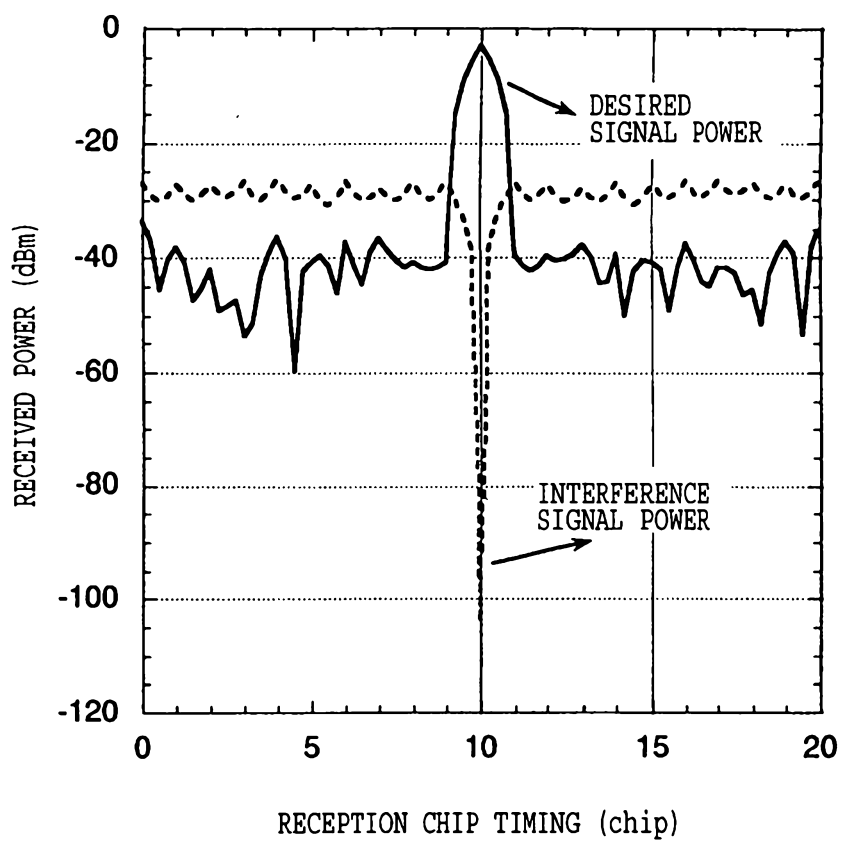


FIG.42