




(86) Date de dépôt PCT/PCT Filing Date: 1991/02/22
(87) Date publication PCT/PCT Publication Date: 1991/09/05
(45) Date de délivrance/Issue Date: 2002/04/30
(85) Entrée phase nationale/National Entry: 1992/07/30
(86) N° demande PCT/PCT Application No.: US 1991/001181
(87) N° publication PCT/PCT Publication No.: 1991/013506
(30) Priorité/Priority: 1990/02/23 (484,928) US

(51) Cl.Int.⁵/Int.Cl.⁵ H04L 27/00
(72) Inventeur/Inventor:
Lim, Jae S., US
(73) Propriétaire/Owner:
MASSACHUSETTS INSTITUTE OF TECHNOLOGY, US
(74) Agent: CASSAN MACLEAN

(54) Titre : TRAITEMENT DE SIGNAUX HYBRIDES ANALOGIQUES-NUMERIQUES
(54) Title: HYBRID ANALOG/DIGITAL SIGNAL PROCESSING

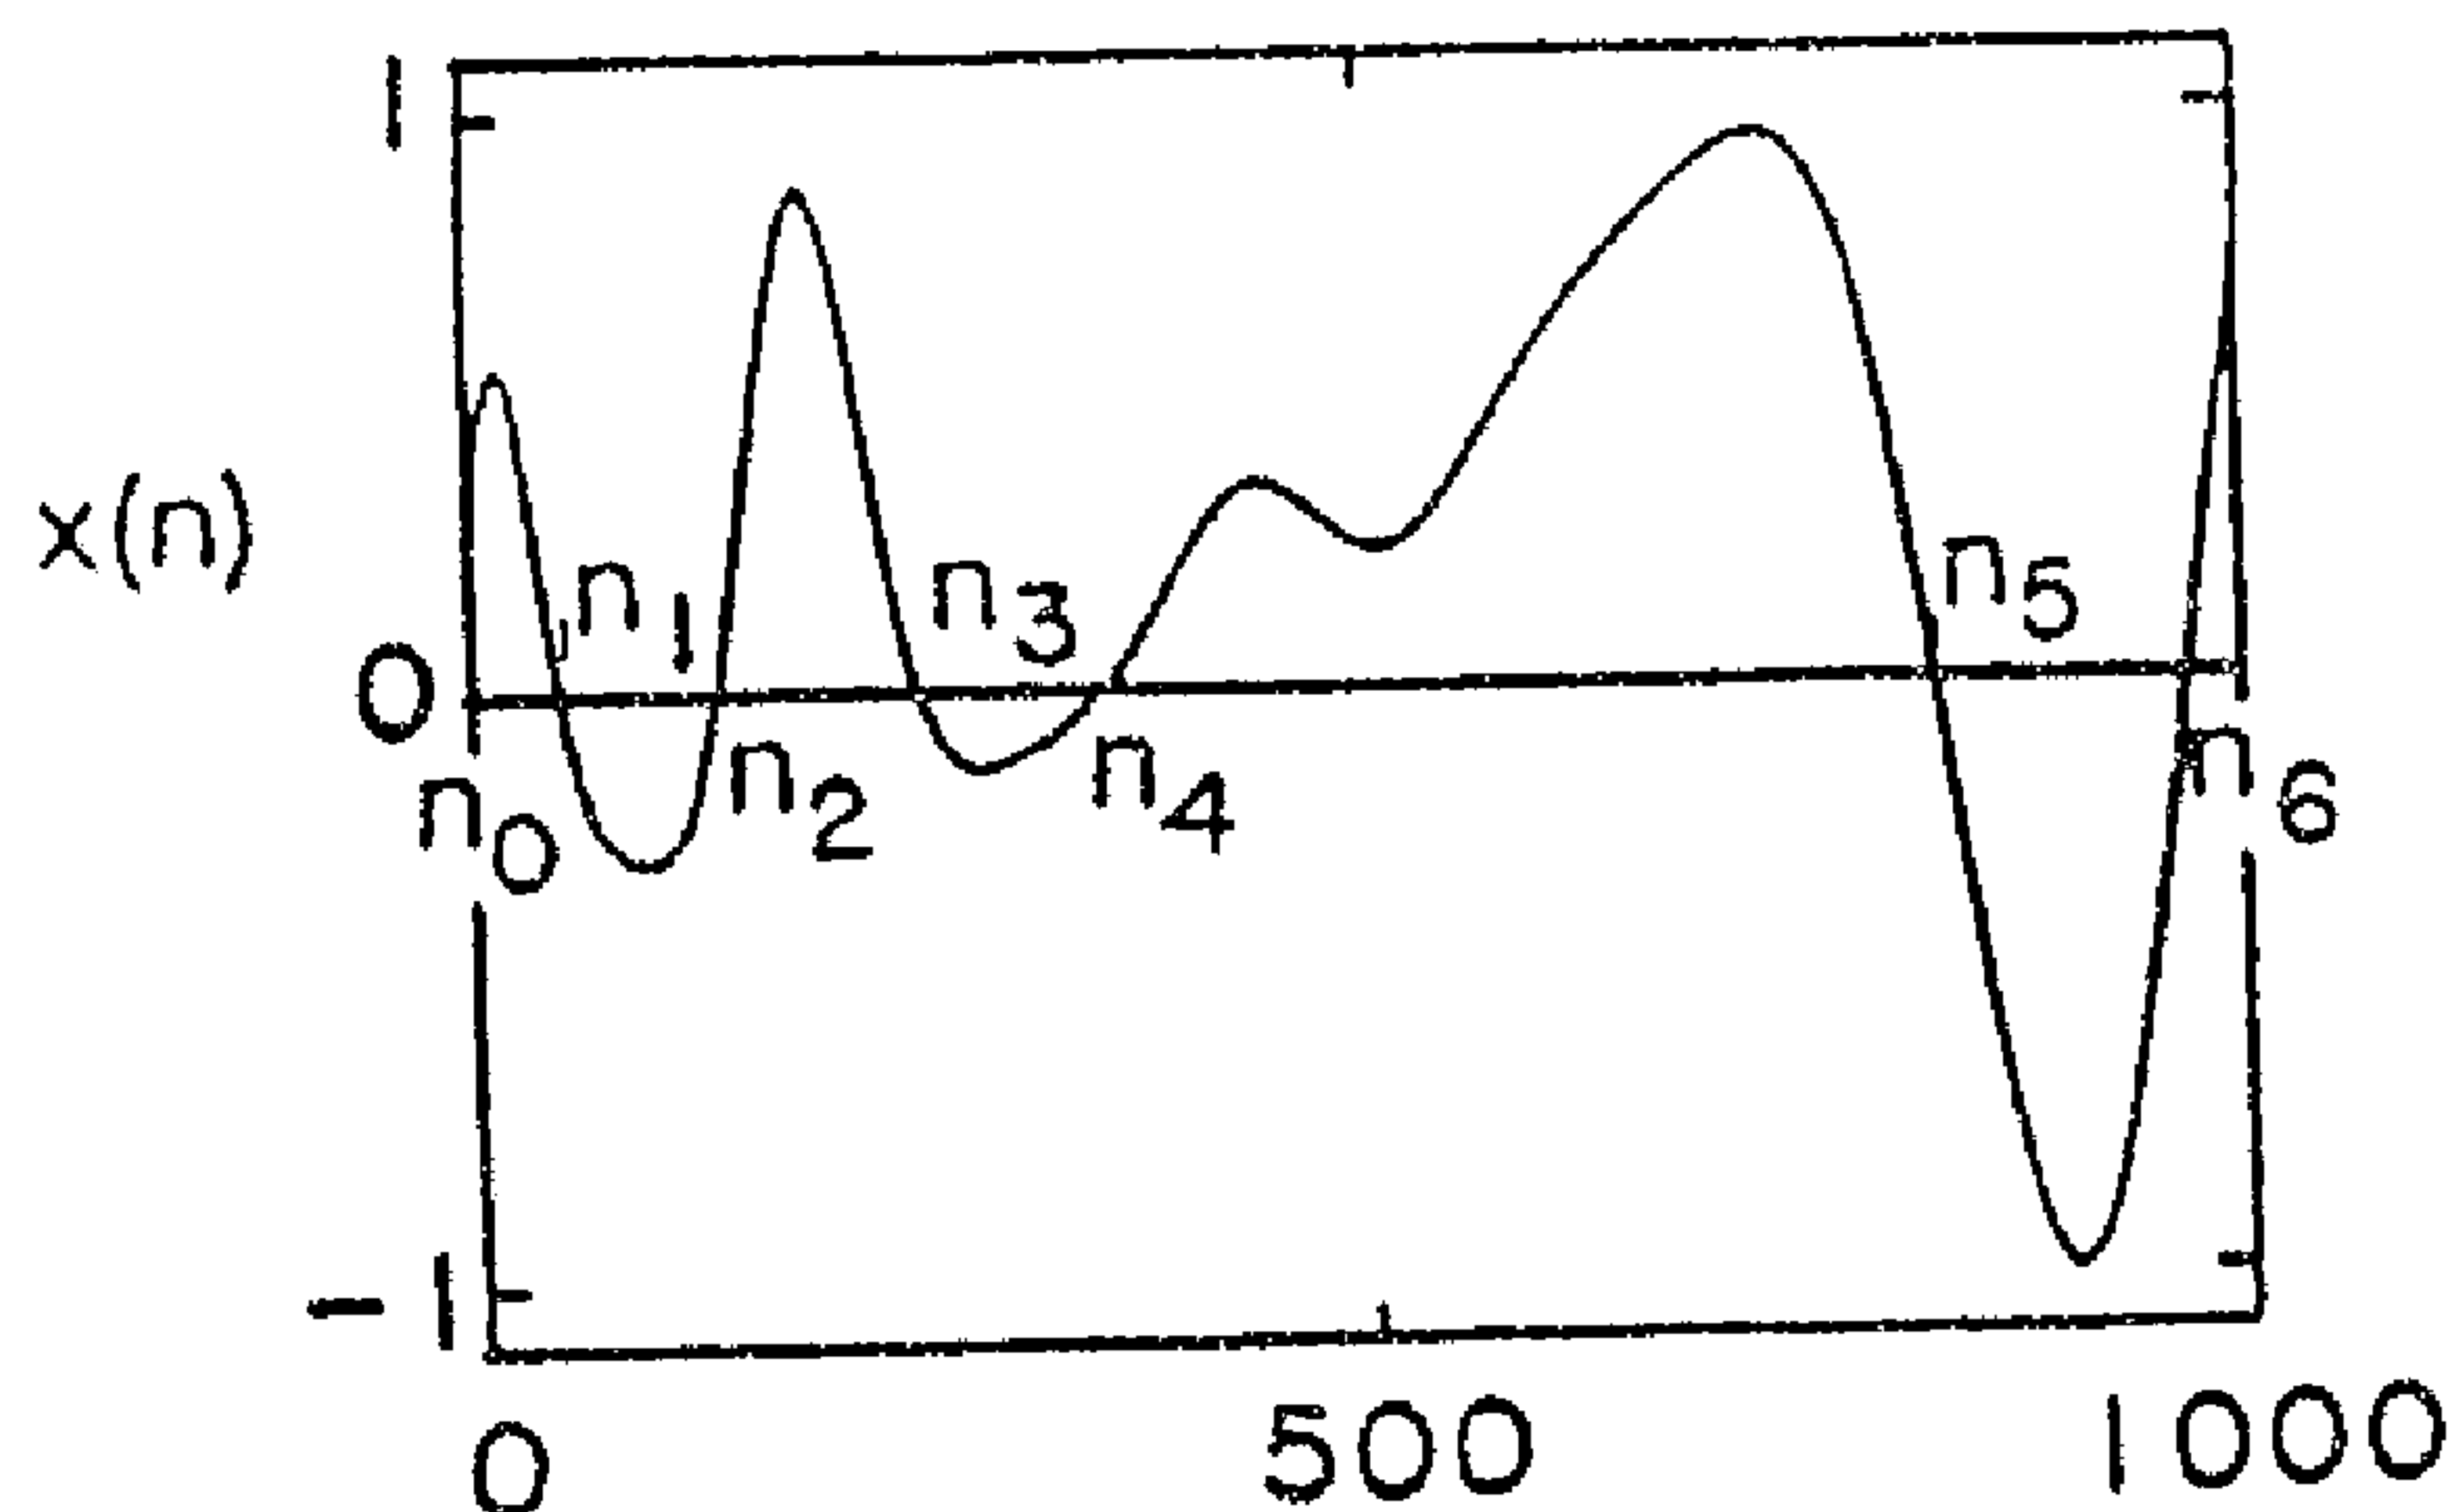

(57) **Abrégé/Abstract:**


Method and apparatus for selectively increasing, decreasing or leaving unaffected the signal-to-noise ratio of portions of an analog transmission signal. As a result it is possible to increase the signal-to-noise ratio of some analog values, decrease the signal-to-noise ratio of other analog values, and leave the signal-to-noise ratio of the remaining values of a given analog signal. A hybrid analog/digital method of signal transmission includes the steps of obtaining an analog value x_1 (22) which is desired to be transmitted, representing the analog value x_1 with B_1 bit(s) of digital information and an analog value y_1 by means of a mapping function (28) and transmitting the B_1 bit(s) and analog value y_1 . The analog value y_1 can be decoded using the B_1 bit(s) to obtain a representation of the analog value x_1 .



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : H04L 27/00 2075065	A1	(11) International Publication Number: WO 91/13506 (43) International Publication Date: 5 September 1991 (05.09.91)
(21) International Application Number: PCT/US91/01181 (22) International Filing Date: 22 February 1991 (22.02.91) (30) Priority data: 484,928 23 February 1990 (23.02.90) US (71) Applicant: MASSACHUSETTS INSTITUTE OF TECHNOLOGY [US/US]; 77 Massachusetts Avenue, Cambridge, MA 02139 (US). (72) Inventor: LIM, Jae, S. ; 21 West Chardon Road, Winchester, MA 01890 (US). (74) Agent: LEE, G., Roger; Fish & Richardson, One Financial Center, Suite 2500, Boston, MA 02111-2658 (US).		(81) Designated States: AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: HYBRID ANALOG/DIGITAL SIGNAL PROCESSING

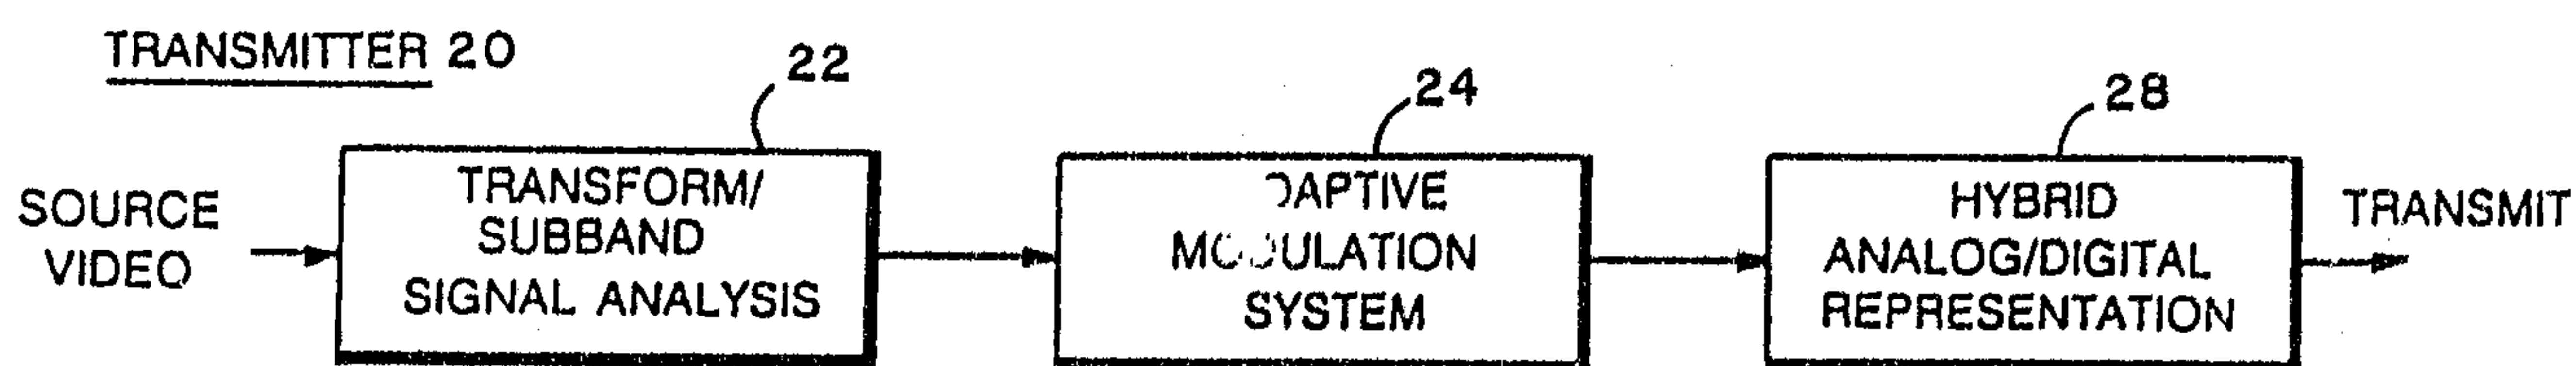

(57) Abstract

Method and apparatus for selectively increasing, decreasing or leaving unaffected the signal-to-noise ratio of portions of an analog transmission signal. As a result it is possible to increase the signal-to-noise ratio of some analog values, decrease the signal-to-noise ratio of other analog values, and leave the signal-to-noise ratio of the remaining values of a given analog signal. A hybrid analog/digital method of signal transmission includes the steps of obtaining an analog value x_1 (22) which is desired to be transmitted, representing the analog value x_1 with B_1 bit(s) of digital information and an analog value y_1 by means of a mapping function (28) and transmitting the B_1 bit(s) and analog value y_1 . The analog value y_1 can be decoded using the B_1 bit(s) to obtain a representation of the analog value x_1 .

- 1 -

HYBRID ANALOG/DIGITAL SIGNAL PROCESSING

Background of the Invention

5 The present invention relates to method and apparatus for more robust and/or more efficient signal transmission.

 In signal transmission, such as in video or voice signal broadcasting, an analog signal is often
10 represented entirely in the analog domain, or entirely in the digital domain. For example, in pulse amplitude modulation, a train of pulses of amplitude equal to the analog value is transmitted at regular intervals. In pulse code modulation, the analog value is converted to
15 binary numbers and transmitted as a serial string of bits. There are advantages and disadvantages associated with each of the two domains.

 Transmission of analog signals is desired in a variety of applications. But in the transmission of
20 analog signals, such as by radio, cable, satellite, fiber-optics, or wire, the received analog signal may suffer loss of quality due to random noise, interference from other signals, echoes due to multipath transmission, and frequency distortion. As a result, in the case of
25 broadcast radio or television, for example, the image quality at typical home receivers may be substantially degraded compared to the studio signal.

Summary of the Invention

 The present invention provides a method and
30 apparatus for selectively increasing, decreasing or

2075065

- 2 -

leaving unaffected the signal-to-noise ratio of portions of an analog transmission signal. As a result it is possible to increase the signal-to-noise ratio of some analog values, decrease the signal-to-noise ratio of other analog values, and leave unaffected the signal-to-noise ratio of the remaining values of a given analog signal, so as to better utilize a transmission channel according to the characteristics of the signal to be transmitted. In a first mode of operation, the invention provides a method and apparatus for hybrid analog/digital representation of an analog value to achieve a reduction of channel degradation. In a second mode of operation, added to the first mode of operation, the invention provides a method and apparatus for analog representation of an analog value and B bits of digital information, to achieve more efficient use of a given channel. Preferably the source signal is a video signal or an audio signal, and the hybrid analog/digital or analog representation is based upon transform or subband signal analysis of the source signal.

In one aspect of the invention, a hybrid analog/digital method of signal transmission includes the steps of obtaining an analog value x_1 which is desired to be transmitted, representing the analog value x_1 with B_1 bit(s) of digital information and an analog value y_1 by means of a mapping function and transmitting the B_1 bit(s) and analog value y_1 such that the analog value y_1 can be decoded using the B_1 bit(s) to obtain a representation of the analog value x_1 . Preferably, obtaining analog value x_1 includes submitting a source signal to transform or subband signal analysis to generate the analog value x_1 , whereby the source signal may be synthesized from the representation of the analog

- 3 -

value x_1 . The analog value x_1 may include a representation of a high energy and/or low frequency component of the source signal.

This method may further include the steps of
5 obtaining an analog value x_2 and B_2 bit(s) of digital information which are desired to be transmitted, representing the analog value x_2 and B_2 bit(s) of digital information with an analog value y_2 , and transmitting the analog value y_2 such that a respective representation of
10 the analog value x_2 and the B_2 bit(s) of digital information can be discerned from analog value y_2 , whereby analog value x_2 and B_2 bit(s) of digital information can be transmitted with a single analog value y_2 . Preferably, obtaining the analog value x_2 and B_2
15 bit(s) of digital information includes submitting a source signal to transform or subband signal analysis and processing the output such that the source signal can be represented with the analog value x_2 and B_2 bit(s) of digital information, whereby a representation of the
20 source signal can be generated based upon the representation of analog value x_2 and B_2 bit(s) of digital information discerned from analog value y_2 . The analog value y_2 may include a representation of a low energy and/or high frequency component of the source signal.

25 In another aspect of the invention, a hybrid analog/digital signal transmission system includes a circuit for analyzing a source signal to generate an analog value x_1 representative of the source signal, a circuit for representing the analog value x_1 with B_1
30 bit(s) of digital information and an analog value y_1 by means of a mapping function, and a circuit for transmitting the B_1 bit(s) of digital information and

2075065

- 4 -

analog value y_1 such that the analog value y_1 can be decoded using the B_1 bit(s) to obtain a representation of the analog value x_1 , whereby a representation of the source signal may be generated based upon the representation of the analog value x_1 . Preferably, obtaining analog value x_1 includes submitting the source signal to transform or subband signal analysis to generate the analog value x_1 , whereby a representation of the source signal may be synthesized from the representation of the analog value x_1 . The analog value x_1 may include a representation of a high energy component of the source signal.

This system may further include a circuit for obtaining an analog value x_2 and B_2 bit(s) of digital information, a circuit for representing the analog value x_2 and B_2 bit(s) of digital information with an analog value y_2 , and a circuit for transmitting the analog value y_2 such that a respective representation of the analog value x_2 and the B_2 bit(s) of digital information can be discerned from analog value y_2 , whereby analog value x_2 and the B_2 bit(s) of digital information can be transmitted with a single analog value y_2 . Preferably, obtaining the analog value x_2 and B_2 bit(s) of digital information includes submitting a source signal to transform or subband signal analysis and processing the output such that the source signal can be represented with the analog value x_2 and B_2 bit(s) of digital information, whereby a representation of the source signal can be generated based upon a representation of analog value x_2 and B_2 bit(s) of digital information discerned from analog value y_2 . The analog value y_2 may include a representation of a high-frequency component of

2075065

- 5 -

the source signal. The analog value y_2 may include a representation of low energy component of the source signal. Another aspect of the invention includes a system for receiving a transmission signal which is a hybrid analog/digital representation of an analog value x_1 , which is representative of a source signal, the system having a circuit for receiving the transmission signal and obtaining an analog value y_1 and B_1 bit(s) of digital information representative of the analog value x_1 , a circuit for generating a representation of analog value x_1 based upon analog value y_1 and the B_1 bit(s) of digital information by means of a mapping function, and a circuit for generating a representation of the source signal based upon analog value x_1 .

This system may further include a second system for receiving a second transmission signal which is an analog representation of an analog value x_2 and B_2 bit(s) of digital information, which are representative of a second source signal, the second system having a circuit for receiving the second transmission signal and obtaining an analog value y_2 representative of the analog value x_2 and B_2 bit(s) of digital information, a circuit for generating a representation of the analog signal x_2 and the B_2 bit(s) of digital information based upon analog value y_2 , and a circuit for generating a representation of the second source signal based upon the representation of analog signal x_2 and the B_2 bit(s) of digital information.

In a particularly preferred embodiment of the invention, the hybrid analog/digital representation is a value obtained by transform or subband signal analysis and is modulated with a modulation function represented

2075065

- 6 -

by a modulation factor, and the modulation factor is transmitted as additional digital information along with the modulated value.

Preferably, the B_1 bit(s) of digital information is ranging information which enables decoding y_1 to obtain x_1 , and preferably at least part of B_1 is expressed by at least part of B_2 .

Other features and advantages will become apparent from the following detailed description when read in connection with the accompanying drawings.

FIG. 1(a-g) is a graphical representation of one embodiment of mode 1 of the present invention.

FIG. 2(a-g) is a graphical representation of an alternative embodiment of mode 1 of the present invention.

FIG. 3 is a graphical representation of one embodiment of mode 2 of the present invention.

FIG. 4(a-g) is a graphical representation of one embodiment of mode 2 of the present invention.

FIG. 5 is a graphical representation of an alternative embodiment of mode 2 of the present invention.

FIG. 6(a-g) is a graphical representation of an alternative embodiment of mode 2 of the present invention.

FIG. 7(a,b) is a block diagram of an HDTV transmitter and receiver in practice of the invention.

Mode 1 - Expanded Transmission Signal

One mode of the present invention is based on the recognition that a given signal can be expanded into a desired range of amplitude at the transmitter and this expansion can be decoded at the receiver according to a

2075065

- 7 -

transmitted expansion factor. For example, an analog value x can be represented with B bit(s) and an analog value y . To illustrate, if x is in the range of $-1 \leq x \leq 1$, $B=1$, and y is in the same range of $-1 \leq y \leq 1$, then one bit of information can be used to indicate whether or not x is in the "0" range or "1" range according to whether the bit b has the value of $b=0$ or $b=1$.

In FIG. 1(a), signal $x(n)$ is shown varying between -1.0 and $+1.0$ arbitrary intensity units. For time intervals between n_0-n_1 , n_2-n_3 , n_4-n_5 and above n_6 , the signal varies essentially between 0 and 1.0 (range 1) and at other times the signal varies essentially between 0 to -1.0 (range 0). The range 0 to $+1.0$ is arbitrarily represented by digital bit $b=1$ and the range from 0 to -1.0 is arbitrarily represented by digital bit $b=0$.

Now it is possible to expand the intensity of a portion of signal $x(n)$ into the full range -1.0 to 1.0 , as long as a digital bit $b=0$ or $b=1$ representing the original range of the signal is transmitted to the receiver so that the expanded signal can be scaled to normal range. The expanded signal will fare better in the face of channel noise, thus resulting in less channel degradation imposed upon the transmission signal.

In one embodiment, the signal $x(n)$ is expanded by using the mapping function shown in FIG. 1(b). The value of $x(n)$ is mapped to an expanded analog waveform $y(n)$ according to the mapping function. The accompanying digital bit information b (which represents this expansion) can be obtained by the mapping function shown in FIG. 1(c), where the value of $x(n)$ is mapped to digital information ($b=1$ or $b=0$) according to mapping function shown. The resulting expanded analog signal

2075065

- 8 -

$y(n)$ is shown in FIG. 1(d) and the resulting digital bit information $b(n)$ is shown in FIG. 1(e). The specific choice of the mapping function in FIG. 1(b) can be made based on the signal characteristics of the analog signal x .

A simple choice of the mapping function is a linear function, as shown in FIG. 1(b). The mapping proceeds as follows: a value is selected for $x(n)$ in FIG. 1(a) which is applied to the mapping function of FIG. 1(b) to obtain the corresponding expanded value of $y(n)$, which is plotted in FIG. 1(d). For example, refer to where $x(n)$ swings below zero between times n_3 and n_4 in FIG. 1(a). At time n_3 , $x(n)$ is at zero. This is shown in FIG. 1(b) (see $x=0$) to map to $y=-1$. Thus, in FIG. 1(d), $y(n)$ is shown expanded to -1.0 intensity at n_3 . Halfway between n_3 and n_4 , the amplitude of $x(n)$ is about -0.2, which is shown in FIG. 1(b) (see $x=-0.2$) to map to $y=-0.8$. Thus, in Fig. 1(d), $y(n)$ is shown correspondingly expanded to about -0.8 halfway between n_3 and n_4 . The balance of the mapping proceeds accordingly.

Now the receiver can both scale down the expanded received signal (knowing the mapping functions of FIGS. 1(b) and 1(c)) and properly fit it into the appropriate amplitude range. As a result, a signal can be expanded for more robust transmission in the face of channel noise and can be routinely decoded according to digital side information. This robustness is shown by comparison of FIG. 1(f) and 1(g). FIG. 1(f) shows $x_a(n)$, the signal $x(n)$ conventionally transmitted and then degraded by channel noise. FIG. 1(g) shows $x_b(n)$, decoded from the more robust signal $y(n)$ degraded by the same channel

- 9 -

noise. The decoded $x_b(n)$ is a closer representation of the original signal $x(n)$ than is the decoded $x_a(n)$.

In the above example, the analog signal $x(n)$ was represented by the analog signal $y(n)$ and the 1-bit digital data $b(n)$. The analog signal $x(n)$ can also be represented with greater specificity. For example, FIG. 2(a) shows the same analog signal $x(n)$, but now it is represented by the more expanded analog signal $y(n)$ of FIG. 2(d) (compare with FIG. 1(d)) and 2-bit digital data $b(n)$ of FIG. 2(e) (compare with FIG. 1(e)).

In FIG. 1(b), the mapping function expands $x(n)$ into the total amplitude range -1.0 to 1.0. The same occurs with the mapping function of FIG. 2(b). However, $x(n)$ of FIG. 1(a) is broken into two regions (-1 to 0 and 0 to 1) while $x(n)$ of FIG. 2(a) is divided into four regions a-d, i.e., -1 to -0.5, -0.5 to 0, 0 to 0.5 and 0.5 to 1, respectively. Hence, the digital information signal $b(n)$ of FIG. 1(e) obtains two levels, bit 0 at zero amplitude and bit 1 at one intensity unit to represent the two regions (-1 to 0 and 0 to 1). However, in FIG. 2(b), the digital signal $b(n)$ (see FIG. 2(c)) corresponding to regions a-d (see FIG. 2(e)) is assigned to any one of four levels 0-3, thus requiring transmission of two bits of digital information to represent the four regions (a-d). Therefore, smaller regions of $x(n)$ can be expanded (compare FIG. 2(d) with FIG. 1(d)) and decoded according to $b(n)$, with attendant increased utilization of dynamic range and improved persistence in the presence of channel noise.

One useful embodiment of the invention would enable selectively sending analog values less or more accurately than other values based upon their relative

2075065

- 10 -

importance. For example, in transform image coding, a signal can be analyzed such that its frequency domain characteristics can be represented by the coefficients derived from the transform analysis. Suppose one analog value represents the DC or low-frequency component, a second analog value represents a mid-frequency component and a third analog value represents a high-frequency component of the analyzed signal. Since the lower-frequency components often carry more signal energy, and the higher-frequency components often carry the least, it is possible to assign two bits to the first analog value, and to greatly expand this value accordingly, one bit to the second analog value, and to expand this value accordingly, and no bits to the third analog value, without an expansion of this signal. (The bits can be transmitted as side information in a conventional manner.) The S/N improvement of the first and second analog values relative to the third analog value would be approximately 12dB and 6dB, respectively.

20 Mode 2 - Compressed Transmission

While the foregoing mode enables more robust transmission of an analog signal, in a second mode of the invention it may also be of interest to provide better utilization of part of the analog signal channel but with less robust transmission. For example, assume an analog value x and digital information b of B bit(s), and a desire to represent x and b with an analog value y . Now suppose the analog value x does not have to be represented accurately, while signal-to-noise ratio of the transmission channel does permit y to be represented accurately. Then, instead of using y to transmit only x , now y can be used to transmit x and additional digital

- 11 - 2075065

data b of B bit(s). Hence, the amount of digital data that can be transmitted depends upon the acceptable reduction in signal-to-noise ratio and the required accuracy of the received analog value of x .

5 Referring to FIG. 3, suppose that the analog value x is in the range of $-1 \leq x \leq 1$ and y is in the range of $-1 \leq y \leq 1$. The positive region of y is arbitrarily allocated as the Bit 1 domain and the negative region of y as the Bit 0 domain. The x value can be mapped to
10 positive y or negative y , depending upon a single bit of information. As a result, if the analog value x is transmitted in the Bit 1 range, then the analog value y represents Bit 1 information in addition to the analog value x . Likewise, if the analog value is transmitted in
15 the Bit 0 range of the y axis, then the bit 0 digital information is transmitted by the analog signal. At the receiver, the analog value is utilized as an analog value accordingly, however, its bit value is also decoded from its range location.

20 As shown in FIG. 3, if the bit of information sought to be transmitted is 1, then the x value is mapped to a positive y value from $T+$ to 1. As a precaution against an error in decoding the bit information due to channel noise, the value of $T+$ can be chosen to be
25 greater than 0 to allow some guard region which would prevent decoding error. If the one bit of information is 0 value, then the analog value of x can be mapped into the negative y region, where the value of $T-$ is chosen to be less than 0 again to provide a guard region.

30 The specific choice of mapping function can be made based on the signal characteristics of analog signal x . A simple choice of mapping functions could be a linear function, which was the case in FIG. 3.

2075065

- 12 -

Typically, T^- equals $-T^+$ and the functions in FIG. 3 are shifted versions of each other, although these features are not required.

As a specific example, digital data $b(n)$ and
5 analog signal $x(n)$ are shown in FIG. 4(a) and FIG. 4(b) respectively. The analog signal $y(n)$ is obtained from combining $b(n)$ and $x(n)$ according to the mapping function in FIG. 3, and is shown in FIG. 4(c). FIG. 4(d) shows
10 $x_a(n)$, the analog signal $x(n)$ in FIG. 4(b) degraded by channel noise. FIG. 4(e) shows $y_b(n)$, the analog signal $y(n)$ in FIG. 4(c) degraded by the same channel noise. FIG. 4(f) and FIG. 4(g) show the decoded digital data $\hat{b}(n)$ and decoded analog signal $x_b(n)$ respectively. Comparison of $x_a(n)$ in FIG. 4(d) and $x_b(n)$ in FIG. 4(g)
15 shows that $x_b(n)$ has more noise than $x_a(n)$. However, the lower S/N ratio of $x_b(n)$ allows transmitting the digital data $b(n)$ along with $x(n)$, which may be advantageously employed when said signal degradation is less important than extra transmission of digital data.

20 In alternative embodiments of the invention, use of more than two signal ranges enables transmission of a greater amount of digital information. The number of ranges will depend upon the degradation willing to be suffered in the reduced value of analog value x . As a
25 specific example, FIG. 5 and FIG. 6 are the same as FIG. 3 and FIG. 4, except that two-bit digital data (four signal ranges) $b(n)$ and one analog signal $x(n)$ are represented by one analog signal $y(n)$.

One useful embodiment of the invention would
30 enable selectively sending analog values less or more accurately than other values. For example, in transform image coding, suppose one analog value represents a low-frequency or DC component and a second analog value

represents a mid-frequency component, and a third analog value represents a high-frequency component. Since the lower-frequency components often carry more signal energy, it is possible to represent the first analog value and no digital information as an analog value, the second analog value and one bit of digital information as an analog value, and the third analog value and two bits of digital information as an analog value. The S/N decrease of the second and third analog values relative to the first analog value would be approximately 6dB and 12dB respectively, assuming that the guard-band regions are not large. This example shows that the method described herein permits de-emphasizing different analog values upon their relative importance.

15 Combination of Mode 1 and Mode 2

The above two modes of operation can be combined to increase the signal-to-noise ratio of some analog values, decrease the signal-to-noise ratio of other analog values, and leave signal-to-noise ratio of remaining analog values unaffected. Hence the invention can be incorporated into a hybrid analog/digital representation system, such as in the design of a channel-compatible HDTV that is robust in the presence of channel degradation and that makes efficient use of bandwidth.

In an illustrative embodiment of the invention, shown in FIG. 7, source video signal 10 is applied to a transform/subband signal analyzer 22 of transmitter 20. The output is applied to an adaptive modulation system. The output of the adaptive modulation system contains both analog data (such as a modulated transmission signal) and digital data (such as the modulation factor

2075065

- 14 -

necessary to demodulate the modulated transmission signal.) This analog and digital data are applied to a hybrid analog/digital representation processor 28. This data is now transmitted in the manner set forth hereinabove.

5 In the receiver of such a system, the received signal 110 is applied to inverse hybrid analog/digital representation processor 128 of receiver 120. The decoded analog/digital output is applied to adaptive demodulator 124. The demodulated signal is now applied to transform/subband synthesizer 122 to synthesize a representation of the original source video signal 10.

10 It will now be appreciated that the present invention in mode 1 enables transmission of a single analog value with a single expanded analog value and digital decoding information. It is further possible to transmit a single analog value and digital information in mode 2 with a single compacted analog value. In the combined mode 1 and mode 2 operation, the mode 2 digital information may be used to express the digital decoding information of mode 1. The above transmitting may take the form of representing a value perhaps for later transmission or other use. As a result, more robust and/or more efficient signal transmission may be achieved.

25 Other embodiments are within the following claims.
What is claimed is:

WHAT IS CLAIMED IS:

1. A hybrid analog/digital method of information signal transmission
5 comprising the following steps:

obtaining a first analog value x_1 which is desired to be transmitted;

mapping the first analog value x_1 to an analog value y_1 and to B_1 bit(s) of
digital information according to a first mapping function;

transmitting the B_1 bits (s) of digital information; and

10 transmitting analog value y_1 such that the analog value y_1 can be decoded
using the B_1 bit(s) of digital information to obtain a representation of the first analog
value x_1 .

2. The method of claim 1 wherein obtaining first analog value x_1 includes
15 submitting a source signal to transform or subband signal analysis to generate the
analog value x_1 , whereby the source signal may be synthesized from the
representation of the analog value x_1 .

3. The method of claim 2 wherein the step of obtaining the first analog value
20 x_1 comprises obtaining a representation of a high energy component of the source
signal.

4. The method of claim 2 wherein the step of obtaining the first analog value
25 x_1 comprises obtaining a representation of a low-frequency component of the
source signal.

5. The method of claim 2 or 3 or 4 wherein the step of submitting a source
signal to transform or subband signal analysis comprises submitting a source
signal comprising a video signal or an audio signal.

6. The method of claim 1 or 2 further comprising the steps:
30 obtaining a second analog value x_2 and B_2 bit(s) of digital information,
both of which are desired to be transmitted;

- 16 -

mapping the second analog value x_2 and B_2 bit(s) of digital information to an analog value y_2 according to a second mapping function; and

transmitting the analog value y_2 such that a respective representation of both the second analog value x_2 and the B_2 bit(s) of digital information can each be discerned from analog value y_2 , whereby second analog value x_2 and B_2 bit(s) of digital information can be transmitted with a single analog value y_2 .

7. The method of claim 6 wherein obtaining the second analog value x_2 and B_2 bit(s) of digital information includes submitting a source signal to transform or subband signal analysis and processing the output such that the source signal can be represented with the analog value x_2 and B_2 bit(s) of digital information, whereby a representation of the source signal can be generated based upon the representation of second analog value x_2 and B_2 bit(s) of digital information discerned from analog value y_2 .

8. The method of claim 7 wherein the step of mapping the second analog value x_2 and B_2 bit(s) of digital information to the second analog value y_2 comprises mapping a representation of a low energy component of the source signal.

9. The method of claim 8 wherein the step of submitting a source signal to transform or subband signal analysis comprises submitting a source signal comprising a video signal or an audio signal.

10. The method of claim 7 wherein the step of mapping the second analog value x_2 and B_2 bit(s) of digital information to the second analog value y_2 comprises mapping a representation of a high-frequency component of the source signal.

11. The method of claim 7 wherein the step of submitting a source signal to transform or subband signal analysis comprises submitting a source signal comprising a video signal or an audio signal.

12. The method of claim 8 wherein the step of submitting a source signal to

- 17 -

transform or subband signal analysis comprises submitting a source signal comprising a video signal or an audio signal.

5 13. The method of claim 7 wherein the step of obtaining a first analog value x_1 comprises obtaining a first analog component of a source signal, the step of obtaining a second analog value x_2 comprises obtaining a second analog component of a source signal, and wherein said method further comprises providing that at least some of said B_1 bits are expressed by at least some of said B_2 bits, such that said B_1 bits and said B_2 have portions in common, and y_2 includes
10 said some of said B_1 bits.

14. The method of claim 6 wherein the step of obtaining a first analog value x_1 comprises obtaining a first analog component of a source signal, the step of obtaining a second analog value x_2 comprises obtaining a second analog
15 component of a source signal, and wherein said method further comprises providing that at least some of said B_1 bits are expressed by at least some of said B_2 bits, such that said B_1 bits and said B_2 have portions in common, and y_2 includes said some of said B_1 bits.

20 15. The method of claim 14 wherein said steps of obtaining a first analog component and a second analog component of a source signal respectively comprise obtaining a source signal comprising a video signal or an audio signal.

25 16. The method of claim 15 wherein the step of obtaining a first analog component of a source signal comprises obtaining a low frequency component of said source signal, and the step of obtaining a second analog component of a source signal comprises obtaining a high frequency component of said source signal.

30 17. The method of claim 15 wherein the step of obtaining a first analog component of a source signal comprises obtaining a high energy component of said source signal, and the step of obtaining a second analog component of a

- 18 -

source signal comprises obtaining a low energy component of said source signal.

18. A hybrid analog/digital information signal transmission system, comprising:

5 means for obtaining a first analog value x_1 which is desired to be transmitted;

means for mapping the first analog value x_1 to an analog value y_1 and B_1 bit(s) of digital information according to a first mapping function;

means for transmitting the B_1 bit(s) of digital information; and

10 means for transmitting analog value y_1 such that the analog value y_1 can be decoded using the B_1 bit(s) of digital information to obtain a representation of the first analog value x_1 .

15 19. The system of claim 18 wherein the first analog value x_1 includes a representation of a high energy component of the source signal.

20. The system of claim 18 wherein the first analog value x_1 includes a representation of a low-frequency component of the source signal.

20 21. The system of claim 18 wherein the source signal is a video signal or an audio signal.

22. The system of a claim 18 further comprising:

25 means for obtaining a second analog value x_2 and B_2 bit(s) of digital information, both of which are desired to be transmitted;

means for mapping the second analog value x_2 and B_2 bit(s) of digital information to an analog value y_2 according to a second mapping function; and

30 means for transmitting the analog value y_2 such that a respective representation of both the second analog value x_2 and the B_2 bit(s) of digital information can each be discerned from analog value y_2 , whereby second analog value x_2 and B_2 bit(s) of digital information can be transmitted with a single analog value y_2 .

23. The system of claim 22 wherein said means for obtaining the second analog value x_2 and B_2 bit(s) of digital information includes means for submitting a source signal to transform or subband signal analysis and processing the output of the analysis such that the source signal can be represented with the analog value x_2 and B_2 bit(s) of digital information, whereby a representation of the source signal can be generated based upon a representation of second analog value x_2 and B_2 bit(s) of digital information discerned from analog value y_2 .

24. The system of claim 23 wherein x_1 is a first analog component of a source signal and x_2 is a second analog component of a source signal, and wherein at least some of said B_1 bits are expressed by at least some of said B_2 bits, such that said B_1 and B_2 bits have portions in common, and y_2 includes said some of said B_1 bits.

25. The system of claim 22 wherein the second analog value y_2 includes a representation of a high-frequency component of the source signal.

26. The system of claim 22 wherein the second analog value y_2 includes a representation of a low energy component of the source signal.

27. The system of claim 22 wherein the source signal is a video signal or an audio signal.

28. The system of claim 22, wherein x_1 is a first analog component of a source signal and x_2 is a second analog component of a source signal, and wherein at least some of said B_1 bits are expressed by at least some of said B_2 bits, such that said B_1 bits and B_2 bits have portions in common, and y_2 includes said some of said B_1 bits.

29. A system for receiving a transmission signal which is a hybrid analog/digital representation of a first analog value x_1 which is representative of a first component of a source signal, the system comprising:

- 20 -

a circuit for receiving the transmission signal and obtaining an analog value y_1 and B_1 bit(s) of digital information representative of the first analog value x_1 ,

a circuit for generating a representation of first analog value x_1 by using the B_1 bit(s) of digital information and analog value y_1 , wherein said analog value y_1 is related to analog value x_1 according to a mapping function, and

a circuit for generating said representation of a first component of a source signal based upon said first analog value x_1 .

30. The system of claim 29 wherein the transmitted signal has been generated by transform or subband signal analysis of the source signal.

31. The system of claim 29 further comprises a second system for receiving a second transmission signal which is an analog representation of a second analog value x_2 and B_2 bit(s) of digital information, which are representative of a second component of said source signal, the second system comprising:

a circuit for receiving the second transmission signal and obtaining an analog value y_2 representative of both the second analog value x_2 and the B_2 bit(s) of digital information,

a circuit for generating a representation of a second analog value x_2 and B_2 bit(s) of digital information based upon analog value y_2 according to a second mapping function, and

a circuit for generating a representation of said second component of the source signal based upon the representation of second analog signal x_2 and the B_2 bit(s) of digital information.

32. The system of claim 31 wherein the transmitted signal has been generated by transform or subband signal analysis of the source signal.

- 21 -

33. The system of claim 29 wherein the source signal is a video signal or an audio signal.

CASSAN, MACLEAN
P.O. Box 11100, Stn. "H"
Suite 401, 80 Aberdeen Street
Ottawa, Canada
K2H 7T8

Agents for the Applicant

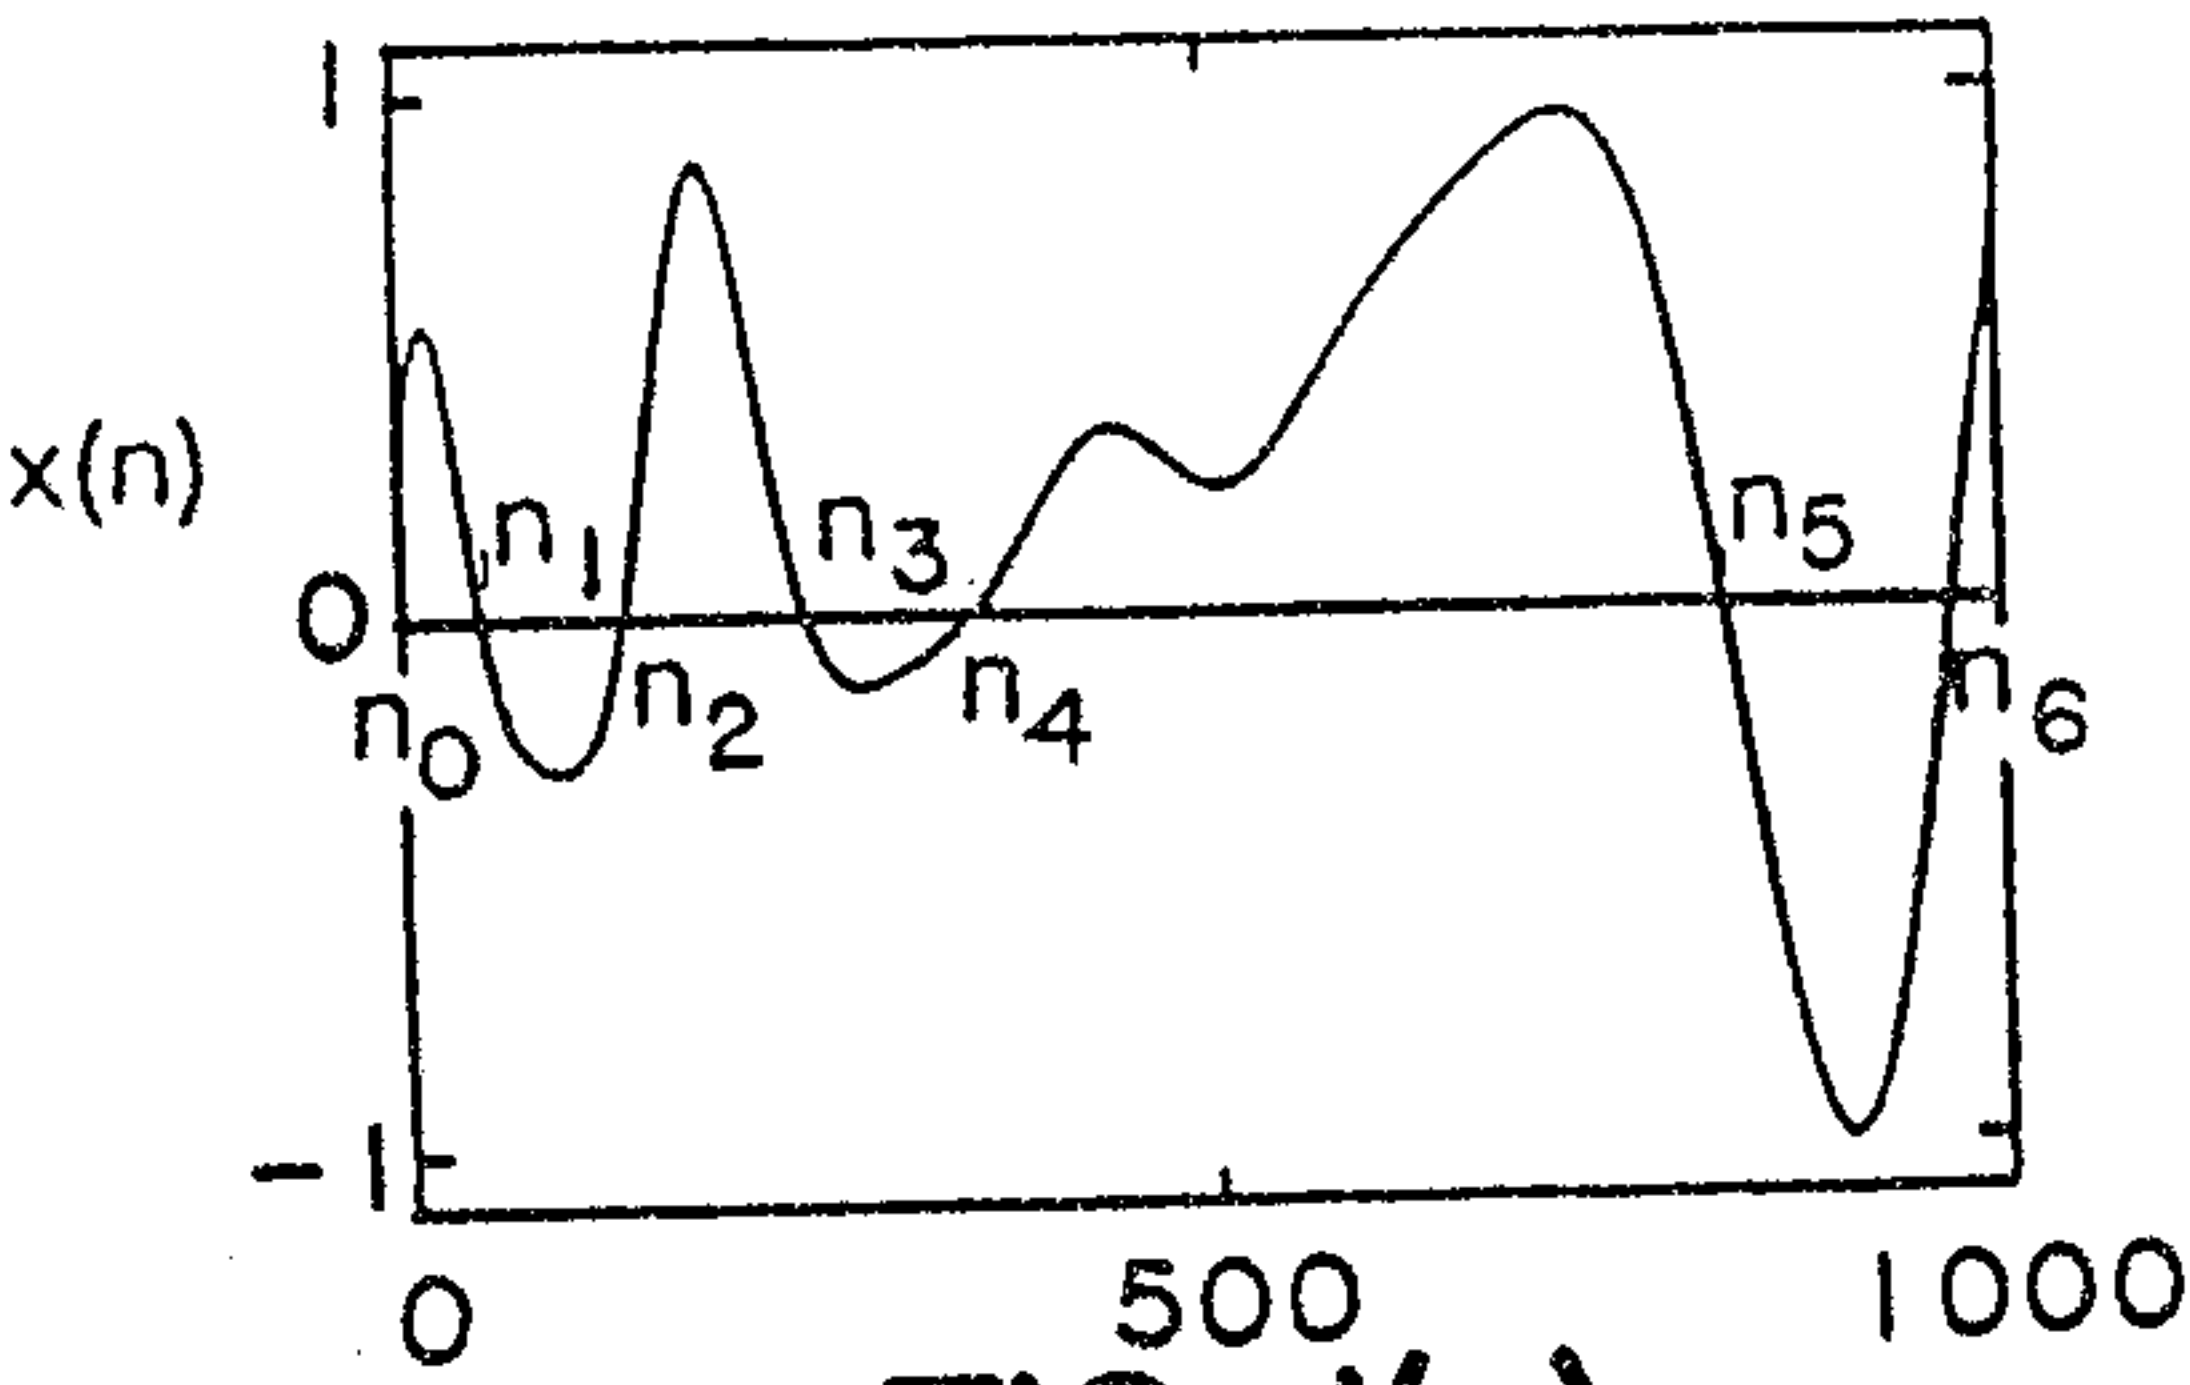


FIG. 1(a)

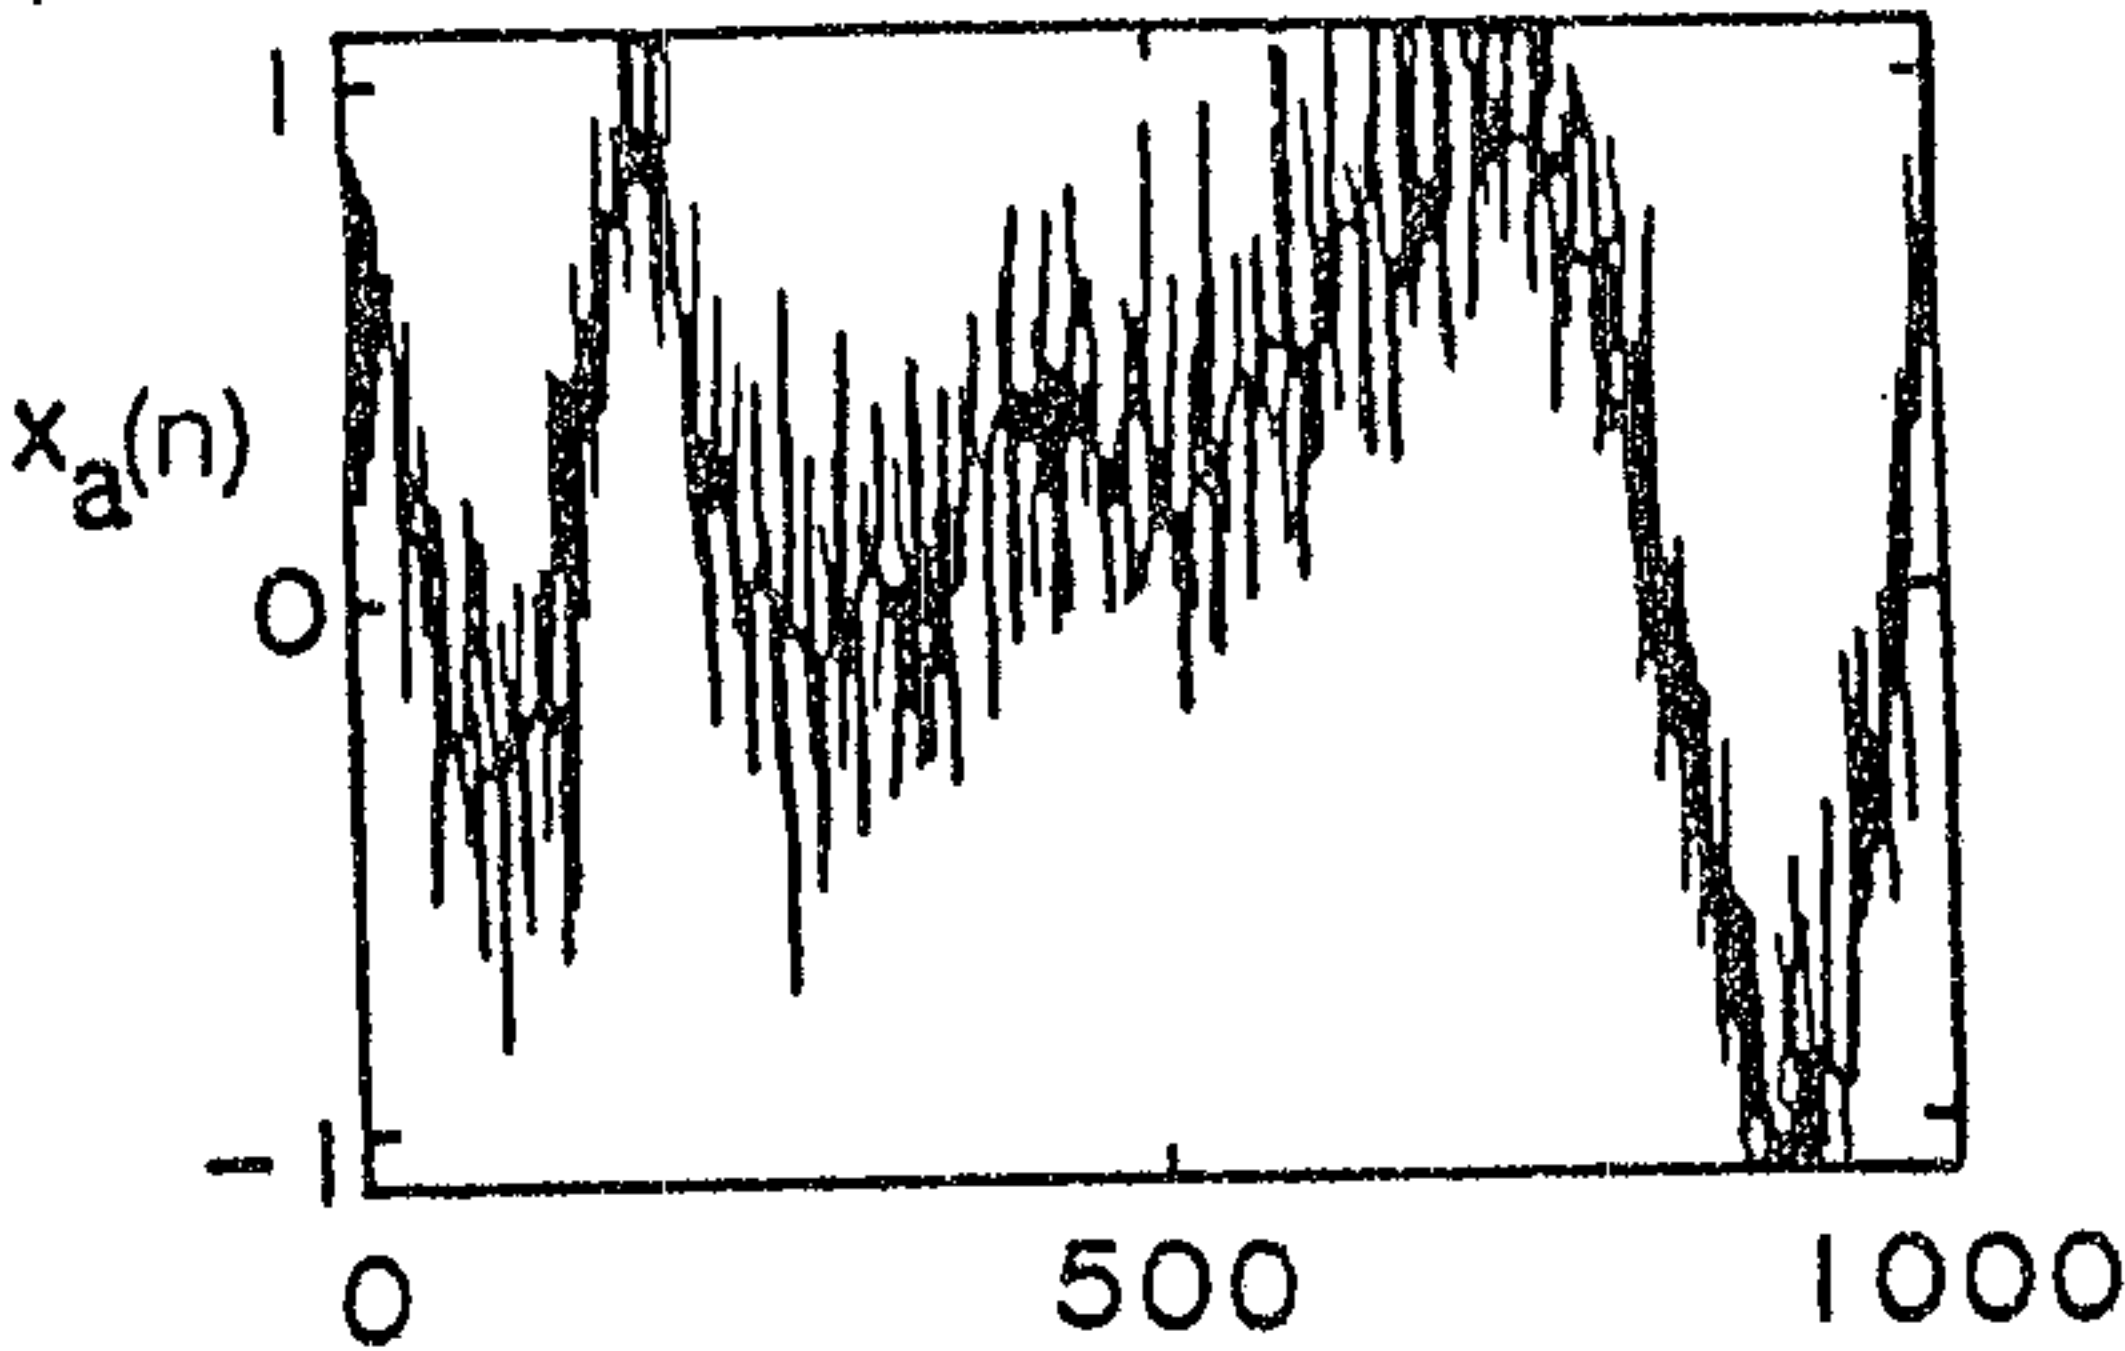


FIG. 1(f)

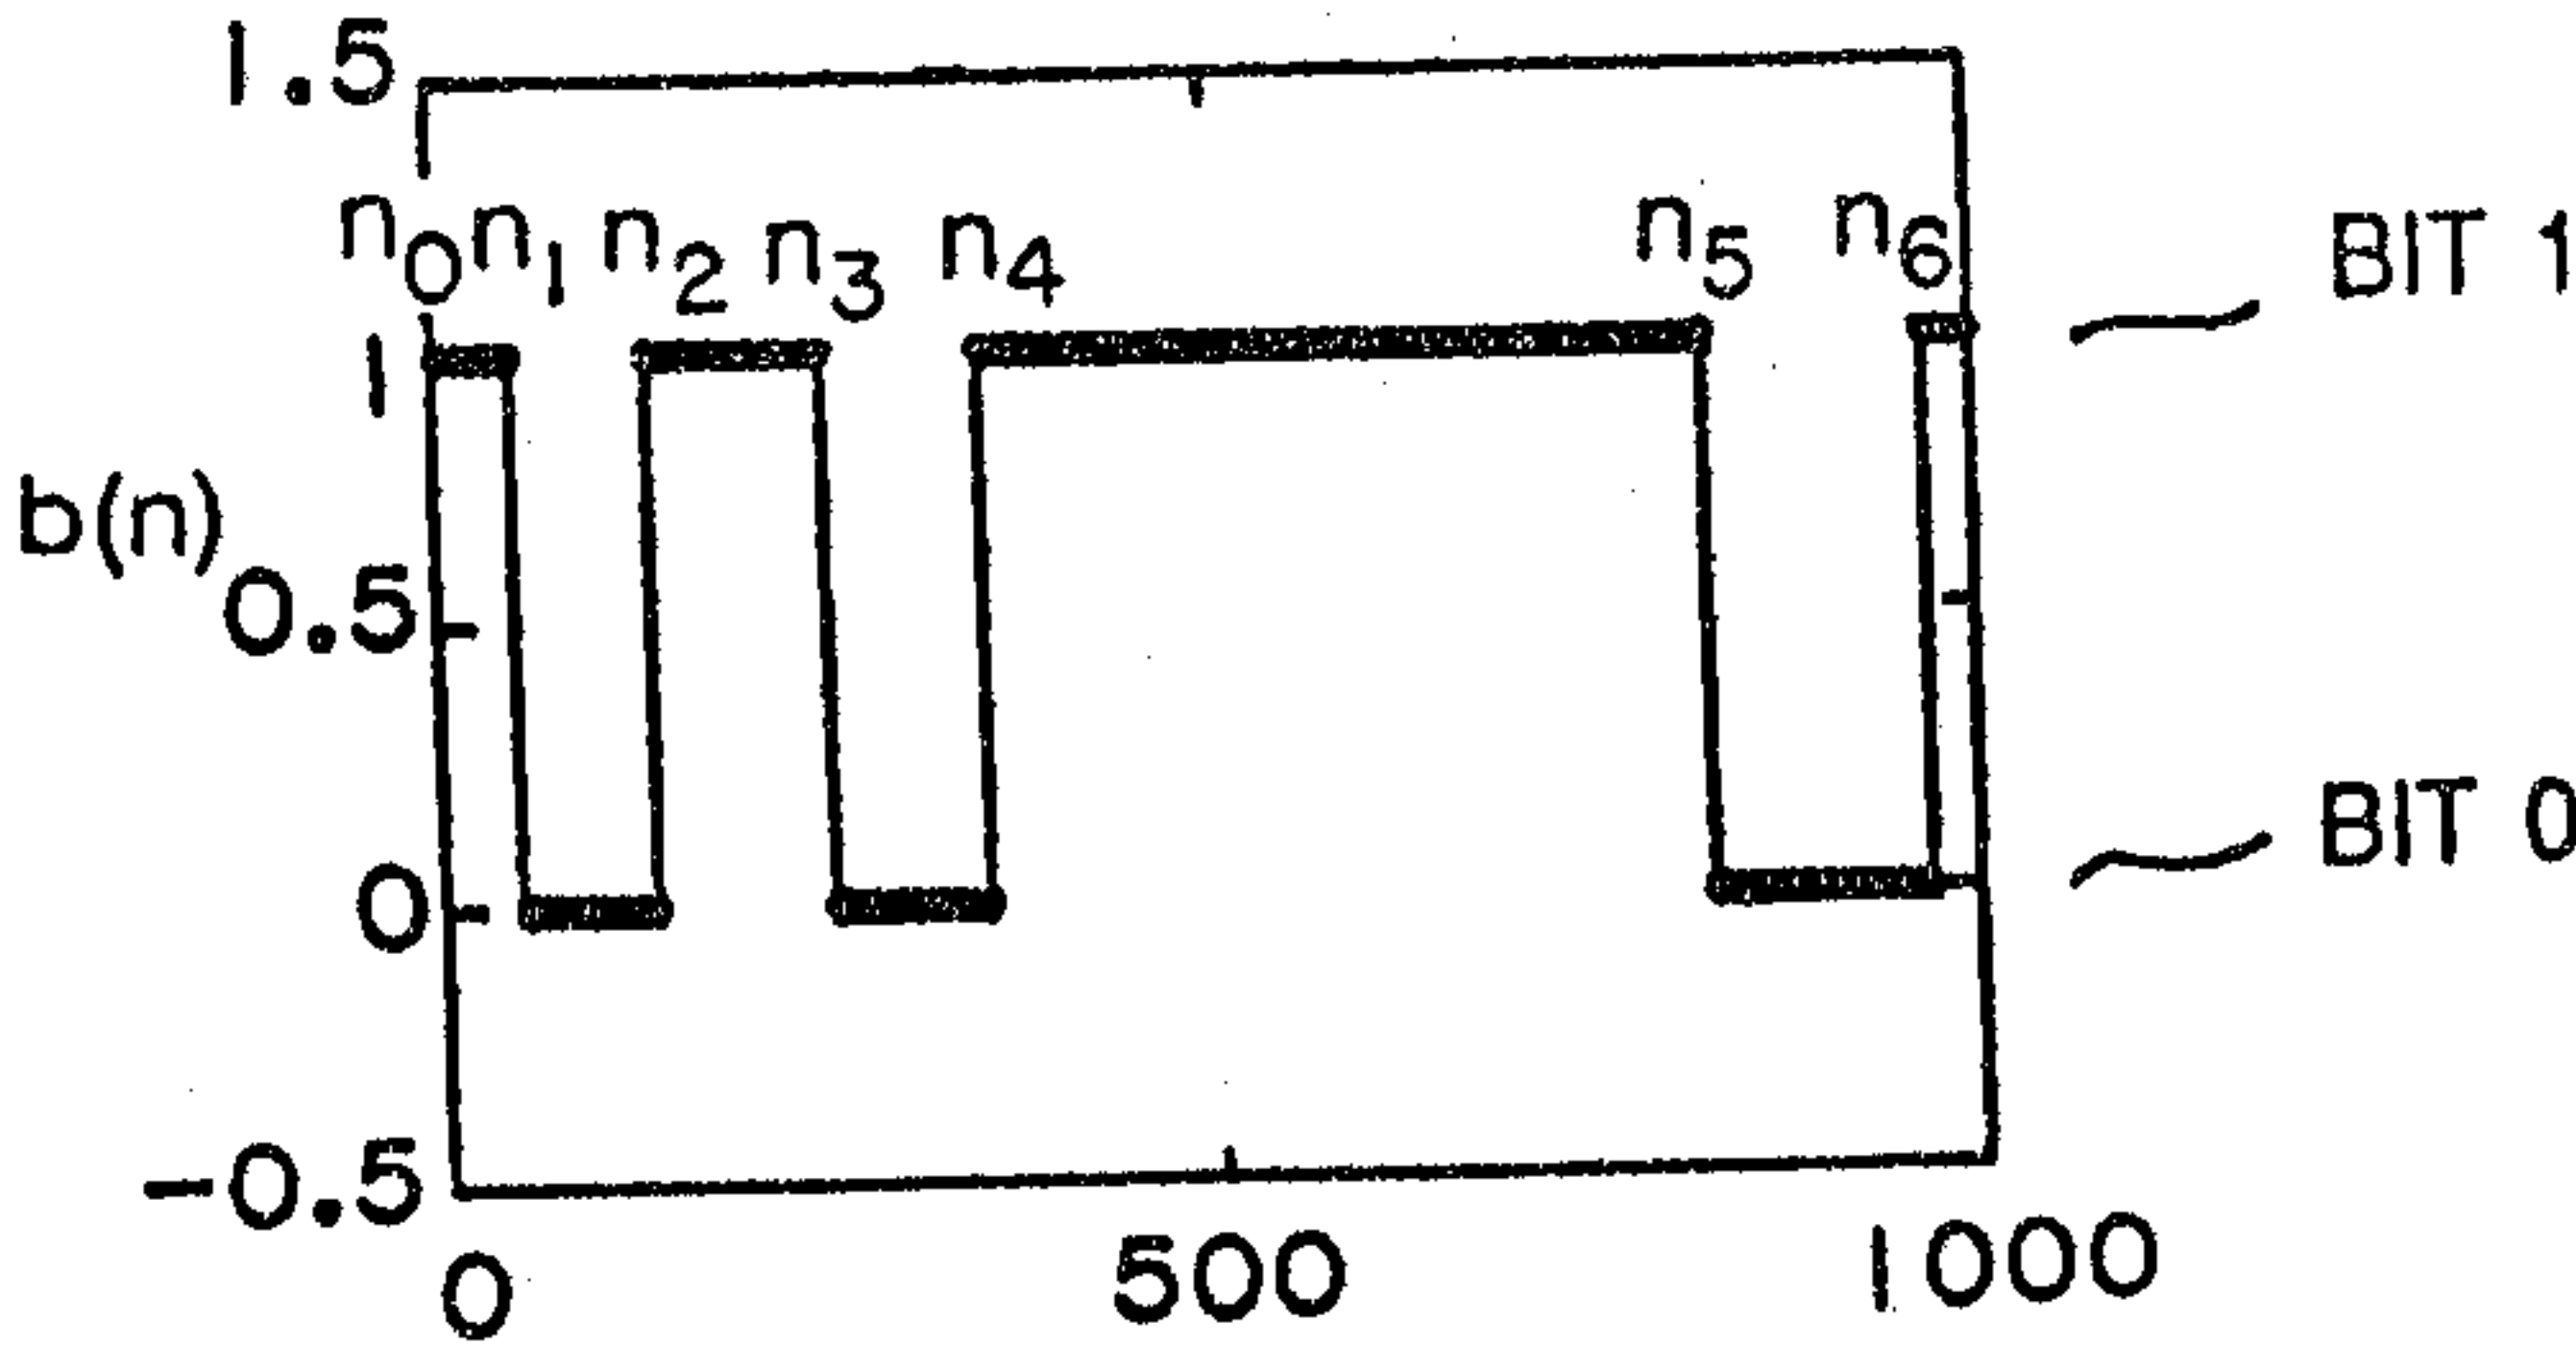


FIG. 1(e)

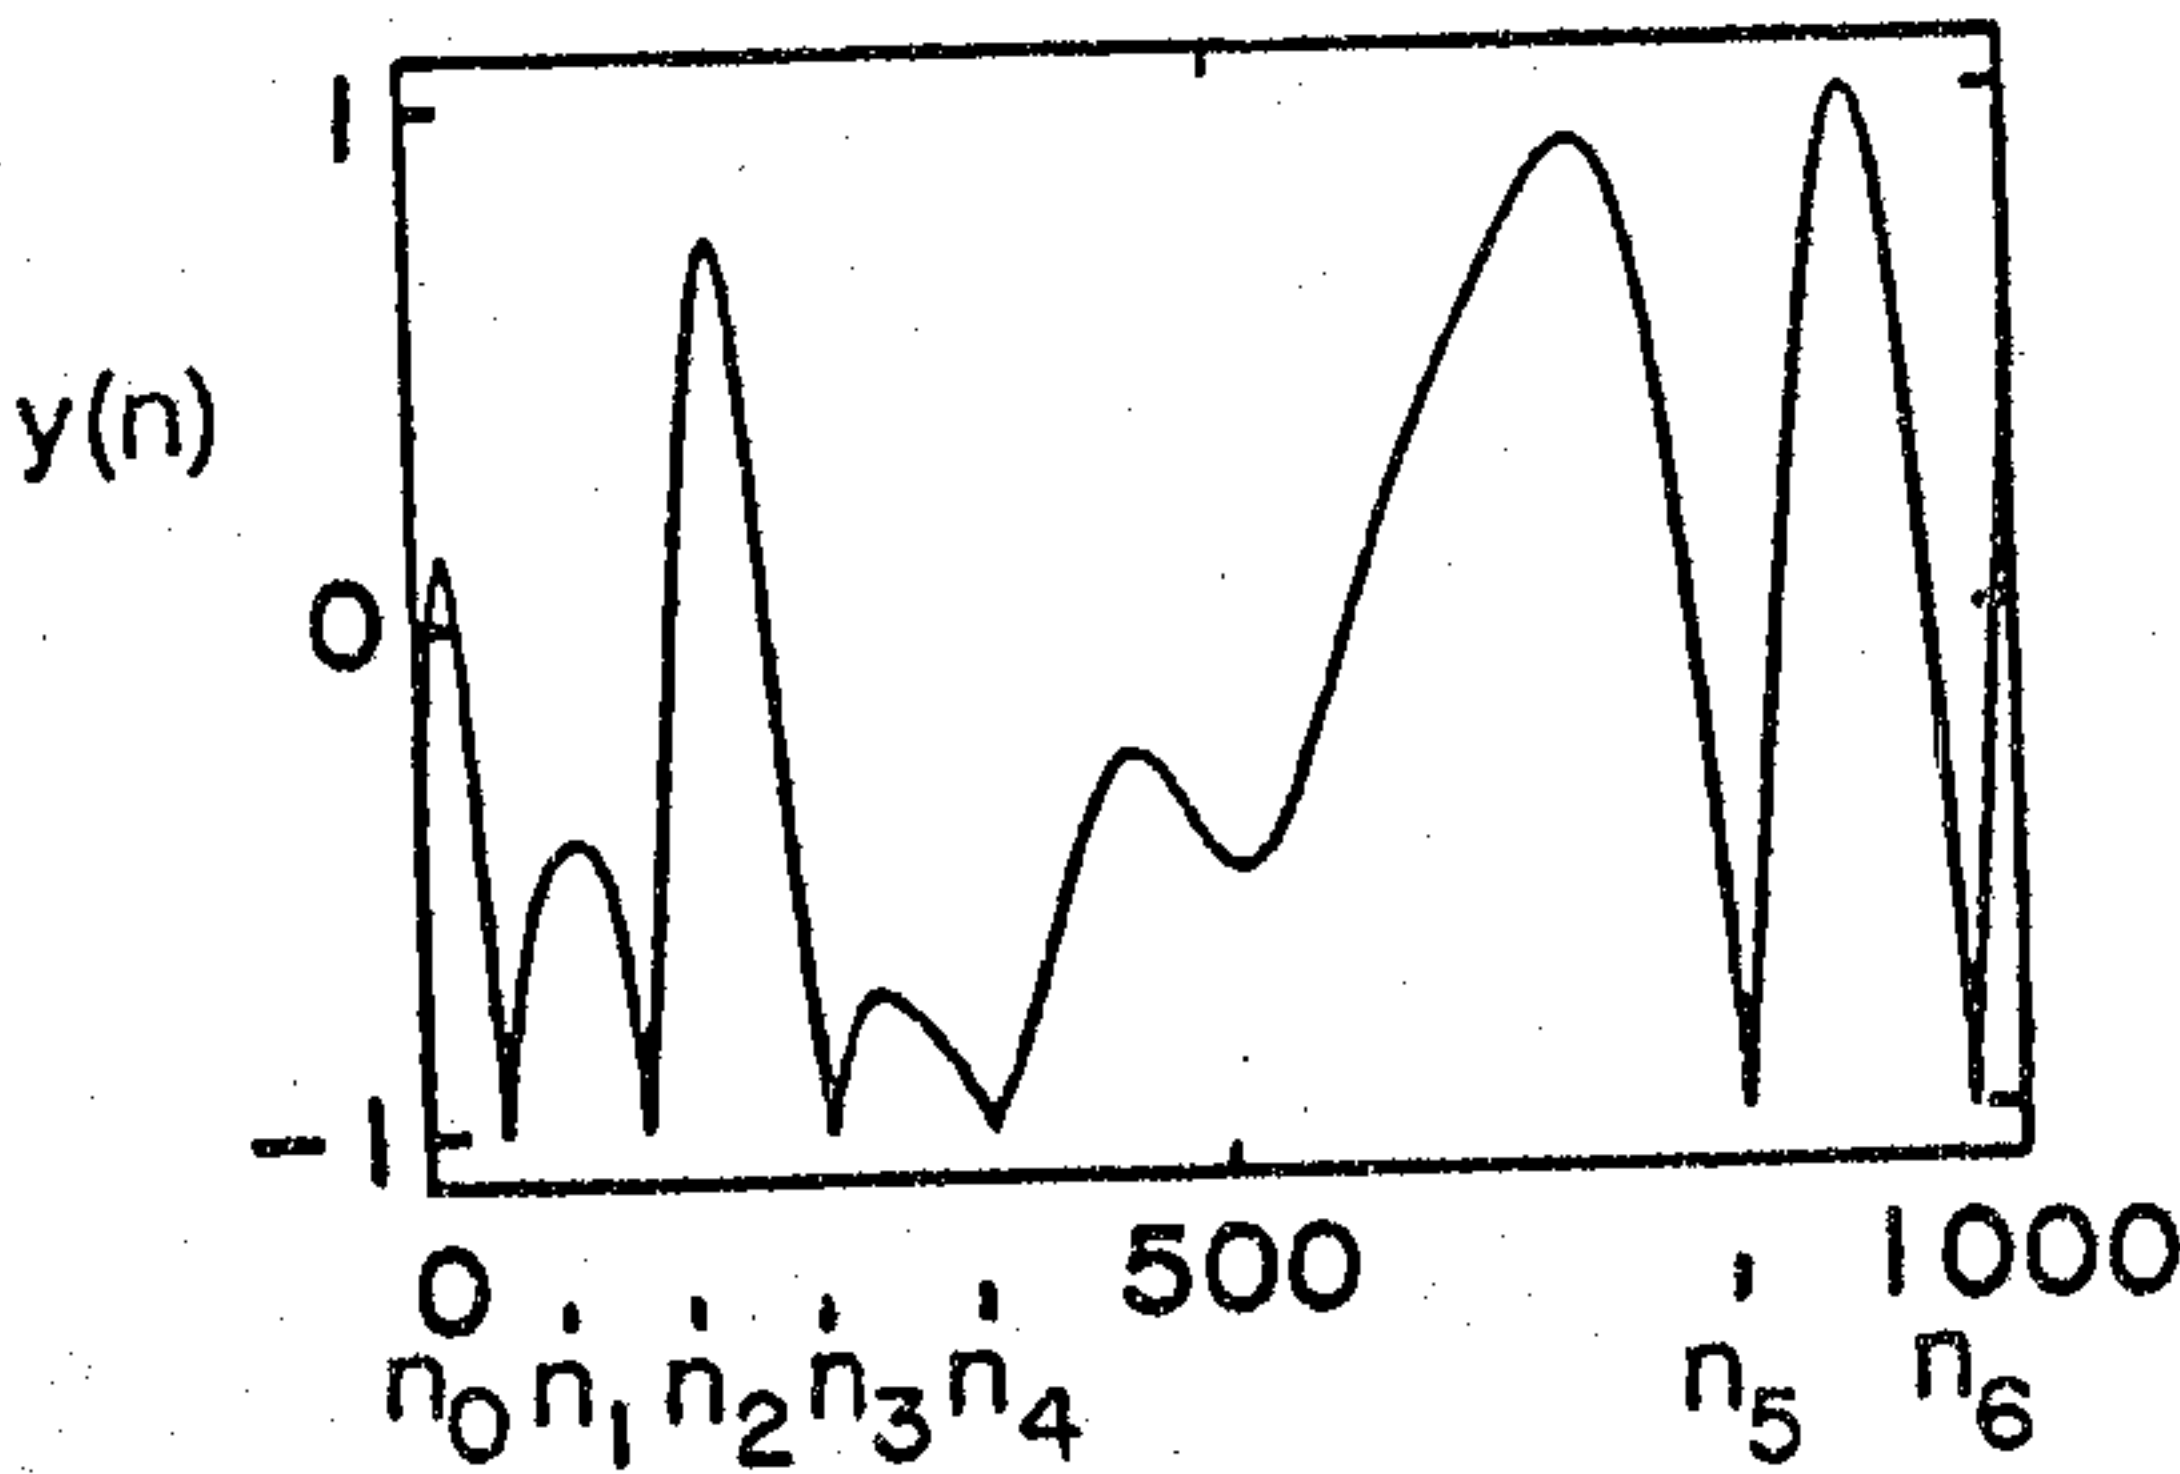


FIG. 1(d)

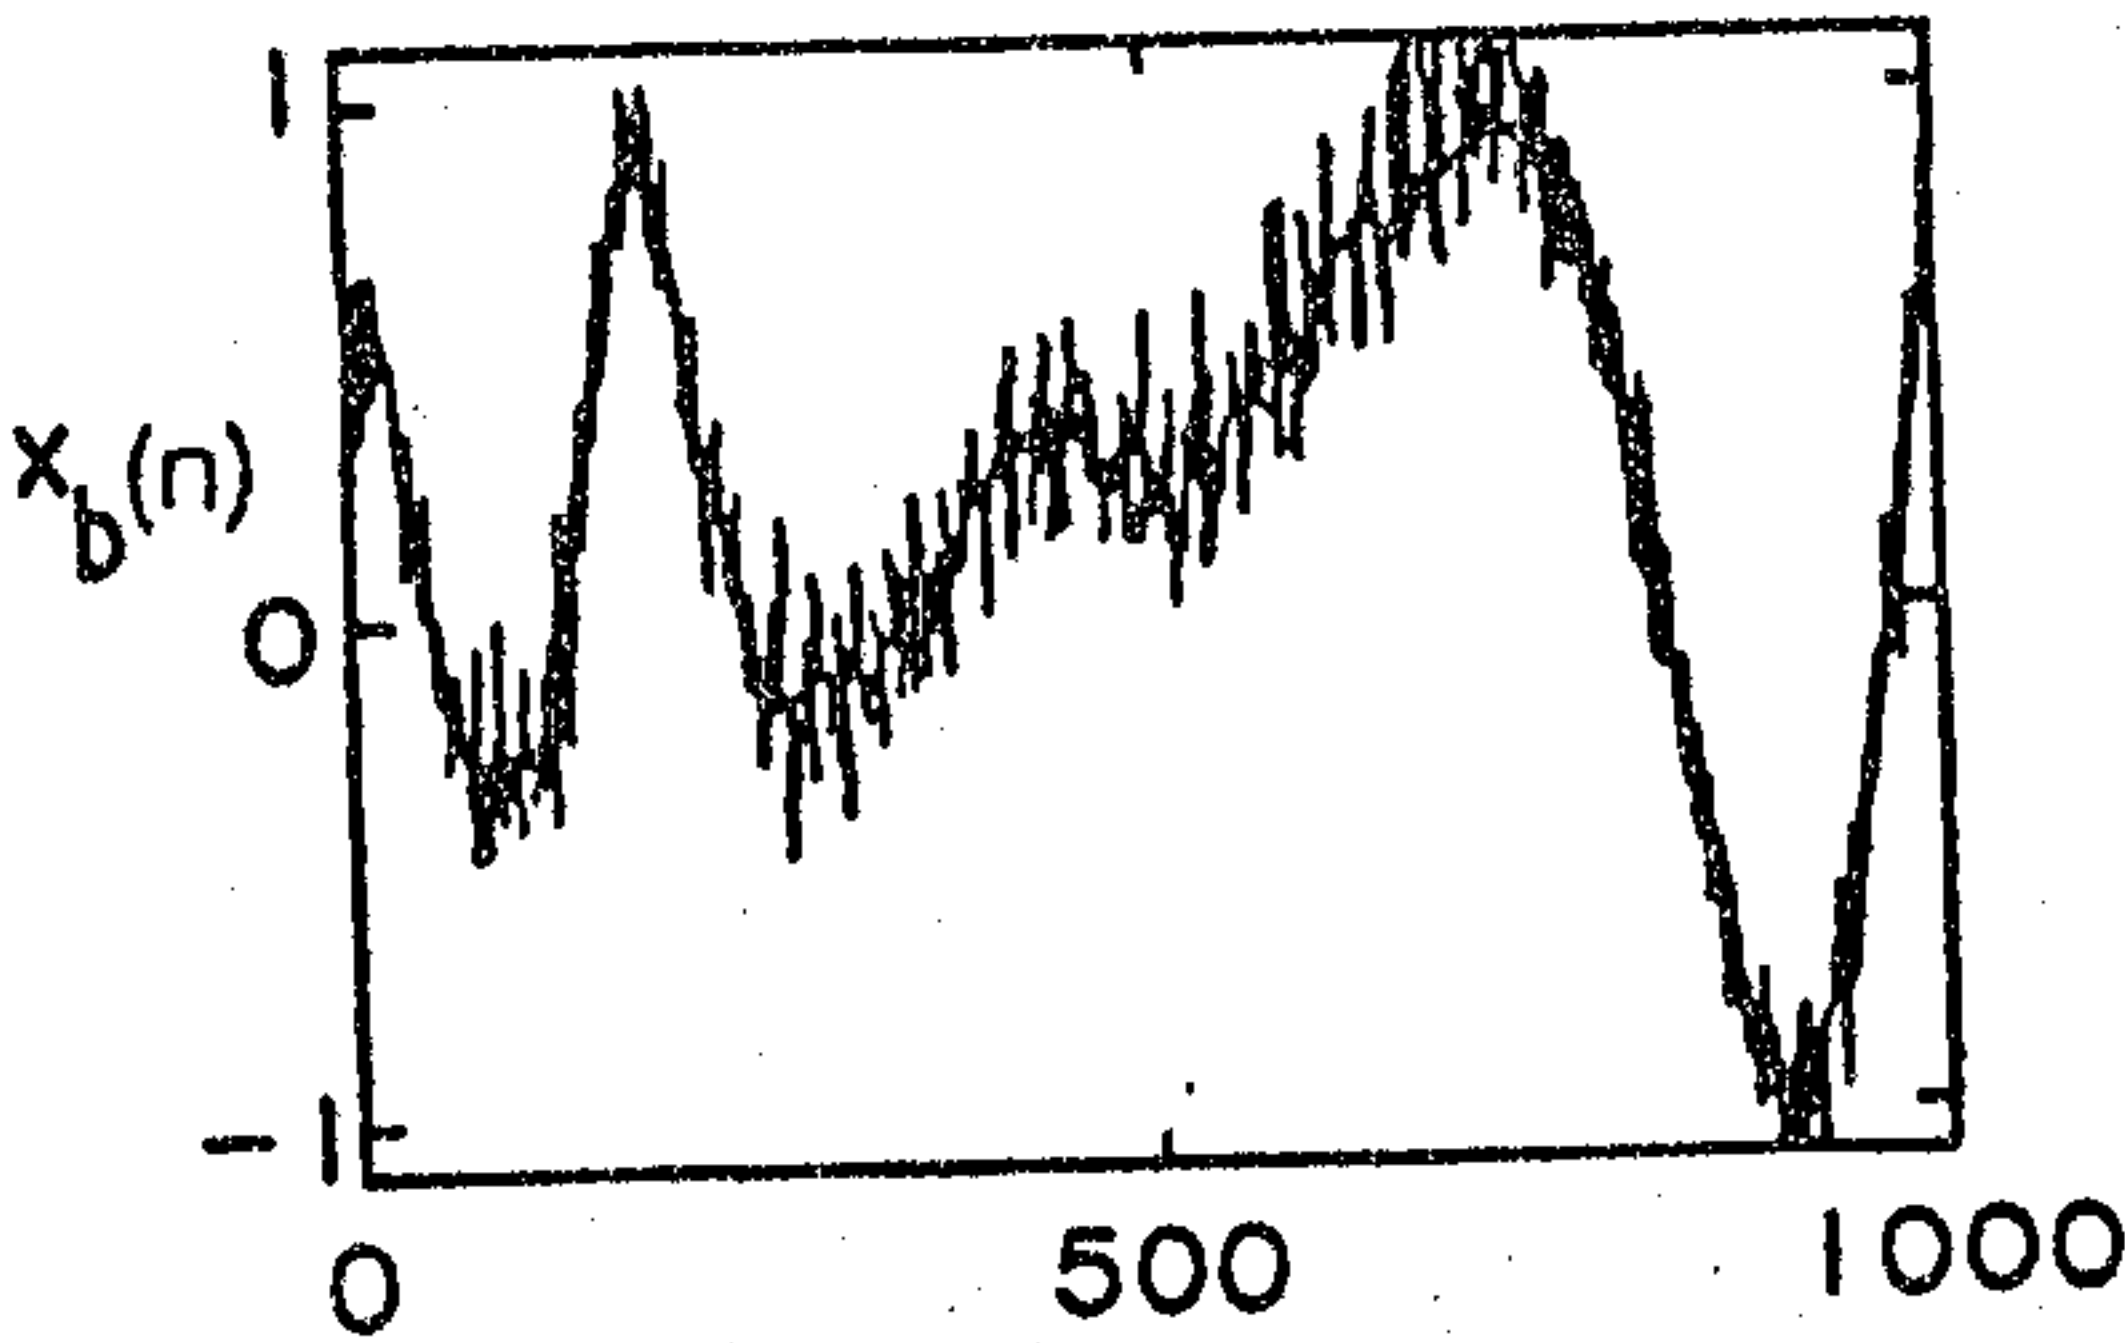


FIG. 1(g)

2 / 9

2075065

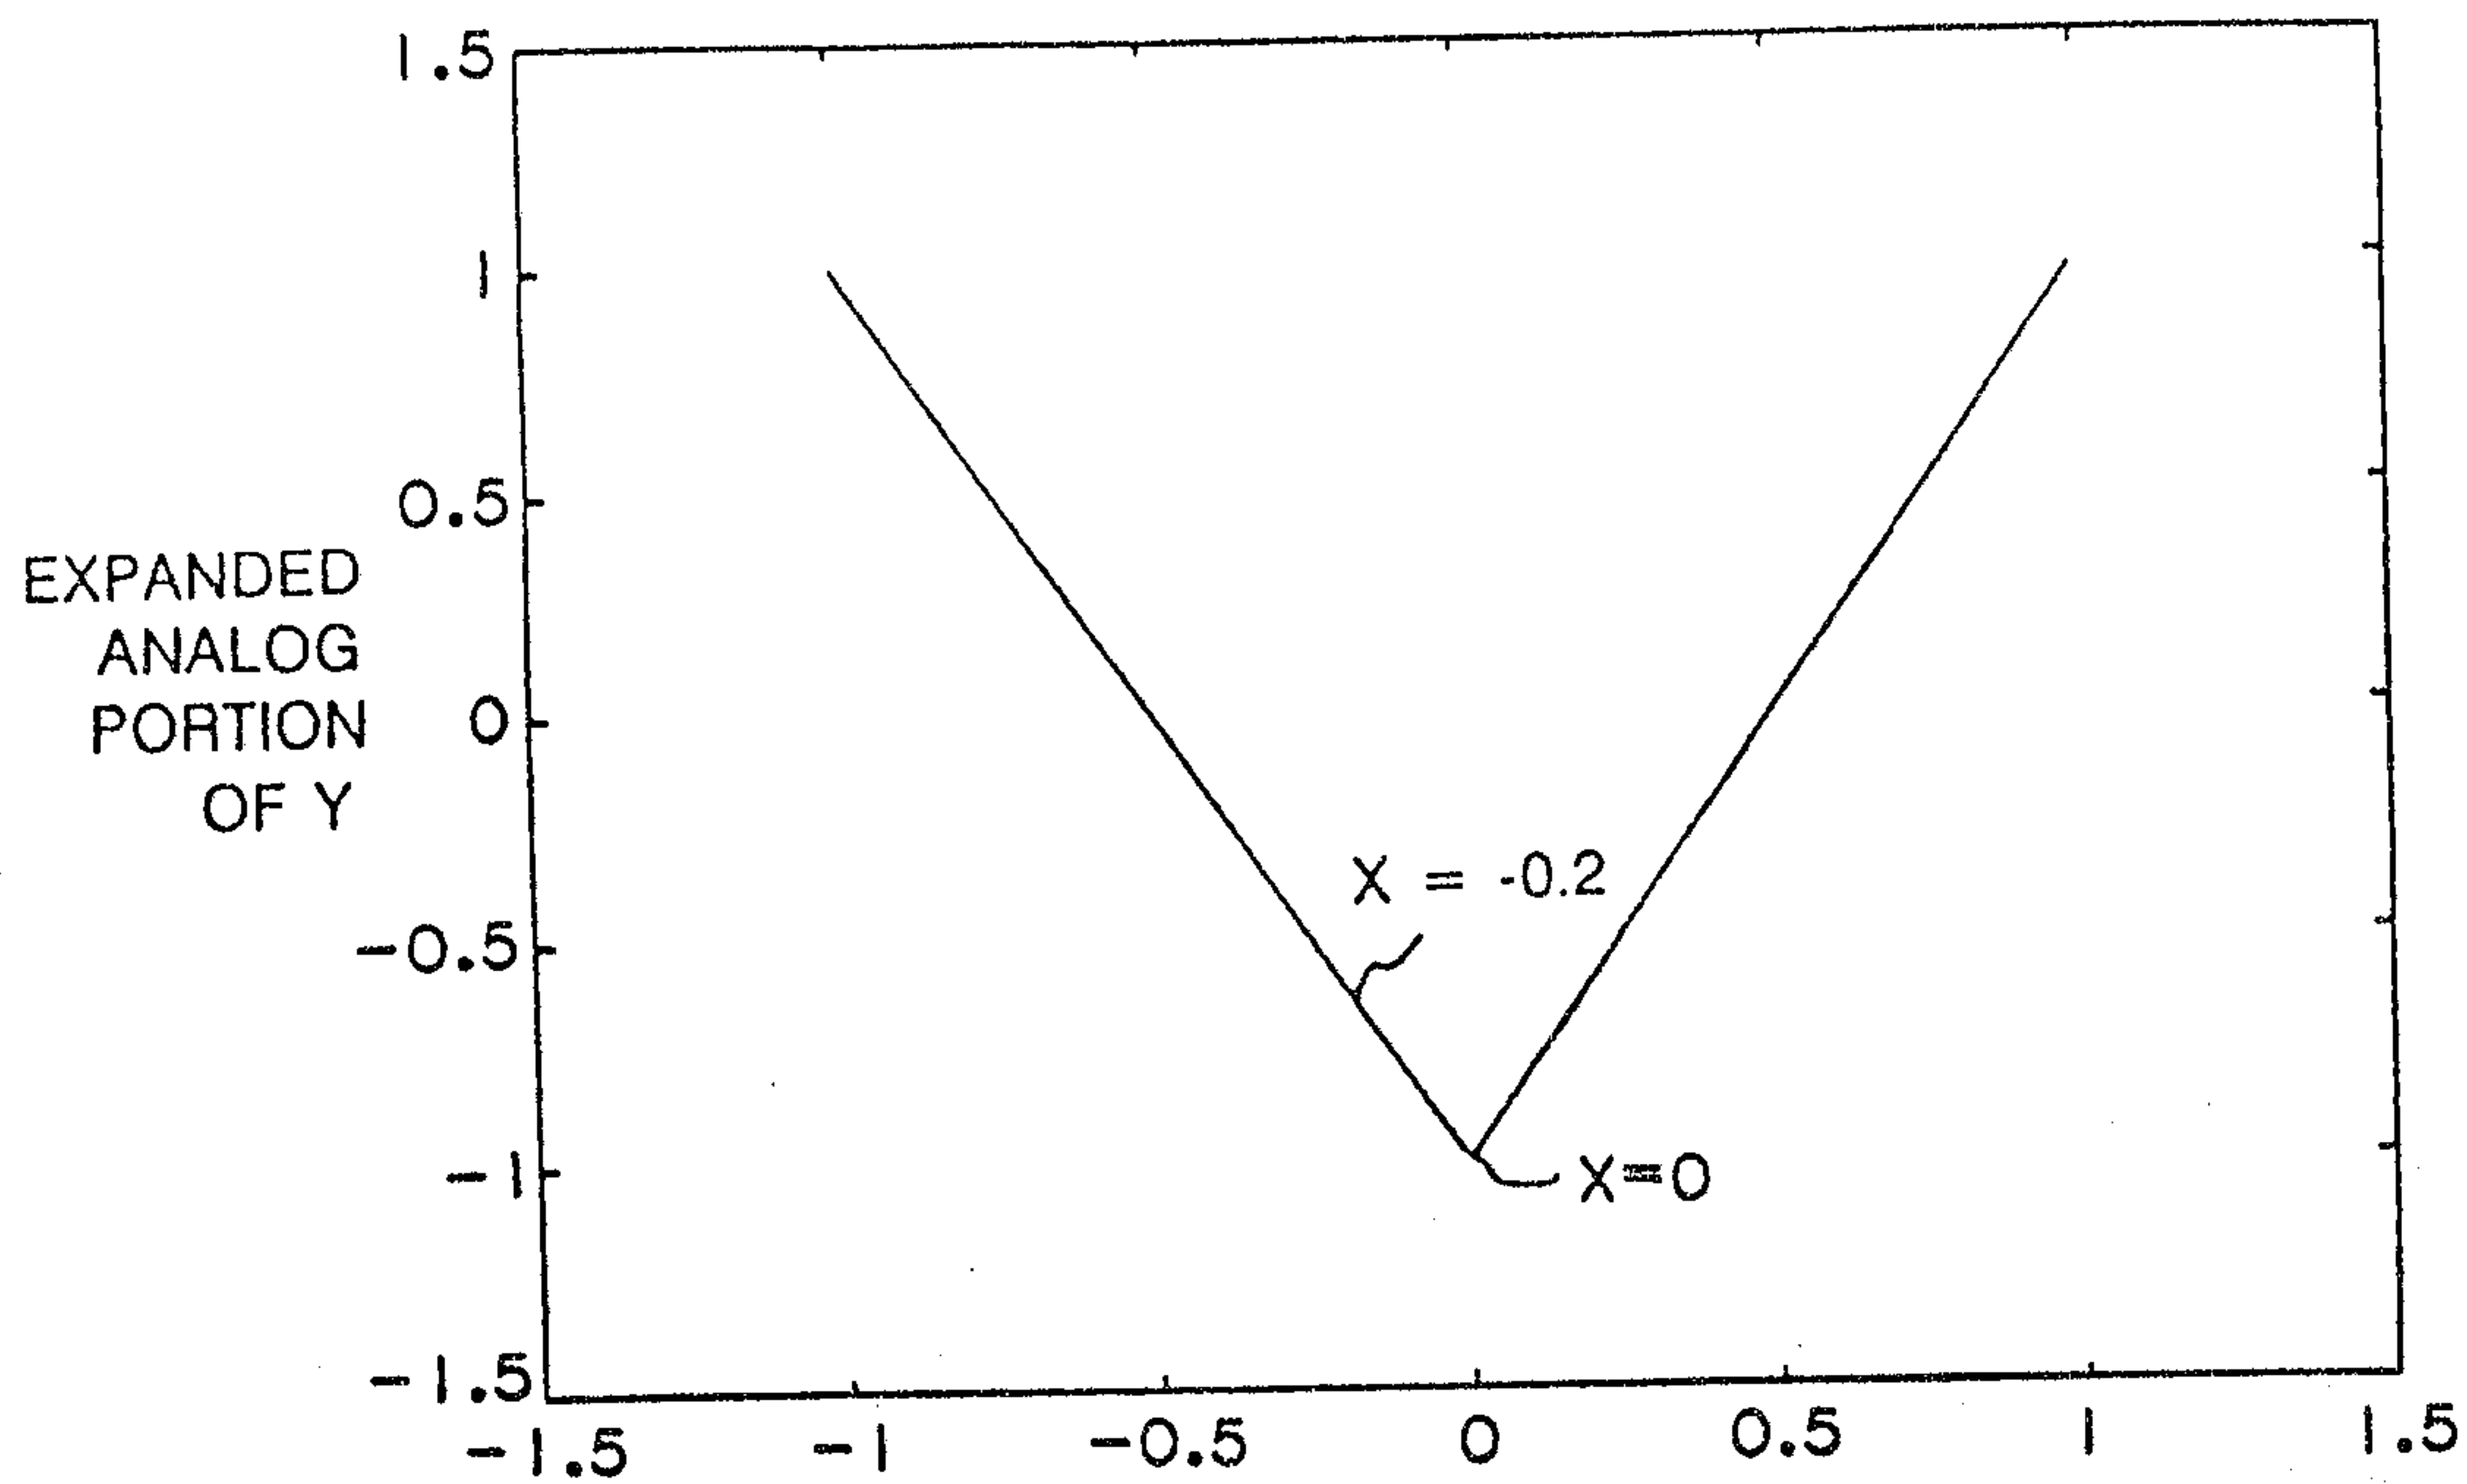


FIG. 1(b)

AMPLITUDE OF X

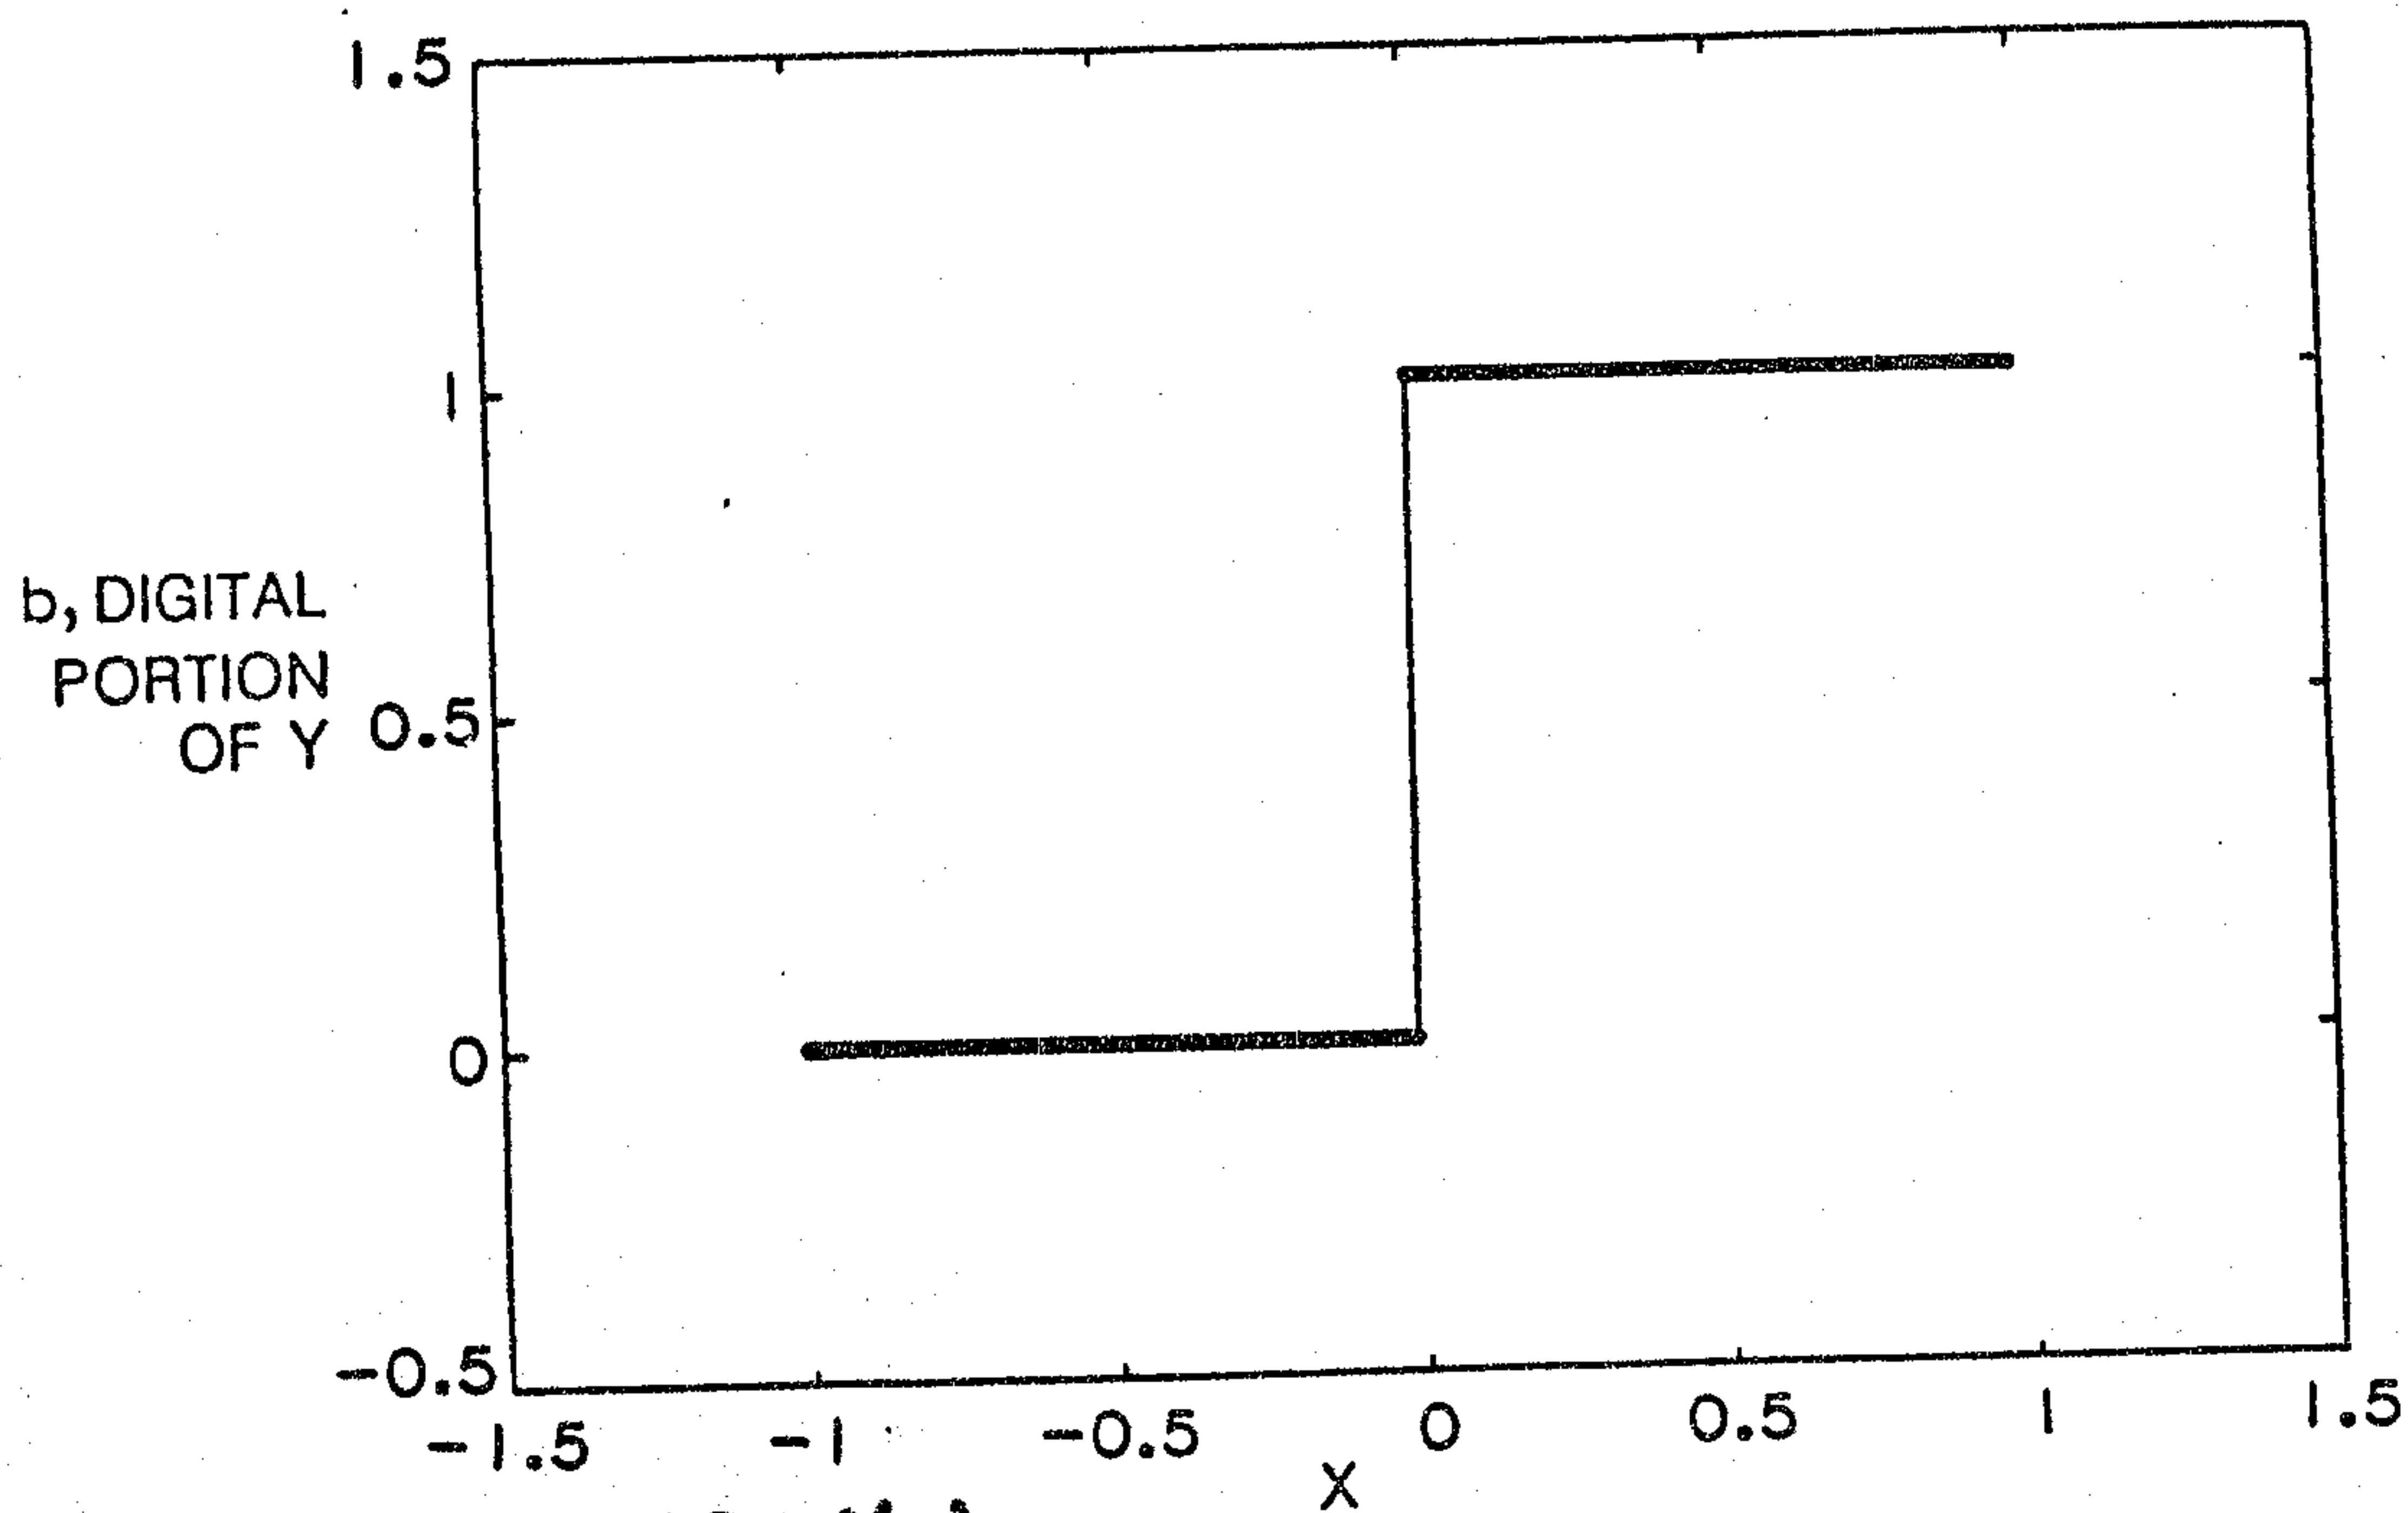


FIG. 1(c)

3 / 9

2075065

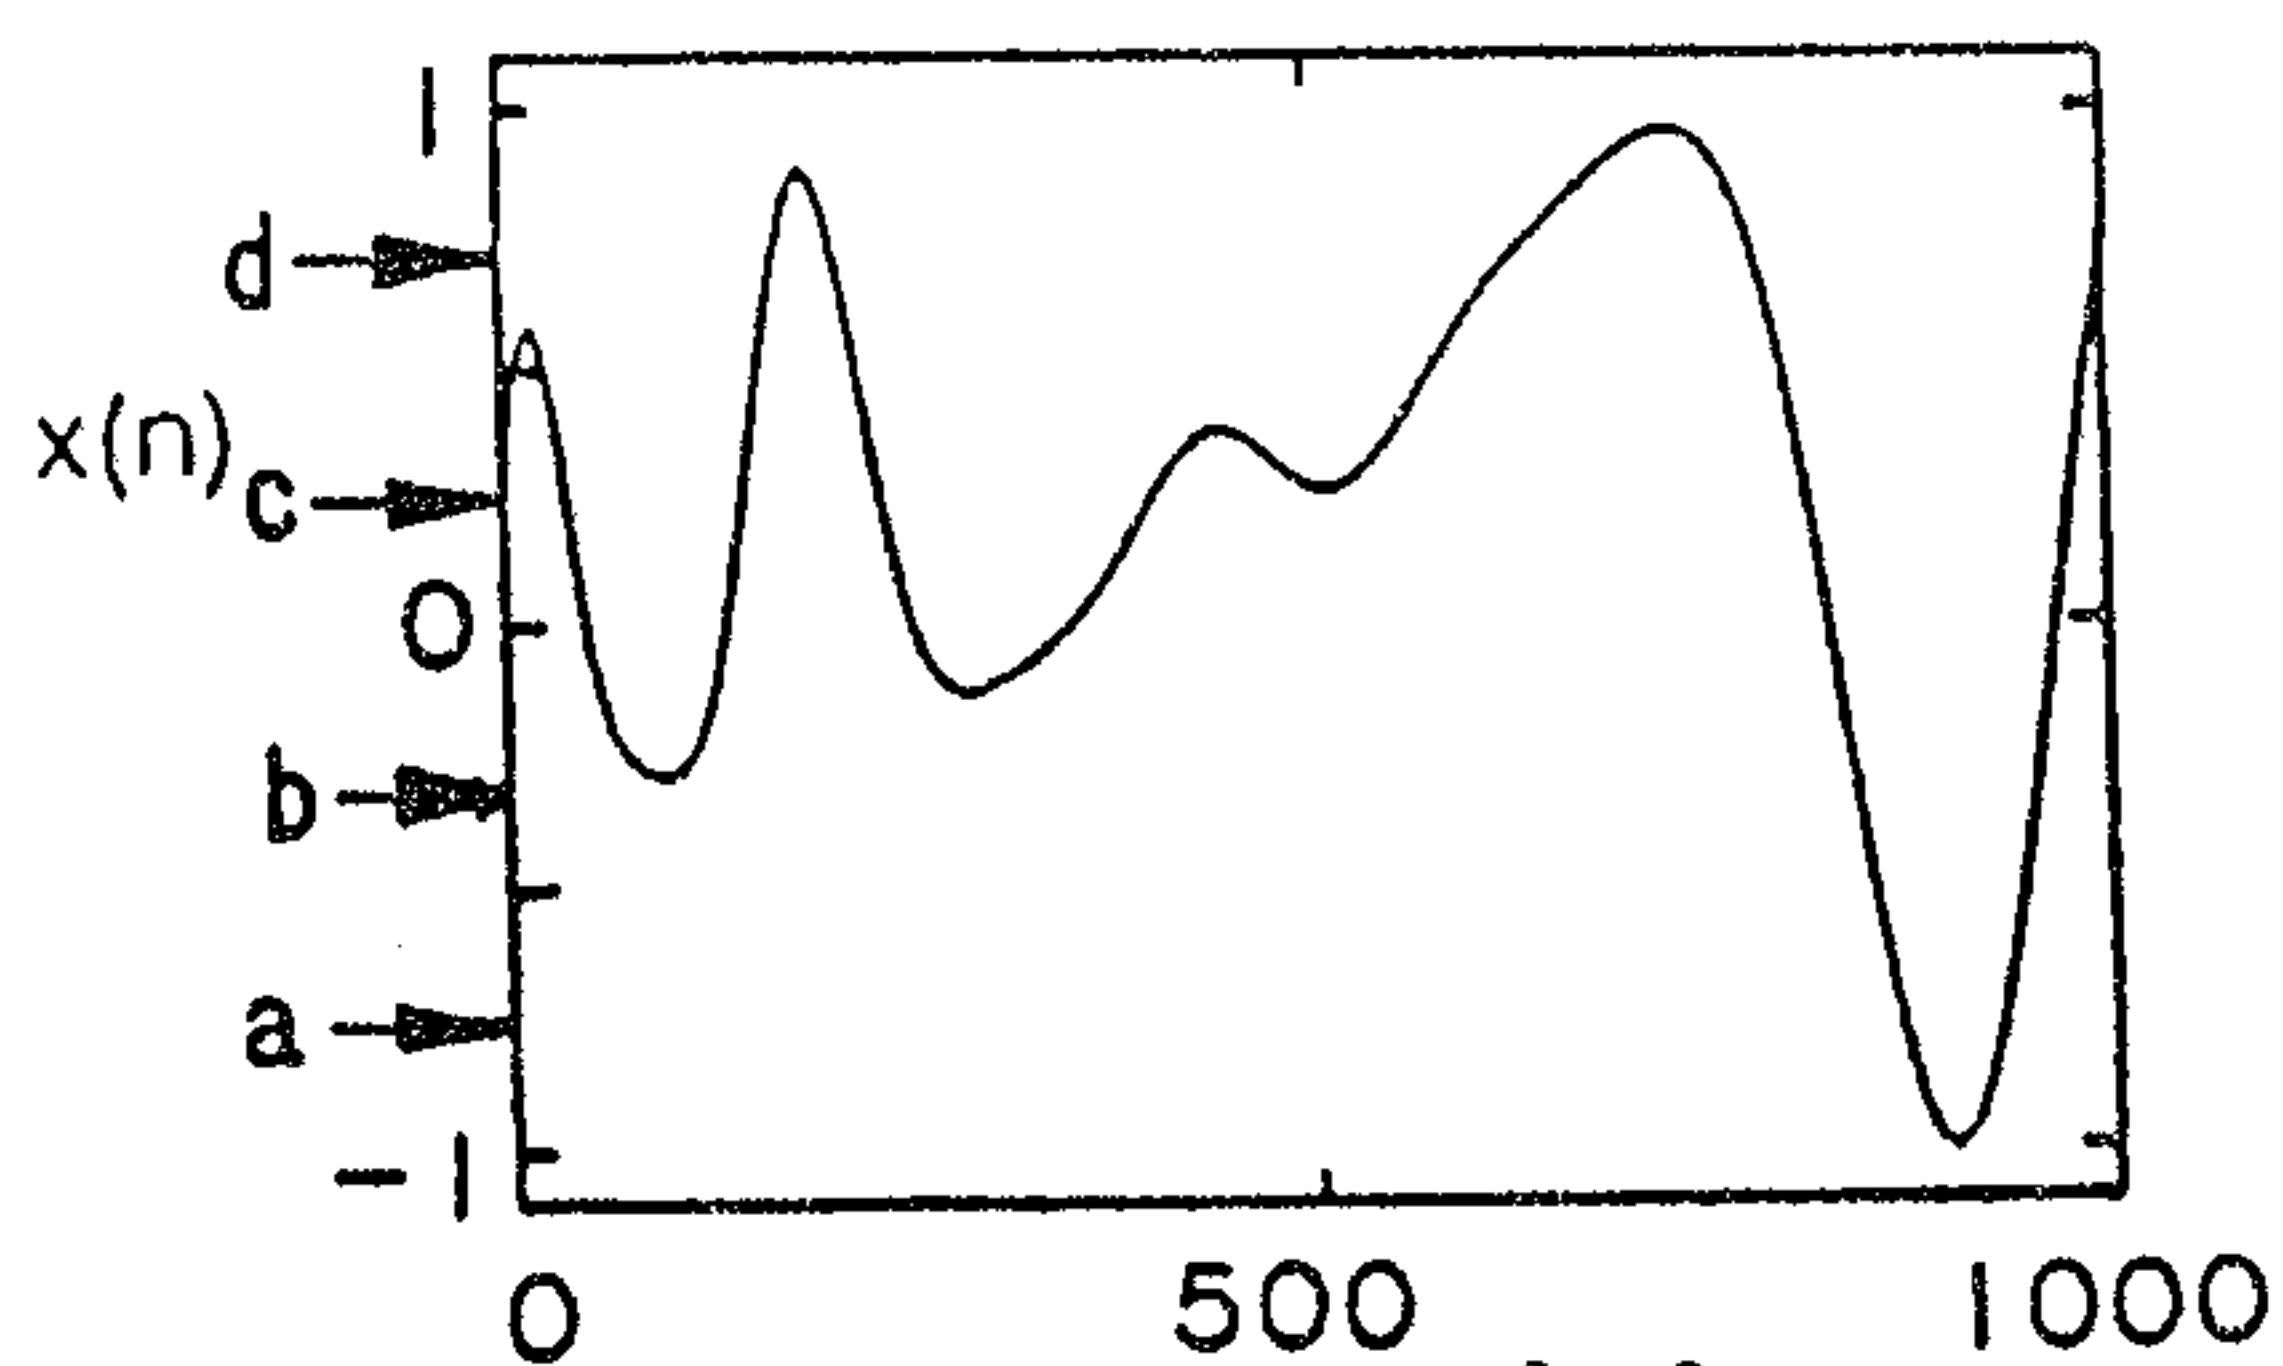


FIG. 2(a)

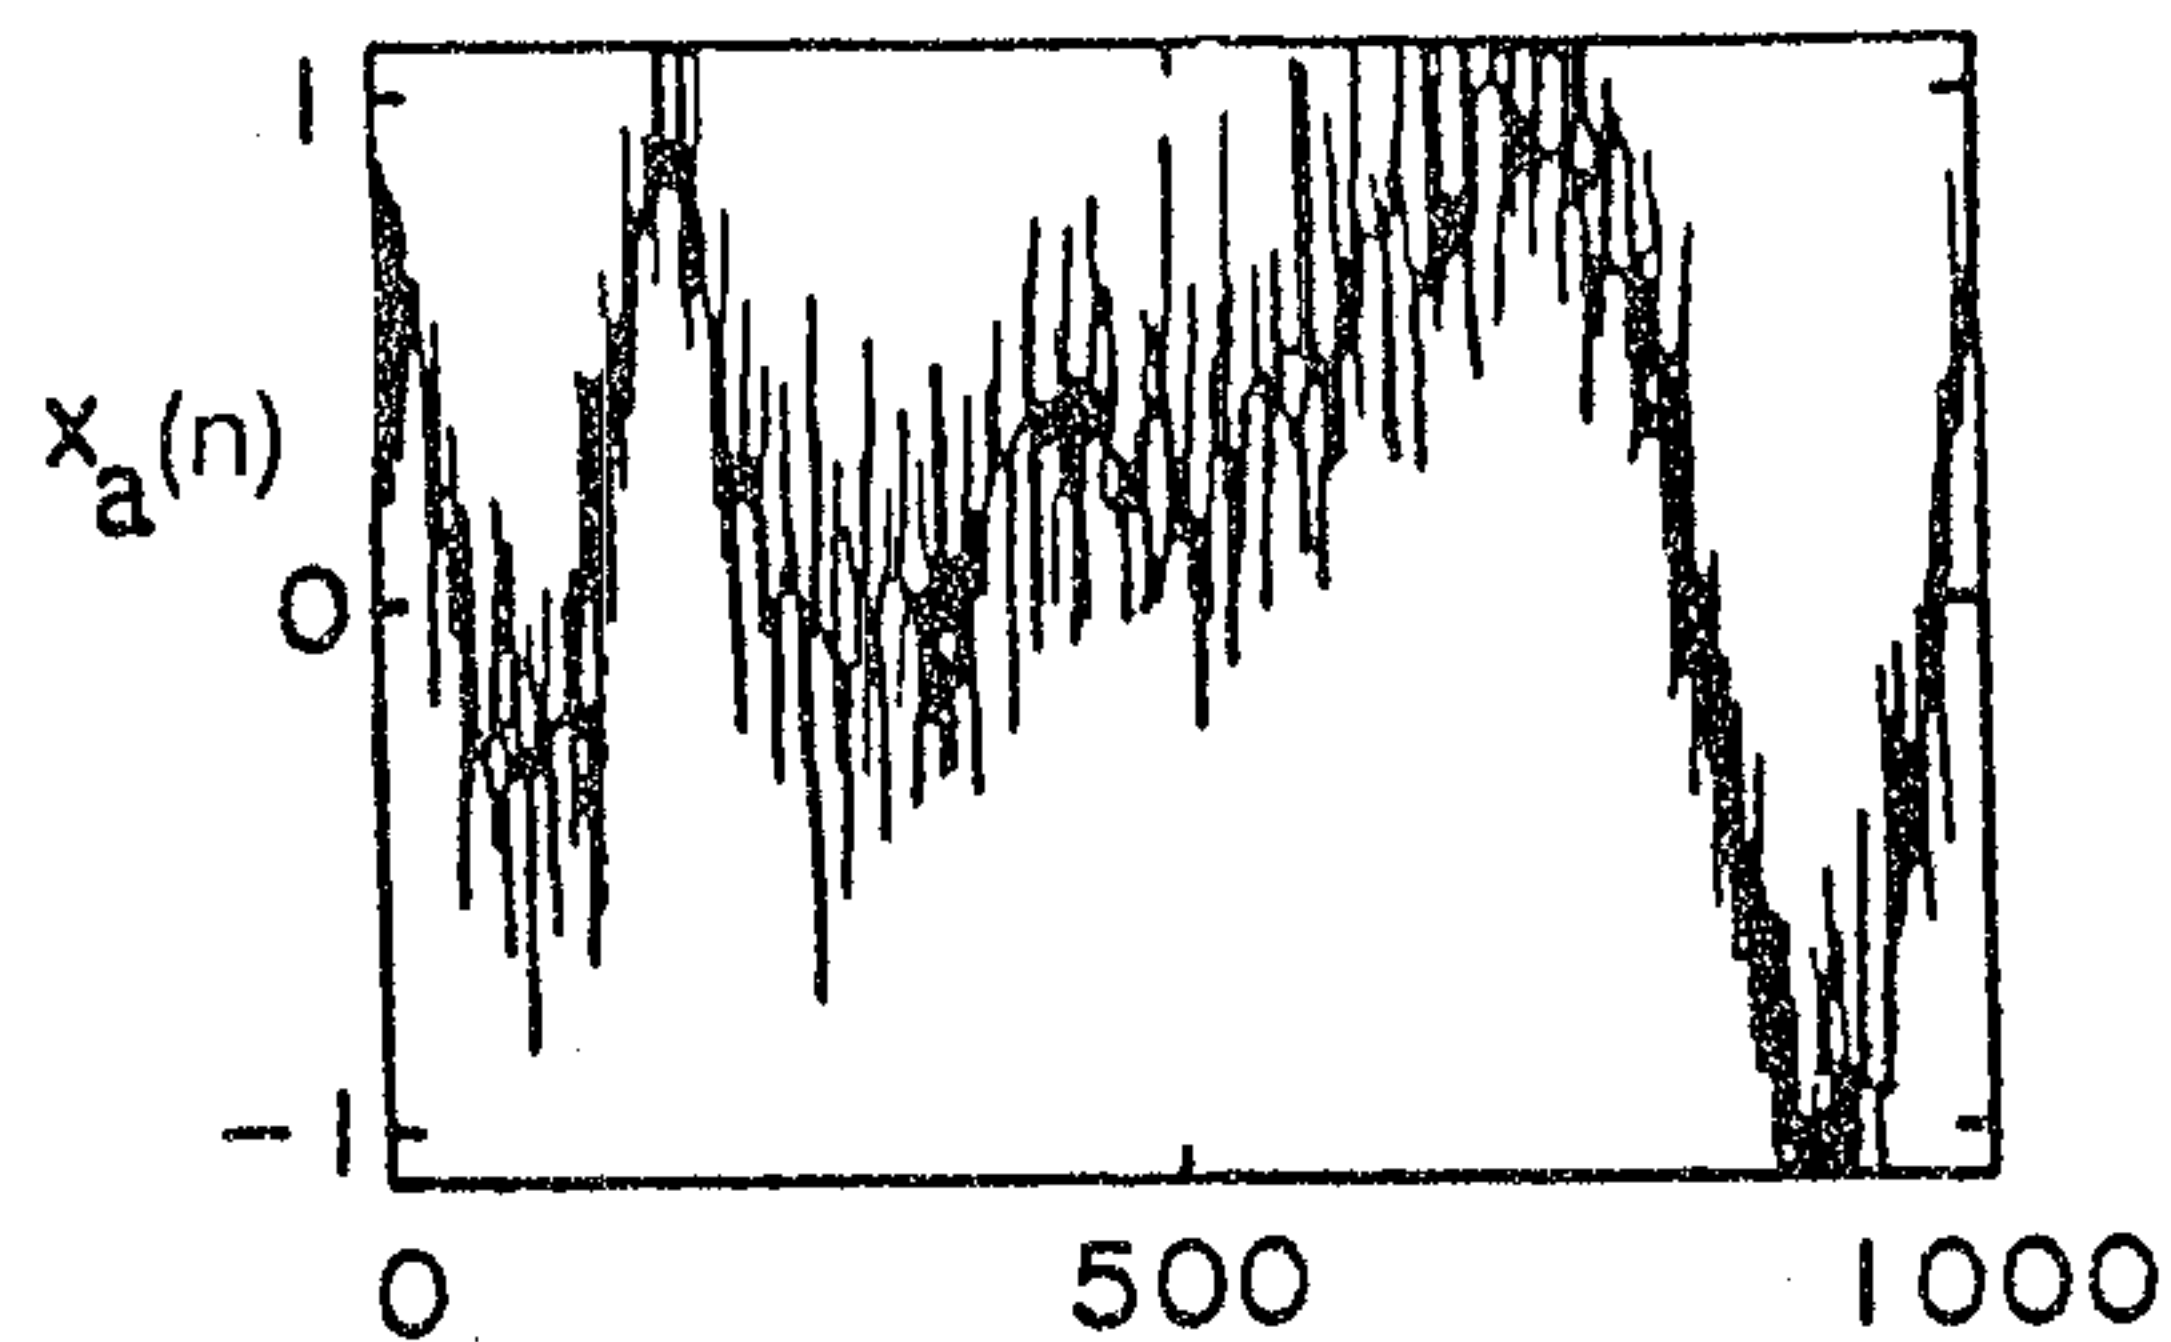


FIG. 2(f)

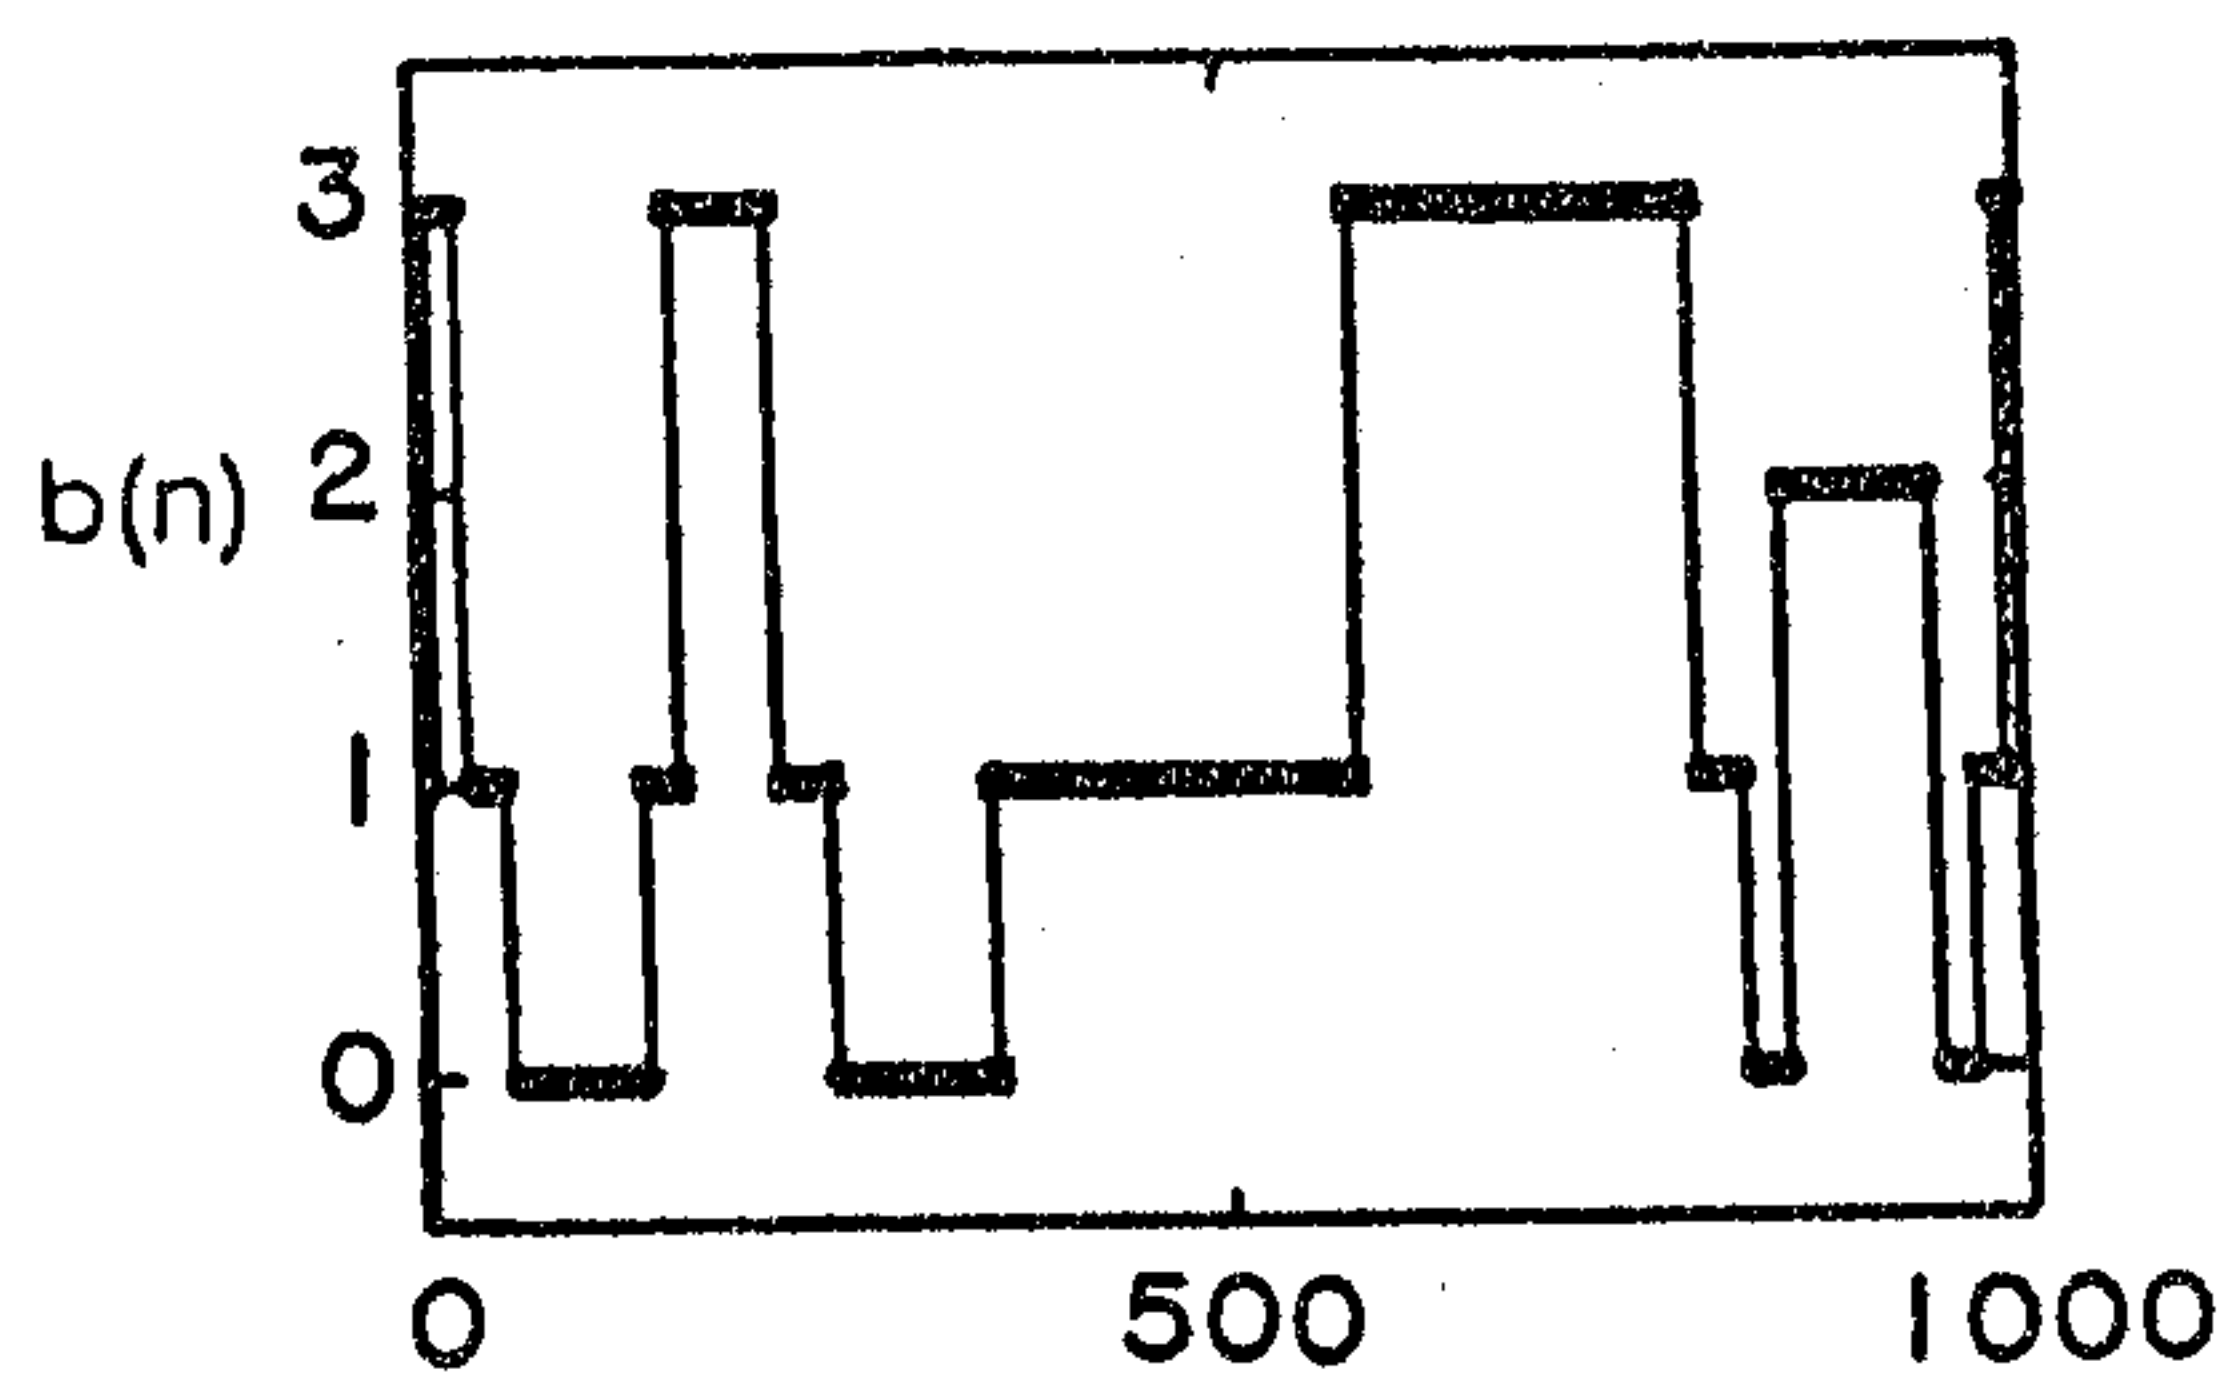


FIG. 2(e)

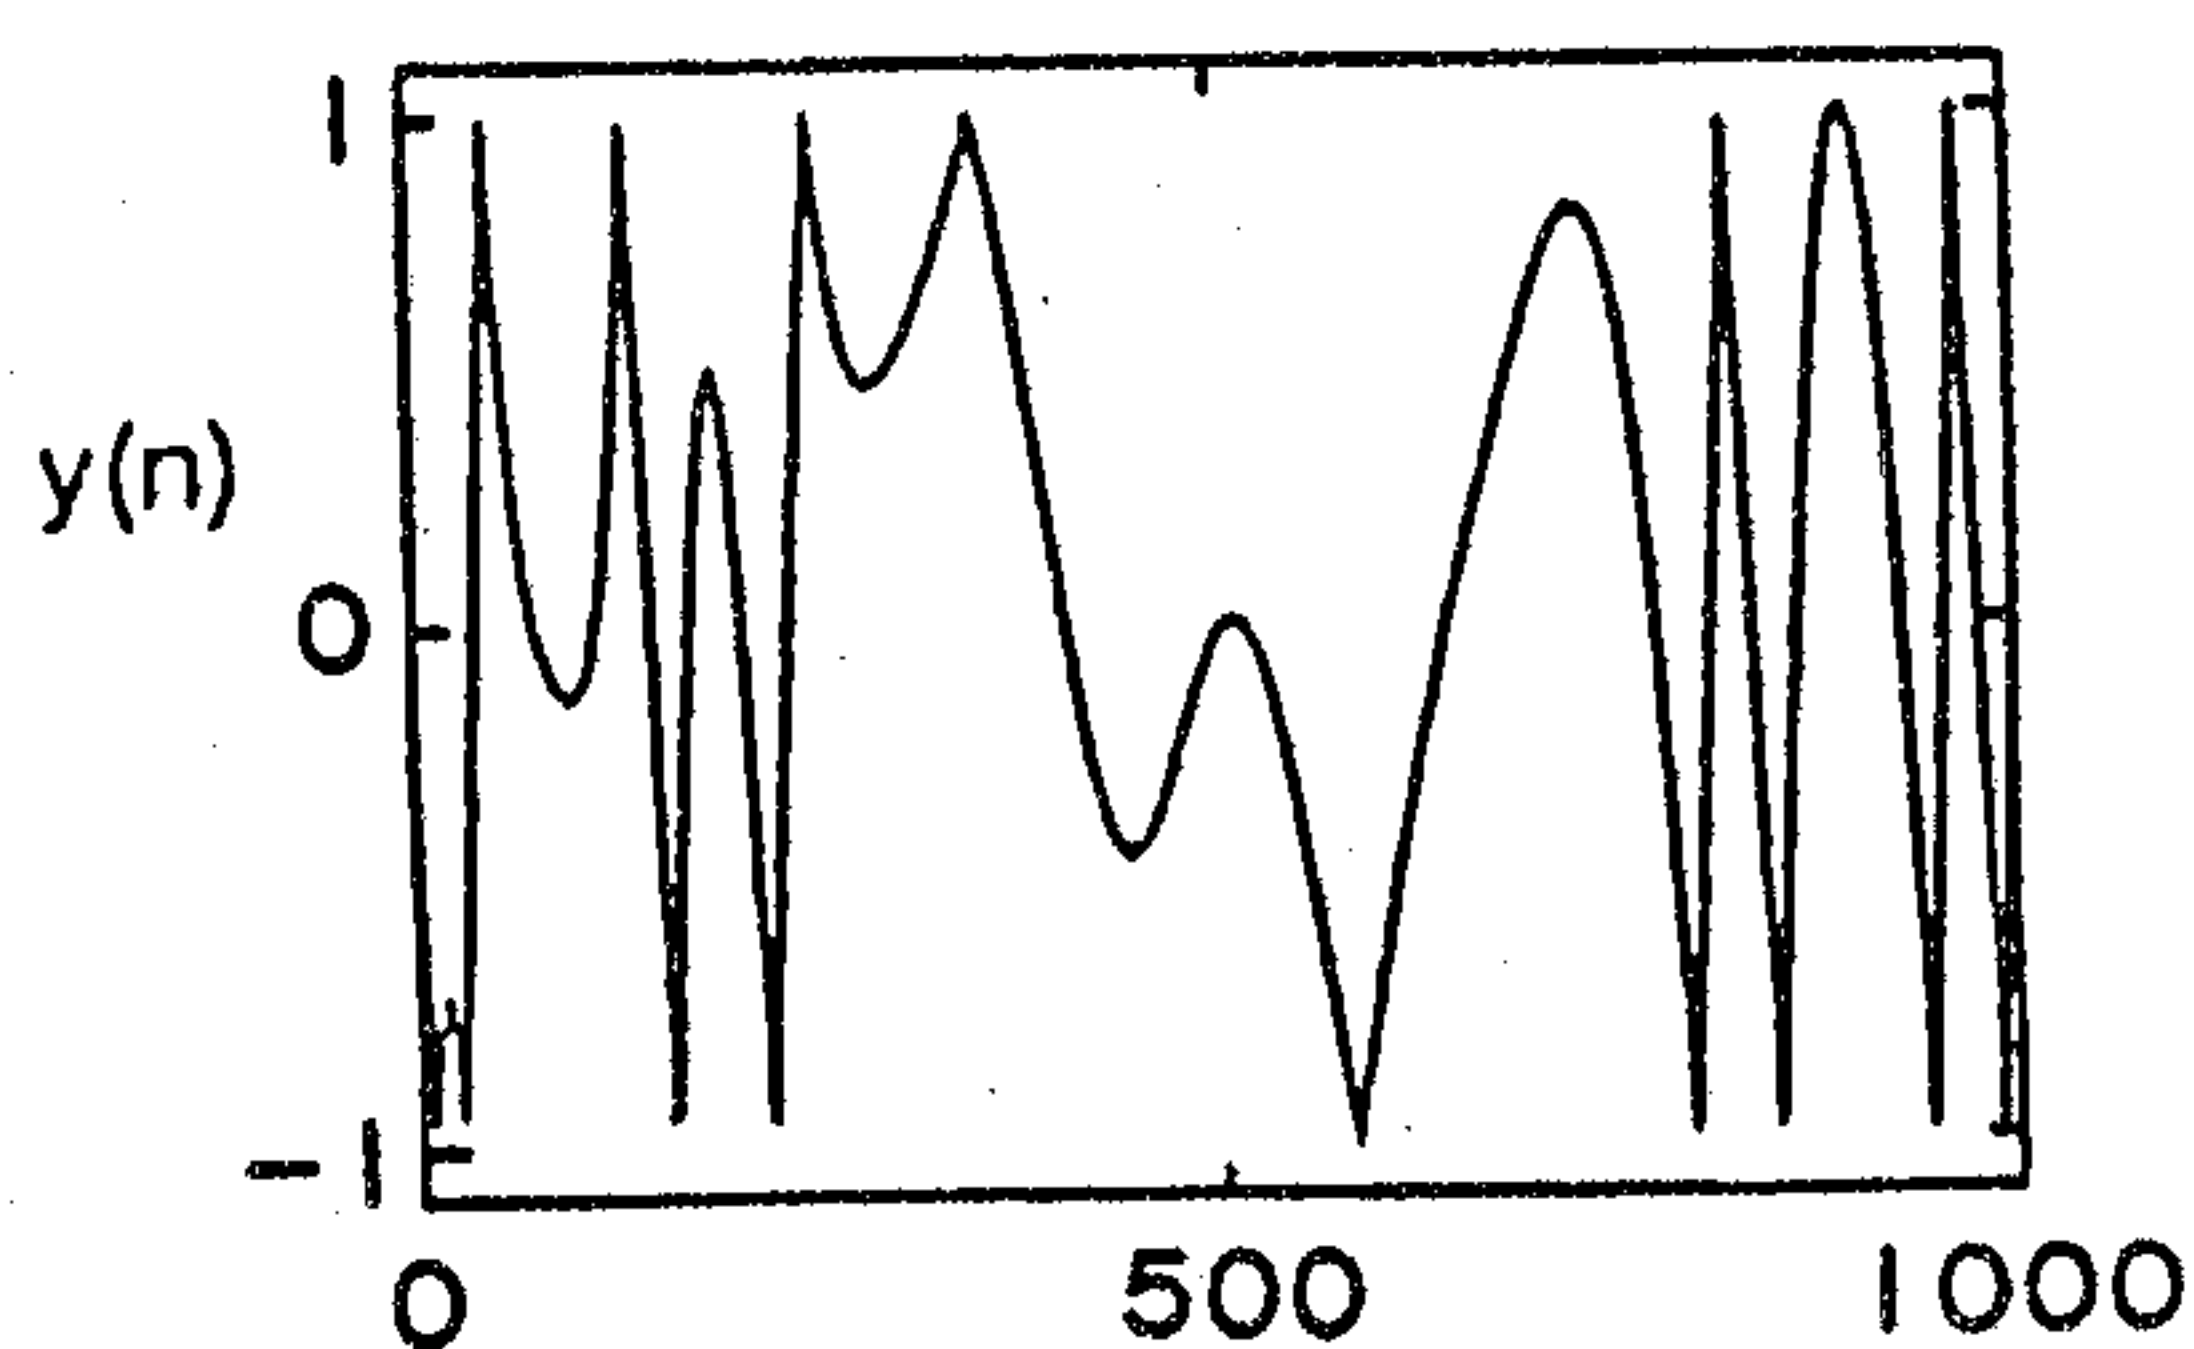


FIG. 2(d)

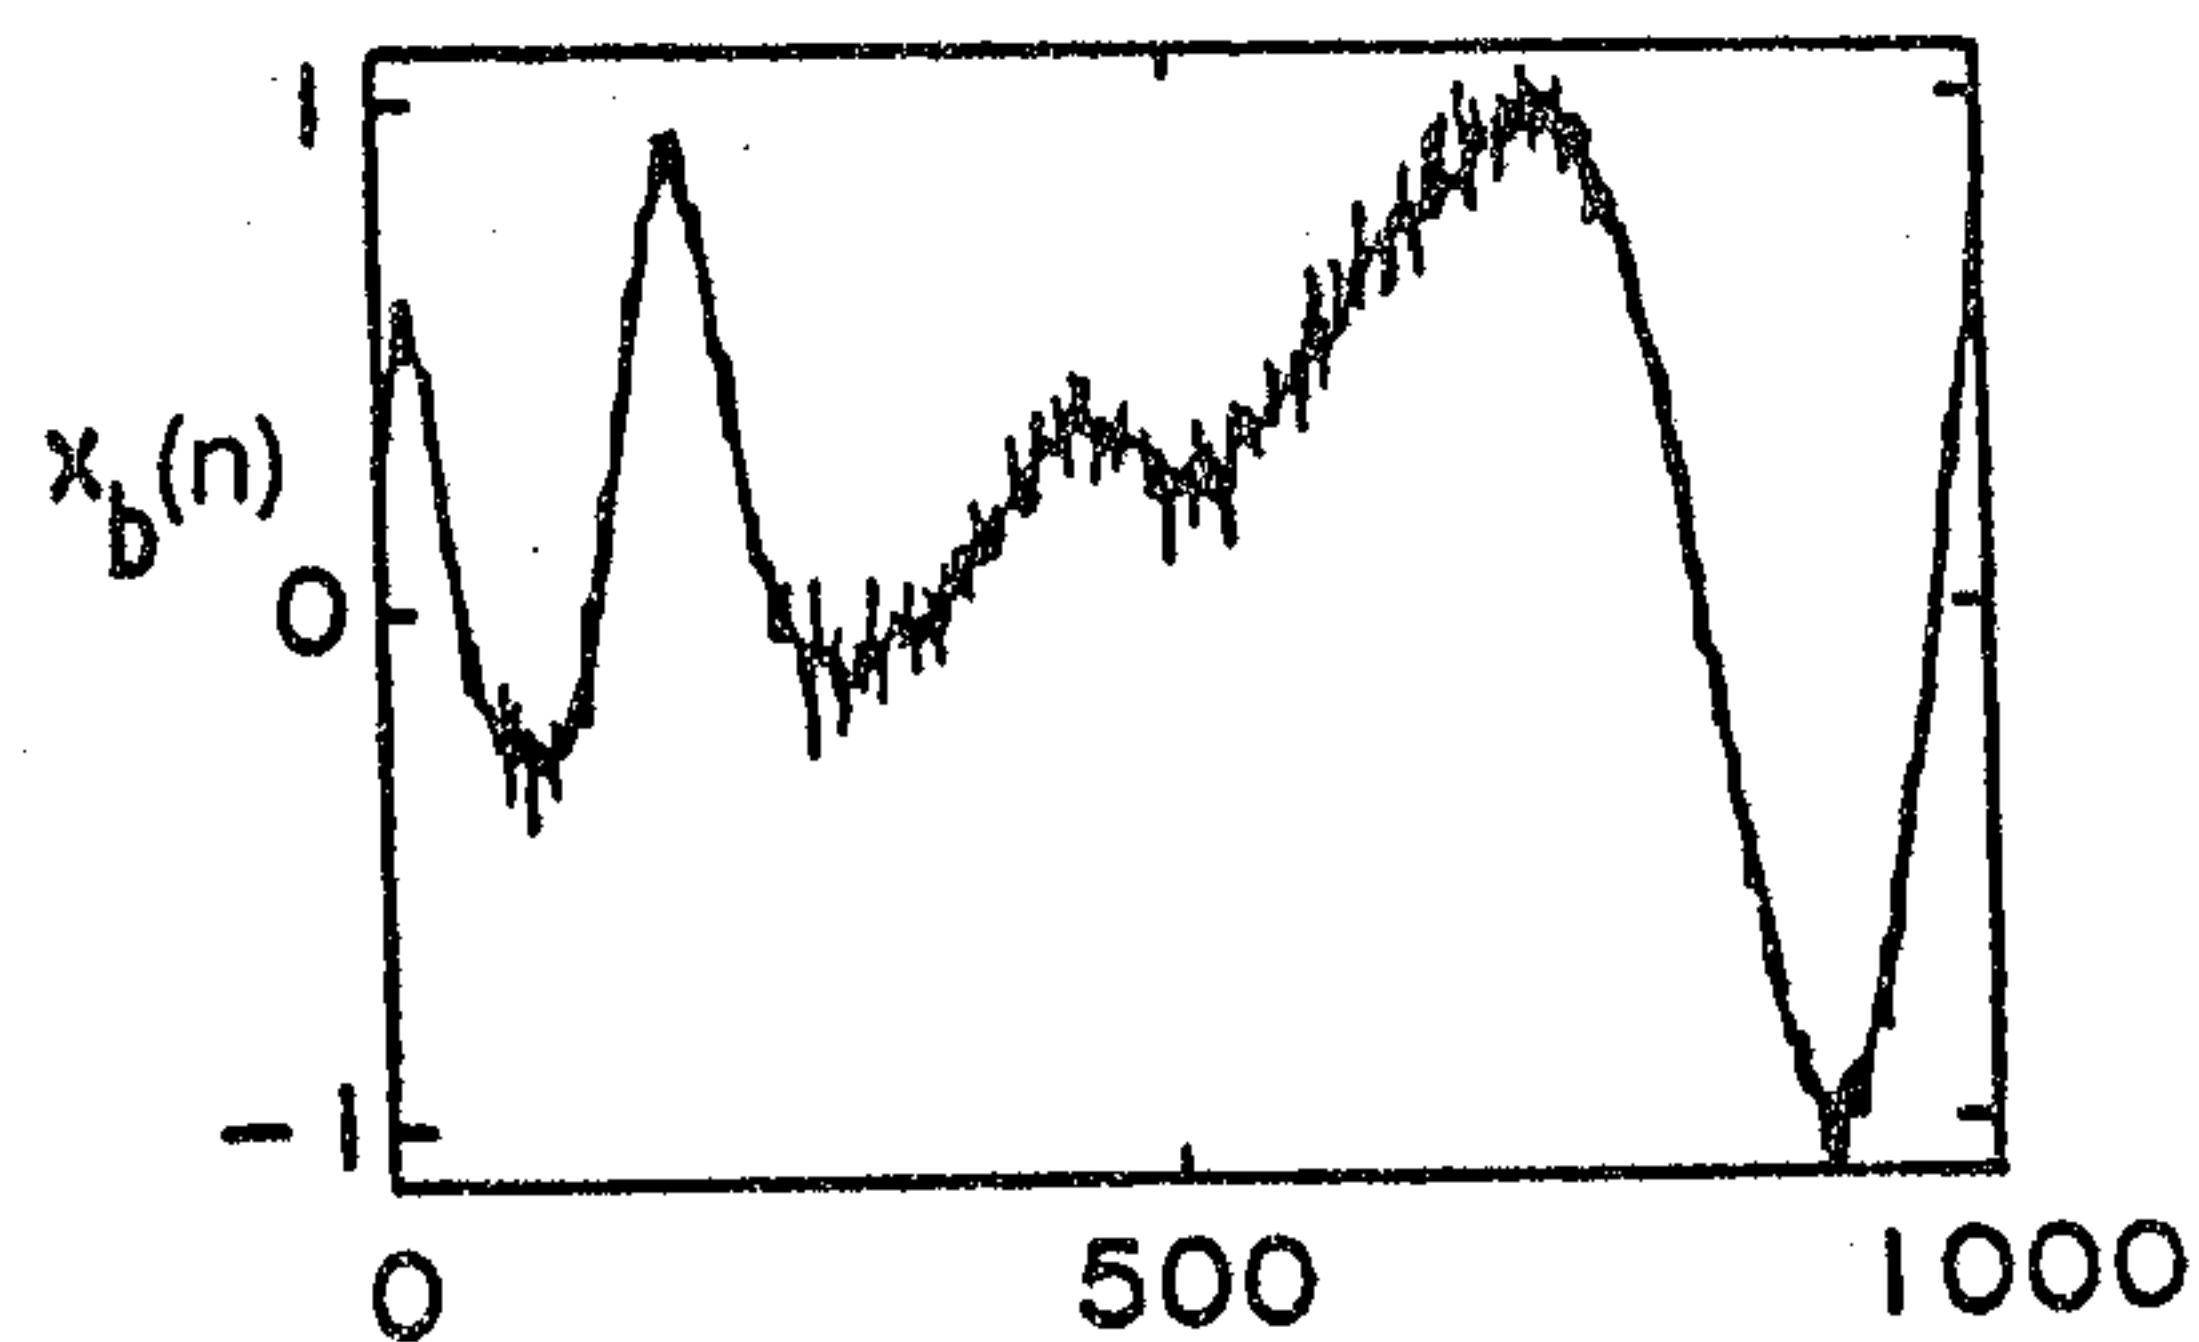


FIG. 2(g)

4 / 9

2075065

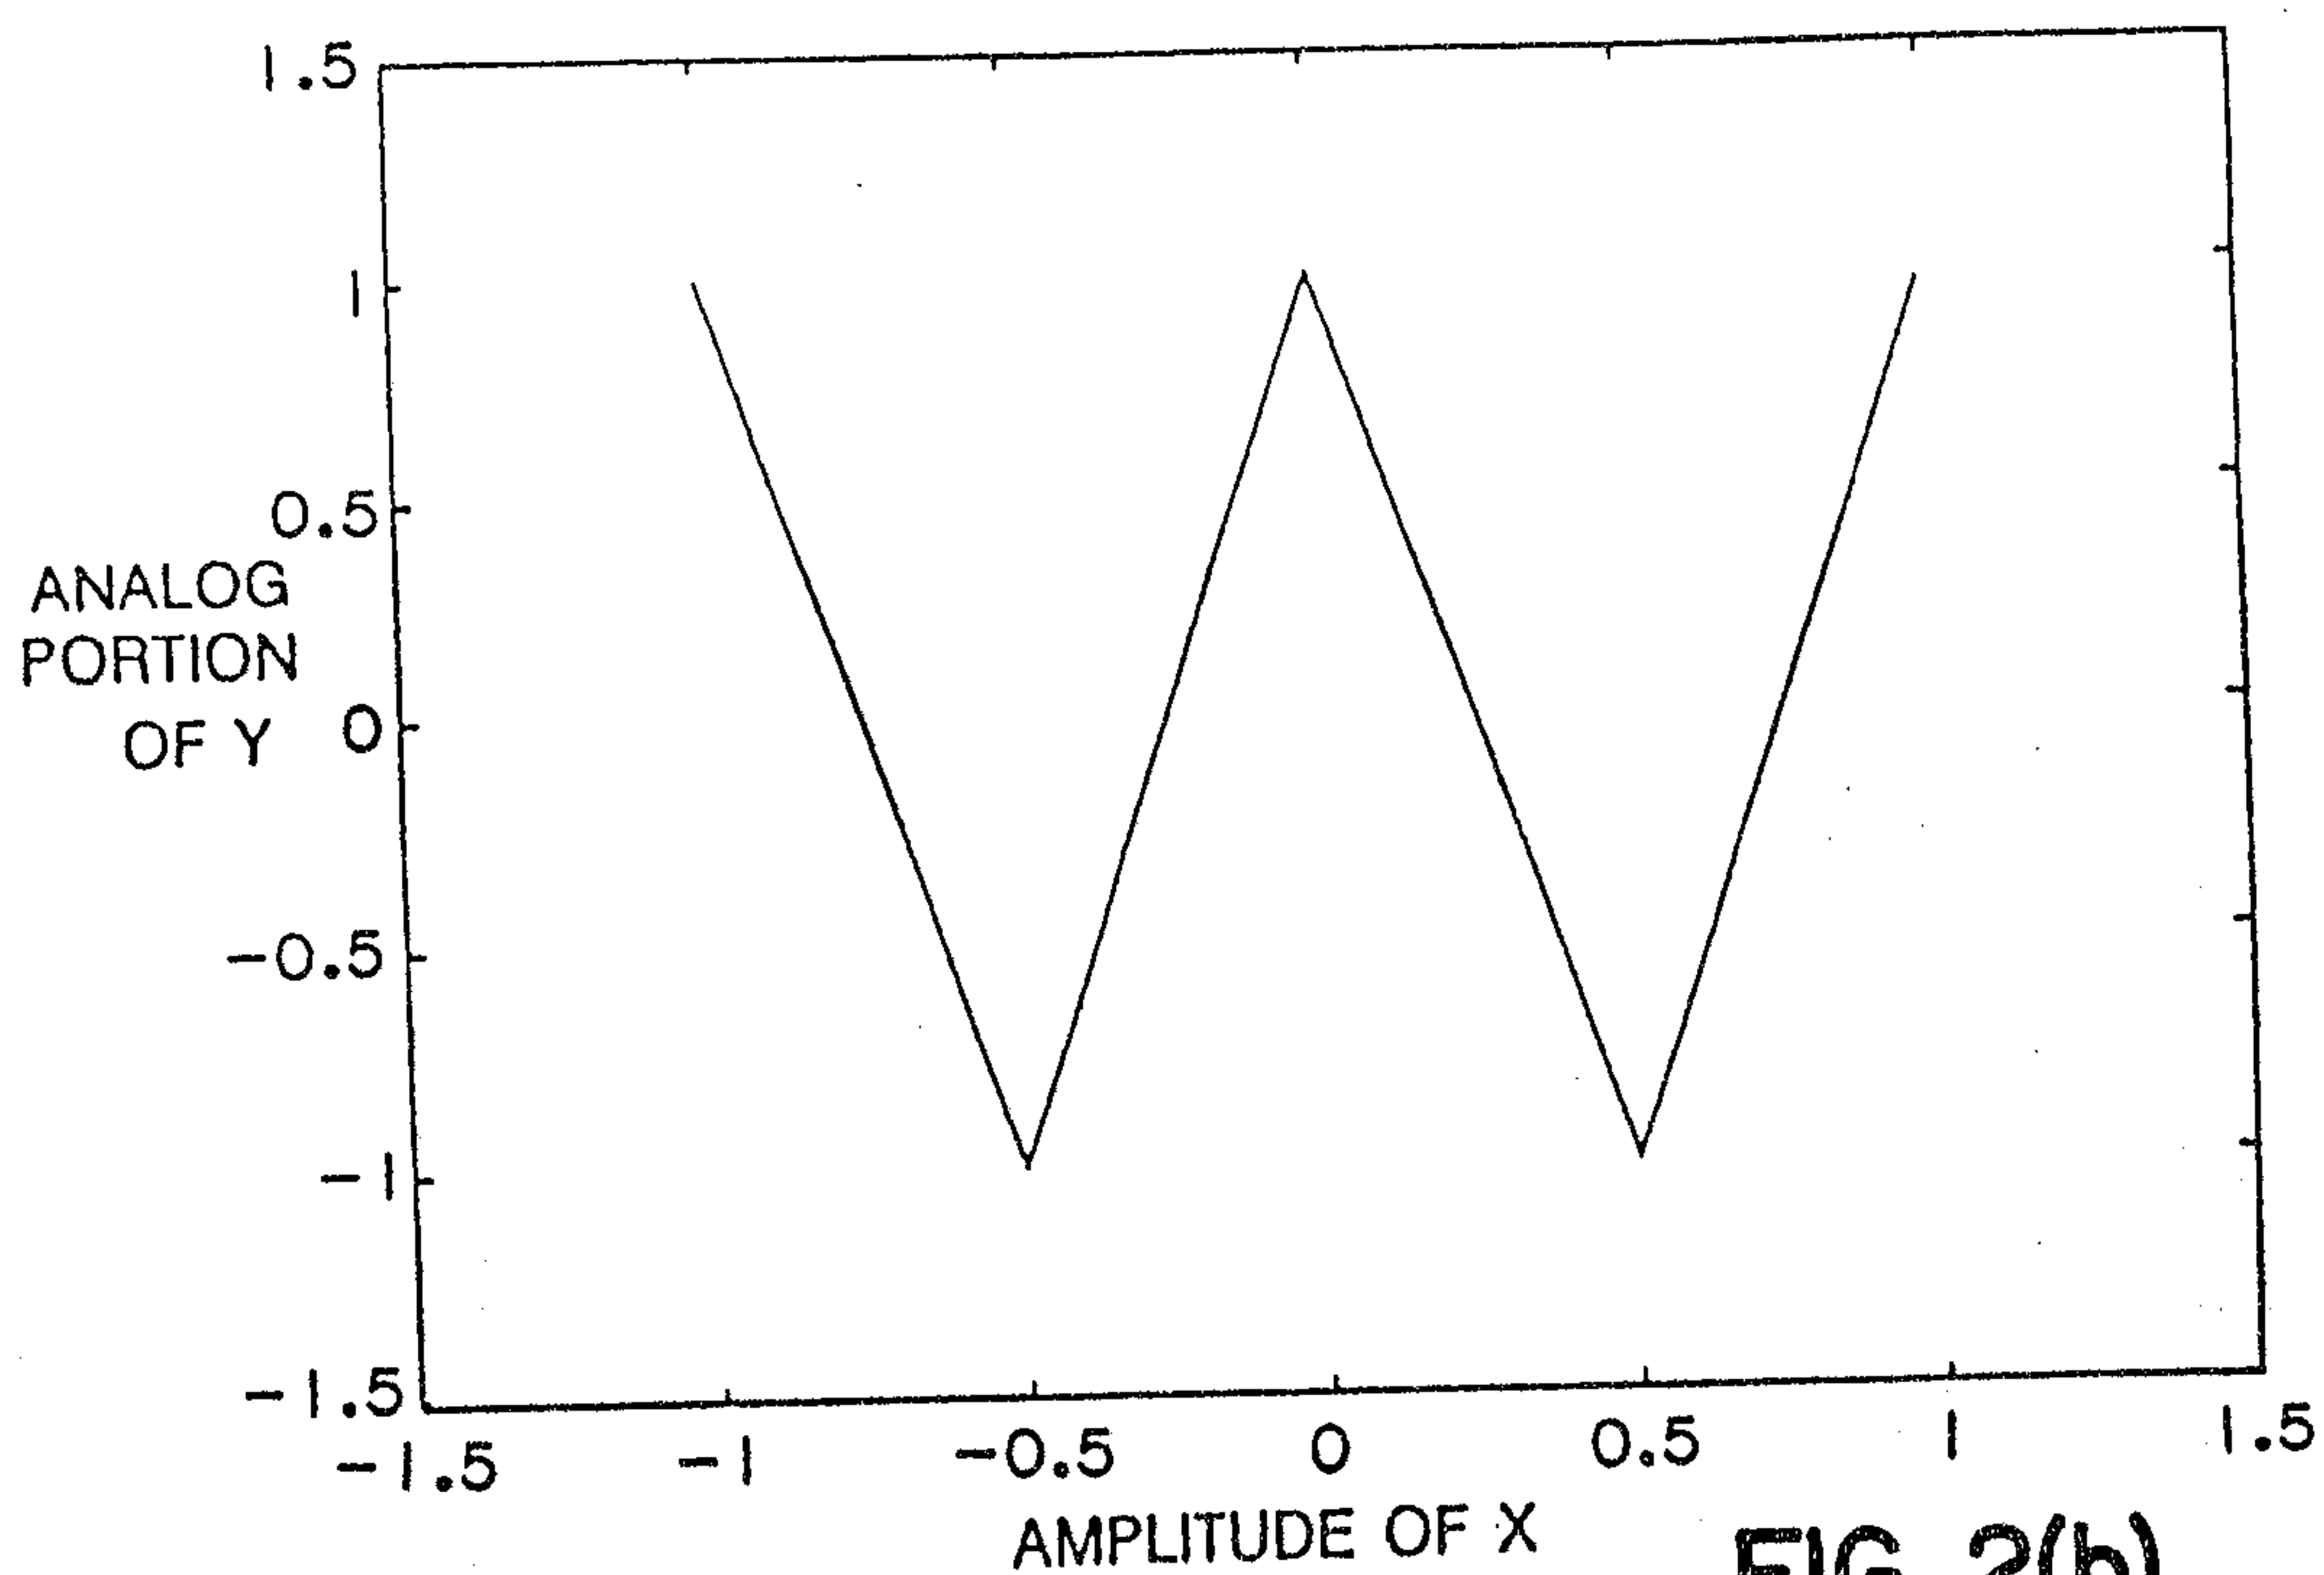


FIG. 2(b)

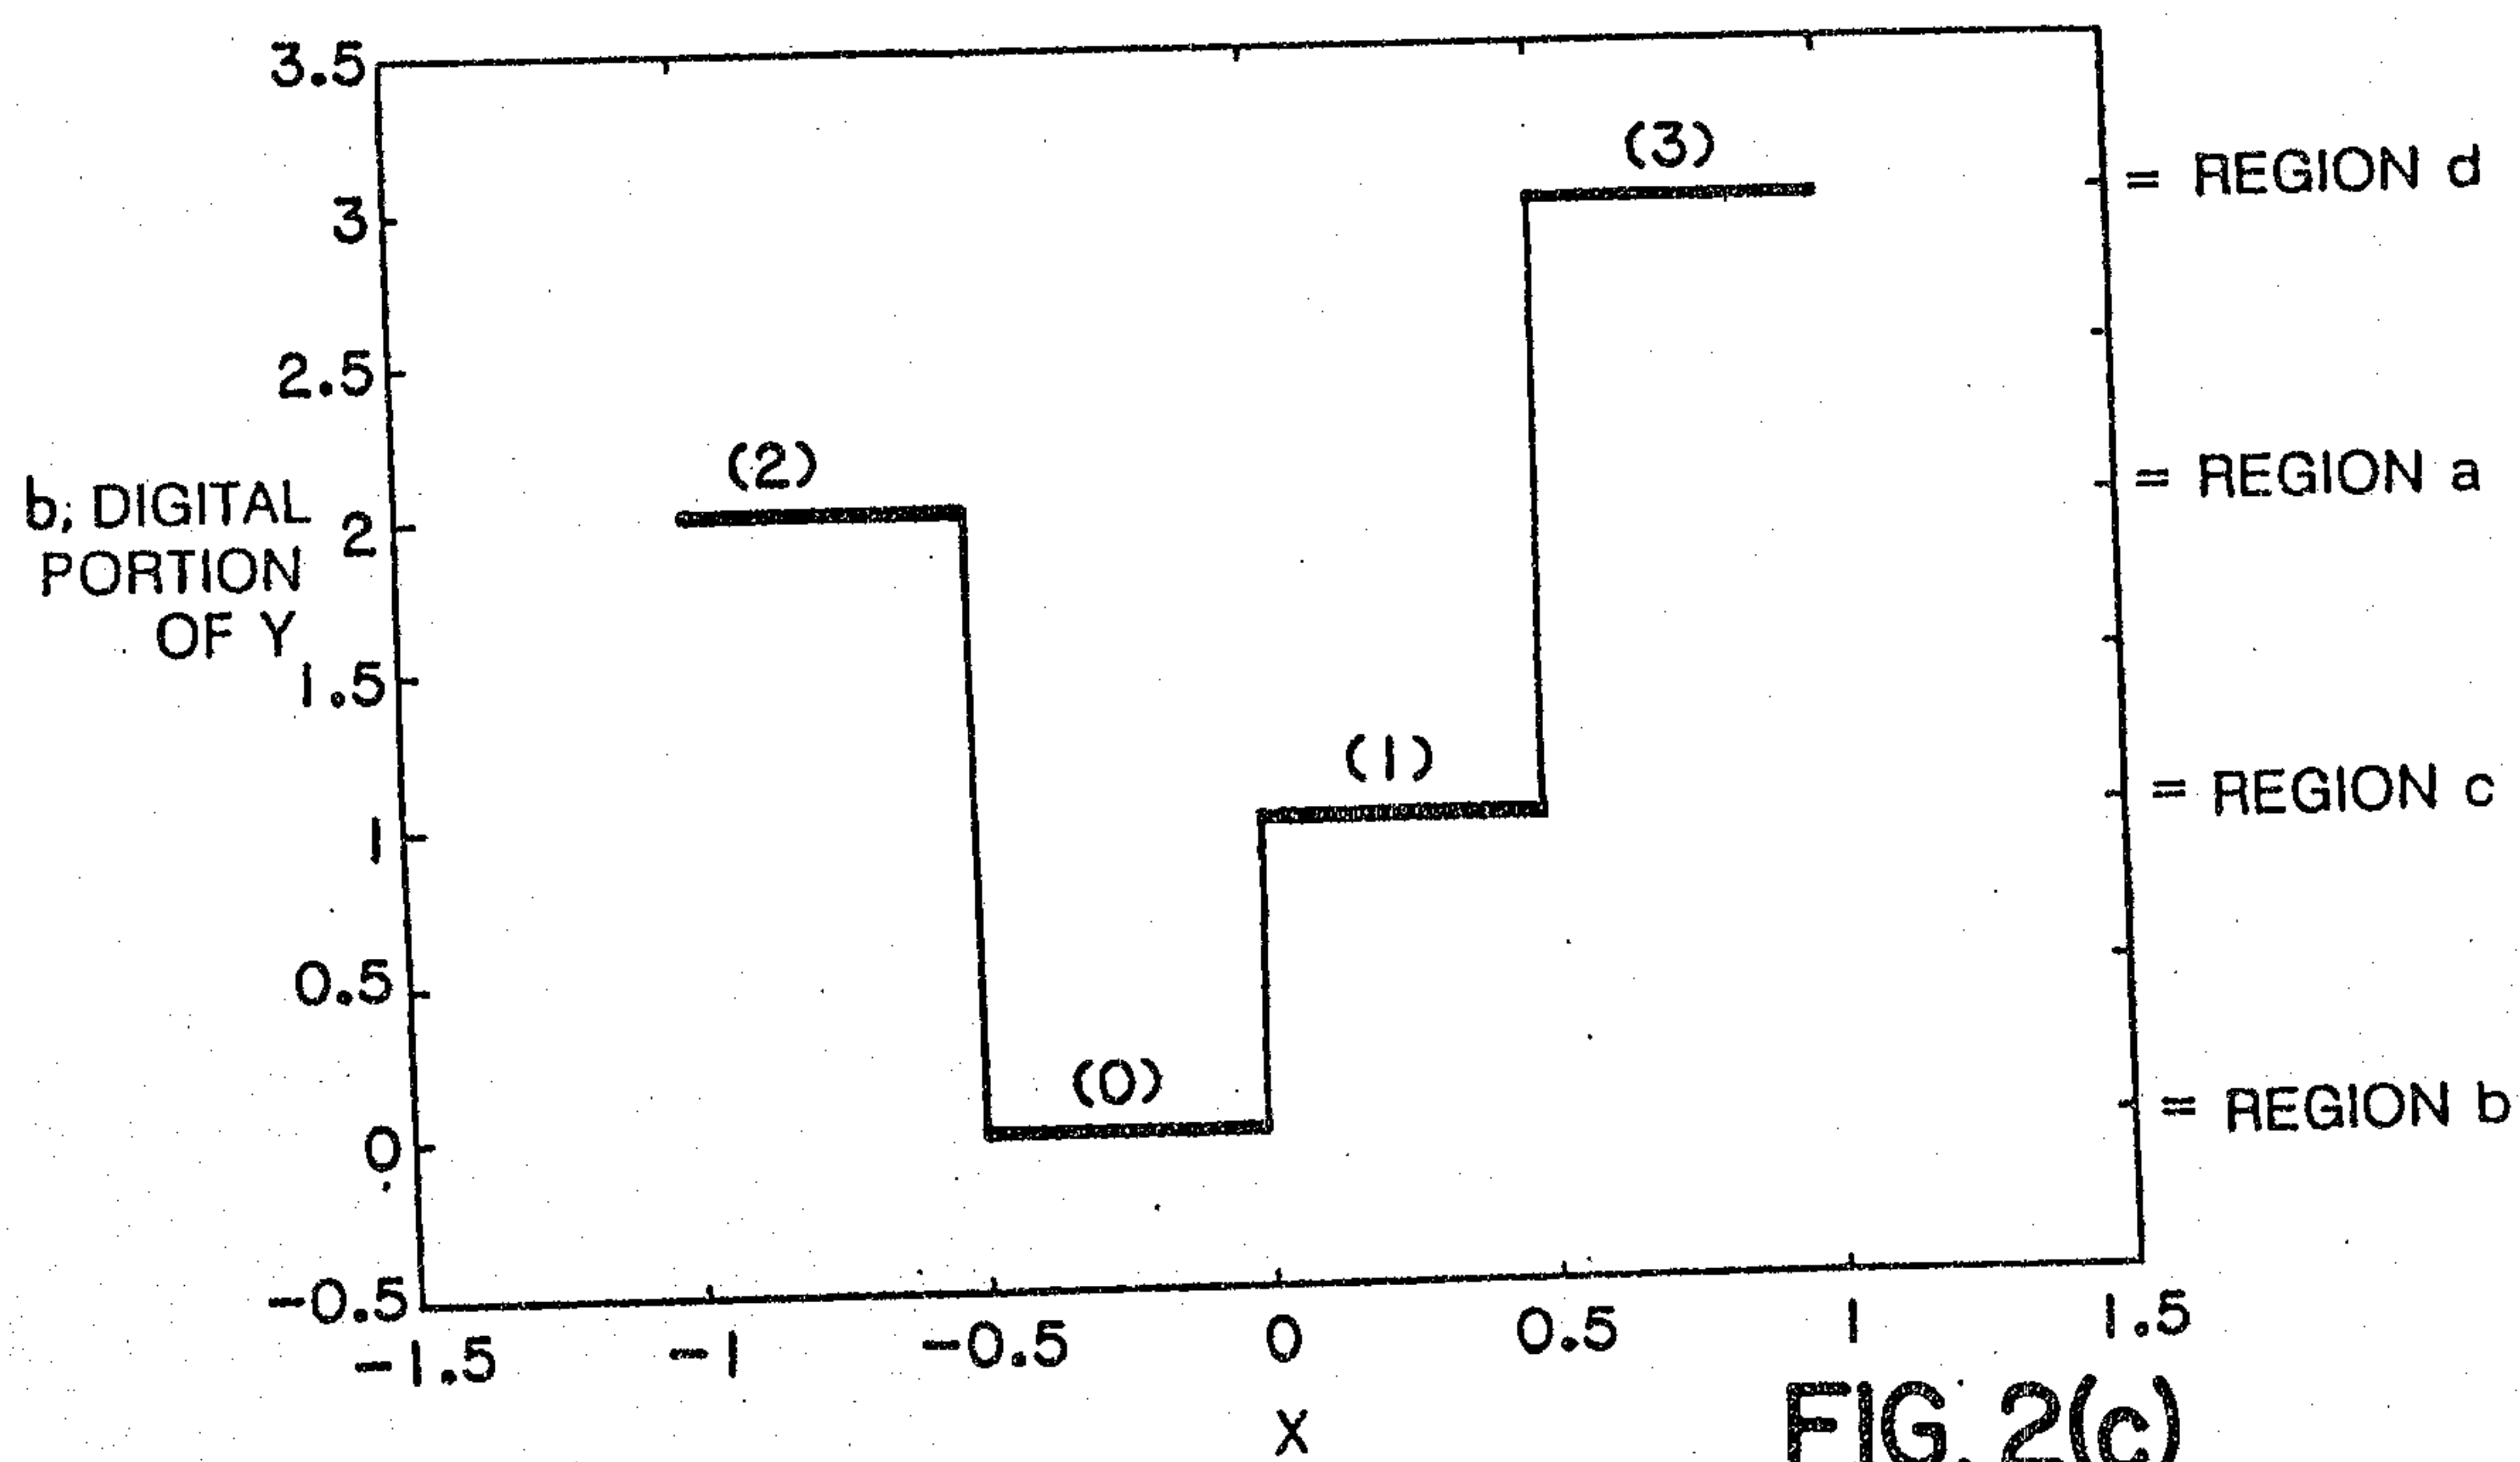


FIG. 2(c)

SUBSTITUTE SHEET

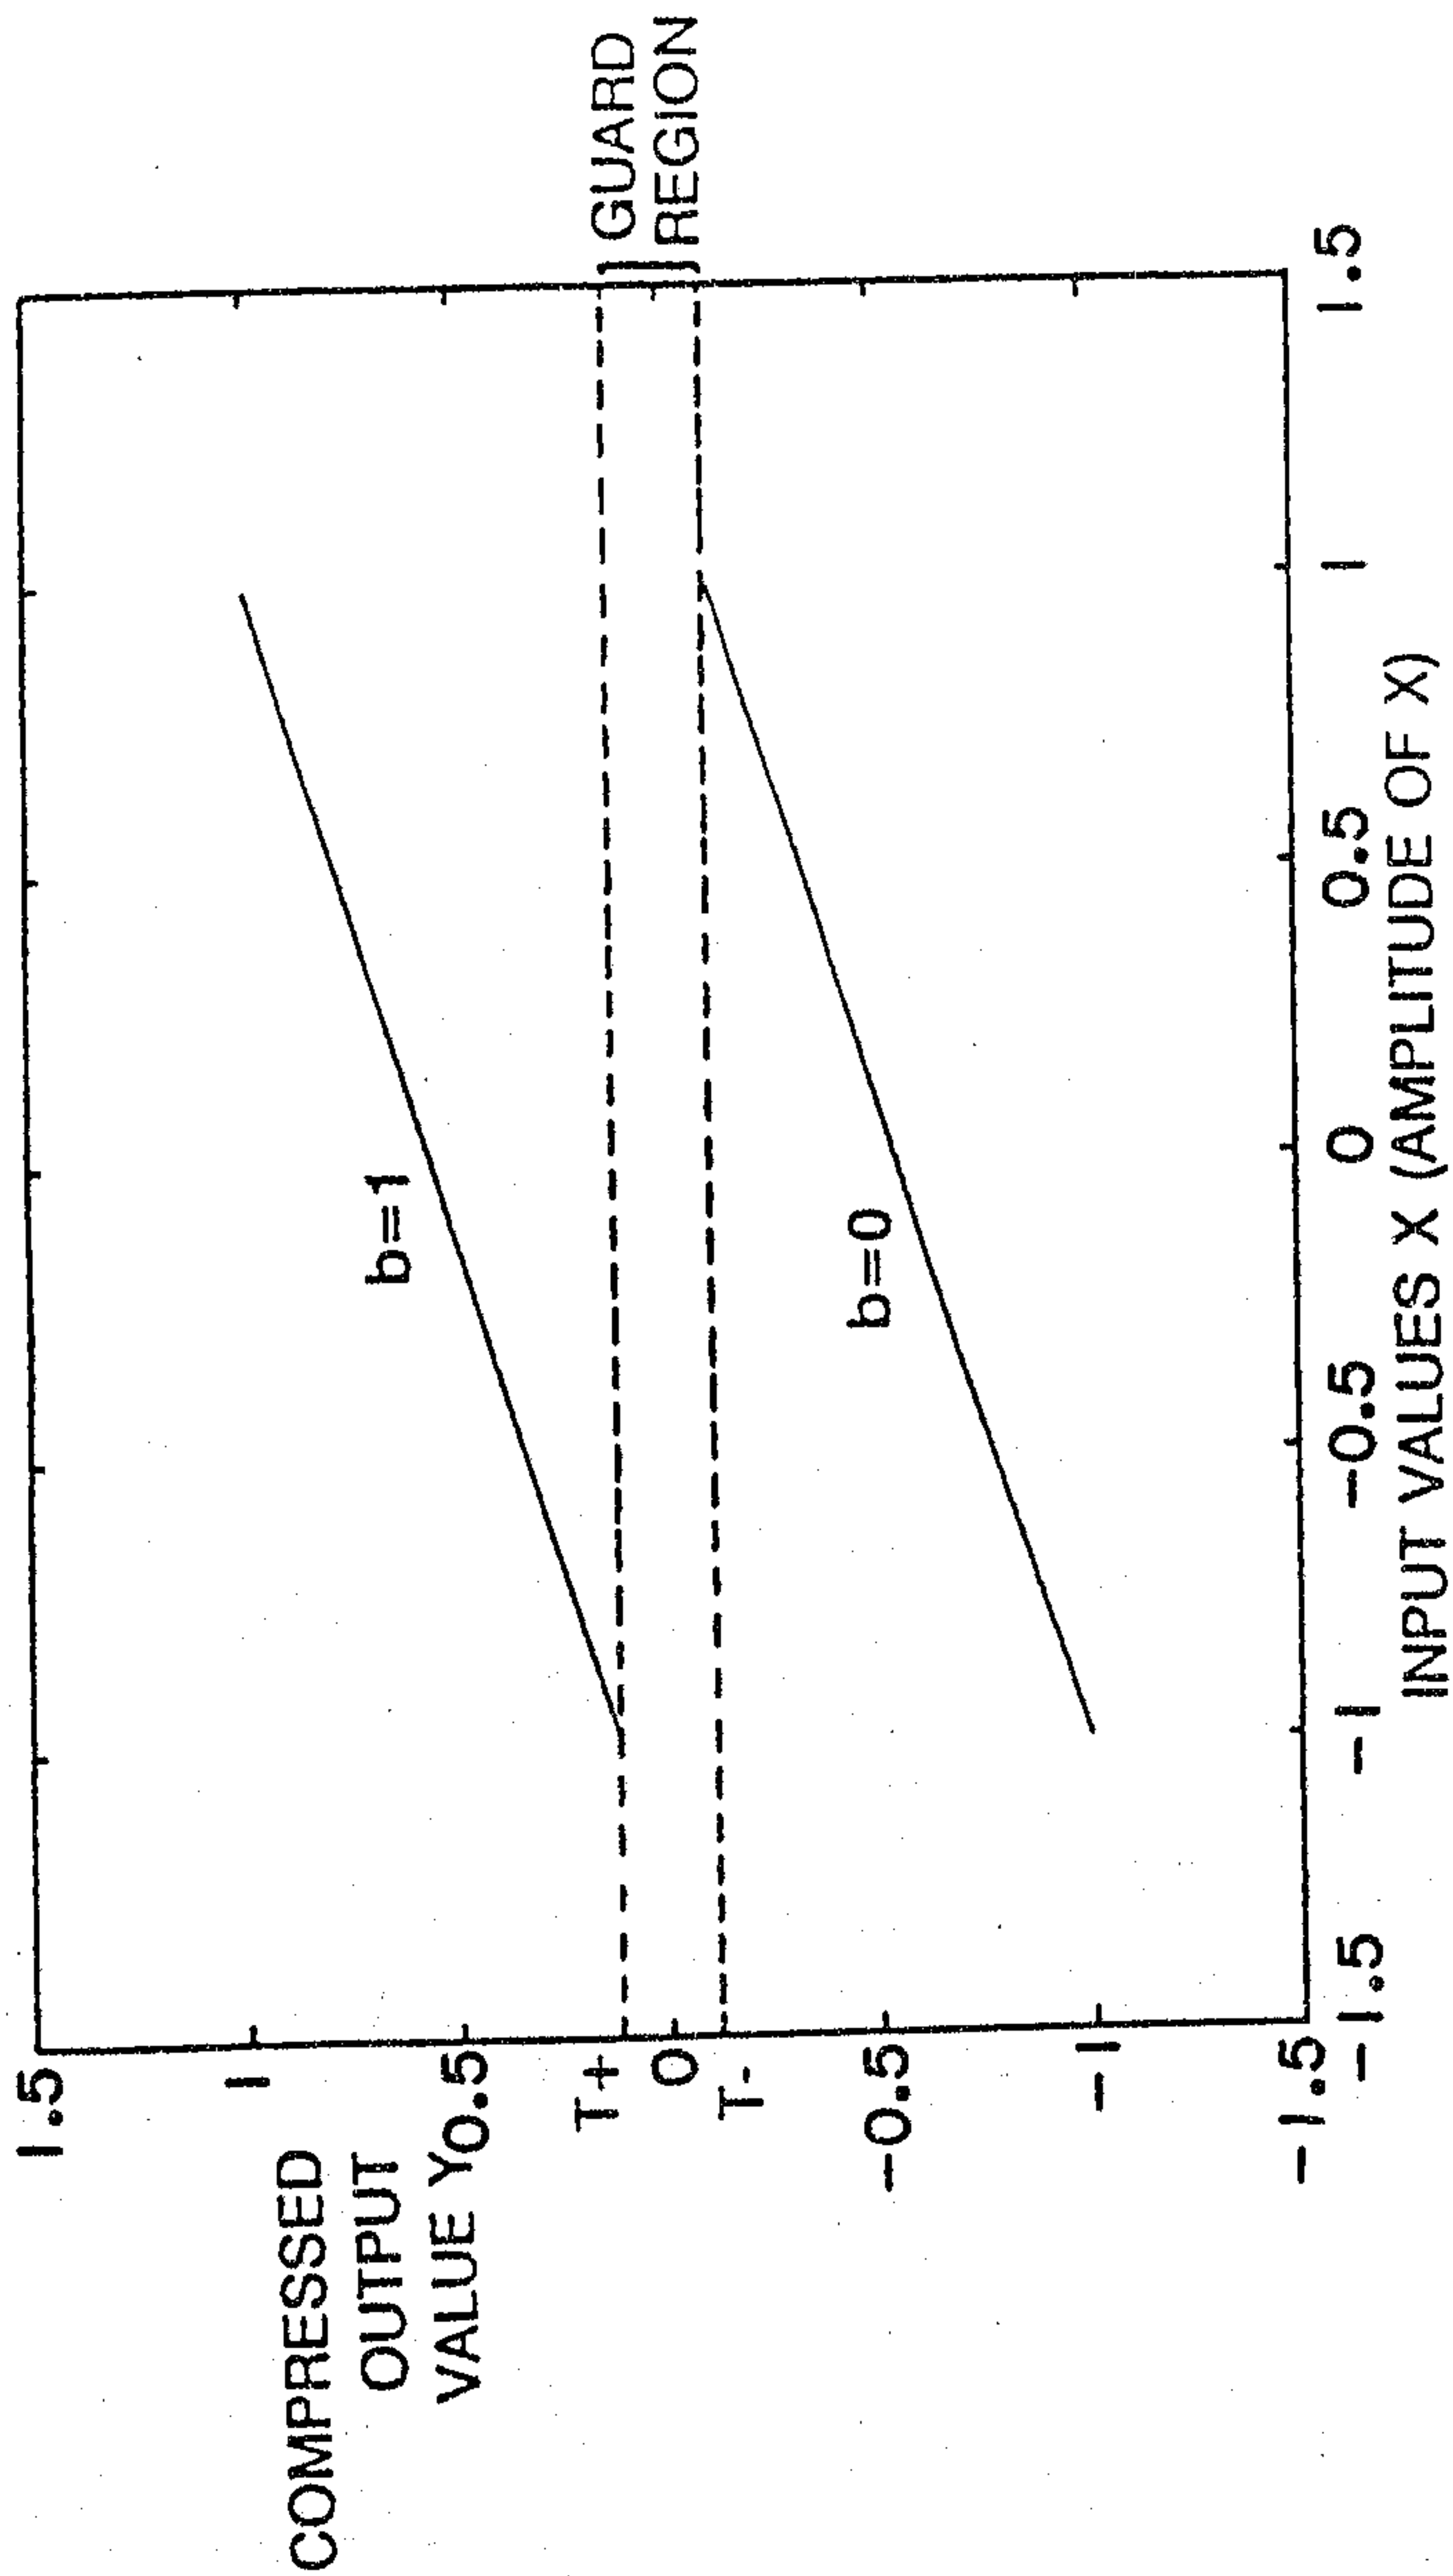


FIG. 3

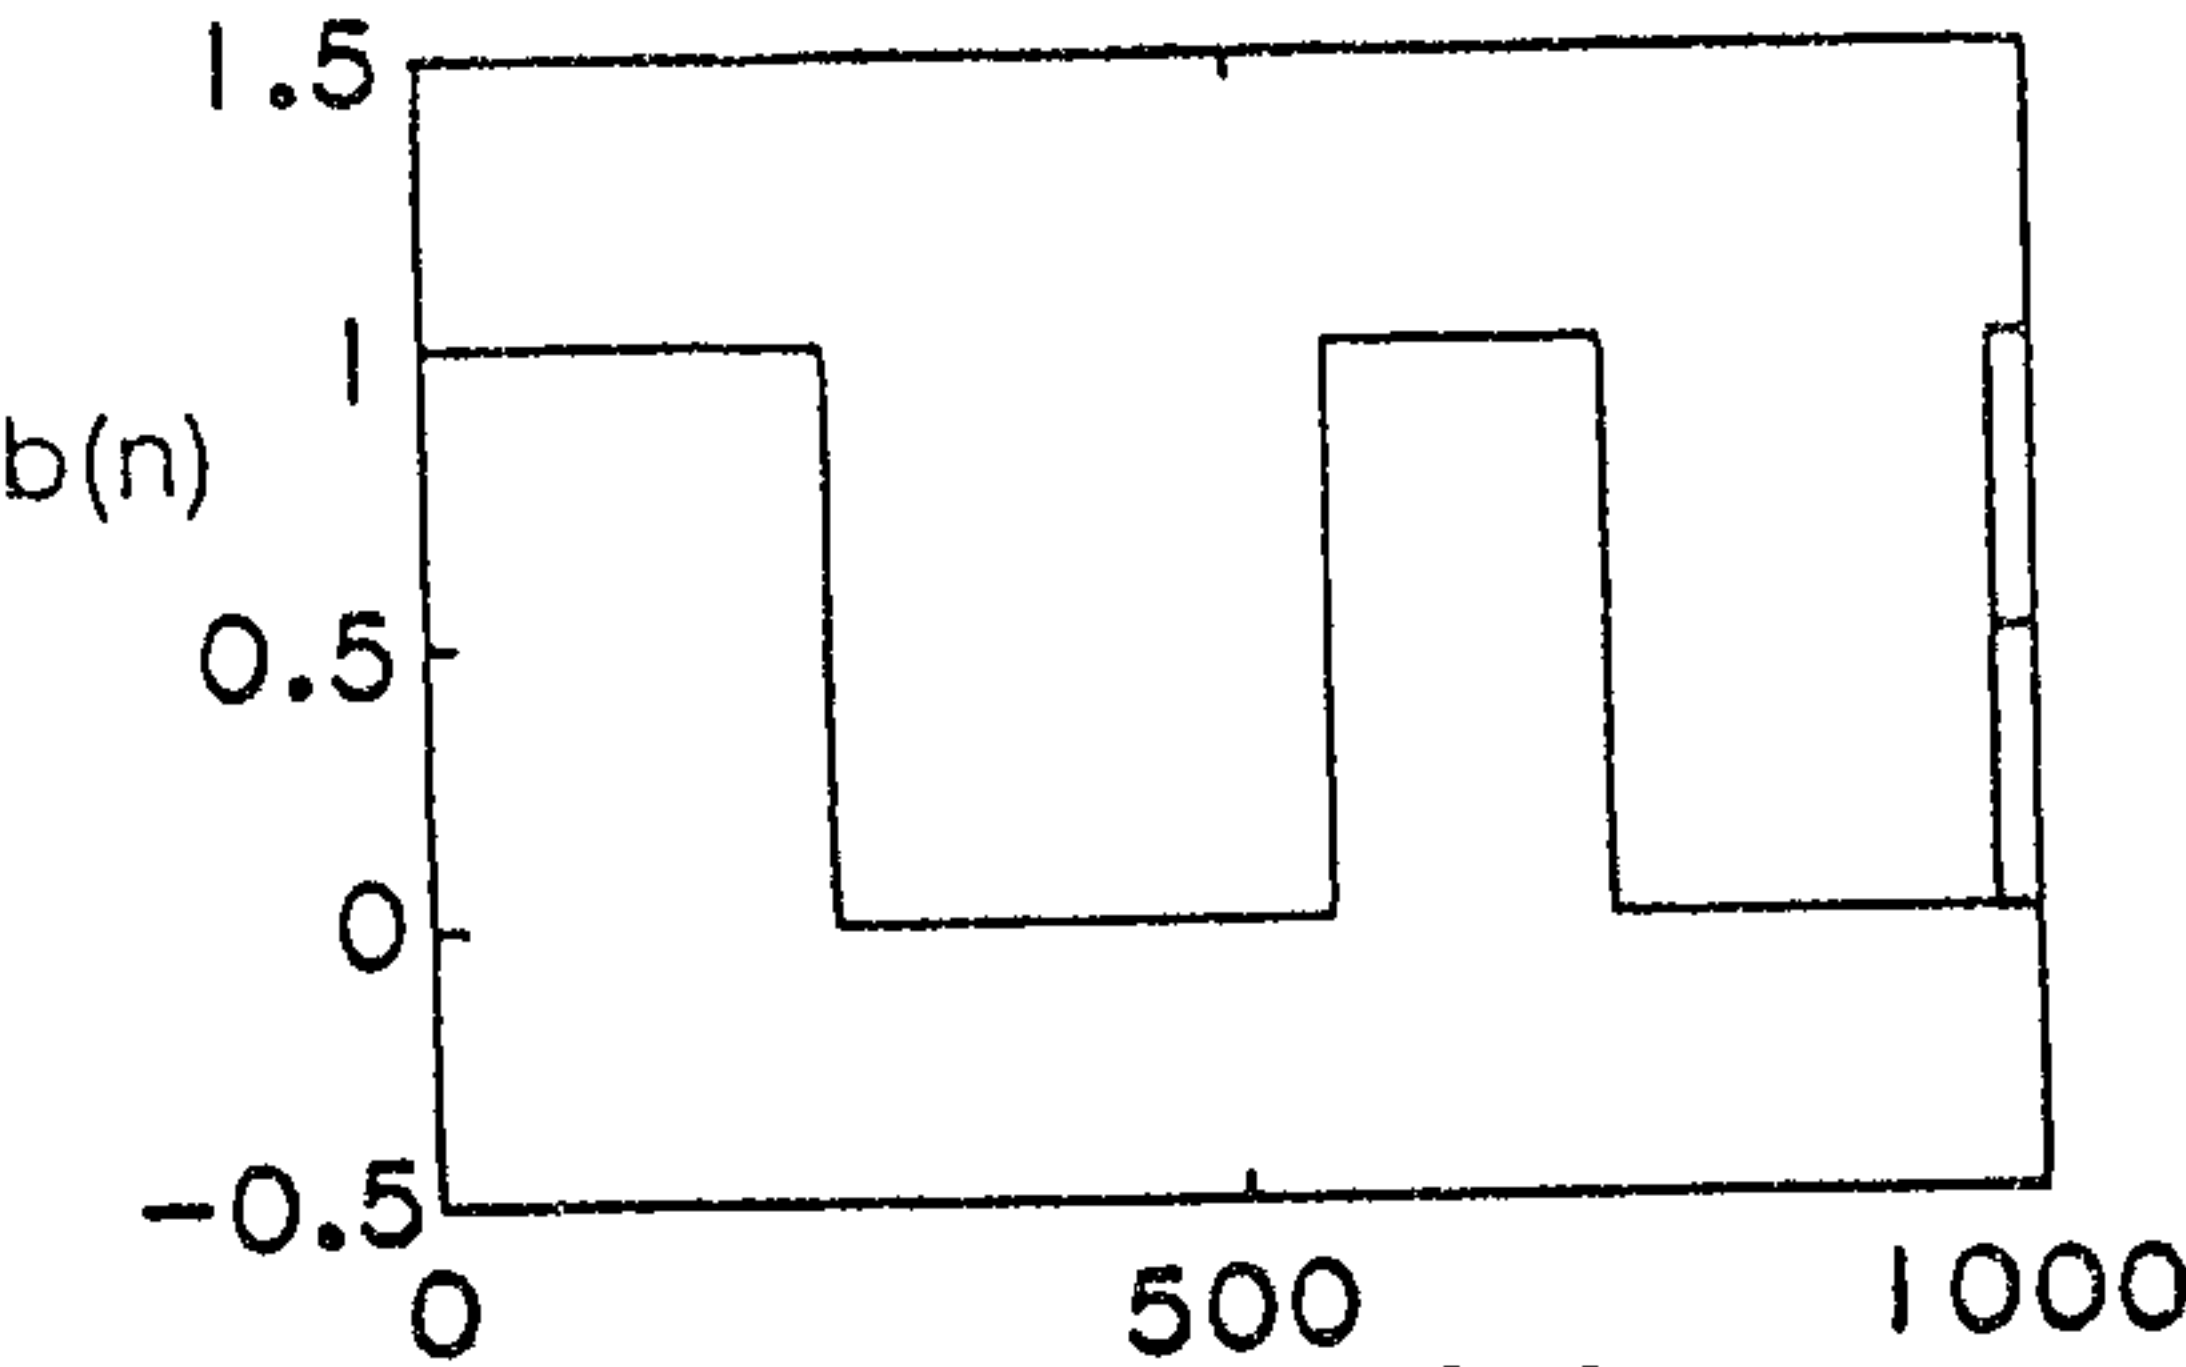


FIG. 4(a)

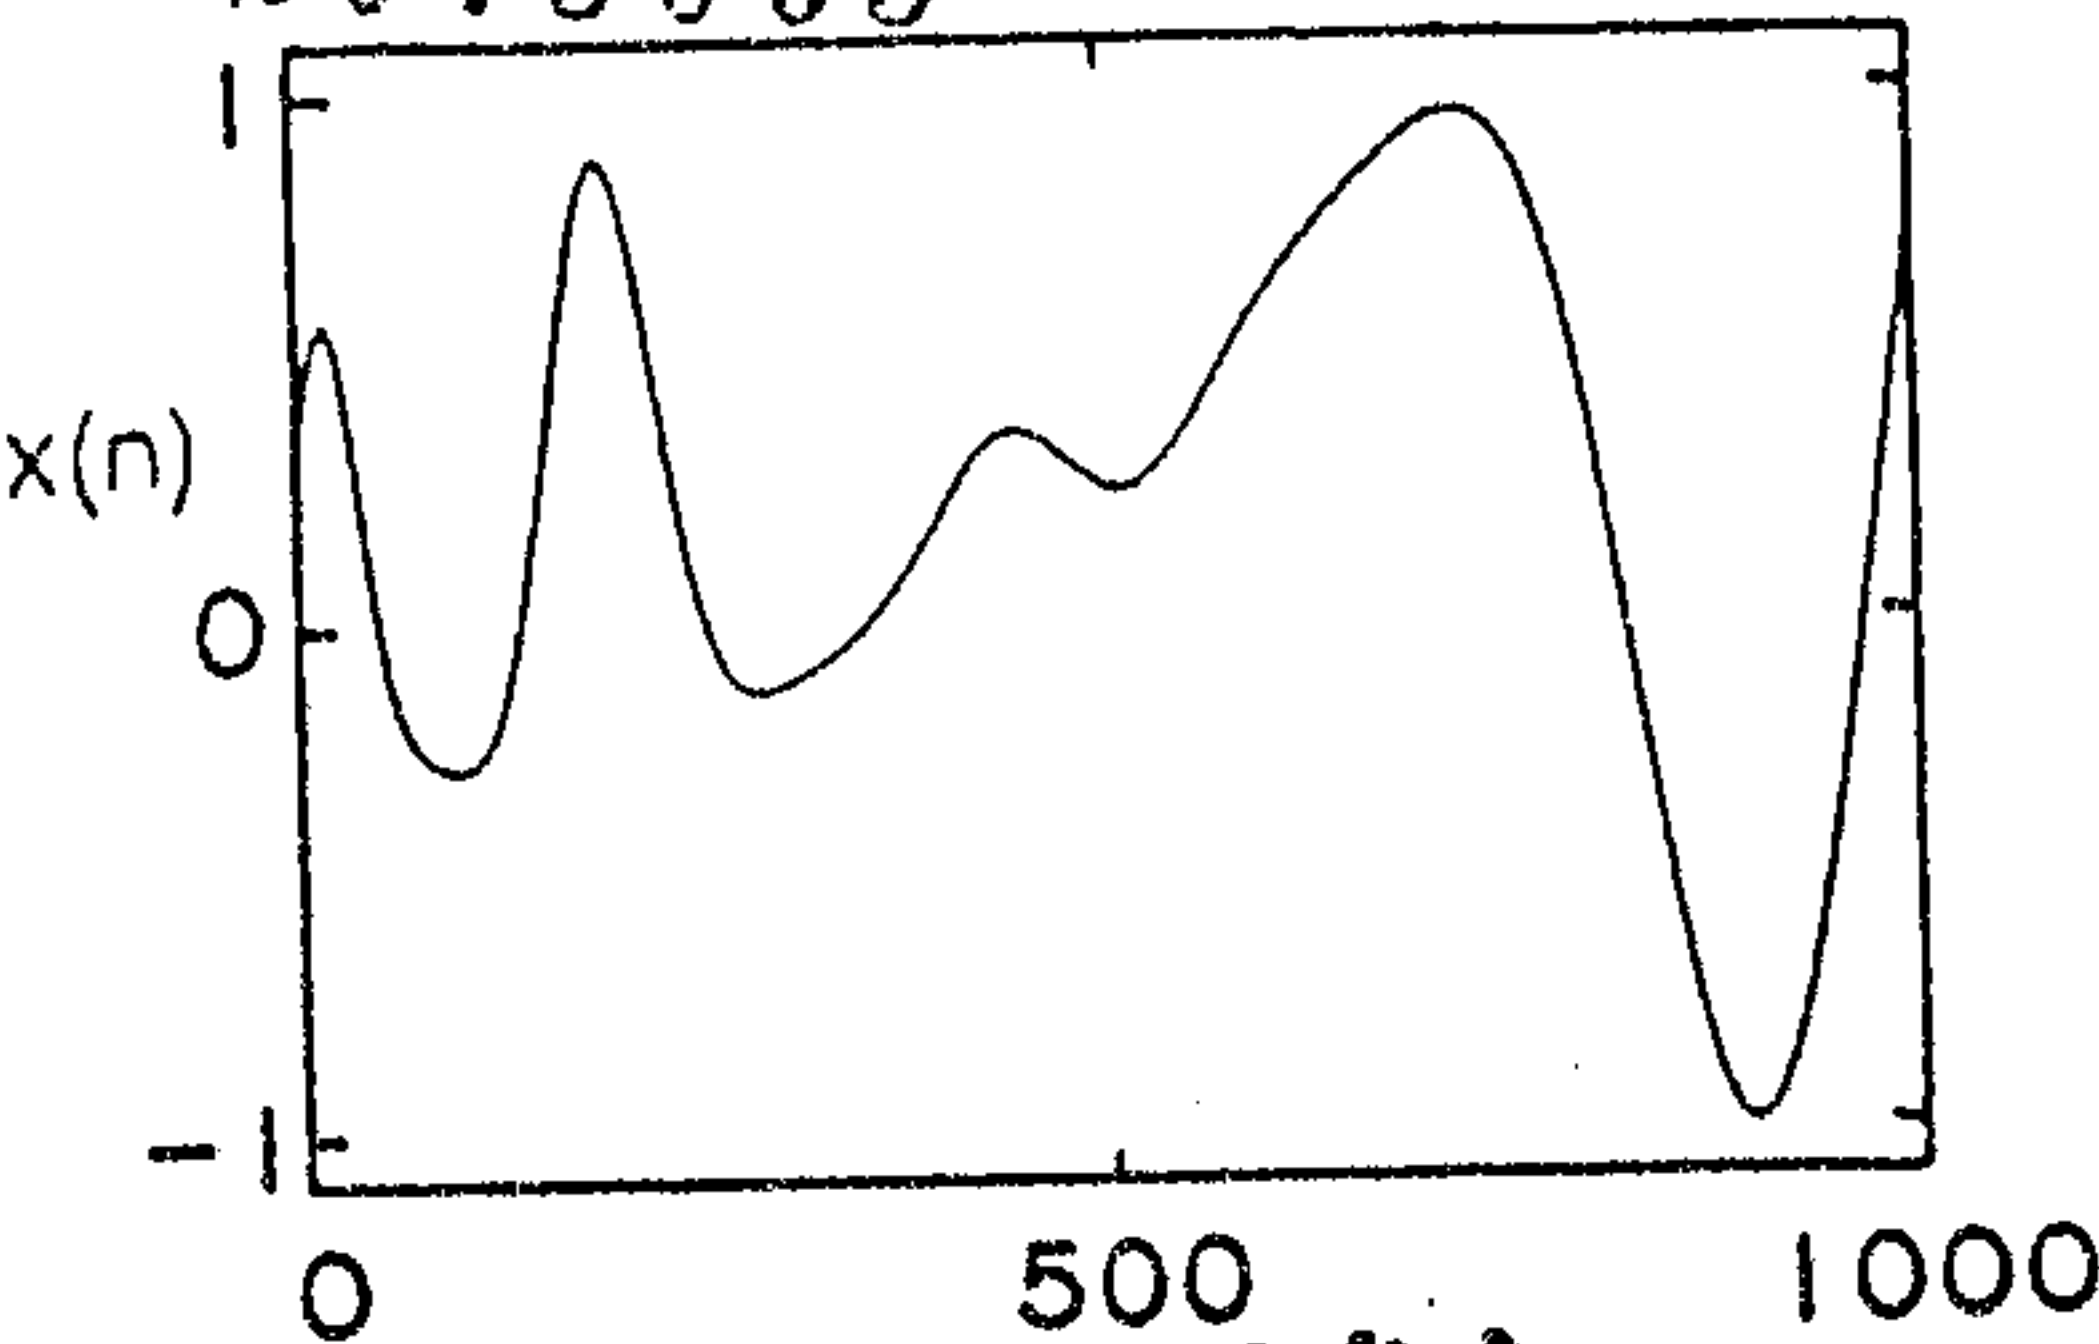


FIG. 4(b)

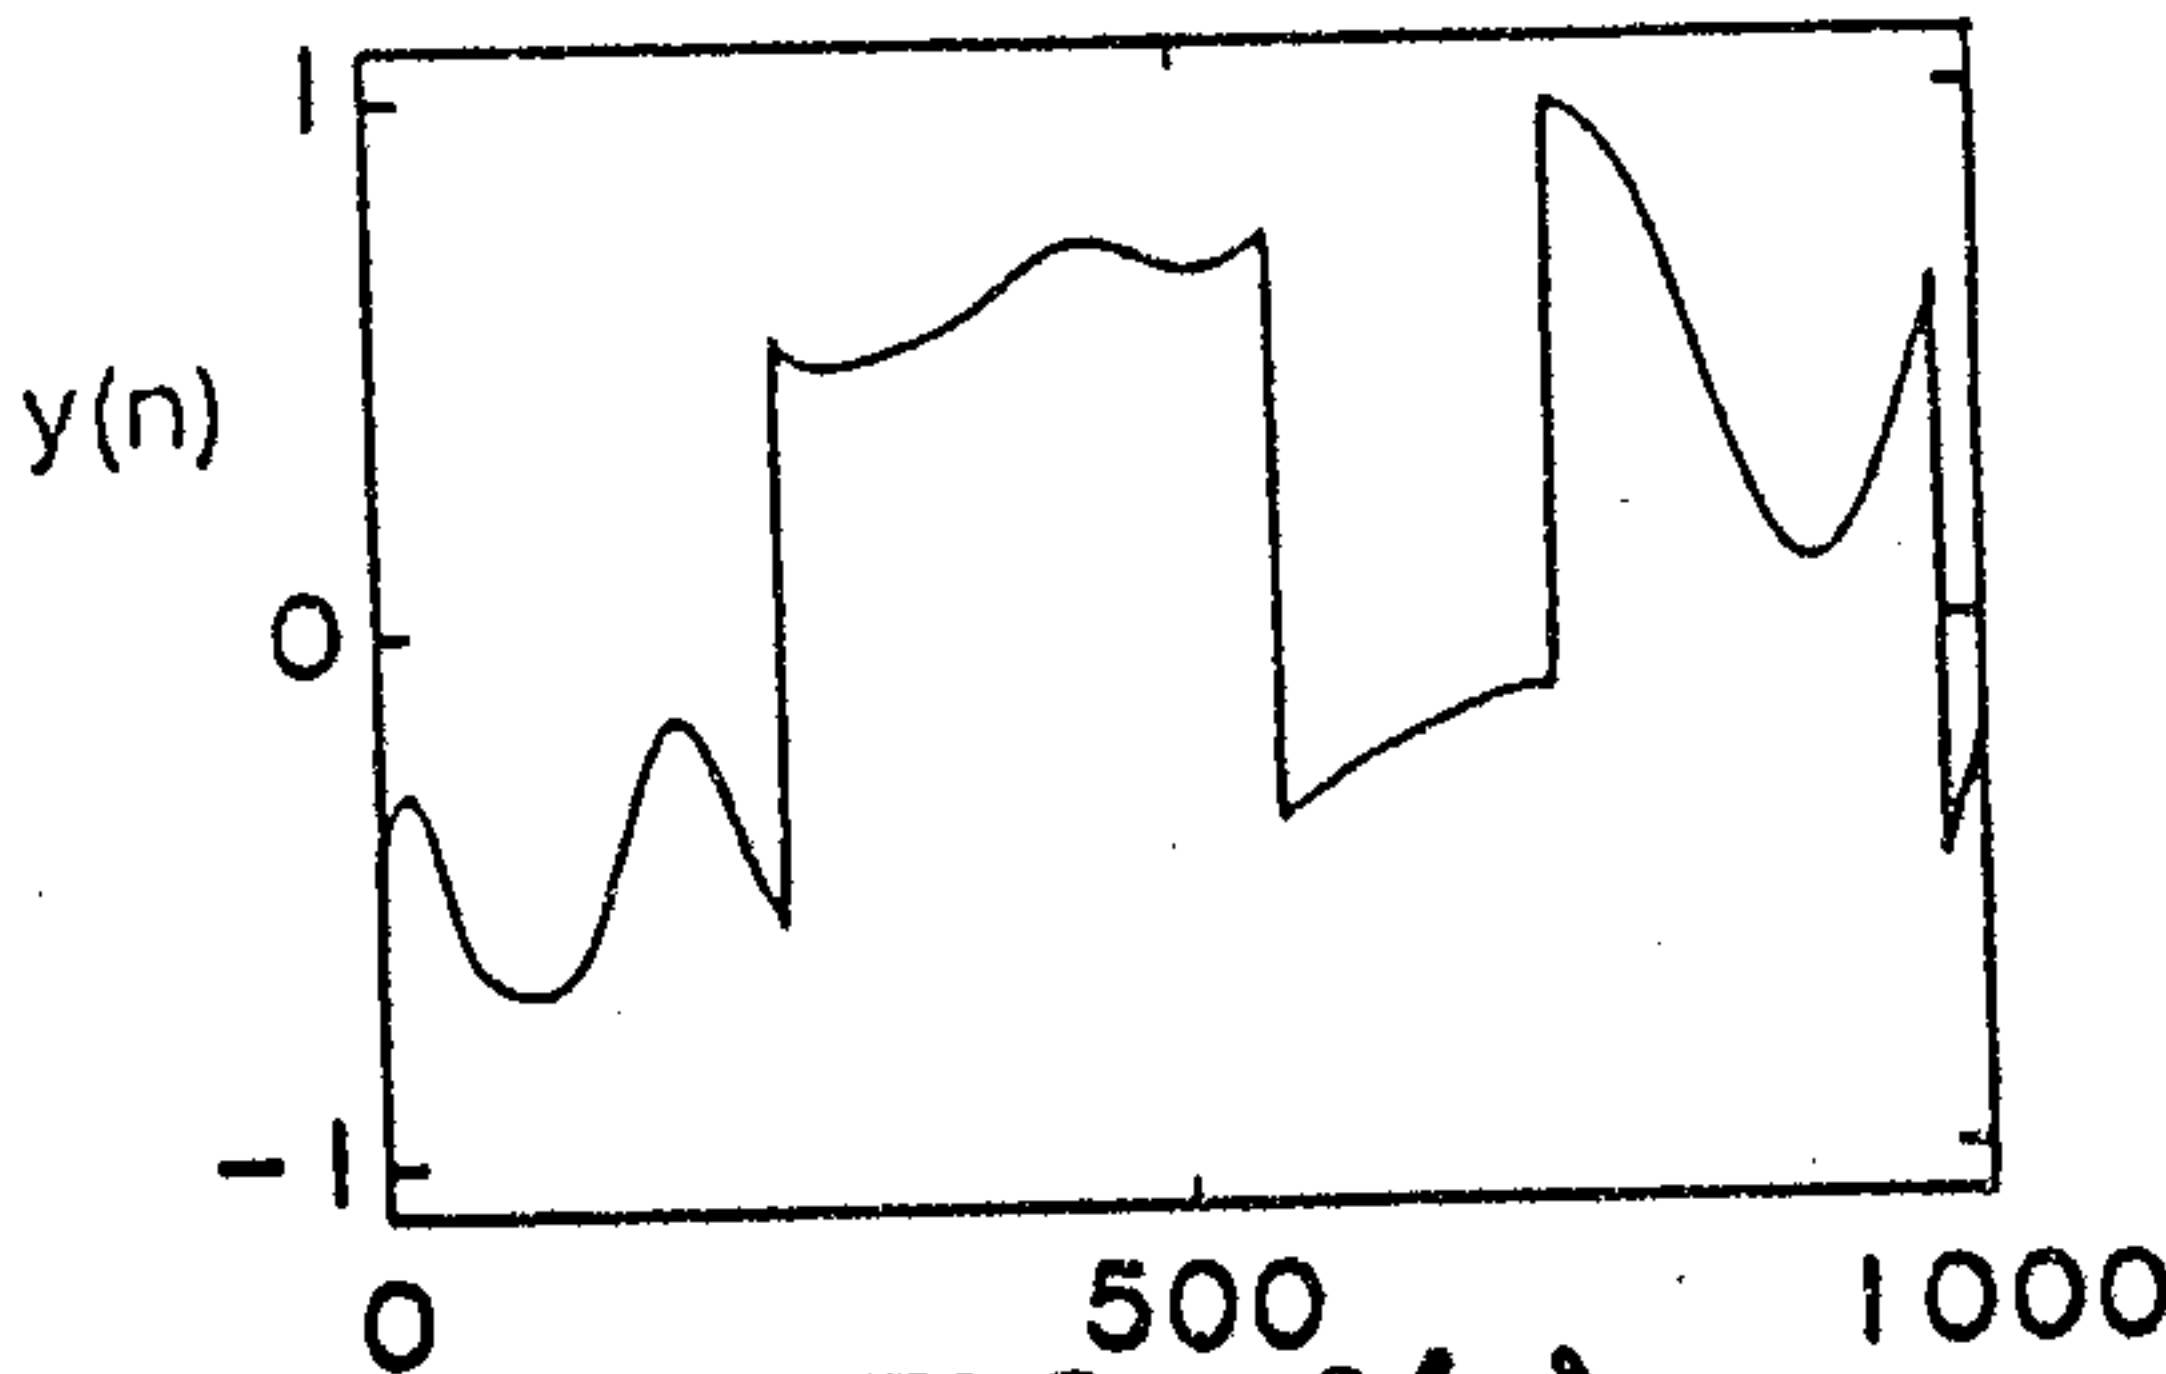


FIG. 4(c)

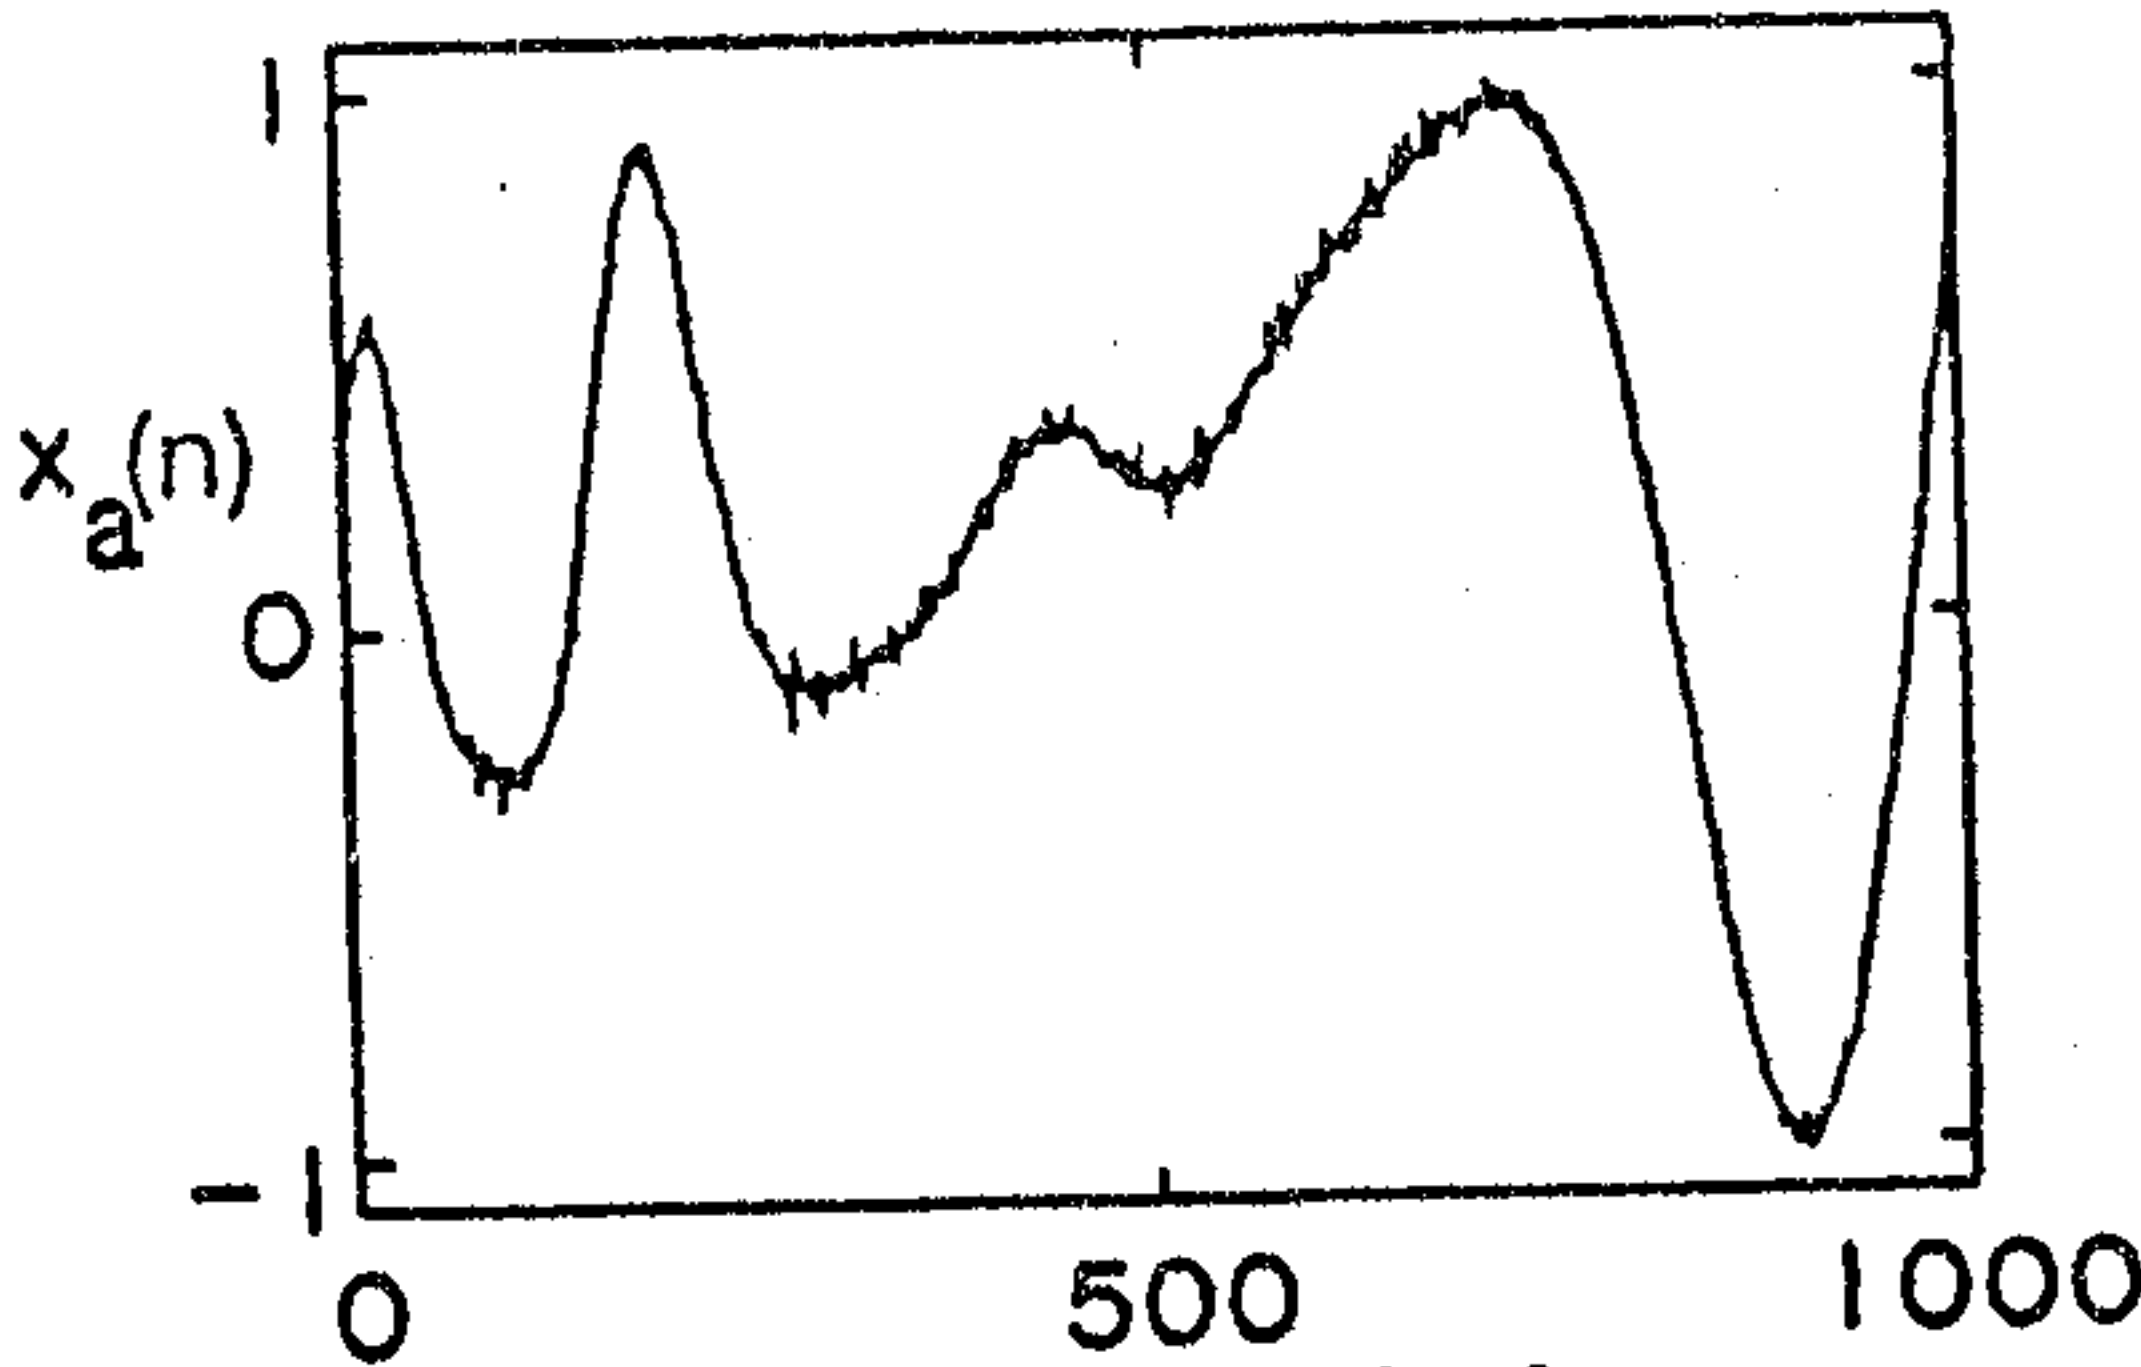


FIG. 4(d)

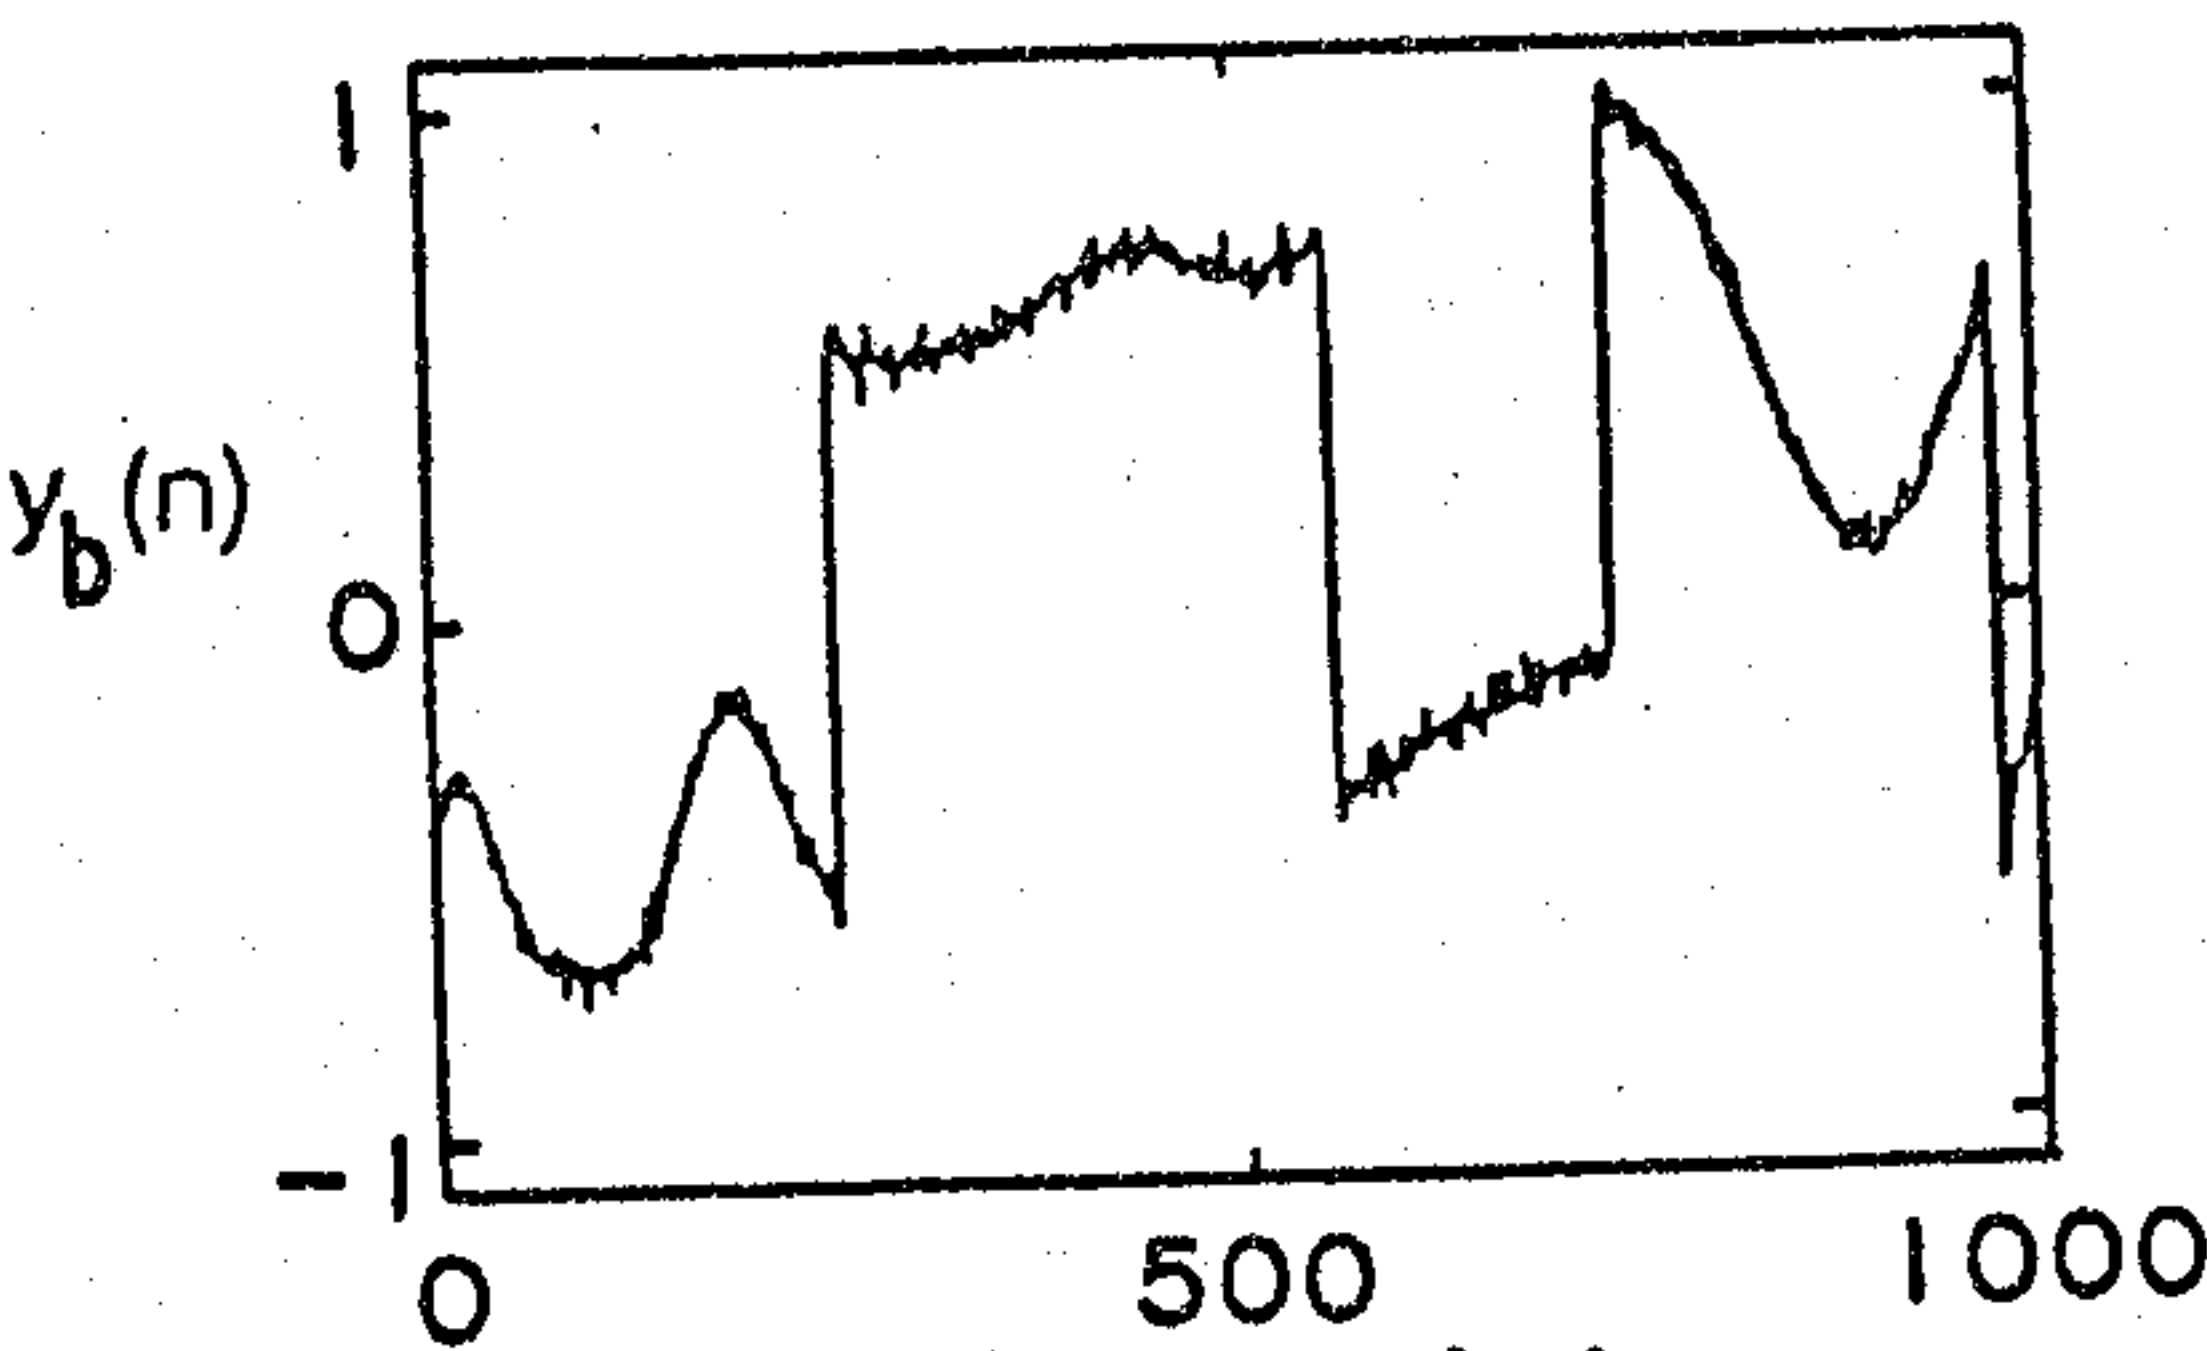


FIG. 4(e)

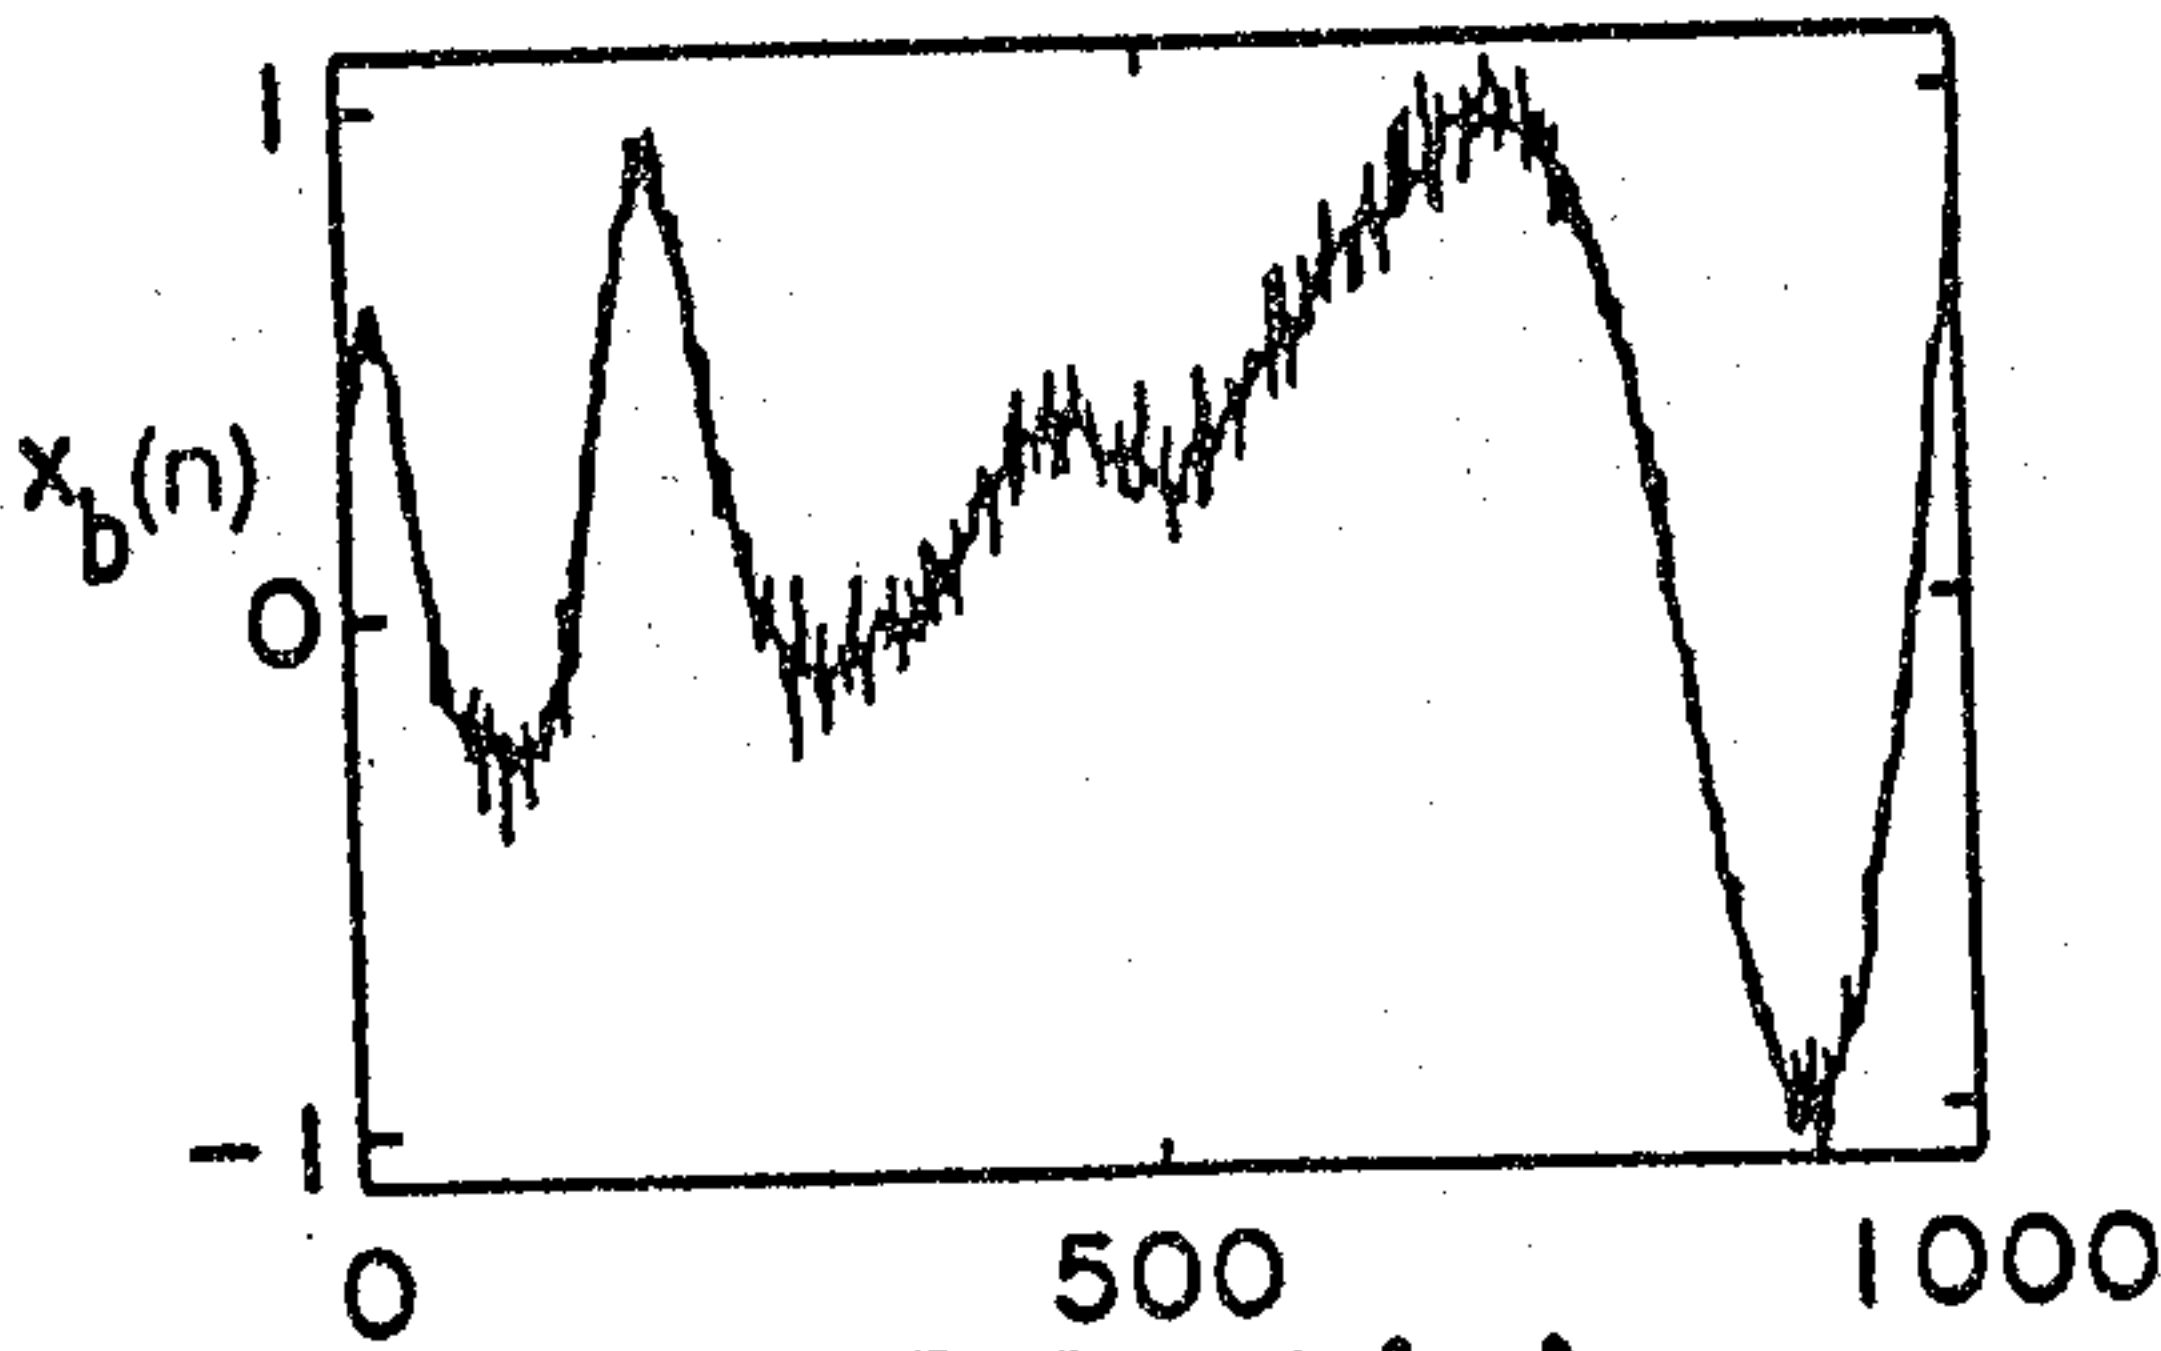


FIG. 4(g)

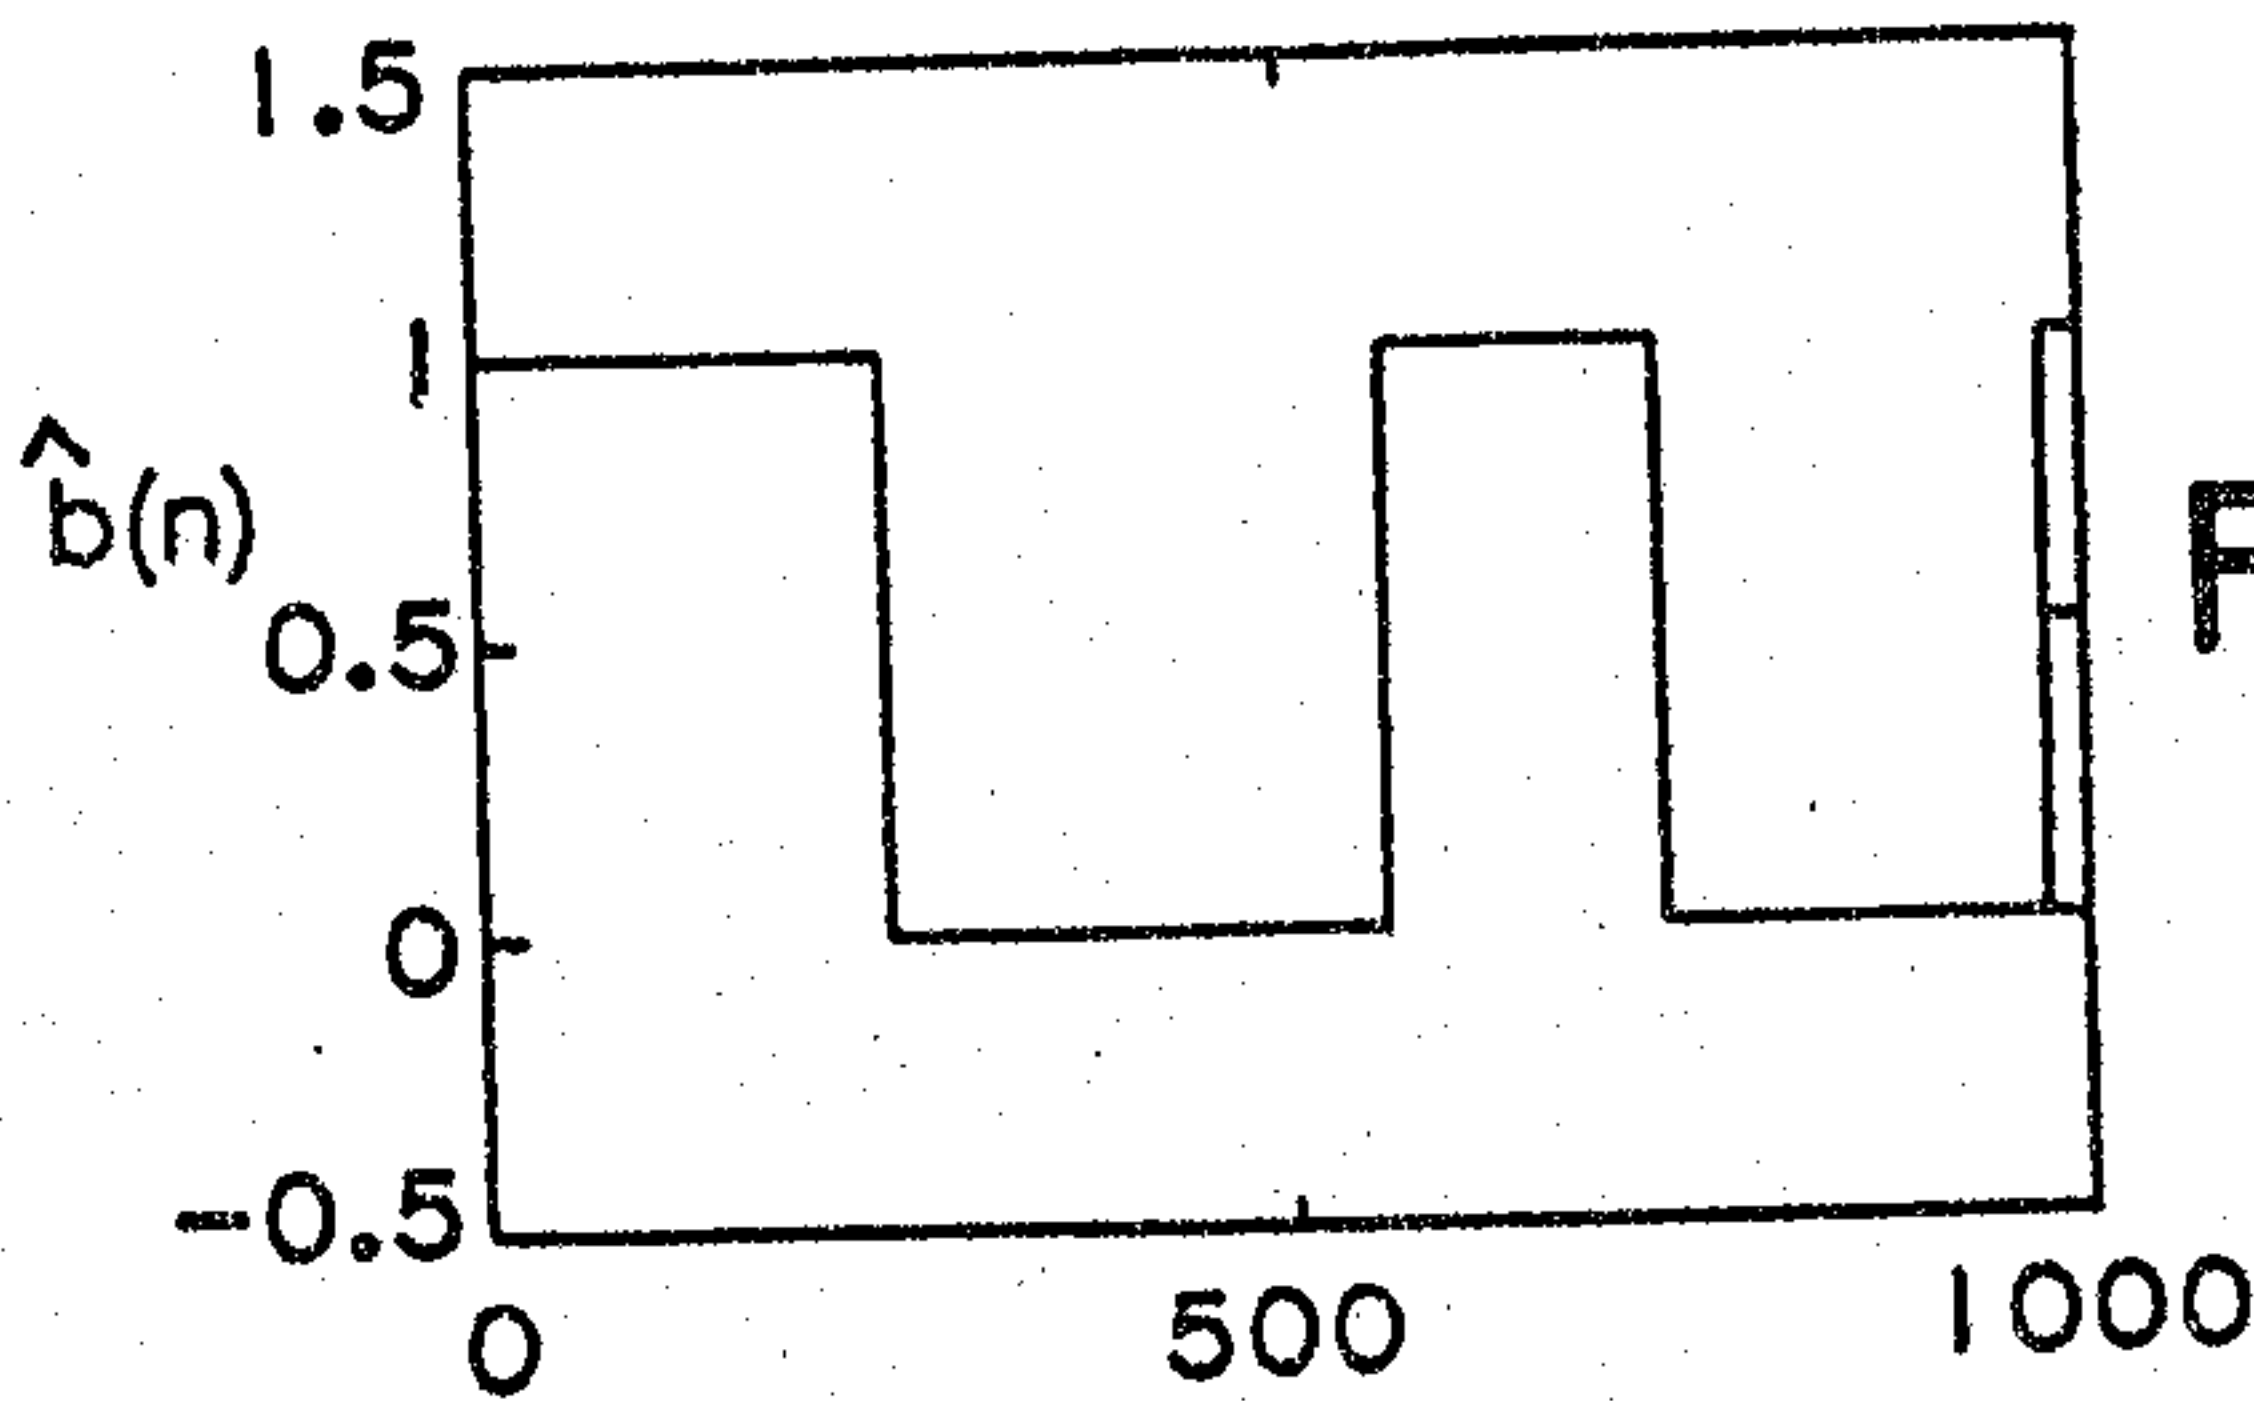


FIG. 4(f)

7 / 9

2075065

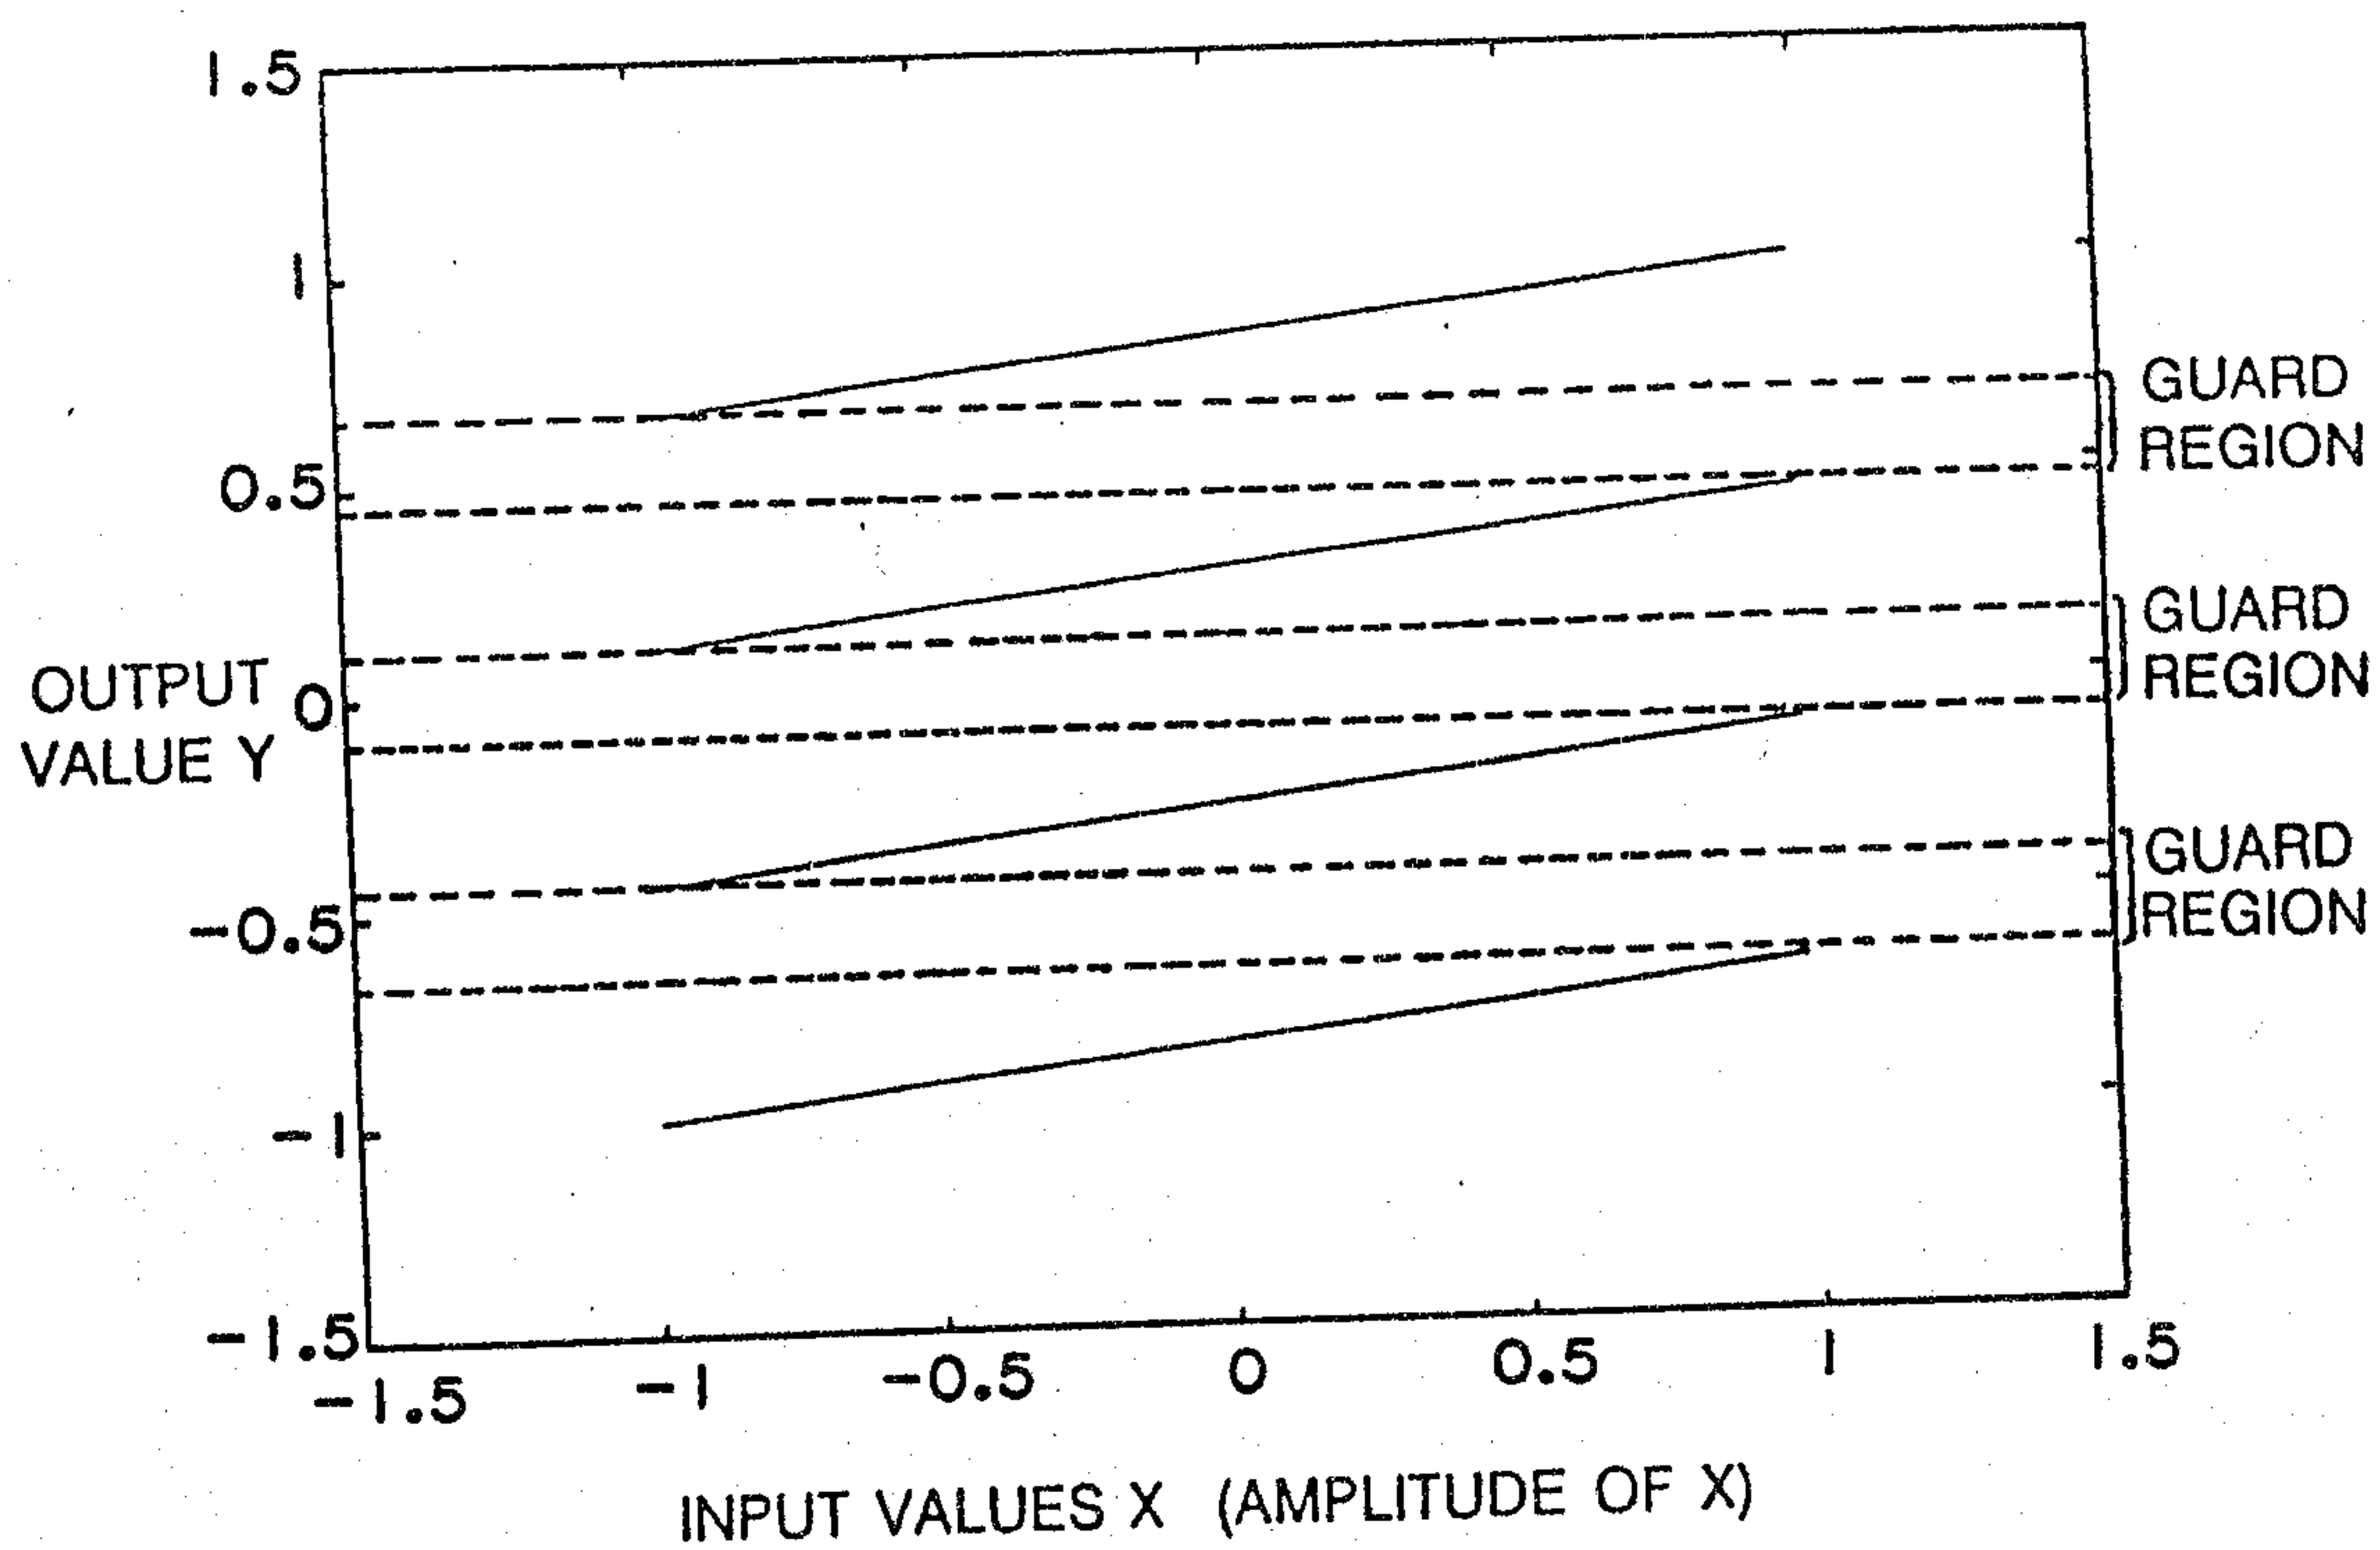


FIG. 5

SUBSTITUTE SHEET

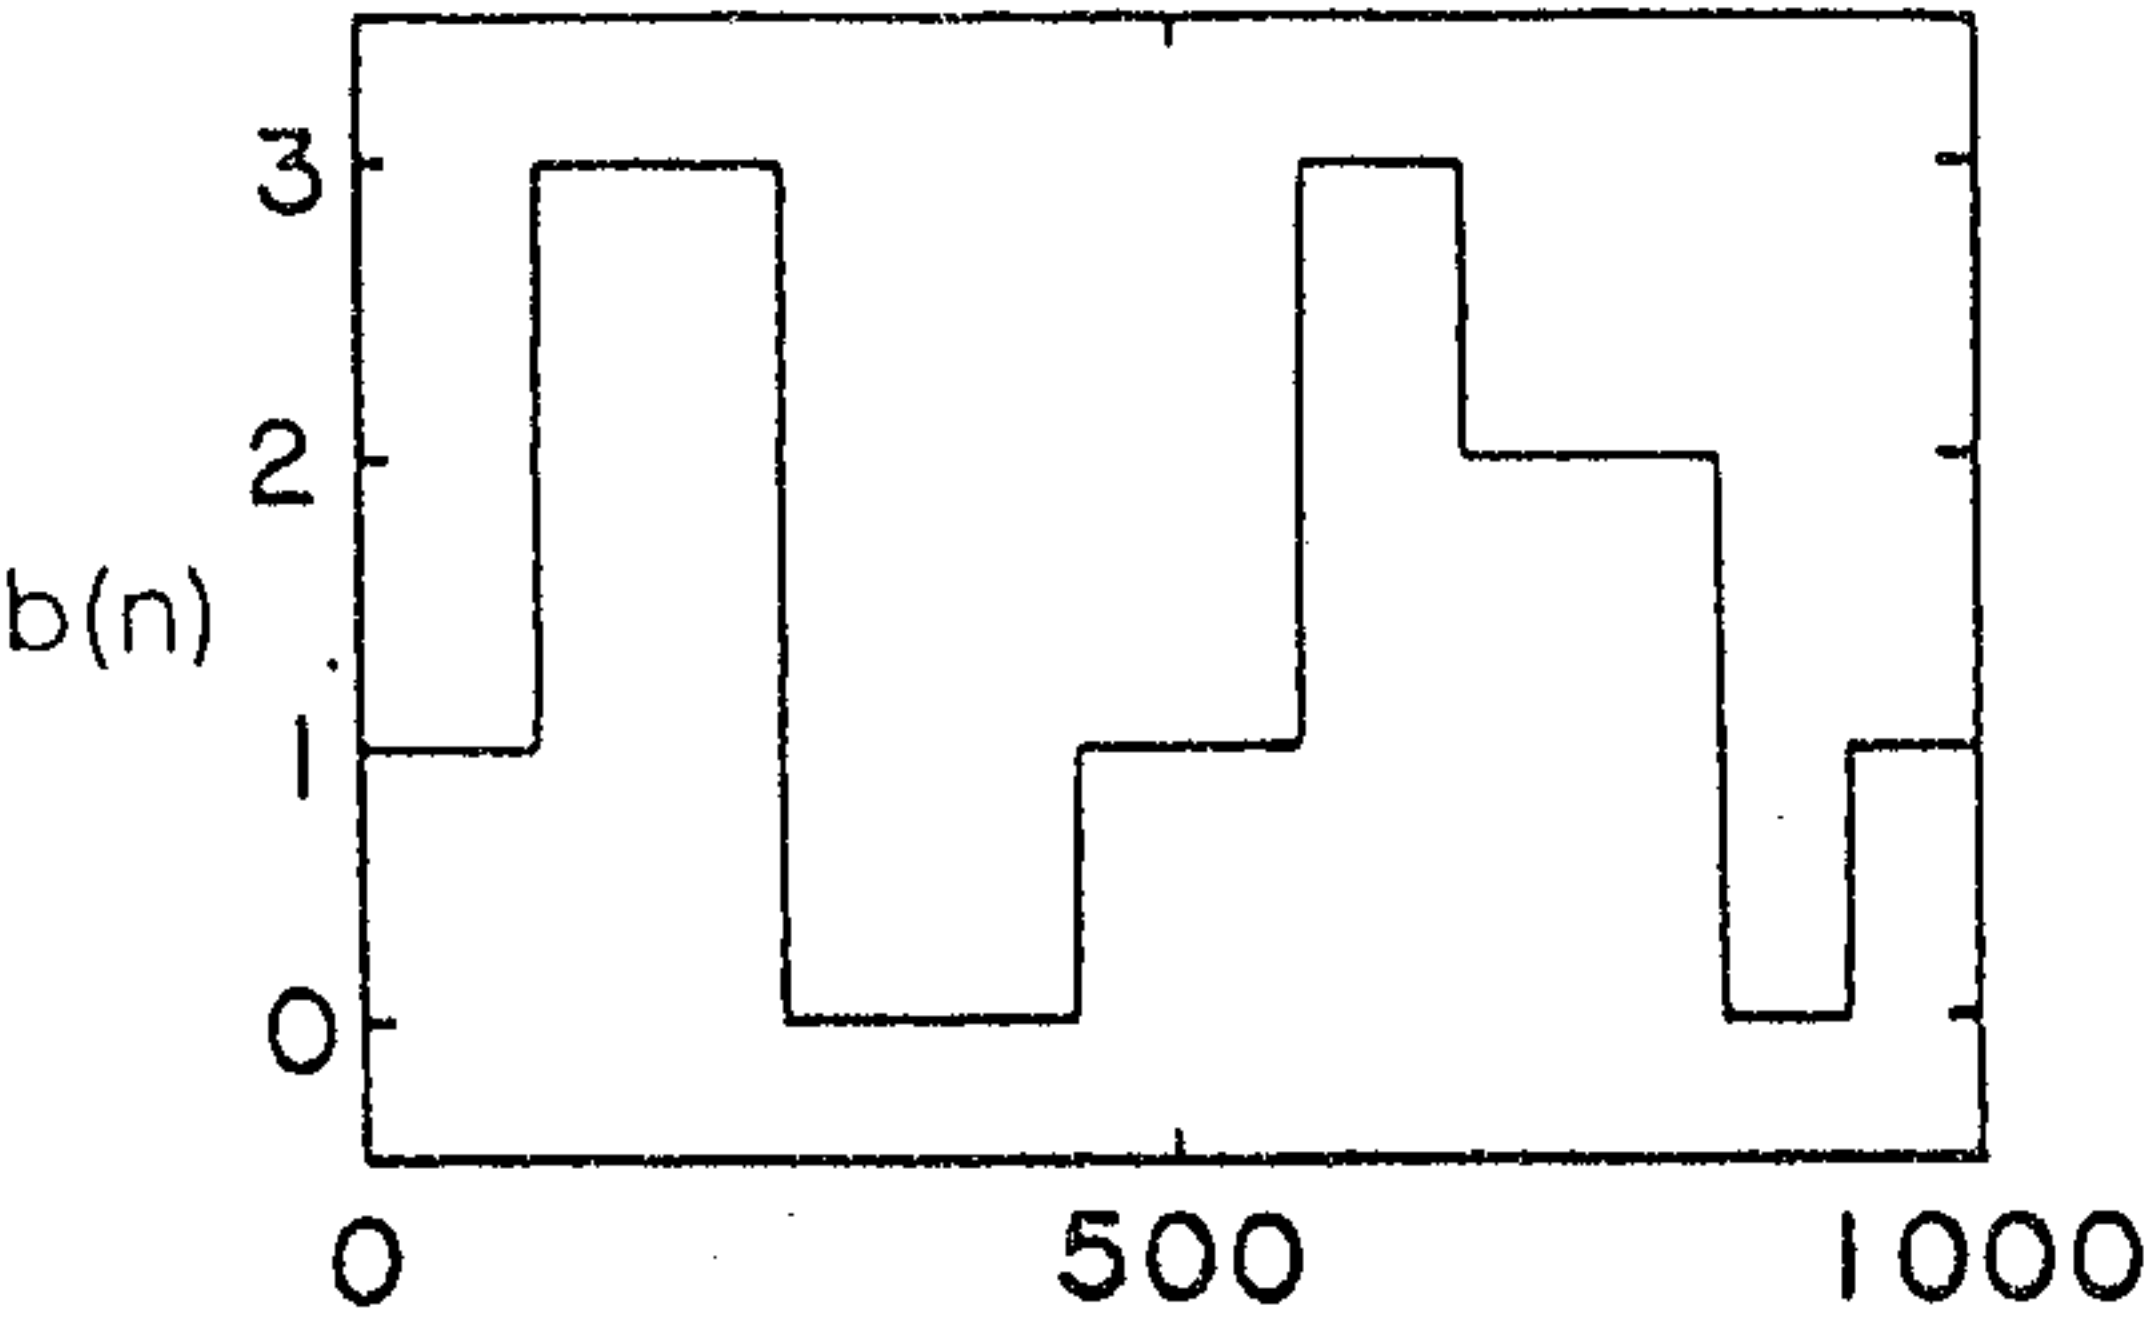


FIG. 6(a)

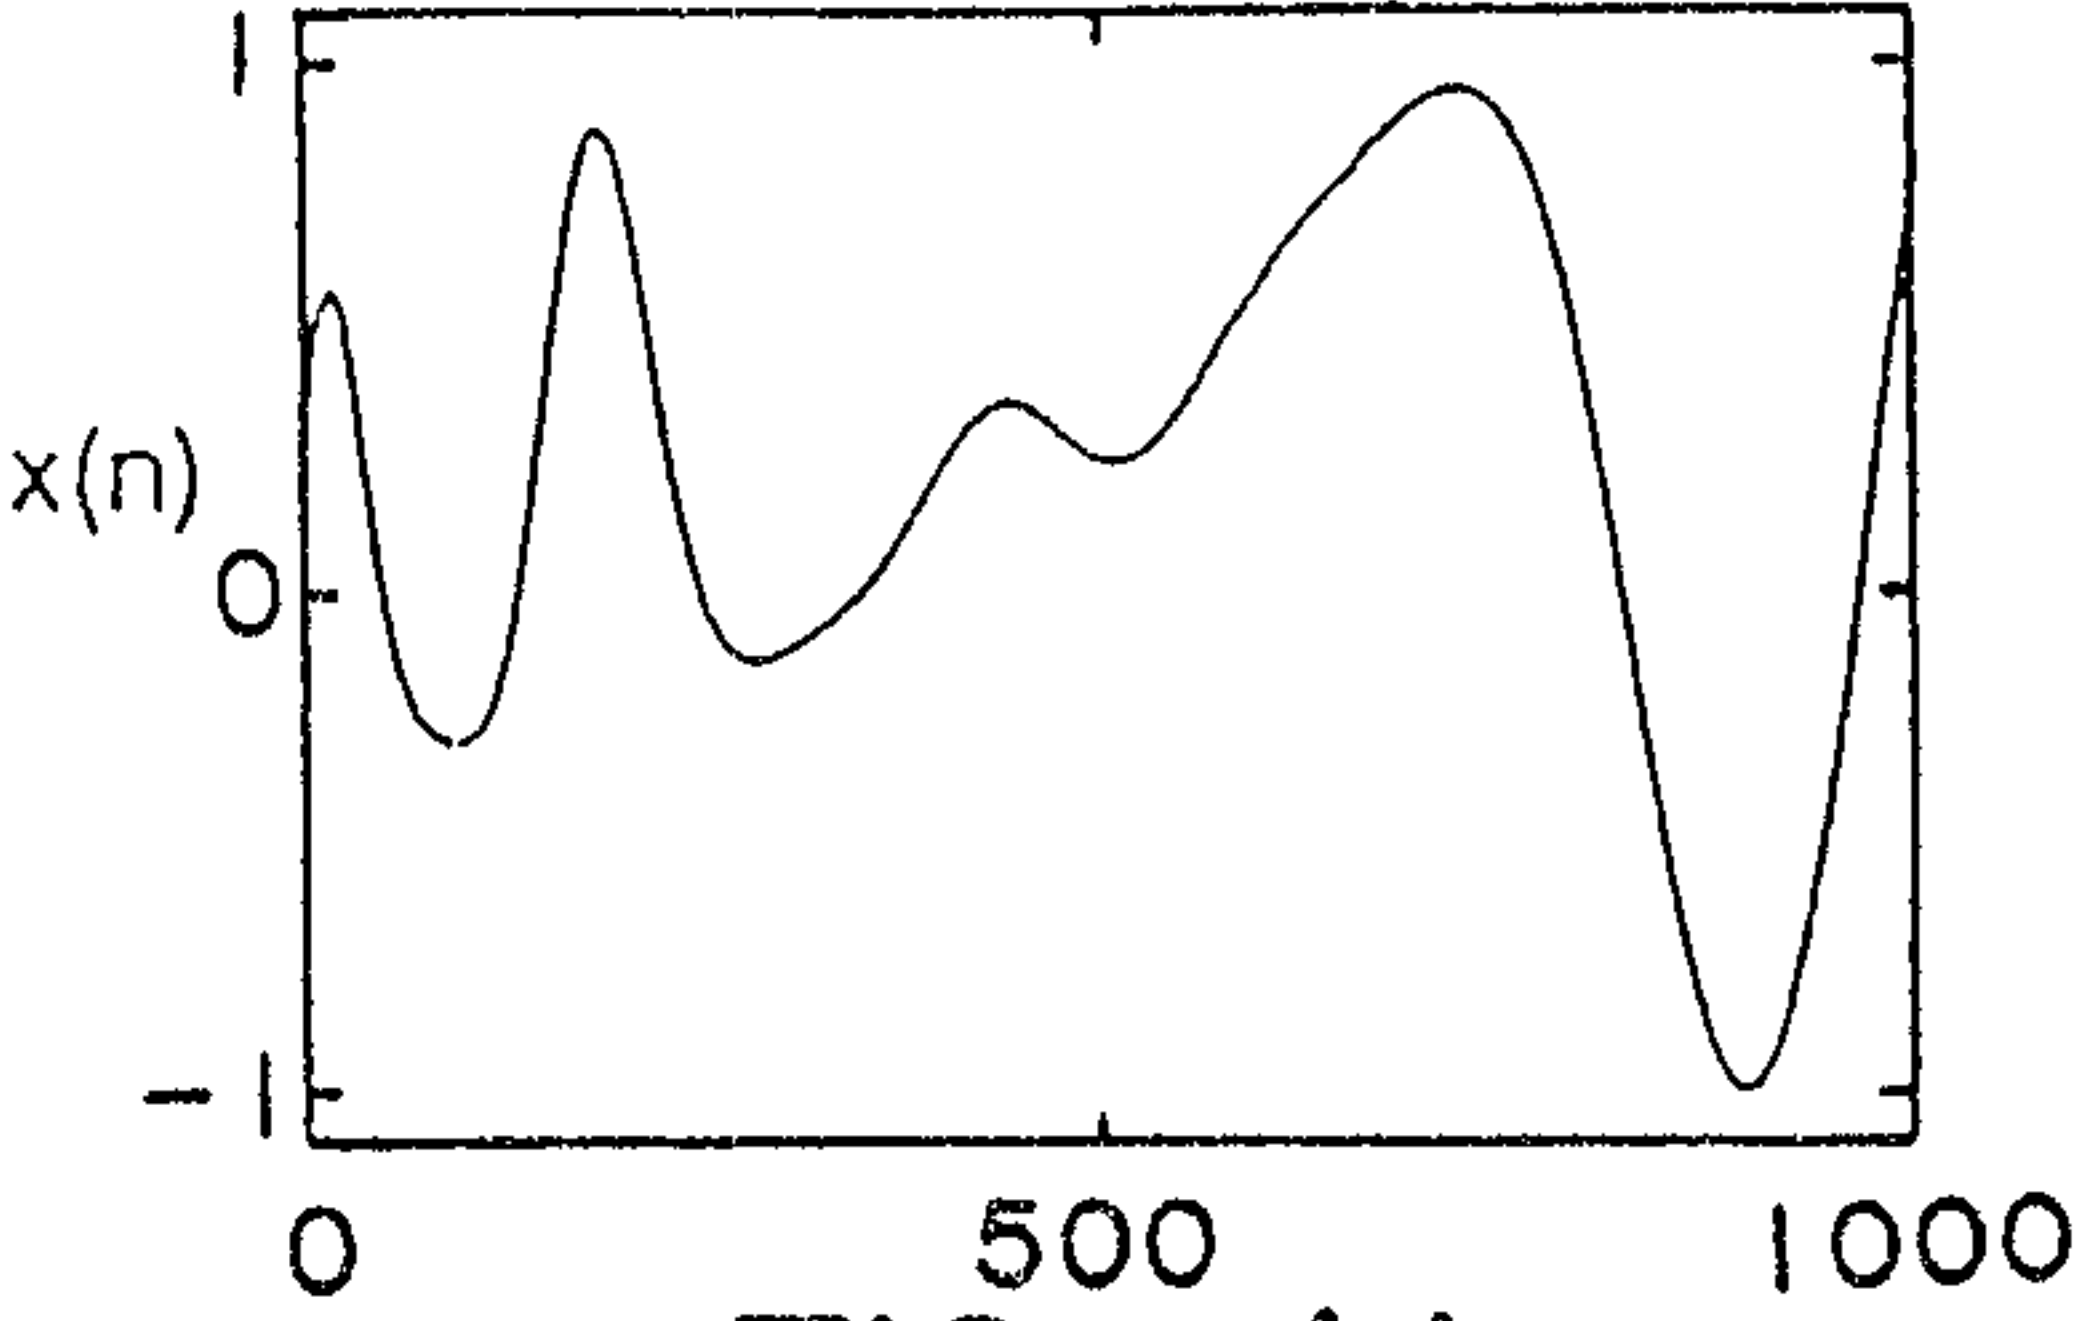


FIG. 6(b)

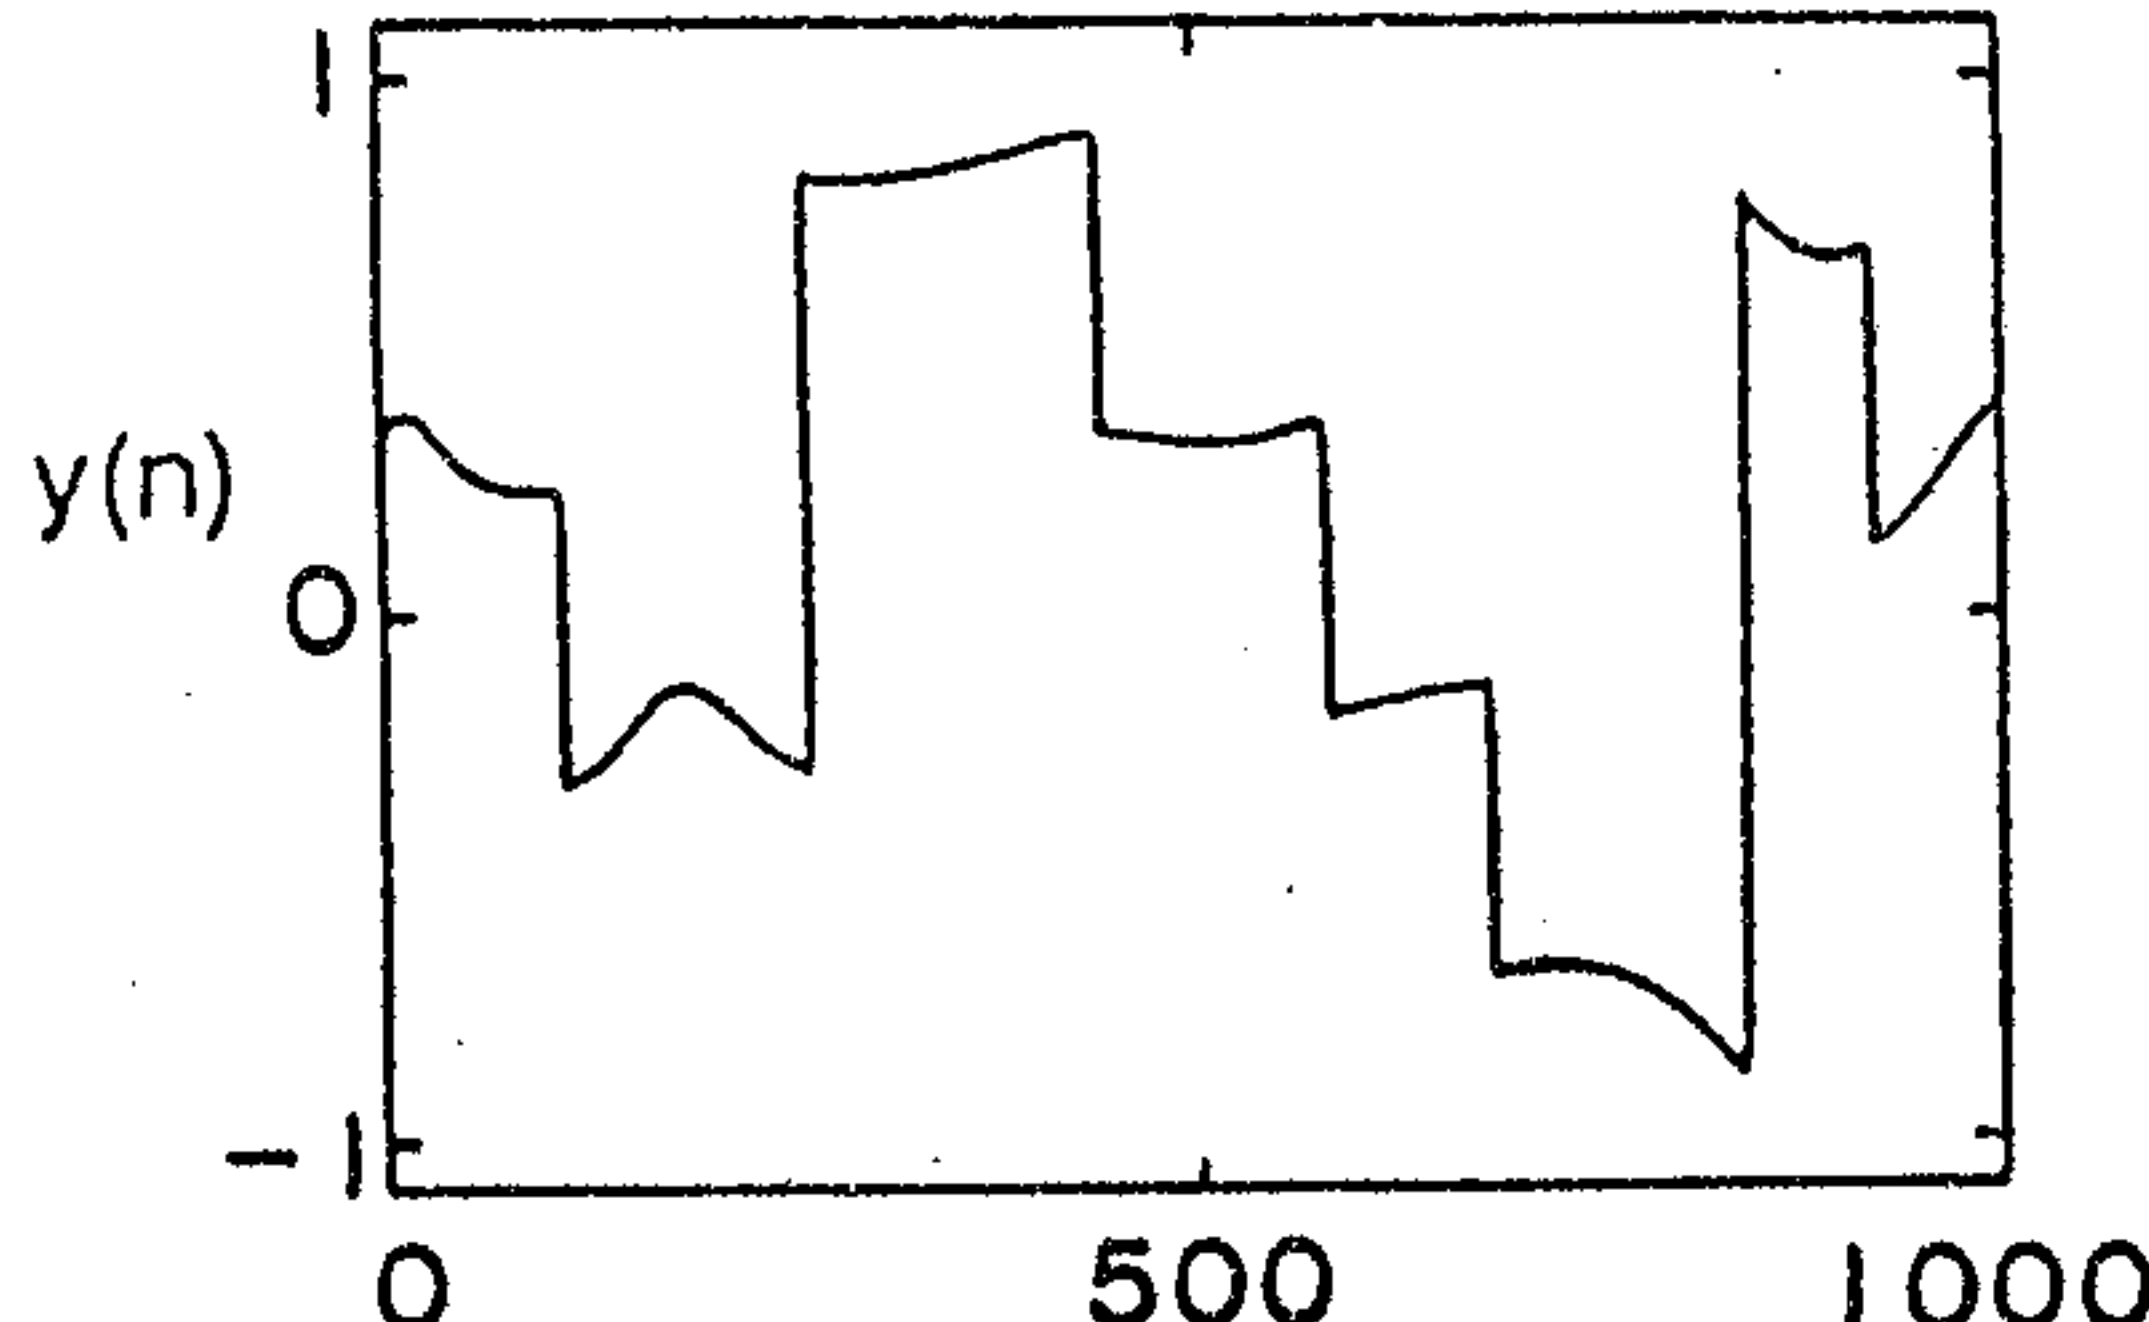


FIG. 6(c)

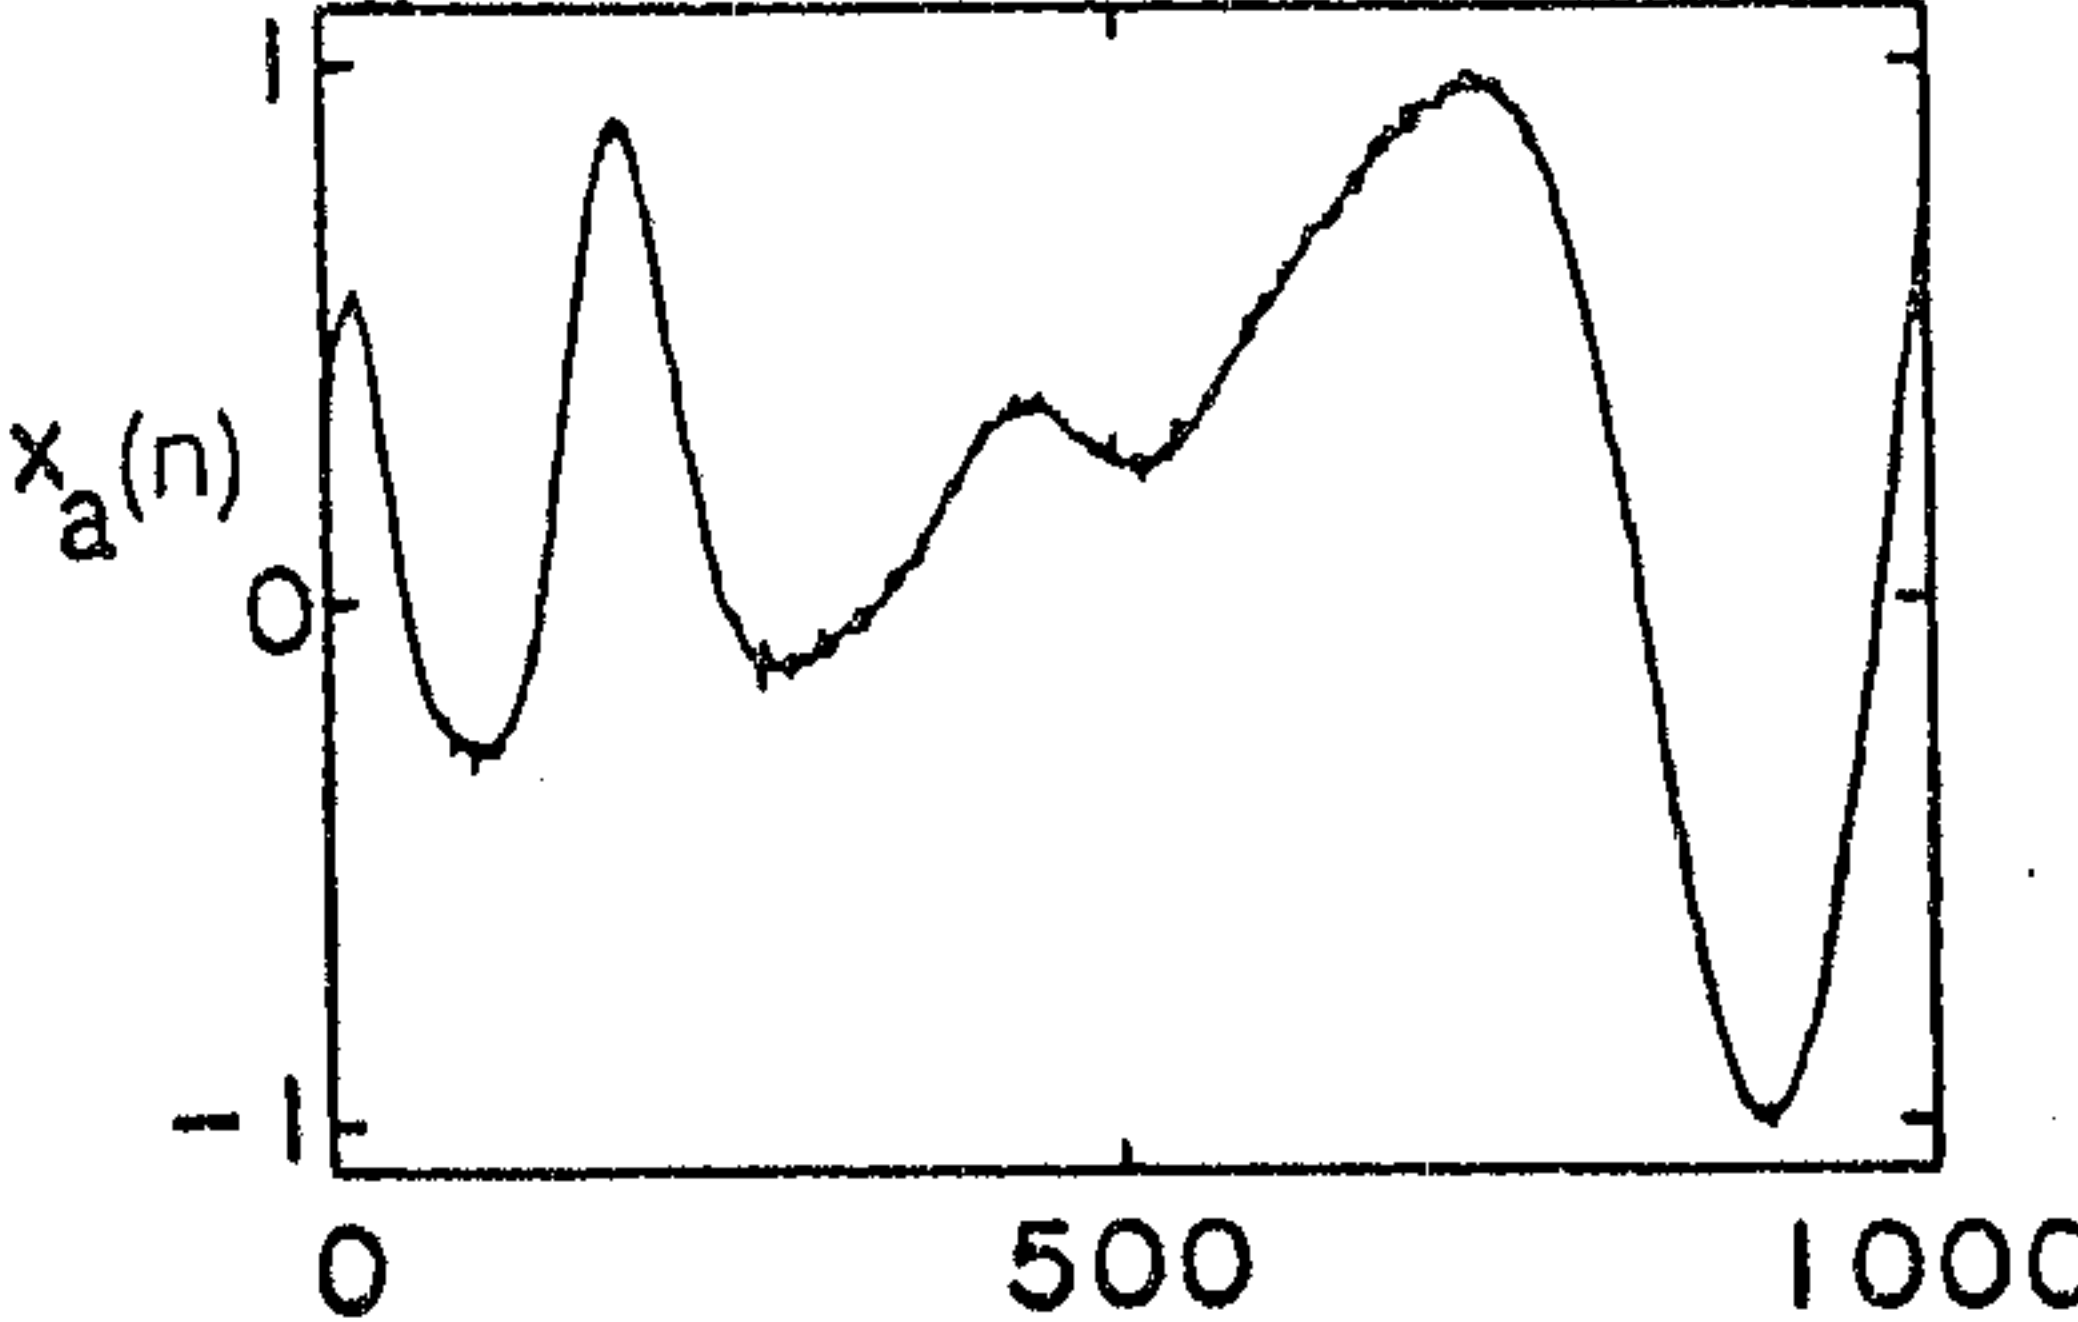


FIG. 6(d)

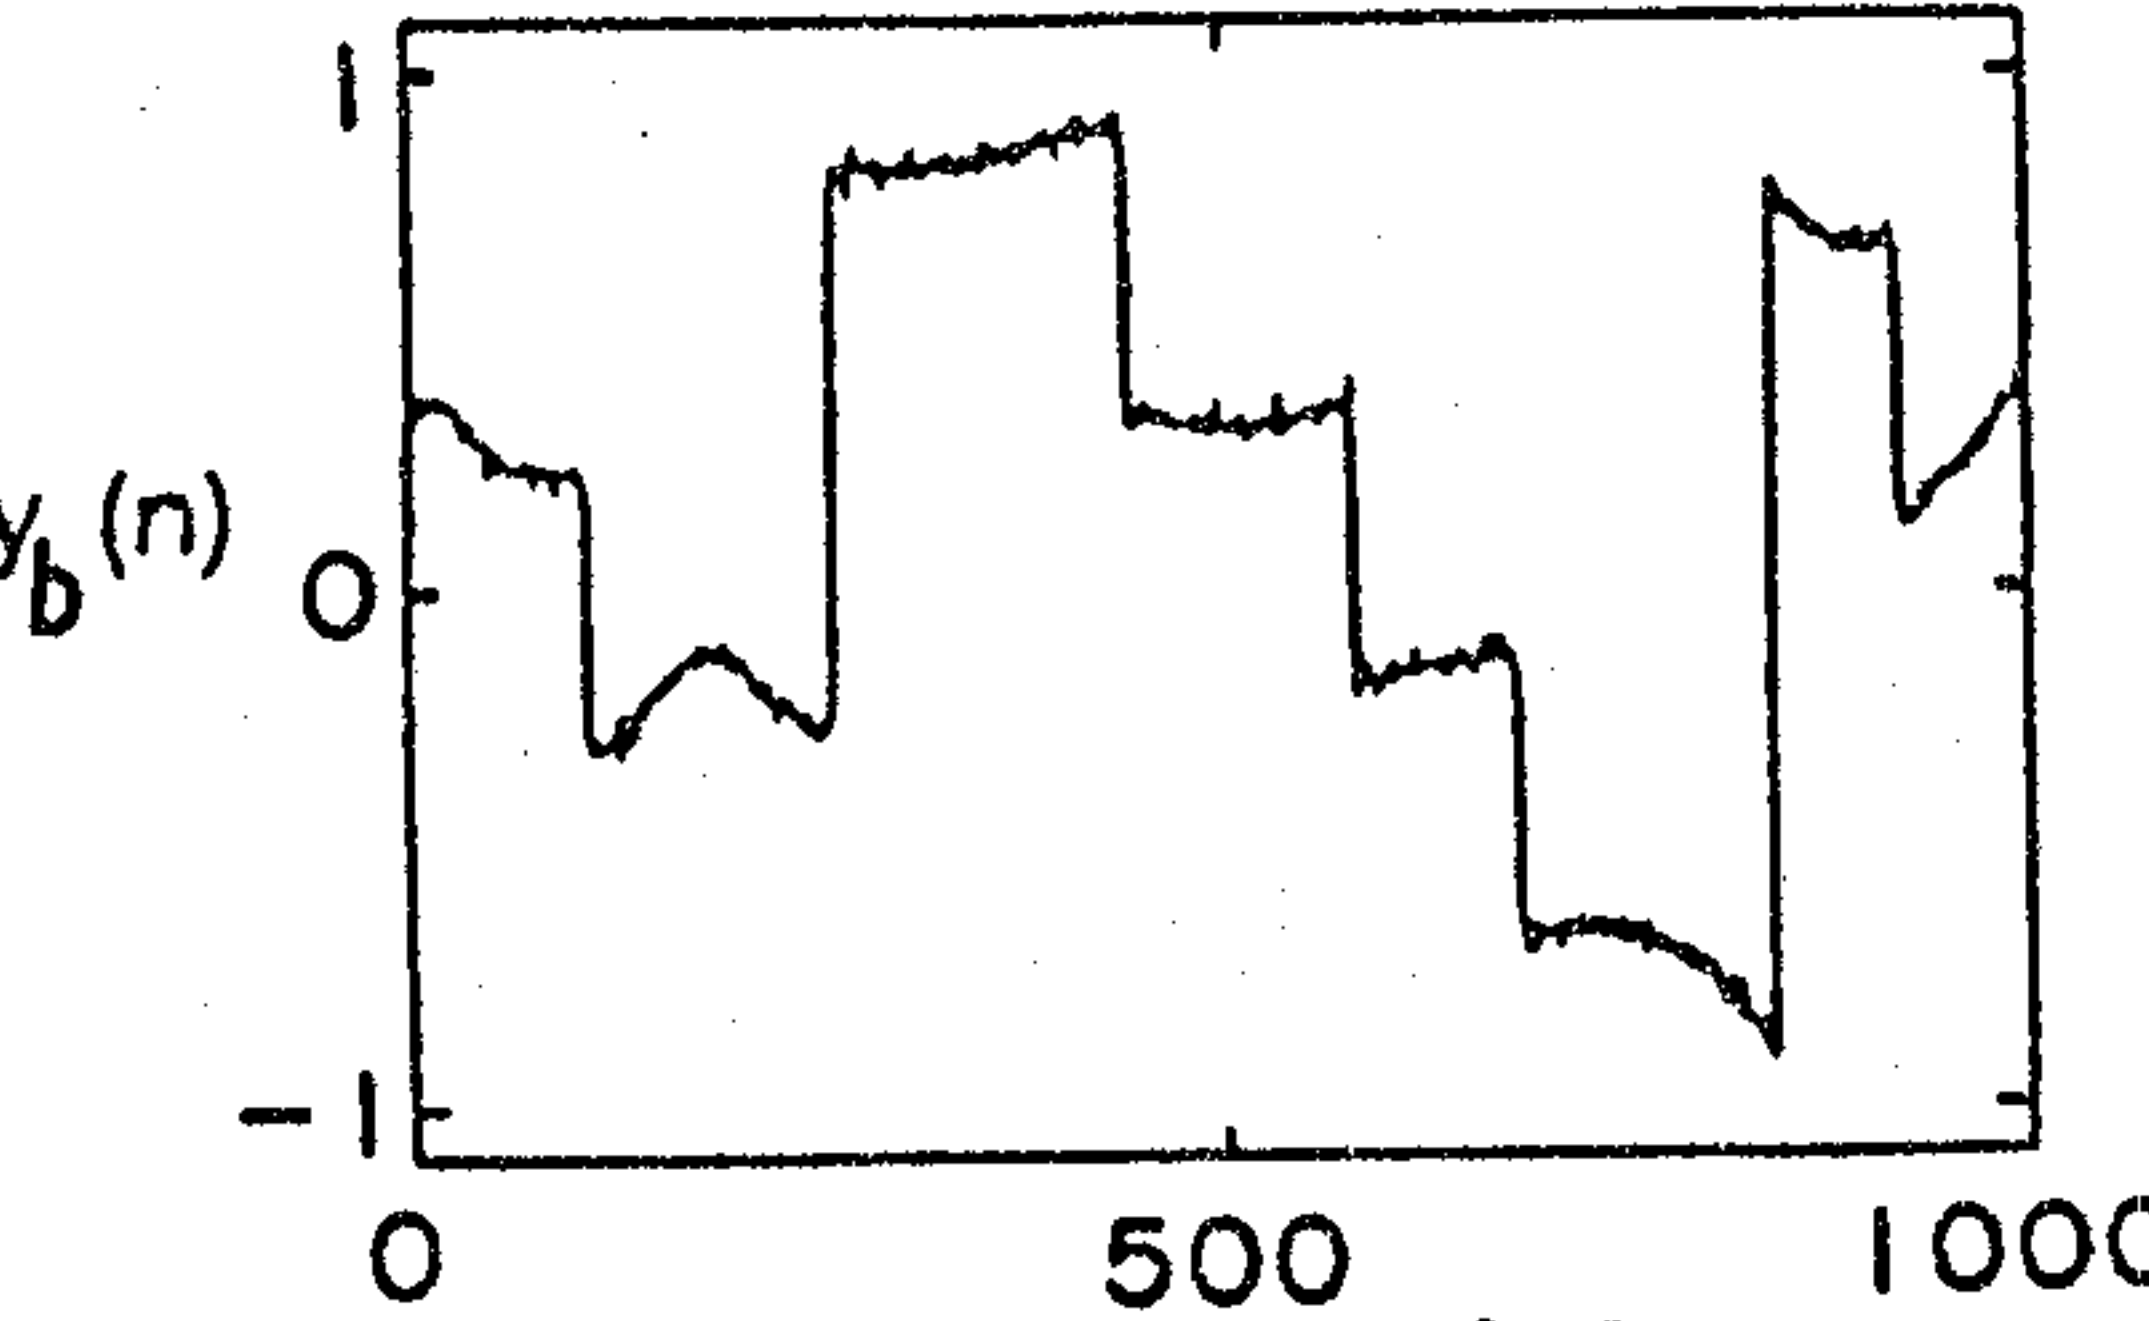


FIG. 6(e)

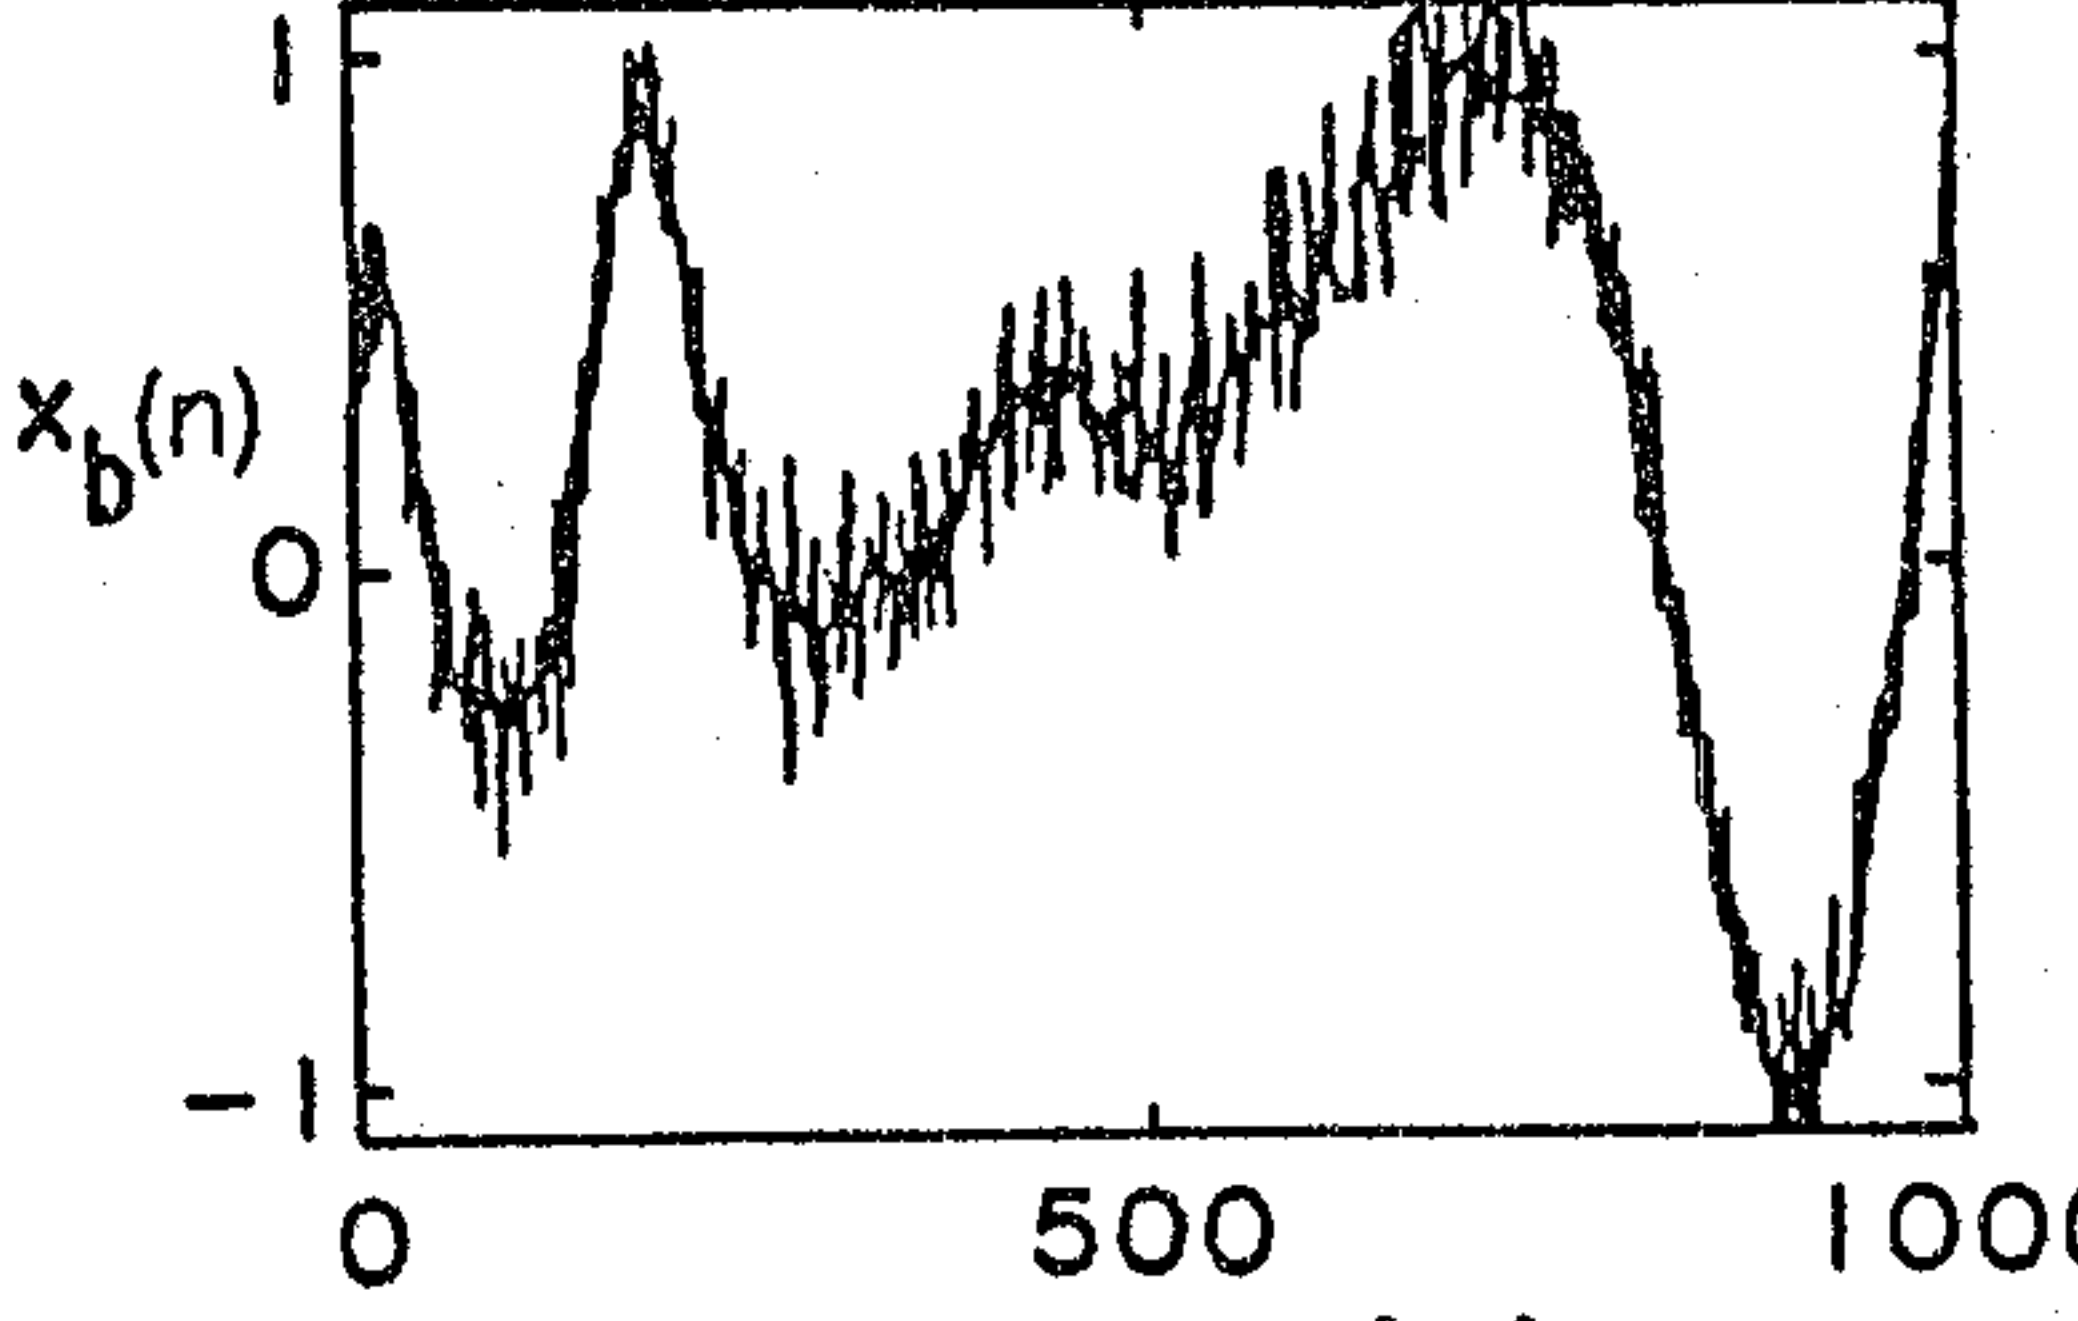


FIG. 6(g)

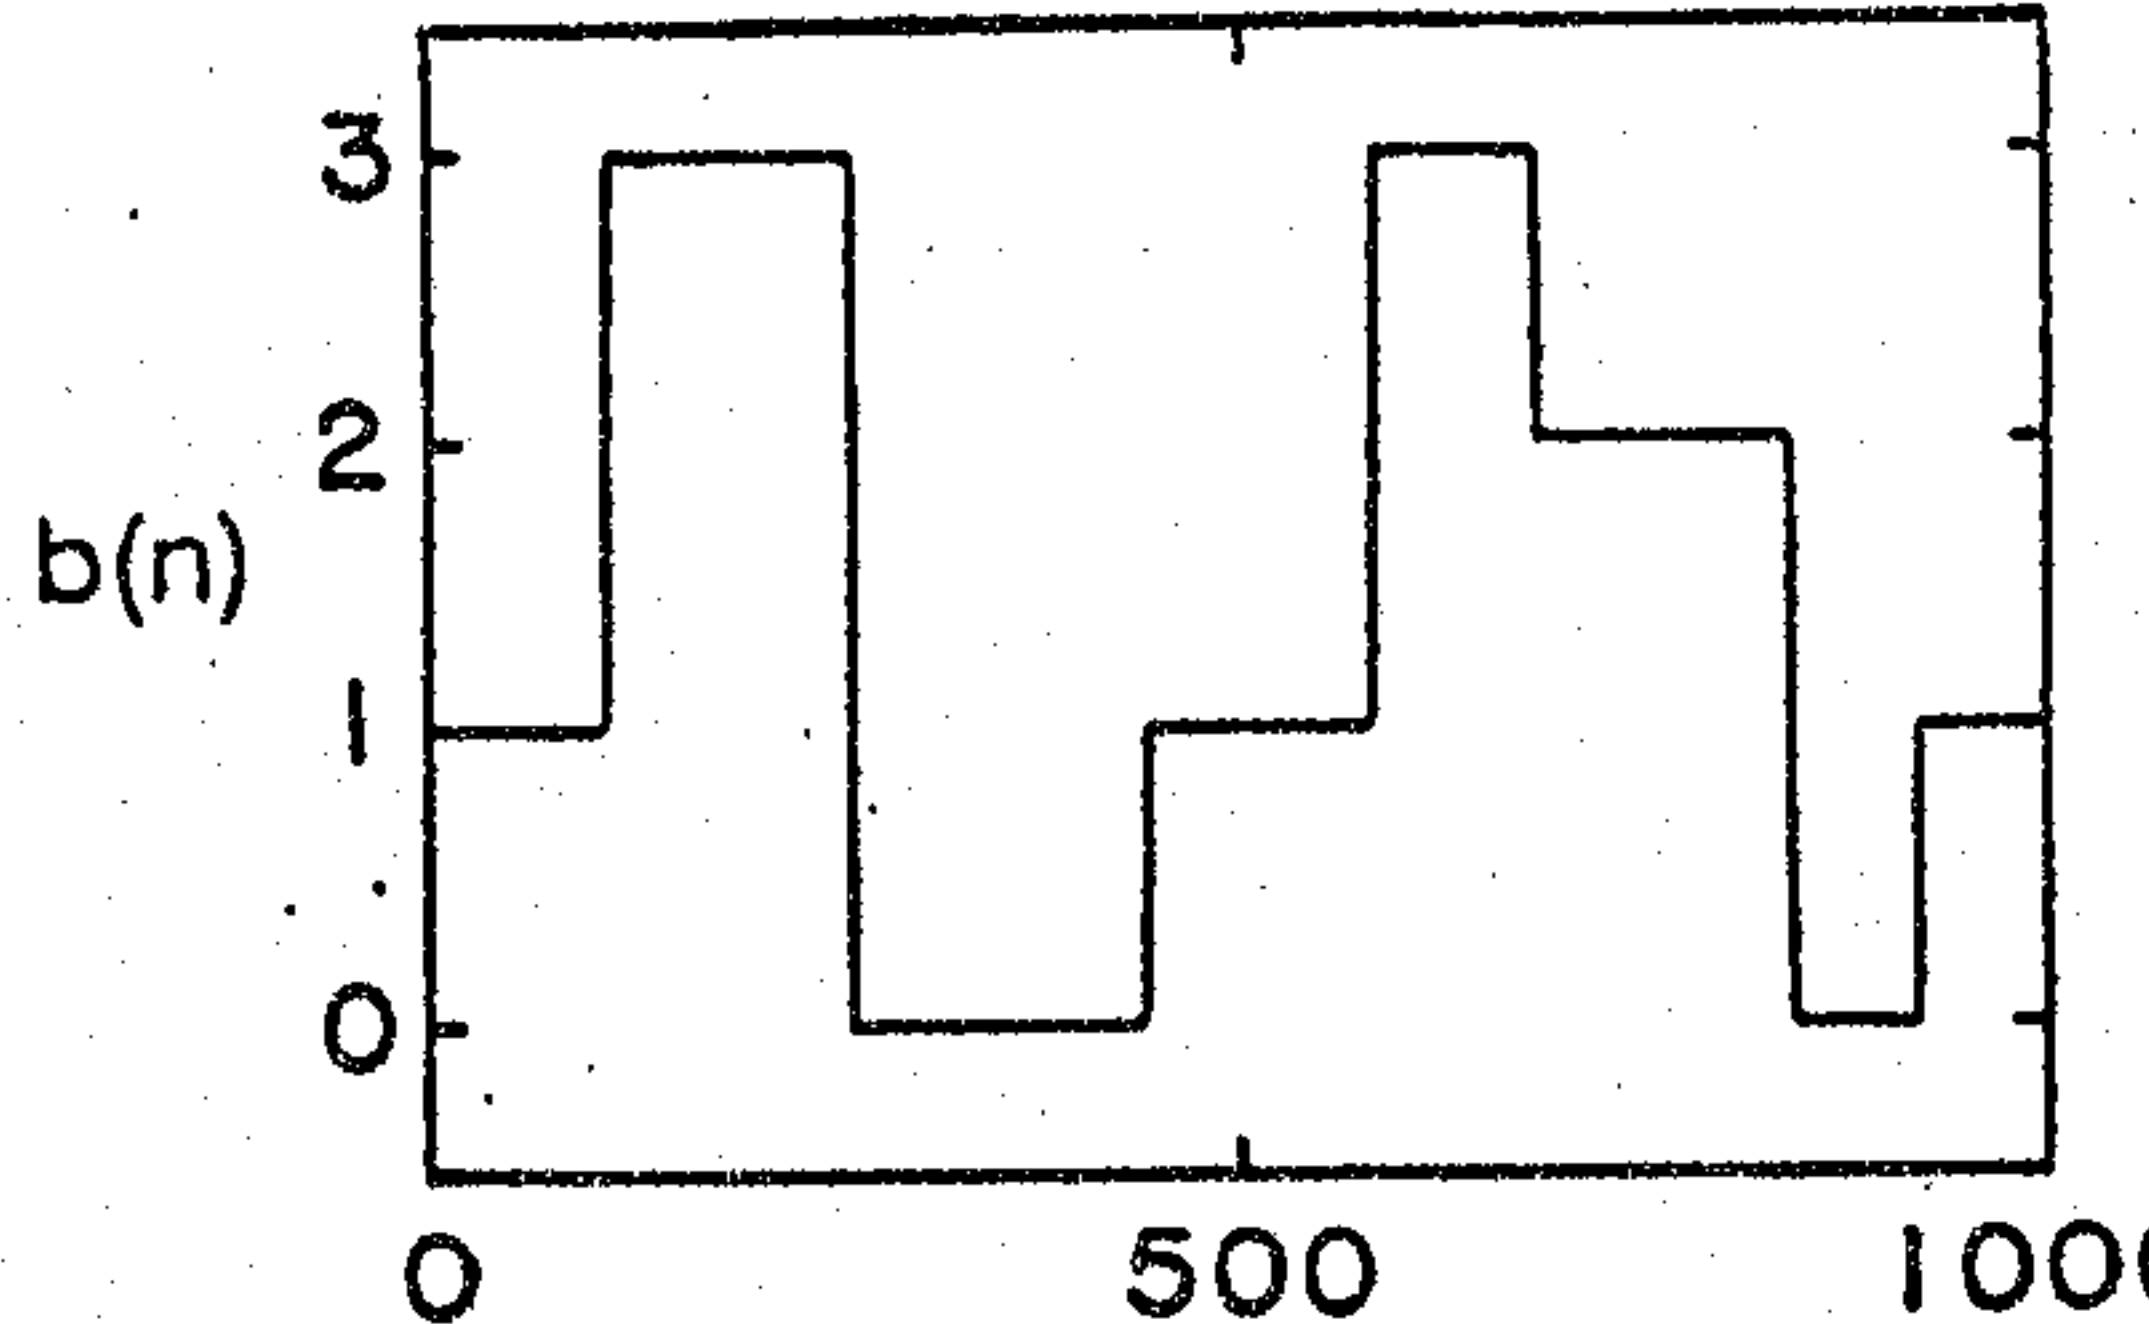


FIG. 6(f)

FIG. 7a

TRANSMITTER 20

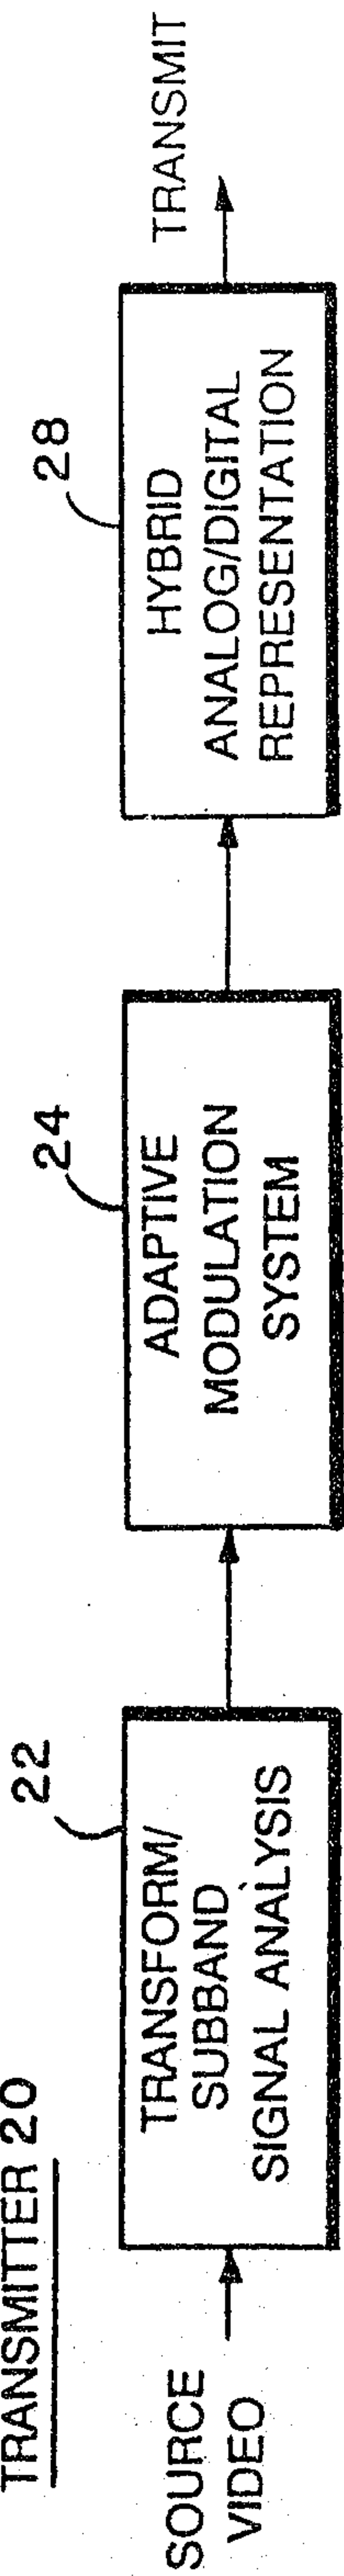


FIG. 7b

RECEIVER 120

