




EP0041979

(51) International Patent Classification ³ : H03K 19/14; G06G 9/00	A1	(11) International Publication Number: WO 81/01927 (43) International Publication Date: 9 July 1981 (09.07.81)
(21) International Application Number: PCT/AU80/00109 (22) International Filing Date: 16 December 1980 (16.12.80) (31) Priority Application Number: PE 1784 (32) Priority Date: 19 December 1979 (19.12.79) (33) Priority Country: AU (71) Applicant (for all designated States except US): COMMONWEALTH SCIENTIFIC AND INDUSTRIAL RESEARCH ORGANISATION [AU/AU]; Limestone Avenue, Campbell, A.C.T. 2601 (AU). (72) Inventor; and (75) Inventor/Applicant (for US only): COLE, Trevor, William [AU/AU]; 28 Gordon Crescent, Stanmore, N.S.W. 2048 (AU). (74) Agents: DUNCAN, Alan, David et al.; Davies & Collison, A.M.P. Building, Hobart Place, Canberra City, A.C.T. 2601 (AU).		(81) Designated States: AU, DE (European patent), FR (European patent), GB (European patent), JP, NL (European patent), US. Published With international search report

(54) Title: SIGNAL PROCESSING APPARATUS AND METHOD

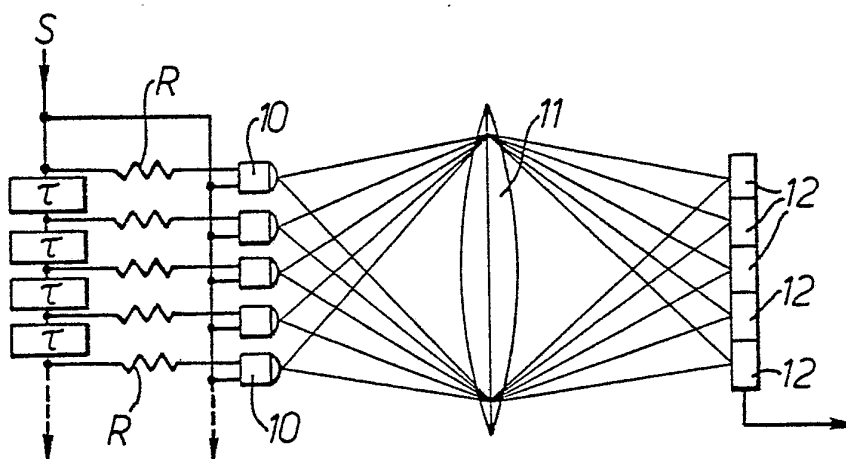

(57) Abstract

Signal processing, particularly correlation and auto-correlation, is effected using a „light panel“. The light panel consists of (a) an array of two-terminal light-emitting or light-modulating elements (10), the optical state of each element being changed from a first state to a second state when a voltage difference is applied across its terminals, and (b) a complementary array of photodiodes (12), each arranged to receive light from a respective element of the array of light-emitting or light-modulation elements (10). The interconnection between the two arrays may be simply an optical lens (11). For auto-correlation, each array may be a linear array, with the signal from a single signal source applied to the terminals of each element (10) both instantaneously and after a predetermined time delay. For cross-correlation, each element (10) will be located at a cross-over point of an $m \times n$ matrix of conductors (insulated from each other) with its terminals connected to respective conductors at the cross-over point. When the light panel is used for correlation, the photodiodes act as charge integrators. Uses of the apparatus and method include image processing, image analysis and speckle interferometry.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	KP	Democratic People's Republic of Korea
AU	Australia	LI	Liechtenstein
BR	Brazil	LU	Luxembourg
CF	Central African Republic	MC	Monaco
CG	Congo	MG	Madagascar
CH	Switzerland	MW	Malawi
CM	Cameroon	NL	Netherlands
DE	Germany, Federal Republic of	NO	Norway
DK	Denmark	RO	Romania
FI	Finland	SE	Sweden
FR	France	SN	Senegal
GA	Gabon	SU	Soviet Union
GB	United Kingdom	TD	Chad
HU	Hungary	TG	Togo
JP	Japan	US	United States of America

TITLE"SIGNAL PROCESSING APPARATUS AND METHOD"TECHNICAL FIELD

This invention concerns signal processors. In a particular application, it concerns correlators and auto-correlators which use an array of light emitting or light modulating elements operating as "EXCLUSIVE OR" or "NEGATED-EXCLUSIVE-OR" logic elements, the optical output from such an array being processed to provide correlation information.

BACKGROUND ART

The technique of one-bit digital processing is a well-accepted tool of science. For example, its implementation in radio astronomy spectroscopy was described by B.F.C. Cooper in his paper entitled "Autocorrelation Spectrometers", which was published in "Methods of Experimental Physics", Volume 12, Part B, Edited by M.L. Meeks (Academic Press, 1976), pages 289-298. Various forms of correlator have been produced for such correlation. These have up to several thousand channels and clock rates up to several tens of megahertz. Larger and faster correlators are not produced, however, for with prior art components and arrangements, the larger correlators are found to possess inherent disadvantages in timing accuracy, bulk size and power dissipation.

DISCLOSURE OF THE INVENTION

One object of the present invention is the provision of means whereby one-bit correlators can be constructed which are large, fast, and without



severe heat dissipation problems. Another objective is the provision of one-bit correlators which are simple to construct, and which can be made large in terms of number of channels, yet compact and with low power dissipation. A further objective is the provision of a new method of one-bit correlation of a plurality of pairs of quantized electrical signals.

These objectives are achieved by the construction of correlators using what has been termed by the present inventor a "light panel". The light panel is an array of light emitting or light modulating elements arranged in matrix form, operating as "EXCLUSIVE OR" ("XOR") or "NEGATED-EXCLUSIVE-OR" ("NEXOR") logic elements. The optical output from the elements of the light panel are processed by optical means, such as a complementary array of photodiodes.

According to the present invention, there is provided a signal processor characterised in that it comprises, in combination:

- (a) an array of light emitting or light modulating elements, each element being a device which changes from a first optical state to a second optical state when a voltage is applied across it, each element being adapted to receive two voltage signals, the optical state of each element at any instant being dependent on the relative values of the voltage signals; and
- (b) a complementary array of photodiodes, each photodiode being adapted to receive light from a respective one



of said light emitting or light modulating elements.

Also according to the present invention, a method of one-bit correlation of a plurality of pairs of quantized electrical signals is character-
ised in that it comprises the steps of:

(a) applying each pair of quantized signals to the two terminals of a respective element in an array of light-emitting or light-modulating elements, the optical state of the elements at any instant being dependent on the relative values of the pair of quantized signals, and

(b) observing the optical state of each light-emitting or light-modulating element in the array.

In both the processor of the present invention and the correlation method, each light emitting or light modulating element may conveniently be a light emitting diode device and series resistor combination, a neon-discharge or other plasma-discharge lamp (preferably with a series current-limiting capacitor or resistor), a liquid crystal, a deuterated potassium di-hydrogen phosphate (DKDP) or other Pockel's effect device, a vacuum fluorescent device, an electroluminescent device, or any other suitable device having the appropriate properties.

In a special case, the array of light emitting or light modulating elements is a linear array (or any shape, including angular). In such an array, if one of the signals applied to the elements is common and the other signals are the outputs of shift registers or delay lines to which the common signal source has also been connected, an autocorrelator is formed.



In another form, the present invention will provide large one-bit correlators. In this case, the light emitting or light modulating elements of the array will be located at the cross-over points of a matrix formed by a plurality of linear electrical conductors, each conductor being insulated from each other conductor, the elements being connected across the conductors at the respective cross-over points.

The electrical conductors of such a light panel need not be formed as a rectangular matrix (though in practice this will often be the case), but can be formed in any required configuration. For example, for a particular correlation, it may be convenient to form the matrix in a configuration which is representative of a polar diagram, or the spatial frequency plane of a circular array of receiving aerials (such as the solar radioheliograph described by N.R. Labrum, D.J. McLean and J.P. Wild in "Methods of Computational Physics" Volume 14, page 1, 1975).

A feature which will commonly be present in correlators constructed in accordance with the present invention, is means to focus the emitted or modulated light signals from the elements of the array on to respective photodiodes in the complementary array of photodiodes.

The correlation method of the present invention may also be extended to observing the optical state of each element of the array of light-emitting or light-modulating elements by focusing the light emitted or modulated by the elements of the array on to a complementary array of photodiodes.

The outputs from the photodiodes may be displayed or processed in any convenient manner.

-5-

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

5

Figure 1 is a diagram of a linear array of light-emitting diodes (a "light panel") imaged on



to a linear array of photodiodes, and connected for autocorrelation of a one-bit quantized signal;

Figure 2 illustrates the steps usually adopted in one-bit quantization of an analogue signal;

Figure 3 is a diagram of a light panel construction for a complete one-bit autocorrelator with facilities for indication of true "XOR" logic signals and the correlation or the anti-correlation function;

Figure 4 illustrates the construction of a light panel for a one-bit cross-correlator in which four input signals are compared with each of ten other input signals; and

Figure 5 is a diagram of a light panel for an $m \times n$ correlator, with choice of correlation or anti-correlation.

MODES OF CARRYING OUT THE INVENTION

It is well-known that a light emitting diode device (LED) emits light when a potential difference of the correct polarity is applied across it. Other devices exhibit a similar property. It has not previously been appreciated that if binary digital signals of logic state 1 and 0 are applied to the LED, the LED will flash whenever the logic states on the two sides are different and of the correct polarity. Thus the LED performs a logical EXCLUSIVE-OR (XOR) operation on the two signals. Due to the unidirectional properties of a LED, the true XOR signal is obtained when each pair of signals is applied twice to the LED during the time for which the signals are sampled, the second time with the signal polarity reversed. If (a) a series resistor is used to limit the current through the LED and (b) the binary digital signals are arranged

to be either a constant voltage or zero
(corresponding to logic states 1 and 0) and are
applied for a constant sample time, then the mean
light level from the LED is an accurate measure
of the number of times the logic states of the two
signals are anti-coincident. The present
invention utilises this property of LEDS (and other
devices), as will be seen.

Referring now to Figure 1, a linear array of
light emitting diodes 10 is located so that the
light output of each diode is focused by lens 11 on
to a corresponding photodiode in a complementary
linear array of photodiodes 12. One terminal of
each LED 10 is connected to an incoming quantized
signal S. The other terminals of the LEDs 10 are
connected through respective limiting resistors R
to the signal S after it has been delayed by a time
which is a multiple of " τ ". If " τ " is the time
separation of the successive samples of an
electrical signal which produce the quantized
signal S, each LED 10 compares the signal S with
the signal S that existed an integral number of
sample periods previously. Each LED thus performs
an autocorrelation function, and flashes if there
is anti-correlation at the respective delay period
(and if the polarity is correct to cause it to
flash). To indicate correlation (that is, the
logical NEXOR function), all that is necessary is
for the logical inverse of the signal S to be
applied to the common LED terminals.

As already noted, the light flashes from
each LED 10 are focused by lens 11 on to respective
photodiodes 12. Typical commercially available
photodiodes saturate at about 10^7 photoelectrons
per diode. The photodiode integrates received



photoelectrons until saturation is reached.

Choosing the operating conditions to be such that the photodiodes 12 generate about 10 electrons each time the LED 10 flashes for the duration of one sample interval, any photodiode 12 in the array can receive photoelectrons from about 10^6 flashes before it saturates. Thus the photodiode array read-out is required at every 10^6 sample periods or sooner.

Those skilled in this art will recognise that each LED and photodiode combination is equivalent to one NEXOR circuit plus 20 stages of binary counter (10^6 is approximately 2^{20}). Such skilled persons will also be aware that read-out of photodiode arrays which have been constructed for solid state TV displays can be effected at rates of less than 1 microsecond per photodiode. Thus a 10,000 element photodiode array, requiring 10 milliseconds to read out, can be used with an equivalent array of LEDs receiving digital one-bit binary signals, provided that the frequency of the binary digital signals does not exceed about 100 MHz.

A typical derivation of the quantized signal S is illustrated in Figure 2. In Figure 2, an analogue electrical signal is shown at (a). It is sampled at the instants shown in (b), separated by a uniform clock period. The output (quantized) signal shown at (c) is a positive value (typically +5 volts for an LED array) when the analogue signal is positive, and is zero when the analogue signal is zero or negative at the moment of sampling. Thus the signal S is a string of equal duration samples of 0 or +5 volts (assuming the light panel comprises an LED array).

A light panel for a complete autocorrelation

system is shown in Figure 3. This arrangement overcomes the polarity limitation and enables both correlation and anti-correlation to be measured. A logic inverting gate 31 is connected into the common signal supply to the LEDs 10 to enable the inverse of the binary signal S to be applied to the LEDs 10. Switch 33 permits either correlation or anti-correlation to be displayed by the flash of an LED 10. Switch 33 also permits any inherent offset in the correlator, and any drift in the photodiode array, to be compensated, if the switch is operated so that correlation or anti-correlation is indicated for the other half of the period of measurement. Those skilled in this art will be well aware that for the normalised one-bit situation, anti-correlation is simply $1 - (\text{correlation})$, so that equal time spent measuring both allows their difference to be formed. It is, of course, assumed that the signal being analysed remains the same throughout the period of measurement.

Polarity reversal of the signals applied to the LEDs 10 in the arrangement of Figure 3 is achieved by the combination of logic inverting gates 32 and 35 with their respective associated switches 34 and 36. Switches 34 and 36 are synchronised, and each either (a) operate at twice the sample frequency to provide a polarity reversal after half the sample period, or (b) operate at the clock rate but with a quarter cycle phase adjustment.

It will be clear that with an associated photodiode array, linked as shown in Figure 1, a light panel constructed as shown in Figure 3 can produce an autocorrelator in which

- (a) true XOR functions for either correlation or anti-correlation can be obtained, by



-10-

setting switch 33 to one position and operating switches 34 and 36 to effect polarity reversals half-way through each sample period, and

- 5 (b) drift and offset effects in the photodiode array can be compensated by choosing one setting for switch 33 and performing autocorrelation for half the total measurement time, then repeating
10 the autocorrelation with the switch 33 in its other setting, and differencing the two measurements of autocorrelation.

The light panel illustrated in Figure 4 is designed for use in a one-bit cross-correlator in
15 which the binary quantized signals from four sources are compared with the binary quantized signals from ten other sources. One example of the sort of situation in which this form of cross-correlation would be used is in radio-astronomy,
20 when the signals received by the aerials on one arm of a T-shaped array are compared with the signals received by the aerials in the other arm of the array.

The upper part of Figure 4 illustrates the way in which signals from sources A, B, C and D
25 are applied to one terminal of a 4 x 10 array of photodiodes 40, each with its associated series resistor 41, and signals from sources 0, 1, 2 ..., 9 are applied to the other terminals of the array.
30 The lower part of Figure 4 illustrates one physical form of the array of photodiodes 40, and their connection to the respective signal sources through a matrix formed of linear electrical conductors 42, 43. This form of light panel, in association with
35 a 4 x 10 array of photodiodes, linked by an optical



-11-

connection as shown in Figure 1, will provide a one-bit digital cross-correlator with the output from the photodiodes indicating the correlation or anti-correlation of the compared signals at each cross-over of the matrix of conductors 42, 43.

A light panel for an $m \times n$ cross-correlator is illustrated in Figure 5. From the description above of the embodiment of Figure 3, it will be clear that a cross-correlator incorporating the panel of Figure 5 will

- (a) be able to provide an indication of either correlation or anti-correlation by selection of the settings of the m linked switches 53, to enable offset and drift in the photodiode array to be compensated; and
- (b) provide true XOR function outputs if linked switches 54 and 56 are operated at twice the sample frequency of the signals being analysed, or at the sample frequency but with a quarter cycle phase difference.

References 51, 52 and 55 are to logic inverting gates. Note that drivers 57 and 58 are required for each row and column in the matrix of conductors, which have a LED/resistor combination 50 connected across each cross-over point.

In each of these embodiments, the read-out from the photodiode array can be displayed or processed by any suitable means, or stored for future processing. It is expected that the output of the photodiode arrays of correlators constructed in accordance with the present invention, if the array contains a substantial number of elements, will be interfaced to a computer for analysis purposes.



-12-

To test the present invention, an array of 128 light emitting diodes was wired as an autocorrelator and imaged on to a 128-element photodiode array. Square waves of different frequencies were used as input signals. The arrangement performed as a 128 point autocorrelator.

In another test of the present invention, a 128 element, 16 x 8 matrix array of LEDs was wired as a cross-correlator in accordance with the arrangement illustrated in Figure 5. This light panel was used to process the signals that would be obtained from a T-shaped array of receiving aerials forming a radio telescope, with 16 aerials in the long arm and 8 aerials in the short arm. The outputs of the LEDs were imaged on to a photographic film for the periods of measurement. The film, when developed, showed clearly the integrated signal from each LED in the light panel, and faithfully reproduced the spatial frequency fringe pattern received by the array of aerials.

A 64 x 64 matrix array of LEDs has also been constructed in accordance with the arrangement of Figure 5. This has functioned effectively as a 64 x 64 (=4096) channel correlator.

Earlier in this specification, reference was made to alternatives to the LED/resistor combination for the light panels. One of the alternatives mentioned was a neon discharge lamp. Panels incorporating neon lamps at the cross-overs of the matrix of conductors are easy to fabricate and have the advantage that the neon lamp flashes when the potential difference across its terminals is sufficient, irrespective of polarity. However, the required voltage difference is generally between 100 and 200 volts. Series current limiting



resistors or charge limiting capacitors would be needed at each neon lamp location for fully parallel operation.

5 Another alternative to the LED array is a liquid crystal sheet with a lamp located behind it. With a sheet of liquid crystal material, electrodes can be inserted at appropriate locations and wired up as indicated for the LED light panels, and when there is a voltage difference between the two
10 adjacent electrodes, the material between the electrodes changes from black to clear, so that light from the lamp is transmitted through the sheet at that location. The regions of liquid crystal material between each pair of electrodes
15 thus becomes a light modulating element. The light flash obtained when a region of liquid crystal material becomes transparent can be focused on to a photodiode as in the case of the LED array light panel to form a correlator. There is no requirement for a series
20 resistor with this alternative, for the liquid crystal material is voltage sensitive.

A variation of the liquid crystal alternative is the use of single crystals of a material which exhibits the longitudinal Pockels effect. One
25 example of this is single crystal DKDP (deuterated potassium di-hydrogen phosphate). Again the panel element will be opaque or transparent at the cross-over locations, according to the voltage states at the ends of the crystal. Again, no series resistor
30 is required.

Some variations in the use of correlators incorporating the light panel will now be described.

Quantization of an analogue signal for one-bit correlation necessarily introduces a distortion to
35 the correlation function (which can subsequently be



-14-

corrected) and a sensitivity loss. The sensitivity loss can be recovered, at least in part, by correlating samples which have two-, three- or many-bit representation, by applying to the one-bit quantized signal a modulation which limits the time it is applied to a fraction of the sample time which is proportional to the analogue signal levels. That is, the quantized one-bit signal is pulse width modulated. In fact, an analogue signal can be correlated without loss of sensitivity if pulse width modulation is used to impose the analogue modulation to the columns of a rectangular matrix array, and direct current or voltage modulation is applied to the rows. Those skilled in this art will recognise that further complexities of current modulation of rows and pulse width modulation of columns can be used to achieve analogue/analogue cross-correlation.

INDUSTRIAL APPLICABILITY

One large application of correlation in science is to correlate flashes of light represented by the logic state "1". This application differs from the above description in that the logical AND function is required. To illustrate an AND function in the light panels illustrated in Figures 1, 3, 4 and 5, an LED in the panel must flash whenever the logical state 1 appears on both of its inputs. This is easily obtained. Indeed, it results in a simplification of the panels illustrated in Figures 3 and 5, for the necessary modification is the removal of the polarity reversing gates and switches.

It is also possible to perform spatial autocorrelation of a black-and-white picture using the present invention with the light panels modified to display an AND logic event, as described



-15-

in the last preceding paragraph. Spatial autocorrelation is often useful in image processing, image analysis, and speckle interferometry in astronomy. The autocorrelation of a picture measures the number of times bright picture points have the same separation and orientation. The result is a distribution of separations and orientations with the value at each point the number of times that one occurred in the given picture. The image to be processed is read out by a TV type of camera as a series of lines across the image. If the picture is black, the output is "0"; if the picture is white, the output is "1". A gap equal to one line time must be present between reading successive lines and a gap equal to one frame time must be present between reading successive frames. The light panel is then used to take the temporal autocorrelation of the one-bit signal. Bright picture points of a given separation and orientation always have the same gap in time on the signal and all separations and orientations have a unique gap or delay. The autocorrelation therefore contains all the information required. If the array of LEDs (or other elements) in the light panel of the correlator is made with each row containing as many elements as two line times (i.e. one line plus its gap), then the true two-dimensional distribution is displayed directly. The light panel, unlike other approaches to autocorrelation of a picture, can perform the calculation at video rates of many megahertz or full picture frames at 100 frames per second or more.

Another application of the correlators and the method of the present invention is to the



-16-

direct spectral analysis of a temporal signal.
The cosine spectrum of a signal $V(t)$ which varies with time is given by the relationship:

$$\frac{1}{T} \int_0^T V(t) \cos (wt) dt$$

5 That is, it is the average of the product of the
signal and a cosine of frequency w for different
values of w . If a light which varies in intensity
as $\cos wt$ is modulated (multiplied) by $V(t)$, as a
function of time, then the mean light output is
10 one component of the spectrum. The light panel of
the present invention offers a unique way of
obtaining the complete spectrum simultaneously.
The required information is obtained using a
correlator having a light panel in which all the
15 light emitting elements vary in output of photons
as $\cos wt$, but each light emitting element has its
own unique value for w . Then $V(t)$ modulates the
light from the entire panel (by pulse width, or
voltage, or current modulation approaches, or by
20 overall shutter) and a complementary photodiode
array measures the mean light level (plus a fixed
light offset) of each element of the light panel.
Precisely this arrangement is obtained if a light
panel of a correlator constructed in accordance
25 with the present invention is wired to perform
autocorrelation of a time signal having a frequency
which is sweeping linearly with time. Then at each
delay, two frequencies are compared. They beat



-17-

together at the light point to produce a $\cos(\Delta w)t$ variation. Note that Δw is proportional to delay for autocorrelation.

5 The main complication with such an
arrangement is that for one-bit signals, a
triangular rather than cosine variation of
frequency w is obtained. One-bit times analogue
or other approaches (see above) can be used to
10 provide more exact spectra, or deconvolution can
be used to convert the triangular derived spectrum.

 Yet another example of the use of
correlators constructed in accordance with the
present invention is in the direct spatial
frequency analysis of a two-dimensional picture.
15 This further application is possible when
autocorrelation is taken of the sweeping signal on
a light panel organized in two dimensions, as for
the spatial correlation application. The
autocorrelation of a cosine wave is also a cosine
20 wave and when the autocorrelation is folded into
the raster pattern of a two dimensional panel, it
appears as a spatial wave distribution of light of
some orientation and wavelength. A different
frequency gives an autocorrelation which appears as
25 a different spatial frequency. Indeed, if the
incoming signal to a light panel wired as an
autocorrelator is swept in frequency, the light
panel appears to sweep through all the possible
spatial frequencies, and thus to scan through all
30 spatial frequencies sequentially. If a transparency
is placed on the panel, then the scene of the
transparency is modulated (multiplied) by the
spatial frequency. The total light transmitted
through the transparency is then proportional to
35 that spatial frequency content of the



transparency's scene. Only a single light
detector (photodiode) is required in this
application. As the input signal sweeps, the
single photodiode output is a scan through all
5 spatial frequency components. If the output is
appropriately scanned over a screen, then the
true two dimensional spatial frequency spectrum
of the scan can be directly displayed. It
should be noted that any offset levels can be
10 simply cancelled by subtraction, and that the
sine wave spectrum is available by simple additions
to the autocorrelator.

These examples of the use of the present
invention are not exhaustive.



CLAIMS

1. Processing apparatus, characterised in that it comprises, in combination:
 - (a) an array of light emitting or light modulating elements (10), each element (10) being a device which changes from a first optical state to a second optical state when a voltage is applied across it, each element (10) being adapted to receive two voltage signals, the optical state of each element (10) at any instant being dependent on the relative values of the voltage signals; and
 - (b) a complementary array of photodiodes (12), each photodiode being adapted to receive light from a respective one of said light emitting or light modulating elements (10).
2. Apparatus as defined in claim 1, in which each light-emitting or light-modulating element (10) is selected from the group comprising:
 - (a) a light-emitting diode device;
 - (b) a neon-discharge or other plasma-discharge lamp;
 - (c) a liquid crystal;
 - (d) a deuterated di-hydrogen phosphate or other Pockel's effect device;
 - (e) a vacuum fluorescent device; and
 - (f) an electroluminescent device.
3. Apparatus as defined in claim 1 or claim 2, further characterised in that the output of each light-emitting or light-modulating element (10) is focused by optical means on to its associated photodiode (12).
4. An auto-correlator comprising apparatus as defined in any preceding claim, further characterised in that
 - (a) said array of elements (10) is a linear array;
 - (b) one of the voltage signals applied to each element (10) of the linear array is a common



voltage signal (S) from a single signal source; and

- (c) the other voltage signal applied to the elements (10) is said signal (S) from a single signal source after delay thereof by a respective integral number of time delays (τ).

5. A correlator comprising apparatus as defined in any one of claims 1 to 3, further characterised in that

- (a) said array of elements (10) is a rectangular $m \times n$ array, each element (10) being located at the cross-over point of an $m \times n$ matrix formed by a plurality of linear electrical conductors, each said conductor being insulated from each other conductor in the matrix; and
- (b) each of said elements (10) has two input terminals each of which is connected to a respective one of said conductors at the cross-over point where the element (10) is located;

where m and n are positive integers greater than unity.


6. A correlator comprising apparatus as defined in any one of claims 1 to 3, further characterised in that the array of elements (10) is a non-rectangular matrix, each element (10) being located at the cross-over point of a matrix of electrical conductors, each conductor being insulated from each other conductor in the matrix; and each element (10) is connected so that its two input signals are signals on respective ones of the conductors at the cross-over point where the element (10) is located.

7. A correlator as defined in claim 4, in which said signal (S) is a quantized one-bit voltage signal.



8. A correlator as defined in claim 5 or claim 6, in which the signal applied to each conductor is a respective quantized one-bit voltage signal.
9. An auto-correlator as defined in claim 4 or claim 7, further characterised in that a logic inverting gate (31) is included in the line supplying said common voltage signal (S) to each element (10) of the linear array, to permit either the signal (S) or the inverse of said signal (S) to be applied to the elements (10) of the linear array.
10. An auto-correlator as defined in claim 9, further characterised by a switch (33) being positioned between said logic inverting gate (31) and the elements (10) of the linear array, to enable either correlation or anti-correlation to be indicated by the photodiode array.
11. An auto-correlator as defined in claim 9 or claim 10, further characterised in that it includes, in association with each input to each element (10), a circuit comprising two conducting lines in parallel, a logic inverting gate (32, 35) being included in one of said lines in parallel, and a switch (34, 36) to connect one of said lines in parallel to the respective input of an element (10).
12. A cross-correlator as defined in claim 5 or claim 8, further characterised in that the input end of each of said m rows of conductors is connected to the output of a respective first circuit consisting of
- (a) a first pair of conducting lines, connected in parallel, one end of each line being connected to the input of said first circuit, one of said first pair of conducting lines including a logic inverting gate (51);

- (b) a second pair of conducting lines, connected in parallel, one end of each line being connected to the output of said first circuit, one of said second pair of conducting lines including a logic inverting gate (52); and
- (c) first and second switches (53 and 54) being disposed between said first pair of conducting lines and said second pair of conducting lines said first switch (53) being adapted to select which one of said first pair of conducting lines will be included in the path of an incoming signal; said second switch (54) being adapted to select which one of said second pair of conducting lines will be included in the path of an incoming signal; and the input end of each of said n columns of conductors being connected to the output of a respective second circuit comprising
 - (i) a third pair of conducting lines, connected in parallel, one of said third pair of conducting lines including a logic inverting gate (55), and
 - (ii) a third switch (56) adapted to connect one of said third pair of conducting lines into the path of an incoming signal to its respective electrical conductor;further characterised in that all said first switches (53) are linked to be operated simultaneously, all said second switches (54) are linked to be operated simultaneously, all said third switches (56) are linked to be operated simultaneously, and said second switches (54) are linked for simultaneous operation with said third switches (56).



13. A cross-correlator as defined in claim 12, in which each element (10) consists of a light emitting diode in series with a resistor, said cross-correlator including $m + n$ signal drivers (57, 58), each said driver (57, 58) being connected between one of said first or second circuits and its associated electrical conductor.

14. Processing apparatus as defined in any preceding claim, including means to read out the array of photodiodes (12).

15. Processing apparatus as defined in any one of claims 1 to 13, including an interface between the photodiodes 12 and a computer.

16. A method of correlating a plurality of pairs of quantized electrical signals, characterised in that it comprises the steps of:

(a) applying each pair of quantized signals to the two terminals of a respective element (10) in an array of light-emitting or light-modulating elements (10), the optical state of the elements (10) at any instant being dependent on the relative values of the pair of quantized signals, and

(b) observing the optical state of each light-emitting or light-modulating element (10) in the array.

17. A method as defined claim 16, further characterised in that said observation of the optical state of the light-emitting or light-modulating elements (10) is effected by focusing the light from each element (10) on to a respective photodiode (12) in an array of photodiodes (12) which is complementary to the array of light-emitting or light-modulating elements (10).



18. A method as defined in claim 17, including reading out the information contained in said array of photodiodes (12).

19. A method as defined in any one of claims 16, 17 and 18, in which one of the signals of said pair of signals is a signal (S) from a single source, and the other signal of said pair of signals is the signal (S) from the single source which has been delayed by an integral number of units of time delay (τ), whereby the method is a method of autocorrelation.

20. A method as defined in any one of claims 16, 17, and 18, in which the array of elements (10) is an $m \times n$ array, and each element (10) is located at the cross-over point of an $m \times n$ matrix of conductors with its terminals connected to respective ones of the two conductors at the cross-over point, whereby said monitoring of the optical state of each element (10) is effected to perform cross-correlation of the signals applied to the conductors; where m and n are positive integers.

21. A method as defined in any one of claims 16 to 20, in which at least one of the signals to be correlated is a many-bit quantized signal, said method being further characterised in that it includes a preliminary step of converting the or each many-bit quantized signal into a one-bit quantized signal with pulse width modulation of the one-bit quantized signal the width of said pulse width modulation being directly proportional to the instantaneous level, at the time of sampling, of the or the respective many-bit quantized signal.

22. A method as defined in any one of claim 16 to 20, in which at least one signal to be correlated is an analogue signal, said method being further characterised in that it includes a preliminary step of



converting said or each analogue signal into a one-bit quantized signal with pulse width modulation of the one-bit quantized signal, the width of said pulse width modulation being directly proportional to the instantaneous value, at the time of sampling, of the or the respective analogue signal.

23. A method of performing spatial auto-correlation of a black-and-white picture, comprising using a method as defined in claim 19, in conjunction with a raster-type scan of said picture, said scan deriving a quantized output signal indicative of the presence of a black or a white picture element at the time of sampling.

24. A method as defined in claim 23, in which the time delay (τ) is one line time of the raster-type scan.

25. A method as defined in claim 23, in which the picture is a television picture and the time delay (τ) is one frame time of the television raster scan.




26. A method of performing direct spectral analysis of a temporal signal, substantially as hereinbefore described.

27. Correlation apparatus, substantially as hereinbefore described with reference to Figure 3 or to Figure 5 of the accompanying drawings.


28. A method of correlation, substantially as hereinbefore described with reference to the accompanying drawings.



1/3

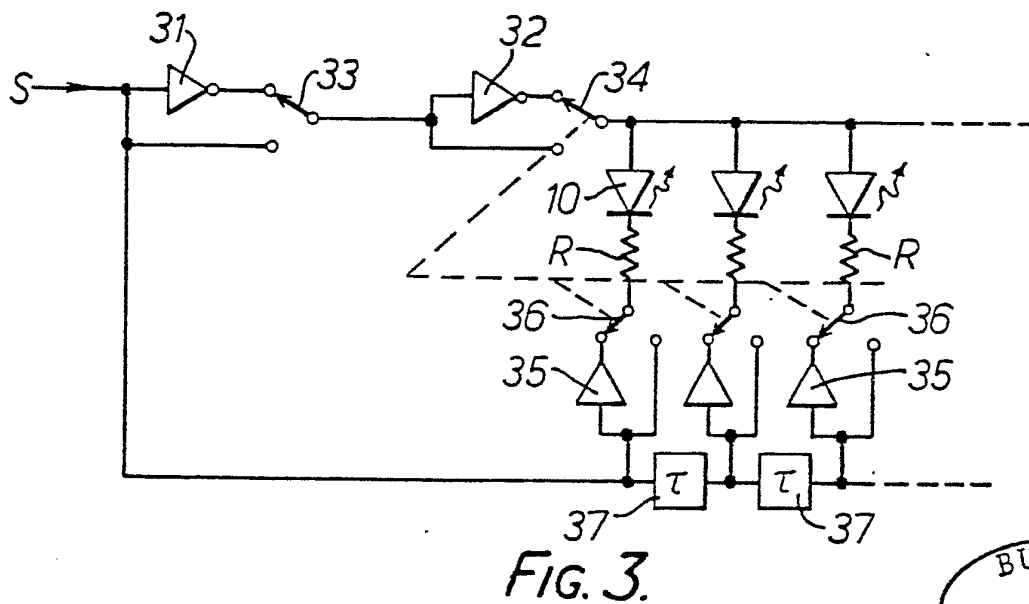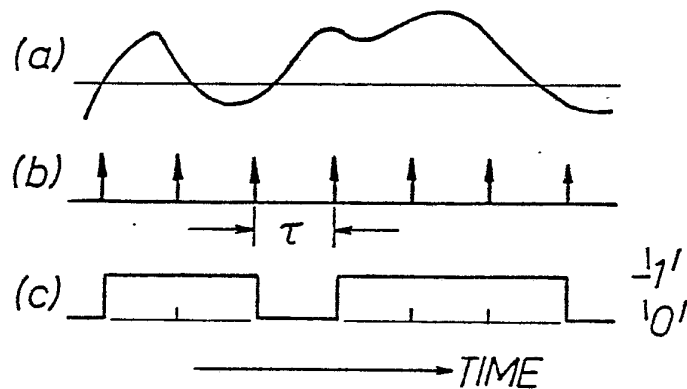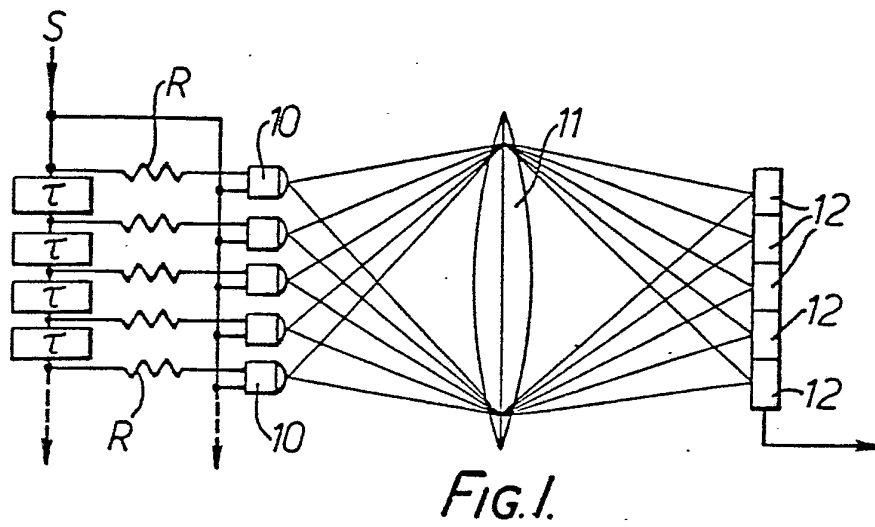

2/3

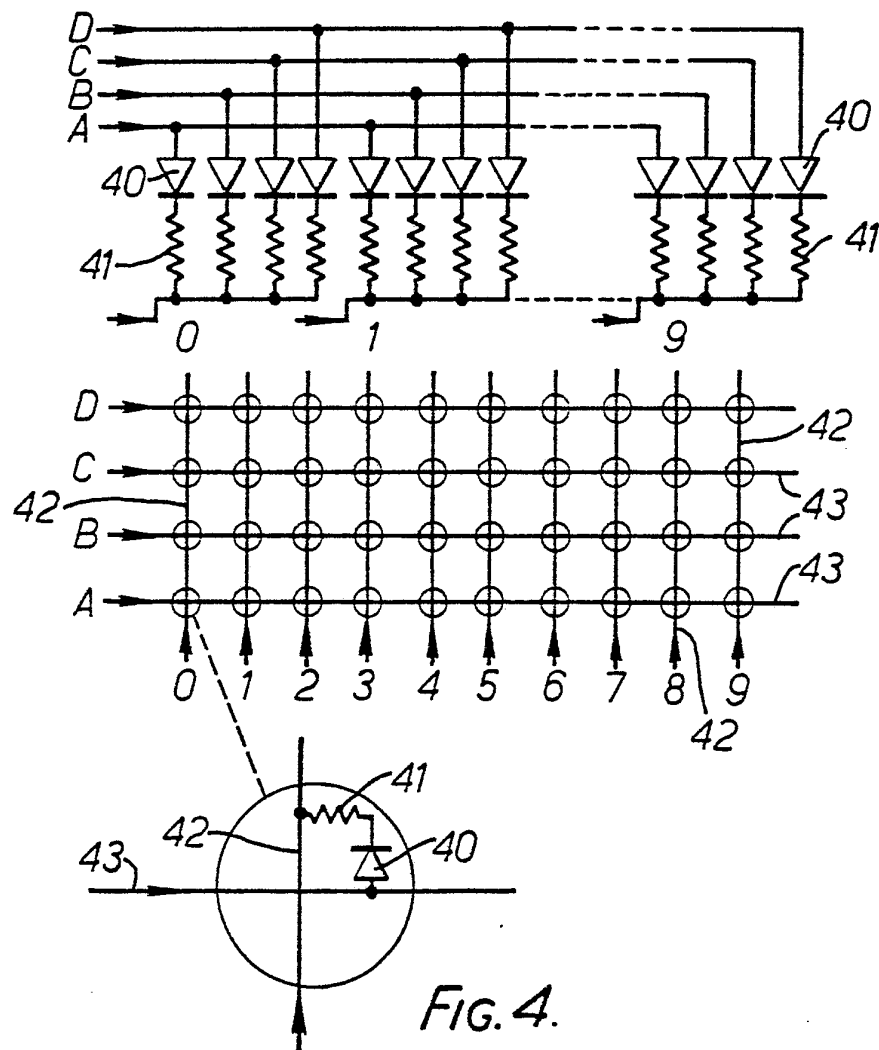

3/3

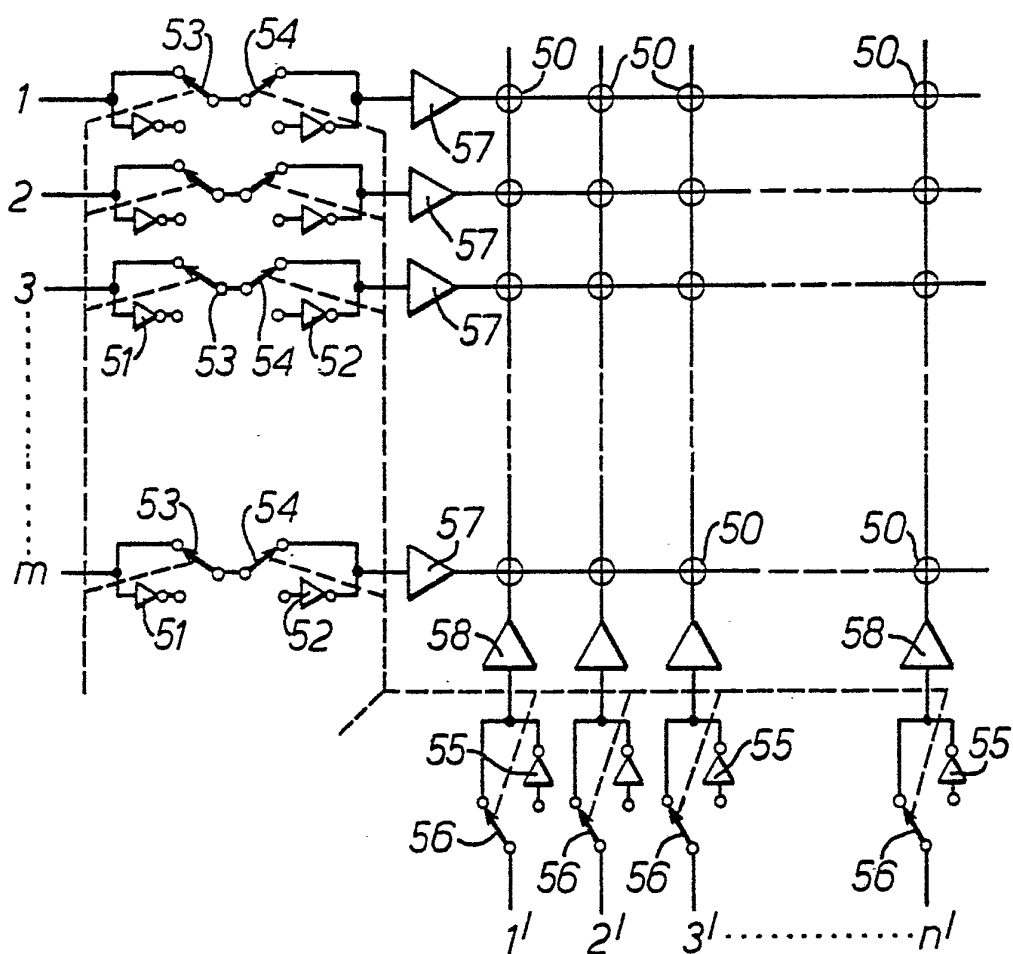


FIG. 5.

INTERNATIONAL SEARCH REPORT

International Application No PCT/AU80/00109

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ³ According to International Patent Classification (IPC) or to both National Classification and IPC Int. Cl.3 H03K 19/14, G06G 9/00																													
II. FIELDS SEARCHED <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black; margin: 5px 0;">Minimum Documentation Searched ⁴</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%; border-bottom: 1px solid black;">Classification System</th> <th style="border-bottom: 1px solid black;">Classification Symbols</th> </tr> <tr> <td style="padding: 5px;">IPC</td> <td style="padding: 5px;">H03K 19/14, G06G 9/00</td> </tr> <tr> <td style="padding: 5px;">US Cl.</td> <td style="padding: 5px;">307/311, 307/312</td> </tr> </table> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black; margin: 5px 0;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁵</div> <p style="padding: 10px 0 5px 40px;">AU: IPC as above; Australian Classification 05.51; 54.41</p>			Classification System	Classification Symbols	IPC	H03K 19/14, G06G 9/00	US Cl.	307/311, 307/312																					
Classification System	Classification Symbols																												
IPC	H03K 19/14, G06G 9/00																												
US Cl.	307/311, 307/312																												
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴ <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%; padding: 5px;">Category *</th> <th style="width: 60%; padding: 5px;">Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷</th> <th style="width: 30%; padding: 5px;">Relevant to Claim No. ¹⁸</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">X</td> <td style="padding: 5px;">AU, B, 61 503/65 (410572) published 1967, January 19th, Relsted.</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1, 2, 3, 16, 17</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">X</td> <td style="padding: 5px;">AU, B, 38215/72 (427794), published 1972, September 28th, Telefonaktiebolaget L.M. Ericsson.</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1, 2, 3, 16, 17</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">X</td> <td style="padding: 5px;">AU, B, 38216/72 (431271), published 1972, January 24th, Telefonaktiebolaget L.M. Ericsson.</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1, 2, 3, 16, 17</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">X</td> <td style="padding: 5px;">FR, A5, 1504530, published 1967, December 8th, Societe Francaise d'Etudes et de Constructions Electroniques.</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1, 2, 16</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">X</td> <td style="padding: 5px;">FR, A6, 2064659 (additional to FR 1558 370), published 1971, July 23rd, Compagne Francaise Thomson Houston - Hotchkiss Brandt.</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1 2, 16</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">FR, A5, 2098717, published 1972, March 10th, Thomson- CSF.</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1, 2</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">X</td> <td style="padding: 5px;">US, A, 3488586, published 1970, January 6th, Watrous et al.</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1, 2, 3, 16, 17</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">US, A, 3108189, published 1963, October 22nd, Bowerman.</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1, 2, 16 17</td> </tr> </tbody> </table> <p style="text-align: center; margin-top: 10px;">(continued)</p>			Category *	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸	X	AU, B, 61 503/65 (410572) published 1967, January 19th, Relsted.	1, 2, 3, 16, 17	X	AU, B, 38215/72 (427794), published 1972, September 28th, Telefonaktiebolaget L.M. Ericsson.	1, 2, 3, 16, 17	X	AU, B, 38216/72 (431271), published 1972, January 24th, Telefonaktiebolaget L.M. Ericsson.	1, 2, 3, 16, 17	X	FR, A5, 1504530, published 1967, December 8th, Societe Francaise d'Etudes et de Constructions Electroniques.	1, 2, 16	X	FR, A6, 2064659 (additional to FR 1558 370), published 1971, July 23rd, Compagne Francaise Thomson Houston - Hotchkiss Brandt.	1 2, 16	A	FR, A5, 2098717, published 1972, March 10th, Thomson- CSF.	1, 2	X	US, A, 3488586, published 1970, January 6th, Watrous et al.	1, 2, 3, 16, 17	A	US, A, 3108189, published 1963, October 22nd, Bowerman.	1, 2, 16 17
Category *	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸																											
X	AU, B, 61 503/65 (410572) published 1967, January 19th, Relsted.	1, 2, 3, 16, 17																											
X	AU, B, 38215/72 (427794), published 1972, September 28th, Telefonaktiebolaget L.M. Ericsson.	1, 2, 3, 16, 17																											
X	AU, B, 38216/72 (431271), published 1972, January 24th, Telefonaktiebolaget L.M. Ericsson.	1, 2, 3, 16, 17																											
X	FR, A5, 1504530, published 1967, December 8th, Societe Francaise d'Etudes et de Constructions Electroniques.	1, 2, 16																											
X	FR, A6, 2064659 (additional to FR 1558 370), published 1971, July 23rd, Compagne Francaise Thomson Houston - Hotchkiss Brandt.	1 2, 16																											
A	FR, A5, 2098717, published 1972, March 10th, Thomson- CSF.	1, 2																											
X	US, A, 3488586, published 1970, January 6th, Watrous et al.	1, 2, 3, 16, 17																											
A	US, A, 3108189, published 1963, October 22nd, Bowerman.	1, 2, 16 17																											
<div style="font-size: small;"> <p>* Special categories of cited documents: ¹⁵</p> <p>"A" document defining the general state of the art</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document cited for special reason other than those referred to in the other categories</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the International filing date but on or after the priority date claimed</p> <p>"T" later document published on or after the international filing date or priority date and not in conflict with the application, but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance</p> </div>																													
IV. CERTIFICATION <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; padding: 5px; vertical-align: top;"> Date of the Actual Completion of the International Search ³ 16 February 1981 (16.02.81) </td> <td style="width: 50%; padding: 5px; vertical-align: top;"> Date of Mailing of this International Search Report ² 18 FEBRUARY 1981 (18-02-81) </td> </tr> <tr> <td style="padding: 5px; vertical-align: top;"> International Searching Authority ¹ Australian Patent Office </td> <td style="padding: 5px; vertical-align: top;"> Signature of Authorized Officer ²⁰ A.S. Moore. A S Moore </td> </tr> </table>			Date of the Actual Completion of the International Search ³ 16 February 1981 (16.02.81)	Date of Mailing of this International Search Report ² 18 FEBRUARY 1981 (18-02-81)	International Searching Authority ¹ Australian Patent Office	Signature of Authorized Officer ²⁰ A.S. Moore. A S Moore																							
Date of the Actual Completion of the International Search ³ 16 February 1981 (16.02.81)	Date of Mailing of this International Search Report ² 18 FEBRUARY 1981 (18-02-81)																												
International Searching Authority ¹ Australian Patent Office	Signature of Authorized Officer ²⁰ A.S. Moore. A S Moore																												

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No ¹⁸
X	JP, A, 52-84956, published 1977, July 14th, Mitsubishi Denki K.K. (JAPATIC English language Abstract).	1, 2, 16, 17
X	JP, A, 53-63, published 1978, January 5th, Mitsubishi Denki K.K. (JAPATIC English language Abstract)	1, 2, 16 17
X	SU, A, 495770, published 1976, March 5th, Arutyunov (Derwent English Language Abstract J3994X/38)	1, 2, 16 17
X	SU, A, 453800, published 1975, January 29th, Dyatlov et al. (Derwent English Language Abstract, Week W27, 1975).	1, 2, 16 17
X,O,P	Proceedings of the Astronomical Society of Australia, Volume 4 No. 1., published 1980, May, T.W. Cole "A fast real-time processor for speckle interferometry". and "A new type of one-bit digital correlator," pages 19 to 23.	1 - 28