



(51) International Patent Classification:

H01R 13/74 (2006.01) *H01R 24/64* (2011.01)
H01R 27/00 (2006.01) *H01R 13/627* (2006.01)

(21) International Application Number:

PCT/US2012/021960

(22) International Filing Date:

20 January 2012 (20.01.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/014,943 27 January 2011 (27.01.2011) US

(71) Applicant (for all designated States except US): **COMM-**

SCOPE, INC. OF NORTH CAROLINA [US/US]; 1100
CommScope Place, SE, Hickory, North Carolina 28601
(US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **FITZPATRICK, Bri-**
an, J. [US/US]; 5505 Sandalwood Drive, McKinney,
Texas 75070 (US).

(74) Agent: **PETROSKI, Stephen, J.**; Myers Bigel Sibley &

Sajovec, P.A., P.O. Box 37428, Raleigh, North Carolina
27627 (US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MODULAR COMMUNICATIONS JACK WITH USER-SELECTABLE MOUNTING

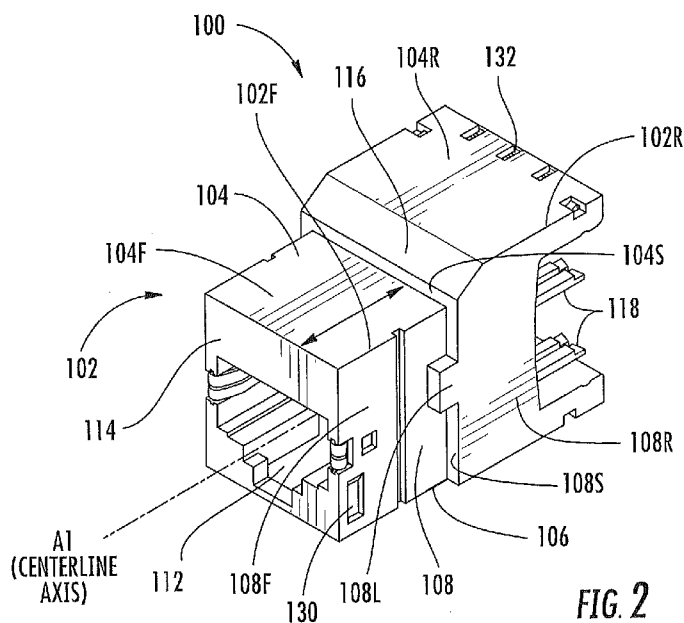

(57) Abstract: A communications jack (100) includes a housing (102) having a top surface (104), a bottom surface (106), first and second opposed side surfaces (108, 110), and a plug aperture (112) configured to receive a mating plug at a front of the housing. At least one of the first side surface (108), the second side surface (110), the top surface (104), and the bottom surface (106) of the housing (102) includes a first feature (130) configured to engage a first mounting structure associated with a first mounting opening (204) to mount the jack (100) in the first mounting opening (204). One of the top and bottom surfaces (108, 110) of the housing (102) includes a second feature (132) configured to engage an adapter (300, 500) to mount the jack in a second mounting opening (412) that is different than the first mounting opening.

MODULAR COMMUNICATIONS JACK WITH USER-SELECTABLE MOUNTING

FIELD OF THE INVENTION

[0001] The present invention relates generally to communications jacks and, more particularly, to communications jacks that are adaptable to be mounted in different mounting openings.

BACKGROUND

[0002] Many hardwired communications systems use plug-jack connectors to connect a communications cable to another communications cable or to a piece of equipment such as a computer, printer, server, switch or patch panel. By way of example, high speed communications systems routinely use such plug-jack connectors to connect computers, printers and other devices to local area networks and/or to external networks such as the Internet. **Figure 1** depicts a simplified example of such a hardwired high speed communications system that illustrates how plug-jack connectors may be used to interconnect a computer **1** to, for example, a network server **10**.

[0003] As shown in **Figure 1**, the computer **1** is connected by a cable **2** to a communications jack **5** that is mounted in a mounting opening **11** of a mounting surface (shown as wall plate **9**). The cable **2** is a patch cord that includes a communications plug **3, 4** at each end thereof. Typically, the cable **2** includes a plurality of wire conductors (*e.g.*, eight), which are arranged in pairs so that each pair of conductors may carry a separate differential signal. Communications plug **3** inserts into a communications jack (not pictured in **Figure 1**) provided in the back of the computer **1**. Communications plug **4** inserts into an opening or "plug aperture" **6** in the front side of the communications jack **5** so that the contacts of the communications plug **4** mate with respective contacts of the communications jack **5** (if the cable **2** includes eight conductors, the communications plugs **3, 4** and the communications jack **5** will typically each have eight contacts). The communications jack **5** includes a wire connection assembly **7** at the back end thereof that receives a plurality of conductors (*e.g.*, eight) from a second cable **8** that are individually pressed into slots in the wire connection assembly **7** to establish mechanical and electrical connections between each conductor of the second cable **8** and a respective one of a plurality of conductive paths through the communications jack **5**. The other end of the second cable **8** is connected to a network server **10** which may be located, for example, in a telecommunications closet of a commercial office building. Thus, the patch cord **2**, the cable **8** and the communications jack

5 provide a plurality of electrical paths (e.g., four differential signal paths) between the computer 1 and the network server 10. Each of these electrical paths may be used to communicate electrical information signals between the computer 1 and the network server 10. It will be appreciated that typically one or more patch panels or switches, along with additional communications cabling, would be included in the electrical path between the second communications cable 8 and the network server 10. However, for ease of description, these additional elements have been omitted from **Figure 1** and the second communications cable 8 is instead shown as being directly connected to the server 10.

[0004] In the above example, the jack 5 is shaped and sized to fit within the mounting opening 11. However, mounting surfaces such as wall plates and patch panels may define a variety of differently shaped and sized mounting openings, and a differently shaped and sized jack may be required for proper and secure mounting in each different mounting opening. For example, a keystone-style mounting opening may be provided instead of the mounting opening 11 illustrated in **Figure 1**, and a jack that is configured differently than the jack 5 is required for proper and secure mounting in the keystone-style mounting opening. Unfortunately, the plurality of different mounting openings increases the number of jacks that need to be manufactured and maintained in inventory.

[0005] Thus, there is a need for communications jacks that are configured to be mounted within one mounting opening and adaptable to be mounted into at least one other, different mounting opening.

SUMMARY

[0006] According to some embodiments of the present invention, a communications jack is provided that includes a housing having a top surface, a bottom surface, first and second opposed side surfaces, and a plug aperture configured to receive a mating plug at a front of the housing. At least one of the top surface, the bottom surface, the first side surface, and the second side surface of the housing includes a first feature configured to engage a first mounting structure associated with a first mounting opening to mount the jack in the first mounting opening. At least one of the top surface and the bottom surface of the housing includes a second feature configured to engage an adapter to mount the jack in a second mounting opening that is different than the first mounting opening.

[0007] In some embodiments, the first feature is on at least one of the first and second side surfaces of the housing. The first feature may comprise a recess or aperture sized and configured to receive a tab of the first mounting structure associated with the first mounting

opening. In some embodiments, the second feature is on the top surface of the housing. The second feature may comprise at least one slot positioned at a rear portion of the housing. An adapter may be provided in combination with the communications jack. The adapter may include opposite proximal and distal ends, with the proximal end including at least one downwardly extending projection sized and configured to engage the at least one slot, and with the distal end including an upwardly extending latch configured to engage at least a portion of the second mounting opening.

[0008] According to further embodiments of the present invention, a communications jack assembly is provided, with the assembly including a communications jack and a first adapter. The communications jack includes a housing having a top surface, a bottom surface, first and second opposed side surfaces, and a plug aperture configured to receive a mating plug at a front of the housing. At least one of the first side surface, the second side surface, the top surface, and the bottom surface of the housing includes a first feature configured to engage a first mounting structure associated with a first mounting opening to mount the jack in the first mounting opening. The first adapter is configured to engage a second feature on one of the top and bottom surfaces of the housing to mount the jack in a second mounting opening that is different than the first mounting opening.

[0009] In some embodiments, the communications jack assembly includes a cable termination manager that is attachable to the rear of the jack housing to hold the first adapter firmly in place. The jack may include a plurality of insulation displacement contacts (IDCs), with each IDC having a slot for receiving therein a conductor, and the cable termination manager may include a plurality of passageways, with each passageway configured to hold therein a conductor. When the cable termination manager is attached to the jack, each passageway is aligned with a respective IDC.

[0010] In some embodiments, the communications jack assembly includes a second adapter attachable to the front of the housing to mount the jack to a third mounting opening that is different than the first and second mounting openings. The second adapter may have a top, first and second opposed sides, and a front defining an aperture. When attached, the second adapter top extends along at least a portion of a length of the housing top surface, the second adapter first side extends along at least a portion of a length of the housing first side surface, the second adapter second side extends along at least a portion of a length of the housing second side surface, and the second adapter front aperture substantially aligns with the plug aperture of the housing. The housing may include a recess on each of the first and second side surfaces of the housing, and each of the first and second sides of the second

adapter may include an inwardly extending tab sized and configured to engage at least a portion of a respective recess. Each of the first and second sides of the second adapter may include a cantilevered arm to engage at least a portion of the third mounting opening.

[0011] According to further embodiments of the present invention, a communications jack assembly is provided, with the assembly including a communications jack and an adapter. The communications jack includes a housing having a top surface, a bottom surface, first and second opposed side surfaces, and a plug aperture configured to receive a mating plug at a front of the housing. At least one of the first side surface, the second side surface, the top surface, and the bottom surface of the housing includes a first feature configured to engage a first mounting structure associated with a first mounting opening to mount the jack in the first mounting opening. The adapter is configured to engage a second feature on one of the top and bottom surfaces of the housing to mount the jack in a keystone-style mounting opening that is different than the first mounting opening.

[0012] It is noted that any one or more aspects or features described with respect to one embodiment may be incorporated in a different embodiment although not specifically described relative thereto. That is, all embodiments and/or features of any embodiment can be combined in any way and/or combination. Applicant reserves the right to change any originally filed claim or file any new claim accordingly, including the right to be able to amend any originally filed claim to depend from and/or incorporate any feature of any other claim although not originally claimed in that manner. These and other objects and/or aspects of the present invention are explained in detail in the specification set forth below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] **Figure 1** is a simplified schematic diagram illustrating the use of conventional communications plugs and jacks to interconnect a computer with network equipment.

[0014] **Figure 2** is a front perspective view of a communications jack according to embodiments of the present invention.

[0015] **Figure 3** is a rear perspective view of the communications jack of **Figure 2**.

[0016] **Figure 4** is a rear perspective view of a cable termination manager according to embodiments of the present invention, with the pieces separated to facilitate insertion of a cable.

[0017] **Figure 5** is a front perspective view of the cable termination manager of **Figure 4**, with the pieces snapped together.

[0018] **Figure 6** is a rear perspective partial cutaway view of the cable termination manager of **Figure 4**.

[0019] **Figure 7** is a rear perspective view of the cable termination manager of **Figure 4** in position to be attached to the communications jack of **Figure 2**.

[0020] **Figure 8** is a rear perspective view of the cable termination manager of **Figure 4** attached to the communications jack of **Figure 2**.

[0021] **Figure 9** is a front perspective view of a patch panel having a plurality of mounting openings and the communications jack of **Figure 2** mounted in one of the openings.

[0022] **Figure 10** is a rear perspective view of the communications jack of **Figure 2** with an adapter attached thereto.

[0023] **Figure 11** is a front perspective view of the communications jack and adapter of **Figure 10** with the cable termination manager of **Figure 4** attached thereto.

[0024] **Figure 12A** is a side schematic view of the communications jack, adapter, and cable termination manager of **Figure 11** in position to be mounted in a keystone-style mounting opening.

[0025] **Figure 12B** is a side schematic view of the communications jack, adapter, and cable termination manager mounted in the keystone-style opening of **Figure 12A**.

[0026] **Figure 13** is bottom front perspective view of an adapter in position to be attached to the communications jack of **Figure 2**.

[0027] **Figure 14** is a front perspective view of the adapter and communications jack of **Figure 13** in an attached position.

[0028] **Figure 15** is a front perspective view of the adapter and communications jack of **Figure 14** in position to be mounted in a mounting opening associated with a wall plate.

[0029] **Figure 16** is a rear perspective view of the wall plate of **Figure 15**.

DETAILED DESCRIPTION

[0030] The present invention will be described more particularly hereinafter with reference to the accompanying drawings. The invention is not intended to be limited to the illustrated embodiments; rather, these embodiments are intended to fully and completely disclose the invention to those skilled in this art. In the drawings, like numbers refer to like elements throughout. Thicknesses and dimensions of some components may be exaggerated for clarity.

[0031] Well-known functions or constructions may not be described in detail for brevity and/or clarity.

[0032] Unless otherwise defined, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. The terminology used in the description of the invention herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used in the description of the invention and the appended claims, the singular forms "a," "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items. Where used, the terms "attached," "connected," "interconnected," "contacting," "coupled," "mounted," "overlying" and the like can mean either direct or indirect attachment or contact between elements, unless stated otherwise.

[0033] Spatially relative terms, such as "top," "bottom," "side," "upper," "lower" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as "under" or "beneath" other elements or features would then be oriented "over" the other elements or features. Thus, the exemplary term "under" can encompass both an orientation of over and under. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

[0034] As used herein, the term "mounting opening" means an opening associated with a mounting surface such as a patch panel, faceplate, wall plate, or the like. The mounting opening may be defined by the mounting surface itself and/or by structures adjacent to or attached to the mounting surface.

[0035] Turning now to the figures, a communications jack **100** is illustrated in **Figures 2 and 3**. The jack **100** includes a housing **102** that has a top surface **104**, a bottom surface **106**, and first and second opposed side surfaces **108, 110**. The housing **102** includes a front portion **102F** and a rear portion **102R**. The front portion **102F** of the housing **102** includes a front portion **104F** of the top surface **104**, a front portion **108F** of the first side surface **108**, and a front portion **110F** of the second side surface **110**. The rear portion **102R**

of the housing **102** includes a rear portion **104R** of the top surface **104**, a rear portion **108R** of the first side surface **108**, and a rear portion **110R** of the second side surface **110**.

[0036] The housing **102** also has a plug aperture **112** that is configured to receive a mating plug (not shown) at a front **114** of the housing **102**. A centerline of the plug aperture **112** defines a longitudinal axis **A1** along which the plug is received. The plug aperture **112** may be configured to receive, for example, an RJ-45 style communications plug.

[0037] The top surface **104** and/or the side surfaces **108**, **110** may be stepped and include steps **104S**, **108S**, **110S**. The step **104S** may divide the front and rear portions **104F**, **104R** of the top surface **104**. Similarly, the step **108S** may divide the front and rear portions **108F**, **108R** of the first side surface **108** and the step **110S** may divide the front and rear portions **110F**, **110R** of the second side surface **110**. In the illustrated embodiment, the top surface **104** includes a sloped portion **116** adjacent the step **110S**.

[0038] The first side surface **108** may include a ledge **108L**, which may extend from the step **108S** into the front portion **108F** of the first side surface **108**. A similar ledge **110L** may be included on the second side surface **110** (**Figure 3**).

[0039] The jack **100** includes a plurality of insulation displacement contacts (IDCs) **118**, with each IDC **118** having a distal end that extends inside the housing rear portion **102R** toward a rear **120** of the housing **102**. Each IDC can include a pair of prongs, and physical and electrical contact can be made between a conductor and an IDC by urging the conductor between the prongs of the IDC. Opposed portions of the prongs can cut through insulation disposed around the conductor, thereby making electrical contact.

[0040] As illustrated, the housing may include an upper grouping or row of four IDCs **118** and a lower grouping or row of four IDCs **118**. The IDCs **118** in each grouping or row may be staggered; that is, two non-adjacent IDCs **118** of each row may be at a first height relative to the bottom surface **106** of the housing **102** and the remaining two non-adjacent IDCs **118** of each row may be at a second height relative to the bottom surface **106** of the housing **102**. Put another way, two non-adjacent IDCs **118** of each row may be positioned a first distance from either the top surface **104** or the bottom surface **106** of the housing **102** and the remaining two non-adjacent IDCs **118** of each row may be positioned a second, different distance from the same surface. Other arrangements of IDCs may also be employed.

[0041] Turning to **Figures 4-7**, a cable termination manager **200** may be attachable to the rear **120** of the jack housing **102**. The termination manager **200** includes first and second pieces **202**, **204** that are pivotably attached at their sides by a pair of hinges **206**. As such, the

termination manager 200 can be in an open position when the pieces 202, 204 are moved away from each other (Figure 4) and a closed position when the pieces 202, 204 are moved toward each other (Figure 7). Each piece 202, 204 includes an arm 208 and an aperture or recess 210. A proximal end of each arm 208 is attached to a rear 203 of a respective piece 202, 204 and a distal end of each arm 208 includes a latch 212. The apertures 210 and the latches 212 are sized and configured such that a latch 212 of one of the pieces 202, 204 can be received in an aperture 210 of the other of the pieces 202, 204 to retain the termination manager 200 in the closed position (Figure 7).

[0042] Referring to Figure 5, each piece 202, 204 includes four passageways 214, with each passageway 214 sized and configured to receive a conductor in the direction shown by the arrows in Figure 5. A telecommunications cable having four twisted conductor pairs can be routed between and past the rears 203 of the first and second pieces 202, 204 and toward a front 205 of the first and second pieces 202, 204. Two twisted conductor pairs can be routed upwardly toward the passageways 214 of the first piece 202 and two twisted conductor pairs can be routed downwardly toward the passageways 214 of the second piece 204. The conductors of the twisted pairs can then be untwisted and each conductor inserted into a passageway 214 (e.g., the untwisted conductors of a pair may be inserted into adjacent passageways 214.).

[0043] The width of at least a portion of each passageway 214 may generally be larger than the diameter of a conductor to allow the conductor to be inserted therein. Each passageway 214 includes at least one projection 216 which effectively narrows the passageway 214 to a width that is slightly less than the diameter of the conductor. The conductor may be routed into the passageway 214 and then urged into the more narrow portion defined by the at least one projection 216. In this regard, the passageway 214 together with the projection 216 can secure or snugly hold the conductor. As illustrated, each passageway 214 may include a plurality of projections 216 to secure or snugly hold the conductor in the passageway 214.

[0044] The at least one projection 216 associated with a particular passageway 214 may be at a different height than the at least one projection 216 associated with an adjacent passageway 214. That is, the projections 216 associated with two non-adjacent passageways 214 of the first piece 202 may be positioned a first distance from a top 218 of the first piece 202 and the projections 216 associated with the remaining two non-adjacent passageways 214 of the first piece 202 may be positioned a second, different distance from the top 218 of the first piece 202. Similarly, the projections 216 associated with two non-adjacent passageways

214 of the second piece 204 may be positioned a first distance from a bottom 220 of the second piece 204 and the projections 216 associated with the remaining two non-adjacent passageways 214 of the second piece 204 may be positioned a second, different distance from the bottom 220 of the second piece 204. Thus, conductors may be held or secured within adjacent passageways 214 at differing heights or distances relative to where they are inserted into the passageways 214.

[0045] As shown in **Figure 7**, the termination manager 200 may be aligned with and attached to the rear 120 of the jack housing 102. The front 205 of the termination manager 200 and the rear 120 of the jack housing 102 may be contoured or shaped such that the termination manager 200 and the jack 100 mate together when attached (**Figure 8**). The top 218 of the first piece 202 may be substantially flush with the housing top rear surface 104R and the bottom 220 of the second piece 204 may be substantially flush with the housing bottom surface 106.

[0046] The positioning of the projections 216 within the passageways 214, as described above, allows individual conductors held therein to be aligned with individual IDCs 118 of the jack 100 when the termination manager 200 and the jack 100 are attached.

[0047] When in an open position, the cable termination manager 200 may allow a user to more easily route the conductors past the rears 203 and into respective passageways 214. The cable termination manager 200 may then be closed or snapped together such that it can be conveniently pushed onto the rear 120 of the jack housing 102 to terminate the conductors at the aligned IDCs 118.

[0048] As best seen in **Figures 4 and 6**, a spring 220 may be positioned within each piece 202, 204. The springs 220 may be configured to provide an electrical contact between a shield of a cable and a shield of the jack (e.g., at least a portion of the jack housing 102, which may be metal).

[0049] Referring to **Figures 2, 3, 7 and 8**, at least one of the first side surface 108, the second side surface 110, the top surface 104, and the bottom surface 106 of the jack housing 102 can include a first feature or engagement mechanism configured to engage a mounting structure associated with a mounting opening to mount the jack 100 in the mounting opening. For example, the first feature may comprise at least one aperture or recess on one or more of the surfaces 104, 106, 108, 110. In the illustrated embodiments, the first feature comprises a recess 130 on each of the housing side surfaces 108, 110.

[0050] As illustrated in **Figure 9**, the recess 130 may be sized and configured to receive a tab 202 associated with a high-density patch panel 200. The patch panel 200

includes a plurality of openings **204**, with a jack **100** insertable from a rear of the patch panel **200** into each opening **204**. At least one tab **202** is positioned relative to each opening **204** such that a distal end of the tab **202** extends into the opening **204** near a front of the patch panel **200**. The tabs **202** may be made of a resilient material; as such, each tab **202** may have a resting position as illustrated in **Figure 9** and may be resiliently deflected such that the distal end of the tab **202** extends toward the front of the patch panel **200**, as indicated by the arrow.

[0051] As a jack **100** is inserted into an opening **204** at the rear of the patch panel **200** and pushed forward, the tab **202** associated with the opening **204** may be deflected or pushed forward by the front **114** and/or the sides **108**, **110** of the jack housing **102** (**Figures 2 and 3**). As the jack **100** is pushed further forward, the tab **202** eventually slips into the recess **130**, allowing the tab **202** to return to its resting position. As shown in **Figure 8**, the recess **130** may include a base portion **130B** that is sized and configured to engage the distal end of the tab **202** and thereby securely hold the tab **202** therein.

[0052] The jack **100** may be inhibited from moving backward toward the rear of the patch panel **200** due to the engagement of the tab **202** and the recess **130**. For example, the engagement of the tab **202** and the recess **130** may inhibit backward movement of the jack **100** as a communications plug is inserted into the plug aperture **112**.

[0053] Engagement of the tab **202** and the recess **130** may provide the user with tactile and/or audible feedback to indicate that the jack **100** has been inserted a proper distance into the opening **204**. Also, the steps **104S**, **108S**, **110S** and/or the ledges **108L**, **110L** of the jack housing **102** (**Figures 2 and 3**) may be sized and positioned such that they abut or contact the rear of the patch panel **200** (or a rear of a structure within the opening **204**) when the jack **100** has been inserted the proper distance. In this regard, the steps **104S**, **108S**, **110S** and/or the ledges **108L**, **110L** may serve to prevent the jack **100** from being pushed too far forward into the opening **204**.

[0054] Still referring to **Figure 9**, an arm **206** may be connected to or integrated with each tab **202**. The arm **206** may be substantially normal to the tab **202** such that a distal end of the arm **206** extends away from the tab **202** past the front of the patch panel **200**. The arm **206** can be deflected or urged away from a respective opening **204** such that the tab **202** deflects or pivots away from its resting position in the direction of the arrow. Thus, a user may deflect or urge the arm **206** to assist removal of the jack **100** from the opening **204** (e.g., to assist in disengaging the tab **202** from the recess **130**). In this regard, the arm **206** may be deflected away from the jack **100** such that the jack **100** may be more easily pulled from the

rear of the patch panel **200**. In addition, a user may manually deflect or urge an arm **206** away from an associated opening **204** to assist insertion of a jack **100** into the opening **104** (e.g., until the tab **202** becomes engaged in the recess **130**).

[0055] It will be understood that the first feature or engagement mechanism of the jack housing **102** may enable the jack to be mounted in a mounting opening that is different than the opening **204** associated with the high-density patch panel **200** depicted in **Figure 9**. For example, the mounting opening may be associated with a wall plate. The wall plate may include a structure similar to the tab **202** to engage the recess **130**. It will also be understood that the mounting surface may have a pair of structures, such as a pair of tabs **202**, with each tab **202** engaging a respective recess **130** on either side surface **108**, **110** of the jack housing **102**. It will be further appreciated that a mounting structure could be positioned at or adjacent the top and/or the bottom of the mounting opening. For example, at least one structure similar to the tab **202** could be positioned so as to engage an aperture or recess on the top surface **104** and/or the bottom surface **106** of the jack housing **102**.

[0056] At least one of the top and bottom surfaces **104**, **106** of the jack housing **102** can include a second feature or engagement mechanism configured to engage an adapter to mount the jack **100** in a second mounting opening that is different than the mounting opening described above. In some embodiments, and as illustrated in **Figures 2** and **3**, the top surface **104** of the jack housing **102** can include at least one slot **132** positioned at a rear portion of the jack housing **102** (i.e., the at least one slot **132** may be positioned on the top rear surface **104R** and may extend to the rear **120** of the housing **102**). In other embodiments, the second feature (e.g., at least one slot **132**) may similarly be positioned on the bottom surface **106** and may extend to the rear **120** of the jack housing **102**.

[0057] Turning to **Figures 10** and **11**, an elongated adapter **300** has a first or proximal end including at least one downwardly extending projection **302** that is sized and configured to engage the at least one slot **132** of the jack housing **102**. The adapter **300** also has a second or distal end including an upwardly extending latch or projection **304** configured to engage at least a portion of the second mounting opening, as will be described in more detail below.

[0058] As shown in the illustrated embodiments, the adapter **300** may include a plurality of projections **302** extending downwardly therefrom, with each projection **302** sized and configured to engage one of a plurality of slots **132** of the jack housing **102**. Although the following will refer to a plurality of projections **302** engaging a plurality of slots **132**, it will be understood that only one projection **302** and one slot **132** may be employed.

[0059] The projections **302** may include a first or proximal portion **306** and a second or distal portion **308**. The first portion **306** is connected to a bottom surface of the adapter **300** and has a width that is about the same as a width of the slots **132**. As such, the adapter **300** may be slid onto the jack housing **102** from the rear (*i.e.*, past the rear **120**) such that a friction fit is established between the projections **302** and the slots **132**. The second portions **308** may be relatively wide compared to the first portions **306**; in this regard, the projections **302** may take on a dovetail shape. The friction fit and/or the dovetail shape inhibits the adapter **300** from becoming disengaged, either rearwardly from the rear **120** of the housing **102** or upwardly (*i.e.*, outwardly) away from the top surface **104** of the housing **102**.

[0060] As described above, and as shown in **Figure 11**, the termination device **200** may be attached to the rear **120** of the jack housing **102** to terminate conductors held in the device **200** on the IDCs. Moreover, because the termination device **200** may rest against the rear **120** of the housing **102** when attached thereto, the termination device **200** can help hold the adapter **300** in place.

[0061] When attached, a portion of the bottom surface of the adapter **300** may rest against the top rear surface **104R** of the housing **102** (*i.e.*, a portion of the bottom surface of the adapter **300** adjacent the projections **302** may rest against the top rear surface **104R**). The bottom surface of the adapter **300** may include a contoured portion **310** such that, along with the step **104S** and/or the sloped portion **116** of the top surface **104** of the jack housing **102**, the adapter **300** is cantilevered with at least the end portion of the adapter **300** including the projection or latch **304** elevated over the top surface **104** of the housing **102**. The adapter **300** may be made of a resilient material such that the end portion including the latch or projection **304** can be deflected downward (*i.e.*, inward toward the jack housing **102**) as shown by the arrow in **Figure 11**. The contoured portion **310** of the adapter **300** may be sized and positioned such that, as the adapter **300** is deflected downward, the contoured portion **310** mates with or rests above the sloped portion **116** of the housing **102**. In this regard, the degree to which the adapter **300** is cantilevered may depend on the amount of downward deflection of the adapter **300**.

[0062] As shown in **Figure 10**, the latch **304** can include an upwardly extending straight portion **312** closer to the first or proximal end of the adapter **300**. The latch **304** can also include a sloped portion **314** that slopes downwardly from the straight portion **312** to the second or distal end of the adapter **300**. When the adapter **300** is engaged, the latch **304** and/or the straight portion **312** may extend outwardly away from the jack housing **102**.

[0063] Turning to **Figure 12A**, an exemplary second mounting opening is illustrated. The opening may be a keystone-style opening **402** and, in the illustrated embodiment, is defined at least in part by a wall plate **400**. It will be appreciated that keystone-style mounting openings may be defined at least in part by other types of mounting surfaces such as patch panels. Keystone-style openings are described in more detail in U.S. Patent Nos. 6,042,419 to Liu and 7,056,157 to Herring et al., the disclosures of which are incorporated herein in their entireties. Keystone opening and latching features are also described in IEC Standard 60603-7, the disclosure of which is incorporated herein in its entirety.

[0064] The keystone opening **402** includes an upper wall **404** and a lower wall **406**. The upper wall **404** includes a slot or groove **408** and the lower wall **406** also includes a slot or groove **410**. Also illustrated in **Figure 12A** is a side view of the jack **100** with the adapter **300** attached thereto.

[0065] It can be seen from **Figure 12A** (as well as **Figure 10**) that the bottom surface **106** of the jack housing **102** can include a latch or protrusion **140**. A rear portion **142** of the latch or protrusion **140** extends downwardly away from the jack bottom surface **106** and a front portion **144** of the latch or protrusion **140** slopes upwardly from the rear portion **142** until it reaches the bottom surface **106** nearer the front **114** of the jack housing **102**. It will be understood that the top surface **104** or the top front surface **104F** of the housing **102** can include the latch or protrusion **140** in those embodiments in which the adapter **300** engages a second feature on the bottom surface **106** of the housing **102**.

[0066] Still referring to **Figure 12A**, the jack **100** with the adapter **300** attached thereto can be inserted into the keystone opening **402** as shown by the arrow. The latch **304** of the adapter **300** engages the slot or groove **408** and the latch or protrusion **140** engages the slot or groove **410** (it will be understood that the jack **100** could be rotated 180 degrees such that the latch **304** engages the slot or groove **410** and the latch or protrusion **140** engages the slot or groove **408**). For example, the adapter **300** may deflect downwardly as the jack **100** is inserted into opening **402**, and the sloped portion **314** of the latch **304** may slide along the inner portion of wall **404** until the straight portion **312** of the latch **304** reaches the slot or groove **408**, at which point the adapter **300** deflects upwardly to its resting position or nearer its resting position. At this point, the straight portion **312** of the latch **304** is engaged with a downward flat surface **409** of the slot or groove **408**, thereby inhibiting rearward movement of the jack **100** (for example, this may inhibit rearward movement if a communications plug is inserted into the jack **100** from the front of the wall plate **400**). Moreover, during insertion of the jack **100** into the opening **402**, the sloped portion **144** of the protrusion **140** (where

used) may slide along the inner portion of wall until the straight portion **142** reaches the slot or groove **410**, at which point the straight portion **142** is engaged with an upward flat surface **411** of the slot or groove **410**, thereby further inhibiting rearward movement of the jack **100**.

[0067] Once engaged, the front **114** of the jack housing **102** may abut at least one ledge **414** defined by the wall plate **400** and/or the walls **408**, **410**. This may inhibit further forward movement of the jack **100** after insertion. Alternatively or additionally, the ledges **108L**, **110L** (Figures 2 and 3) may inhibit forward motion of the jack after insertion. For example, the ledges **108L**, **100L** may abut ledges, sidewalls, or other structures within the opening **402**. Aperture **412** of the faceplate **400** may be substantially aligned with aperture **112** of the jack **100** to allow a communications plug to be inserted through the aperture **412** and into aperture **112**. In this regard, the jack aperture **112** may be slightly recessed with respect to faceplate aperture **412**. This is the configuration shown in Figure 12B.

Alternatively, at least a portion of the front portion **102F** of the jack housing **102** may reside in aperture **412** of wall plate **400** (e.g., the front **114** of the housing **102** may be flush with the front of the wall plate **400** or may protrude slightly from the front of the wall plate **400**).

[0068] Turning now to Figures 13-16, a second adapter **500** may be attachable to the jack housing **102** to mount the jack **100** in a mounting opening that is different than the mounting openings described above.

[0069] As shown in Figures 13 and 14, the adapter **500** includes a top **502** and first and second opposed sides **504**, **506**. An aperture **512** is defined in a front **508** of the adapter **500**.

[0070] The jack housing **102** includes a feature or engagement mechanism that engages a structure of the adapter **500** to allow attachment of the adapter **500** to the jack housing **102**. For example, as illustrated, each jack housing side surface **108**, **110** can include a recess **150** that is configured to receive at least one tab **514** associated with each side **504**, **506** of the adapter **500**. It will be understood that the feature could be other than the recess **150**; for example, the feature could comprise the recesses **130**, described above.

[0071] The side **504** may include a front section **504F** adjacent the front **508** of the adapter **500**. The side **504** may also include top and bottom sections **504T**, **504B** that are separated by opening **516**. Each of the top and bottom sections **504T**, **504B** has a height, and tabs **514** extend inwardly away from inner surfaces of the top and bottom sections **504T**, **504B**, with each tab **514** extending along at least a major portion of the height of each section. Although not visible in the figures, the second side **506** of the adapter **500** may have the same configuration as the first side **504** of the adapter **500**.

[0072] The adapter **500** may be attached to the front portion **102F** of the jack housing **102** by engaging the tabs **514** and the recesses **150**. The adapter **500** may be made of a resilient material such that the first and second sides **504**, **506** can be slightly pulled away from one another to assist sliding the adapter **500** over the housing front portion **102F** and aligning the tabs **514** with the recesses **150**.

[0073] When attached, the adapter top **502** extends along at least a portion of a length of the housing top surface **104**, the adapter first side **504** extends along at least a portion of a length of the housing first side surface **108**, and the adapter second side **506** extends along at least a portion of a length of the housing second side surface **110**.

[0074] Still referring to **Figures 13 and 14**, a cantilevered arm **520** is attached to or integrated with each of the first and second sides **504**, **506** of the adapter **500**. As illustrated, the cantilevered arm **520** associated with the first side **504** extends from the front section **504F** and extends at least partially into the opening **516**. The cantilevered arms **520** may be resiliently deflected inward toward the jack housing **102**.

[0075] A pair of ledges **522** is also attached to or integrated with each of the first and second sides **504**, **506** of the adapter **500**. As shown, the ledges **522** associated with the first side **504** are positioned that one of the ledges **522** extends outwardly from an outer surface of the top section **504T** and the other of the ledges **522** extends outwardly from an outer surface of the bottom section **504B**.

[0076] The adapter **500** allows the jack **100** to be mounted in a mounting opening that is different than the aforementioned mounting openings. An example of such a mounting opening is the opening **602** associated with the wall plate **600** shown in **Figures 15 and 16**. It will be understood that an opening similar to opening **602** may be associated with other mounting surfaces, such as patch panels.

[0077] As shown in **Figures 15 and 16**, the jack **100** with the adapter **500** attached thereto may be inserted into opening **602** from the rear of the wall plate **600**. The mounting opening **602** can include or be defined by a top wall **604**, a bottom wall **606**, and opposed side walls **608**, **610** that have cut-out areas **612**. Each cut-out area **612** may extend from the front **616** of the wall plate **600** rearwardly along a portion of a depth of a respective side wall **608**, **610** and define a vertically extending flat portion **614** within the side wall **608**, **610**.

[0078] As the jack **100** with the adapter **500** is mounted into the opening **602** from the rear of the faceplate **600**, the cantilevered arms **520** are deflected inwardly by side walls **608**, **610** until the cantilevered arms **520** are engaged in respective cut-out areas **612**. The cantilevered arms **520** then spring back to their resting position (or return at least partially to

their resting position) such that the distal end of each arm **520** rests against a flat vertical portion **614** of a respective cut-out area **612**. Thus, the engagement of the cantilevered arms **520** and the cut-out areas **612** inhibits rearward movement of the jack **100** after it has been mounted in the mounting opening **602**. Also, the engagement of the cantilevered arms **520** and the cut-out areas **612** may provide tactile and/or audible feedback to indicate that the jack **100** has been properly seated in opening **602**.

[0079] Moreover, the ledges **522** on the adapter sides **504**, **506** may abut rear surfaces **608R**, **610R** of side walls **608**, **610** to prevent the jack **100** from being inserted too far into the opening **602**. The cantilevered arms **520** and the ledges **522** of the adapter **500**, as well as the various features of the side walls **608**, **610** may be configured and positioned such that the front **508** of the adapter may: 1) protrude from the front **616** of the wall plate **600**; 2) be flush with the front **616** of the wall plate **600**; or 3) be recessed with respect to the front **616** of the wall plate **600** after the jack **100** has been mounted in opening **602**.

[0080] Turning back to **Figures 13** and **14**, the adapter **500** may include an open bottom such that the bottom surface **106** of the jack housing **102** is exposed for contact with the mounting surface associated with the mounting opening. For example, the open bottom may allow the bottom surface **106** of the jack housing **102** to contact the bottom wall **606** associated with the mounting opening **602** (**Figure 15**). Again, the mounting opening may also be associated with a patch panel. As is understood by those of skill in the art, an intelligent patch panel may sense when cables are plugged into, or removed from, jacks mounted in the panel in order to automatically track and record in a computer-based log each change to the patching connectivity. Thus, the open bottom of the adapter **500** may allow for proper sensing in this type of environment.

[0081] Moreover, a center wall **530** may be attached to or integrated with the adapter top **502**. As illustrated, the center wall **530** may be bowed to urge the jack **100** down against the mounting opening after the jack **100** has been mounted therein. This feature along with the open bottom of the adapter **500** may encourage proper operation when the jack **100** with the adapter **500** attached thereto is mounted into a mounting opening associated with an intelligent patch panel, for example.

[0082] The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included

within the scope of this invention as defined in the claims. The invention is defined by the following claims, with equivalents of the claims to be included therein.

THAT WHICH IS CLAIMED IS:

1. A communications jack, comprising:
a housing having a top surface, a bottom surface, first and second opposed side surfaces, and a plug aperture configured to receive a mating plug at a front of the housing;
wherein at least one of the top surface, bottom surface, first side surface, and second side surface of the housing includes a first feature configured to engage a first mounting structure associated with a first mounting opening to mount the jack in the first mounting opening; and
wherein at least one of the top surface and bottom surface of the housing includes a second feature configured to engage an adapter to mount the jack in a second mounting opening that is different than the first mounting opening.
2. The communications jack of Claim 1, wherein the first feature is on at least one of the first and second side surfaces of the housing.
3. The communications jack of Claim 1, wherein the second feature is on the top surface of the housing.
4. The communications jack of Claim 1, wherein the first feature comprises a recess or aperture sized and configured to receive a tab of the first mounting structure associated with the first mounting opening.
5. The communications jack of Claim 1, wherein the second mounting opening is a keystone opening.
6. The communications jack of Claim 1, wherein the second feature comprises at least one slot positioned at a rear of the housing.
7. An adapter in combination with the communications jack of Claim 6, the adapter including opposite proximal and distal ends, wherein the proximal end includes at least one downwardly extending projection sized and configured to engage the at least one slot, and wherein the distal end includes an upwardly extending latch configured to engage at least a portion of the second mounting opening.

8. A communications jack assembly, comprising:

a communications jack including a housing having a top surface, a bottom surface, first and second opposed side surfaces, and a plug aperture configured to receive a mating plug at a front of the housing, wherein at least one of the first side surface, the second side surface, the top surface, and the bottom surface of the housing includes a first feature configured engage a first mounting structure associated with a first mounting opening to mount the jack in the first mounting opening; and

a first adapter configured to engage a second feature on one of the top and bottom surfaces of the housing to mount the jack in a second mounting opening that is different than the first mounting opening.

9. The communications jack assembly of Claim 8, wherein the first feature comprises a recess or aperture sized and configured to receive a tab of the first mounting structure associated with the first mounting opening.

10. The communications jack assembly of Claim 8, wherein the second mounting opening is a keystone opening.

11. The communications jack assembly of Claim 8, wherein the second feature comprises at least one slot positioned at a rear portion of the housing.

12. The communications jack assembly of Claim 8, wherein the first adapter includes opposite proximal and distal ends, wherein the proximal end includes at least one projection sized and configured to engage the at least one slot, and wherein the distal end includes a latch configured to engage at least a portion of the second mounting opening.

13. The communications jack assembly of Claim 12, further comprising a cable termination manager attachable to the rear of the jack housing to hold the first adapter firmly in place.

14. The communications jack assembly of Claim 13, wherein the jack comprises a plurality of insulation displacement contacts (IDCs), each IDC having a slot for receiving therein a conductor, wherein the termination manager comprises a plurality of passageways,

each passageway configured to hold therein a conductor, and wherein, when the cable termination manager is attached, each passageway is aligned with a respective IDC.

15. The communications jack assembly of Claim 8, further comprising a second adapter attachable to the front of the housing to mount the jack in a third mounting opening that is different than the first and second mounting openings.

16. The communications jack assembly of Claim 15, wherein the second adapter has a top, first and second opposed sides, and a front defining an aperture, wherein, when attached, the second adapter top extends along at least a portion of a length of the housing top surface, the second adapter first side extends along at least a portion of a length of the first side surface of the housing, the second adapter second side extends along at least a portion of a length of the second side surface of the housing, and the second adapter front aperture substantially aligns with the plug aperture of the housing.

17. The communications jack assembly of Claim 16, wherein the housing comprises a third feature comprising a recess on each of the first and second side surfaces of the housing, and wherein each of the first and second sides of the second adapter includes an inwardly extending tab sized and configured to engage at least a portion of a respective recess.

18. The communications jack assembly of Claim 16, wherein each of the first and second sides of the second adapter includes a cantilevered arm to engage at least a portion of the third mounting opening.

19. A communications jack assembly, comprising:
a communications jack including a housing having a top surface, a bottom surface, first and second opposed side surfaces, and a plug aperture configured to receive a mating plug at a front of the housing, wherein at least one of the first side surface, the second side surface, the top surface, and the bottom surface of the housing includes a first feature configured engage a first mounting structure associated with a first mounting opening to mount the jack in the first mounting opening; and

an adapter configured to engage a second feature on one of the top and bottom surfaces of the housing to mount the jack in a keystone-style mounting opening that is different than the first mounting opening.


20. The communications jack assembly of Claim 19, wherein the first feature comprises a recess or aperture sized and configured to receive a tab of the first mounting structure associated with the first mounting opening.



21. The communications jack assembly of Claim 19, wherein the second feature comprises at least one slot positioned at a rear of the housing.

22. The communications jack assembly of Claim 19, wherein the adapter includes opposite proximal and distal ends, wherein the proximal end includes at least one projection sized and configured to engage the at least one slot, and wherein the distal end includes a latch configured to engage at least a portion of the keystone-style opening.

23. The communications jack assembly of Claim 22, further comprising a cable termination manager attachable to the rear of the jack housing to hold the adapter in place.

1/11

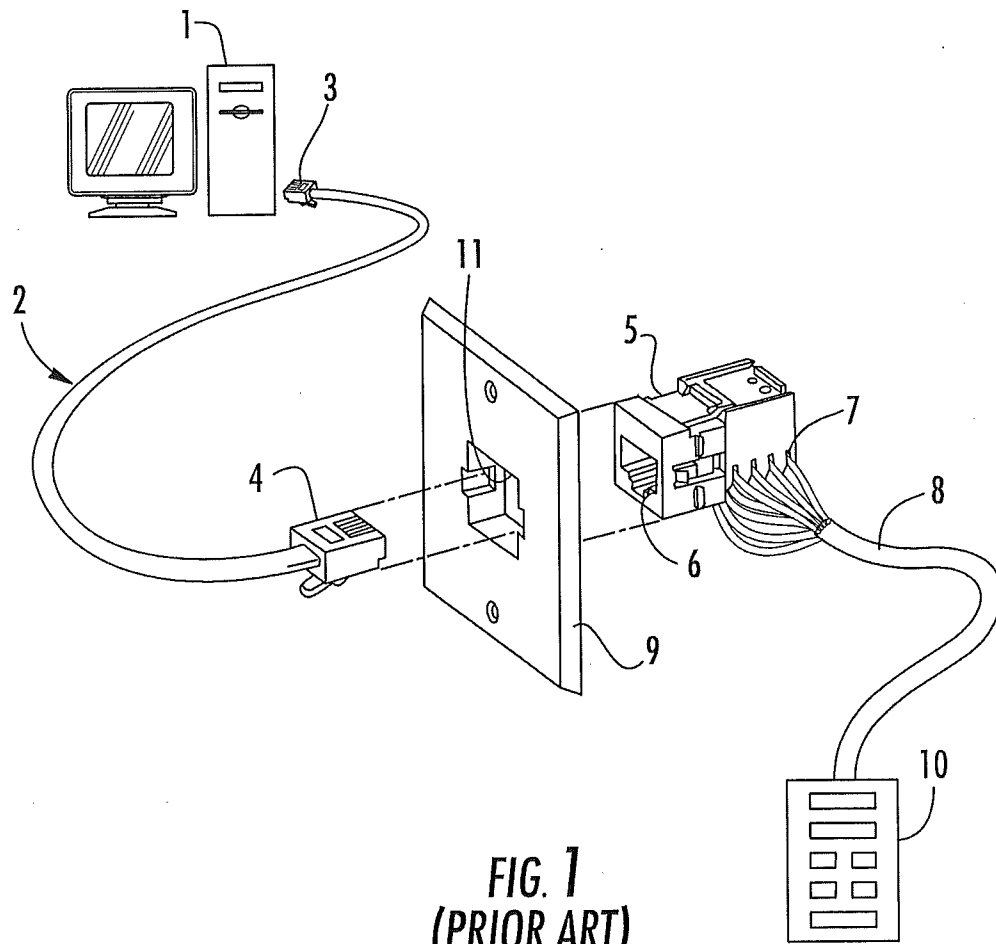

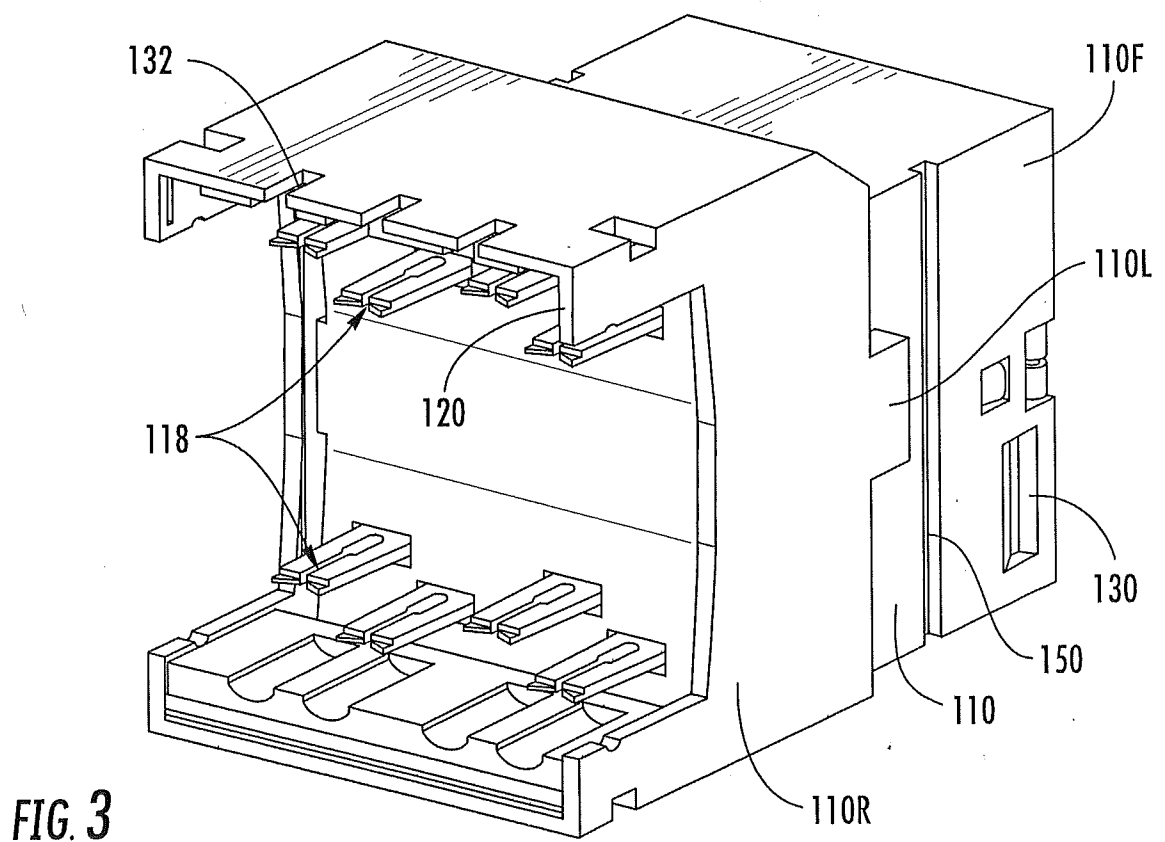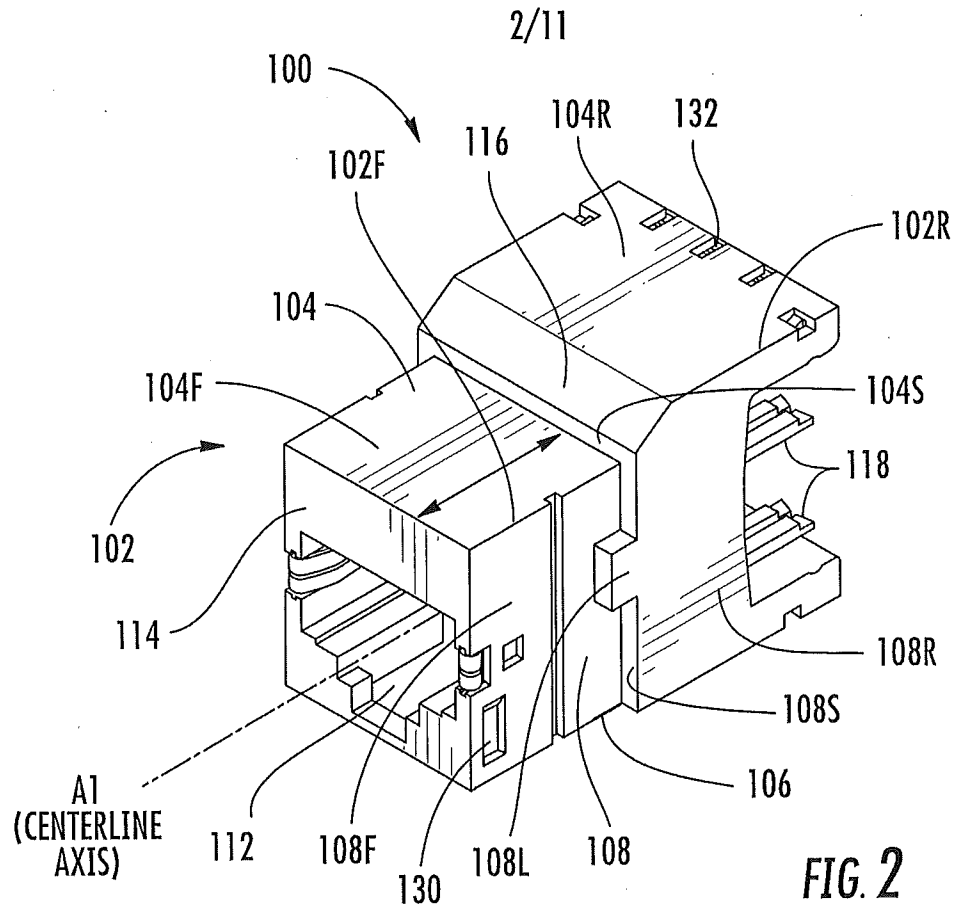

3/11

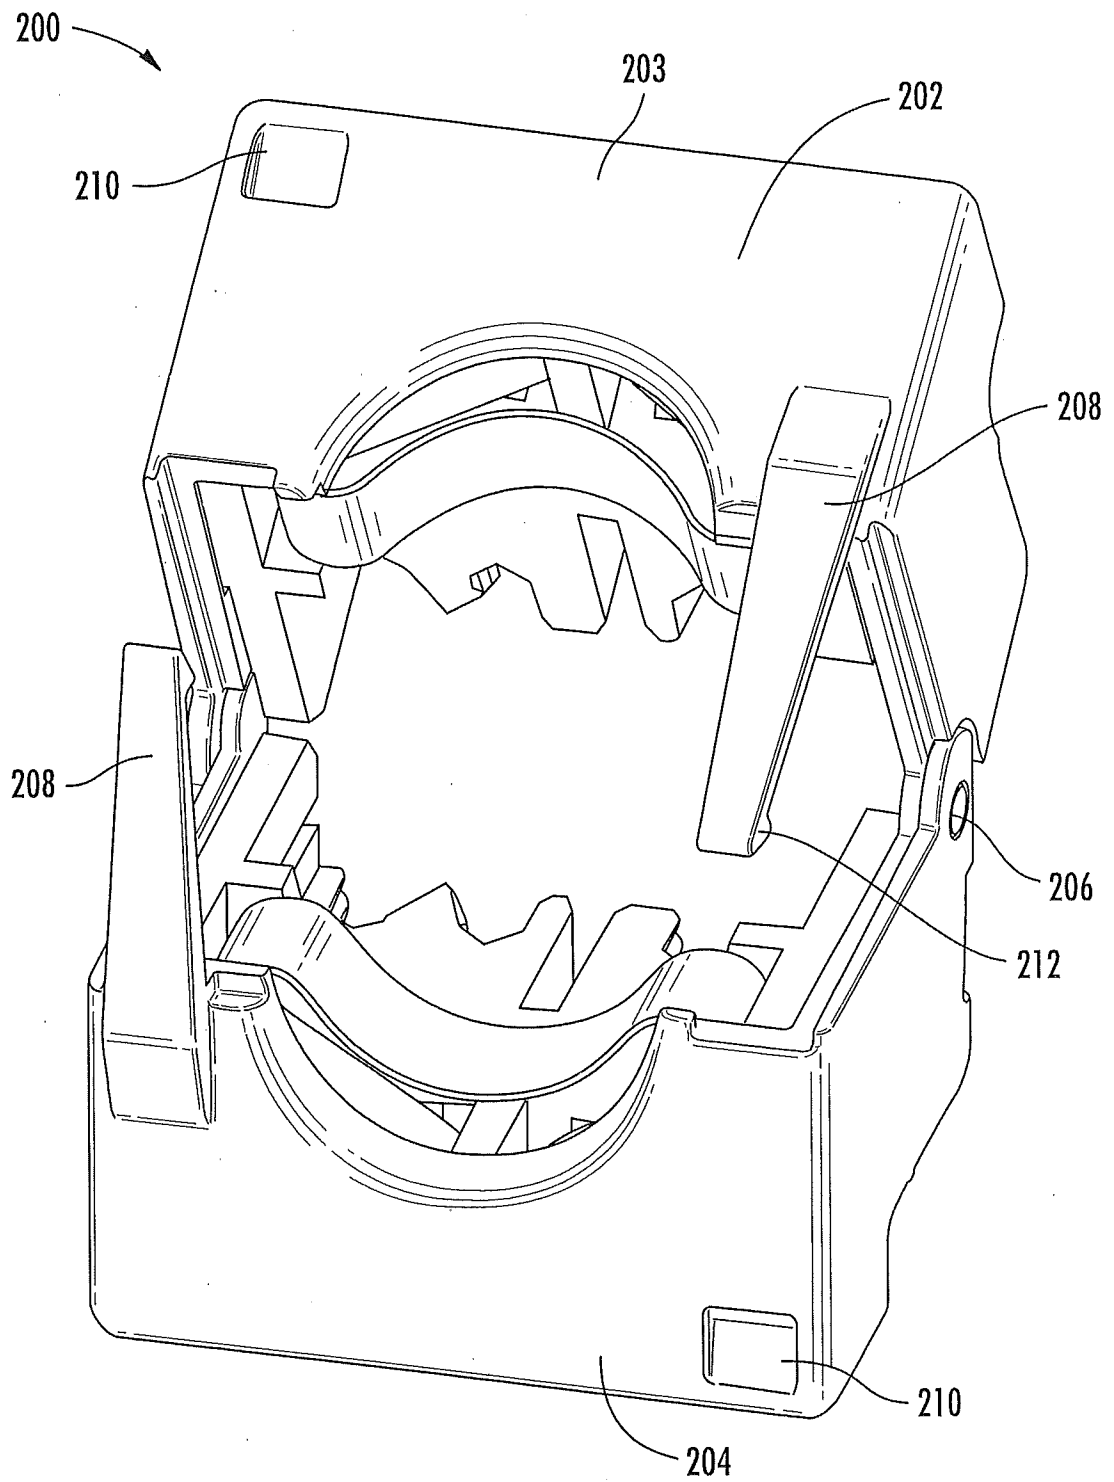


FIG. 4

4/11

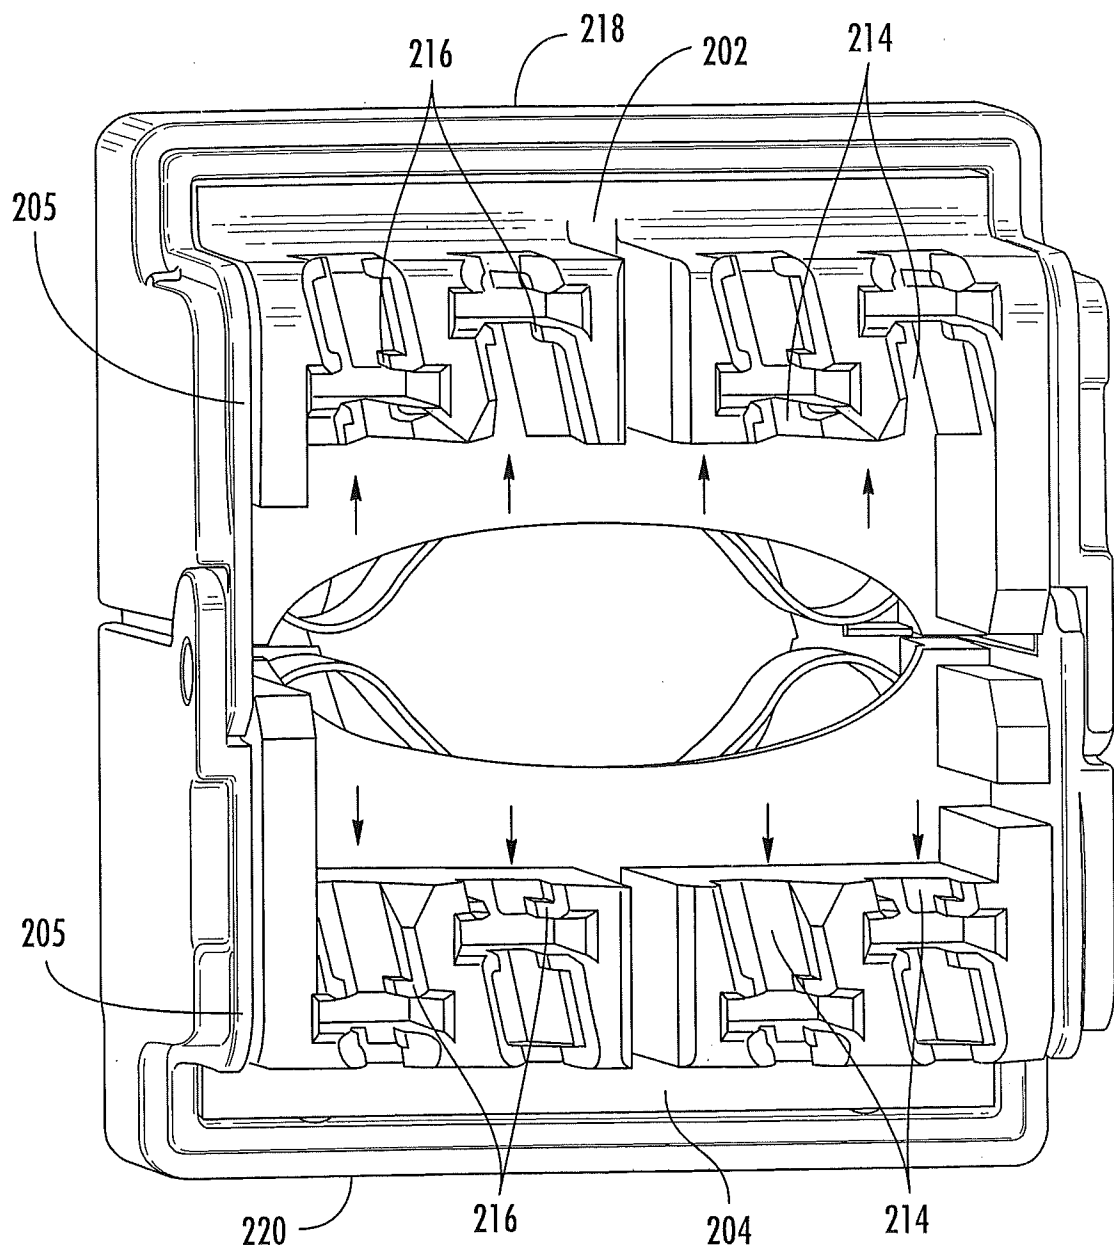


FIG. 5

5/11

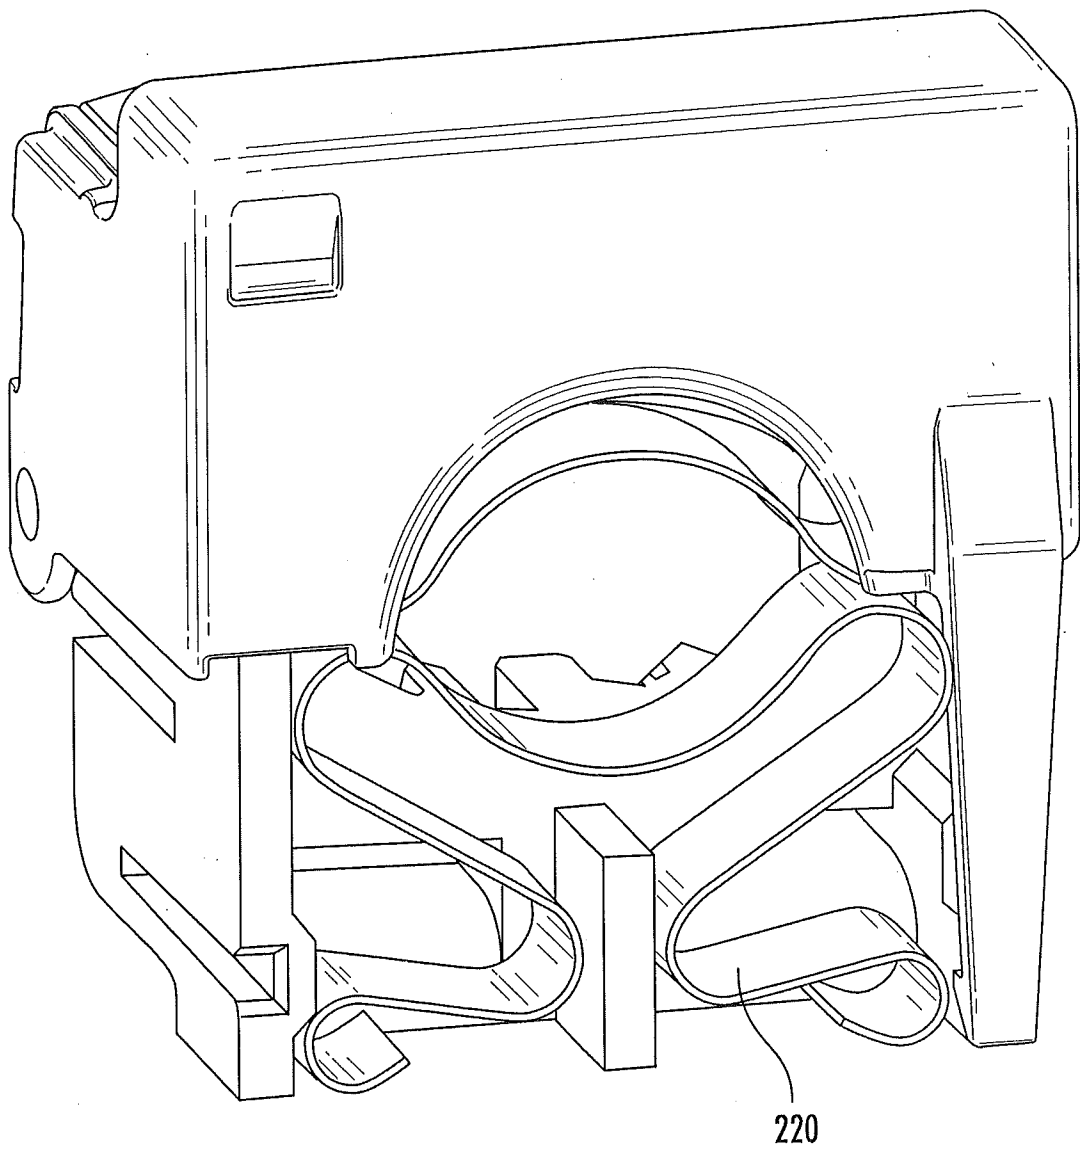


FIG. 6

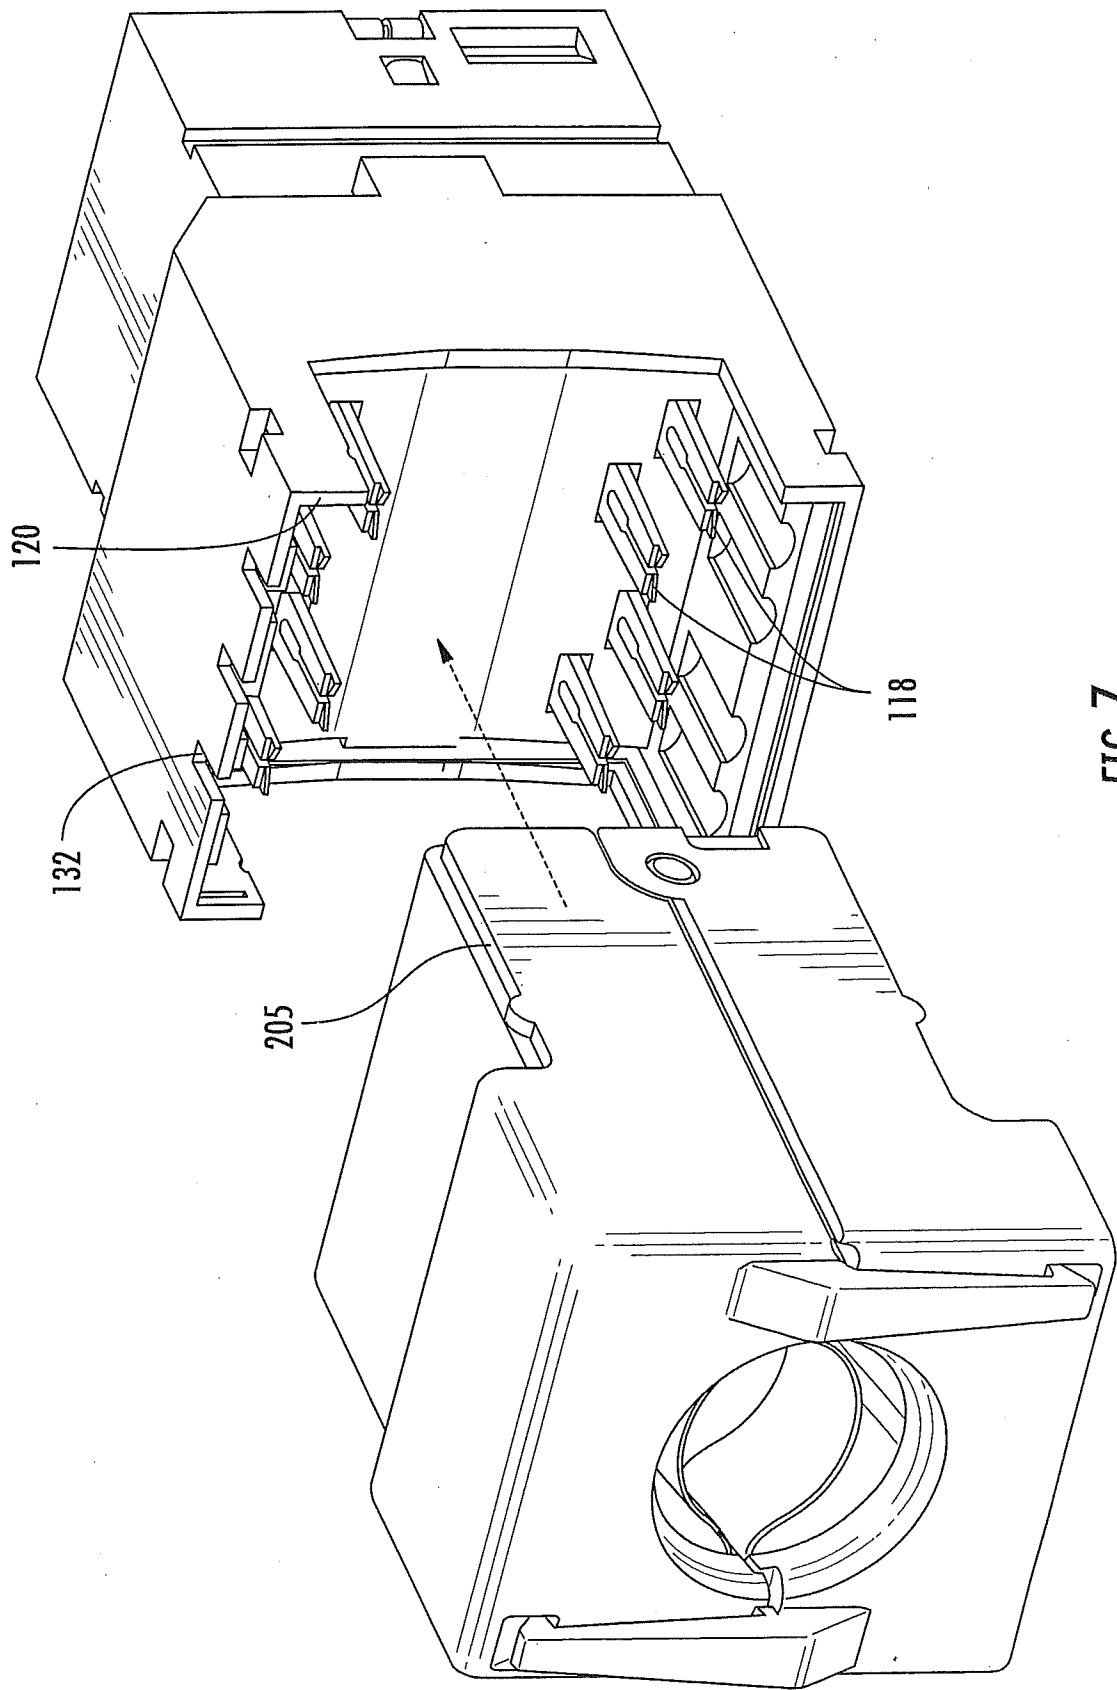


FIG. 7

7/11

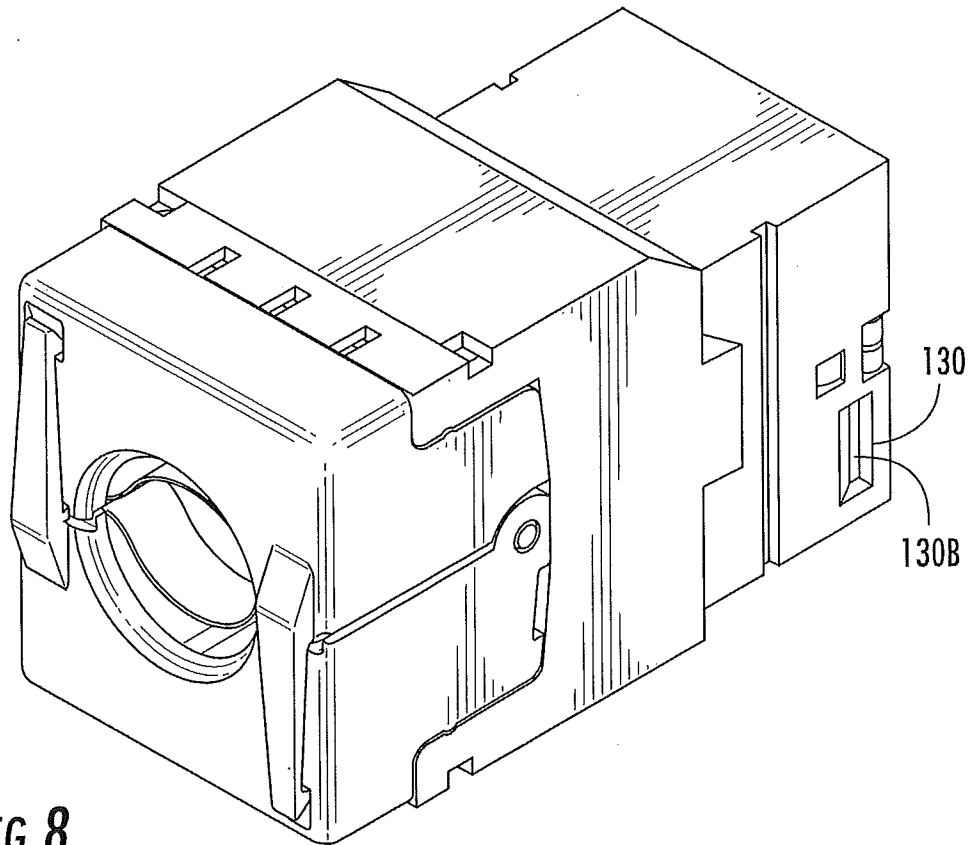


FIG. 8







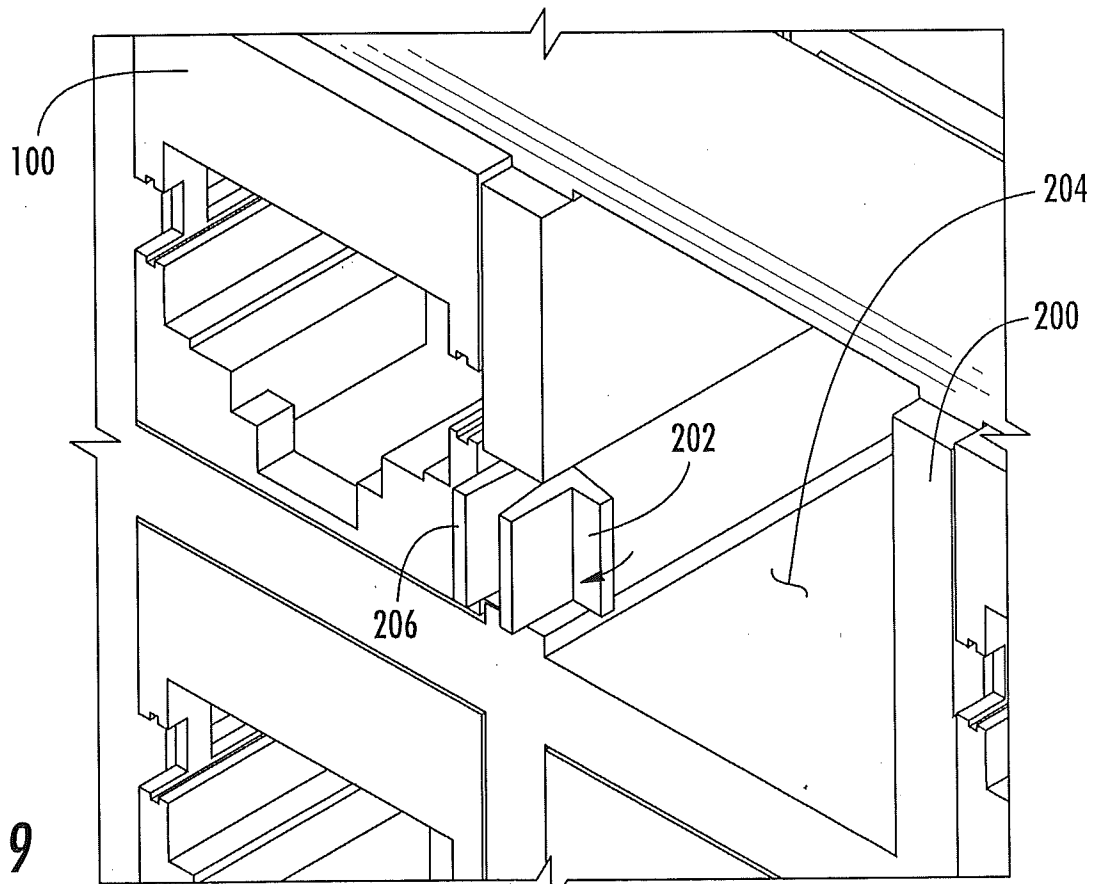


FIG. 9

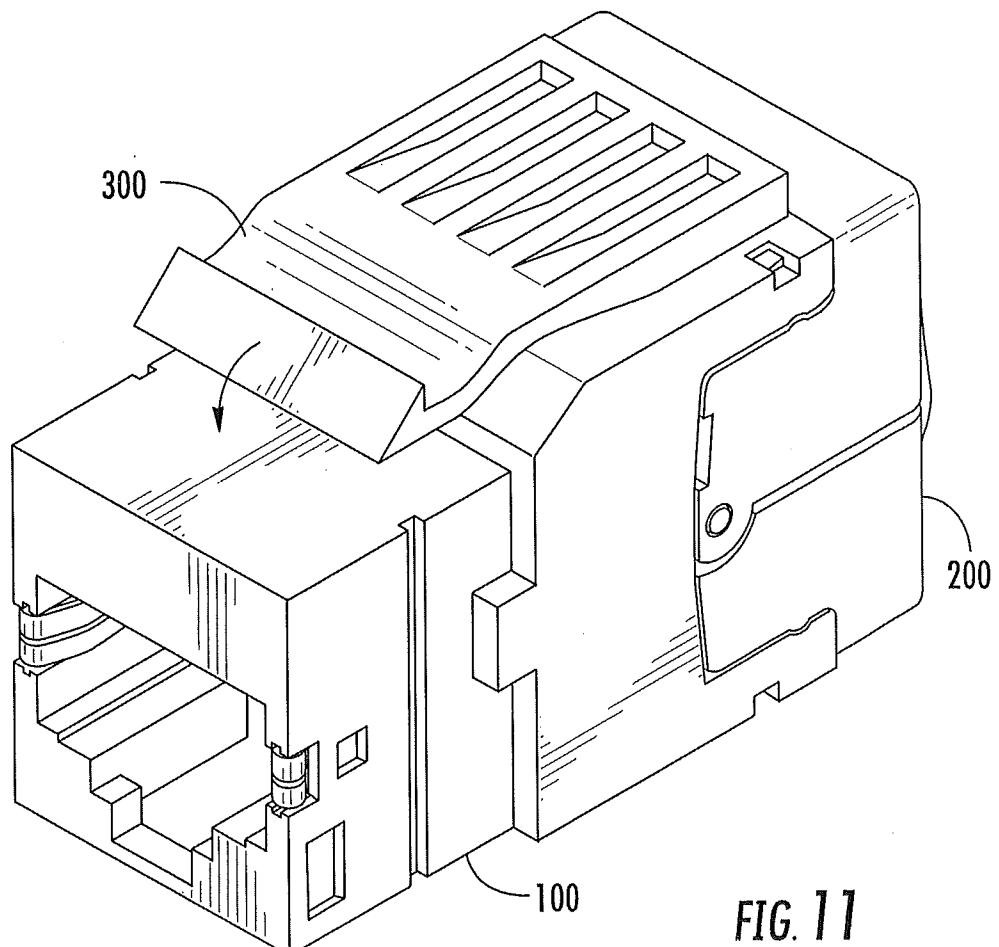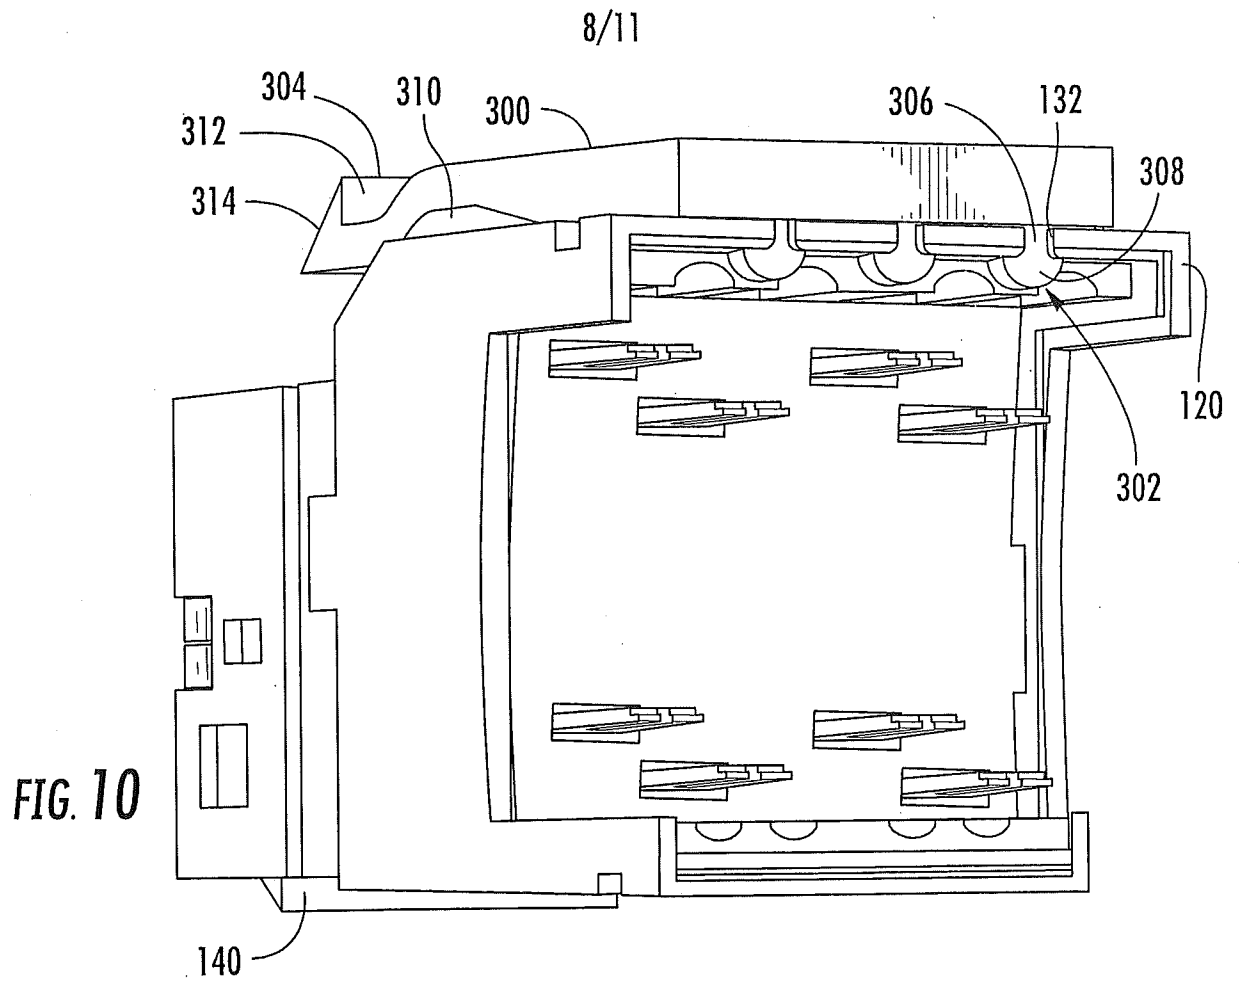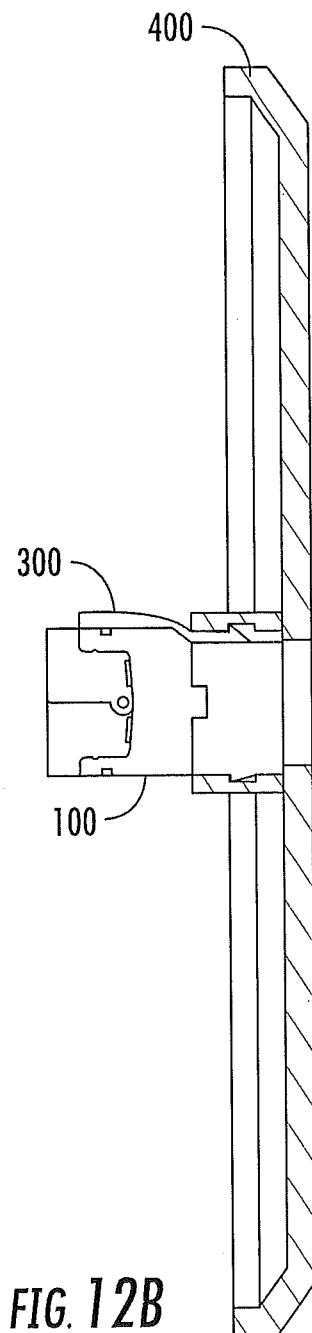
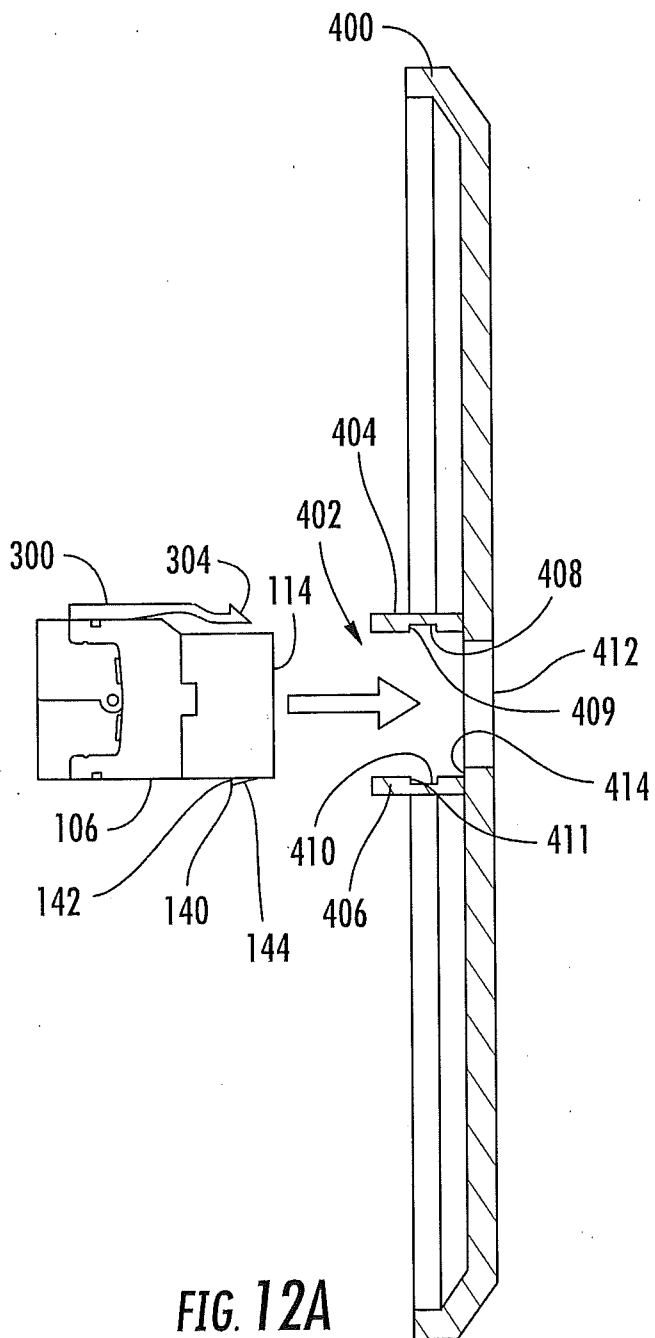


9/11

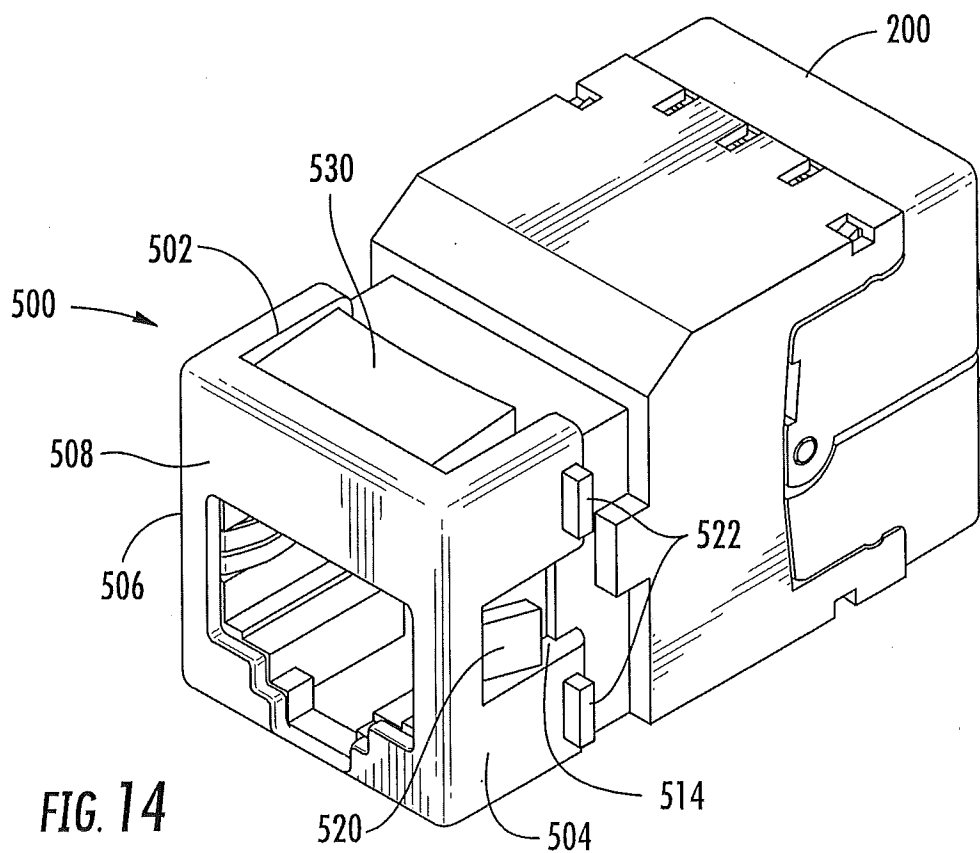

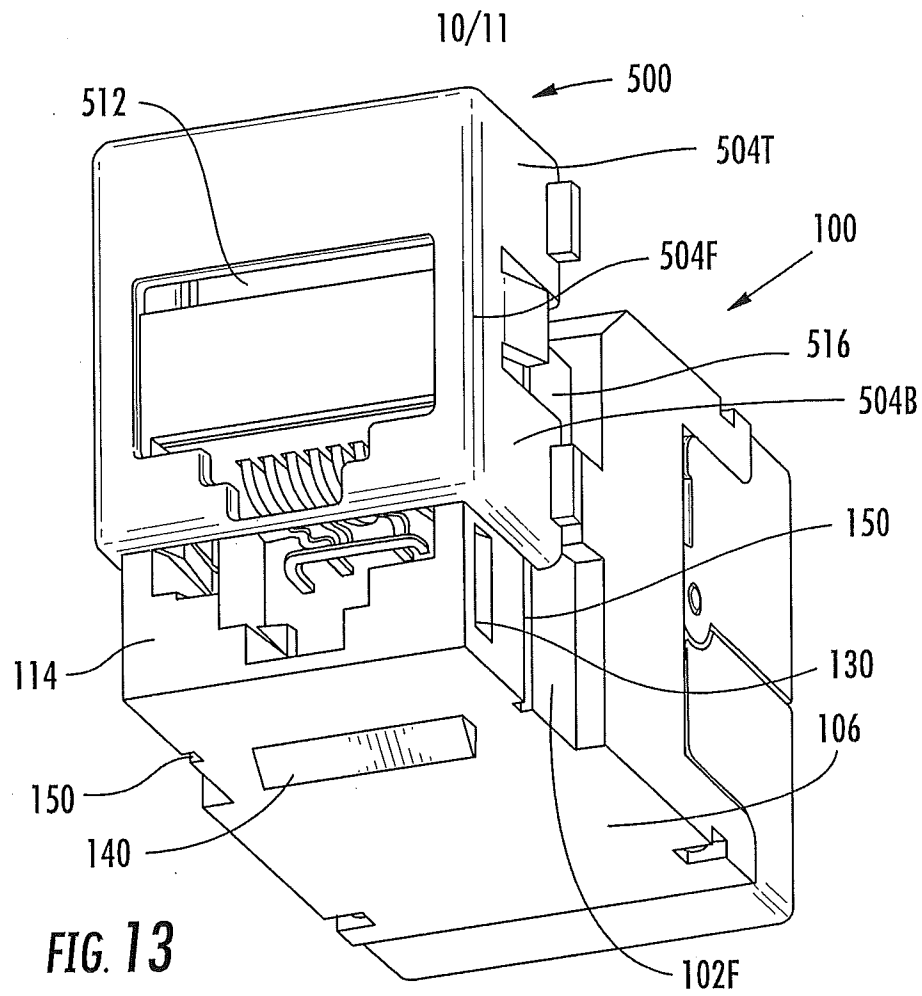

11/11

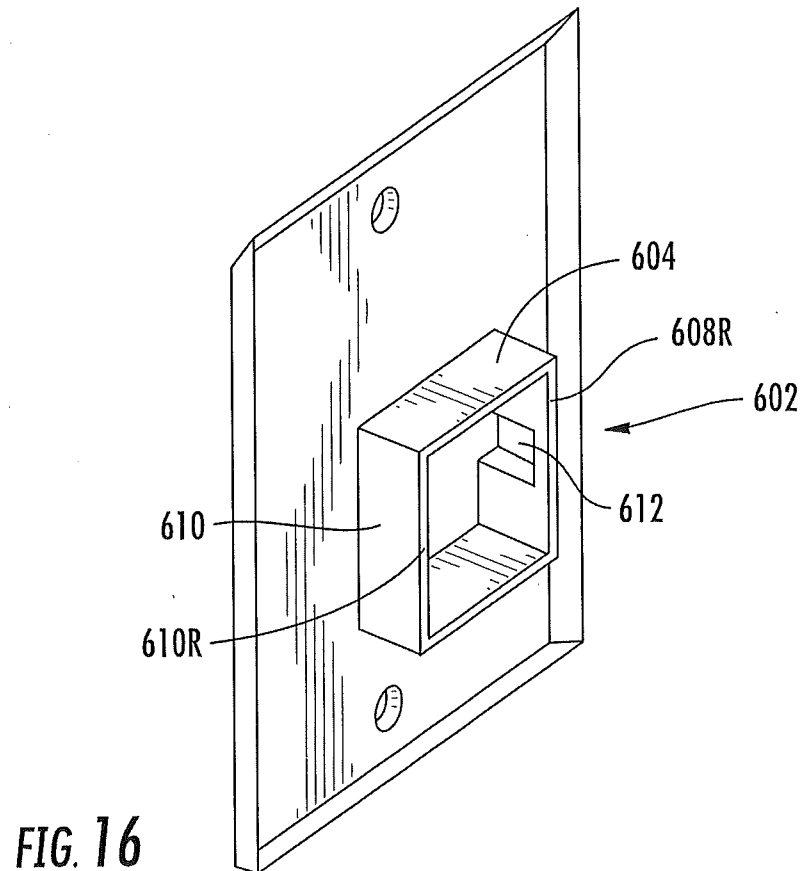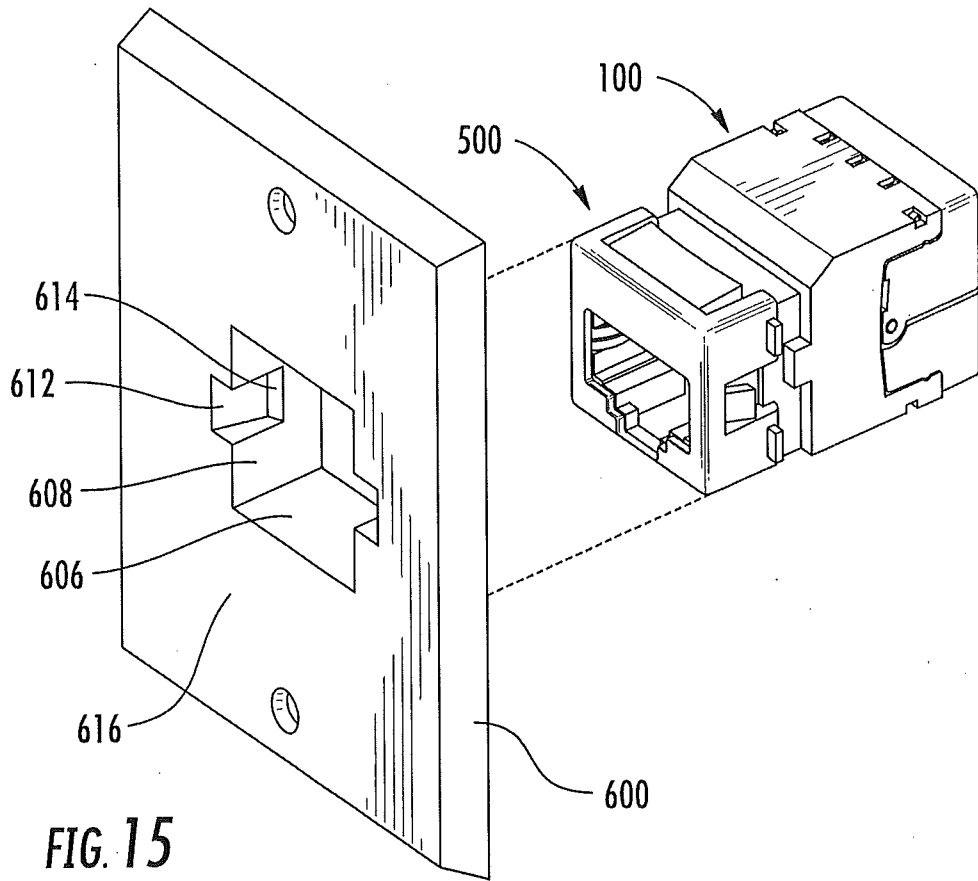

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/021960

A. CLASSIFICATION OF SUBJECT MATTER

INV. H01R13/74 H01R27/00 H01R24/64
ADD. H01R13/627

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2009/247007 A1 (MILETTE LUC [CA]) 1 October 2009 (2009-10-01) paragraph [0014]; figures 3,4A,4B -----	1-23
A	US 5 125 852 A (ARCHER LEE A [US]) 30 June 1992 (1992-06-30) column 2 - column 4; figures 1,2,4 -----	1-23
A	US 2006/134971 A1 (BYRNE NORMAN R [US]) 22 June 2006 (2006-06-22) figure 2 -----	1-23
A	US 2006/019533 A1 (PENG YUAN-HUEI [TW]) 26 January 2006 (2006-01-26) abstract; figure 3(A) -----	1-23



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"&" document member of the same patent family

Date of the actual completion of the international search

5 April 2012

Date of mailing of the international search report

16/04/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Vautrin, Florent

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/021960

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009247007	A1	01-10-2009	NONE
US 5125852	A	30-06-1992	NONE
US 2006134971	A1	22-06-2006	NONE
US 2006019533	A1	26-01-2006	TW M261883 U 11-04-2005 US 2006019533 A1 26-01-2006