



- (51) **International Patent Classification:**
H04L 25/06 (2006.01)
- (21) **International Application Number:**
PCT/US2015/015851
- (22) **International Filing Date:**
13 February 2015 (13.02.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
201410092951.6 13 March 2014 (13.03.2014) CN
- (71) **Applicant:** GENERAL ELECTRIC COMPANY
[US/US]; 1 River Road, Schenectady, NY 12345 (US).
- (72) **Inventors:** WANG, Lifeng; 160 Wenjing Road, Min Hang District, ShangHai, ShangHai, 200245 (CN). WU, Xiaojie; 160 Wenjing Rd, Min Hang District, ShangHai, ShangHai, 200245 (CN). YANG, Xianhong; 160 Wenjing Road, Min Hang District, ShangHai, ShangHai, 200245 (CN).
- (74) **Agents:** CONKLIN, Mark, A. et al.; General Electric Company, Global Patent Operation, 3135 Easton Turnpike, Fairfield, CT 06828 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

[Continued on next page]

- (54) **Title:** SUPERPOSED SIGNAL SAMPLING APPARATUS AND SAMPLING METHOD

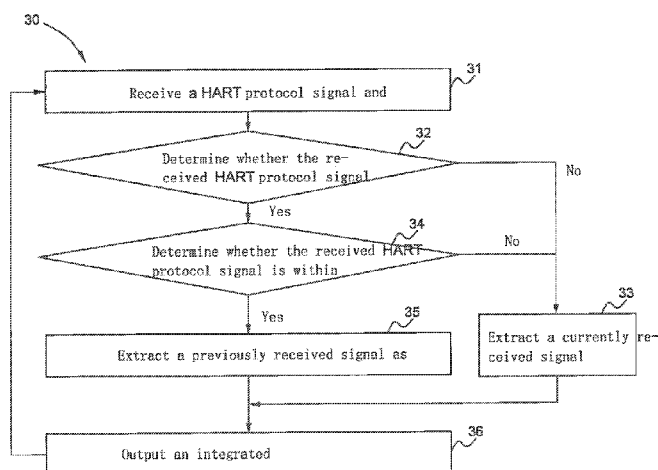


Fig. 3

- (57) **Abstract:** The present invention relates to a superposed signal sampling apparatus, including: a signal receiving module, a signal extracting module, and a signal output module. The signal receiving module is used to receive a superposed signal. The signal extracting module is used to determine whether the received superposed signal is within a preset threshold range of a direct current signal; if the received superposed signal is within the threshold range, extract a previously received signal as a direct current signal to be output; and if the received superposed signal is beyond the threshold range, extract a currently received signal as a direct current signal to be output. The signal output module is used to integrate the direct current signal extracted by the signal extracting module, and then output the direct current signal. The present invention further relates to a superposed signal sampling method.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

SUPERPOSED SIGNAL SAMPLING APPARATUS AND SAMPLING METHOD

TECHNICAL FIELD

[0001] The present invention relates to a signal sampling apparatus and method, and in particular, to a sampling apparatus and method that are used to extract a direct current signal from a superposed signal of a direct current signal and an alternating current signal.

BACKGROUND OF THE INVENTION

[0002] An open Highway Addressable Remote Transducer (Highway Addressable Remote Transducer, HART) communication protocol is a communication protocol used between a smart field instrument and a control room device. An HART apparatus provides communication of relatively low bandwidth and proper response time, and a HART technology has tended to be mature at home and abroad and has become one global industrial standard of smart instruments.

[0003] The HART protocol uses a frequency shift keying (Frequency-shift keying, FSK) signal based on Bell (Bell) 202 standard, where an alternating current digital signal of an amplitude of 0.5mA is superposed on a 4–20mA direct current analog signal so as to perform bidirectional digital communication, a data transmission rate is 1.2kbps, and alternating current digital signal frequencies that represent place values "0" and "1" are separately 2200Hz and 1200Hz. Because an average value of the FSK signal is 0, no interference is caused to the direct current analog signal when the low-level alternating current digital signal is superposed on the 4–20mA direct current analog signal, thereby ensuring compatibility with an existing analog system.

[0004] Although the alternating current signal superposed on the direct current signal does not cause any interference to the direct current signal in a transmission process, the direct current signal is affected by the alternating current signal when it is required to extract the direct current signal from the superposed signal, so that a deviation occurs between an extracted direct current signal and an original signal. In a traditional data sampling method, dedicated data processing hardware may be used to extract the direct current signal from the superposed signal. Although a direct current signal of relatively high precision may be extracted in this method, costs increase because a dedicated hardware device is introduced. In some other traditional methods, the direct current signal also is extracted by only programming existing hardware; however, precision of

most extracted direct current signals is still relatively low and cannot meet a requirement of subsequent data processing in some cases.

[0005] Therefore, it is necessary to provide a new superposed signal sampling apparatus and sampling method to solve the foregoing problem.

SUMMARY OF THE INVENTION

[0006] One or more aspects are summarized in the present invention to facilitate a basic understanding of the present invention, where the induction of the present invention do not extend the overview, and is neither intended to identify certain elements of the present invention, nor intended to draw out of its range. On the contrary, the main purpose of the induction is to present some concepts of the present invention in a simplified form before more detailed descriptions are presented below.

[0007] The present invention provides a superposed signal sampling apparatus, configured to extract a direct current signal from a superposed signal, where the apparatus includes:

a signal receiving module, configured to receive a superposed signal;

a signal extracting module, configured to determine whether the received superposed signal is within a preset threshold range of a direct current signal; if the received superposed signal is within the threshold range, extract a previously received signal as a direct current signal to be output; and if the received superposed signal is beyond the threshold range, extract a currently received signal as a direct current signal to be output; and

a signal output module, configured to integrate the direct current signal extracted by the signal extracting module, and then output the direct current signal.

[0008] The present invention further provides a superposed signal sampling method, used to extract a direct current signal from a superposed signal, where the method includes:

- (a) receiving a superposed signal;
- (b) determining whether the received superposed signal is within a preset threshold range of a direct current signal; if the received superposed signal is within the threshold range, performing step (c); otherwise, performing step (d);
- (c) extracting a previously received signal as a direct current signal to be output;
- (d) extracting a currently received signal as a direct current signal to be output; and

- (e) integrating the direct current signal extracted in step (c) or (d) and then outputting the direct current signal, and returning to step (a).

[0009] Compared with the prior art, the superposed signal sampling apparatus and method in the present invention use a determining criterion of a set threshold range to determine a direct current signal to be extracted. This method is simple and practicable, and precision can be adjusted by adjusting a preset threshold range. In addition, the sampling apparatus and method may be directly built in an existing data processing system, without a need to dedicatedly dispose a dedicated hardware device, and therefore no additional costs are added.

BRIEF DESCRIPTION OF DRAWINGS

[0010] The present invention may be understood in a better way by describing the implementation manners of the present invention with reference to the accompanying drawings, and in the accompanying drawings:

[0011] FIG. 1 is a schematic diagram of a HART protocol signal;

[0012] FIG. 2 is a block diagram of a preferable implementation manner of a superposed signal sampling apparatus in the present invention;

[0013] FIG. 3 is a flowchart of a preferable implementation manner of a superposed signal sampling method in the present invention;

[0014] FIG. 4 shows a schematic diagram of different phases in which a superposed signal sampling apparatus and sampling method are used to extract a direct current signal from a HART protocol signal within a time range;

[0015] FIG. 5 shows a simulation comparison diagram of direct current signals obtained by applying a traditional sampling method and by applying a sampling method in the present invention; and

[0016] FIG. 6 is a flowchart of another preferable implementation manner of a superposed signal sampling method in the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0017] The following will describe specific implementation manners of the present invention. It should be noted that, in the specific description process of these implementation manners, in order to make terse and concise descriptions, it is impossible to describe in the specification all features of an actual implementation manner in detail. It should be understood that, in an actual implementation process of any one implementation manner, as in a process of

any one project or design project, in order to achieve the developers' specific goals, or in order to meet system-related or business-related limitations, various specific decisions may usually be made, and the decisions may change from one embodiment to another embodiment. In addition, it can also be understood that, although efforts made in the development process may be complicated and lengthy, for a person of ordinary skill in the art related to the content disclosed in the present invention, some changes, such as in design, manufacturing, or production, made based on the technical content disclosed in the disclosure are common technical means, and should be construed that the content of the disclosure is not sufficient.

[0018] Unless otherwise defined, the technical terms or scientific terms used in the claims and specification should be the ordinary meaning understood by a person of ordinary skill in the technical field of the present invention. "First", "second" and similar words used in the patent application specification and claims of the present invention do not denote any order, quantity, or importance, but are just used to distinguish different components. "A" or "an" and other similar words do not denote quantity limitations, but denote that at least one exists. "Comprises" or "comprising" and other similar words imply that an element or object appearing before the "comprises" or "comprising" covers enumerated elements or objects and equivalents elements thereof appearing after the "comprises" or "comprising", and other elements or objects are not excluded. "Connected" or "coupled" and other similar words are not limited to physical or mechanical connections, but may include electrical connections, either in a direct or indirect manner.

[0019] Refer to FIG. 1, which is a schematic diagram of a HART protocol signal 100. It should be noted that, only one example in which the HART protocol signal 100 is used as a to-be-processed signal is provided in a specific implementation manner of the present invention; and in another implementation manner, similar signal processing may also be performed on another type of direct-current/alternating-current superposed signal, which is not described in detail herein. It may be known that when a type of the to-be-processed signal changes, a person skilled in the art may perform an adaptive fine adjustment based on a signal change, for example, may adjust a signal threshold range; and specifically may perform an adjustment according to an actual requirement.

[0020] In the example in FIG. 1, the HART protocol signal 100 includes one 4–20mA direct current signal 110 and an alternating current signal 120 that is superposed on the direct current

signal 110 and is located in different time ranges. Because the example provided in this implementation manner is a HART protocol signal, an amplitude range of the direct current signal 110 is 4–20mA; and the alternating current signal 120 includes two frequency bands, that is, frequency bands 2200Hz and 1200Hz that represent digital signals "0" and "1", respectively. In addition, the alternating current signal 120 may further include two kinds of signals, where one kind is a command signal (a time range denoted by "C" in the figure), and the other kind is a response signal (a time range denoted by "R" in the figure). In another implementation manner, an amplitude range of a direct current signal in a to-be-processed direct-current/alternating-current superposed signal may be adjusted according to an actual requirement, a frequency of an alternating current signal may also be adjusted according to an actual requirement, and a time interval in which the alternating current signal is superposed on the direct current signal may also be adjusted according to an actual requirement, which is not limited to one implementation manner.

[0021] Refer to FIG. 2, which is a block diagram of a preferable implementation manner of a superposed signal sampling apparatus 10 in the present invention. The superposed signal sampling apparatus 10 includes a signal receiving module 12, a signal filtering module 14, a signal extracting module 16, and a signal output module 18. In this implementation manner, the foregoing modules are independent modules. In another implementation manner, any two or more modules in the foregoing modules may also be integrated into one module, or any module in the foregoing modules may further be divided into two or more submodules.

[0022] When sampling is performed on a HART protocol signal 100, sampling is separately performed on a direct current signal and an alternating current signal that are on the HART protocol signal 100, so as to perform subsequent data processing according to an obtained independent direct current signal and independent alternating current signal. For example, a function of a corresponding apparatus is adjusted according to a parameter change in a time range in the direct current signal. Because the subsequent data processing is not an invention point in the present invention, a specific example is not provided herein. In addition, the superposed signal sampling apparatus 10 in the present invention performs sampling processing only on the direct current signal in the HART protocol signal 100, while a sampling processing part of the alternating current signal may be implemented by using a conventional technology, so that a specific example is not provided herein either.

[0023] Generally, the subsequent data processing according to the direct current signal in the HART protocol signal 100 is generally performed by a subsequent data processing system (not shown). To save costs, the superposed signal sampling apparatus 10 may be a part of an internal data processing unit in the subsequent data processing system, for example, a part of a single-chip microcomputer. Because the data processing system is an existing hardware device but not a hardware device disposed independently and dedicatedly, no additional costs are added if the superposed signal sampling apparatus 10 is built in the data processing system. Certainly, if factors such as costs are not considered, an independent hardware device may also be introduced to implement a function of the superposed signal sampling apparatus 10.

[0024] Refer to FIG. 3 with reference to FIG. 2 and FIG. 4. FIG. 3 is a flowchart of a preferable implementation manner 30 of a superposed signal sampling method in the present invention. The method 30 is implemented by the superposed signal sampling apparatus 10 by executing an internal program. In this implementation manner, the method 30 includes the following steps.

[0025] In step 31, the signal receiving module 12 receives a HART protocol signal (such as the HART protocol signal 100 in FIG. 1), and the signal filtering module 14 performs filtering processing on the HART protocol signal, such as a segment of HART protocol signal 41 after being filtered shown in time range T0–T5 in FIG. 4. Because some noise interference may occur in a signal receiving process in some cases, preliminary filtering processing may be performed selectively, where the filtering herein is filtering processing performed by using a traditional filtering manner on an original signal. For example, 220V alternating current common-mode interference (the signal filtering module 14 is a window filter in this case) may be reduced by using a window filtering processing manner, or proper preliminary filtering processing may be performed by using another traditional filtering processing manner. Noise in the HART protocol signal 41 may be filtered out after the filtering processing, and only a required superposed signal of a direct current signal and an alternating current signal is remained in an ideal condition. In some cases, preliminary filtering processing may not be performed.

[0026] In step 32, the signal extracting module 16 determines whether the HART signal 41 is performing HART communication, that is, whether the HART protocol signal 41 is in a transmission state that the alternating current signal is superposed on the direct current signal. For example, time ranges T0–T1 and T3–T4 shown in FIG. 4 are a transmission state of only the

direct current signal, while other time ranges T1–T3 and T4–T5 are a transmission state that the alternating current signal is superposed on the direct current signal. For a HART protocol signal, one corresponding start state signal is sent when HART communication starts, and one corresponding end state signal is also sent when HART communication ends. That is, when receiving the start state signal, the signal extracting module 16 can determine that HART communication occurs; and when receiving the end state signal, the signal extracting module 16 can determine that HART communication ends. In another implementation manner, time of the transmission state that the alternating current signal is superposed on the direct current signal may also be determined by using another manner, which is not limited to a HART communication manner. If a result of the determining is no, step 33 is to be performed; and if the result of the determining is yes, step 34 is to be performed.

[0027] In step 33, because the result of the foregoing determining is the transmission state of only the direct current signal, for example, time range T0–T1 in FIG. 4, a current signal of the received HART signal 41 is a direct current signal that needs to be extracted. Therefore, in this case, the signal extracting module 16 directly extracts the currently received signal as a direct current signal to be output, and then the signal output module 18 outputs the direct current signal in real time to a subsequent data processing system for subsequent processing, that is, performing of step 36. It may also be seen from the schematic diagram shown in FIG. 4 that, in time range T0–T1 and time range T3–T4, both an extracted signal 42 and an output signal 43 are the same as the received signal 41.

[0028] In step 34, because the result of the foregoing determining is the state that the alternating current signal is superposed on the direct current signal, for example, time range T1–T3 in FIG. 4, the received HART signal 41 is a superposed signal and cannot be directly extracted as a direct current signal to be output. In this case, the signal extracting module 16 compares the received HART signal 41 with a preset threshold range, for example, a threshold range between curves 411 and 412 in the figure, and the threshold range may be determined according to a precision requirement of a direct current signal that needs to be extracted, where a higher precision requirement indicates a smaller threshold range; and a lower precision requirement indicates a larger threshold range. When a value of the HART signal 41 falls within the threshold range, for example, within time range T1–T2, step 35 is to be performed; otherwise, step 33 is to be performed.

[0029] In step 35, in this case, the value of the HART signal 41 falls within the threshold range, and therefore it is considered that a direct current signal in the HART signal 41 does not have an amplitude change itself. The deviation is due to interference of an alternating current signal on the HART signal 41, and therefore, in this case, a previously received signal is extracted as a direct current signal to be output, for example, time range T1–T2 in FIG. 4, and the extracted signal 42 keeps a signal value at time point T1 all the time. On the contrary, if the value of the HART signal 41 falls beyond the threshold range, step 33 is to be performed directly after step 34, that is, in this case, it is considered that a change of the direct current signal itself in the HART signal 41 causes the deviation greater than the threshold range. Therefore, the currently received signal is extracted as a direct current signal to be output. For example, a signal at time point T2 in FIG. 4 is greater than the threshold range, and therefore a value of the signal is directly used as a direct current signal to be output.

[0030] In step 36, according to the signals generated in the foregoing step 33 and step 35, the signal output module 18 integrates the signals in the two steps and then outputs the signals. Then, return to step 31 and repeat the foregoing steps. As shown in FIG. 4, the initial signal 41 is output as the final output signal 43 after the foregoing steps and by integrating the extracted signal 42, where the final output signal 43 is a direct current signal part of the initial signal 41. Extraction precision of the direct current signal part may be implemented by adjusting the threshold range according to a requirement, which is quite convenient.

[0031] Refer to FIG. 5. The figure above is an output signal 52 of a HART signal after step 31, and a direct current signal in this case is still greatly interfered by an alternating current signal, which is difficult for a subsequent device to acquire a value represented by the direct current signal. In addition, the figure below is an output signal 54 of a HART signal after the foregoing steps 31–36. Compared with the signal 52, the output signal 54 has obviously improved precision.

[0032] Continue to refer to FIG. 6, which is a flowchart of another preferable implementation manner 60 of a superposed signal sampling method in the present invention. The method 60 is not only applicable to the foregoing exemplary HART protocol signal but also is applicable to any direct-current/alternating-current superposed signal. Compared with the method 30 in FIG. 3, steps 61, 62, 63, 64, and 65 in the method 60 are respectively corresponding to step 31, 34, 33, 35, and 36 in the method 30, that is, step 32 in the method 30 is

omitted in the method 60. This is because some direct-current/alternating-current superposed signals are direct-current/alternating-current superposition all the time, and there is no time range in which only direct current transmission exists. Therefore, there is no need to set step 32. Specific operations of the method 60 are not described further. For details, refer to related description of corresponding parts in the method 30 in the foregoing paragraphs.

[0033] Although the present invention is described with reference to specific implementation manners, a person skilled in the art should understand that, many modifications and variations may be made for the present invention. Therefore, it should be noted that, intention of the claims lies in all the modifications and variations covered in a real concept and scope of the present invention.

CLAIMS

What we claim is:

1. A superposed signal sampling apparatus, configured to extract a direct current signal from a superposed signal, wherein the apparatus comprises:
 - a signal receiving module, configured to receive a superposed signal;
 - a signal extracting module, configured to determine whether the received superposed signal is within a preset threshold range of a direct current signal; if the received superposed signal is within the threshold range, extract a previously received signal as a direct current signal to be output; and if the received superposed signal is beyond the threshold range, extract a currently received signal as a direct current signal to be output; and
 - a signal output module, configured to integrate the direct current signal extracted by the signal extracting module, and then output the direct current signal.
2. The superposed signal sampling apparatus according to claim 1, wherein the apparatus further comprises a signal filtering module, configured to perform filtering processing on the superposed signal received by the signal receiving module.
3. The superposed signal sampling apparatus according to claim 2, wherein the signal filtering module is a window filter .
4. The superposed signal sampling apparatus according to any one of claims 1 to 3, wherein the superposed signal is a HART protocol signal.
5. The superposed signal sampling apparatus according to claim 4, wherein the signal extracting module is further configured to determine whether the received HART protocol signal is performing HART communication; if the HART protocol signal is not performing HART communication, extract the currently received signal as a direct current signal to be output; and if

the HART protocol signal is performing HART communication, continue to perform determining of the foregoing threshold range.

6. A superposed signal sampling method, used to extract a direct current signal from a superposed signal, wherein the method comprises:

(a) receiving a superposed signal;

(b) determining whether the received superposed signal is within a preset threshold range of a direct current signal; if the received superposed signal is within the threshold range, performing step (c); otherwise, performing step (d);

(c) extracting a previously received signal as a direct current signal to be output;

(d) extracting a currently received signal as a direct current signal to be output; and

(e) integrating the direct current signal extracted in step (c) or (d), and then outputting the direct current signal, and returning to step (a).

7. The superposed signal sampling method according to claim 6, before step (b), further comprising the following step: performing filtering processing on the received superposed signal.

8. The superposed signal sampling method according to claim 7, wherein the filtering processing is window filtering processing.

9. The superposed signal sampling method according to any one of claims 6 to 8, wherein the superposed signal is a HART protocol signal.

10. The superposed signal sampling method according to claim 9, before step (b), further comprising the following step: determining whether the received HART protocol signal is performing HART communication; if the received HART protocol signal is performing HART communication, performing step (b); otherwise, performing step (d).

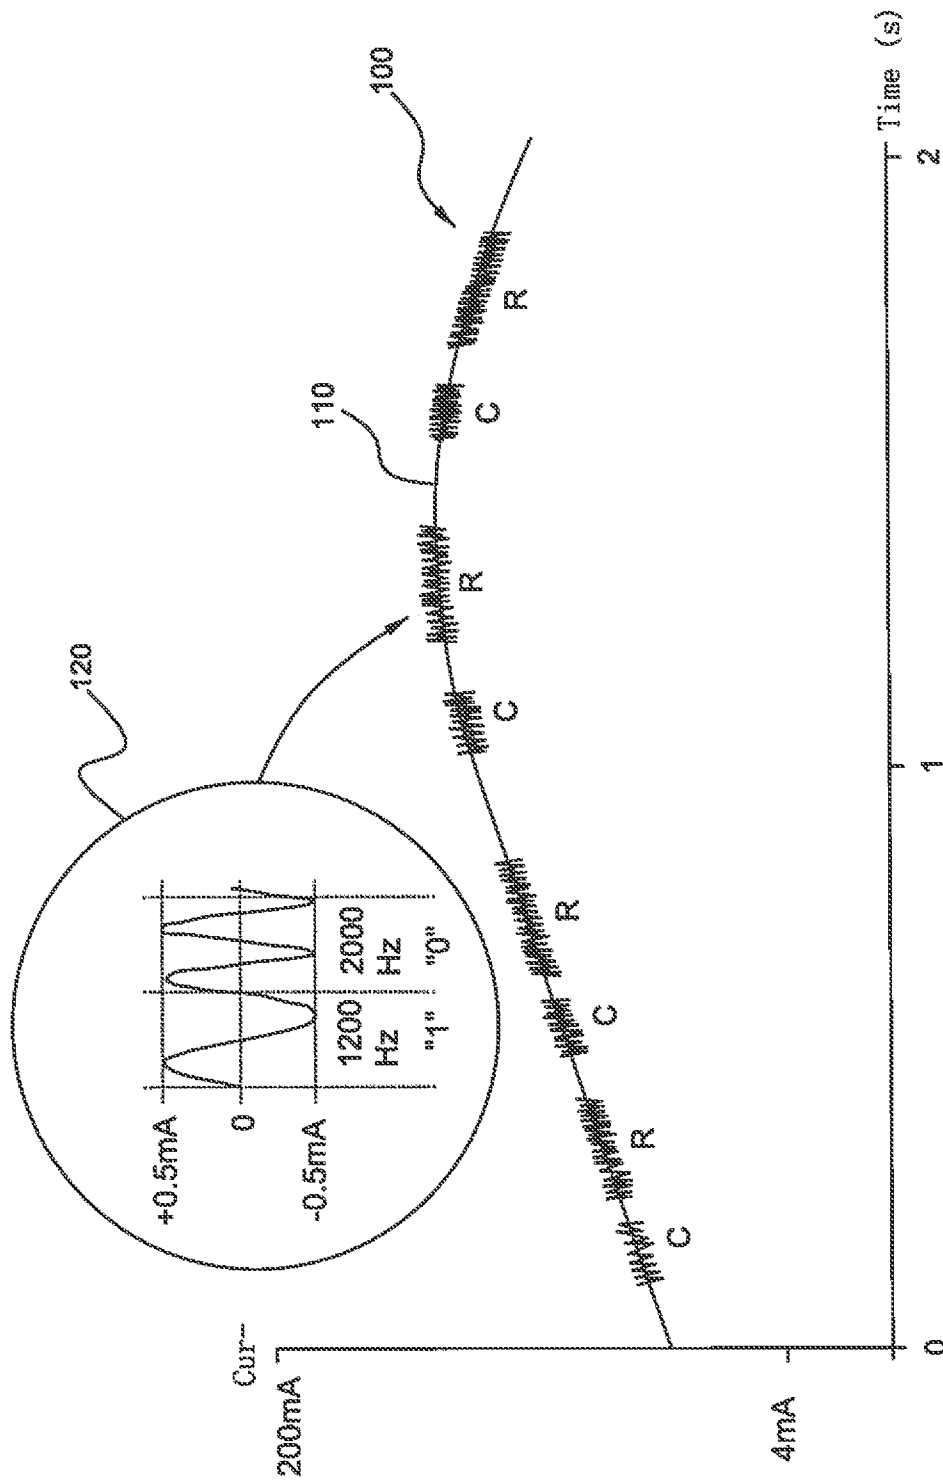


Fig. 1

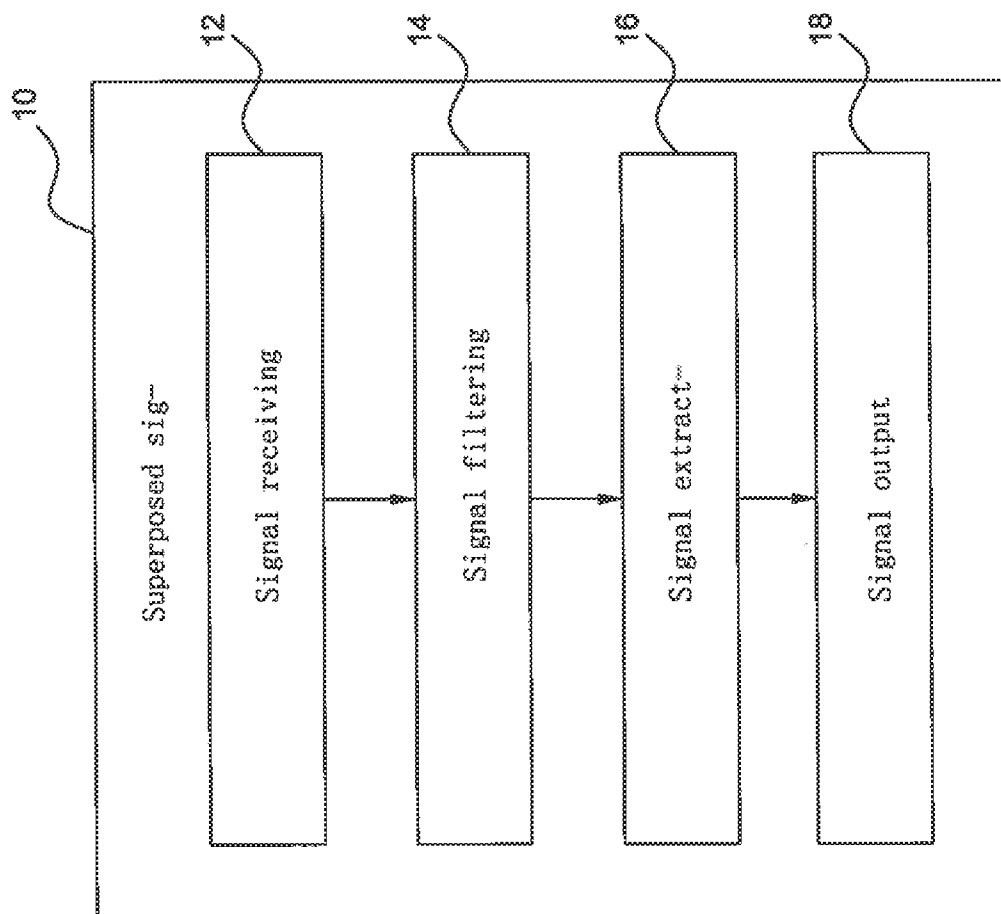


Fig. 2

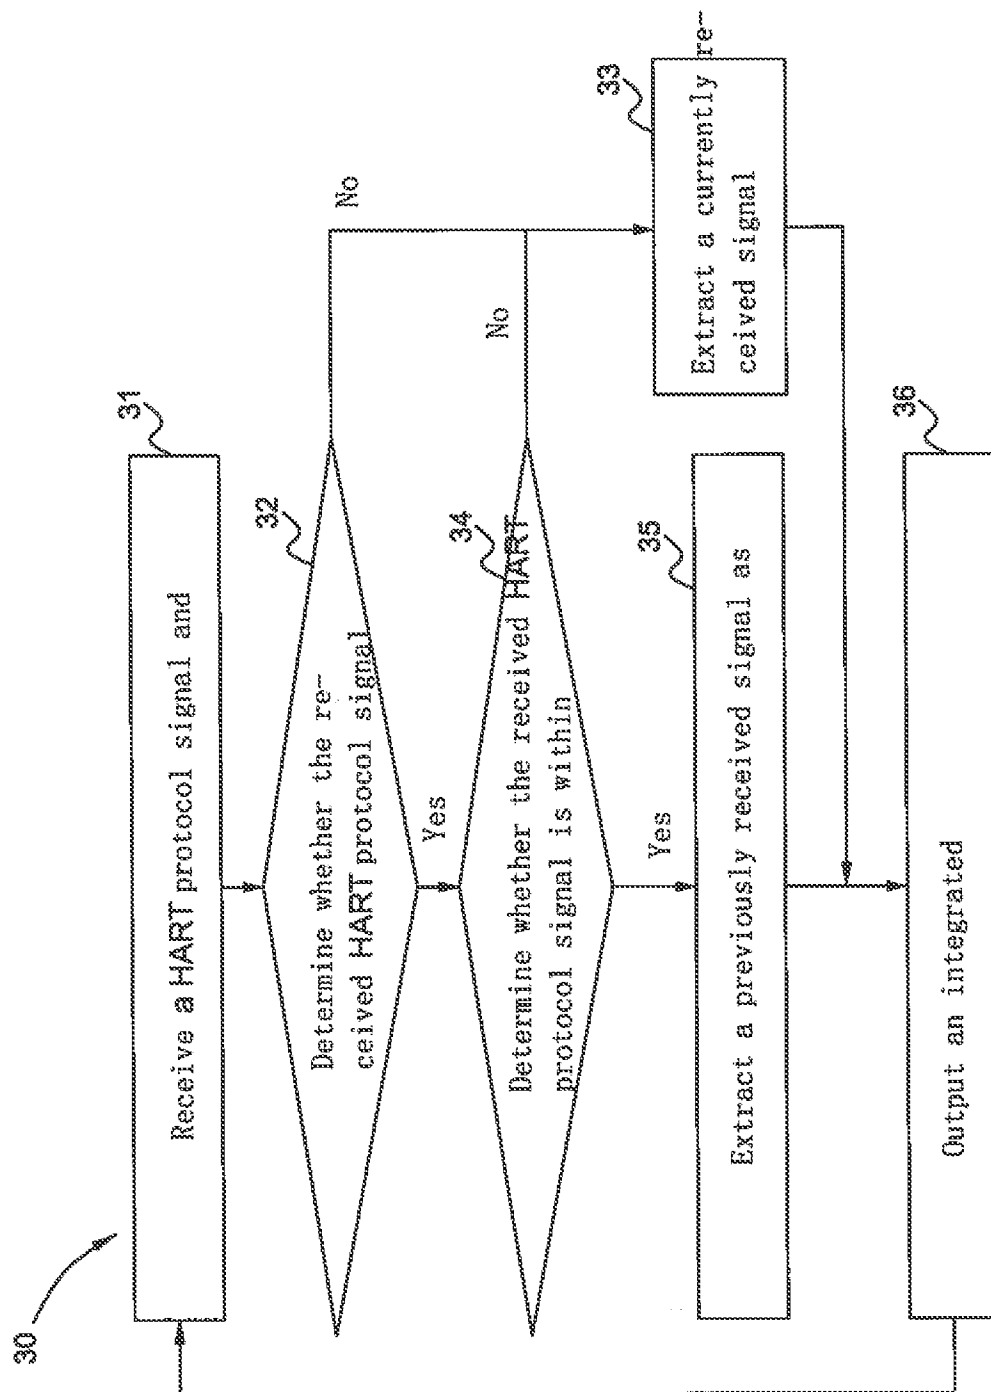


Fig. 3

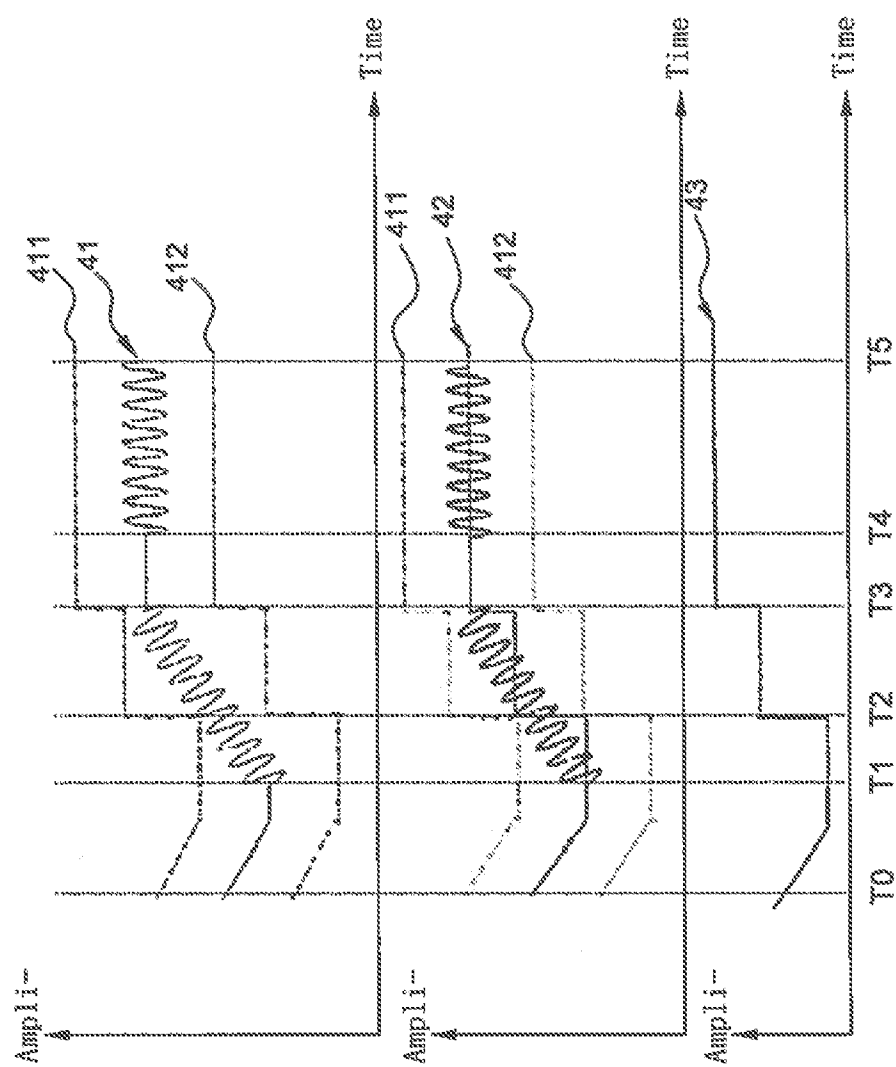


Fig. 4

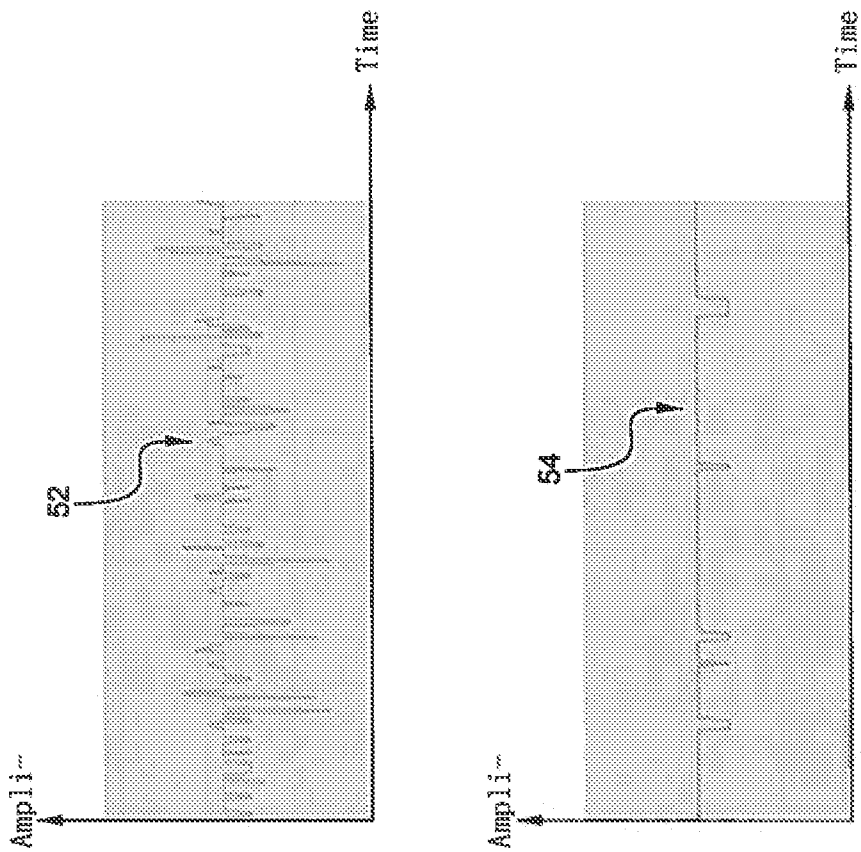


Fig. 5

6/6

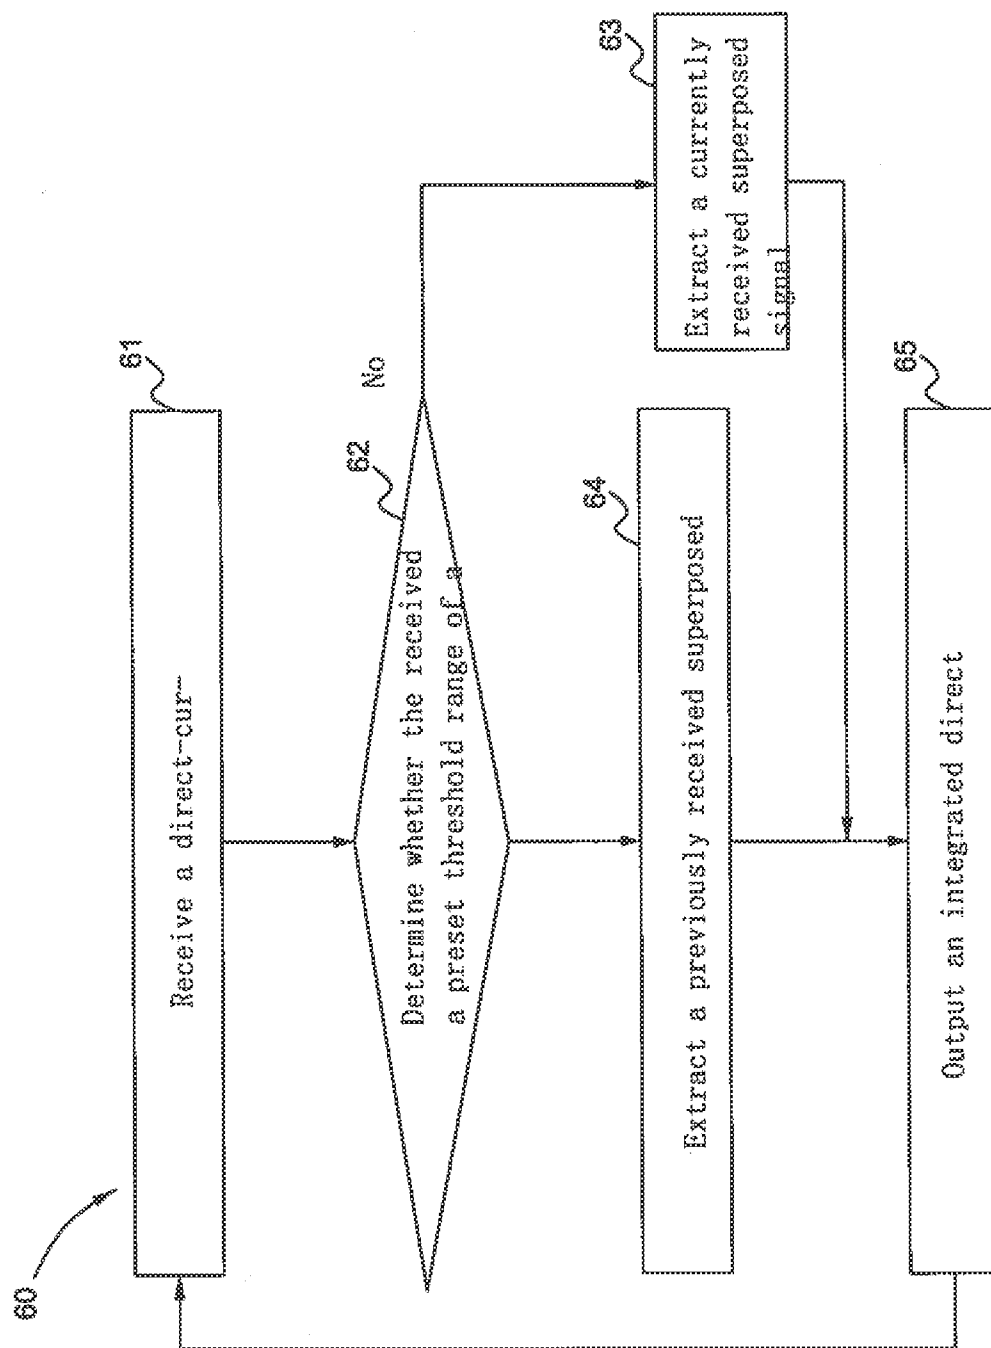


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/015851

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04L25/06
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2012/020430 A1 (HAASE BJORN [DE] ET AL) 26 January 2012 (2012-01-26) figure 19 -----	1-10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 June 2015

Date of mailing of the international search report

03/07/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Baltersee, Jens

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/015851

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012020430 A1	26-01-2012	CN 102439925 A	02-05-2012
		EP 2412135 A2	01-02-2012
		US 2012020430 A1	26-01-2012
		WO 2010108803 A2	30-09-2010
		WO 2010108924 A2	30-09-2010
