



(51) International Patent Classification:
E04B 9/30 (2006.01)

(21) International Application Number:
PCT/US2017/048562

(22) International Filing Date:
25 August 2017 (25.08.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/381,204 30 August 2016 (30.08.2016) US

(71) Applicant: **ARMSTRONG WORLD INDUSTRIES, INC.** [US/US]; 2500 Columbia Avenue, P.O. Box 3001, Lancaster, Pennsylvania 17604-3001 (US).

(72) Inventors: **BERGMAN, Todd M.**; 53 Evergreen Court, Lititz, Pennsylvania 17543 (US). **HARNISH, Scott D.**; 1005 Grandview Blvd., Lancaster, Pennsylvania 17601 (US). **HANUSCHAK, Ryan D.**; 425 N. Prince Street, Apartment 303, Lancaster, Pennsylvania 17603 (US). **VAN**

DORE, Jonathan P.; 4 Sensenich Drive, Lititz, Pennsylvania 17543 (US).

(74) Agent: **STERNER, Craig M.**; ARMSTRONG WORLD INDUSTRIES, INC., 2500 Columbia Avenue, P.O. Box 3001, Lancaster, Pennsylvania 17604-3001 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: CEILING SYSTEM AND MOUNTING BRACKET FOR USE WITH THE SAME

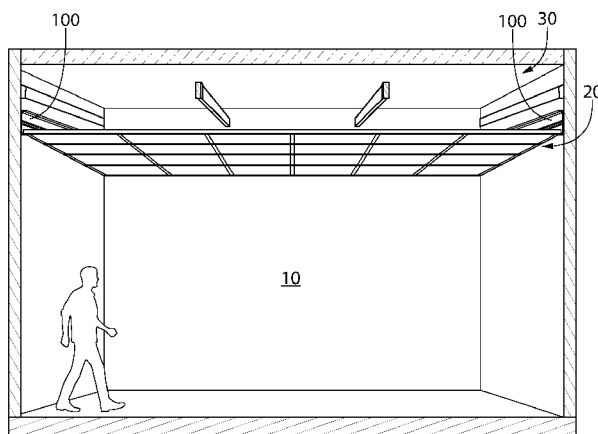


FIG. 1

(57) Abstract: A ceiling system having a perimeter frame; a grid configured to support a plurality of substrates; and a plurality of bracket assemblies coupling the grid to the perimeter frame, the plurality of bracket assemblies adjustable between a plurality of states in which the grid is supported at a different height relative to the perimeter frame in each of the plurality of states.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

CEILING SYSTEM AND MOUNTING BRACKET FOR USE WITH THE SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a PCT International Application of United States Patent Application of U.S. Provisional Application No. 62/381,204, filed on August 30, 2016. The disclosure of the above application is incorporated herein by reference.

BACKGROUND

[0002] The present invention generally relates to ceiling systems and mounting brackets for use with the same.

[0003] Some ceiling systems, for example grid ceiling systems, can be used with a large variety of ceiling panels or substrates. One variety of these various panels or substrates can have a particular thickness while another variety can have a different thickness. These different thicknesses can result in the need to use different depth perimeter frames and/or different size mounting brackets. Manufacturing many different sizes of this hardware is expensive and requires the maintenance of a large inventory.

BRIEF SUMMARY

[0004] The present invention provides a solution to the above described problem of having to use a different mounting bracket for each size ceiling panel. The present invention provides an adjustable mounting bracket that attaches a ceiling grid, or other ceiling system, to a perimeter frame that is, in turn, attached to perimeter walls or other perimeter structure. The mounting bracket permits the ceiling grid to be installed at a plurality of vertical positions relative to the perimeter frame so that the particular panel or substrate can be accommodated. The invention provides a mounting bracket that has one portion that attaches to the perimeter frame and a separate portion that attaches to the grid. The grid portion of the mounting bracket is attachable to the frame portion of the mounting bracket in a plurality of positions, each of the positions corresponding to a different vertical position of the grid relative to the perimeter frame.

[0005] According to one embodiment, a ceiling system includes a perimeter frame; a grid configured to support a plurality of substrates; and a plurality of bracket assemblies coupling the

grid to the perimeter frame, the plurality of bracket assemblies adjustable between a plurality of states in which the grid is supported at a different height relative to the perimeter frame in each of the plurality of states.

[0006] Some embodiments include the plurality of substrates, the plurality of substrates being supported by the grid.

[0007] In some embodiments, when the plurality of bracket assemblies are in each of the plurality of states, the plurality of substrates are supported in a substantially horizontal plane.

[0008] In some embodiments, each of the plurality of bracket assemblies includes a frame bracket coupled to the perimeter frame; and a grid bracket, the grid bracket comprising a first portion coupled to the frame bracket and a second portion coupled to the grid, the first portion of the grid bracket configured to be coupled to the frame bracket at a selected one of a plurality of different positions relative to the frame bracket, wherein each of the plurality of different positions corresponds to one of the plurality of states of the bracket assembly.

[0009] In some embodiments, for each of the plurality of bracket assemblies, the first portion of the grid bracket comprises a first plate and the second portion of the grid bracket comprises a second plate arranged substantially orthogonal to the first plate.

[0010] In some embodiments, for each of the plurality of bracket assemblies, the first plate extends along a longitudinal axis from a first end to a second end, the second plate of the grid bracket comprises a grid mounting section extending from the first plate adjacent the first end of the first plate.

[0011] In some embodiments, the grid bracket is configured to be mounted to the frame bracket in a selected one of: (1) a first arrangement in which the first end of the first plate is facing downward; and (2) a second arrangement in which the second end of the first plate is facing downward.

[0012] In some embodiments, for each of the plurality of bracket assemblies, the frame bracket comprises a guide element that contacts the grid bracket to maintain relative orientation between the frame bracket and the grid bracket.

[0013] In some embodiments, for each of the plurality of bracket assemblies, the first portion of the grid bracket comprises an elongated slot; and wherein each of the plurality of bracket

assemblies comprises a threaded fastener extending through the elongated slot and threadily engaging the frame bracket, the threaded fastener alterable between: (1) a free state in which the grid bracket can be moved relative to the frame bracket between the plurality of different positions; and (2) a locked state in which the grid bracket is fixed relative to the frame bracket in the selected one of the plurality of different positions.

[0014] In some embodiments, for each of the plurality of bracket assemblies, the elongated slot comprises an undulating edge that forms a plurality of nesting regions for receiving a widened portion of the threaded fastener, and wherein when the widened portion of the threaded fastener is in a selected one of the nesting regions, the undulating edge prohibits relative translation between grid bracket and the frame bracket.

[0015] In some embodiments, for each of the plurality of bracket assemblies, the grid bracket can be coupled to the frame bracket at the plurality of different positions incrementally.

[0016] In some embodiments, the second portion of the grid bracket comprises a grid mounting section and a tab section, the tab section separated from the grid mounting section by a pre-weakened line so as to be alterable from: (1) a first one of the plurality of states in which the tab section is coupled to the grid mounting section and the grid is supported at a first height relative to the perimeter frame; and (2) a second one of the plurality of states in which the tab section is removed from the grid mounting section and the grid is supported at a second height relative to the perimeter frame, the second height being different than the first height.

[0017] In some embodiments, the perimeter frame has a plurality of engagement portions, and each of the bracket assemblies has a first engaging portion that engages a first one of the engagement portions, and a second engaging portion that engages a second one of the engagement portions, such that the bracket assembly is positionally fixed relative to the perimeter frame by the engagement of the first and second engaging portions with the first and second engagement portions.

[0018] In some embodiments, the second engaging portion of the bracket assembly is movable relative to the first engaging portion of the bracket assembly.

[0019] In some embodiments, for each of the plurality of bracket assemblies, the frame bracket comprises a sliding portion that is movable relative to a main portion of the frame bracket, the

sliding portion having a guide element that contacts the main portion of the frame bracket to maintain relative orientation between the sliding portion and the main portion of the frame bracket.

[0020] In some embodiments, the second engaging portion of the bracket assembly is fixed to the sliding portion of the frame bracket.

[0021] In some embodiments, the perimeter frame is symmetrical about a horizontal plane when the perimeter frame is in an installed position.

[0022] In some embodiments, each of the plurality of bracket assemblies includes a frame bracket having a first portion coupled to the perimeter frame and a second portion coupled to the grid, wherein the second portion comprises a grid mounting section and a tab section, the tab section being separated from the grid mounting section by a pre-weakened line so as to be alterable from: (1) a first one of the plurality of states in which the tab section is coupled to the grid mounting section and the grid is supported at a first height relative to the perimeter frame; and (2) a second one of the plurality of states in which the tab section is removed from the grid mounting section and the grid is supported at a second height relative to the perimeter frame, the second height being different than the first height.

[0023] In some embodiments, the second portion of the frame bracket is arranged substantially orthogonal to the first portion of the frame bracket.

[0024] In some embodiments, the pre-weakened line is in a substantially horizontal plane.

[0025] In some embodiments, the second portion of the frame bracket is vertically offset relative to a vertical center point of the first portion of the frame bracket.

[0026] According to another embodiment, a bracket assembly for use with a ceiling system having a perimeter frame and a grid that supports a plurality of substrates, includes a frame bracket configured to be coupled to the perimeter frame; and a grid bracket, the grid bracket comprising a first portion coupled to the frame bracket and a second portion configured to be coupled to the grid, the first portion of the grid bracket being configured to be coupled to the frame bracket at a selected one of a plurality of different positions relative to the frame bracket such that the grid is supportable at a different height relative to the perimeter frame in each of the plurality of different positions.

[0027] According to yet another embodiment, a bracket assembly for use with a ceiling system having a perimeter frame and a grid that supports a plurality of substrates, includes a frame bracket having a first portion configured to be coupled to the perimeter frame, and a second portion configured to be coupled to the grid. The second portion comprises a grid mounting section and a tab section, the tab section being separated from the grid mounting section by a pre-weakened line so as to be alterable from: (1) a first state in which the tab section is coupled to the grid mounting section and the grid is supportable at a first height relative to the perimeter frame; and a second state in which the tab section is removed from the grid mounting section and the grid is supportable at a second height relative to the perimeter frame, the second height being different than the first height.

[0028] Further areas of applicability of the present invention will become apparent from the detailed description provided hereinafter. It should be understood that the detailed description and specific examples, while indicating the preferred embodiment of the invention, are intended for purposes of illustration only and are not intended to limit the scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0029] The present invention will become more fully understood from the detailed description and the accompanying drawings, wherein:

[0030] FIG. 1 is a side cross-section view of a plurality of ceiling structures suspended in an interior space to form a ceiling system;

[0031] FIG. 2 is a perspective view of perimeter frame, three-piece mounting bracket, and ceiling grid;

[0032] FIG. 3 is a side view of the structure shown in FIG. 2;

[0033] FIG. 4 is a perspective view of a three-piece mounting bracket;

[0034] FIG. 5 is a front view of the three-piece mounting bracket shown in FIG. 4;

[0035] FIG. 6 is a side view of the three-piece mounting bracket shown in FIG. 4;

[0036] FIG. 7 is a top view of the three-piece mounting bracket shown in FIG. 4;

[0037] FIG. 8 is a perspective view of a part of the three-piece mounting bracket shown in FIG. 4;

[0038] FIG. 9 is a perspective view of a two-piece mounting bracket;

[0039] FIG. 10 is a front view of the two-piece mounting bracket shown in FIG. 9;

[0040] FIG. 11 is a side view of the two-piece mounting bracket shown in FIG. 9;

[0041] FIG. 12 is a top view of the two-piece mounting bracket shown in FIG. 9;

[0042] FIG. 13 is a side view of a mounting bracket attached to a perimeter frame of a first size;

[0043] FIG. 14 is a side view of a mounting bracket attached to a perimeter frame of a second size;

[0044] FIG. 15 is a side view of a three-piece mounting bracket attached to a perimeter frame in a first position;

[0045] FIG. 16 is a side view of a three-piece mounting bracket attached to a perimeter frame in a second position;

[0046] FIG. 17 is a side view of a three-piece mounting bracket attached to a perimeter frame in a third position; and

[0047] FIG. 18 is a side view of a three-piece mounting bracket attached to a perimeter frame in two different positions.

DETAILED DESCRIPTION

[0048] The following description of embodiments is merely exemplary in nature and is in no way intended to limit the invention, its application, or uses.

[0049] As used throughout, ranges are used as shorthand for describing each and every value that is within the range. Any value within the range can be selected as the terminus of the range. In addition, all references cited herein are hereby incorporated by referenced in their entireties. In the event of a conflict in a definition in the present disclosure and that of a cited reference, the present disclosure controls.

[0050] In the description of embodiments disclosed herein, any reference to direction or orientation is merely intended for convenience of description and is not intended in any way to limit the scope of the present invention. Relative terms such as "lower," "upper," "horizontal," "vertical," "above," "below," "up," "down," "top" and "bottom" as well as derivative thereof (e.g., "horizontally," "downwardly," "upwardly," etc.) should be construed to refer to the orientation as then described or as shown in the drawing under discussion. These relative terms are for convenience of description only and do not require that the apparatus be constructed or operated in a particular orientation. Terms such as "attached," "coupled," "affixed," "connected," "interconnected," and the like refer to a relationship wherein structures are secured or attached to one another either directly or indirectly through intervening structures, as well as both movable or rigid attachments or relationships, unless expressly described otherwise.

[0051] FIG. 1 illustrates a ceiling system 20 that spans from wall to wall to separate a building occupied space 10 from a plenum space 30. In this example, ceiling system 20 is a grid system that includes a number of intersecting rails that support a number of panels or substrates. The rails are attached at their wall ends to a perimeter frame 100. The grid may or may not be additionally supported by wires, cables, tie rods, hangers, struts, or the like at positions remote from the walls of the building occupied space.

[0052] FIG. 2 shows an example of ceiling system 10 that includes a bracket assembly 400 mounted in position on a perimeter frame 100 and holding a grid member 600 in position. Also shown is a portion of a substrate, or ceiling panel, 700 that is connected to and/or supported by grid member 600. In this example grid member 600 is a rail 610 that is part of a grid system that supports a plurality of substrates 700. Perimeter frame 100 can be attached to a perimeter, or other, wall that encloses a building space. In a rectangular room, for example, perimeter frame 100 would be attached to each wall to form a rectangular perimeter of the ceiling grid. Perimeter frame 100 can also be attached to walls that are located inside, or project into, the building space in order to support grid members at their ends. In some embodiments perimeter frame 100 provides support for some or all of the weight of the ceiling system. In other embodiments perimeter frame 100 provides only a locating function for the ends of the grid members and provide no structural support of the ceiling system. Support or supplemental support for the ceiling system can come from wires, cables, tie rods, hangers, struts, or the like.

[0053] In this example, perimeter frame 100 is symmetrical with respect to a horizontal plane that bisects perimeter frame 100 at its vertical center. This is useful in that perimeter frame 100 can be installed with either flange 110 facing down. If, for example, one of the flanges 110 gets damaged, that section of perimeter frame 100 can be installed with the damaged flange 110 facing upward where it is not visible to users of the building space. In this example, perimeter frame 100 has four engagement portions, or recesses, 102, 104, 106, 108 for receiving bracket assembly 400. Perimeter frame 100 can have more or fewer engagement portions and can also include other recesses, attachment points, holes, etc., for facilitating attachment of other elements to perimeter frame 100 or for attaching perimeter frame 100 to a wall or other structure. For example, in FIG. 2, perimeter frame 100 has a fabric attachment recess 112 on each of its flanges 110. These feature can also be seen in FIG. 3.

[0054] The bracket assembly 400 shown in FIGS. 2-8 is a three-part bracket assembly. Bracket assembly 400 has a grid bracket 510 that attaches to grid member 600 and a frame bracket main portion 410 that attaches to perimeter frame 100. Frame bracket main portion 410 is attached to perimeter frame 100 with the help of a frame bracket sliding portion 440 that includes a second engaging portion 442. In this example, second engaging portion 442 is a stamped, bent portion of frame bracket sliding portion 440. In other embodiments, second engaging portion 442 can be a machined lip or other engaging feature. As shown in FIG. 4, frame bracket sliding portion 440 is held to frame bracket main portion 410 with a screw 450 such that frame bracket sliding portion 440 is movable in a vertical direction relative to frame bracket main portion 410. Although a slot and a screw are used in this embodiment, other attachment methods can be used. To attach frame bracket main portion 410 to perimeter frame 100, frame bracket main portion 410 is moved toward perimeter frame 100 such that a first engaging portion 416 engages one of the engagement portions 104, 108 while frame bracket sliding portion 440 (and therefore second engaging portion 442) is held in an upper position. In this example, first engaging portion 416 is a stamped louvered flange. In other embodiments, first engaging portion 416 can be a machined lip or other engaging feature. In this example, first engaging portion 416 engages engagement portion 104. Then frame bracket main portion 410 and frame bracket sliding portion 440 are tilted toward perimeter frame 100 until second engaging portion 442 contacts perimeter frame 100 right above engagement portion 102. Then frame bracket sliding portion 440 is moved downward so that second engaging portion 442 engages engagement portion 102, as shown in

FIG. 3. Screw 450 is then tightened to hold frame bracket sliding portion 440 and frame bracket main portion 410 securely in place on perimeter frame 100. In order to keep the proper orientation of frame bracket sliding portion 440 relative to frame bracket main portion 410, frame bracket sliding portion 440 has a guide element that rests against an edge of frame bracket main portion 410 when frame bracket sliding portion 440 is tightened against frame bracket main portion 410. This guiding element helps ensure that second engaging portion 442 is squarely in engagement portion 102.

[0055] Now turning to grid bracket 510, FIG. 4 shows that grid bracket 510 has a first portion 514 and a second portion 512 that are, in this example, arranged orthogonally. First portion 514 attaches to grid member 600 with one or more screws 620 through one or more holes 518, or other attachment method. Second portion 514 is attached to frame bracket main portion 410 with a screw 610. As can be seen best in FIGS. 2, 4 and 5, screw 610 extends through a slot 516 in first portion 514 of grid bracket 510. As a result of slot 516, grid bracket 510 can be attached to frame bracket 410 in a plurality of different positions along a vertical axis. It is this adjustability that allows grid member 600 to be attached to perimeter frame 100 in a plurality of different positions.

[0056] In the example shown in the Figures, slot 516 has undulating edges that form a plurality of wide spots in slot 516. Each of the wide spots in slot 516 is sized to receive a widened portion of screw 610 so that a particular relative position of frame bracket main portion 410 and grid bracket 510 can be set similarly for all bracket assemblies used in the ceiling system. Setting all of the bracket assemblies at the same position is important to maintain a level ceiling assembly. Although slot 516 has undulating edges in this embodiment, other embodiments have a slot with straight sides, which allows infinite adjustability in the relative positions of frame bracket main portion 410 and grid bracket 510. A slot with straight sides can be advantageous if the installation requires fine adjustments in the relative position of frame bracket main portion 410 and grid bracket 510. The sides and other parts of slot 516 can be any shape that permits screw 610 to hold frame bracket main portion 410 at the desired position relative to grid bracket 510. For example, the sides of slot 516 can have a shape that is in between straight and the undulating example shown in the drawings.

[0057] In this embodiment, frame bracket main portion 410 has a flat area 412 that first portion 514 of grid bracket 510 rests against when grid bracket 510 is tightened against frame bracket main portion 410. In order to keep the proper orientation of grid bracket 510 relative to frame bracket main portion 410, frame bracket main portion 410 has a guide element 414 that an edge of first portion 514 of grid bracket 510 rests against when grid bracket 510 is tightened against frame bracket main portion 410. This is best seen in FIG. 4.

[0058] FIGS. 4 and 5 show second portion 512 of grid bracket 510 having a weakened portion 522 that separates a tab 520 from the remainder of second portion 512. FIG. 6 shows an alternate size of tab 520. The purpose of weakened portion 522 is to make tab 520 easily separable from the remainder of second portion 512. This will be discussed further below.

[0059] FIG. 5 shows a front view of bracket assembly 400, FIG. 6 shows a side view, and FIG. 7 shows a top view.

[0060] FIGS. 9-12 show an example of a two-piece bracket assembly 200. Bracket assembly 200 has a first portion 210 that attaches to perimeter frame 100 and second portion 310 that attaches to grid member 600. First portion 210 has a flat portion 212 from which a first engaging portion 216 extends. First portion 210 is attached to perimeter frame 100 with the help of a bracket sliding portion 240 that includes a second engaging portion 242. As shown in FIG. 9, bracket sliding portion 240 is held to first portion 210 with a screw 250 such that bracket sliding portion 240 is movable in a vertical direction relative to first portion 210. Although a slot and a screw are used in this embodiment, other attachment methods can be used. Similarly to the example shown in FIGS. 4-8, to attach first portion 210 to perimeter frame 100, first portion 210 is moved toward perimeter frame 100 such that first engaging portion 216 engages a first engagement portion of perimeter frame 100 while bracket sliding portion 240 is held in an upper position. Then first portion 210 and bracket sliding portion 240 are tilted toward perimeter frame 100 until second engaging portion 242 contacts perimeter frame 100 right above a second engagement portion. Then bracket sliding portion 240 (and therefore second engaging portion 242) is moved downward so that second engaging portion 242 engages the second engagement portion, similarly to what is shown in FIG. 3. Screw 250 is then tightened to hold bracket sliding portion 240 and first portion 210 securely in place on perimeter frame 100. In this example, first engaging portion 216 is a stamped louvered flange. In other embodiments, first engaging portion

216 can be a machined lip or other engaging feature. In this example, second engaging portion 242 is a stamped, bent portion of bracket sliding portion 240. In other embodiments, second engaging portion 242 can be a machined lip or other engaging feature. In order to keep the proper orientation of bracket sliding portion 240 relative to first portion 210, bracket sliding portion 240 has a guide element that rests against an edge of first portion 210 when bracket sliding portion 240 is tightened against first portion 210. This guiding element helps ensure that second engaging portion 242 is squarely in the second engagement portion.

[0061] FIG. 11 shows that second portion 310 and first portion 210 are, in this example, arranged orthogonally. A grid mounting section 312 of second portion 310 attaches to grid member 600 with one or more screws through one or more holes 218, or other attachment method.

[0062] As shown in FIGS. 9 and 11, second portion 310 of bracket assembly 200 has a weakened portion 322 that separates a tab 320 from the remainder of second portion 310. The purpose of weakened portion 322 is to make tab 320 easily separable from the remainder of second portion 310. Weakened portion 322 allows bracket assembly 200 to be altered between a first state in which tab 320 is in place and the grid is supported at a first height relative to the perimeter frame, and a second state in which tab 320 is removed and the grid is supported at a second height relative to the perimeter frame, the second height being different than the first height. FIG. 13 shows bracket assembly 200, with tab 320 intact, attached to a perimeter frame 102. FIG. 14 shows bracket assembly 200, with tab 320 removed, attached to a perimeter frame 104. As can be seen from FIGS. 13 and 14, removal of tab 320 creates a greater distance between the bottom of second portion 310 and the lower flange of the perimeter frame. The greater distance can allow the grid member to be mounted higher relative to the perimeter frame. By removing tab 320, bracket assembly 200 can also be attached to grid members having a shorter vertical space available to receive second portion 310.

[0063] FIGS. 15-18 show some of the possible arrangements of three-piece bracket assembly 400 attached to perimeter frame 102. These arrangements differ only in the position of grid bracket 510 relative to frame bracket 410. FIG. 15 shows grid bracket 510 in the highest position with tab 520 pointing downward. FIG. 17 shows grid bracket 510 in the lowest position with tab 520 pointing downward. FIG. 16 shows grid bracket 510 in an intermediate position

with tab 520 pointing downward. Although three positions are shown in FIGS. 15-17, grid bracket 510 can be in other positions in between those shown in FIGS. 15 and 17. The number of available positions is determined by the shape and length of slot 516. A longer slot 516 will provide more positions and a smooth slot, as opposed to a slot with undulating edges, will provide infinite adjustability.

[0064] FIG. 18 shows two different arrangements in which grid bracket 510 is mounted such that tab 520 is pointing upward. In these positions, grid bracket 510 is mounted upside down as compared to the orientation in FIGS. 2-7 and 15-17. Mounting grid bracket 510 such that tab 520 is pointing upward provides an additional range of mounting positions of the grid member. Positions A and B shown in FIG. 18 are just two of the positions possible.

[0065] Similarly to tab 320 described above, tab 520 can be removed to provide even more possible mounting positions of the grid member. Given a slot 516 having 8 positions for screw 610 (as shown in FIG. 5), sixteen installation heights are possible with tab 520 pointing down, eight with the tab intact and eight with the tab removed. For example, if there are eight screw positions (undulations in slot 516), they are 1/4" apart, and tab 520 is 1/8" tall, there will be sixteen positions 1/8" apart. Up to another eight positions can be available with tab 520 pointing upward.

CLAIMS

WHAT IS CLAIMED IS:

1. A ceiling system comprising:
 - a perimeter frame;
 - a grid configured to support a plurality of substrates; and
 - a plurality of bracket assemblies coupling the grid to the perimeter frame, the plurality of bracket assemblies adjustable between a plurality of states in which the grid is supported at a different height relative to the perimeter frame in each of the plurality of states.
2. The ceiling system according to claim 1 further comprising the plurality of substrates, the plurality of substrates supported by the grid.
3. The ceiling system according to claim 2 wherein when the plurality of bracket assemblies are in each of the plurality of states, the plurality of substrates are supported in a substantially horizontal plane.
4. The ceiling system according to any one of claims 1 to 3 wherein each of the plurality of bracket assemblies comprises:
 - a frame bracket coupled to the perimeter frame; and
 - a grid bracket, the grid bracket comprising a first portion coupled to the frame bracket and a second portion coupled to the grid, the first portion of the grid bracket configured to be coupled to the frame bracket at a selected one of a plurality of different

positions relative to the frame bracket, wherein each of the plurality of different positions corresponds to one of the plurality of states of the bracket assembly.

5. The ceiling system according to claim 4 wherein for each of the plurality of bracket assemblies, the first portion of the grid bracket comprises a first plate and the second portion of the grid bracket comprises a second plate arranged substantially orthogonal to the first plate.
6. The ceiling system according to claim 5 wherein for each of the plurality of bracket assemblies, the first plate extends along a longitudinal axis from a first end to a second end, the second plate of the grid bracket comprises a grid mounting section extending from the first plate adjacent the first end of the first plate.
7. The ceiling system according to claim 6 wherein the grid bracket is configured to be mounted to the frame bracket in a selected one of: (1) a first arrangement in which the first end of the first plate is facing downward; and (2) a second arrangement in which the second end of the first plate is facing downward.
8. The ceiling system according to any one of claims 4 to 7 wherein for each of the plurality of bracket assemblies, the frame bracket comprises a guide element that contacts the grid bracket to maintain relative orientation between the frame bracket and the grid bracket.

9. The ceiling system according to any one of claims 4 to 8 wherein for each of the plurality of bracket assemblies, the first portion of the grid bracket comprises an elongated slot; and wherein each of the plurality of bracket assemblies comprises a threaded fastener extending through the elongated slot and threadily engaging the frame bracket, the threaded fastener alterable between: (1) a free state in which the grid bracket can be moved relative to the frame bracket between the plurality of different positions; and (2) a locked state in which the grid bracket is fixed relative to the frame bracket in the selected one of the plurality of different positions.
10. The ceiling system according to claim 9 wherein for each of the plurality of bracket assemblies, the elongated slot comprises an undulating edge that forms a plurality of nesting regions for receiving a widened portion of the threaded fastener, and wherein when the widened portion of the threaded fastener is in a selected one of the nesting regions, the undulating edge prohibits relative translation between grid bracket and the frame bracket.
11. The ceiling system according to any one of claims 4 to 10 wherein for each of the plurality of bracket assemblies, the grid bracket can be coupled to the frame bracket at the plurality of different positions incrementally.
12. The ceiling system according to any one of claims 4 to 11 wherein the second portion of the grid bracket comprises a grid mounting section and a tab section, the tab section separated from the grid mounting section by a pre-weakened line so as to be alterable

from: (1) a first one of the plurality of states in which the tab section is coupled to the grid mounting section and the grid is supported at a first height relative to the perimeter frame; and (2) a second one of the plurality of states in which the tab section is removed from the grid mounting section and the grid is supported at a second height relative to the perimeter frame, the second height being different than the first height.

13. The ceiling system according to any one of claims 1 to 12 wherein
the perimeter frame has a plurality of engagement portions, and
each of the bracket assemblies has a first engaging portion that engages a first one of the engagement portions, and a second engaging portion that engages a second one of the engagement portions, such that the bracket assembly is positionally fixed relative to the perimeter frame by the engagement of the first and second engaging portions with the first and second engagement portions.
14. The ceiling system according to claim 13 wherein the second engaging portion of the bracket assembly is movable relative to the first engaging portion of the bracket assembly.
15. The ceiling system according to any one of claims 4 to 14 wherein for each of the plurality of bracket assemblies, the frame bracket comprises a sliding portion that is movable relative to a main portion of the frame bracket, the sliding portion having a guide element that contacts the main portion of the frame bracket to maintain relative orientation between the sliding portion and the main portion of the frame bracket.

16. The ceiling system according to claim 15 wherein the second engaging portion of the bracket assembly is fixed to the sliding portion of the frame bracket.
17. The ceiling system according to any one of claims 1 to 16 wherein the perimeter frame is symmetrical about a horizontal plane when the perimeter frame is in an installed position.
18. The ceiling system according to any one of claims 1 to 3 wherein each of the plurality of bracket assemblies comprises:
 - a frame bracket having a first portion coupled to the perimeter frame and a second portion coupled to the grid,
 - wherein the second portion comprises a grid mounting section and a tab section, the tab section being separated from the grid mounting section by a pre-weakened line so as to be alterable from: (1) a first one of the plurality of states in which the tab section is coupled to the grid mounting section and the grid is supported at a first height relative to the perimeter frame; and (2) a second one of the plurality of states in which the tab section is removed from the grid mounting section and the grid is supported at a second height relative to the perimeter frame, the second height being different than the first height.
19. The ceiling system according to claim 18 wherein the second portion of the frame bracket is arranged substantially orthogonal to the first portion of the frame bracket.

20. The ceiling system according to claim 18 or 19 wherein the pre-weakened line is in a substantially horizontal plane.
21. The ceiling system according to any one of claims 18 to 20 wherein the second portion of the frame bracket is vertically offset relative to a vertical center point of the first portion of the frame bracket.
22. A bracket assembly for use with a ceiling system having a perimeter frame and a grid that supports a plurality of substrates, the bracket assembly comprising:
- a frame bracket configured to be coupled to the perimeter frame; and
 - a grid bracket, the grid bracket comprising a first portion coupled to the frame bracket and a second portion configured to be coupled to the grid, the first portion of the grid bracket being configured to be coupled to the frame bracket at a selected one of a plurality of different positions relative to the frame bracket such that the grid is supportable at a different height relative to the perimeter frame in each of the plurality of different positions.
23. The bracket assembly according to claim 22 wherein the first portion of the grid bracket comprises a first plate and the second portion of the grid bracket comprises a second plate arranged substantially orthogonal to the first plate.
24. A bracket assembly for use with a ceiling system having a perimeter frame and a grid that supports a plurality of substrates, the bracket assembly comprising:

a frame bracket having a first portion configured to be coupled to the perimeter frame, and a second portion configured to be coupled to the grid,

wherein the second portion comprises a grid mounting section and a tab section, the tab section being separated from the grid mounting section by a pre-weakened line so as to be alterable from: (1) a first state in which the tab section is coupled to the grid mounting section and the grid is supportable at a first height relative to the perimeter frame; and (2) a second state in which the tab section is removed from the grid mounting section and the grid is supportable at a second height relative to the perimeter frame, the second height being different than the first height.

25. The bracket assembly according to claim 24 wherein the second portion of the frame bracket is arranged substantially orthogonal to the first portion of the frame bracket.

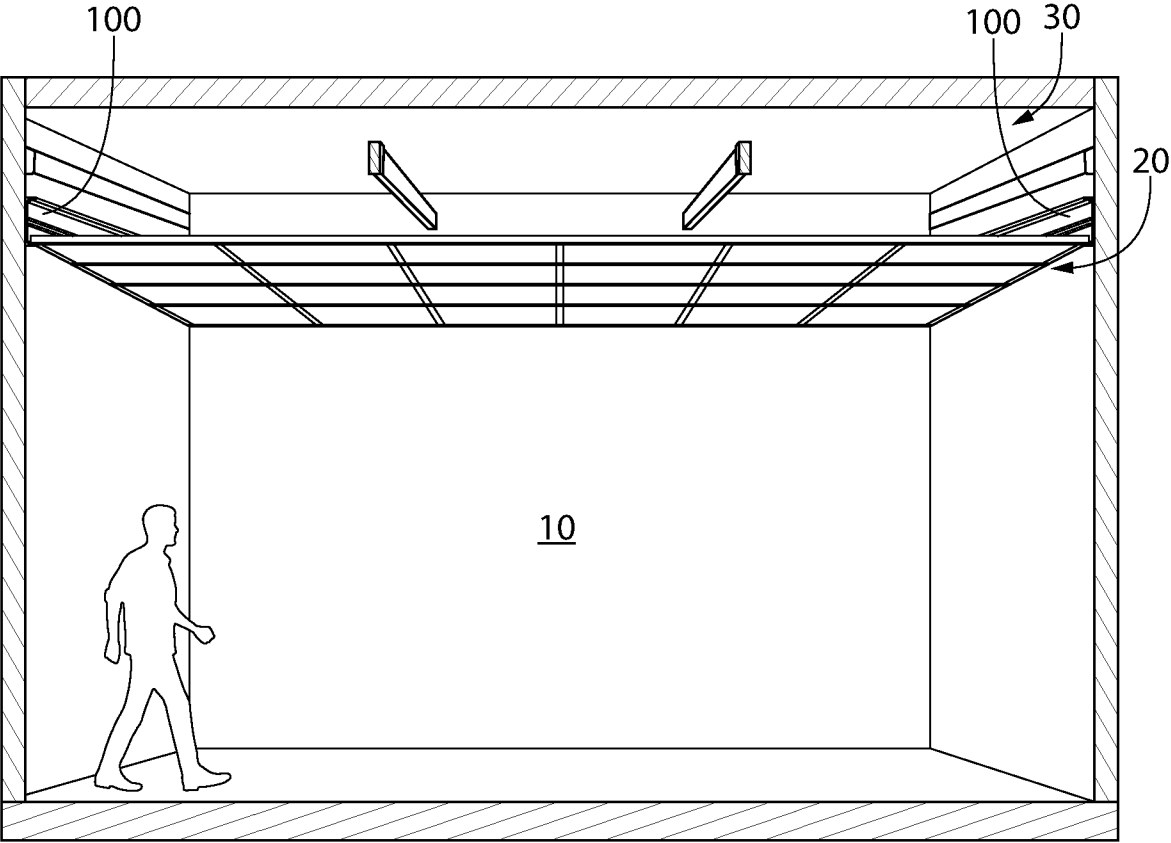


FIG. 1

2/11

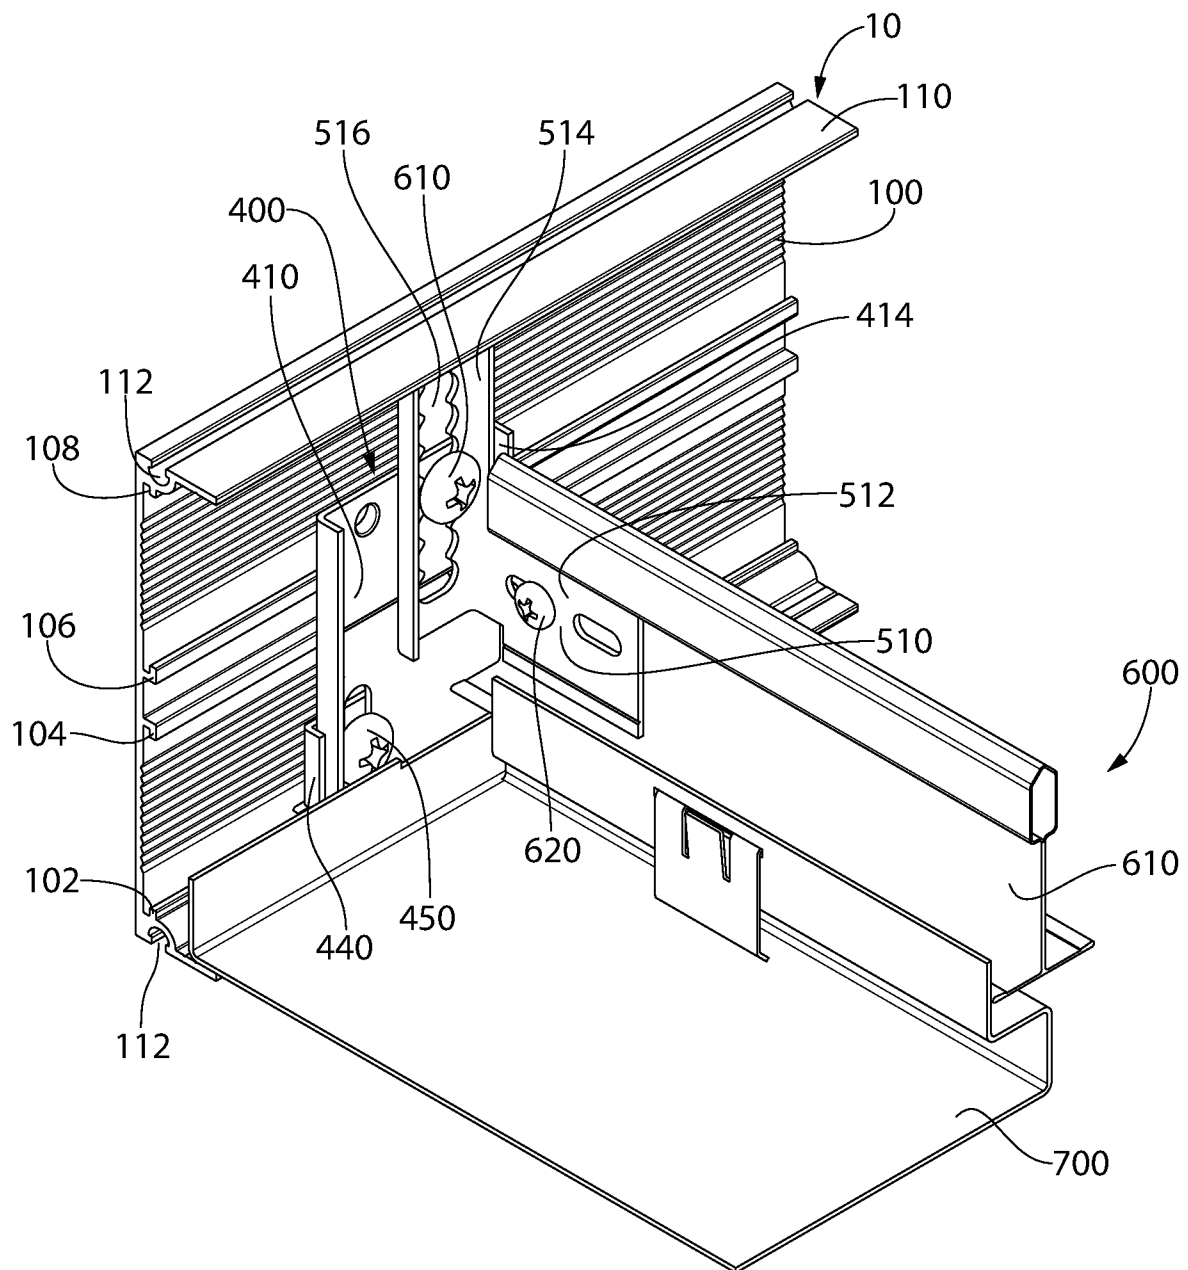


FIG. 2

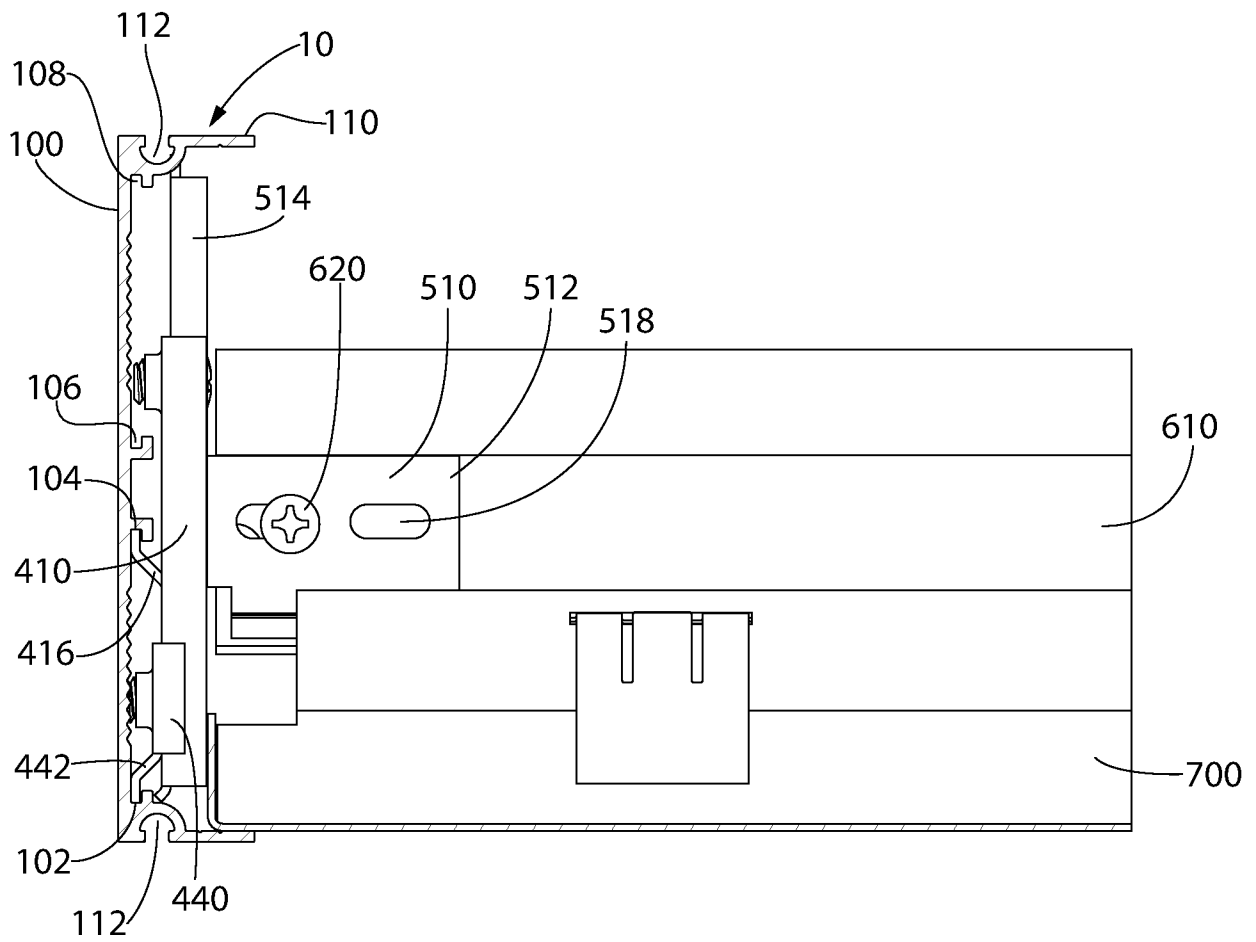


FIG. 3

4/11

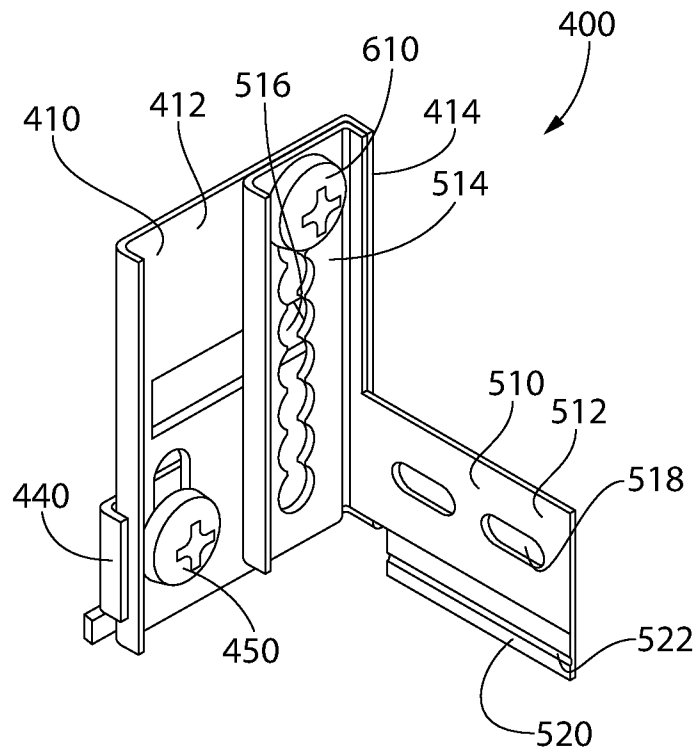


FIG. 4

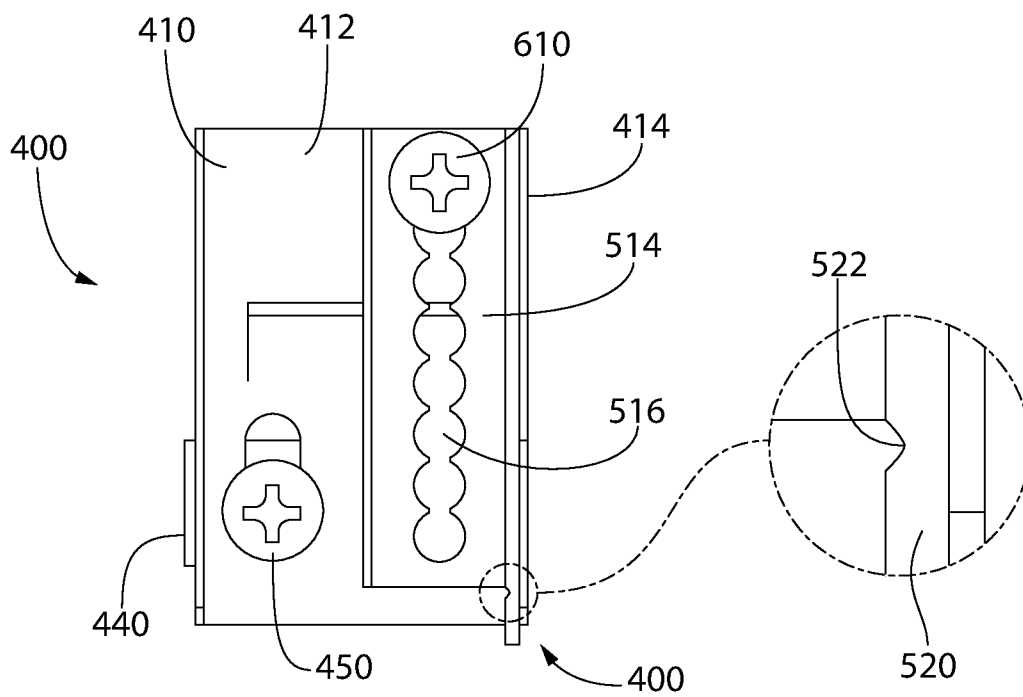


FIG. 5

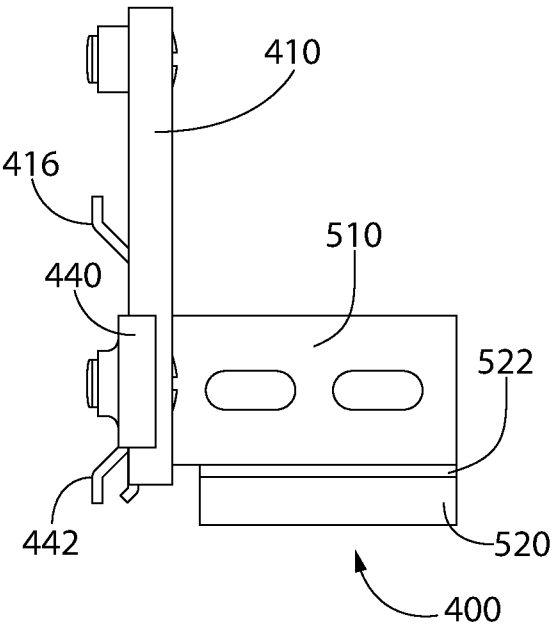


FIG. 6

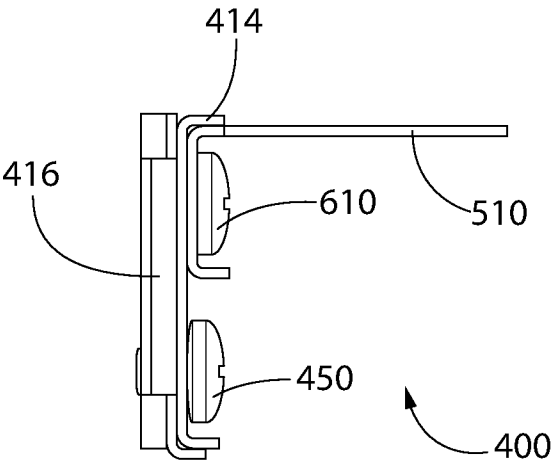


FIG. 7

6/11

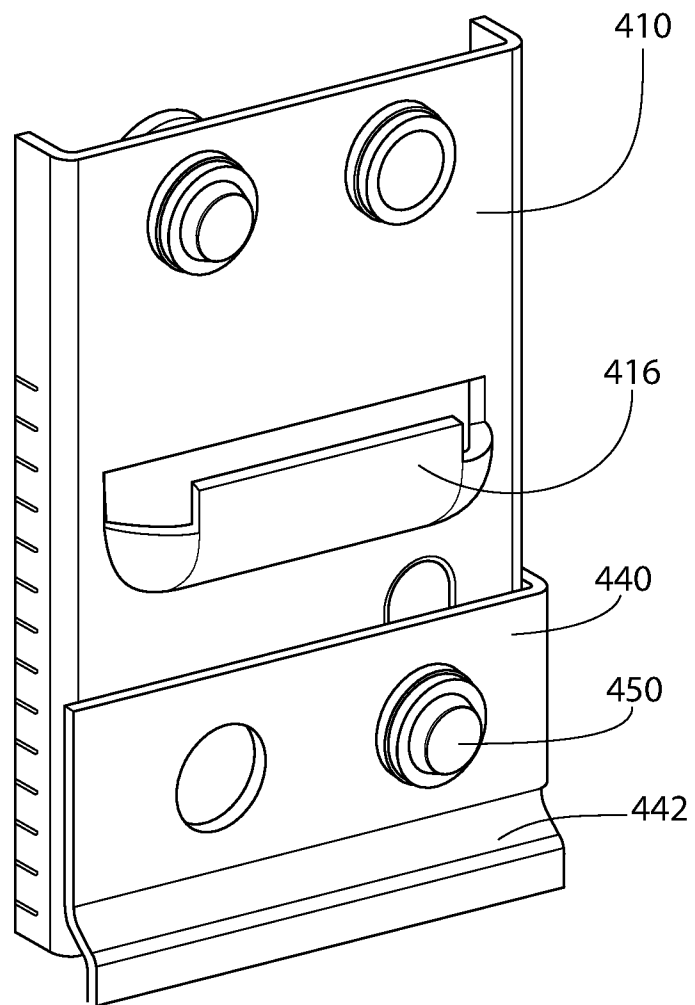


FIG. 8

7/11

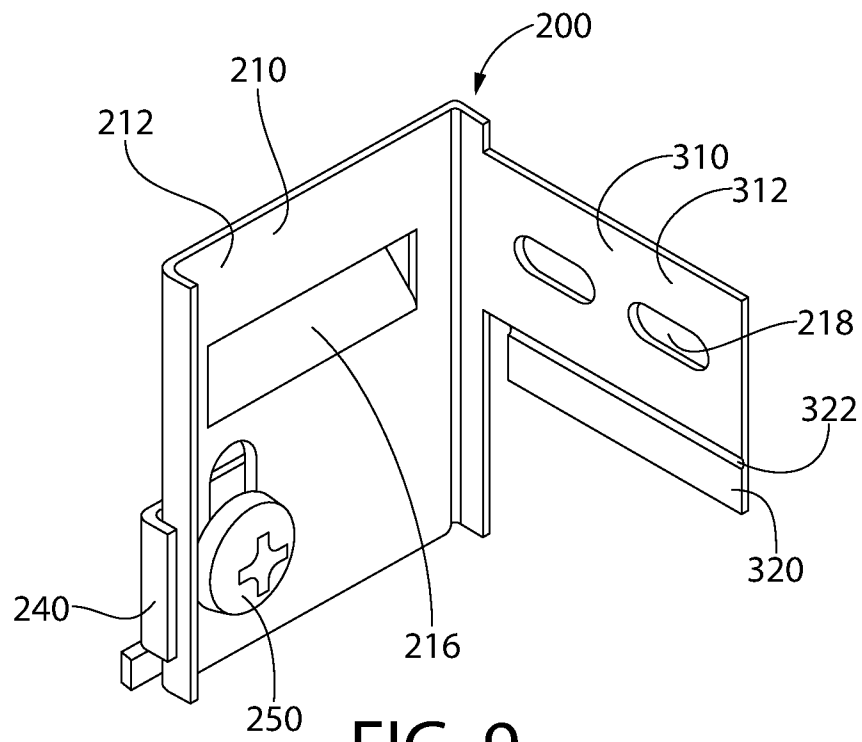


FIG. 9

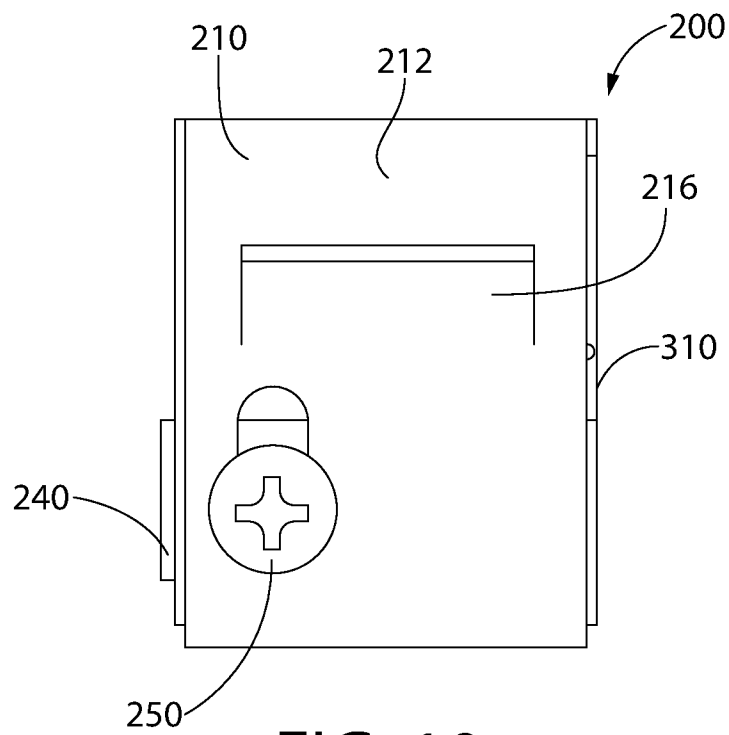


FIG. 10

8/11

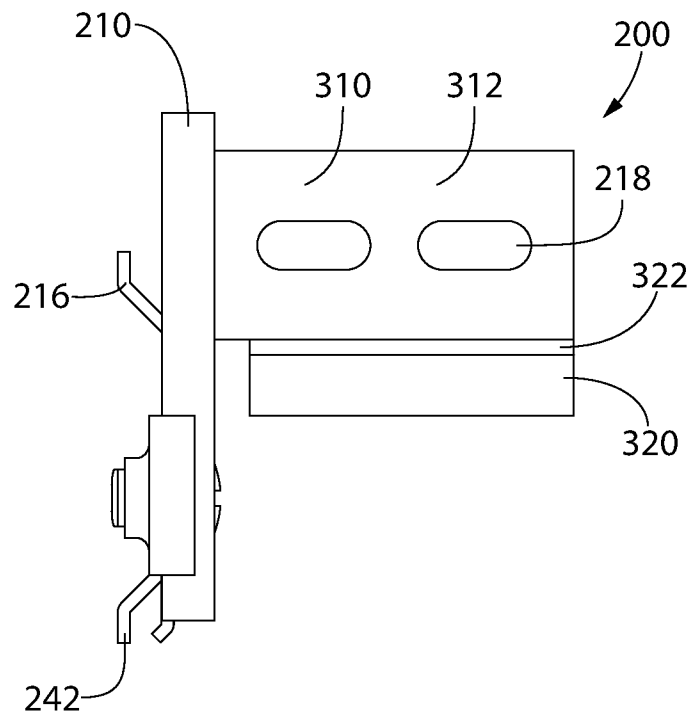


FIG. 11

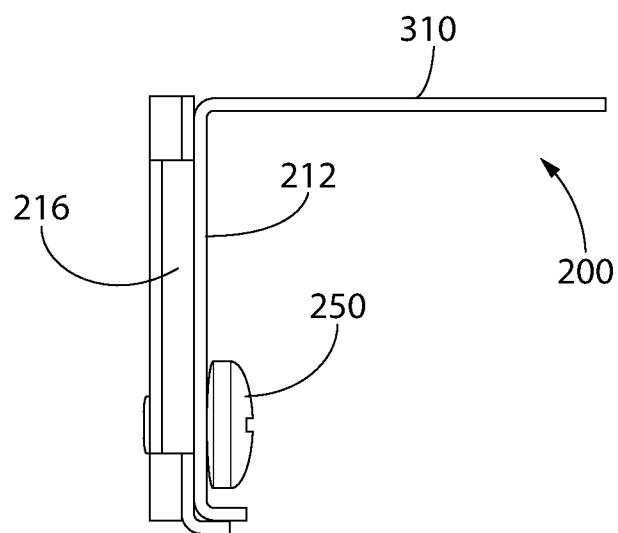


FIG. 12

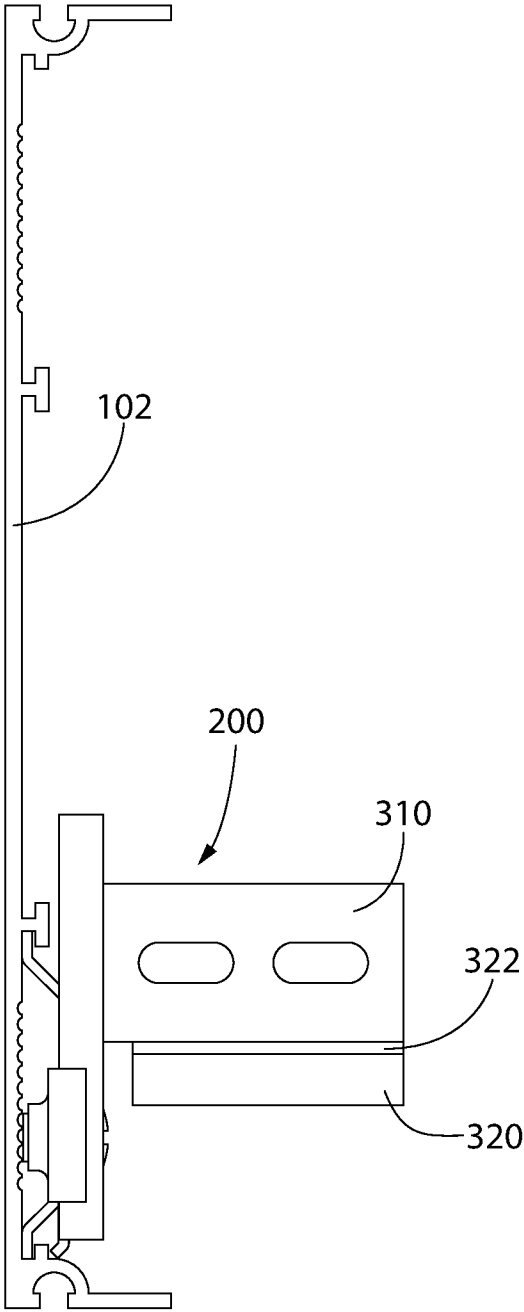


FIG. 13

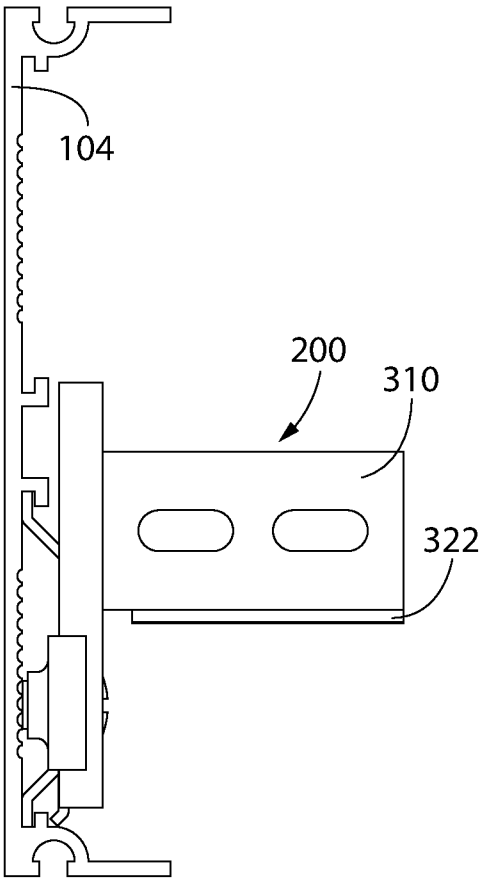


FIG. 14

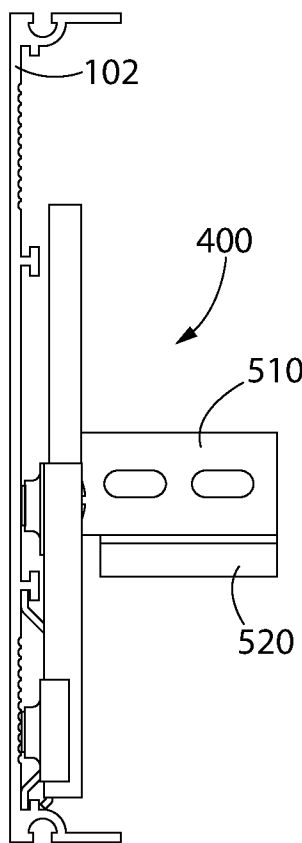


FIG. 15

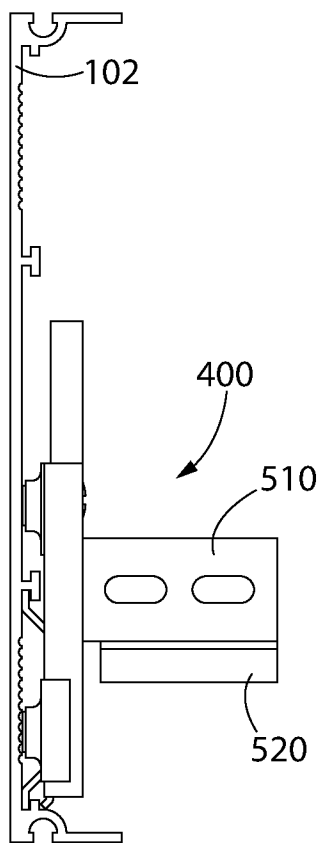


FIG. 16

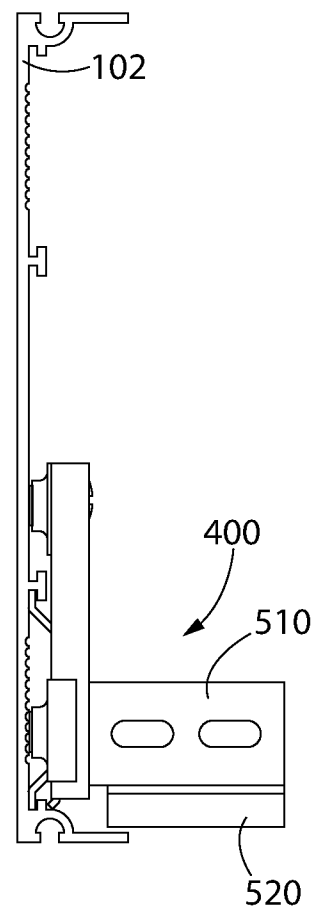


FIG. 17

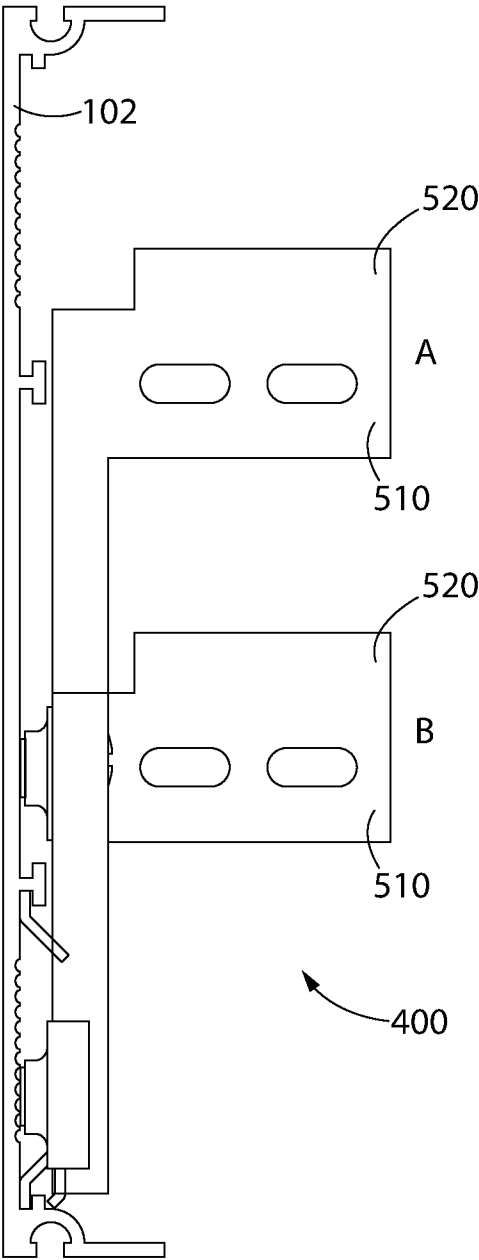


FIG. 18

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2017/048562**A. CLASSIFICATION OF SUBJECT MATTER****E04B 9/30(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E04B 9/30; E04B 9/12; E04B 9/18; H01L 31/048; E04B 9/00; E04B 1/98; E04B 9/16

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: frame, bracket, grid, adjust, height, ceiling, slot

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011-0283634 A1 (UNDERKOFER et al.) 24 November 2011 See paragraphs [0001]-[0002], [0025]-[0029]; and figures 1-2.	24-25
Y		1-23
Y	US 2013-0180572 A1 (WEST, JOHN R.) 18 July 2013 See paragraph [0054]; and figures 5-6.	1-23
A	JP 2005-214004 A (WORTHINGTON ARMSTRONG VENTURE) 11 August 2005 See paragraphs [0020]-[0024]; and figure 2.	1-25
A	US 2016-0102454 A1 (USG INTERIORS, LLC.) 14 April 2016 See paragraphs [0025]-[0033]; and figures 1-2.	1-25
A	US 2006-0096219 A1 (INGRATTA et al.) 11 May 2006 See paragraphs [0020]-[0023]; and figures 1-2.	1-25



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

04 December 2017 (04.12.2017)

Date of mailing of the international search report

04 December 2017 (04.12.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

BAE, Geun Tae

Telephone No. +82-42-481-3547



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/048562

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011-0283634 A1	24/11/2011	TW 201142112 A US 8615948 B2 UY 33375 A WO 2011-146268 A1	01/12/2011 31/12/2013 01/12/2011 24/11/2011
US 2013-0180572 A1	18/07/2013	AU 2010-286953 A1 AU 2010-286953 B2 AU 2012-220665 A1 AU 2012-220665 B2 CA 2820935 A1 CA 2885969 A1 CN 103081119 A CN 103081119 B CN 103782510 A CN 103782510 B CN 104247039 A CN 104247039 B CN 104981458 A CN 104981458 B EP 2135321 A1 EP 2135321 B1 EP 2449598 A2 EP 2449599 A2 EP 2678492 A1 EP 2903968 A1 EP 2903968 B1 EP 3023415 A1 EP 3150582 A1 IL 226835 A IL 237831 A JP 2011-512016 A JP 2014-055506 A JP 2014-057099 A JP 2015-532295 A JP 2016-026275 A JP 5421898 B2 JP 5722982 B2 JP 5845521 B2 JP 6159377 B2 KR 10-1467600 B1 KR 10-1743160 B1 KR 10-2012-0098589 A KR 10-2015-0063517 A US 2010-0065108 A1 US 2011-0000519 A1 US 2011-0000520 A1 US 2011-0000526 A1 US 2011-0000544 A1 US 2012-0125410 A1	09/02/2012 07/05/2015 30/08/2012 13/04/2017 14/06/2012 10/04/2014 01/05/2013 15/06/2016 07/05/2014 28/07/2017 24/12/2014 05/04/2017 14/10/2015 21/07/2017 23/12/2009 02/08/2017 09/05/2012 09/05/2012 01/01/2014 12/08/2015 07/12/2016 25/05/2016 05/04/2017 29/08/2013 31/05/2015 14/04/2011 27/03/2014 27/03/2014 09/11/2015 12/02/2016 19/02/2014 27/05/2015 20/01/2016 05/07/2017 05/12/2014 02/06/2017 05/09/2012 09/06/2015 18/03/2010 06/01/2011 06/01/2011 06/01/2011 06/01/2011 24/05/2012

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/048562

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2012-0152326 A1	21/06/2012
		US 2012-0234378 A1	20/09/2012
		US 2012-0255598 A1	11/10/2012
		US 2012-0260972 A1	18/10/2012
		US 2012-0266946 A1	25/10/2012
		US 2012-0279558 A1	08/11/2012
		US 2012-0298186 A1	29/11/2012
		US 2012-0298188 A1	29/11/2012
		US 2012-0298817 A1	29/11/2012
		US 2013-0140416 A1	06/06/2013
		US 2013-0180573 A1	18/07/2013
		US 2013-0180574 A1	18/07/2013
		US 2013-0183084 A1	18/07/2013
		US 2014-0026946 A1	30/01/2014
		US 2014-0053891 A1	27/02/2014
		US 2014-0102997 A1	17/04/2014
		US 2014-0130847 A1	15/05/2014
		US 2014-0175244 A1	26/06/2014
		US 2014-0182662 A1	03/07/2014
		US 2014-0251431 A1	11/09/2014
		US 2014-0326838 A1	06/11/2014
		US 2014-0339179 A1	20/11/2014
		US 2014-0371195 A1	18/12/2014
		US 2015-0013756 A1	15/01/2015
		US 2015-0033658 A1	05/02/2015
		US 2015-0040967 A1	12/02/2015
		US 2015-0068590 A1	12/03/2015
		US 2015-0075590 A1	19/03/2015
		US 2015-0155820 A1	04/06/2015
		US 2015-0155821 A1	04/06/2015
		US 2015-0155823 A1	04/06/2015
		US 2015-0203453 A1	23/07/2015
		US 2015-0222221 A1	06/08/2015
		US 2015-0222222 A1	06/08/2015
		US 2015-0316292 A1	05/11/2015
		US 2016-0043690 A1	11/02/2016
		US 2016-0043691 A1	11/02/2016
		US 2017-0104118 A9	13/04/2017
		US 8109048 B2	07/02/2012
		US 8375654 B1	19/02/2013
		US 8919052 B2	30/12/2014
		US 8919053 B2	30/12/2014
		US 8991114 B2	31/03/2015
		US 9154074 B2	06/10/2015
		US 9166524 B2	20/10/2015
		US 9243817 B2	26/01/2016
		US 9300244 B2	29/03/2016
		US 9447801 B2	20/09/2016
		US 9461579 B2	04/10/2016
		US 9496821 B2	15/11/2016

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/048562

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 9518596 B2	13/12/2016
		US 9574588 B2	21/02/2017
		US 9599280 B2	21/03/2017
		US 9611219 B2	04/04/2017
		US 9611220 B2	04/04/2017
		US 9647157 B2	09/05/2017
		US 9698724 B2	04/07/2017
		WO 2008-124158 A1	16/10/2008
		WO 2011-019460 A2	17/02/2011
		WO 2011-019460 A3	18/08/2011
		WO 2011-022125 A2	24/02/2011
		WO 2011-022125 A3	01/09/2011
		WO 2011-025585 A2	03/03/2011
		WO 2011-025585 A3	01/09/2011
		WO 2012-079060 A2	14/06/2012
		WO 2012-079060 A3	10/04/2014
		WO 2012-082806 A2	21/06/2012
		WO 2012-082806 A3	10/04/2014
		WO 2012-116121 A1	30/08/2012
		WO 2014-053491 A1	10/04/2014
		WO 2014-134580 A1	04/09/2014
JP 2005-214004 A	11/08/2005	JP 4630076 B2	09/02/2011
		US 2005-0160696 A1	28/07/2005
		US 7293393 B2	13/11/2007
US 2016-0102454 A1	14/04/2016	AU 2015-303883 A1	23/03/2017
		CN 106661883 A	10/05/2017
		EP 3183397 A1	28/06/2017
		US 2016-0053488 A1	25/02/2016
		US 2017-0226736 A1	10/08/2017
		US 9255403 B1	09/02/2016
		US 9663948 B2	30/05/2017
		WO 2016-028500 A1	25/02/2016
US 2006-0096219 A1	11/05/2006	CA 2518294 A1	07/03/2006
		CA 2518294 C	23/06/2009
		US 7552567 B2	30/06/2009