



(22) **Date de dépôt/Filing Date:** 2014/03/10

(41) **Mise à la disp. pub./Open to Public Insp.:** 2014/09/11

(30) **Priorités/Priorities:** 2013/03/11 (US61/776,764);
2013/05/14 (US61/823,293)

(51) **Cl.Int./Int.Cl. A01B 33/08** (2006.01)


(71) **Demandeur/Applicant:**
SALFORD FARM MACHINERY LTD., CA

(72) **Inventeurs/Inventors:**
GRAY, GEOFF J., CA;
ROZENDAAL, JAKE, CA;
HOEVE, FRENS, CA;
AVERINK, JOHN MARK, CA

(74) **Agent:** BRUNET & CO. LTD.

(54) **Titre :** HERSE ROTATIVE A COMMANDE HYDRAULIQUE POUR APPAREIL ET SYSTEME DE LABOURAGE

(54) **Title:** HYDRAULICALLY CONTROLLED ROTARY HARROW FOR TILLAGE APPARATUS AND SYSTEM

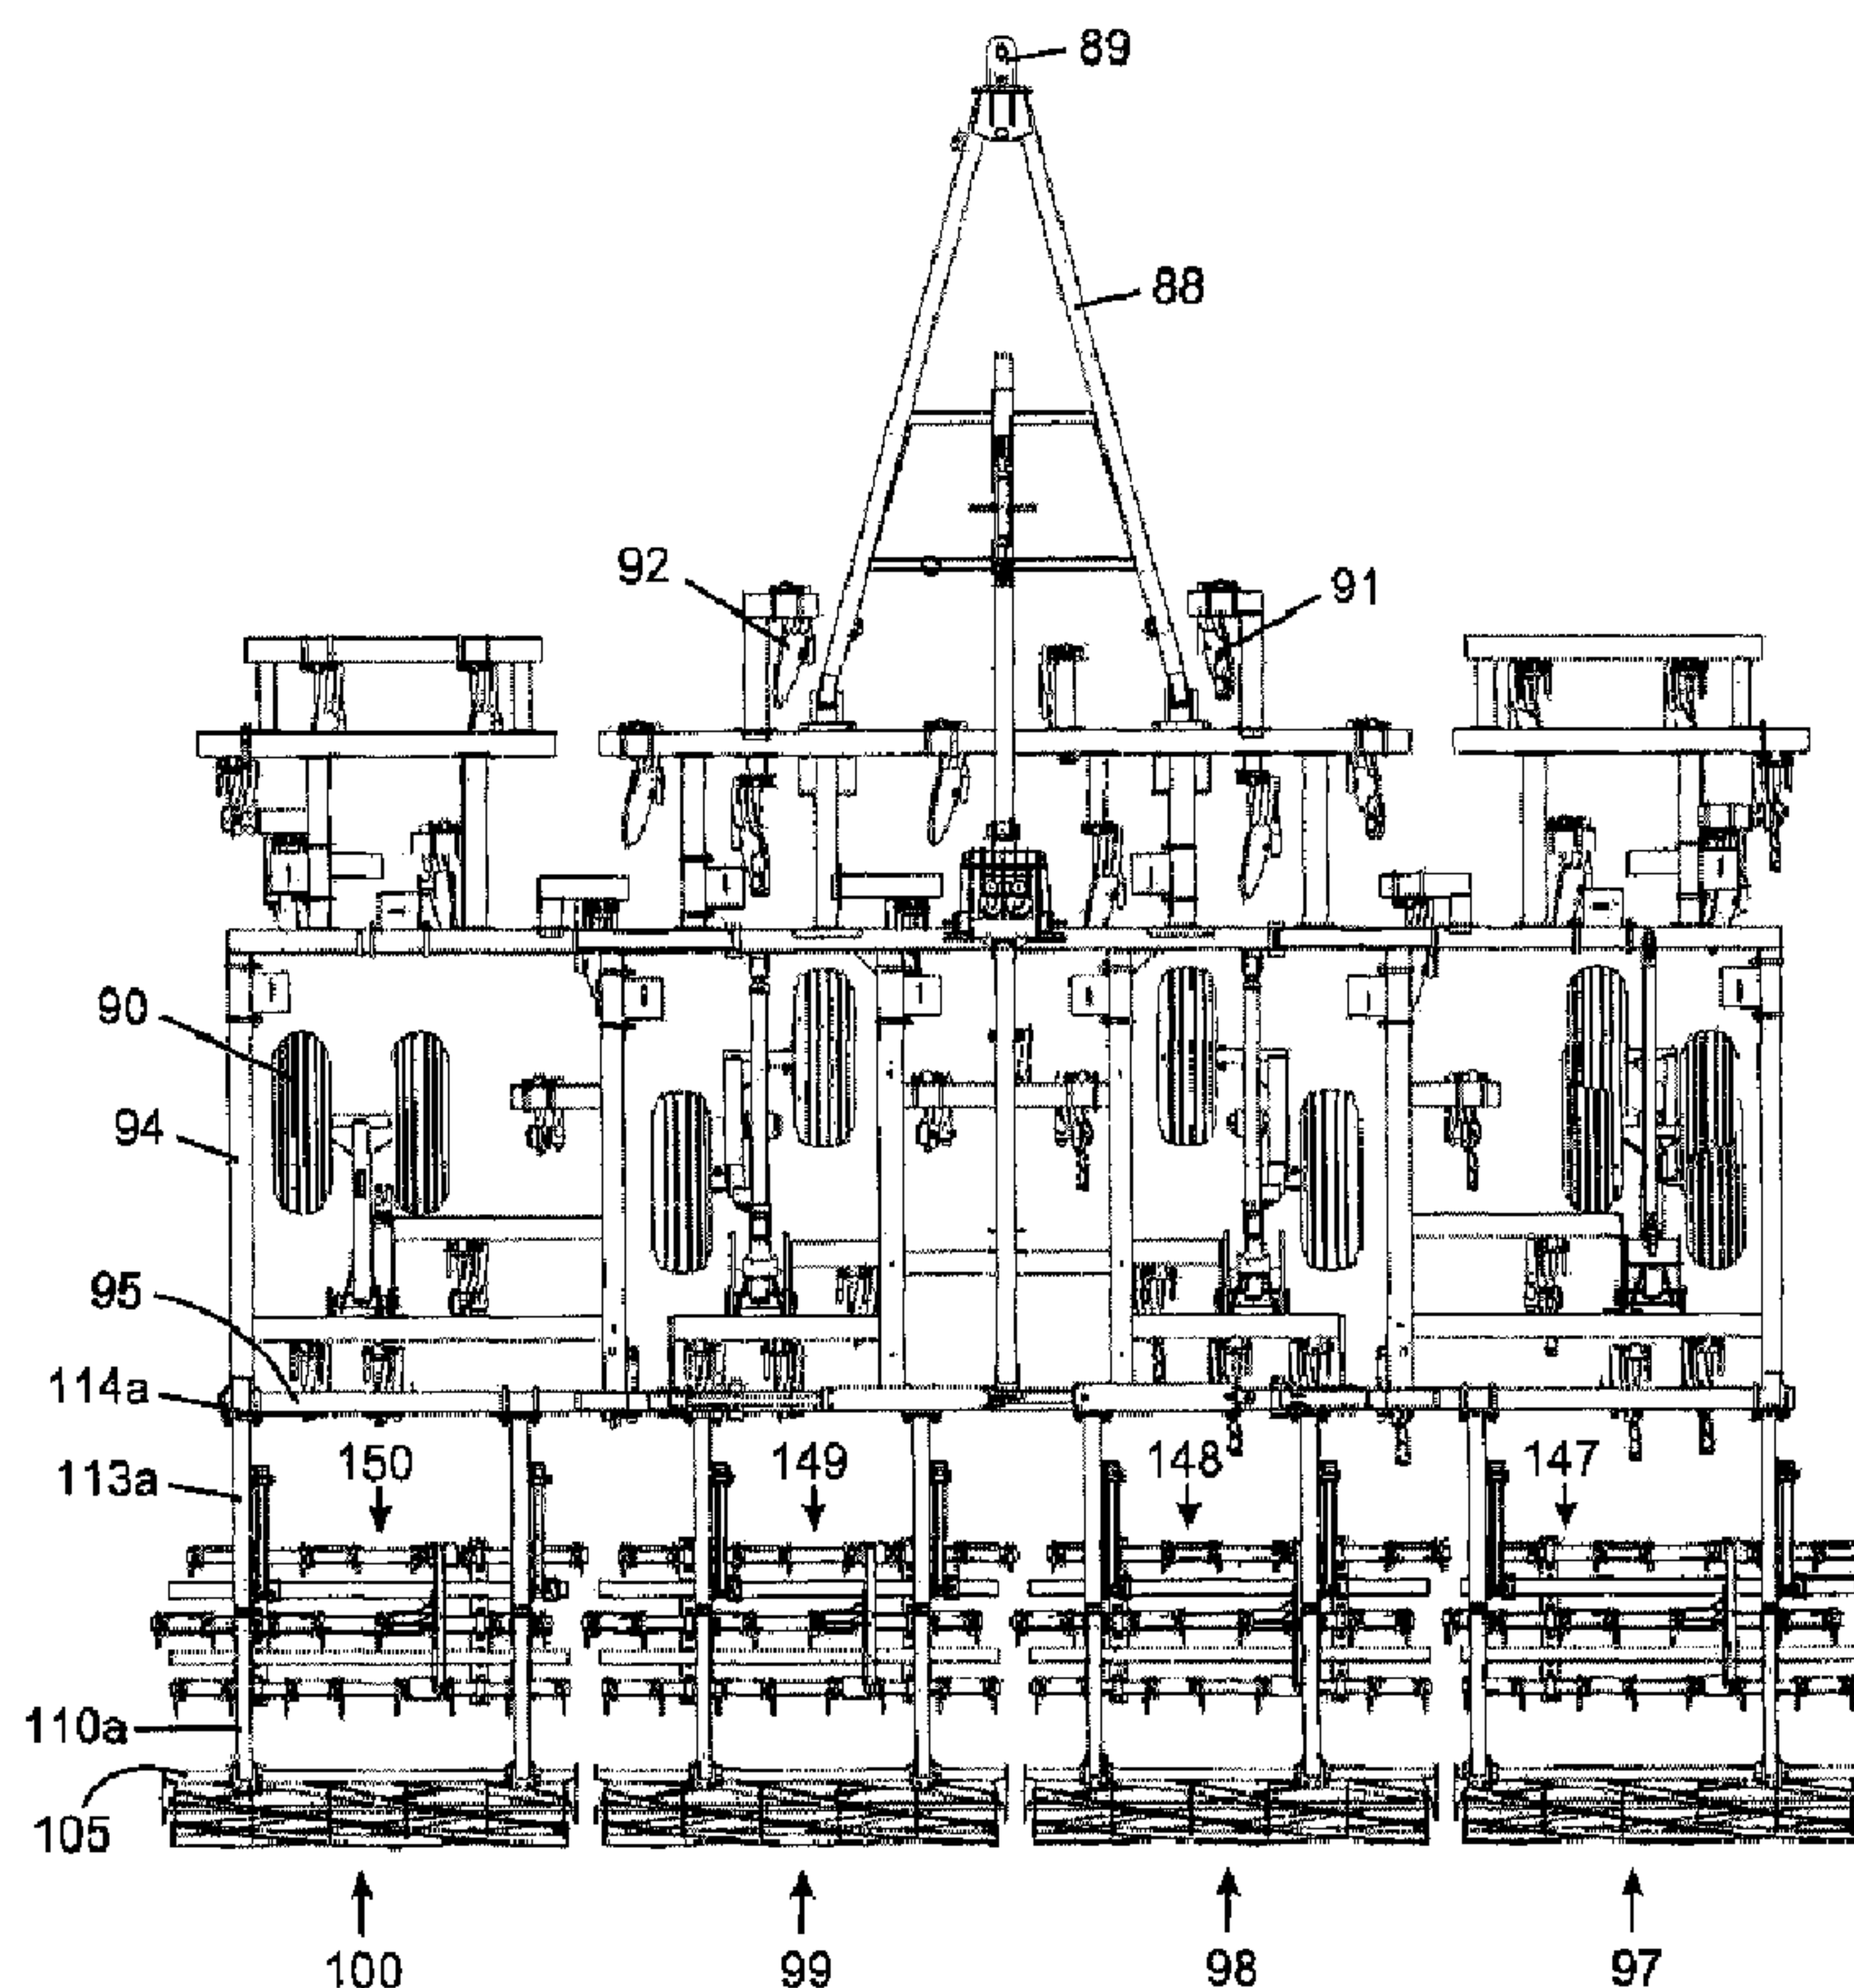

(57) **Abrégé/Abstract:**

A tillage apparatus having a rotary harrow mounted thereon with mounting elements utilizes a cooperative combination of: a compressible material at the mounting element to permit relative motion between the harrow and the mounting element in

(57) Abrégé(suite)/Abstract(continued):

response to a motion of the harrow; and, a hydraulic actuator operated under a first pressure to lower the rotary harrow and maintain engagement of the rotary harrow with the ground. A pressure relief element is utilized to reduce back pressure in response to the harrow striking a hard impediment on the ground during operation of the tillage apparatus in a field. The combination cooperates to reduce damage to the harrow and/or other parts of the tillage apparatus when the harrow strikes a hard impediment such as a rock.

ABSTRACT

A tillage apparatus having a rotary harrow mounted thereon with mounting elements utilizes a cooperative combination of: a compressible material at the mounting element to permit relative motion between the harrow and the mounting element in response to a motion of the harrow; and, a hydraulic actuator operated under a first pressure to lower the rotary harrow and maintain engagement of the rotary harrow with the ground. A pressure relief element is utilized to reduce back pressure in response to the harrow striking a hard impediment on the ground during operation of the tillage apparatus in a field. The combination cooperates to reduce damage to the harrow and/or other parts of the tillage apparatus when the harrow strikes a hard impediment such as a rock.

HYDRAULICALLY CONTROLLED ROTARY HARROW FOR TILLAGE APPARATUS AND SYSTEM

5

Field of the Invention

The present invention relates to an apparatus, system and method for tilling a field. In particular, the present invention relates to control of a rotary harrow, especially as part of an apparatus, system and method for a conservation tillage strategy.

10 Background of the Invention

Apparatuses, systems and methods for tilling agricultural fields are very well known in the art. Apparatuses typically comprise a cultivator frame having multiple and various tilling attachments attached thereto, laid out on the frame in a variety of patterns to maximize the desired tilling effect. The apparatus is dragged behind a vehicle during
15 the tilling operation.

In particular, conservation tillage, or vertical tillage as it is sometimes called, has recently become a tilling strategy of choice in many instances. Conservation tillage minimally disturbs the soil prior to planting in order to allow air to penetrate the mat of crop residue left in the field from the previous harvest. Apparatuses, systems and
20 methods for conservation tillage are known in the art, for example United States patents US 7762345 issued July 27, 2010, US 8113295 issued February 14, 2012, US 8196672 issue June 12, 2012, US 8307908 issued November 13, 2012 and US 8307909 issued November 13, 2012, the entire contents of all of which are herein incorporated by reference.

25 In addition to coulter wheels, chisel plows, V-shaped shovels, sub-soiling teeth and other field working tools, a tillage apparatus may comprise leveling attachments at the rear of the cultivator frame. The leveling attachments may be mounted to a rear transverse cross-member of the frame. Leveling attachments may comprise, for example, spike harrows, leveling bars, rotary harrows, etc., which are dragged behind the cultivator
30 frame to level the field after the field is worked by the field working tools.

A conservation tillage apparatus may be drawn at faster speeds than conventional tillage apparatuses. Although there is no theoretical upper limit on speed, conservation tillage apparatuses may be operated at speeds of from 8-18 miles per hour. Operating at such faster speeds causes the crop residue to be cut more finely and reduces the likelihood of becoming stuck in wet soil conditions. However, operating at faster speeds, especially above 12 miles per hour, can create significant problems and damage when leveling attachments being dragged behind the cultivator frame encounter a hard impediment, such as a rock. This is especially true for rotary harrows.

Harrows are implements comprising sets of teeth, tines or ridges that when dragged over ploughed land break up clods, remove weeds, and cover seed. A rotary harrow is a harrow with one or more turning wheels or drums rimmed with spikes or ridges. The turning wheels or drums are mounted in a relatively long basket. The basket of the rotary harrow is typically immovably mounted to a rear transverse cross-member of the cultivator frame. When a rotary harrow hits a hard impediment, the point of impact will be a relatively localized point along the entire length of the harrow. The impact will cause the harrow to deflect upwards at this point. In addition to translating upwards applying forces or stresses against the immovable mounting, the deflection will cause the relatively long harrow to pivot or twist around an axis causing the harrow to twist against its mountings. At high speeds, the upward and twisting forces caused when the harrow hits the hard impediment can be large enough to damage the harrow, the cultivator frame or both.

Some attempts have been made to overcome this problem. United States patent US 7766093 issued August 3, 2010, the entire contents of which is herein incorporated by reference, describes a hydraulically lift rolling basket structure for a tillage implement. The rolling basket structure includes an arm structure pivotally connected to the aft end of tine support members fixed to the rear of the implement frame. Hydraulic cylinders connected between the support members and the arm structure provides quick on-the-go disengagement of the rolling basket with the ground, for example, when wet or sticky ground conditions or the like are encountered. A cylinder lost motion connection facilitates movement of the baskets over ground irregularities and obstacles without operation of the cylinders. In this arrangement, the hydraulic cylinders may be actuated to raise the rolling basket over wet ground and the lost motion connection permits upward motion of the entire rolling basket when any part of it encounters a hard impediment. The lost motion connection comprises a pin in a curved slot that allows some vertical play over the entire length of the basket when it encounters a hard impediment. However, because the entire

basket is raised when a hard impediment is encountered, the rotary harrow will fail to level significant areas of the field due to the impact of relatively small hard impediments.

There remains a need for means of reducing damage to a rotary harrow and/or cultivator frame when the harrow encounters a hard impediment in a field while being dragged behind a tillage apparatus, while at the same time maximizing the effectiveness of the harrow at leveling the field.

Summary of the Invention

According to the present invention, there is provided a tillage apparatus for tilling ground, the tillage apparatus comprising a cultivator frame and a rotary harrow mounted to the frame, the rotary harrow comprising a basket and at least one rotating harrow structure mounted in the basket, the basket mounted to a mounting element with compressible material at the mounting element, the compressible material permitting relative motion between the basket and the mounting element in response to a motion of the rotary harrow, the mounting element mounted to the frame, the mounting element operatively connected to a hydraulic actuator whose operation raises and lowers the mounting element thereby raising and lowering the rotary harrow, and a pressure relief element for reducing back pressure caused by deflection of the rotary harrow.

According to another aspect of the invention, there is provided a kit for making a tillage apparatus as described previously from an existing cultivator frame and rotary harrow, the kit comprising: a hydraulic system including a hydraulic actuator, the hydraulic system able to provide a first pressure to the hydraulic actuator for lowering the rotary harrow and maintaining engagement of the rotary harrow with the ground; a mounting element for mounting the rotary harrow to the cultivator frame, the mounting element for operative connection to the hydraulic actuator; compressible material for permitting relative motion between the rotary harrow and the mounting element in response to a motion of the rotary harrow when the rotary harrow is mounted on the mounting element; a pressure relief element for reducing back pressure caused by deflection of the rotary harrow; and, a set of instructions for assembling the mounting element, rotary harrow, hydraulic system, compressible material and pressure relief element on the cultivator frame.

According to another aspect of the invention, there is provided a method of leveling a field comprising: providing a rotary harrow mounted on a tillage apparatus, the harrow mounted on the tillage apparatus with a mounting element and compressible

material at the mounting element to permit relative motion between the mounting element and the rotary harrow in response to the rotary harrow striking a hard impediment in the field; applying a force to the rotary harrow with a hydraulic actuator operated at a first pressure to engage the rotary harrow with the field; providing a pressure relief element to
 5 reduce back pressure caused by the rotary harrow striking a hard impediment in the field; and, dragging the tillage apparatus across the field.

The cultivator frame has a longitudinal axis in the direction of motion of the tillage apparatus as it is being dragged across the ground. The longitudinal axis runs from front to rear (or rear to front) of the frame. The cultivator frame has a transverse axis that is
 10 perpendicular to the longitudinal axis and runs left to right (or right to left) of the frame. The front end of the frame is mounted to the transportation (e.g. vehicle) that drags the apparatus. The cultivator frame may have having a plurality of longitudinally spaced apart transverse frame-members and a plurality of transversely spaced apart longitudinal frame-members.

15 The rotary harrow may be any manner of rotary harrow, including rotary packers. The rotating harrow structure may be rotating wheels or drums having spikes or ridges. One or more rotating harrow structures are mounted in a basket to form the rotary harrow. The basket may comprise axle mounting plates for mounting a rotatable axle and one or more support elements for mounting the basket on the cultivator frame.

20 There may be one or more rotary harrows mounted on the cultivator frame. A plurality (gang) of rotary harrows may be mounted transversely and/or longitudinally in respect of each other. One or more of the rotary harrows may be mounted on the frame in conjunction with compressible material and hydraulic actuators as described herein. The one or more rotary harrows are preferably mounted on a transverse frame-member of the
 25 cultivator frame, preferably with at least one of the rotary harrows mounted on a rearmost transverse frame-member.

The compressible material at the mounting element permits relative motion between the basket and the mounting element in response to a motion of the rotary harrow. Thus, the compressible material is positioned somewhere at the mounting
 30 element where it can provide a cushion between the rotary harrow and the mounting element. When the rotary harrow strikes a hard impediment (e.g. a rock) it will first deflect upward and will then deflect downward after clearing the impediment. In both the upward and downward deflection, the compressible material will be compressed absorbing some of the forces experienced by the harrow and mounting element thereby aiding the

hydraulic actuator in protecting the harrow and mounting element. Further, when only one side of the rotary harrow strikes a hard impediment it deflects upward in relation to the other side. Thus, the harrow pivots around the longitudinal axis in a twisting motion. Not only does this result in compressive forces upward and downward but also results in
5 sideways forces. The compressible material is also able to alleviate some of these sideways forces by compressing and elongating in an appropriate direction. Thus, compression and elongation of the compressible material permits some relative motion between the basket and the mounting element in both the vertical and horizontal directions, thereby relieving some of the stresses caused by the various motions of the
10 harrow after it strikes a hard impediment.

The compressible material is preferably an elastomer, for example a natural or synthetic rubber, for example a nitrile rubber. The compressible material may be in the form of one or more bushings. One or more support elements of the basket may be mounted on the mounting element. The mounting element may comprise one or more
15 receiving elements for the basket. There may be one or more than one mounting element per basket, for example two, three, four or more mounting elements. There are preferably two mounting elements per basket. The mounting elements are preferably symmetrically disposed on the basket. When there is one mounting element, the mounting element is preferably centered transversely on the basket. When there are two mounting elements,
20 the two mounting elements are preferably disposed transversely on the basket equidistant from the longitudinal centerline of the basket. The mounting element is preferably a mounting arm. The one or more receiving elements for the basket may be one or more mounting brackets. The one or more support elements of the basket may be one or more basket arms. In preferred embodiments, the compressible material may be
25 between the one or more basket arms and the mounting brackets or between the mounting brackets and mounting arms.

The compressible material comprises a thickness, which provides a suitably sufficient range of motion for the type of material used. The thickness may be, for example, in a range of 0.75-2 inches, e.g. 1.25 inches. Thicker material provides a
30 greater range of motion. The compressibility of the material is related to the Shore A hardness and the area of the material. The Shore A hardness of the material may be in a range of 55-100, particularly 65-90, for example 70, as measured on a durometer. Materials with lower Shore A hardness are softer, which permits greater relative motion between the basket and the mounting element.

The hydraulic actuator may be any hydraulic device that is capable of providing mechanical work in response to fluid pressure in the device. A hydraulic cylinder is one example, preferably a double acting hydraulic cylinder. In one embodiment, the hydraulic actuator is preferably a rephasing hydraulic cylinder. There may be one or more than one hydraulic actuator, preferably two, three, four or more. When there is one hydraulic actuator, the hydraulic actuator is preferably centered transversely on the basket. When there are two hydraulic actuators, the two hydraulic actuators are preferably disposed transversely on the basket equidistant from the longitudinal centerline of the basket. In one embodiment, there are preferably two hydraulic actuators per basket. In one embodiment, there is preferably one hydraulic actuator per mounting element. When one or more baskets are mounted to a tool bar through the mounting elements, it may be preferable to use an actuator mounted to the tool bar, whereby the mounting elements are operatively connected to the hydraulic actuator through the tool bar. Two or more hydraulic actuators may be mounted to the tool bar, in which case the hydraulic actuators are preferably symmetrically disposed on the toll bar.

Operation of the hydraulic actuator raises and lowers the mounting element. The mounting element may be mounted directly to the frame or the mounting element may be mounted to the frame through one or more intermediary structures. For example, the mounting element may be mounted to an additional support member, the additional support member mounted to the frame, or the mounting element may be mounted to a tool bar, the tool bar forming a common structure for mounting a plurality of mounting elements, and the tool bar being mounted to the frame through additional support members. Tool bars are preferably transversely oriented and may form a sub-frame on which various other tillage tools may be mounted in addition to the rotary harrow. The mounting element is preferably pivotally mounted to permit upward and downward motion relative to the structure to which the mounting element is mounted. In one arrangement, the hydraulic actuator is mounted directly on the frame and is mechanically connected to the mounting element, and the mounting element is movably mounted, for example pivotally mounted, directly on the frame to permit upward and downward motion of the mounting element. In another arrangement, there may an additional supporting element rigidly mounted to the frame, with the hydraulic actuator and mounting element mounted to the additional supporting element.

The hydraulic actuator's principle function is to apply a force on the mounting element to provide a force on the rotary harrow to maintain engagement of the harrow with the ground. A hydraulic system associated with the hydraulic actuator can

accomplish this in any suitable manner, for example with a closed system or an adjustable constant flow pressure reduce valve appropriately placed in the hydraulic circuit. The hydraulic system is set to provide the first pressure, which is the pressure at which the hydraulic actuator is operated to lower the rotary harrow and maintain engagement of the rotary harrow with the ground. The first pressure may be set to achieve an appropriate force per mounting element. The force per mounting element may be 100-450 pounds, for example 150 pounds. Depending on hydraulic line diameters, size of the hydraulic actuator and other aspects of the hydraulic system, the first pressure may be in a range of 1000-4500 psi, for example.

When the rotary harrow strikes a hard impediment, the harrow tries to deflect upward creating a back pressure in the actuator. In a normal hydraulic system, forward pressure would be increased to compensate, which would increase downward forces and strain on the mounting element and harrow and increase the possibility of damage thereto since the harrow would not be allowed to rise in response to striking the hard impediment.

However, in the present invention there is a pressure relief element for reducing back pressure caused by deflection of the rotary harrow. The pressure relief element preferably comprises a relief valve in fluid communication with the hydraulic actuator or a resilient member mounted to the mounting element.

In the case of a relief valve, the relief valve is set a second pressure. When the fluid pressure in the actuator increases beyond the second pressure, the relief valve opens permitting flow of fluid out of the actuator, for example into the hydraulic lines on the other side of the actuator where it can flow toward the other side of the actuator and/or back to the hydraulic pump. With the pressure in the actuator relieved, the actuator allows the mounting element and the harrow to rise in response to the harrow striking the hard impediment, thereby relieving strain on the mounting element and harrow. Once the harrow is over the hard impediment, the hydraulic system may permit hydraulic fluid to flood back into the actuators to maintain the first pressure. The second pressure may be adjustable depending on circumstance and is preferably set to correspond to a force per mounting element that is at least 10 pounds greater, for example 10-100 pounds greater, than the force per mounting element achieved by the first pressure. Depending on hydraulic line diameters, size of the hydraulic actuator and other aspects of the hydraulic system, the second pressure may be in a range of 100-1000 psi, for example.

In one embodiment where a single function relief valve is used, a hydraulic accumulator or like structure may be used to buffer back pressure caused when the

harrow strikes a hard impediment. In this case, the relief valve may be further equipped with hydraulic circuitry to allow hydraulic fluid to flow back into the hydraulic actuator after the relief valve has been tripped. In another embodiment a constant flow pressure reduce valve may be used in conjunction with the relief valve to set and maintain the first pressure. In this case, the relief valve and the pressure reduce valve may be part of the same double function valve. Such a double function valve can work cooperatively to ensure that the first pressure is maintained during normal operation while relieving back pressure when the harrow strikes a hard impediment. In all of these embodiments, downward force on the harrow still increases to some degree while the harrow deflects upward until a plateau is reached. However, the increase in fluid pressure and downward force are mitigated so that pressure is relieved through the relief valve in only extreme situations. After the harrow is finished deflecting, the downward force and fluid pressure return to normal. If desired, but not required, geometry of the mounting elements may be carefully controlled in combination with a constant flow pressure reduce valve to maintain a constant downward force on the harrow during deflection.

One or more additional pressure relief mechanisms may also be employed. For example, one or more additional hydraulic accumulators (e.g. reservoirs for hydraulic fluid) and/or additional relief valves may be placed in the hydraulic circuit at appropriate points to service different harrows in a gang. Often, one harrow in a gang will strike a hard impediment while the others do not. Having an additional relief mechanism near the affected harrow would improve response time of the hydraulic actuator or actuators associated with that harrow, thereby further reducing the chance of potential damage. It would also mean that the hydraulic actuators associated with unaffected harrows would not need to respond thereby keeping those harrows in contact with ground. Any number or combination of other relief mechanisms may be used.

In the case of a resilient member, the resilient member may be configured to transfer ground engaging forces generated by the hydraulic cylinder to the rotary harrow and configured to resiliently deform to reduce back pressure caused by deflection of the harrow. The resilient member preferably comprises a spring, for example a tension spring, particularly a helical tension spring. Forces that keep the harrow engaged with the ground arise from hydraulic actuator and are transferred to the harrow through the resilient member, which is biased under the force of the harrow engaging the ground. The pressure in the hydraulic actuator may then be locked at a constant value greatly simplifying the hydraulic circuit. The pressure may be set to a desired level based on field conditions, and setting of the pressure may be accomplished remotely (from the vehicle

cab or a central GPS operating system) without stopping the tillage operation. When the rotary harrow deflects, for example when it strikes a hard impediment, the hydraulic actuator does not need to compensate for back pressure because deflection of the harrow biases the resilient element further, which absorbs the back pressure while
 5 maintaining the necessary downward forces to keep the harrow engaged with the ground.

Where the pressure relief element comprises a resilient member, the hydraulic actuator preferably comprises two or more rephasing hydraulic cylinders. Rephasing hydraulic cylinders are two or more cylinders plumbed in series or parallel, with the bores and rods sized such that all rods extend and/or retract equally when hydraulic fluid flow is
 10 directed to the first, or last, cylinder within the hydraulic system. Preferably, the rephasing hydraulic cylinders are plumbed in series. In series applications, the bore and rod sizes are typically different. This hydraulic synchronization of rod positions eliminates the need for a flow divider in the hydraulic system, or any type of mechanical connection between the cylinder rods to achieve synchronization. When harrows are commonly used in high
 15 speed applications like vertical tillage, there is a durability limitation due to speed and obstacles encountered. When a rotary harrow hits an obstacle at high speed it will absorb a significant amount of energy that must not damage (e.g. break or fatigue) the frame and/or the harrow. Damage can happen when one side of the harrow hits a hard impediment and begins to bounce up while the mounting element on the other side of the
 20 harrow is holding it down. This is particularly a problem with prior art apparatuses that use springs to hold the harrow down. When this happens, both the weight of the harrow and the down-pressure applied by the springs react against this sudden force. When moving at more than 10 mph it takes only a small fraction of a second for the side of the harrow that hit the impediment to deflect out of the way of the impediment, thereby moving the
 25 other mounting element and rest of the harrow along with it, but at very poor leverage since the other mounting element is at the opposite side of the harrow. This can result in significant damage, especially to the mounting elements.

In the present invention, the compressible material compensates for some of the initial forces and allows the harrow to deflect and 'give' a little along the plane of the frame
 30 on which the mounting elements are mounted. Also, the hydraulic system with a relief valve allows the actuator to rapidly empty when the back pressure exceeds the second pressure, the second pressure being adjustable to whatever the operator desires. Or the hydraulic system in conjunction with a resilient member permits a constant downward force on the harrow while allowing the harrow to deflect safely under control of the
 35 resilient member. Thus, unlike in spring systems of the prior art, the hydraulic pressure

does not continue to increase or increases only a little and well within the tolerances of the equipment. Furthermore, a constant flow pressure reduce valve circuit, when it is used, automatically pushes the arms back down when the harrow is past the impediment. These features can act cooperatively to reduce the possibility of damage to the mounting
 5 elements and/or harrow.

As discussed above in the case where the pressure relief element comprises a relief valve, the compressible material and hydraulic actuator work in tandem together to cooperatively compensate for the motion of the rotary harrow when it strikes a hard impediment. For this reason, a balance is preferably struck between the first and second
 10 pressures and the compressibility of the compressible material. When the compressible material is very compressible, a greater amount of motion may be accommodated by the compressible material. However, if the first pressure, and therefore also the second pressure, is set high, the compressible material will be forced to do all of the work as the back pressure in the actuator may not get high enough to open the relief valve.
 15 Conversely, if the compressible material is less compressible, a lesser amount of motion may be accommodated. In this circumstance, if the first pressure, and therefore also the second pressure, is set low, the relief valve will trip more often and the harrow will be too often disengaged from the ground. Therefore, when the compressible material is very compressible, lower first and second pressures are desirable, while when the
 20 compressible material is less compressible, higher first and second pressures are desirable.

Because the compressible material reacts faster than the pressure relief element in response to deflection of the harrow, the compressible material is preferably engineered to accommodate more of the back pressure than the pressure relief element
 25 when the harrow strikes a hard impediment. In practice, the maximum total force applied by one of the hydraulic actuators to the harrow as a result of the first pressure is set so that the compressibility of the material can accommodate between about one-half and three-quarters of the total maximum force during a deflection event. The remaining one-half to one-quarter is accommodated by the action of the pressure relief element.
 30 Preferably, the compressibility of the material can accommodate about two-thirds of the total maximum force, with the remaining one-third accommodated by the pressure relief element.

The tillage apparatus is preferably a conservation tillage apparatus. The tillage apparatus may have one or more other leveling attachments mounted thereon, for
 35 example spike harrows, leveling bars, other rotary harrows, etc. The tillage apparatus

may have one or more field working tools mounted thereon, for example coulter wheels, chisel plows, V-shaped shovels, sub-soiling teeth, etc. Leveling attachments are generally mounted on the cultivator frame rearward of the field working tools.

Further features of the invention will be described or will become apparent in the
5 course of the following detailed description.

Brief Description of the Drawings

In order that the invention may be more clearly understood, embodiments thereof will now be described in detail by way of example, with reference to the accompanying drawings, in which:

10 Fig. 1 is a top view of a tillage apparatus of the present invention having four harrow assemblies mounted to a transverse frame-member at a rear of a cultivator frame of the tillage apparatus;

Fig. 2 is a perspective view of one of the harrow assemblies from Fig. 1;

Fig. 3 is a top view of Fig. 2;

15 Fig. 4 is a side view of Fig. 2;

Fig. 5A is a perspective close up view of a hydraulic cylinder mounted to a harrow supporting arm and connected to a pivoting mounting arm;

Fig. 5B is a side view of Fig. 5A;

20 Fig. 6A is a perspective partial close up view of a rotary harrow mounted to a mounting arm;

Fig. 6B is a side view of Fig. 6A;

Fig. 7A is a schematic side view of a rotary harrow mounted to a mounting arm while traveling over even ground and showing rubber material cushioning a basket arm within a mounting bracket on a mounting arm;

25 Fig. 7B shows how the rotary harrow and rubber material depicted in Fig. 7A deflect and deform, respectively, as the rotary harrow travels over a rock;

Fig. 7C is a rear end view of the rotary harrow depicted in Fig. 7A and 7B showing position of the harrow before and during the traveling over the rock;

Fig. 8A is a perspective view of a rotary harrow mounted to a mounting arm showing an alternate arrangement of a mounting bracket and rubber material;

Fig. 8B is a top view of Fig. 8A;

Fig. 8C is a rear end view of Fig. 8A;

5 Fig. 9A is a perspective view of a single pivot embodiment of harrows mounted to a transverse frame-member of a cultivator frame;

Fig. 9B is a top view of Fig. 9A;

Fig. 9C is a side view of Fig. 9A;

10 Fig. 10 is a side view of a double roller embodiment in which two rotary harrows are mounted longitudinally in relation to each other to common pivoting mounting arms;

Fig. 11 is a side view of another embodiment of a tillage apparatus of the present invention having two rotary harrows mounted thereon, one harrow at a rear of the apparatus and the other at a front of the apparatus;

15 Fig. 12A is a schematic diagram of a first embodiment of a hydraulic circuit for use in controlling a rotary harrow in the present invention;

Fig. 12B is a schematic diagram of a second embodiment of a hydraulic circuit for use in controlling a rotary harrow in the present invention, the hydraulic circuit comprising extra relief valves;

20 Fig. 12C is a schematic diagram of a third embodiment of a hydraulic circuit for use in controlling a rotary harrow in the present invention, the hydraulic circuit comprising hydraulic accumulators;

Fig. 12D is a schematic diagram of a fourth embodiment of a hydraulic circuit for use in controlling a rotary harrow in the present invention, the hydraulic circuit comprising hydraulic accumulators and a single function relief valve;

25 Fig. 13A is a perspective view of a double function valve useful in a hydraulic circuit for controlling the rotary harrow;

Fig. 13B is a side view of the valve depicted in Fig. 13A;

Fig. 14 is a top view of another embodiment of a tillage apparatus of the present invention having four harrow assemblies mounted to sub-frames at a rear of a cultivator frame of the tillage apparatus, the sub-frames mounted to a transverse frame-member;

Fig. 15A is a perspective view of the two central harrow assemblies from Fig. 14;

5 Fig. 15B is a top view of Fig. 15A;

Fig. 15C is a side view of Fig. 15A;

Fig. 16A is a perspective close up view of a hydraulic cylinder mounted to a supporting arm and to a tool bar, the tool bar having a mounting arm pivotally mounted thereon and helical tension springs connecting the pivoting mounting arm to the tool bar;

10 Fig. 16B is a side view of Fig. 16A;

Fig. 17A is a side view showing a hydraulic cylinder, helical tension spring and mounting arm with rotary harrow mounted on a tool bar, where the hydraulic cylinder is partially extended and the harrow is on flat ground;

Fig. 17B is the same view as Fig. 17A with the hydraulic cylinder fully retracted;

15 Fig. 18A is a side view showing a hydraulic cylinder, helical tension spring and mounting arm with rotary harrow mounted on a tool bar, where the hydraulic cylinder is fully extended to raise the harrow off the ground;

Fig. 18B is the same view as Fig. 18A with the hydraulic cylinder fully retracted for maximum ground engaging force while the harrow is being deflected by a rock;

20 Fig. 19 is a side view of another embodiment of a tillage apparatus of the present invention having harrow assemblies mounted to a transverse frame-member at a rear of a cultivator frame of the tillage apparatus and utilizing helical tension springs as pressure relief elements; and,

25 Fig. 20 is a schematic diagram of a hydraulic circuit for use with rephasing hydraulic cylinders in controlling a rotary harrow in the present invention.

Description of Preferred Embodiments

Fig. 1 depicts a tillage apparatus having a gang of four harrow assemblies mounted to transverse frame-member **95** at a rear of cultivator frame **94** of the tillage

apparatus. The tillage apparatus further comprises a plurality of field working tools such as coulter wheels **92** and chisel plows **91** (only one of each being labeled). The frame rides on eight wheels with rubber tires **90** (only one labeled) and is towed using tow bar **88** hitched to a tractor with hitch **89**. The four harrow assemblies are mounted on transverse frame-member **95** through two harrow supporting arms per harrow assembly (only one labeled as **113a**) with two mounting brackets per harrow assembly (only one labeled as **114a**). The gang of four harrow assemblies comprises rotary harrows **100,99,98,97** and spike harrows **150,149,148,147**. The four rotary harrows are mounted to the harrow supporting arms by two mounting arms per rotary harrow (only one labeled as **110a**) mounted to a basket arm (only one labeled as **105**) on a basket of each rotary harrow. Parts and operation of the harrow assemblies are described in more detail in connection with Figs. 2-7.

Figs. 2-4 depict closer views of the left-most harrow assembly depicted in Fig. 1. In this embodiment there are two mounting arms for mounting one rotary harrow on the cultivator frame at the rear of the tillage apparatus. The harrow assembly comprises rotary harrow **100** and spike harrow **150**. Rotary harrow **100** comprises seven generally transversely oriented harrow blades **101** (only one labeled) mounted on four transversely spaced apart rotating wheels **102** that rotate on transversely oriented axle **103** when the harrow blades are in contact with the ground while the tillage implements is being dragged across the a field. The axle is rotatably mounted in a harrow basket comprising two axle support plates **104**, between which the axle is rotatably supported, and basket arm **105** attached rigidly to and extending transversely between the axle support plates. The rotary harrow is mounted on the ends of left and right mounting arms **110a,110b** with basket arm **105** extending through basket mounting brackets **111a,111b**. The left and right mounting arms are approximately equidistant from a longitudinal centerline running through the rotary harrow from the front to the rear of the tillage apparatus. This is to equally balance the weight of the harrow between the two mounting arms. As is seen more clearly in Figs. 6 and 7, there are four nitrile rubber inserts between the basket arm and each basket mounting bracket.

Mounting arms **110a,110b** are pivotally mounted on arm pivots **112a,112b** to permit upward and downward deflection of the rotary harrow when the rotary harrow strikes a hard object in the field. The arm pivots are rigidly attached to left and right harrow supporting arms **113a,113b**, which are rigidly mounted to the rear transverse frame-member of the cultivator frame by support arm mounting brackets **114a,114b**. Spike harrow **150** comprising a plurality of spikes **151** (only one labeled) mounted on

three longitudinally separated transverse crossbars **152** is also pivotally mounted to harrow supporting arms **113a,113b** at spike harrow pivots **153a,153b** through spike harrow support arms **154a,154b** to permit free upward and downward deflection of the spike harrow. Left and right double acting hydraulic cylinders **115a,115b** are mounted
 5 pivotally on left and right harrow supporting arms **113a,113b** at pivot points **116a,116b** with piston rods **117a,117b** pivotally attached to mounting arms **110a,110b** at pivot points **118a,118b**. When the piston rods are fully retracted, the rotary harrow is in contact with the ground. When the rotary harrow is deflected upwards, the piston rods extend in response. In normal operation, the hydraulic cylinders are operated with a fixed pressure
 10 to retract the piston arms to keep the rotary harrow in contact with the ground.

Figs. 5A and 5B depict closer views of left hydraulic cylinder **115a** and how it is mounted in relation to left mounting arm **110a** and left harrow supporting arm **113a**, as discussed above. The right hydraulic cylinder is mounted similarly on the right mounting arm and right harrow supporting arm. The hydraulic cylinders also comprise hydraulic
 15 fluid couplings, for example hydraulic fluid coupling **119a** in Fig. 5, in fluid communication with a hydraulic circuit and the hydraulic cylinder for providing hydraulic fluid to and receiving hydraulic fluid from the hydraulic cylinder. Hydraulic pressure can be used to retract or extend the piston rods as desired.

Figs. 6A and 6B depict closer views of rotary harrow **100** and how it is mounted to
 20 left mounting arm **110a**, as described above. As seen more clearly in Fig. 6B, four nitrile rubber inserts **120a** are placed between basket arm **105** and left basket mounting bracket **111a**. There is a similar arrangement on the right side of the rotary harrow.

As depicted in Figs. 7A-7C in relation the rotary harrow of Figs. 2-6, when rotary harrow **100** is on level ground **130** while the tillage implement in moving forward in
 25 direction **A**, nitrile rubber inserts **120b** between basket arm **105** and right basket mounting bracket **111b** are not deformed (see Fig. 7A for greatest clarity). When the right side of rotary harrow **100** strikes rock **135**, the rotary harrow deflects upward in direction **B**. This exerts a force in direction **C** on right basket mounting bracket **111b** and right mounting arm **110b** through basket arm **105**. The force causes nitrile rubber inserts **120b** to deform
 30 as depicted in Fig. 7B, thereby providing some play in the connection between the basket arm and basket mounting bracket, which relieves some of the stresses caused by the force. Thus, the deformation of the rubber inserts protects the rotary harrow and/or the rest of the apparatus (e.g. the brackets, arms and/or frame) from damage.

To provide a more complete view of the motions at work when the rotary harrow strikes the rock as shown in Fig. 7A and 7B, Fig. 7C depicts a rear end view of rotary harrow **100** before and during the striking of rock **135**. Images of mounting arms **110a,110b**, mounting brackets **111a,111b**, four nitrile rubber inserts **120a,120b** (only one each labeled for clarity) and basket arm **105** before and during the striking of the rock are superimposed on each other to show the relative positions of these elements before and during the striking of the rock. For clarity, only one of the superimposed images is labeled. Thus, when the right side of the rotary harrow strikes rock **135**, the right side of the rotary harrow deflects upward in direction **B** for a distance **H**. This causes right side mounting arm **110b** to deflect upward in direction **D**. Because the right and left sides of the rotary harrow are connected, upward deflection of the right side would tend to cause the left side to deflect upward as well, except that both gravity and the left hydraulic cylinder exert downward forces on the left side of rotary harrow **100** and on left mounting arm **110a** in directions **G** and **F**, respectively. Because the left side is being held down by the left hydraulic cylinder and gravity, the right side, which is being forced upward by the rock, also experiences a sideways (transverse) force that pushes right mounting arm **110b** in direction **E**. The upward and sideways forces on right mounting arm **110b** cause it to move up and toward the right in relation to left mounting arm **110a** so that normal distance **I** between the left and right mounting arms increases to distance **J**. Left mounting arm **110a** stays in relatively the same position before, during and after the right side of the rotary harrow striking the rock.

All of this movement on the right side of the rotary harrow in response to striking the rock has the potential to cause damage, especially if the rotary harrow was completely rigidly attached to the mounting arms. However, in the present invention, deformation of nitrile rubber inserts **120a,120b** can compensate for the relative motion between the right and left sides of the rotary harrow. This can be seen by comparing the shapes of nitrile rubber inserts **120b** in Fig. 7C before (see area **Y**) and after (see area **Z**) the rotary harrow strikes the rock. Before striking the rock as seen in area **Y**, the four nitrile rubber inserts **120b** have a regular shape all around basket arm **105** within right mounting bracket **111b**. Upon deflection (area **Z**) pivoting of basket arm **105** around a longitudinal axis causes the gap between the mounting bracket and the basket arm at the upper right and lower left portions of the mounting bracket to decrease thereby squeezing the rubber inserts so that the rubber becomes thinner at these portions of the mounting bracket. Conversely, the gap between the mounting bracket and the basket arm at the lower right and upper left portions of the mounting bracket increase so that the rubber inserts at these locations can thicken in response to the thinning at the other portions.

Further, the sideways motion of the right mounting arm causes shear forces on the rubber inserts such that the tops of the inserts also deform toward the right in relation to the bottoms of the inserts. In profile, the nitrile rubber inserts change from a rectangular shape (see area Y) to an irregular rhombus shape (see area Z) in response to the forces caused by striking the rock. Nitrile rubber inserts **120a** on the left side undergo the same kinds of deformation. Thus, it can be seen from Fig. 7 that the compressible rubber inserts are advantageously capable of compensating for the various forces at play when the rotary harrow strikes a rock, thereby relieving stresses that these forces would otherwise inflict on the mounting brackets, mounting arms, frame and/or basket arm.

Figs. 8A-8C depict rotary harrow **160** whose basket arm **145** is mounted to mounting arms **140a,140b** through an alternate arrangement of mounting brackets **141a,141b** and rubber material **147**. In this arrangement, rubber material **147** is between mounting brackets **141a,141b** and mounting arms **140a,140b**, rather than between the mounting brackets and basket arm as depicted in Fig. 7. In Fig. 8, the rubber material runs parallel to the mounting arms and perpendicular to the basket arm rather than perpendicular to the mounting arms and parallel to the basket arm as depicted in Fig. 7.

Figs. 9A-9C depict an embodiment of a harrow assembly in which rotary harrow **200** and spike harrow **250** are mounted to a cultivator frame with only one mounting arm **210** and one harrow supporting arm **213**. In this embodiment, the mounting arm and supporting arm are located as close as possible to a longitudinal centerline running through the rotary harrow and spike harrow from the front to the rear of the tillage apparatus in order to balance the weight of each harrow as closely as possible on either side of the arms. In this embodiment, additional support bar **221** is welded to basket mounting brackets **211a,211b** and support bar bracket **222** is used to mount the additional support bar to mounting arm **210**. Otherwise, the structures are similar to those described in Figs. 2-7.

The tillage apparatus can comprise more than one rotary harrow. As shown in Fig. 10, two longitudinally spaced apart rotary harrows **300a,300a'** can be mounted on the same two transversely spaced apart mounting arms (only mounting arm **310a** is depicted) using additional support assembly **321** to which the basket arms of both rotary harrows can be mounted using two basket mounting brackets per basket arm. Only one the left mounting brackets **310a,310a'** on each basket arm of each rotary harrow are depicted.

Fig. 11 shows another embodiment of a tillage apparatus having two rotary harrows **400a,400a'**, in which one rotary harrow **400a** is mounted at a rear of the

apparatus on a rear-most transverse frame-member and the other rotary harrow **400a'** is mounted at the front of the apparatus on a front-most transverse frame member. Mounting of the rotary harrows is as described in relation to Figs. 2-7, except that there is no spike harrow associate with front-most rotary harrow **400a'**, while spike harrow **450** is associated with rear-most harrow **400a**.

Other features of the tillage apparatus can also be seen in Fig. 11, including cultivator frame **460**, hitch **480** and tow bar **481**. Gangs of different sized coulter wheels **470,471,472** can be lowered into engagement with a field or raised away from the field by the action of hydraulic cylinders and pivoting arms, for example **482** and **483**, respectively.

Fig. 12A is a schematic diagram of a first embodiment of a hydraulic circuit for use in controlling a gang of four transversely spaced apart rotary harrows. The circuit comprises a plurality of hydraulic lines containing hydraulic fluid for transmitting hydraulic pressure to eight double acting hydraulic cylinders **550a-h**. Cylinders **550a,550b** control two mounting arms for a first rotary harrow, cylinders **550c,550d** control two mounting arms for a second rotary harrow, cylinders **550e,550f** control two mounting arms for a third rotary harrow and cylinders **550g,550h** control two mounting arms for a fourth rotary harrow. The cylinders are shown retracted, meaning that the harrow is engaged with the ground. Various couplings, including two-way couplings (e.g. **510**) and three-way couplings (e.g. **512**) join lines to provide fluid pressure to various parts of the circuit. One or more of the couplings may contain shut-off valves if desired.

Under normal operation in which the hydraulic cylinders are retracted under a fixed pressure to maintain engagement of the rotary harrows with the ground, hydraulic fluid pressure is transmitted to the circuit from a hydraulic supply and a hydraulic pump on a tractor through a feed line coupled with coupling **503** to hydraulic line **501**. Fluid pressure is transmitted to pressure reduce valve **505** in double function valve **500** where the pressure reduce valve is set to provide the fixed fluid pressure to the hydraulic cylinders through line **511** in fluid communication with the pressure reduce valve. Fluid pressure is thus transmitted from the pressure reduce valve to the hydraulic cylinders through line **511**, three-way coupling **553** and a plurality of lines, two-way couplings **551** and three-way couplings **555** to hydraulic cylinders **550a-h**. The fixed fluid pressure is set at a value sufficient to provide a force of about 150 pounds on each mounting arm through the cylinders. The actual pressure will depend on system parameters, for example the internal diameter of the hydraulic lines. Provided one or more of the rotary

harrows does not strike a hard object, the cylinders will remain retracted and the rotary harrows will remain in constant engagement with the ground under a fixed force.

Double function valve **500** also comprises pressure relief valve **504** that is also in fluid communication with line **511** and that is set to open at a set pressure that exceeds the fixed fluid pressure by an amount corresponding to an equivalent of 20 pounds of extra force applied by one cylinder. When a rotary harrow strikes a rock with sufficient force to create a backpressure in one or more of the hydraulic cylinders equal to or greater than the set pressure of the relief valve, relief valve **504** will open and hydraulic fluid will rush into line **514** to relieve the pressure in the cylinders. The cylinders will extend in response to the harrow striking the rock and the relief in pressure in the cylinders thereby permitting the rotary harrow to deflect upward as the mounting arms are no longer forcing the rotary harrow down. When the pressure in the cylinder again drops to or below the fixed fluid pressure once the rock has been passed, pressure relief valve **504** will close and pressure to the cylinders will rise to and once again be maintained at the fixed fluid pressure. Excess fluid that rushed into line **514** can ultimately flow to the other side of the cylinders through line **506** and a plurality of other lines and three-way valves after line **506**, or back to the hydraulic supply through line **502** that is coupled to a return line with coupling **507**.

It is also apparent from the hydraulic circuit that applying pressure through line **502** rather than line **501** will supply fluid pressure to the other side of the hydraulic cylinders thereby extending the cylinders and raising the rotary harrows. This is useful when an operator does not wish to have the harrows engaged with the ground, for example, while transporting the implement to the field.

Fig. 12B is a schematic diagram of a second embodiment of a hydraulic circuit that is similar to the circuit of Fig. 12A except that two additional relief valves **644,645** are placed in the circuit on opposite sides. Left side relief valve **644** is proximal hydraulic cylinders **650a-d** and right side relief valve **645** is proximal hydraulic cylinders **650e-h**. The left and right side relief valves are set to open at a set pressure that is the same as the set pressure of relief valve **604** in double function valve **600** (although the set pressure of one or more of the relief valves could be different than the others if desired). When a rotary harrow on the left side strikes a rock and pressure in one or more of cylinders **650a-d** increases beyond the set pressure of relief valve **644**, the valve will open to relieve the pressure as described above and excess fluid will flow into line **631** and through four-way coupling **632**, and can ultimately flow to the other side of cylinders **650a-d** or through line **633** and eventually back to the hydraulic supply through line **602**

that is coupled to a return line. Likewise, when a rotary harrow on the right side strikes a rock and pressure in one or more of cylinders **650e-h** increases beyond the set pressure of relief valve **645**, the valve will open to relieve the pressure as described above and excess fluid will flow into line **641** and through four-way coupling **642**, and can ultimately
 5 flow to the other side of cylinders **650e-h** or through line **643** and eventually back to the hydraulic supply through line **602** that is coupled to a return line. Additional relief valves **644,645** permit faster and localized response to striking a rock so that relief valve **604** may not need to open. In this way, when a rotary harrow on one side strikes a rock, the rotary harrows on the other side can remain engaged with the ground. Otherwise, the
 10 hydraulic circuit of Fig. 12B functions in the same way as that of Fig. 12A.

Fig. 12C is a schematic diagram of a third embodiment of a hydraulic circuit that is similar to the circuit of Fig. 12A except that two hydraulic accumulators **744,745** are placed in the circuit on opposite sides. The accumulators occupy the same positions in the circuit as the two additional relief valves do in Fig. 12B. Hydraulic accumulators are
 15 simply hydraulic empty loops of hydraulic line into which excess hydraulic fluid can be pushed when the pressure in the cylinders increases due to the harrow striking a rock. They serve a similar function as the additional relief valves in Fig. 12B, but the advantage of accumulators over additional relief valve lies in the elimination of the extra lines and couplings associated with the additional relief valves. However, hydraulic accumulators
 20 have a limit to the amount of pressure that can be relieved.

Fig. 12D is a schematic diagram of a fourth embodiment of a hydraulic circuit for use in controlling a gang of four transversely spaced apart rotary harrows. The circuit comprises a plurality of hydraulic lines containing hydraulic fluid for transmitting hydraulic pressure to eight double acting hydraulic cylinders **850a-h**. Cylinders **850a,850b** control
 25 two mounting arms for a first rotary harrow, cylinders **850c,850d** control two mounting arms for a second rotary harrow, cylinders **850e,850f** control two mounting arms for a third rotary harrow and cylinders **850g,850h** control two mounting arms for a fourth rotary harrow. The cylinders are shown retracted, meaning that the harrow is engaged with the ground. Various couplings, including two-way couplings (e.g. **810**) and three-way
 30 couplings (e.g. **812**) join lines to provide fluid pressure to various parts of the circuit. One or more of the couplings may contain shut-off valves if desired.

Under normal operation in which the hydraulic cylinders are retracted under a fixed pressure to maintain engagement of the rotary harrows with the ground, hydraulic fluid pressure is transmitted to the circuit from a hydraulic supply and a hydraulic pump on
 35 a tractor through a feed line coupled with coupling **803** to hydraulic line **801**. Fluid

pressure is transmitted through ball valve **816** and relief valve **804** to the hydraulic cylinders through line **811** in fluid communication with the relief valve. Fluid pressure is thus transmitted from the relief valve to the hydraulic cylinders through line **811**, three-way coupling **853** and a plurality of lines, two-way couplings **851** and three-way couplings **855** to hydraulic cylinders **850a-h**. The fluid pressure is set at a value sufficient to provide a force of about 150 pounds on each mounting arm through the cylinders. The actual pressure will depend on system parameters, for example the internal diameter of the hydraulic lines. Provided one or more of the rotary harrows does not strike a hard object, the cylinders will remain retracted and the rotary harrows will remain in constant engagement with the ground under a fixed force.

During operation, ball valve **816** in fluid communication with line **801** is closed to prevent fluid from returning through the inlet line. Additionally, ball valve **817** in fluid communication with line **806** is closed to prevent fluid from by-passing relief valve **804** when the harrow strikes a hard impediment. Thus, in operation the hydraulic circuit is closed. Fluid pressure in the hydraulic circuit and downward forces acting on the mounting arms and harrow increase when the harrow strikes a hard impediment. To reduce the pressure in the hydraulic circuit and therefore the downward force on the mounting arms and harrow, fluid under the excess pressure flows into hydraulic accumulators **844,845**, which buffer the pressure in the circuit and reduce the forces on the mounting arms and harrow. Due to back pressure from air in the hydraulic accumulators, the pressure and therefore the downward forces are not maintained at a constant level throughout the deflection of the harrow, the pressure and forces allowed to increase until a plateau is reached. If the plateau exceeds the set pressure on relief valve **804**, the relief valve will trip and excess fluid will flow through line **814** and back to the hydraulic supply through line **802** that is coupled to a return line with coupling **807**.

Perspective and side views of double function valve **500** from Fig. 12A are shown in Figs. 13A and 13B. Such a valve combines pressure reduce valve **505** and relief valve **504**, both of which are in fluid communication with port **518** that is coupled to line **511** in the circuit of Fig. 12A. Pressure gauge **517** measures pressure at the pressure reduce valve, while port **519** is in fluid communication with the relief valve so that when the relief valve opens fluid can flow through the relief valve into line **514** in the circuit of Fig. 12A.

Fig. 14 depicts another embodiment of a tillage apparatus having a gang of four harrow assemblies mounted to tool bars **1005,1006,1007**, which are in turn mounted to transverse frame-member **1095** at a rear of cultivator frame **1094** of the tillage apparatus. The tillage apparatus further comprises a plurality of field working tools such as tillage

and fertilizer application shanks **1093**, coulter wheels **1092** and disc harrows **1091** (only one of each being labeled). The frame rides on eight wheels with rubber tires **1090** (only one labeled) and is towed using tow bar **1088** hitched to a tractor with hitch **1089**. The tool bars **1005,1006,1007** are mounted on the transverse frame-member **1095** by six
 5 supporting arms **1113** (only one labeled). The gang of four harrow assemblies comprises rotary harrows **1100,1099,1098,1097** and a plurality of spike harrows **1150** (only one labeled). The four rotary harrows are mounted to the tool bars by two mounting arms per rotary harrow (only one labeled as **1114**) mounted to a basket arm (only one labeled as **1105**) on a basket of each rotary harrow. Parts and operation of the harrow assemblies
 10 are described in more detail in connection with Fig. 15A, Fig. 15B and Fig. 15C.

Fig. 15A, Fig. 15B and Fig. 15C depict closer views of the center harrow assembly depicted in Fig. 14. In this embodiment there are two mounting arms **1114** per rotary harrow for mounting each rotary harrow **1098,1099** on a single tool bar **1006**. The harrow assembly comprises rotary harrows **1098,1099** and spike harrows **1150** (only one
 15 labeled). Rotary harrows **1098,1099** are similar in nature to the one described in connection with Fig. 2. The rotary harrows **1098,1099** are mounted on the ends of mounting arms **1114** with basket arms **1105** extending through basket mounting brackets **1111**. The mounting arms on each rotary harrow are approximately equidistant from a longitudinal centerline running through the rotary harrow from the front to the rear of the
 20 tillage apparatus. As described in connection with Figs. 6 and 7, there are four nitrile rubber inserts between the basket arm and each basket mounting bracket.

Mounting arms **1114** are pivotally mounted on arm pivots **1112** at pivot points **1109** to permit upward and downward deflection of the rotary harrows when the rotary harrows strike hard objects in the field. The arm pivots **1112** are rigidly attached to the
 25 tool bar **1006**, which is rigidly mounted to the rear transverse frame-member of the cultivator frame through two supporting arms **1113** mounted to the frame-member by support arm mounting brackets **1110**. Spike harrows **1150** (only one labeled) comprising a plurality of spikes **1151** (only one labeled) are mounted to the tool bar **1006**. Rephasing hydraulic cylinders **1115** are mounted pivotally on the supporting arms **1113** at pivot
 30 points **1116** with piston rods **1117** pivotally attached the tool bar **1006** through brackets **1119** at pivot points **1118**. When the piston rods are fully retracted, the rotary harrow is in contact with the ground. When the rotary harrow is deflected upwards, mounting arms **1114** pivot at pivot points **1109** to stretch helical tension springs **1120**, two per mounting arm for a total of eight for the two rotary harrows. Eight helical tensions springs **1120** are

connected to the tool bar **1006** at eight flanges **1121** and to four mounting arms **1114** at eight hooks **1122**, as best seen in Fig. 15C for one spring **1120**.

In normal operation, the rephasing hydraulic cylinders **1115** are operated with a locked pressure to keep the rotary harrow in contact with the ground. Helical tensions
 5 springs **1120** act to buffer the deflection of the rotary harrow after striking a hard object and to return the rotary harrow to the ground after clearing the hard object. The rephasing cylinders are plumbed in series to permit simultaneous control of the cylinder strokes across the apparatus to permit pressure control from a remote location without stopping the apparatus. Indicators (not shown), for example pivoting indicators, may be mounted
 10 on each harrow assembly to permit remote determination of where each rotary harrow is set by the stroke of the cylinders. This permits an operator to readily determine whether a pressure adjustment is needed to suit operating conditions. In addition, the ability to remove or adjust rotary harrow down pressure remotely permits the operator to adjust down pressure for field conditions, or to lift the harrows out of the way if needed.

Figs. 16A and 16B depict closer views of rephasing hydraulic cylinder **1115** and how it is mounted in relation to mounting arm **1114** and harrow supporting arm **1113**, as discussed above. Tool bar **1006** supports both rephasing hydraulic cylinder **1115** and mounting arm **1114**. Hydraulic cylinder **1115** is pivotally connected to the supporting arm **1113** at pivot point **1116** and pivotally connected to tool bar **1006** at pivot point **1118** on
 20 bracket **1119** mounted on tool bar **1006**. The hydraulic cylinders also comprise hydraulic fluid couplings in fluid communication with a hydraulic circuit and the hydraulic cylinder for providing hydraulic fluid to and receiving hydraulic fluid from the hydraulic cylinder. Hydraulic pressure can be used to retract or extend piston rod **1117** as desired, where retraction of piston rod **1117** causes tool bar **1006** to lower thereby engaging the rotary
 25 harrow with the ground while extension of piston rod **1117** raises tool bar **1006** thereby lifting the rotary harrow from the ground. Mounting arm **1114** is pivotally mounted on arm pivot **1112** at pivot point **1109**, arm pivot **1112** being rigidly mounted on tool bar **1006**. Two helical tension springs **1120** connect tool bar **1006** to mounting arm **1114**. When hydraulic cylinder **1115** retracts and lowers tool bar **1006**, the rotary harrow at the end of mounting arm **1114** engages the ground forcing mounting arm **1114** to pivot upward
 30 around pivot point **1109**. Because the springs **1120** connect tool bar **1006** to mounting arm **1114**, the pivoting of mounting arm **1114** causes springs **1120** to stretch. The stretching is more clearly illustrated in Fig. 17A and Fig. 17B. Springs **1120** are connected to tool bar **1006** through flanges **1121** welded to the tool bar. Springs **1120** are connected

to mounting arm **1114** through hooks **1122** bolted to flange **1123** welded to mounting arm **1114**.

Fig. 17A and Fig. 17B illustrate the effect of retraction of piston rod **1117** of hydraulic cylinder **1115** when rotary harrow **1098** is engaged with ground **2000**. As shown in Fig. 17A, with piston rod **1117** in a partially retracted state, rotary harrow **1098** is engaged with ground **2000** under a specific force related to the pressure in hydraulic cylinder **1115**. Total length of the hydraulic cylinder **1115** from pivot point **1116** to pivot point **1118** is **Z1** and total length of helical tension spring **1120** from flange **1121** to hook **1122** is **Y1**. Supporting arm **1113** is a distance **X** off the ground. When piston rod **1117** is further retracted so that the total length of hydraulic cylinder **1115** is **Z2** as shown in Fig. 17B, tool bar **1006** is forced down thereby increasing the downward force on rotary harrow **1098** engaged with the ground **2000**. Because rotary harrow **1098** has no space to move downward, the increased downward force causes mounting arm **1114** to pivot upward at pivot point **1109** on arm pivot **1112**. Upward pivoting of mounting arm **1114** causes spring **1120** to stretch to length **Y2**. Increased tension in the spring **1120** due to stretching increases downward bias forces on the harrow **1098**, thus forces generated by the pressure change in hydraulic cylinder **1115** between Fig. 17A and Fig. 17B are transferred to the spring **1120**, which in turn acts on mounting arm **1114** and therefore rotary harrow **1098** at the end of mounting arm **1114**. Thus, pressure control in hydraulic cylinder **1115** controls the force at which rotary harrow **1098** engages the ground. Hydraulic pressure and therefore ground engaging force of the harrow **1098** may be controlled remotely, for example from the cab of a vehicle pulling the tillage apparatus, to adjust for field conditions. It can be seen from Fig. 17A and Fig. 17B that the distance **X** of the supporting arm **1113** off the ground does not change, therefore the action of hydraulic cylinder **1115** does not unduly affect the cultivator frame to which supporting arm **1113** is mounted.

Fig. 18A and Fig. 18B illustrate the difference in arrangement of hydraulic cylinder **1115**, tool bar **1006** and helical tension spring **1120** when rotary harrow **1098** is simply lifted off ground **2000** (Fig. 18A) as opposed to being deflected upward by rock **2010** during operation (Fig. 18B). As seen in Fig. 18A, when hydraulic cylinder **1115** is fully extended, tool bar **1006** is maximally raised and arm pivot **1112** is also maximally raised by virtue of being welded to tool bar **1006**. Mounting arm **1114** is free to pivot down around pivot point **1109** and is only prevented from pivoting down to the ground by stop pin **1125** extending from one side to the other of arm pivot **1112** underneath mounting arm **1114**. Helical tension spring **1120** remains unstretched because there is no upward

pivoting of mounting arm **1114**. In Fig. 18B, hydraulic cylinder **1115** is fully retracted; therefore tool bar **1006** and arm pivot **1112** are maximally lowered for full engagement of rotary harrow **1098** with ground **2000**. However, because harrow **1098** has struck rock **2010**, harrow **1098** has deflected upward to the same height off the ground as depicted for the harrow in Fig. 18A. However, in Fig. 18B, deflection of harrow **1098** causes mounting arm **1114** to pivot upward while tool bar **1006** and arm pivot **1112** remain maximally lowered because the pressure in hydraulic cylinder **1115** is locked and tool bar **1006** is rigidly mounted to the cultivator frame through bracket **1119** rigidly connected to supporting arm **1113**, which in turn is rigidly mounted to the cultivator frame. Upward pivoting of mounting arm **1114** must then cause stretching of spring **1120**, which buffers the deflection of harrow **1098** while simultaneously urging harrow **1098** to return to the ground **2000** after clearing rock **2010**. The action of spring **1120** is therefore two-fold, the first being to transfer downward forces to rotary harrow **1098** to keep the harrow engaged with the ground, and the second being to buffer upward forces cause by upward deflection of the harrow when the harrow strikes a hard impediment. It should be noted that rubber inserts between the basket arm of the harrow basket and basket mounting bracket **1111** at the end of mounting arm **1114** are also present to absorb deflection forces as described above.

Fig. 19 shows another embodiment of a tillage apparatus of the present invention utilizing rephasing hydraulic cylinders **1215** and helical tension springs **1220**. The operation of the hydraulic cylinders **1215** and helical tension springs **1220** are as described for the embodiment of Fig. 14. Unlike the embodiment of Fig. 14, the embodiment of Fig. 19 has harrow assemblies **1298** mounted to a transverse frame-member at a rear of cultivator frame **1201** separately from a sub-frame **1205** supporting a set of spike harrows **1250** (only one labeled). In this respect, the embodiment of Fig. 19 is similar to the embodiment of Fig. 1.

Fig. 20 is a schematic diagram of a hydraulic circuit for use with rephasing hydraulic cylinders in controlling a rotary harrow in the embodiments of Fig. 14 and Fig. 19. The circuit comprises a plurality of hydraulic lines containing hydraulic fluid for transmitting hydraulic pressure to six rephasing hydraulic cylinders **1550a-f**. Cylinders **1550a,1550b** control a tool bar for a first rotary harrow, cylinders **1550c,1550d** control a common tool bar for second and third rotary harrows, and cylinders **1550e,1550f** control a tool bar for a third rotary harrow. The cylinders are shown extended, meaning that the harrow is disengaged from the ground. Cylinders **1550a-f** are connected in series. Under normal operation to extend the cylinders **1550a-f**, hydraulic fluid pressure is transmitted to

the circuit from a hydraulic supply and a hydraulic pump on a tractor through a feed line coupled with coupling **1503** to hydraulic line **1501**. Fluid flow is split left and right at line junction **1510**. Fluid flowing left passes through cylinders **1550c**, **1550b** and **1550a** before returning to line junction **1520** and then back via hydraulic line **1502** to coupling **1507** connected to a return line for returning hydraulic fluid to the hydraulic supply. Likewise, fluid flowing right passes through cylinders **1550d**, **1550e** and **1550f** before returning to line junction **1520** and then back via hydraulic line **1502** to coupling **1507** connected to a return line for returning hydraulic fluid to the hydraulic supply. Retracting the cylinders **1550a-f** may be accomplished by reversing the fluid flow in the hydraulic circuit. Cylinders **1550c** and **1550d** are preferably tied together so that hydraulic fluid arriving at line junction **1510** from line **1501** (or line junction **1520** from line **1502**) is distributed evenly between the two sides of the hydraulic circuit even if there may be a difference in load on the two sides of the harrow. The cylinders **1550c** and **1550d** may be tied hydraulically, mechanically or by any other suitable means.

In operation, the cylinders **1550a-f** are retracted and the fluid pressure is set at a desired value for field conditions. The actual pressure will depend on system parameters, for example the internal diameter of the hydraulic lines. Provided one or more of the rotary harrows does not strike a hard object, the cylinders will remain retracted and the rotary harrows will remain in constant engagement with the ground under a fixed force. It is particularly useful that the fluid pressure may be set remotely, for example from the cab of the vehicle dragging the tillage apparatus.

The novel features of the present invention will become apparent to those of skill in the art upon examination of the detailed description of the invention. It should be understood, however, that the scope of the claims should not be limited by the preferred embodiments set forth in the examples, but should be given the broadest interpretation consistent with the specification as a whole.

Claims:

1. A tillage apparatus for tilling ground, the tillage apparatus comprising a cultivator frame and a rotary harrow mounted to the frame, the rotary harrow comprising a basket and at least one rotating harrow structure mounted in the basket, the basket mounted to a mounting element with compressible material at the mounting element, the compressible material permitting relative motion between the basket and the mounting element in response to a motion of the rotary harrow, the mounting element mounted to the frame, the mounting element operatively connected to a hydraulic actuator whose operation raises and lowers the mounting element thereby raising and lowering the rotary harrow, the hydraulic actuator operated under a first pressure to lower the rotary harrow and maintain engagement of the rotary harrow with the ground, and a pressure relief element for reducing back pressure caused by deflection of the rotary harrow.
2. The apparatus according to claim 1, wherein the compressible material comprises an elastomer.
3. The apparatus according to claim 1, wherein the compressible material comprises a rubber having a Shore A hardness in a range of 55-100.
4. The apparatus according to any one of claims 1 to 3, wherein the mounting element comprises a mounting arm, the basket is mounted to the mounting arm through a mounting bracket and the compressible material is between the mounting bracket and the basket or between the mounting bracket and the mounting arm.
5. The apparatus according to any one of claims 1 to 4, wherein the basket is mounted to two mounting elements and the two mounting elements are operatively connected to two hydraulic actuators.
6. The apparatus according to any one of claims 1 to 5, wherein the pressure relief element comprises a relief valve in fluid communication with the hydraulic actuator, the relief valve set at a second pressure greater than the first pressure to permit flow of hydraulic fluid out of the hydraulic actuator when fluid pressure in the hydraulic actuator exceeds the second pressure.
7. The apparatus according to claim 6, wherein the basket is mounted to one mounting element and the mounting element receives one hydraulic actuator.
8. The apparatus according to any one of claims 1 to 7, wherein the hydraulic actuator comprises a double acting hydraulic cylinder.

9. The apparatus according to any one of claims 6 to 8, wherein the relief valve comprises hydraulic circuitry that allows hydraulic fluid to flow back into the hydraulic actuator after having flowed out of the hydraulic actuator.
10. The apparatus according to any one of claims 6 to 9, further comprising a
5 hydraulic accumulator for buffering an increase in fluid pressure in response to the motion of the rotary harrow.
11. The apparatus according to any one of claims 6 to 10, further comprising one or more additional pressure relief mechanisms.
12. The apparatus according to claim 11, wherein the one or more additional pressure
10 relief mechanisms are one or more additional hydraulic accumulators and/or additional relief valves.
13. The apparatus according to any one of claims 1 to 5, wherein the pressure relief element comprises a resilient member mounted to the mounting element, the resilient member configured to transfer ground engaging forces generated by the hydraulic
15 cylinder to the rotary harrow and configured to resiliently deform to reduce back pressure caused by deflection of the rotary harrow.
14. The apparatus according to claim 13, wherein the resilient member comprises a helical tension spring.
15. The apparatus according to any one of claims 13 to 14, wherein the pressure in
20 the hydraulic actuator is locked at the first pressure.
16. The apparatus according to any one of claim 13 to 15, wherein the hydraulic actuator comprises two or more rephasing hydraulic cylinders.
17. The apparatus according to claim 16 comprising a plurality of rephasing hydraulic cylinders plumbed in series.
- 25 18. The apparatus according to any one of claims 1 to 17, comprising a plurality of rotary harrows mounted on the frame with mounting elements.
19. The apparatus according to any one of claims 1 to 18, which is a conservation tillage apparatus.
20. A kit for making a tillage apparatus as defined in any one of claims 1 to 19 from an
30 existing cultivator frame and rotary harrow, the kit comprising: a hydraulic system

including a hydraulic actuator, the hydraulic system able to provide a first pressure to the hydraulic actuator for lowering the rotary harrow and maintaining engagement of the rotary harrow with the ground; a mounting element for mounting the rotary harrow on the cultivator frame, the mounting element for operative connection to the hydraulic actuator;
 5 compressible material for permitting relative motion between the rotary harrow and the mounting element in response to a motion of the rotary harrow when the rotary harrow is mounted on the mounting element; a pressure relief element for reducing back pressure caused by deflection of the rotary harrow; and, a set of instructions for assembling the mounting element, rotary harrow, hydraulic system; compressible material and pressure
 10 relief element on the cultivator frame.

21. A method of leveling a field comprising: providing a rotary harrow mounted on a tillage apparatus, the harrow mounted on the tillage apparatus with a mounting element and compressible material at the mounting element to permit relative motion between the mounting element and the rotary harrow in response to the rotary harrow striking a hard
 15 impediment in the field; applying a force to the rotary harrow with a hydraulic actuator operated at a first pressure to engage the rotary harrow with the field; providing a pressure relief element to reduce back pressure caused by the rotary harrow striking a hard impediment in the field; and, dragging the tillage apparatus across the field.

22. The method according to claim 21, wherein the pressure relief element comprises
 20 a relief valve in fluid communication with the hydraulic actuator to permit fluid flow out of the hydraulic actuator when fluid pressure in the hydraulic actuator exceeds a second pressure greater than the first pressure.

23. The method according to claim 22, wherein the first pressure is set to achieve a force per mounting element in a range 100-450 pounds.

24. The method according to any one of claims 22 to 23, wherein the second pressure
 25 is set to correspond to a force per mounting element that is 10-100 pounds greater than the force per mounting element achieved by the first pressure.

25. The method according to claim 21, wherein the pressure relief element comprises
 30 a resilient member mounted to the mounting element, the resilient member configured to transfer ground engaging forces generated by the hydraulic cylinder to the rotary harrow and configured to resiliently deform to reduce back pressure caused by deflection of the rotary harrow.

26. The apparatus according to claim 25, wherein the resilient member comprises a helical tension spring.
27. The apparatus according to any one of claims 25 to 26, wherein the pressure in the hydraulic actuator is locked at the first pressure.
- 5 28. The apparatus according to any one of claim 25 to 27, wherein the hydraulic actuator comprises two or more rephasing hydraulic cylinders.
29. The method according to any one of claims 21 to 28, wherein maximum total force applied by the hydraulic actuator to the harrow as a result of the first pressure is set so that the compressible material can accommodate between one-half and three-quarters of
10 the total maximum force when the rotary harrow strikes the hard impediment.
30. The method according to any one of claims 21 to 28, wherein maximum total force applied by the hydraulic actuator to the harrow as a result of the first pressure is set so that the compressible material can accommodate about two-thirds of the total maximum force when the rotary harrow strikes the hard impediment.
- 15 31. The method according to any one of claims 21 to 30, wherein the tillage apparatus is as defined in any one of claims 1 to 19.

Application number / Numéro de demande: 2845352

Figures: 13A, 13B

Pages: 17/26

19 mars 2014

Drawings

Unscannable items received with this application
(Request original documents in File Prep. Section on the 10th floor)

from

Documents reçu avec cette demande ne pouvant être balayés
(Commander les documents originaux dans la section de la préparation
des dossiers au 10^{ième} étage)

1/26

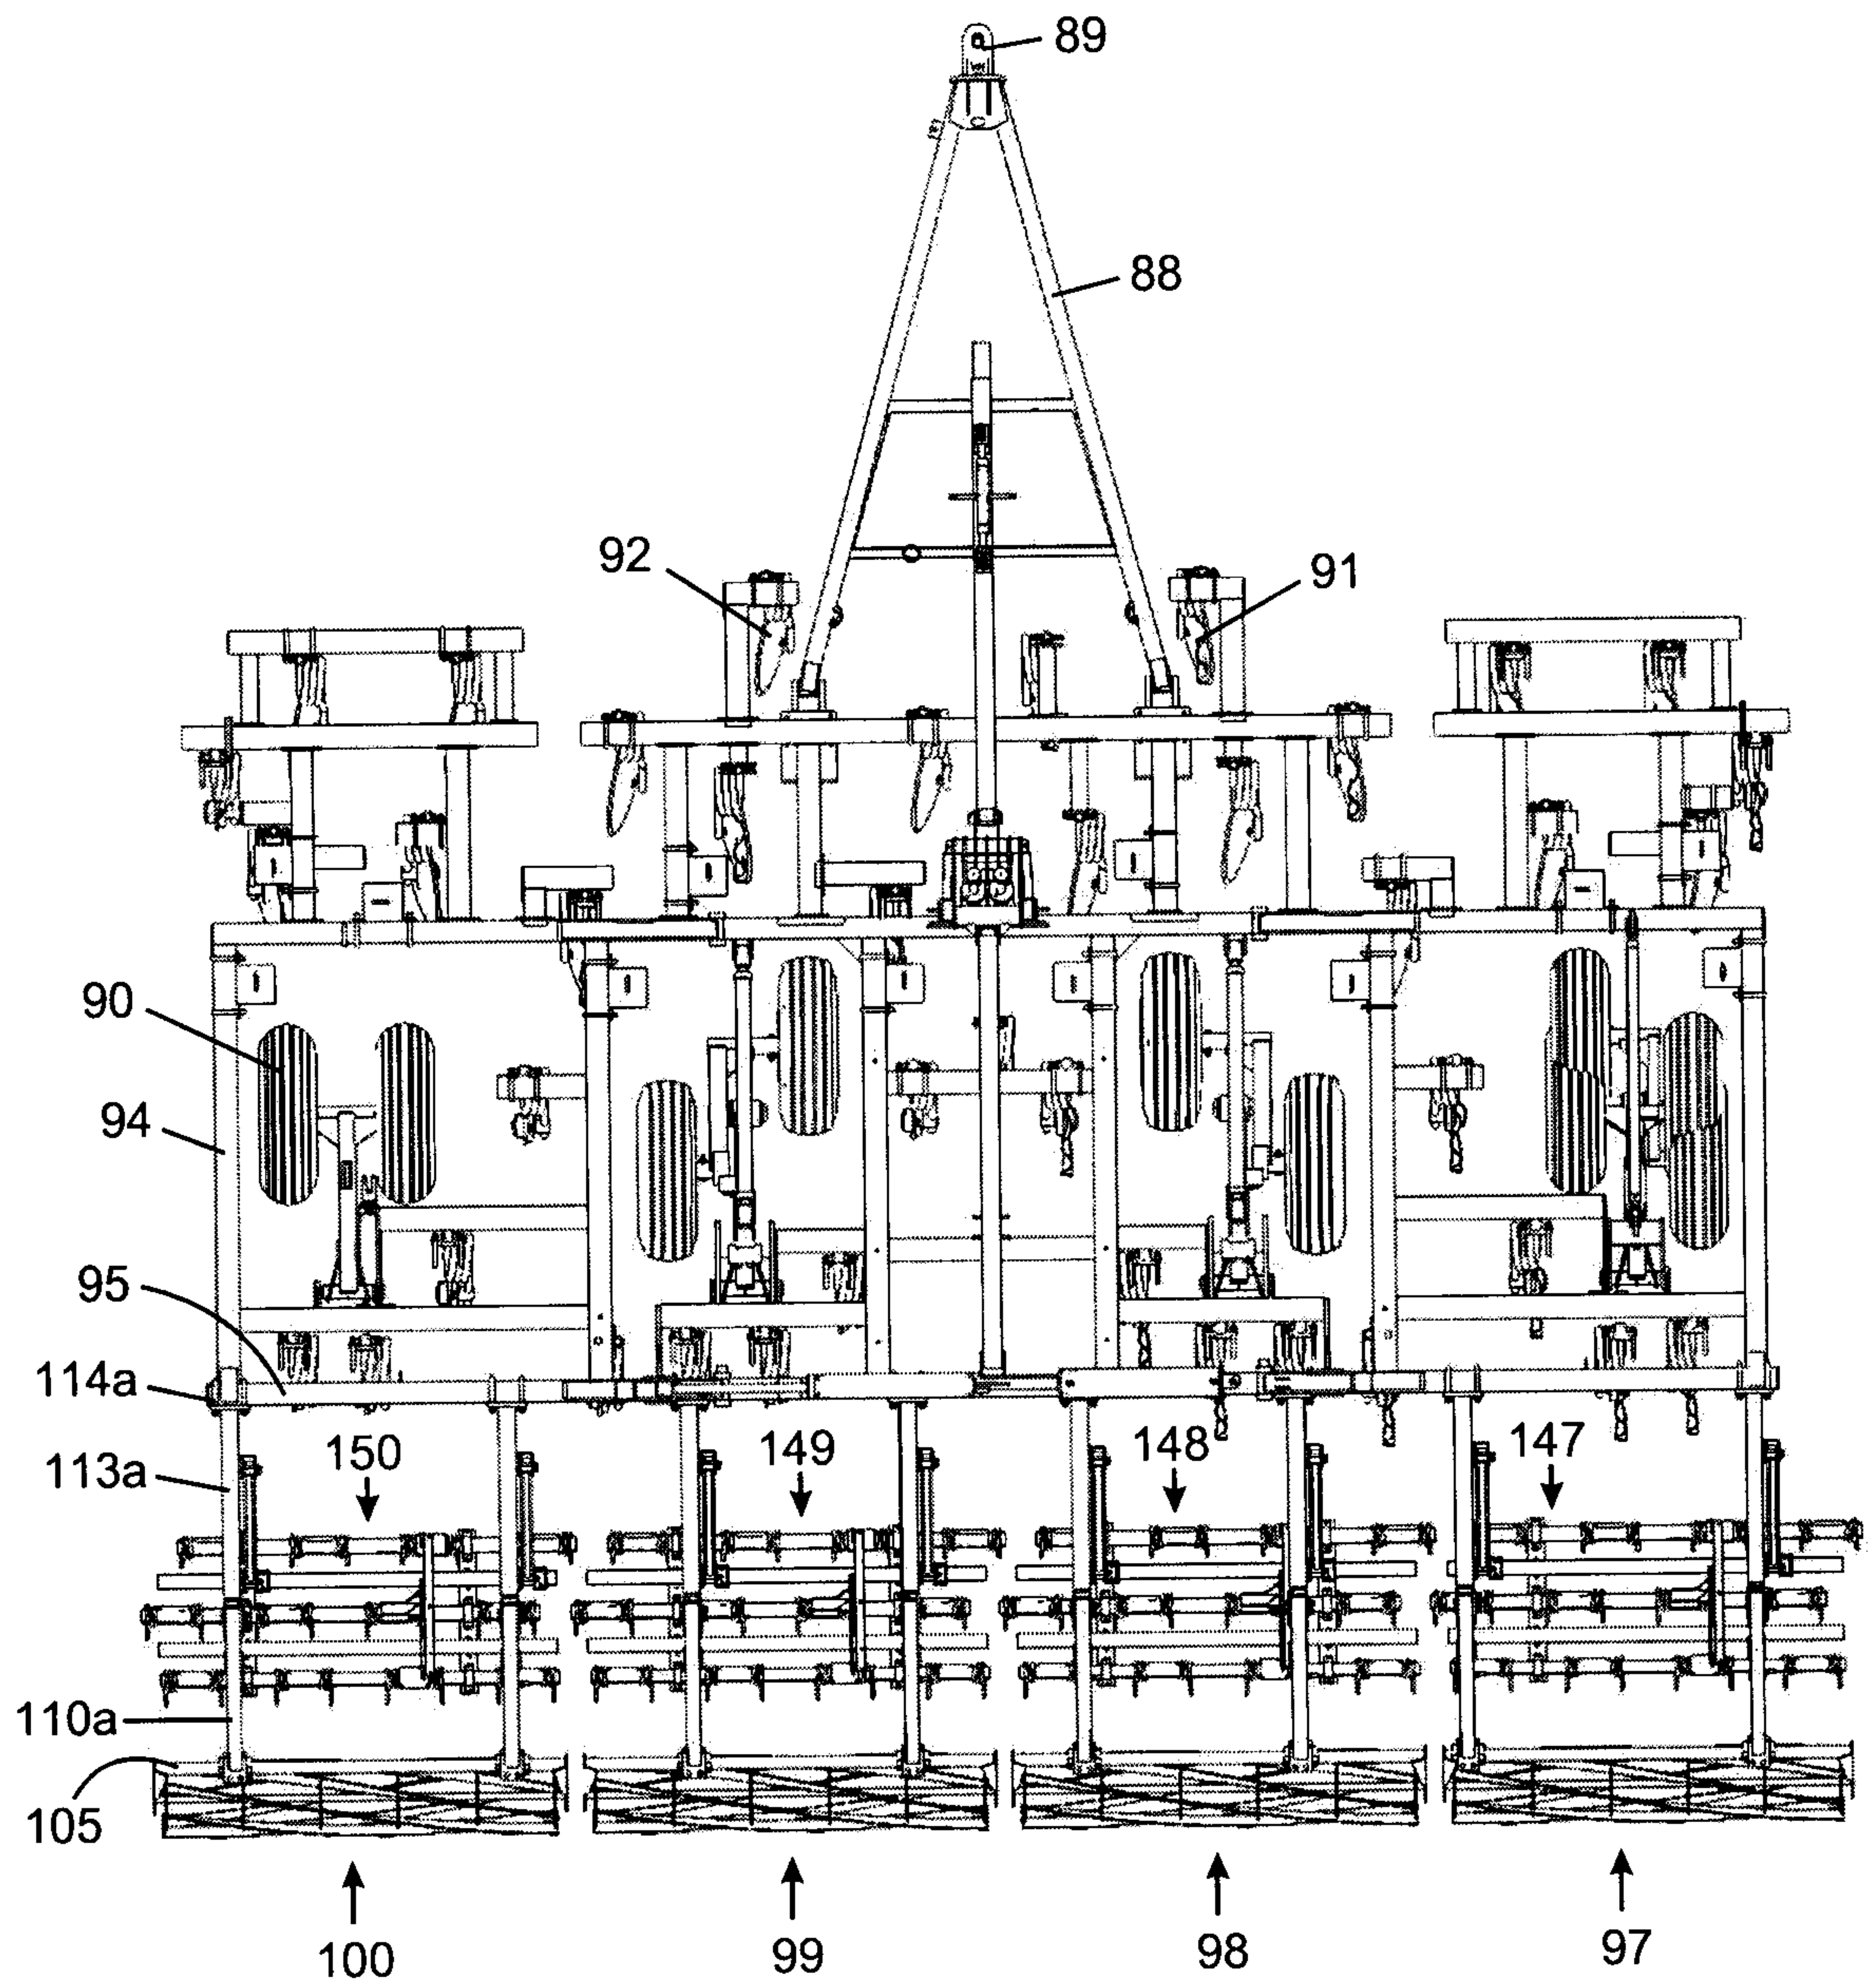


Fig. 1

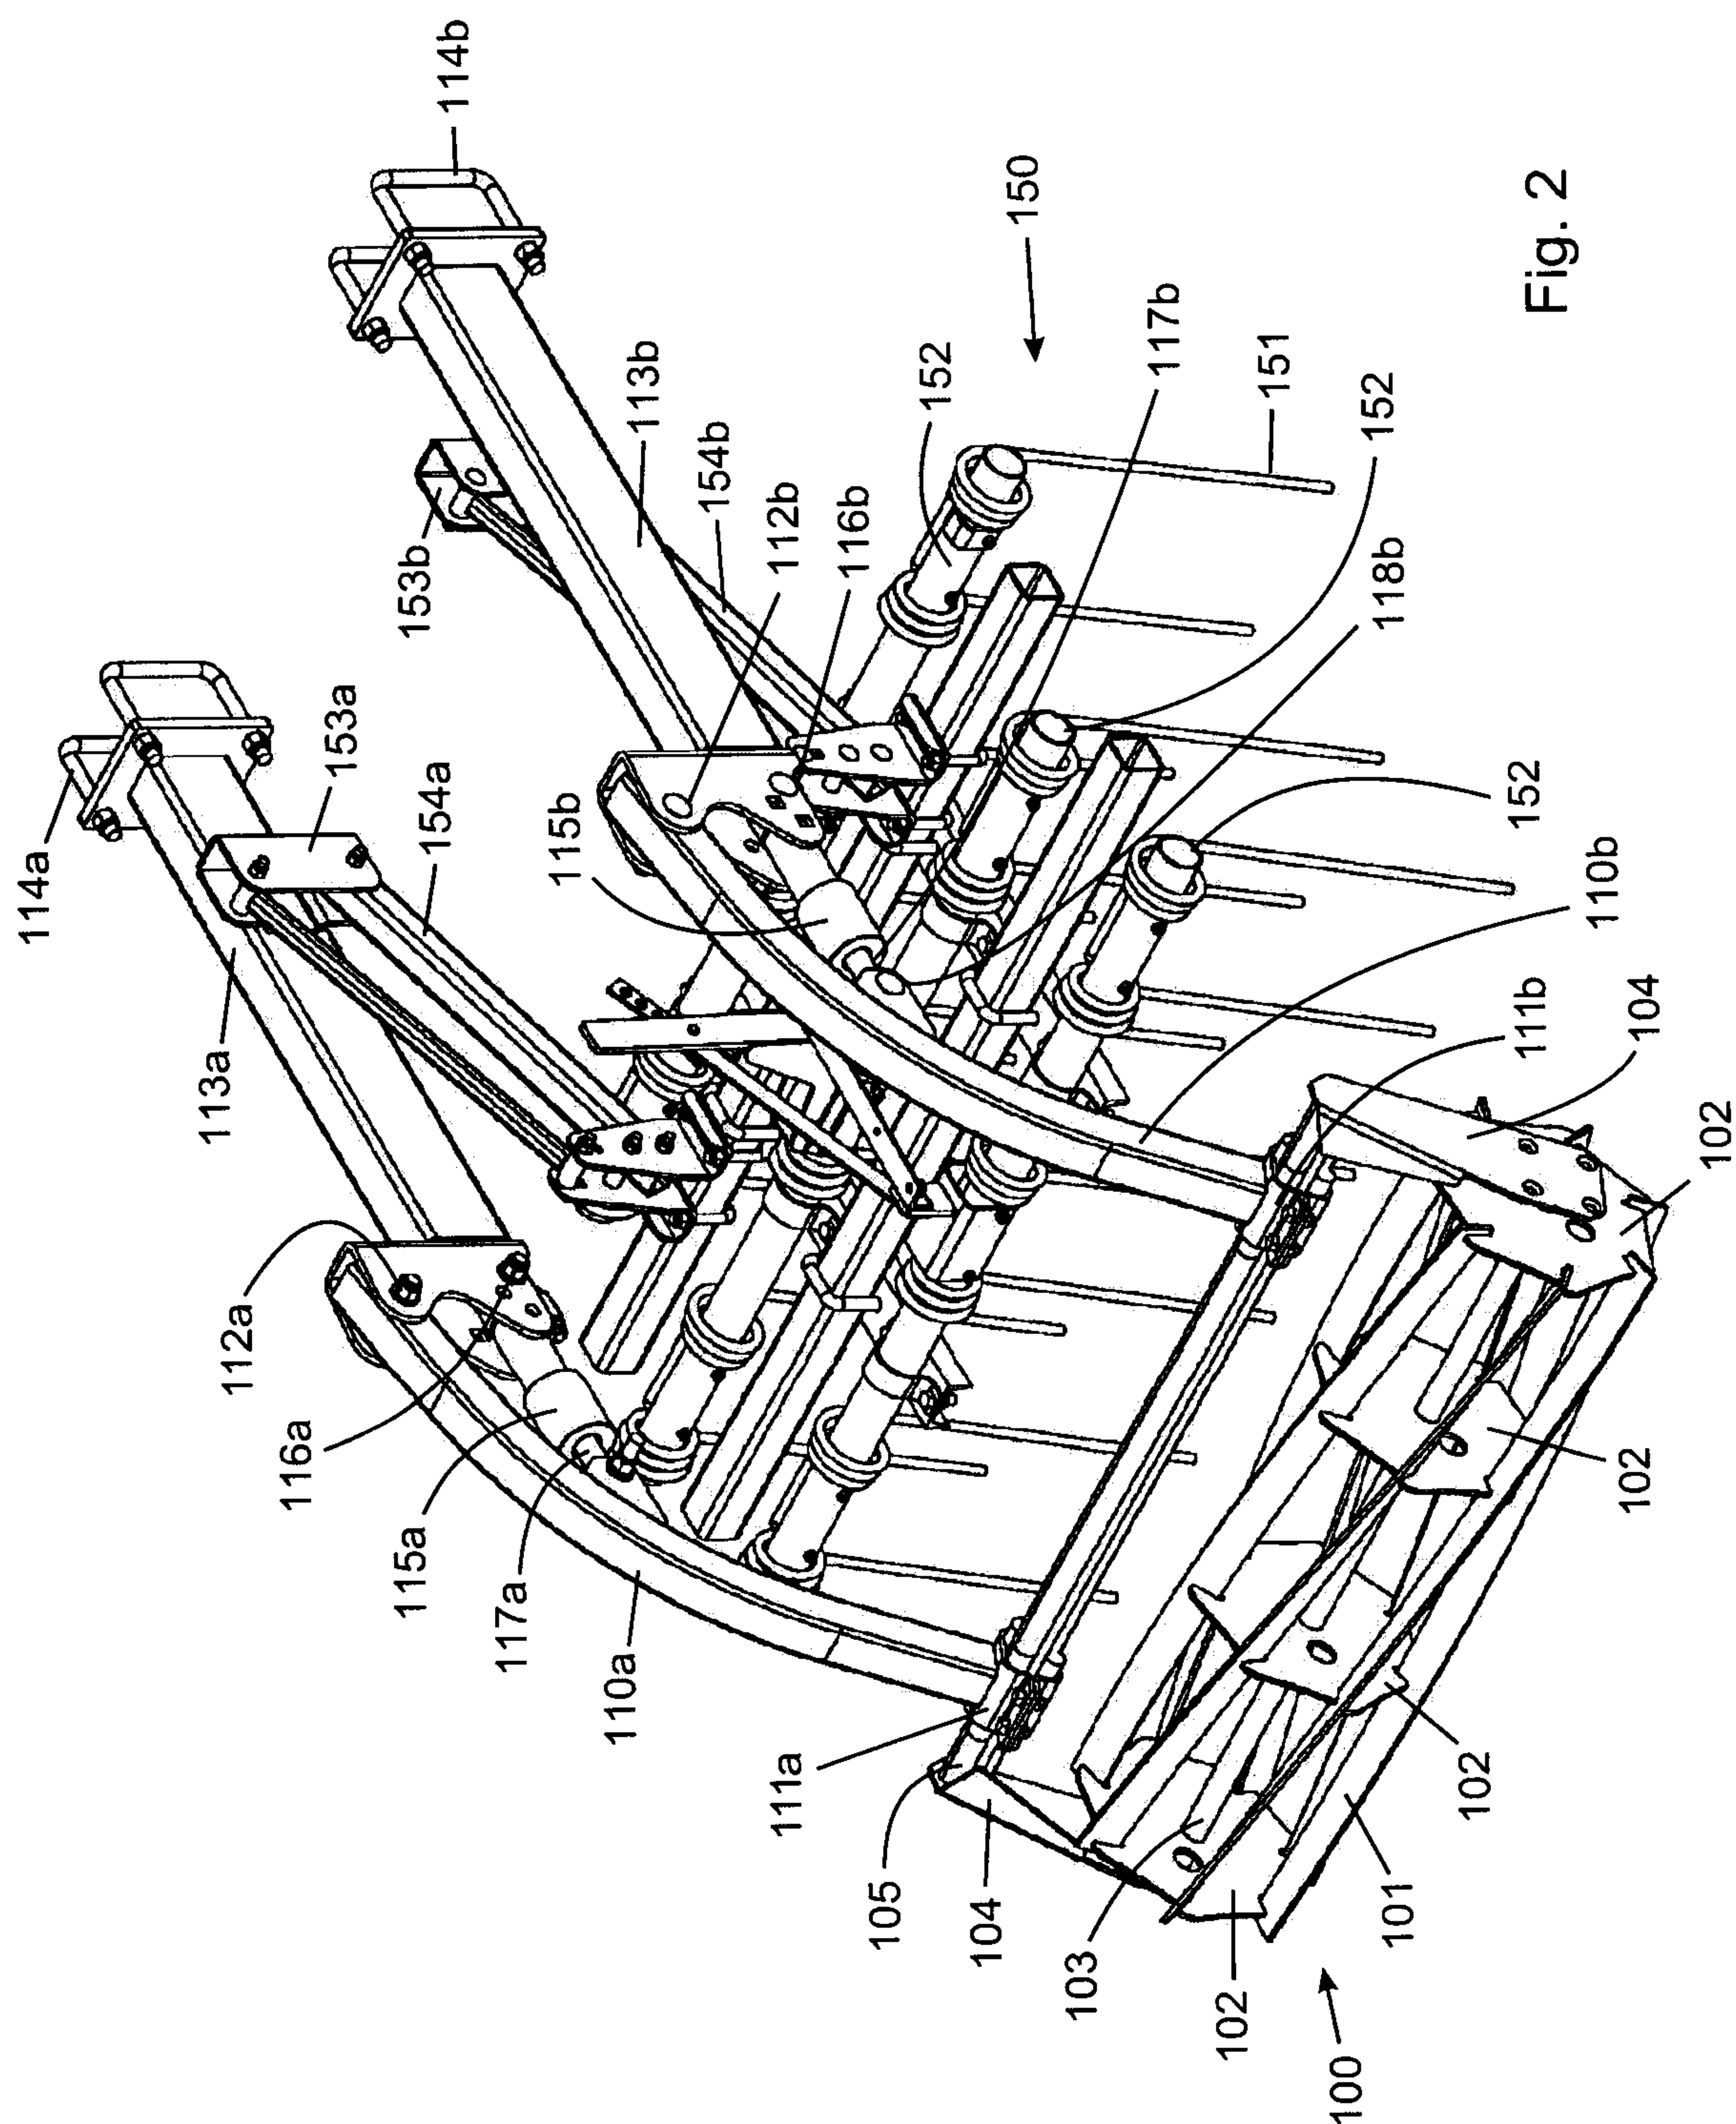


Fig. 2

3/26

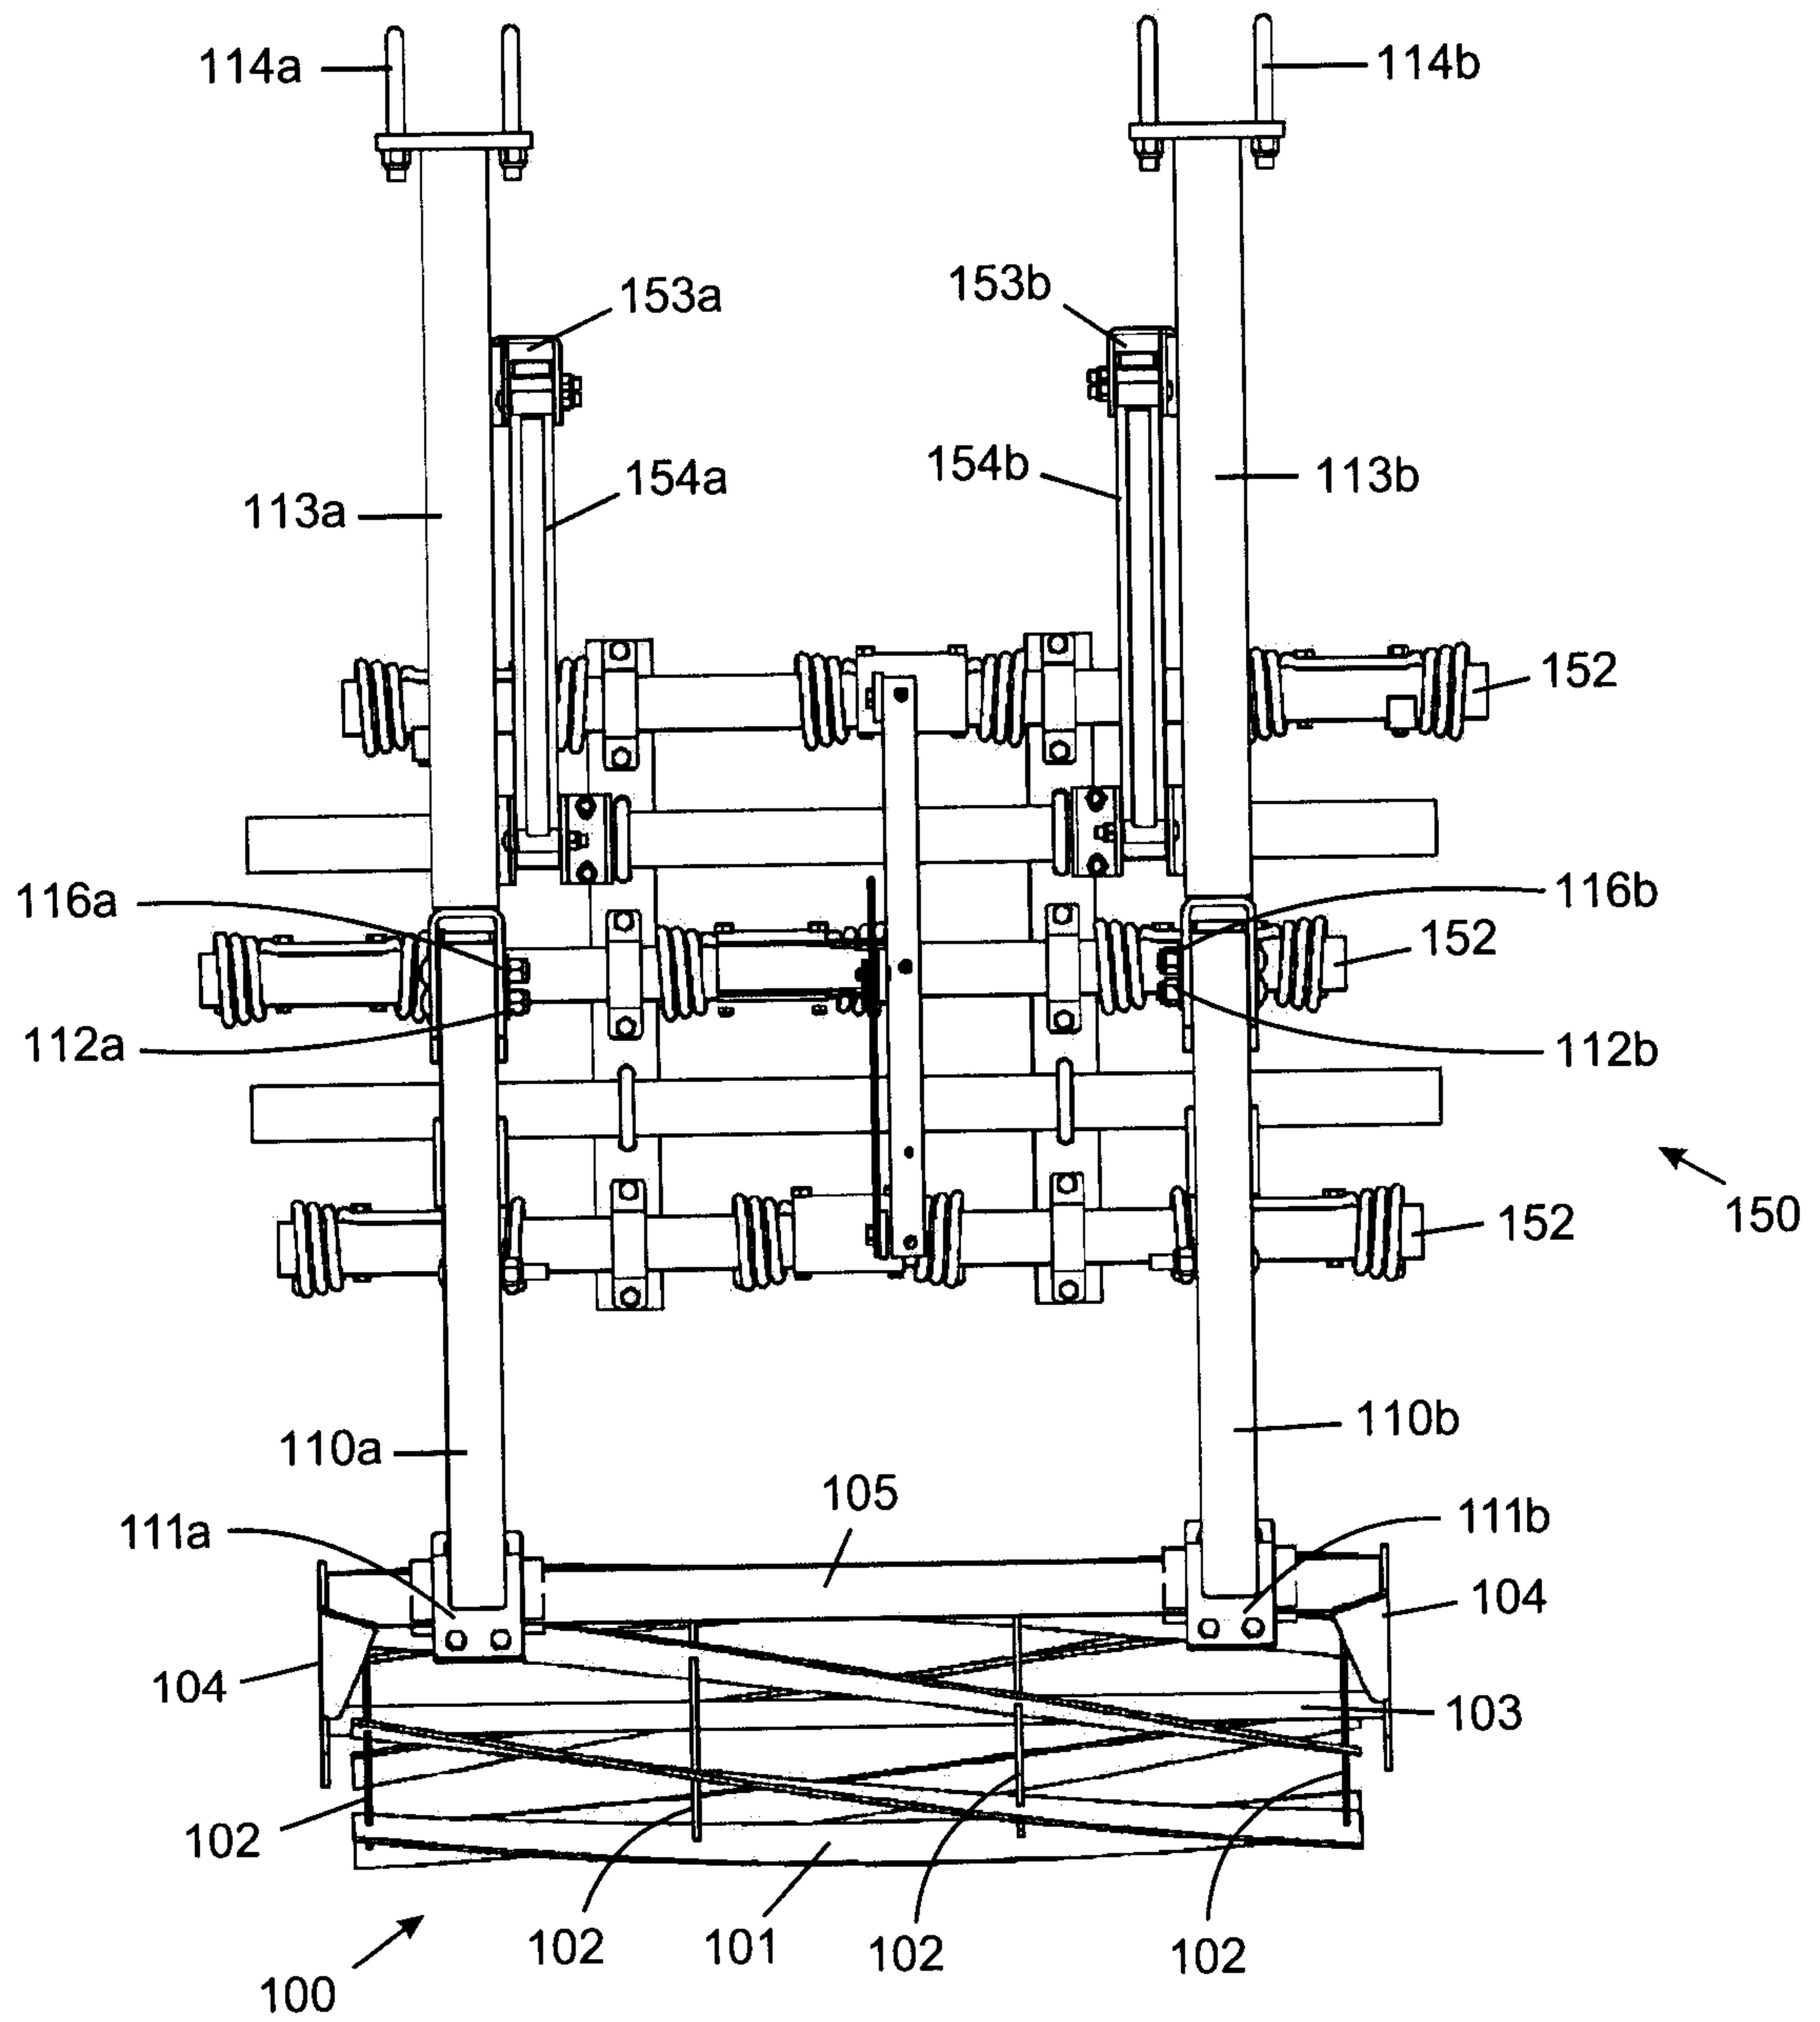


Fig. 3

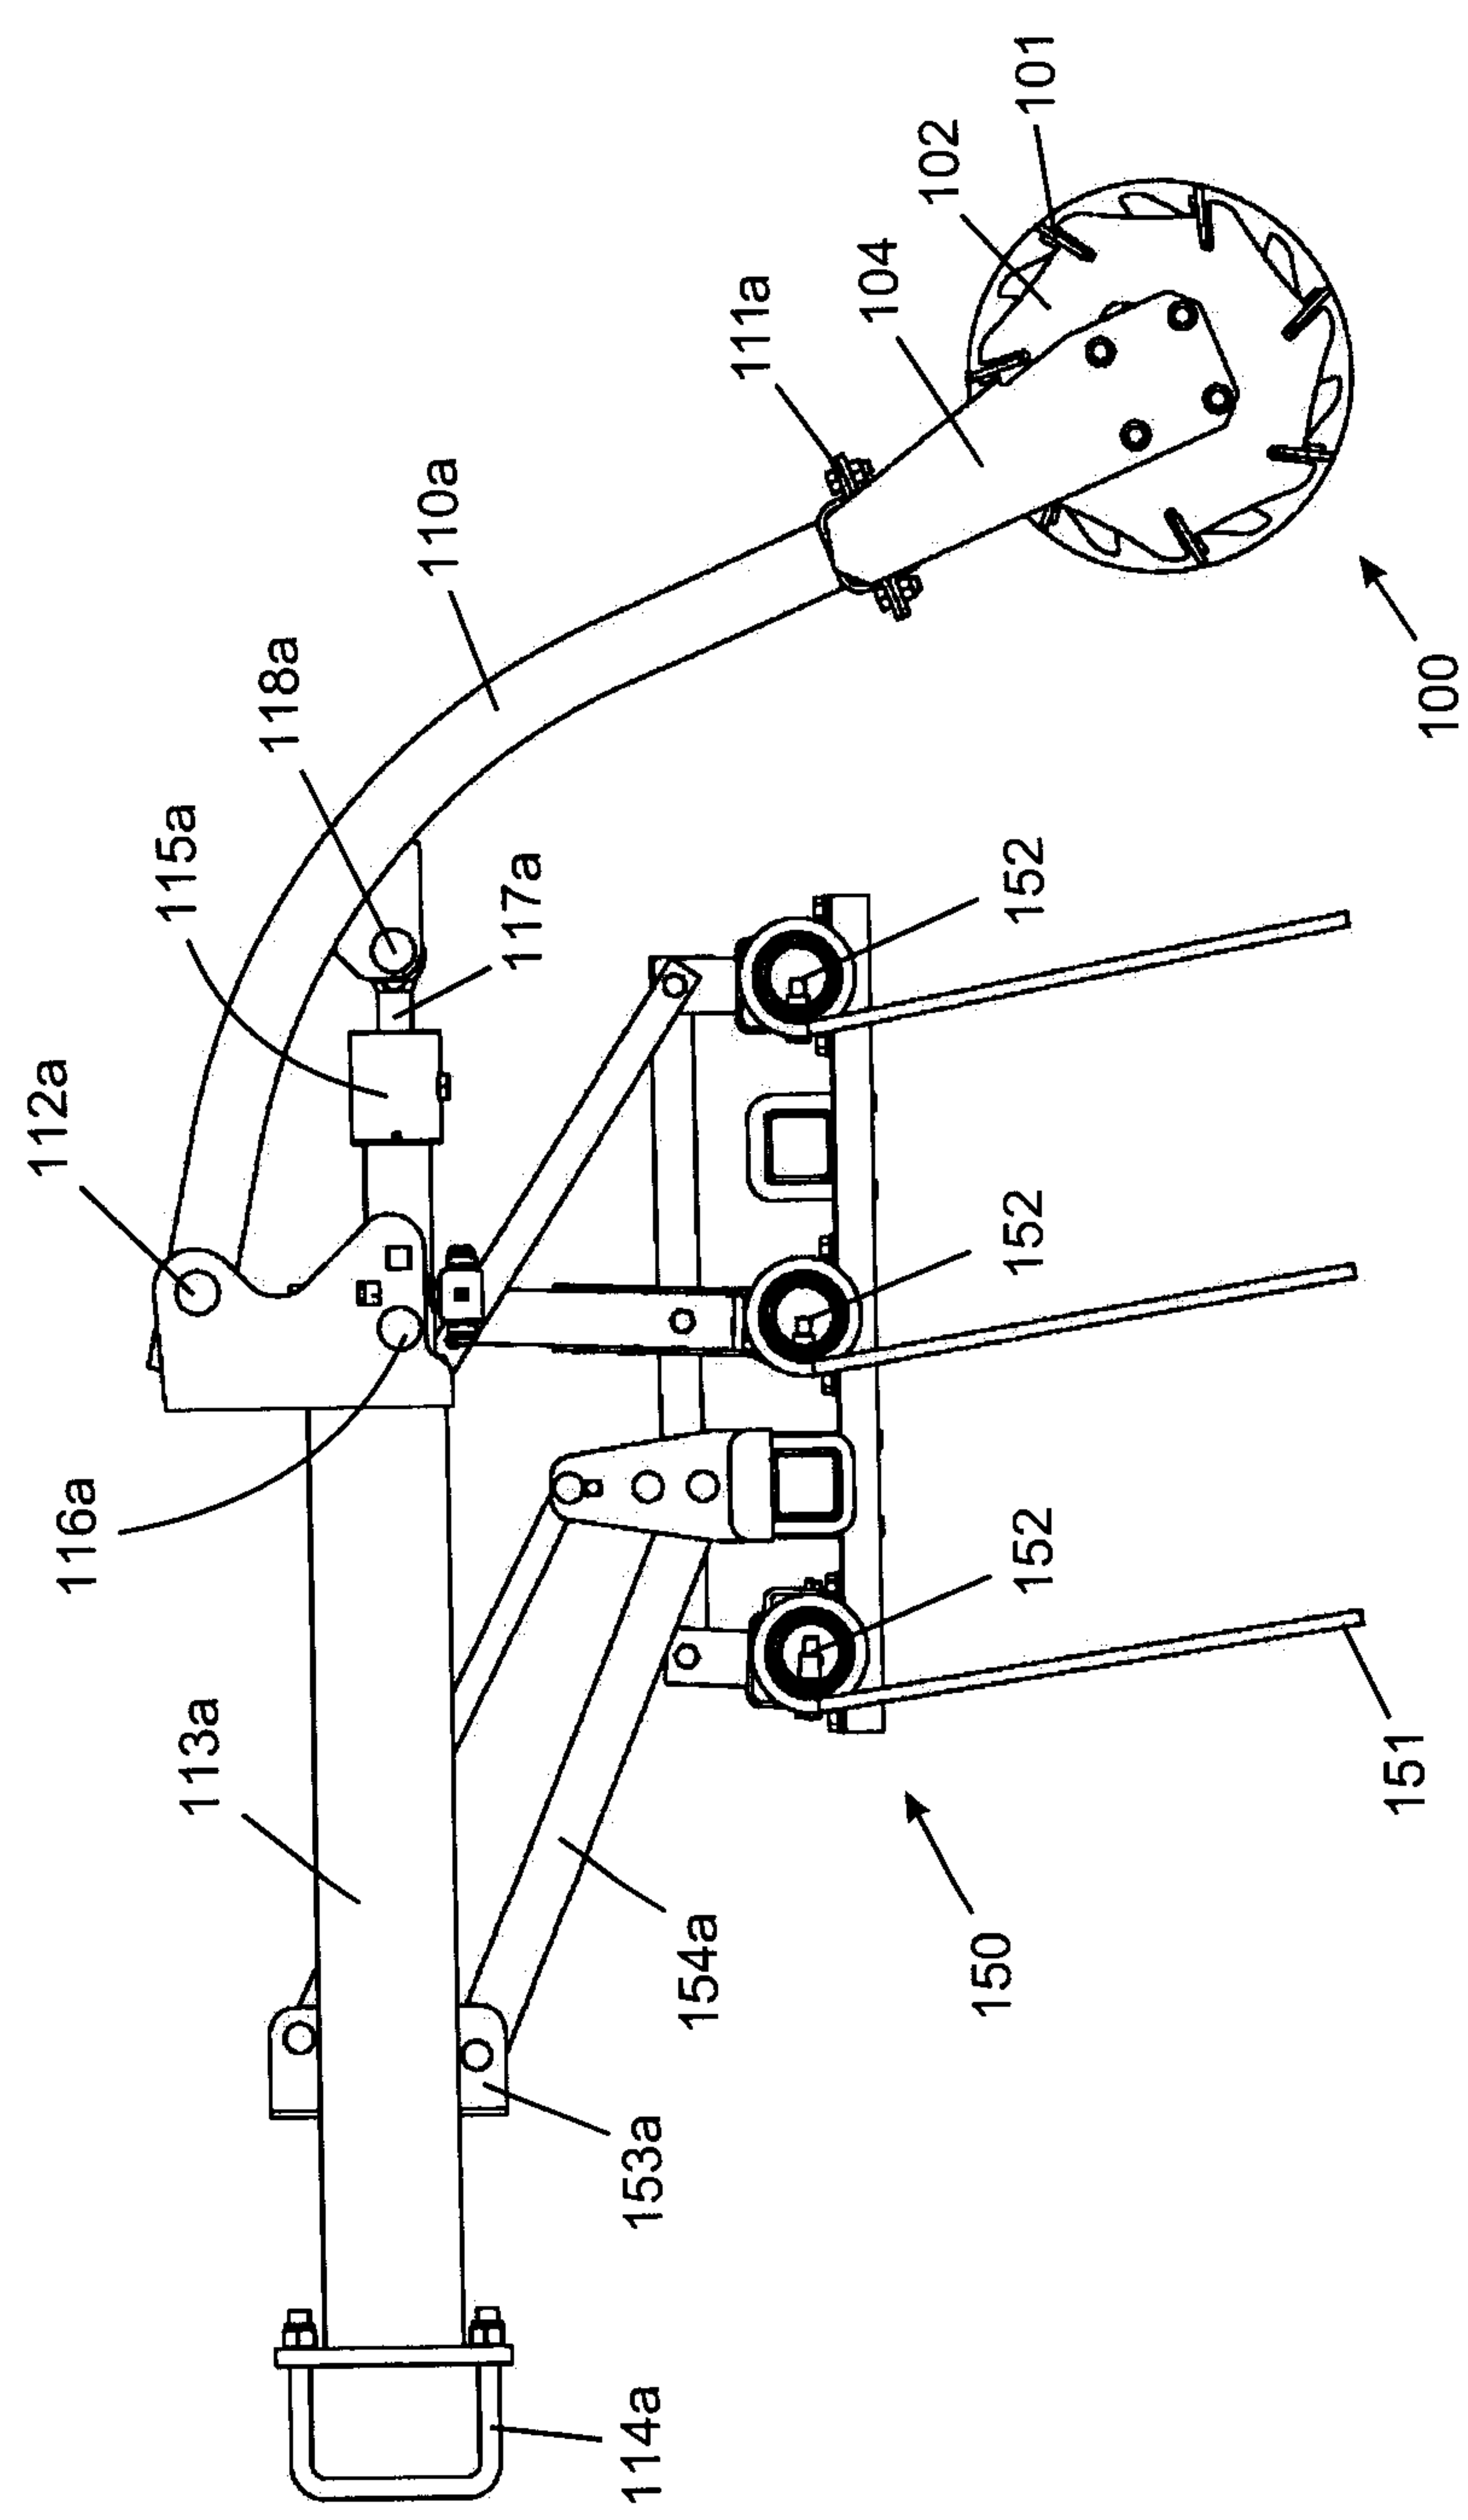


Fig. 4

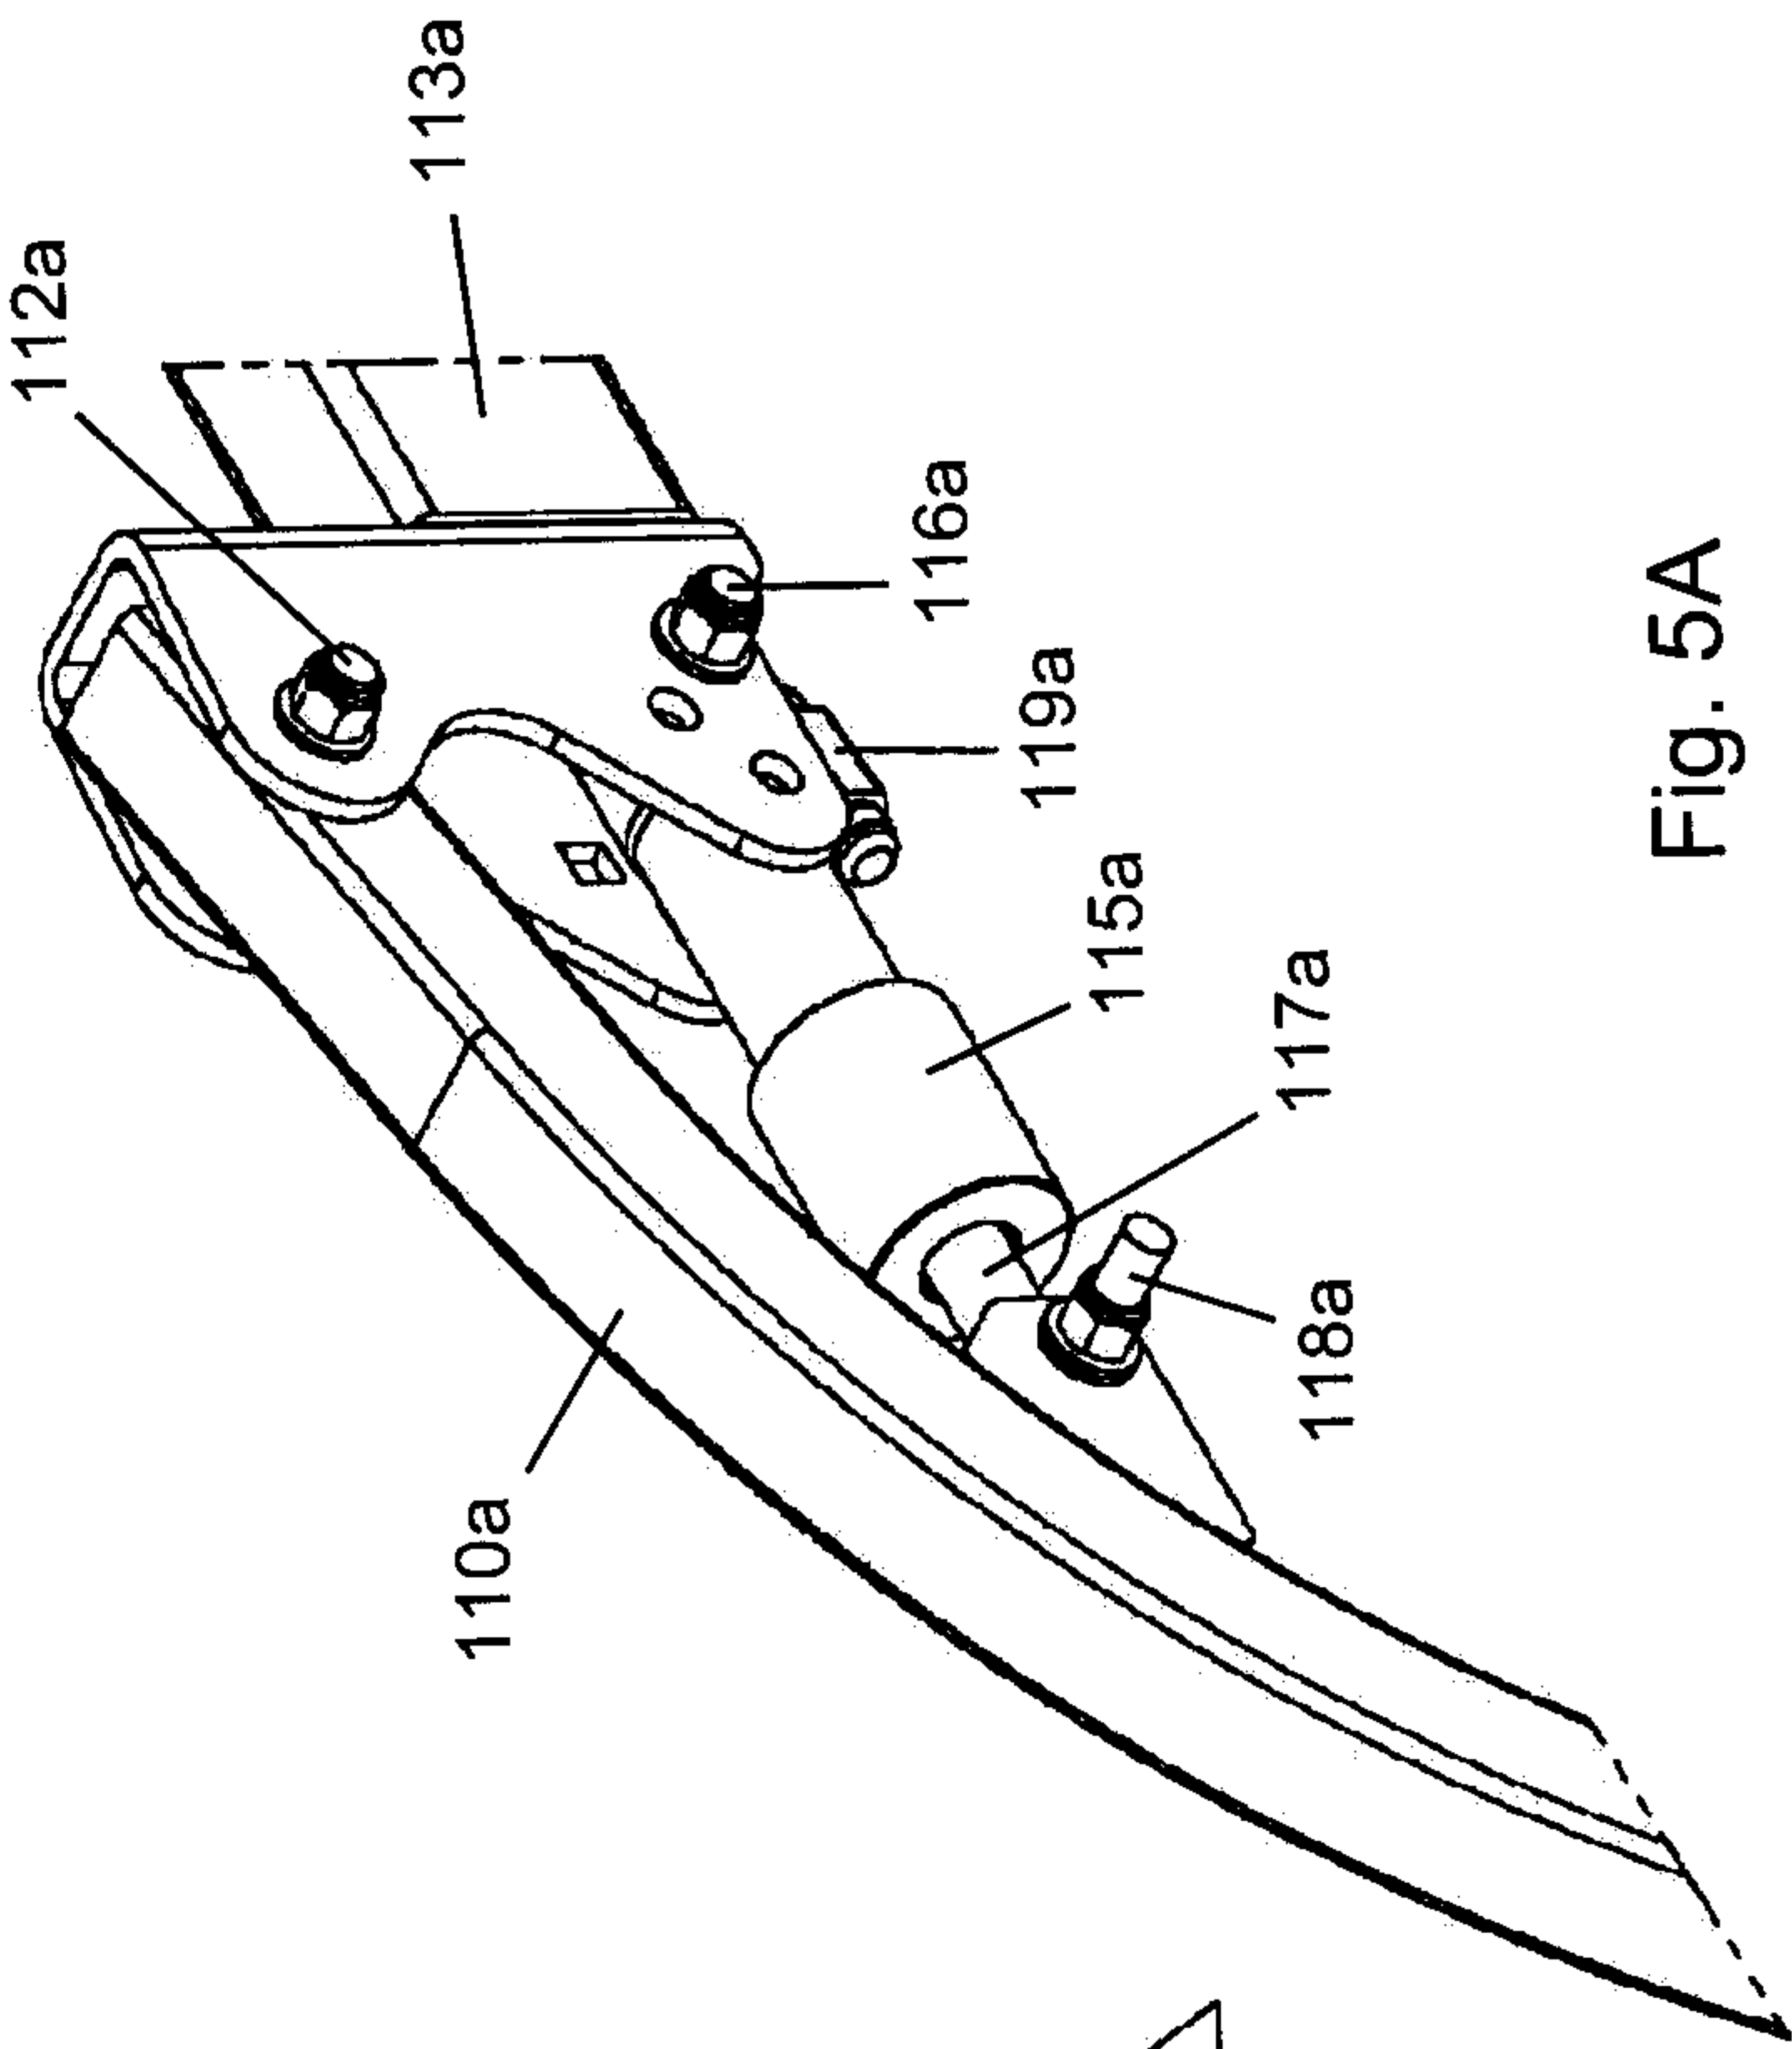


Fig. 5A

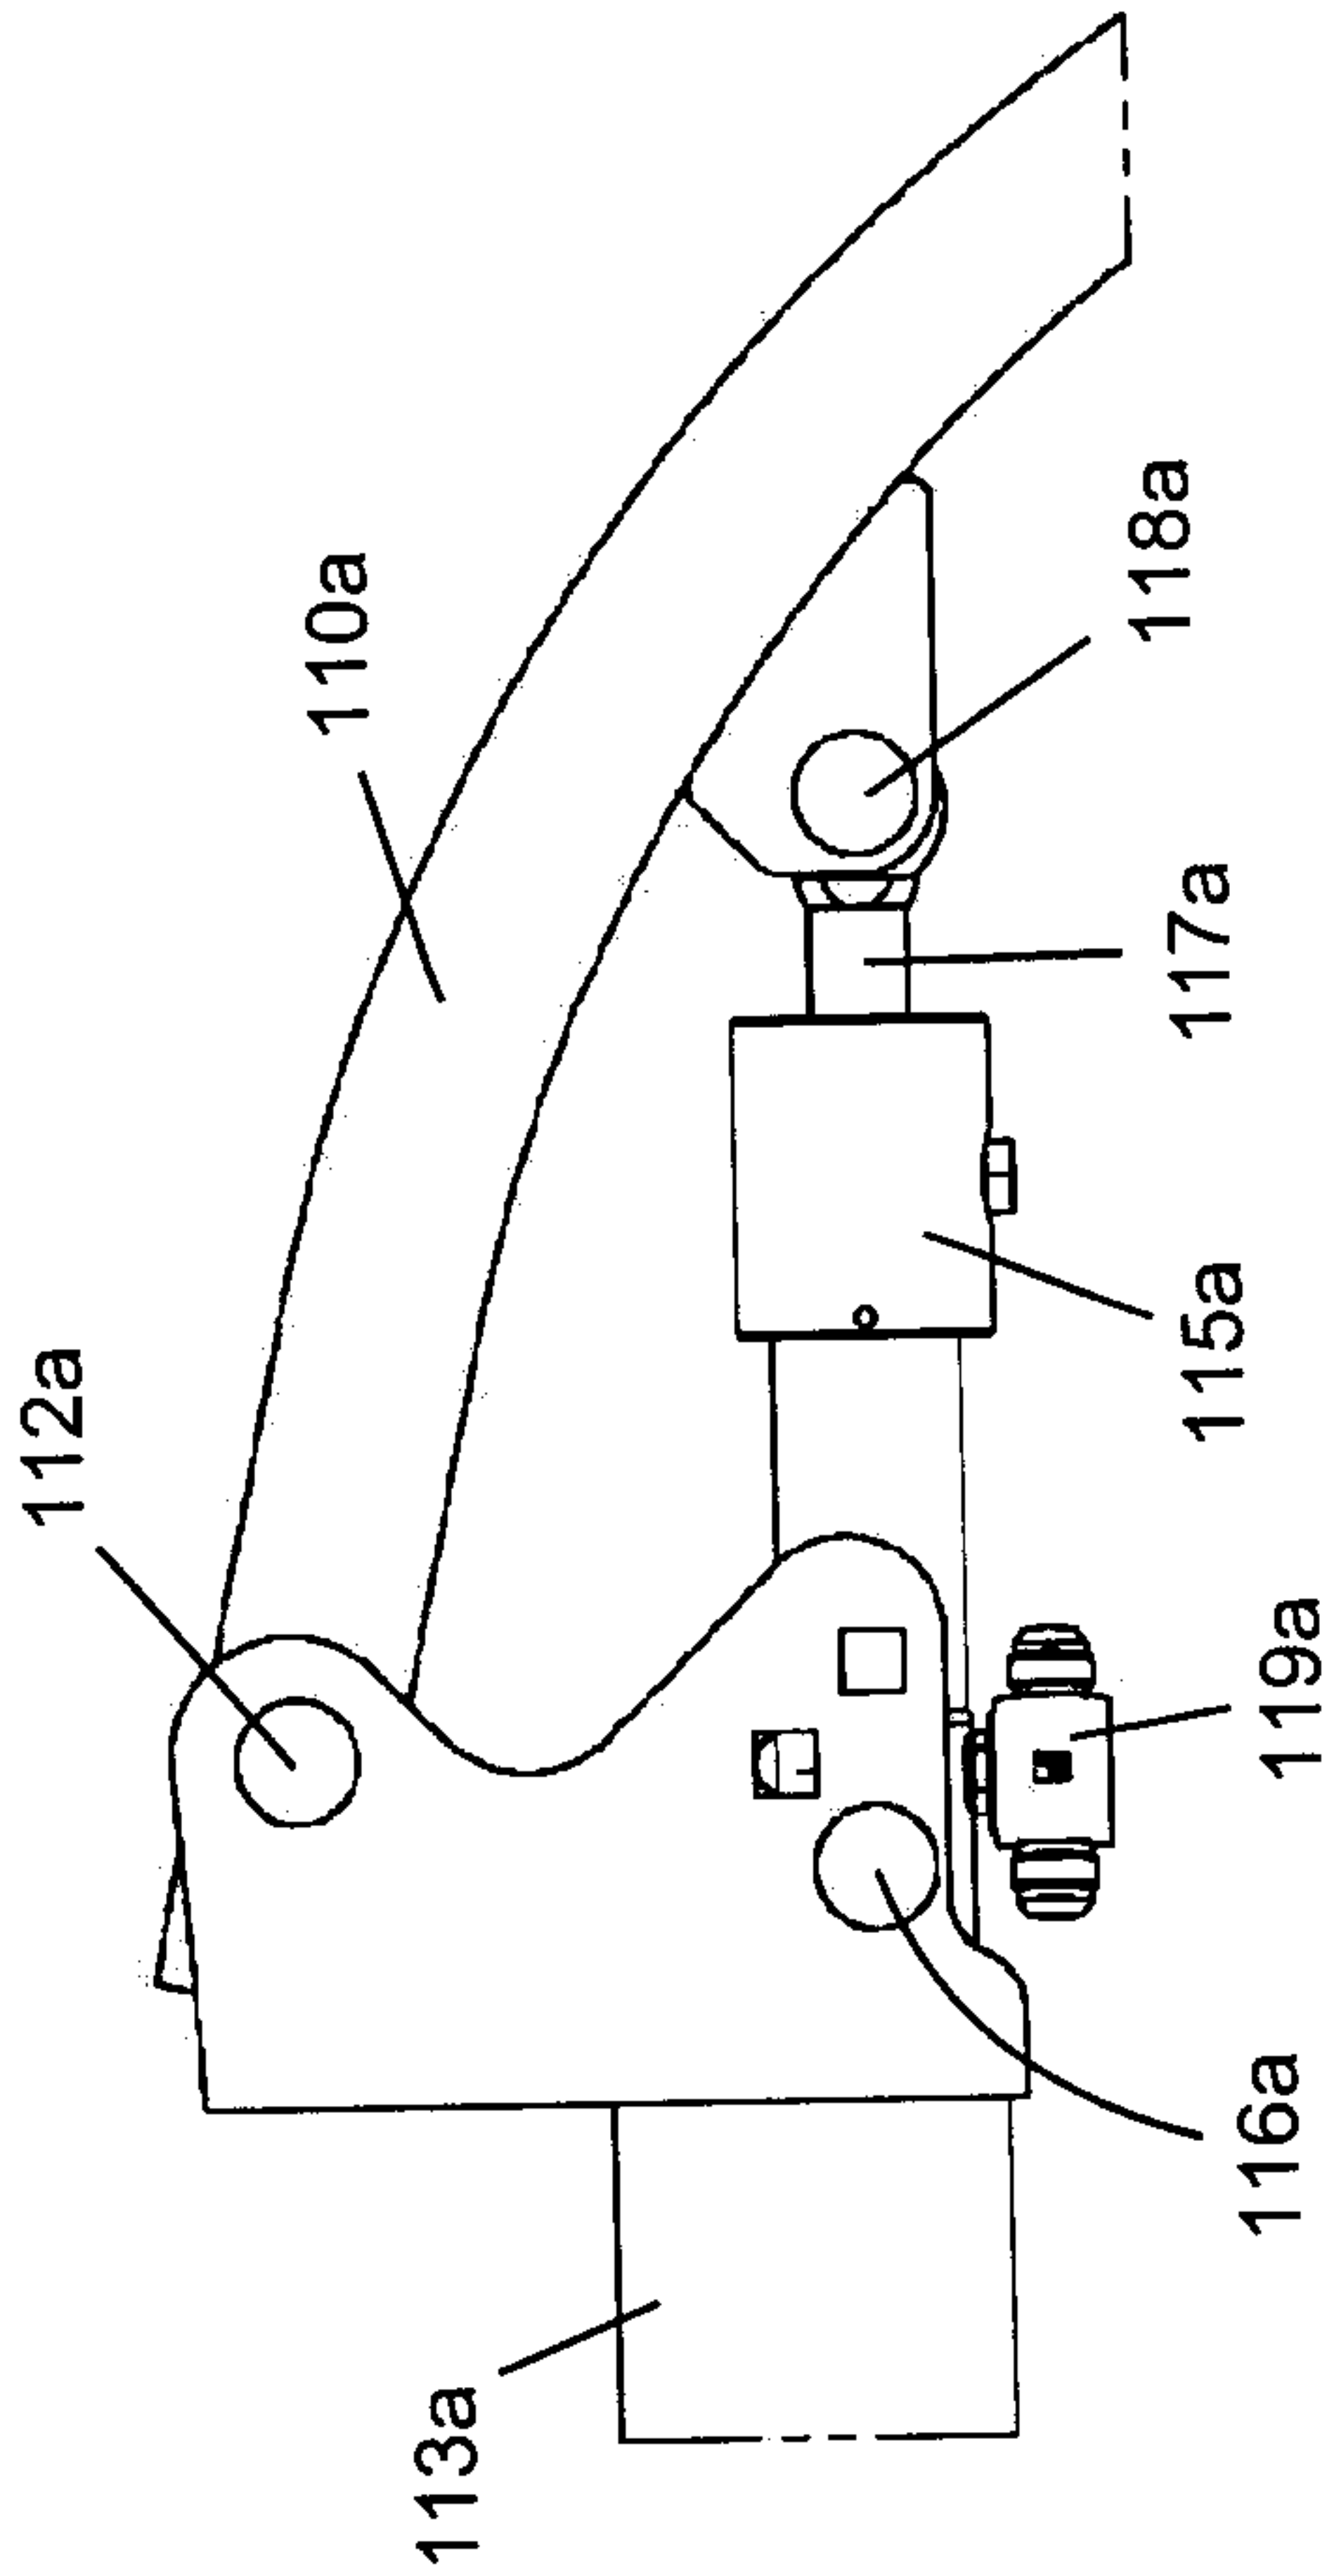


Fig. 5B

6/26

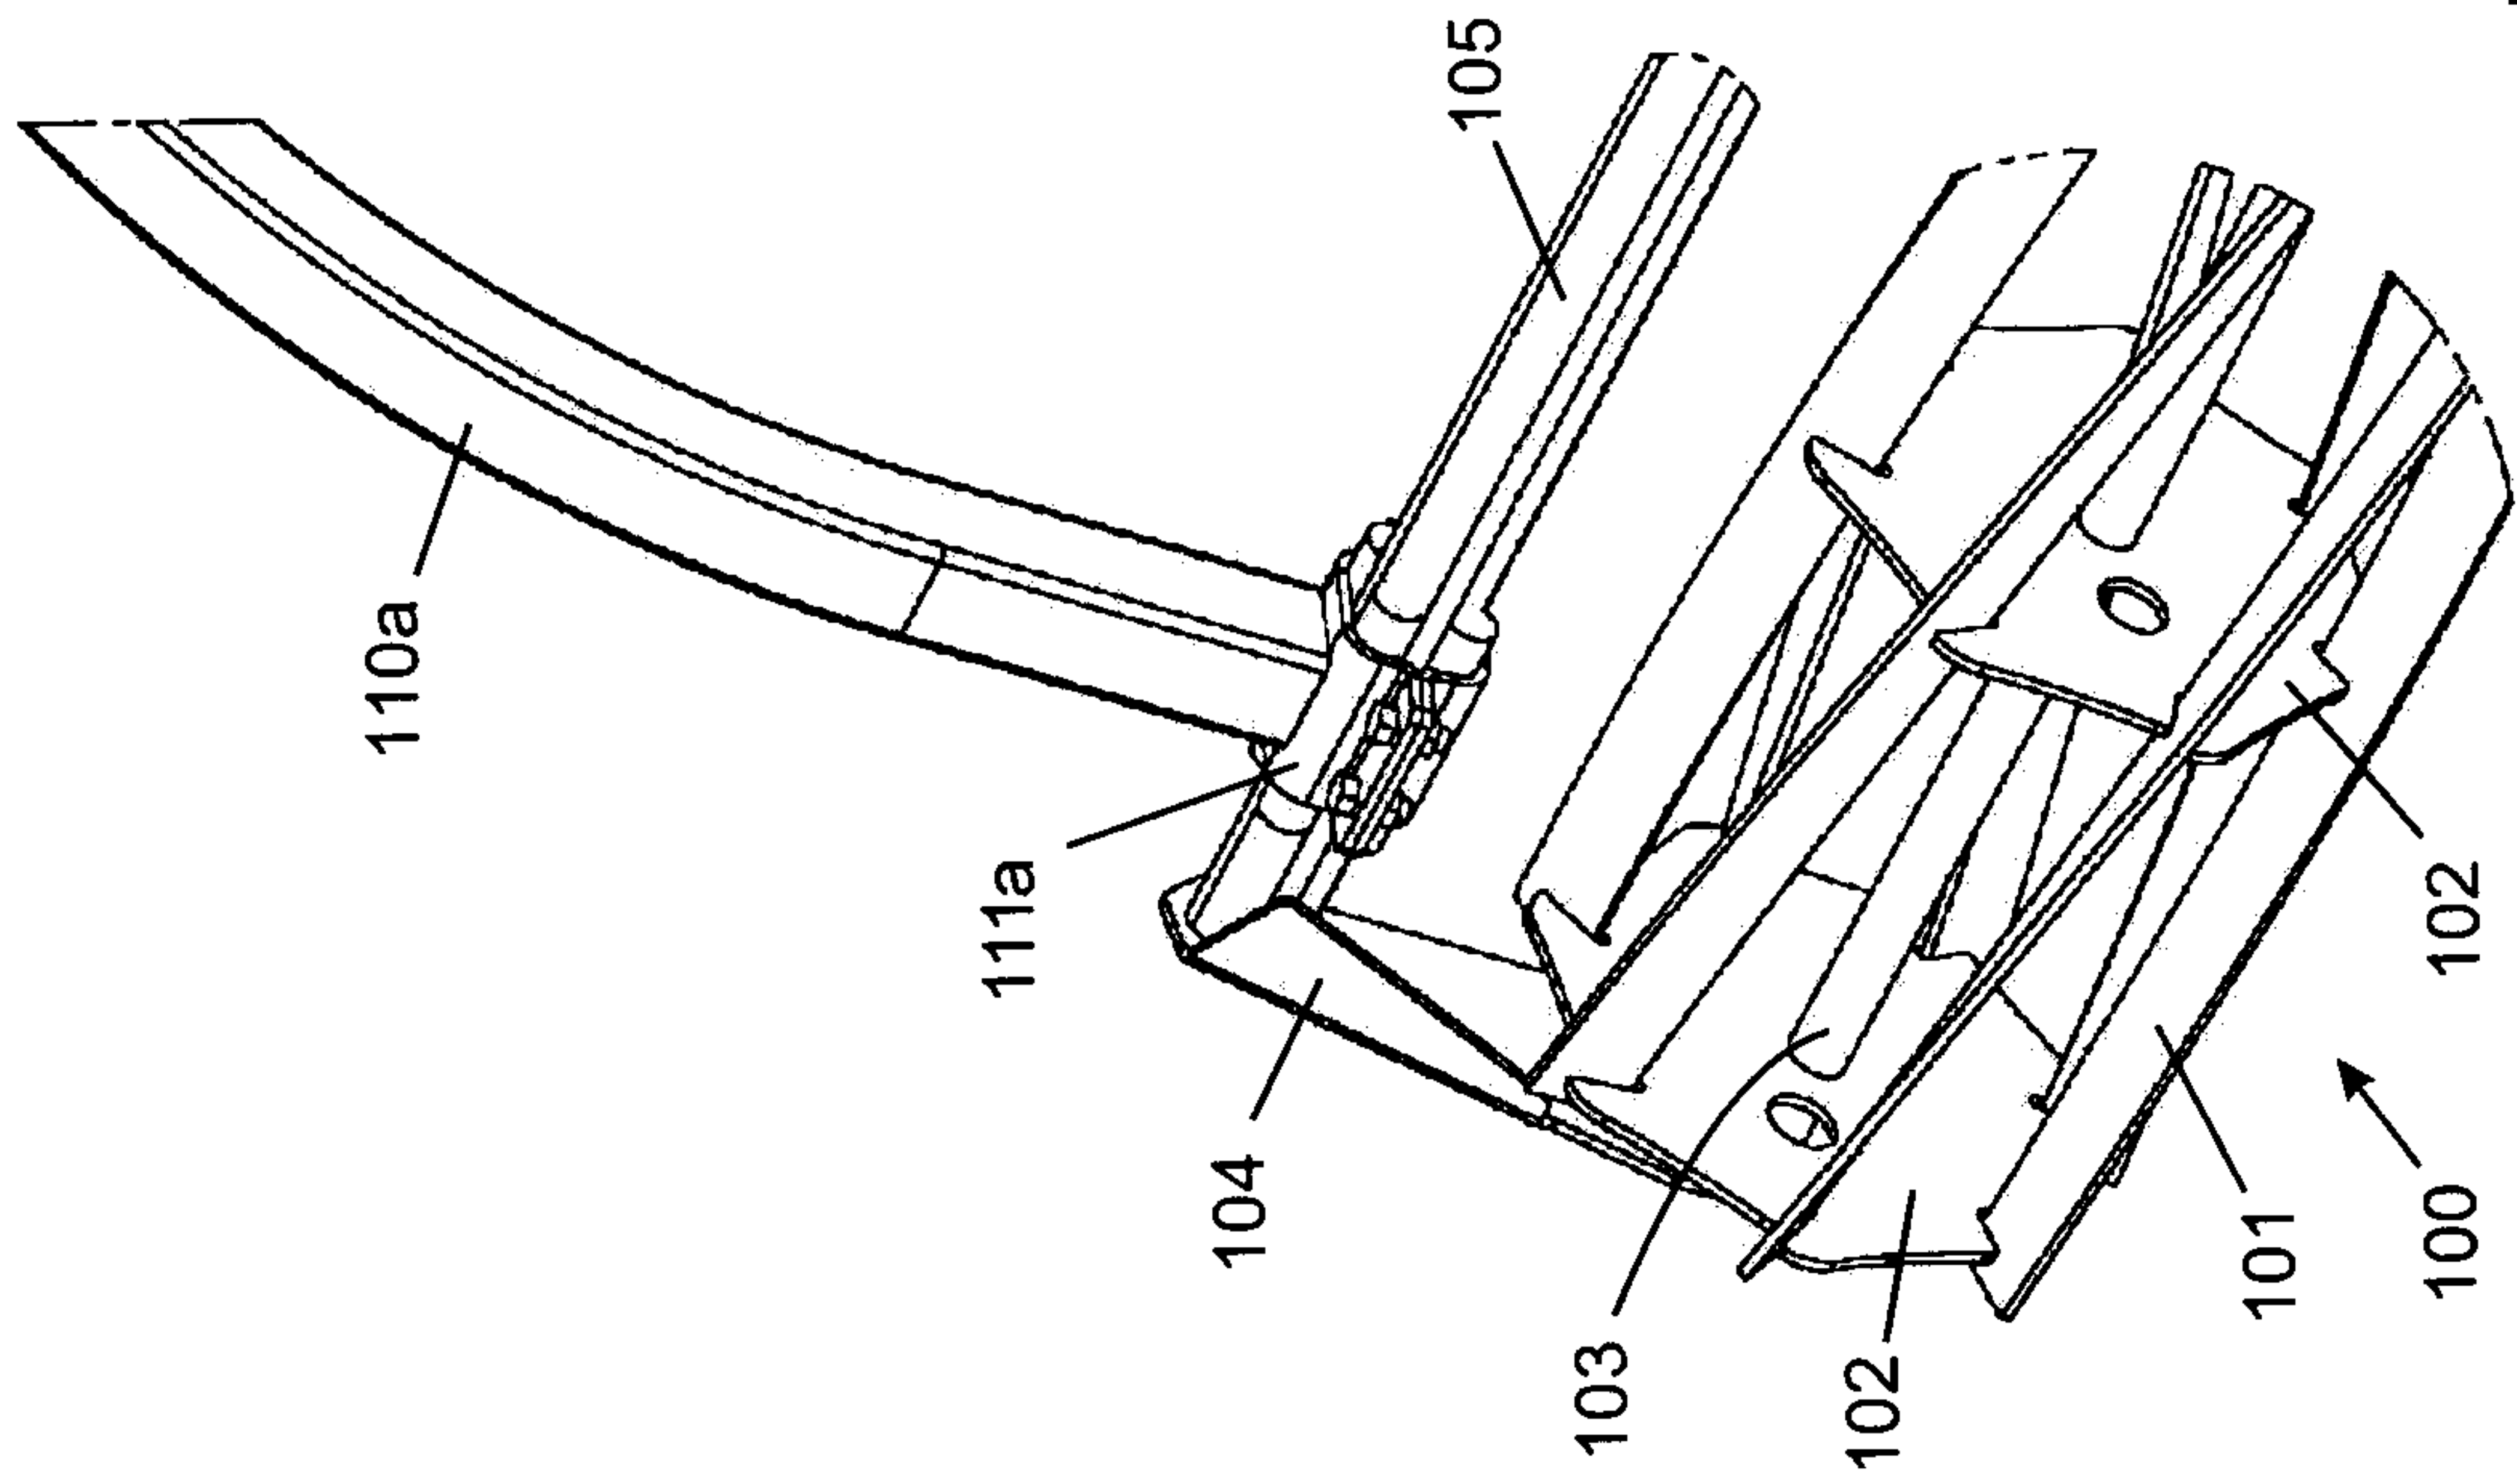


Fig. 6A

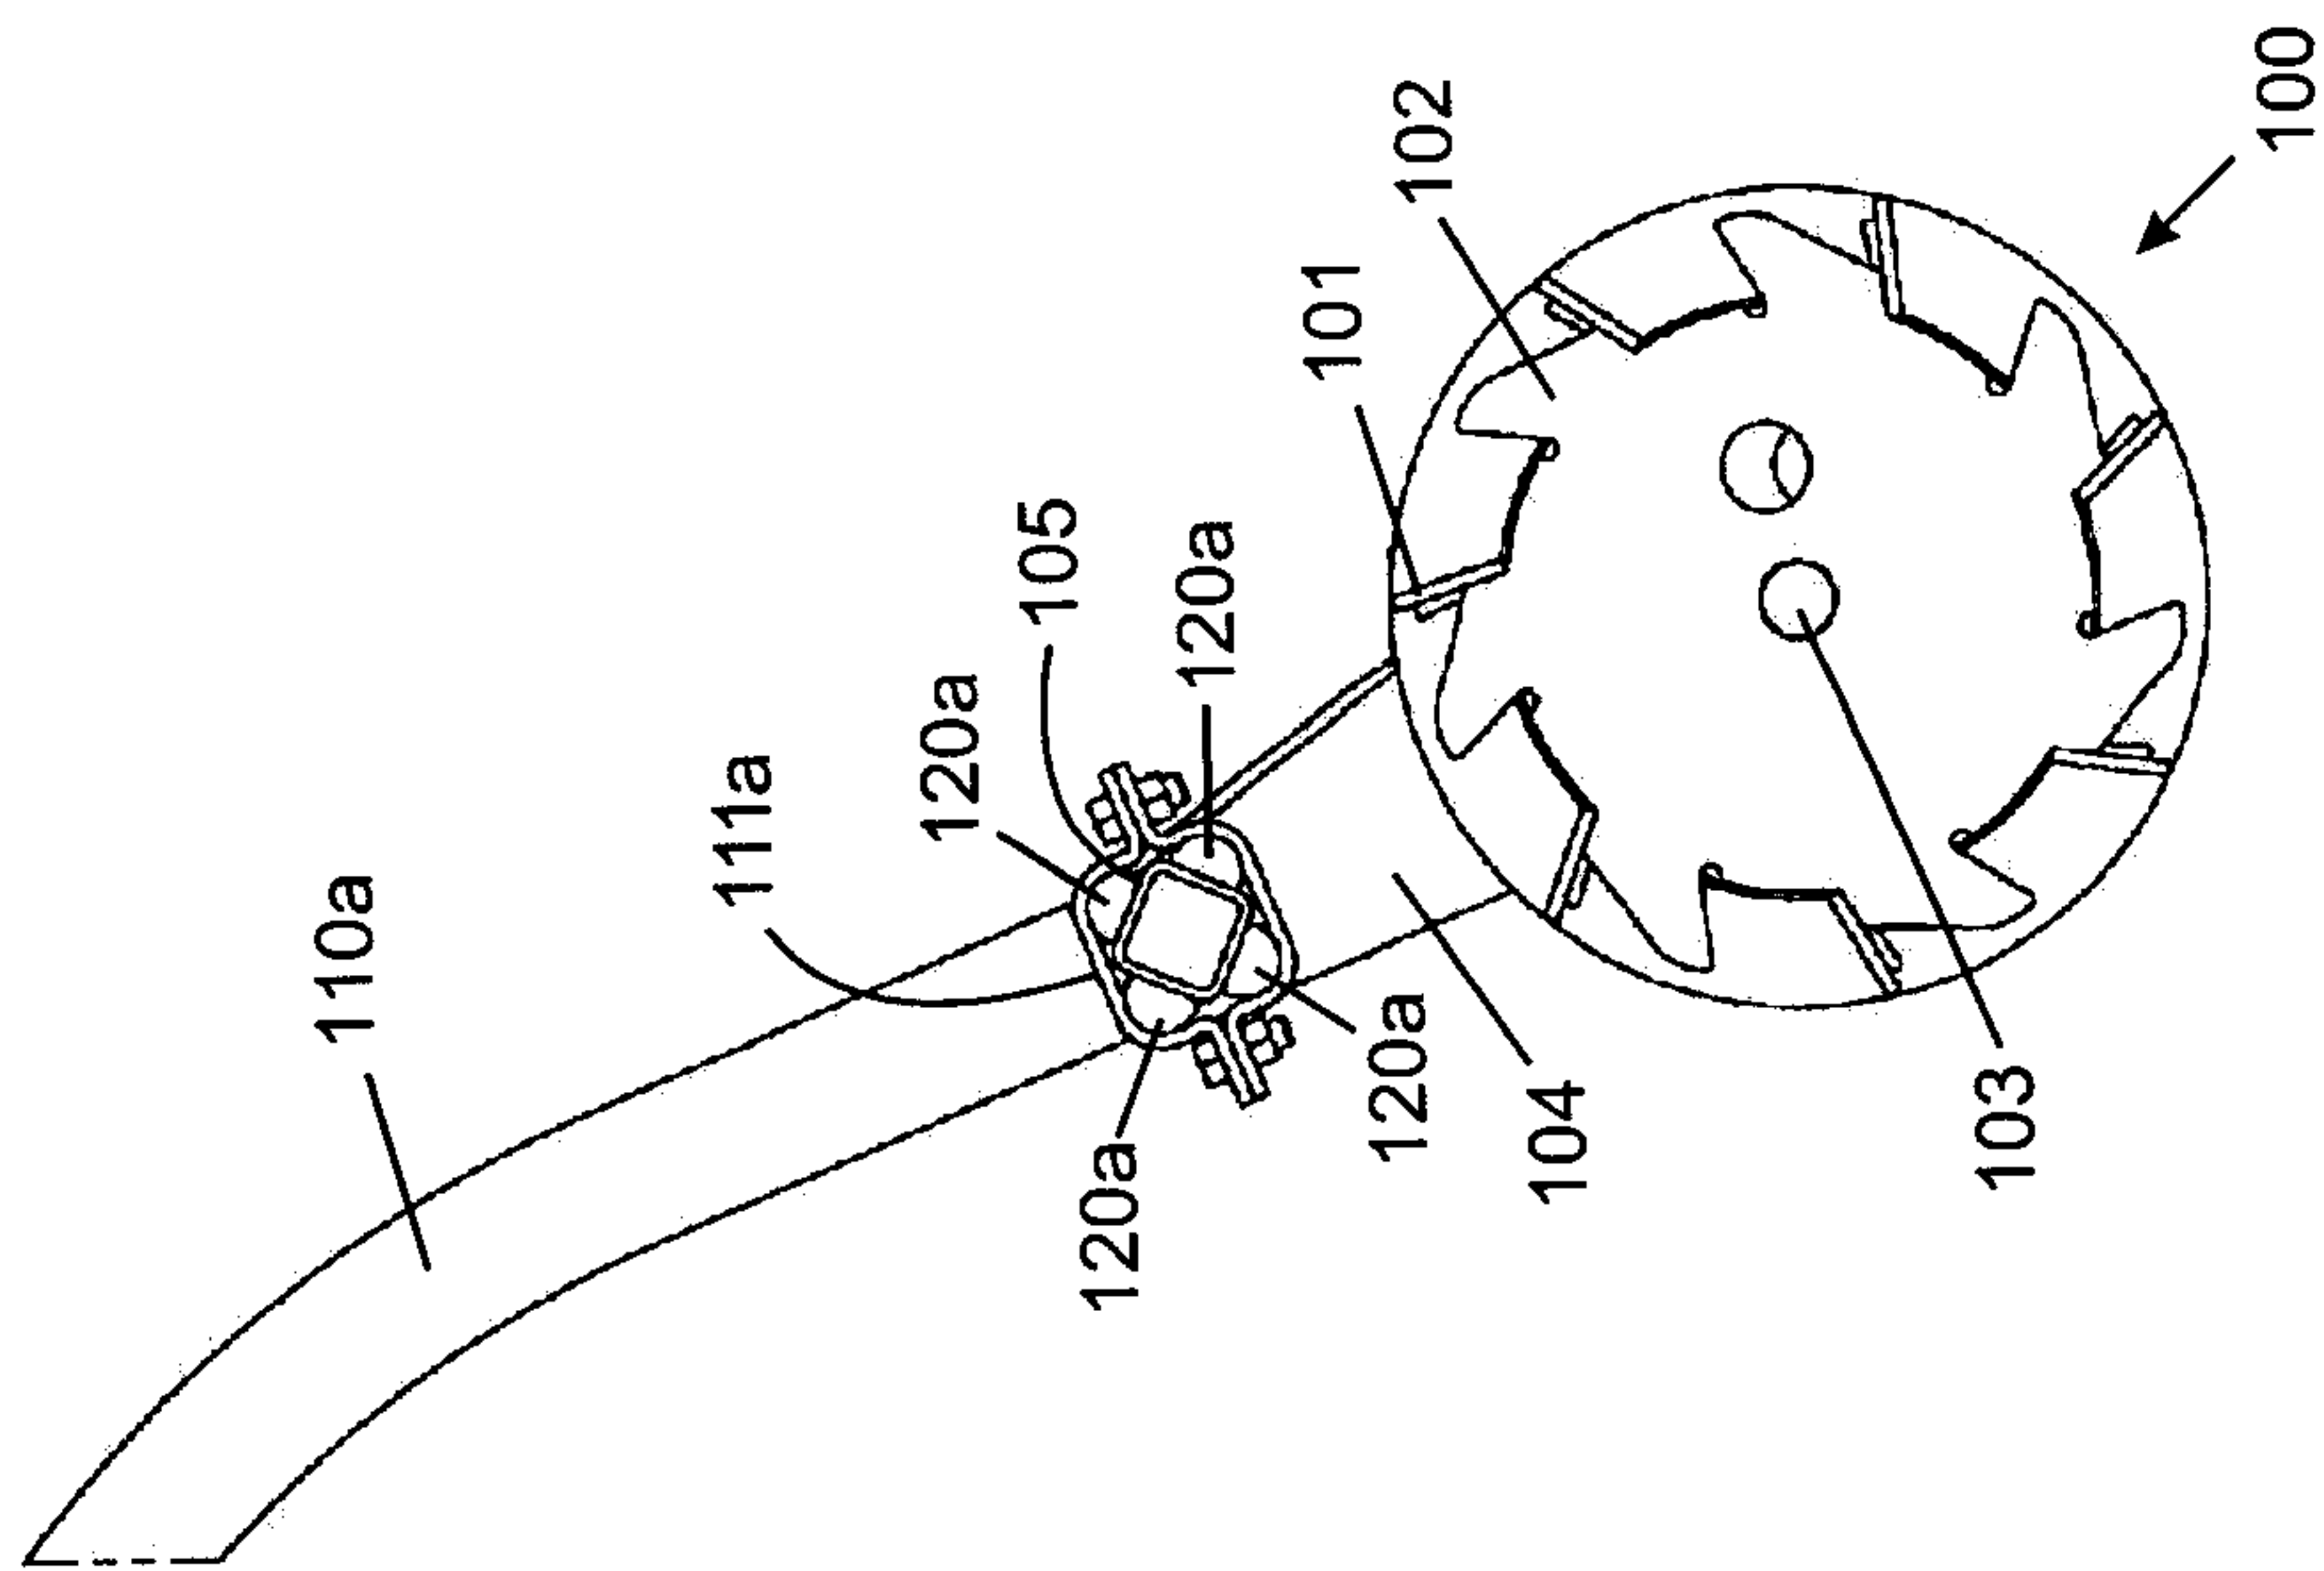


Fig. 6B

7/26

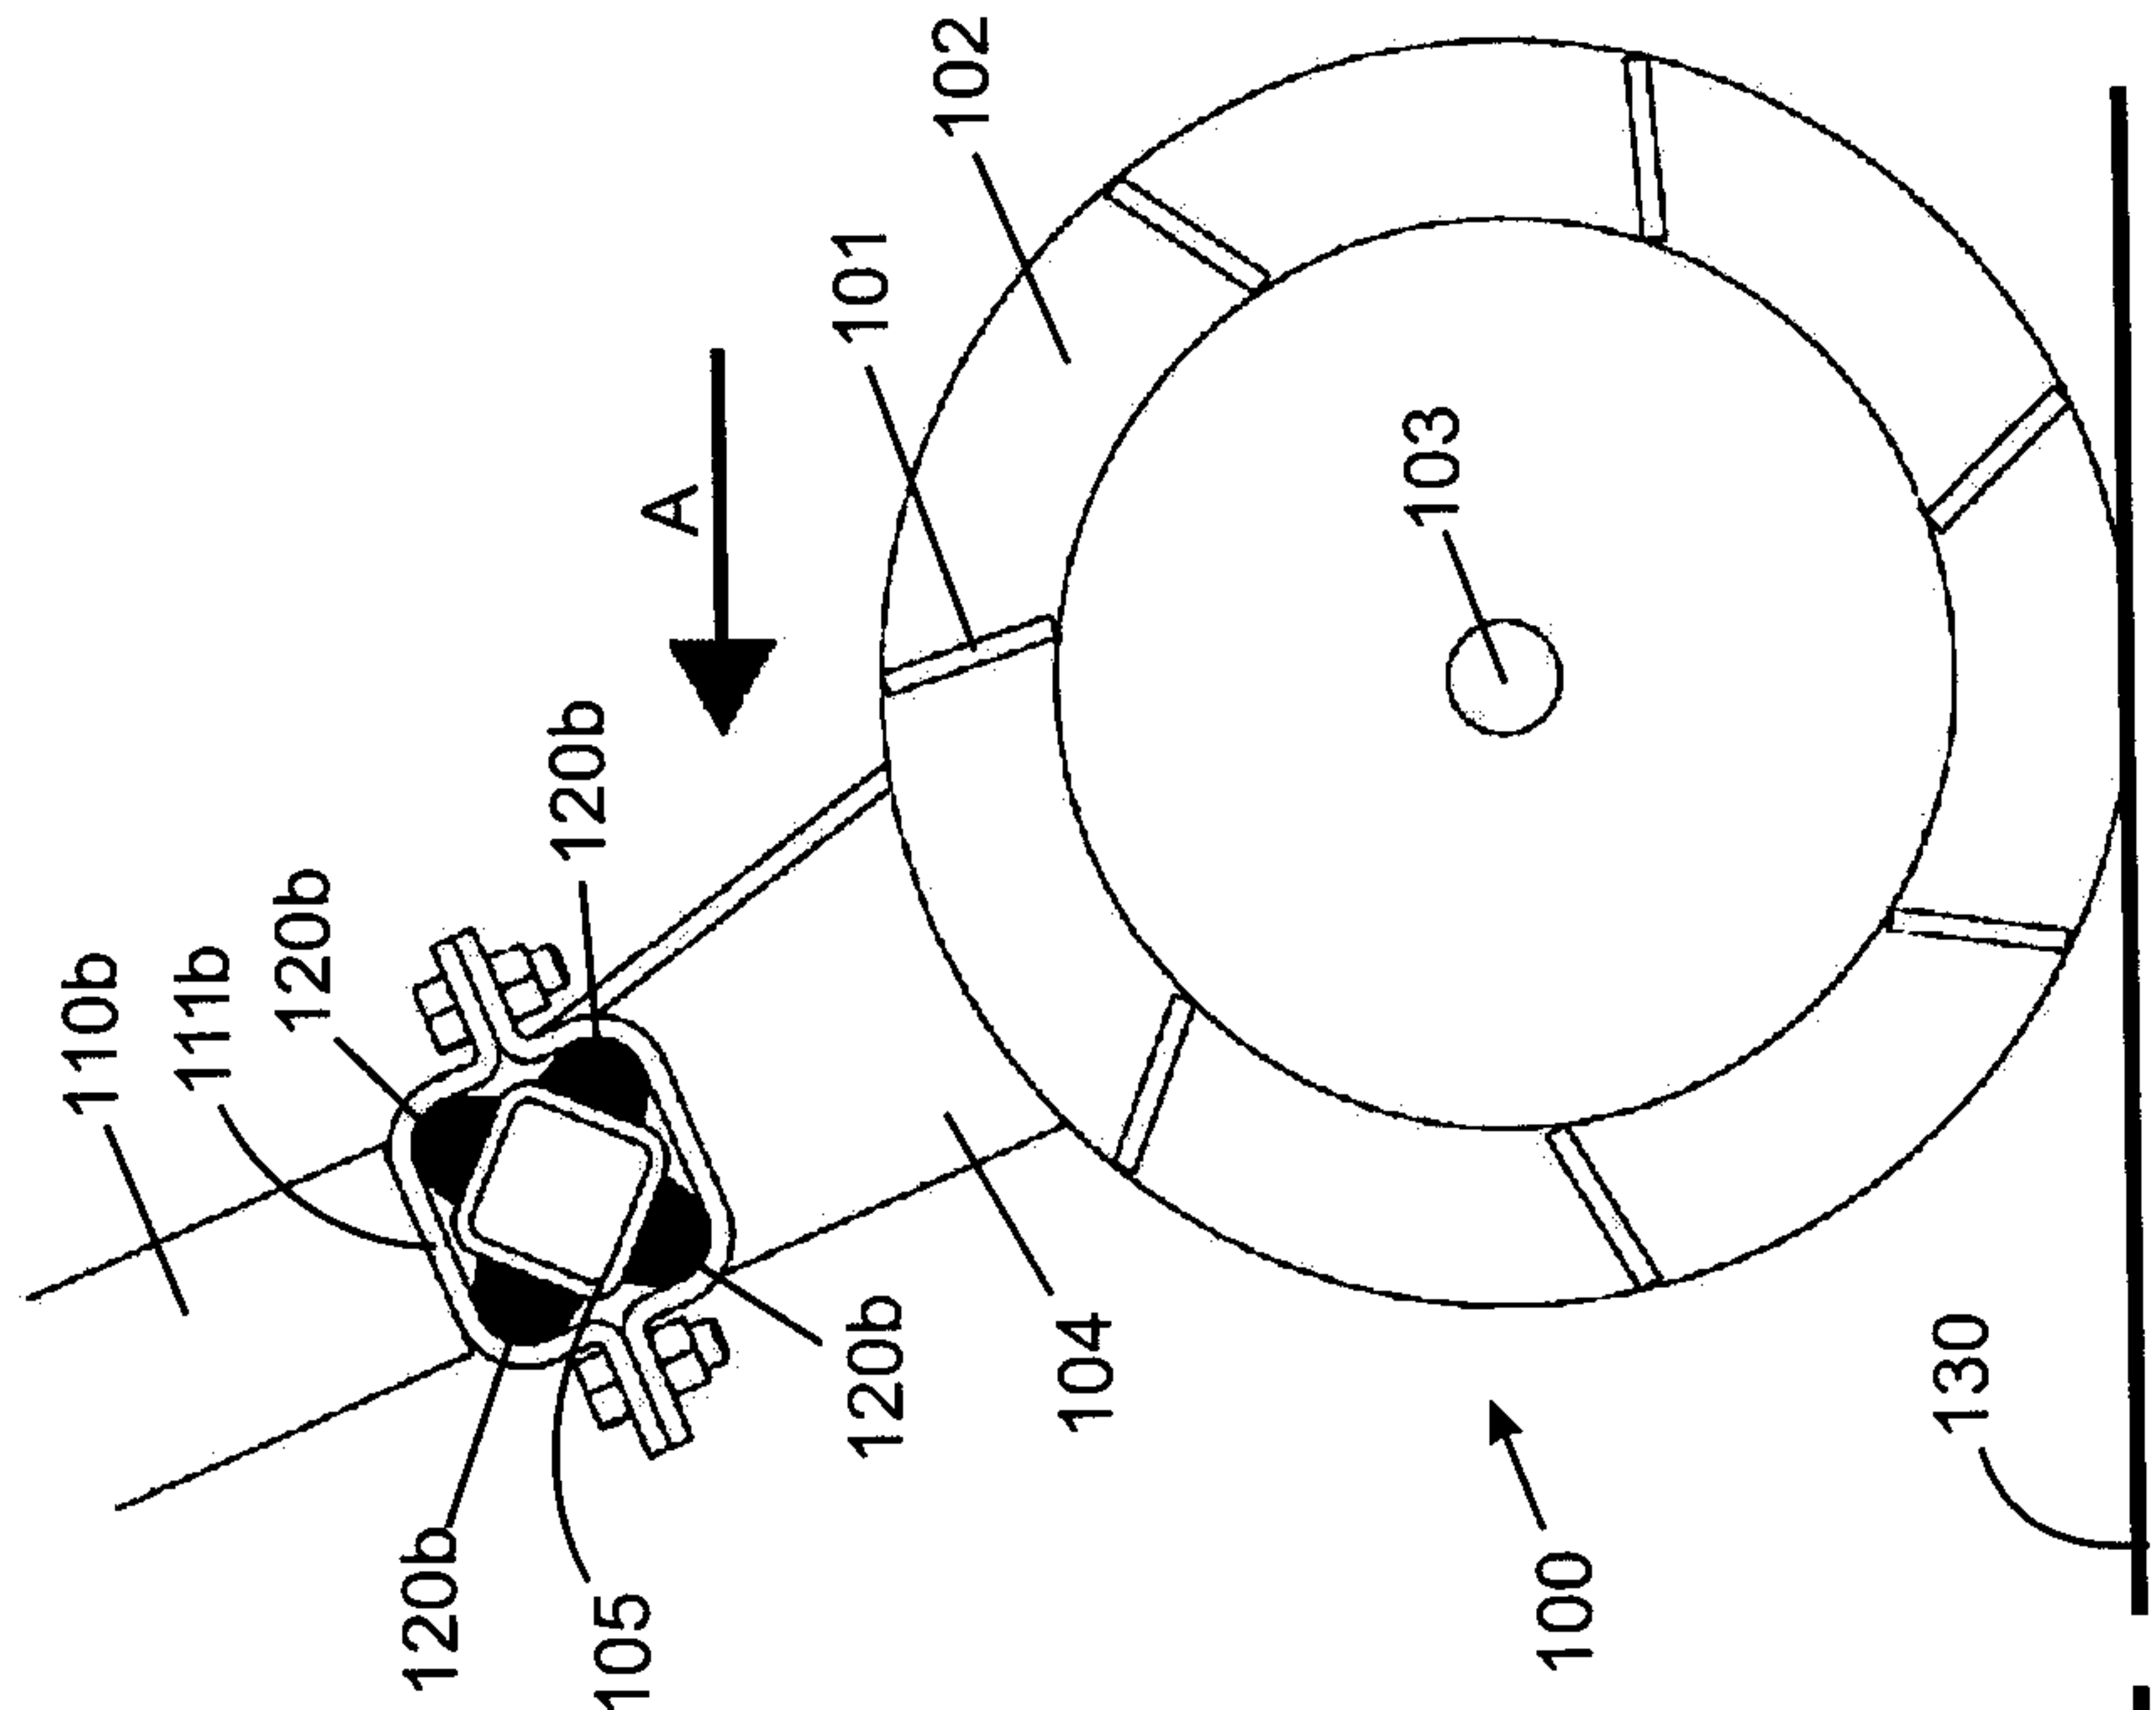


Fig. 7A

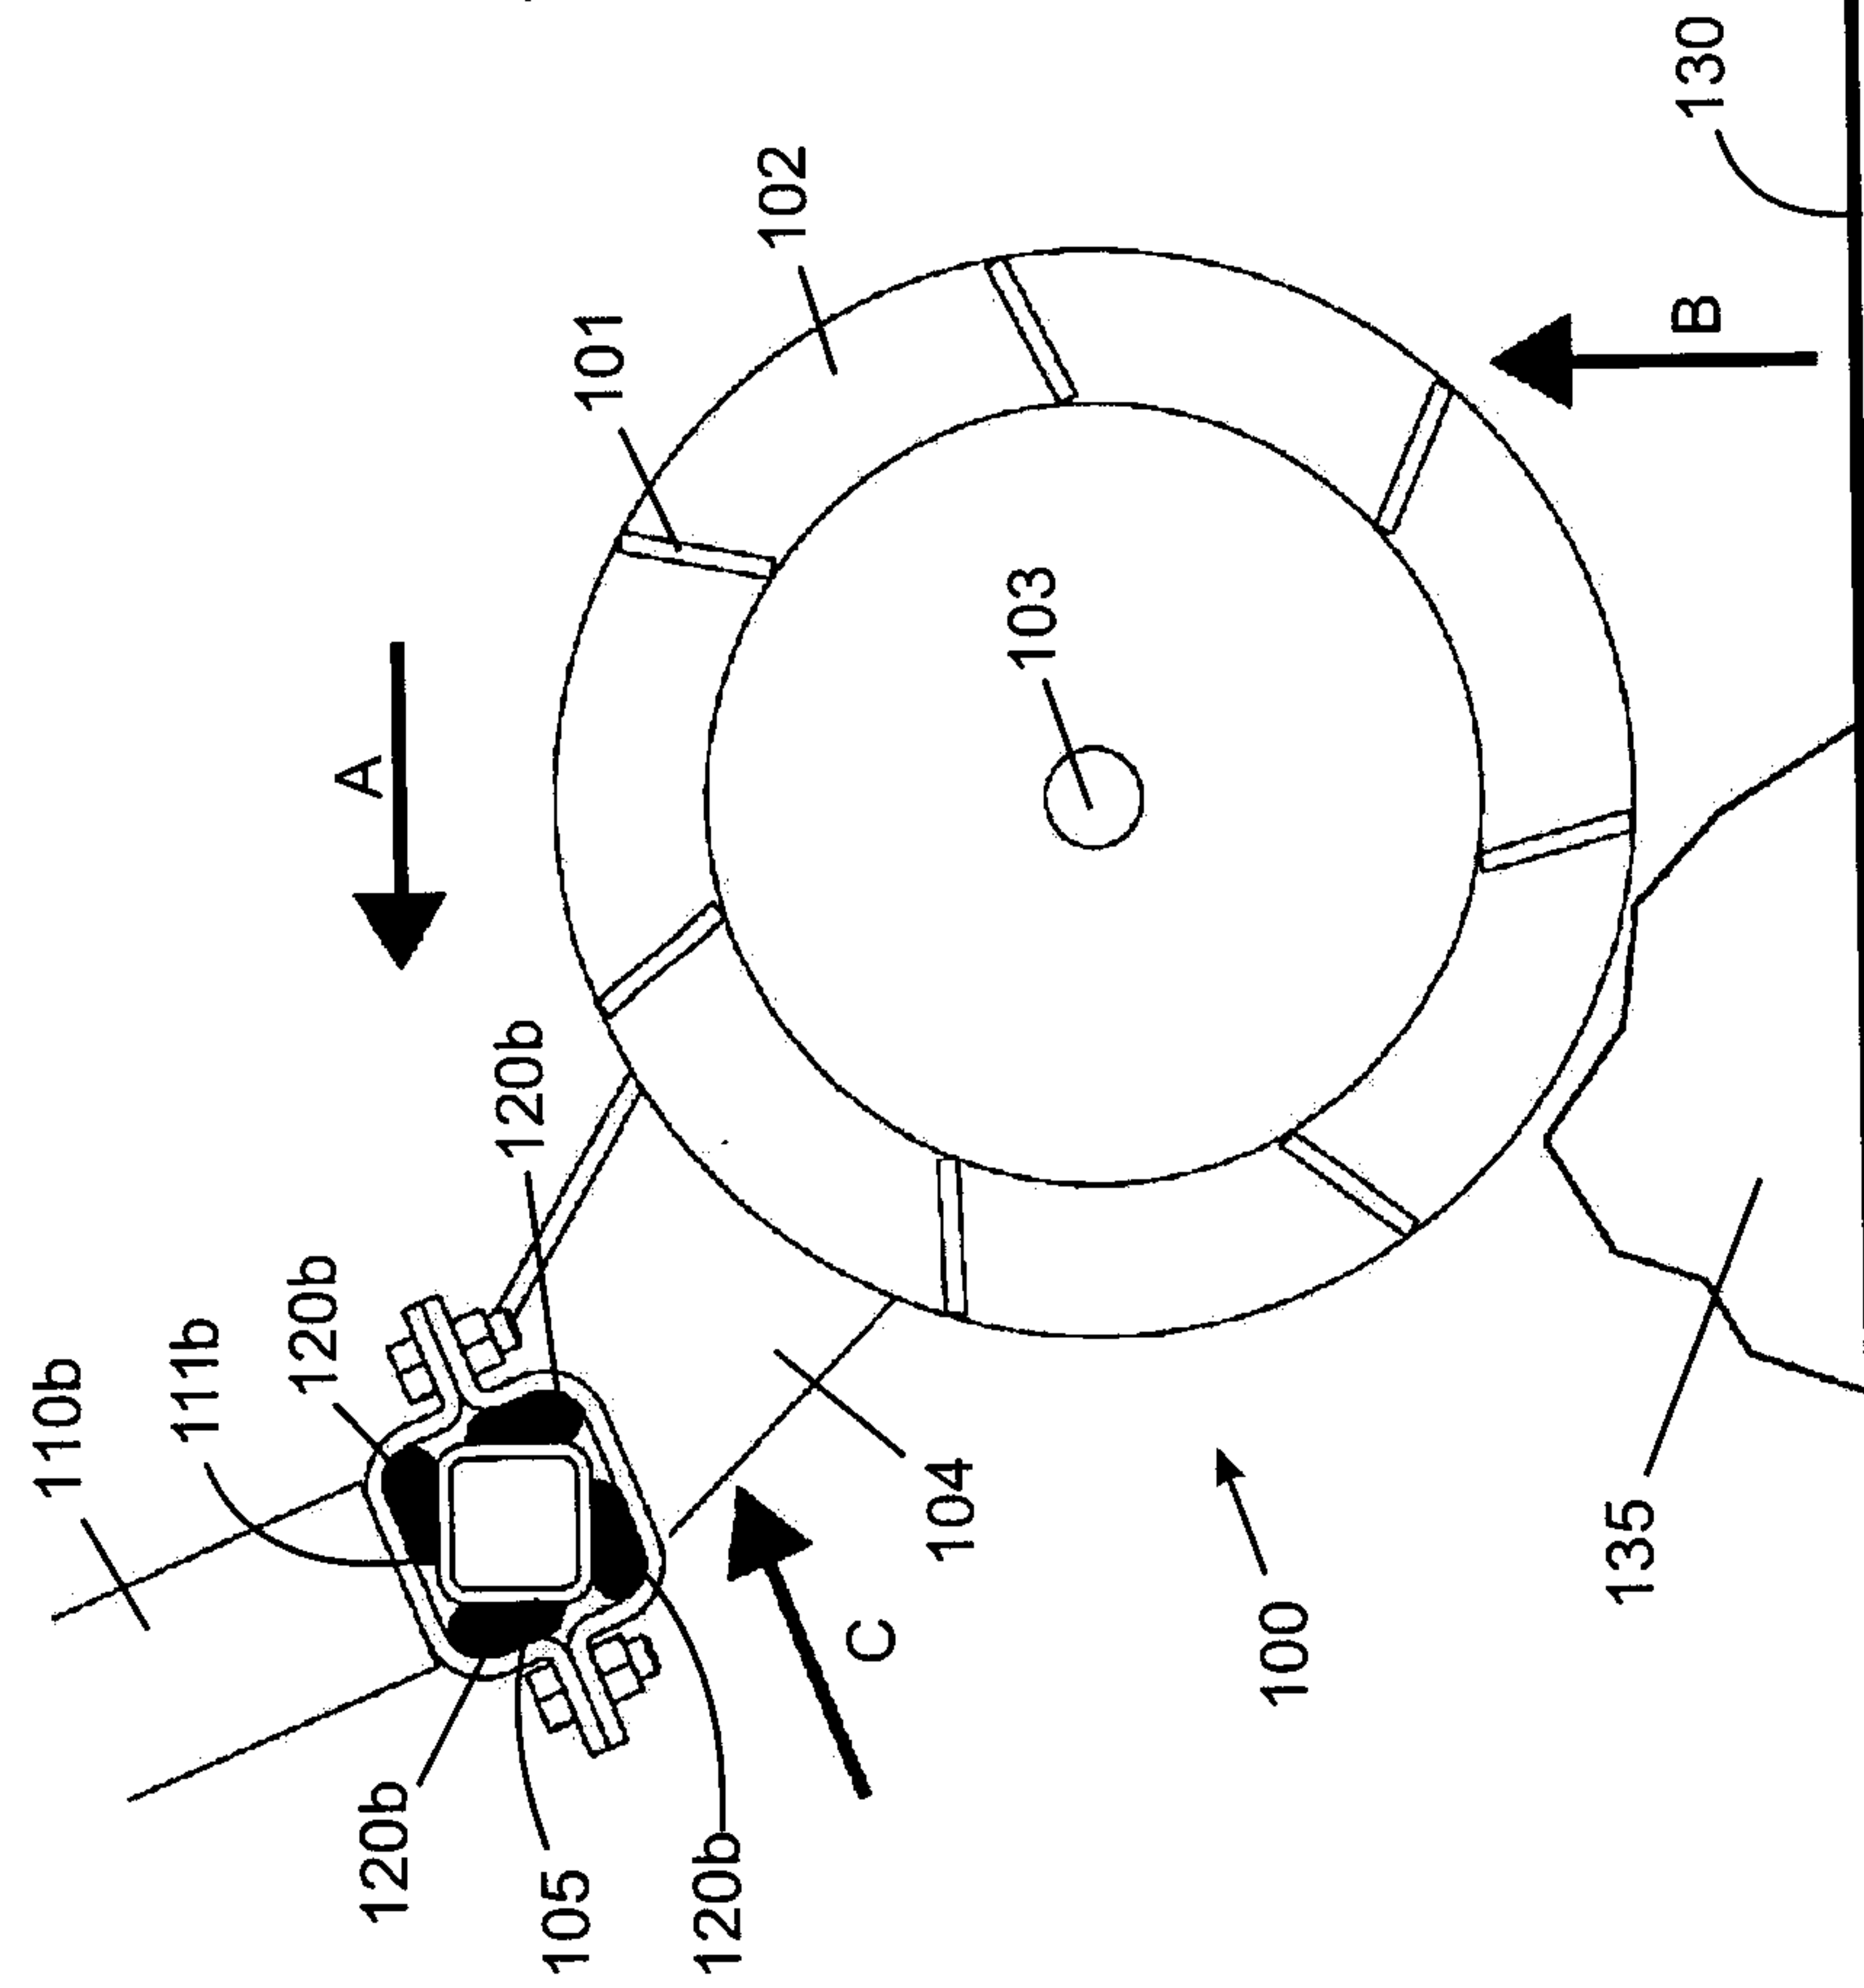


Fig. 7B

8/26

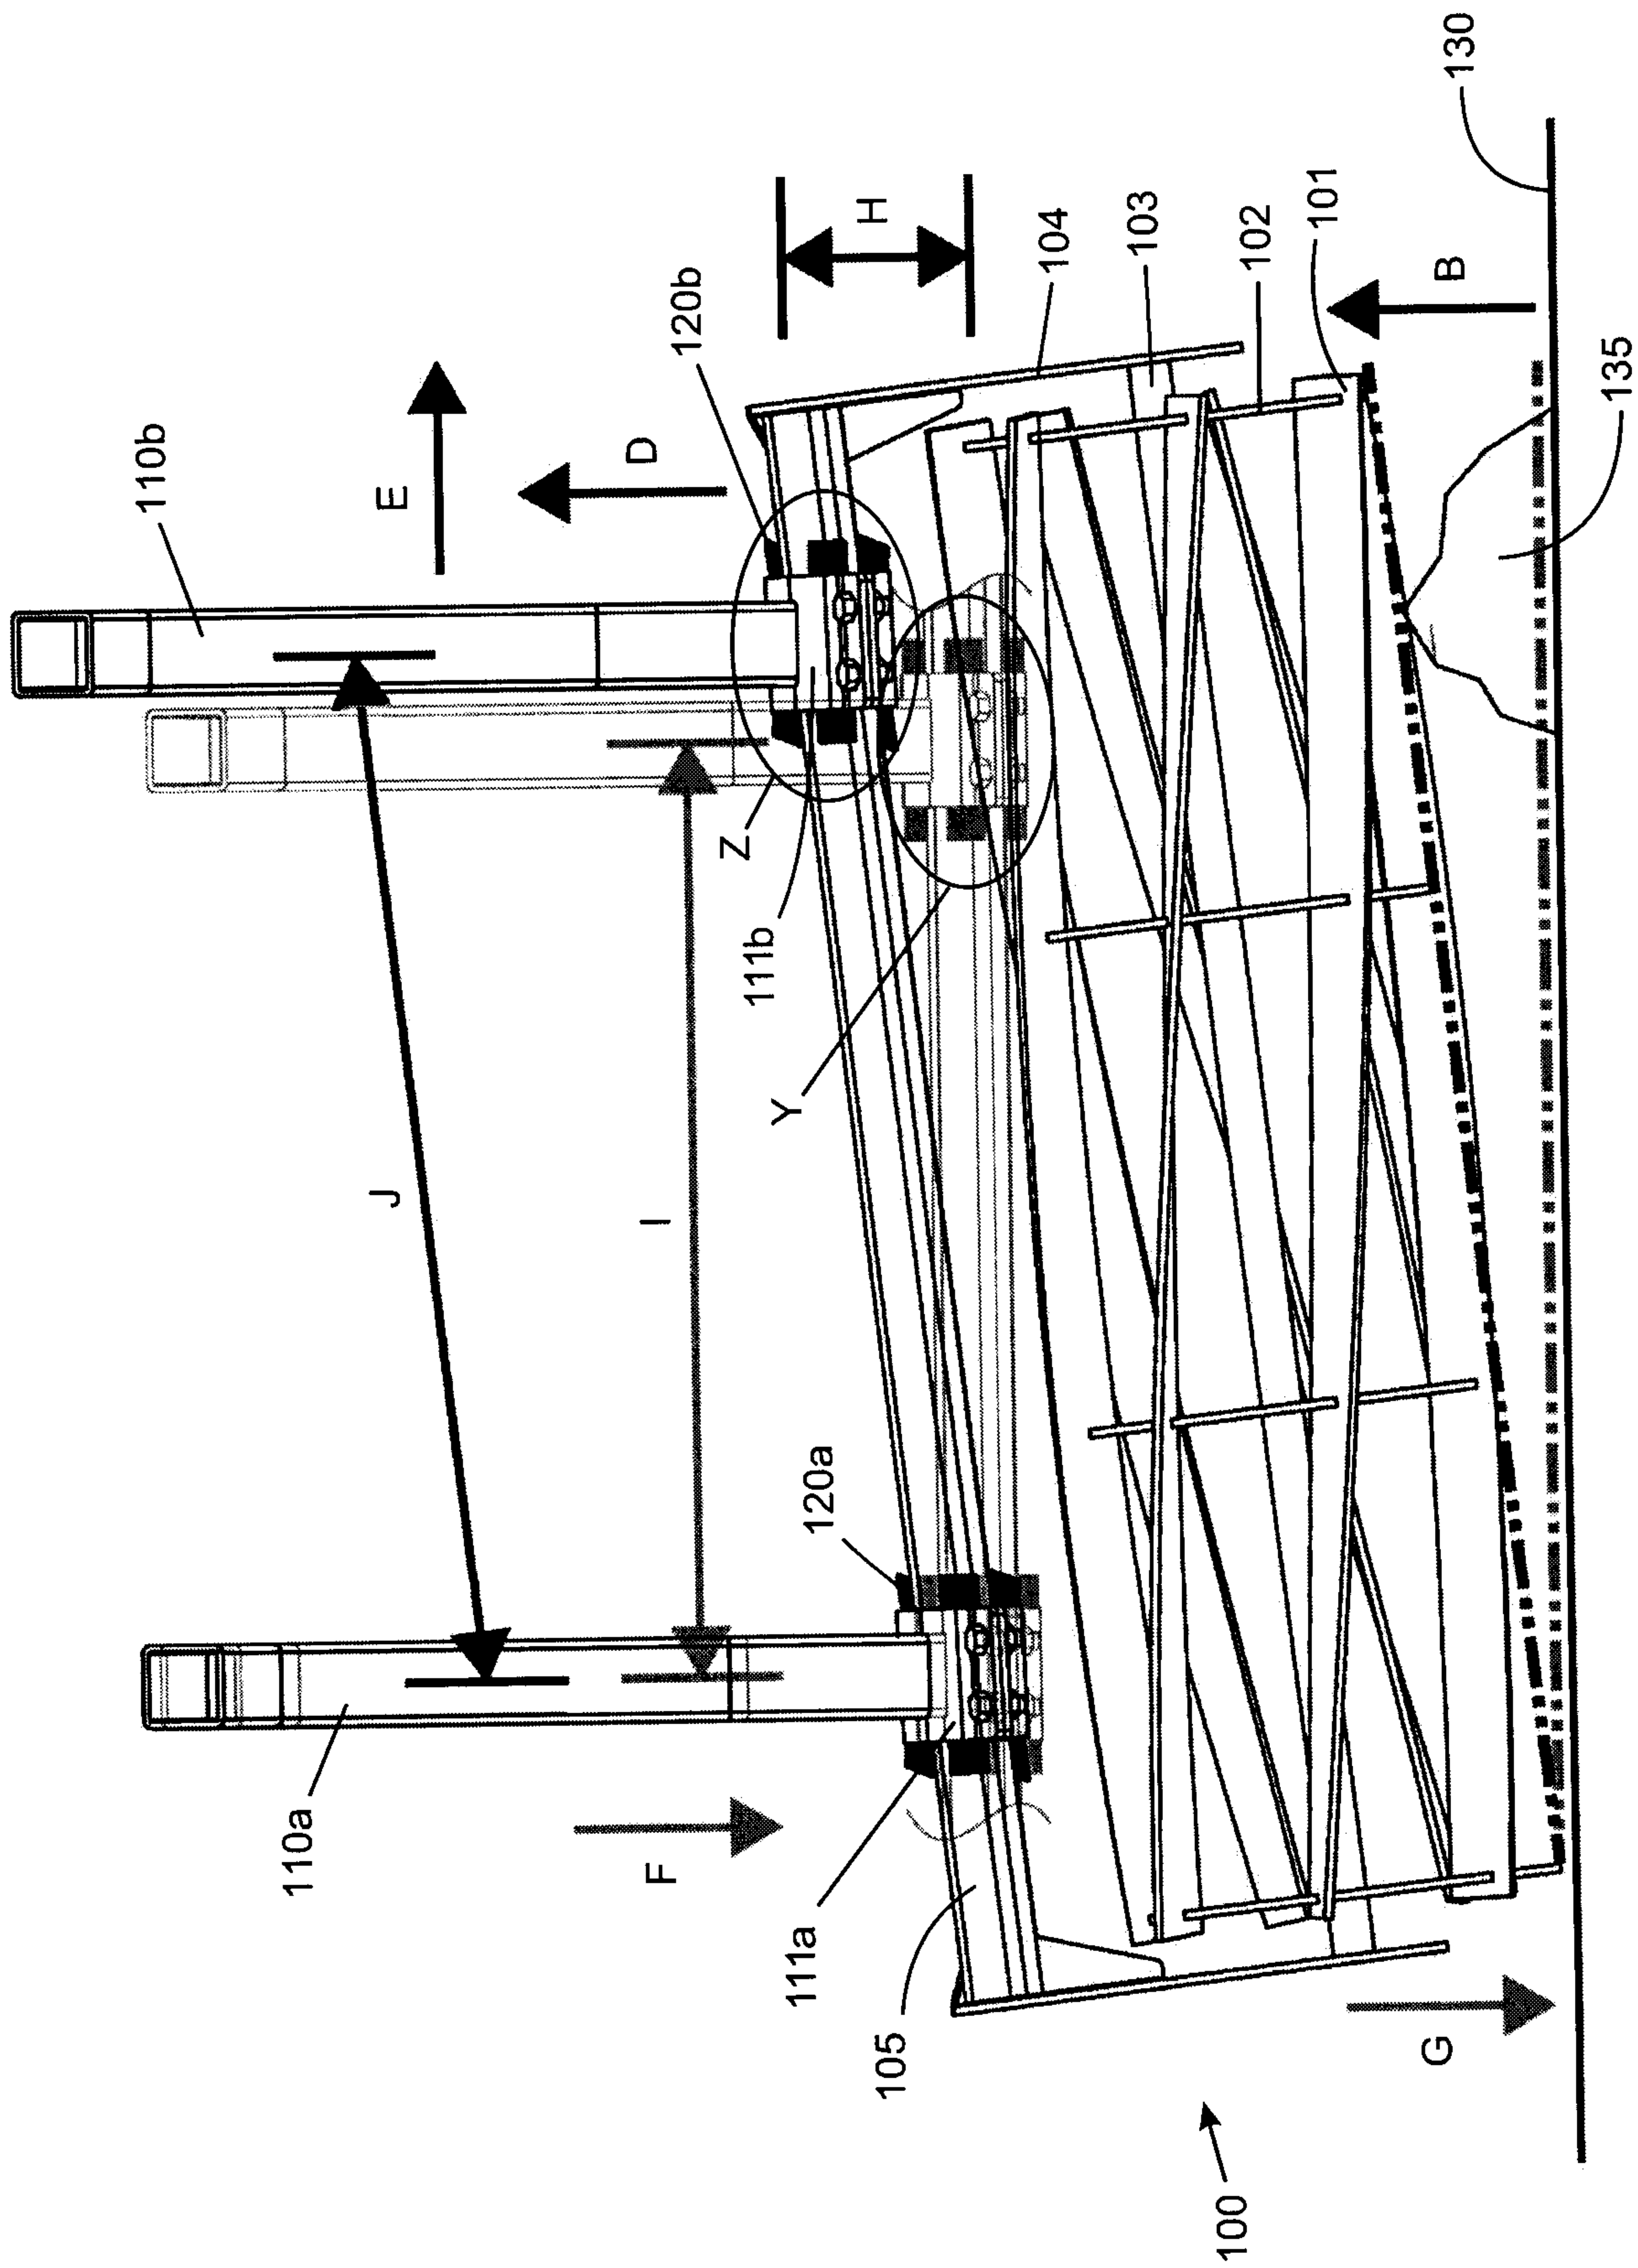


Fig. 7C

9/26

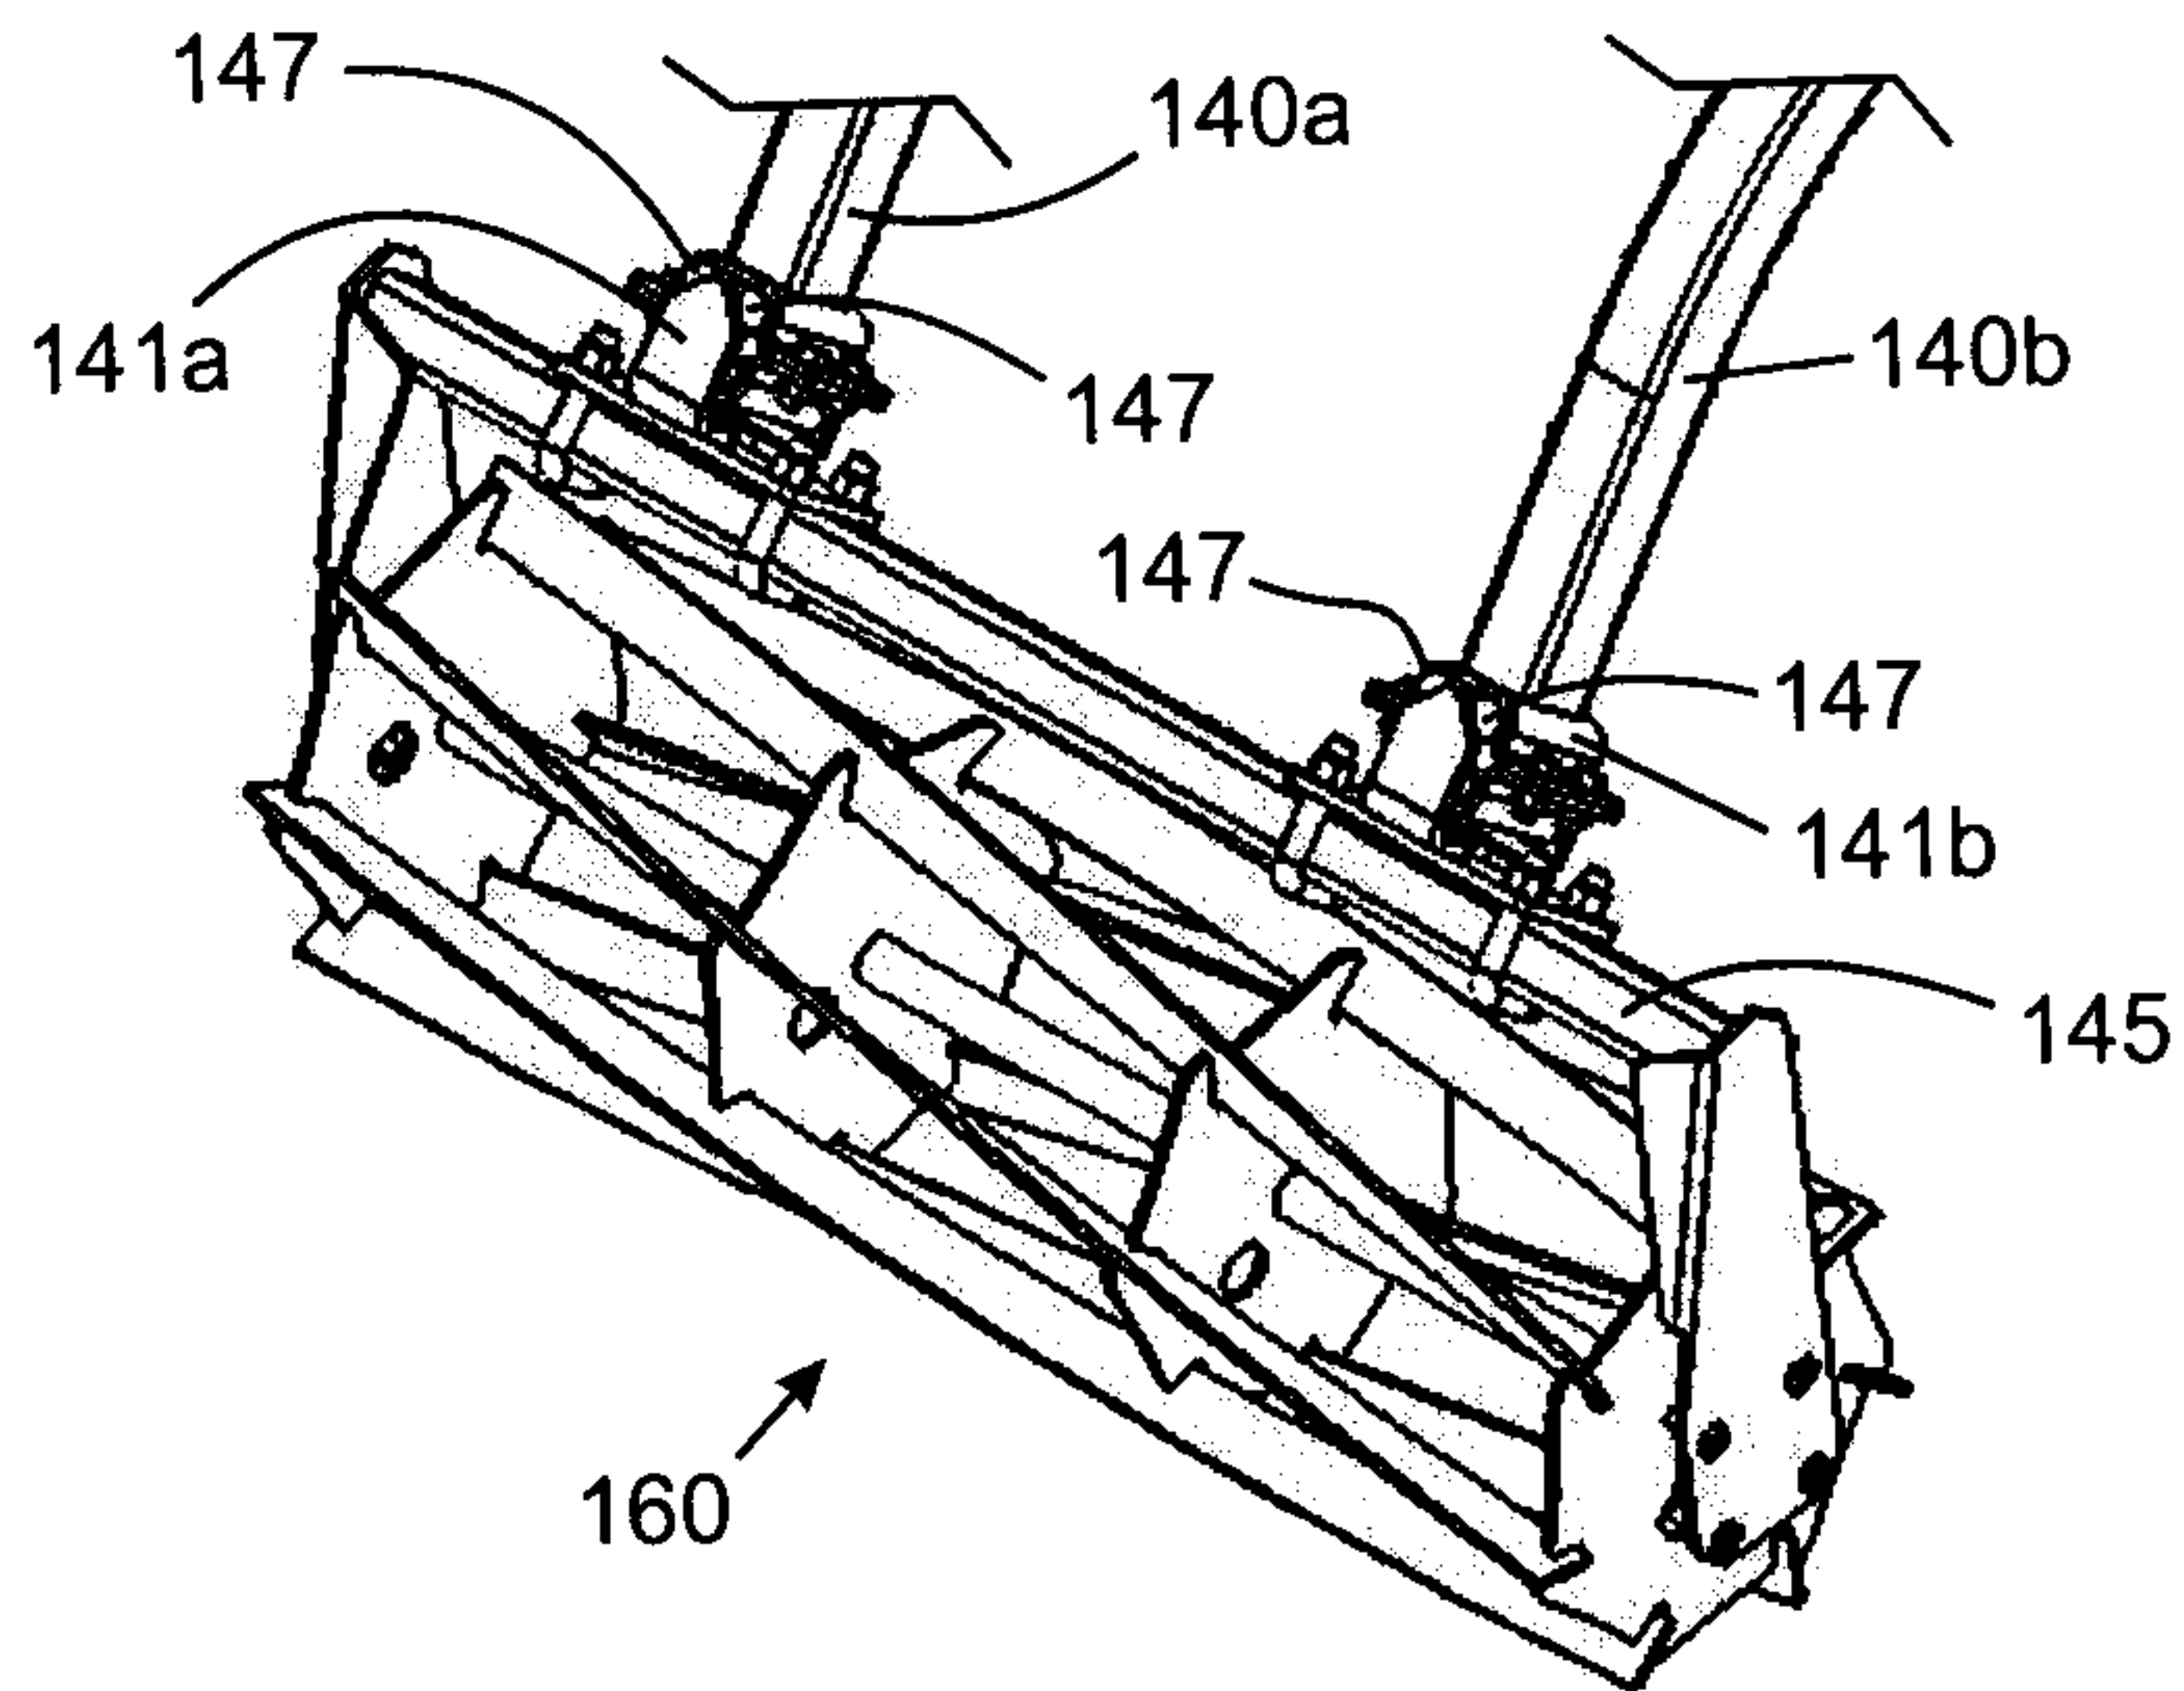


Fig. 8A

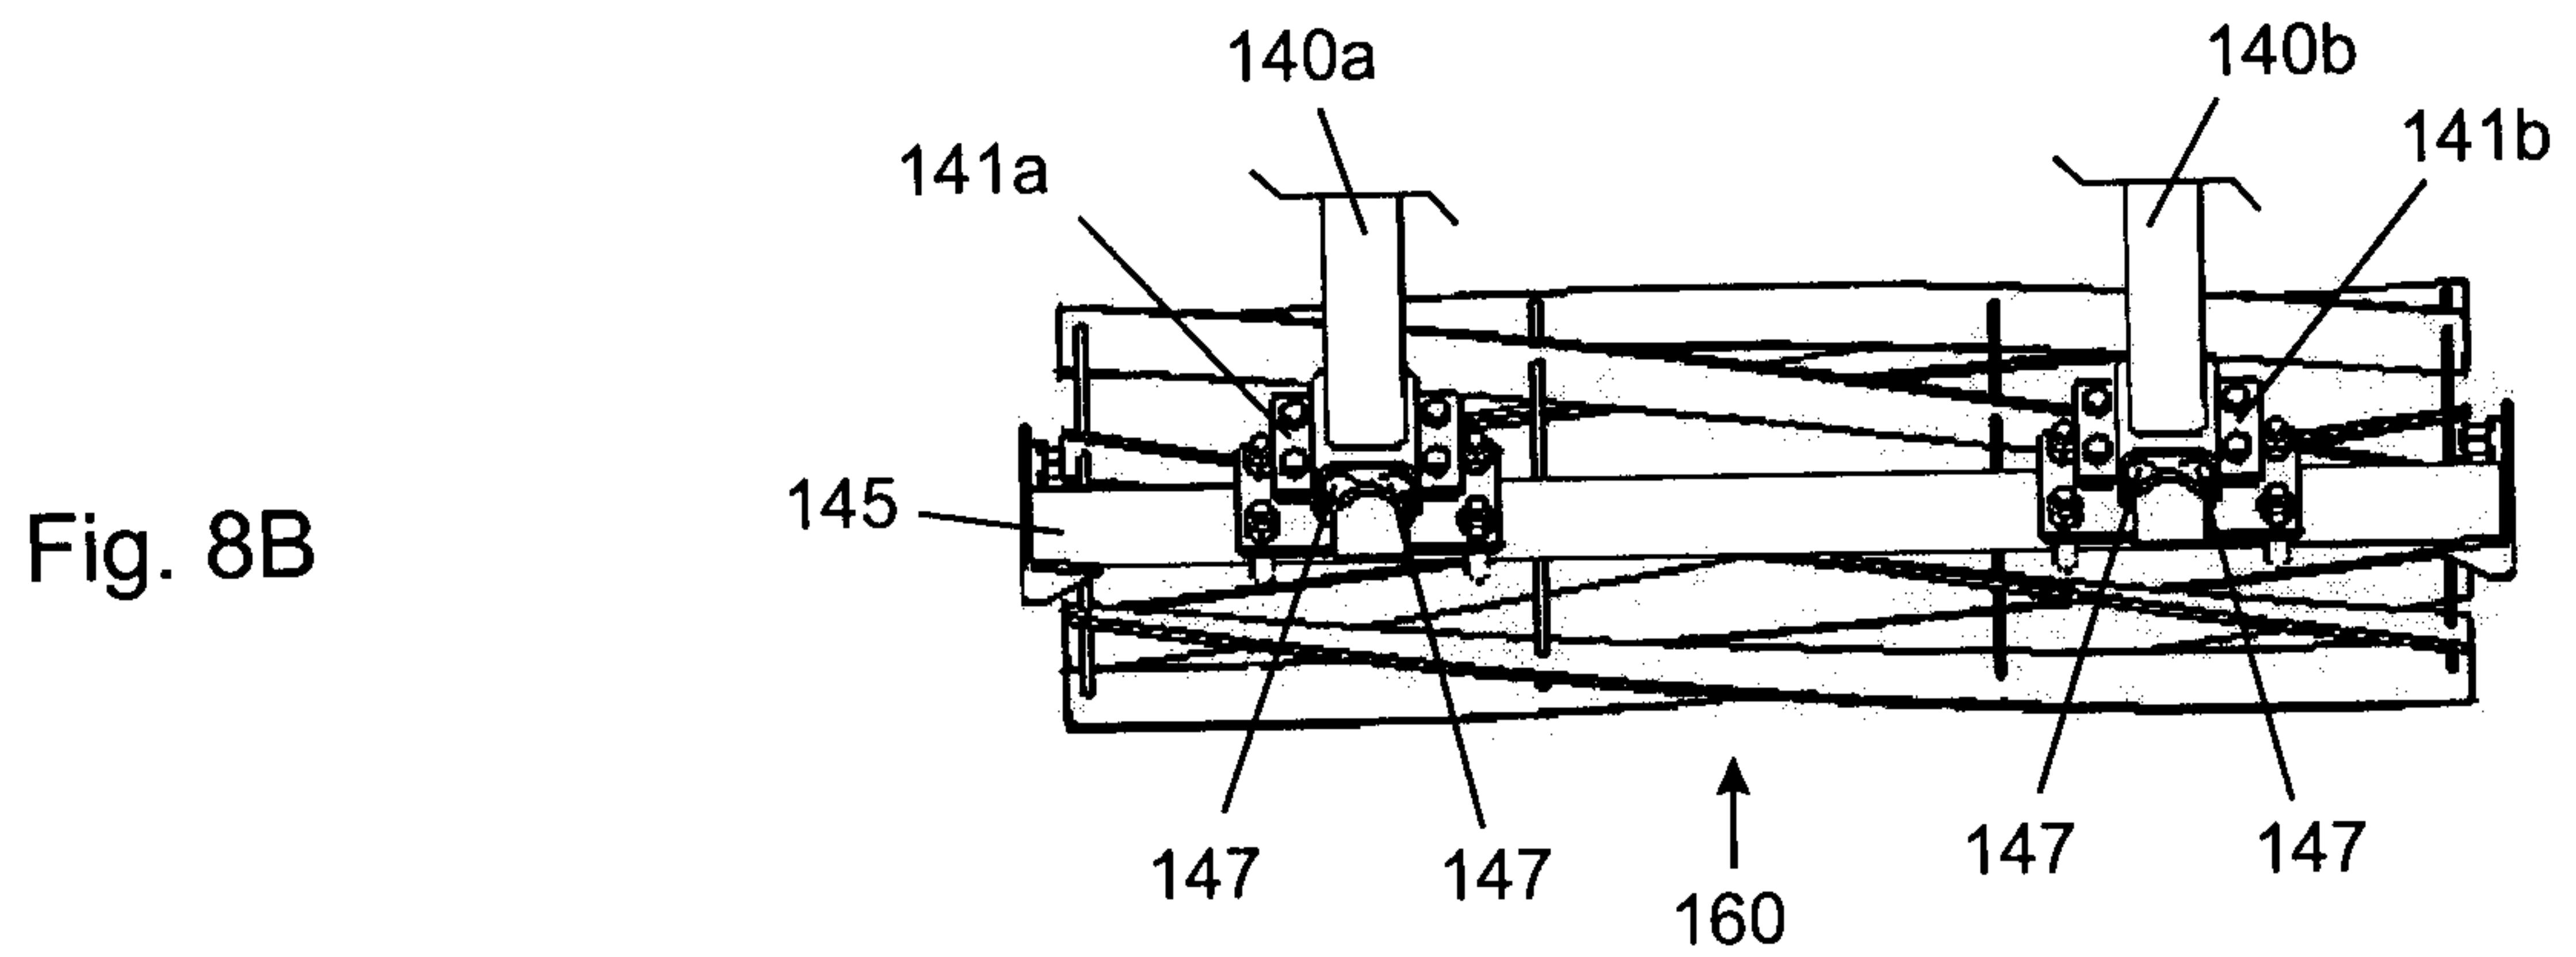


Fig. 8B




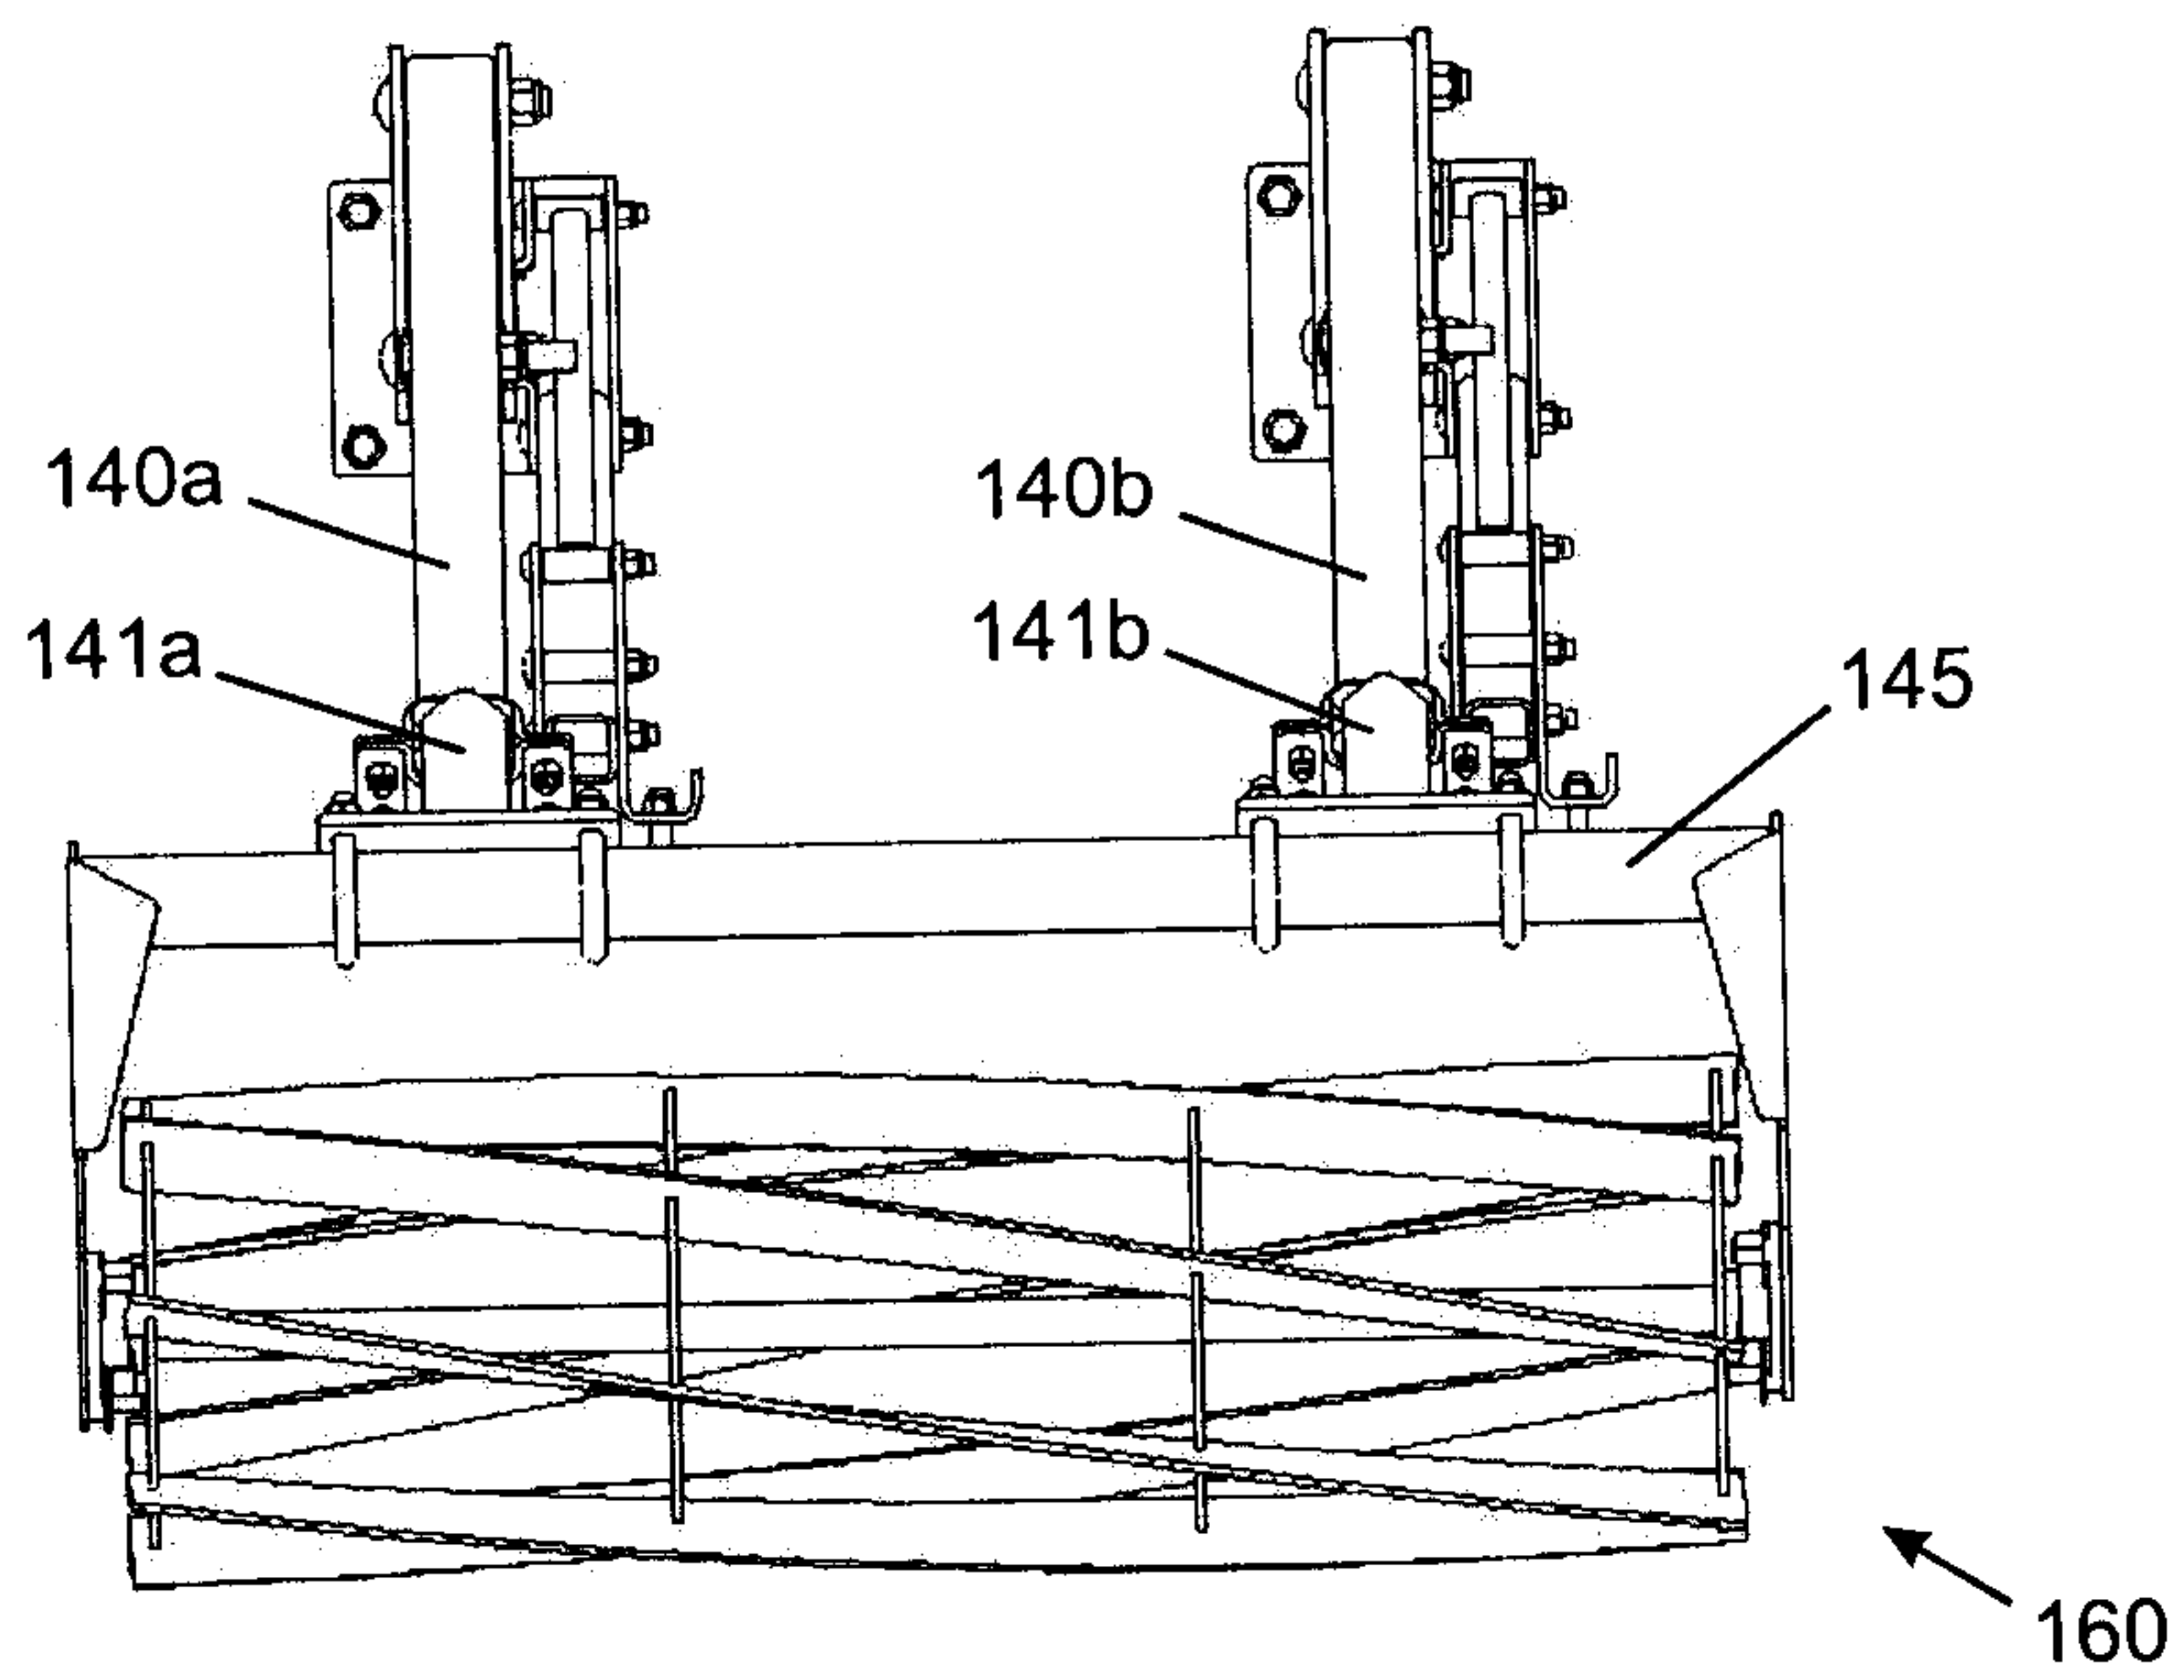


Fig. 8C

10/26

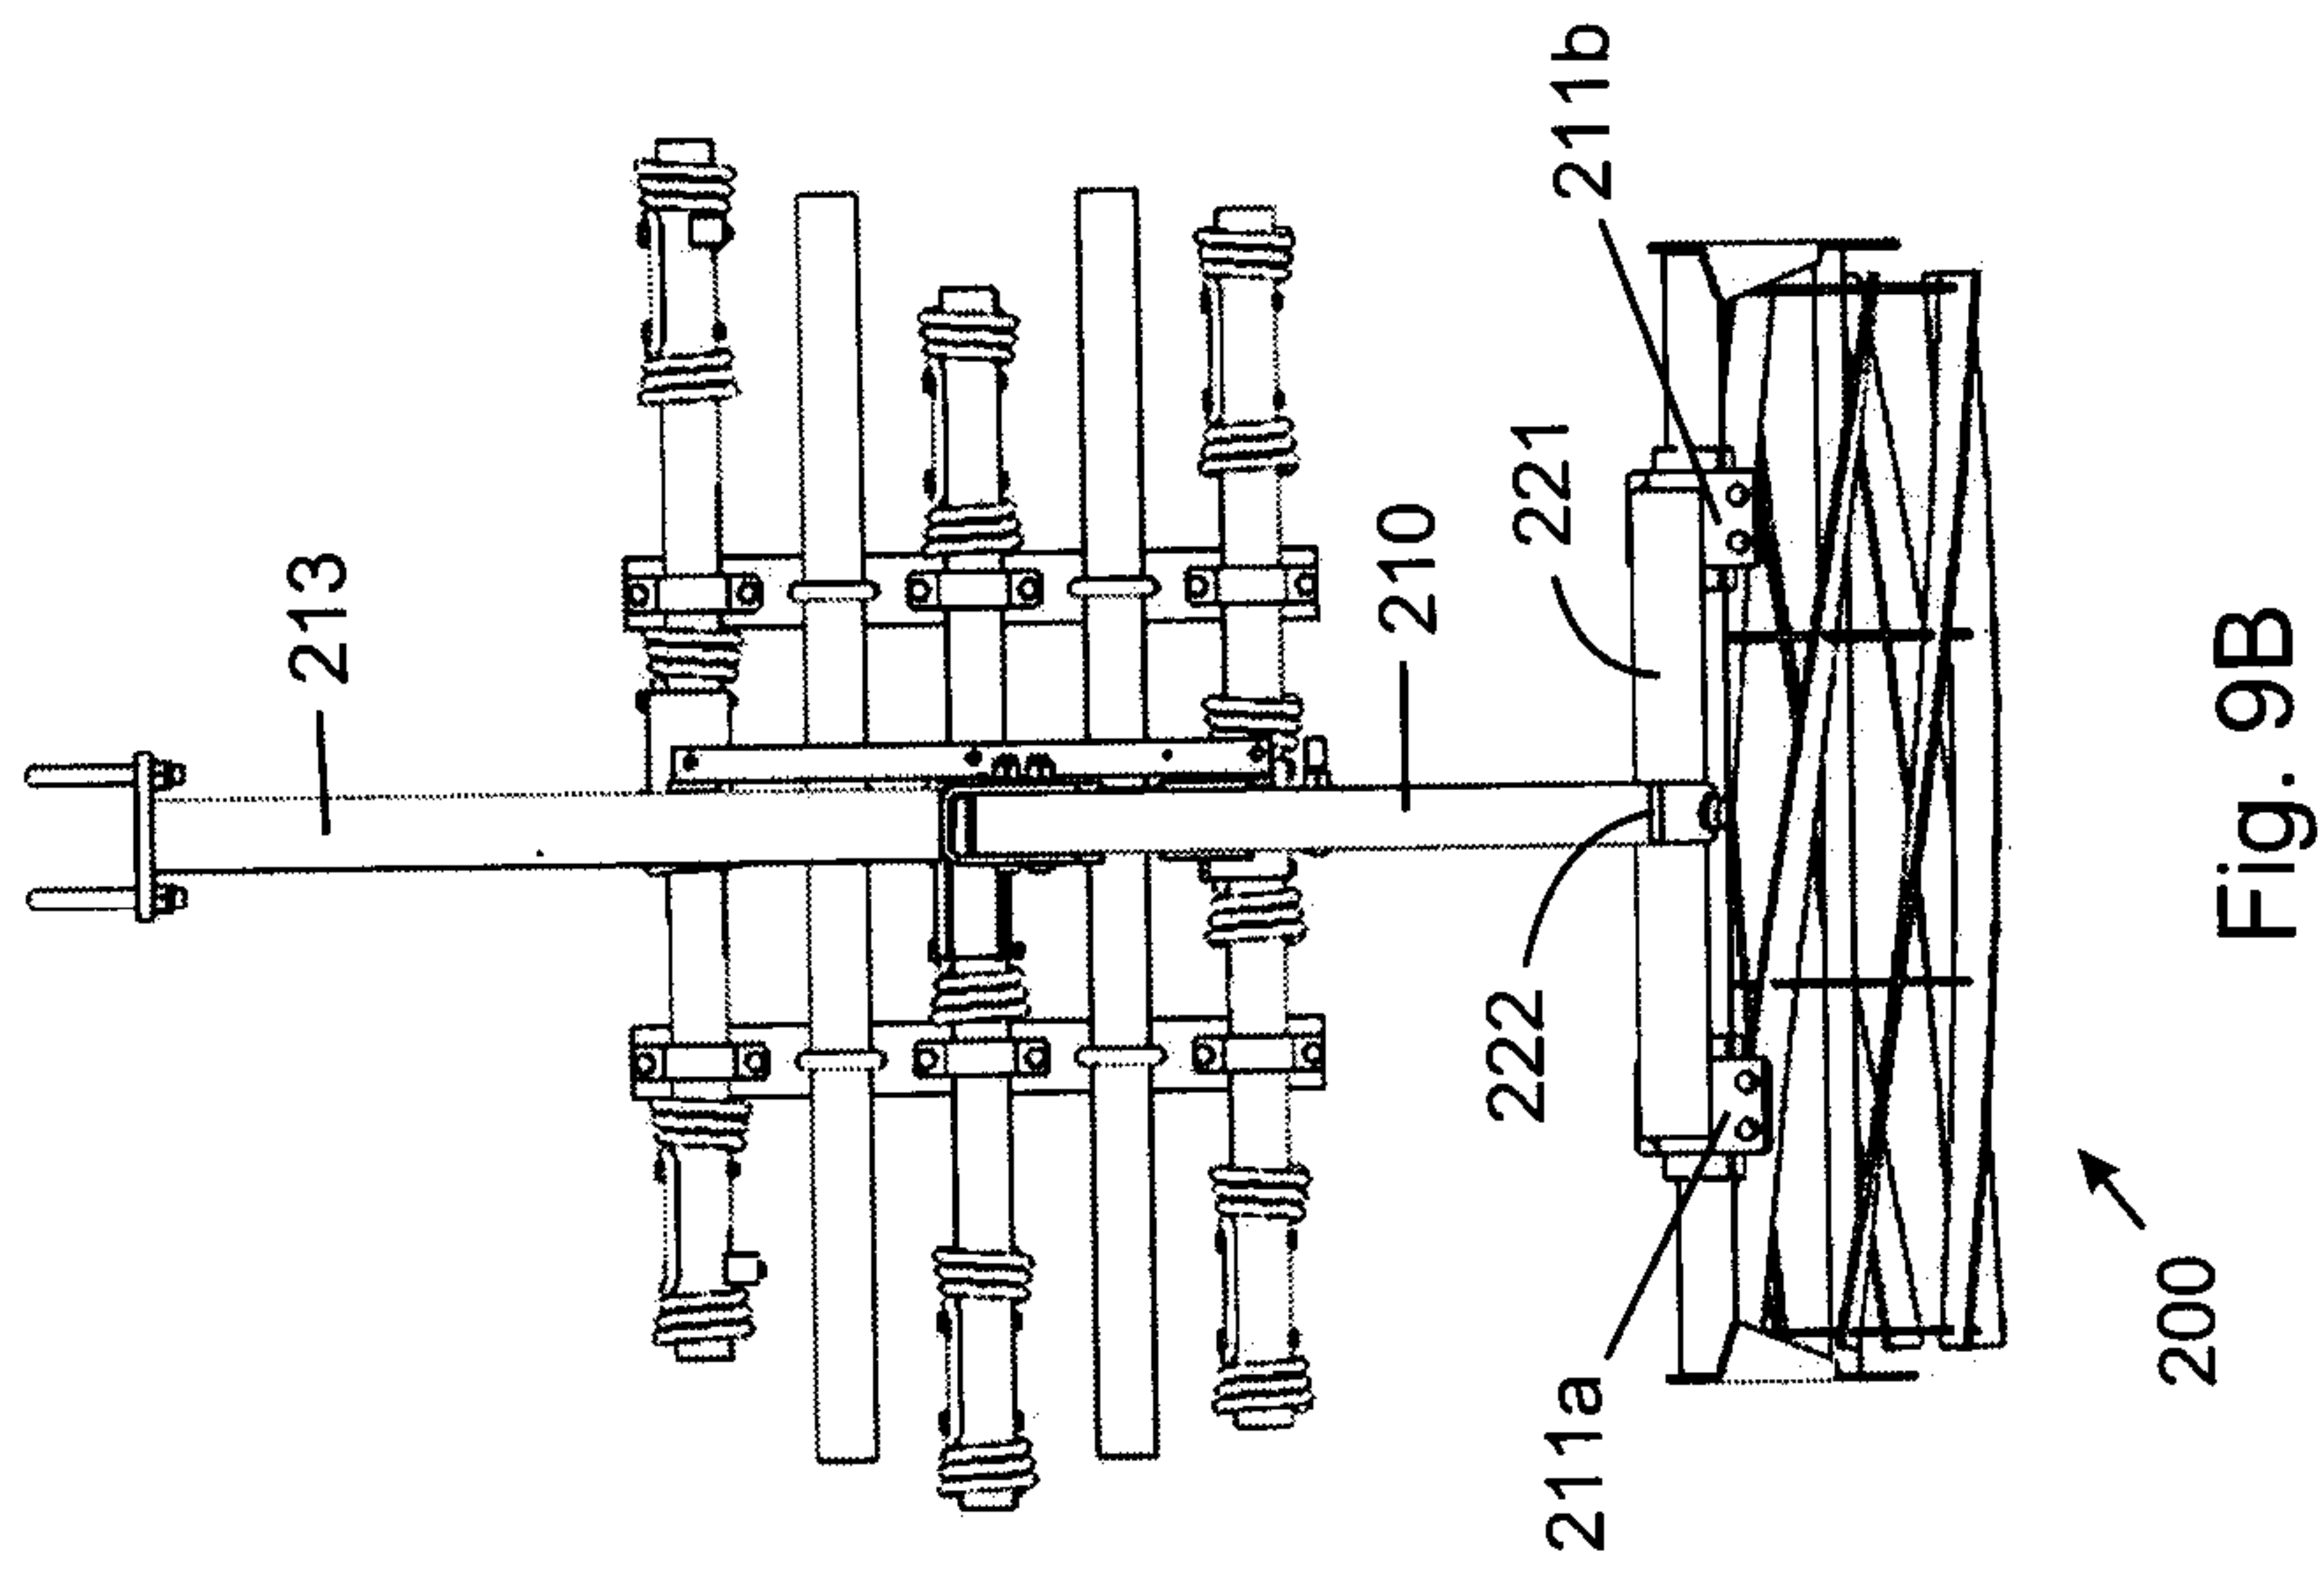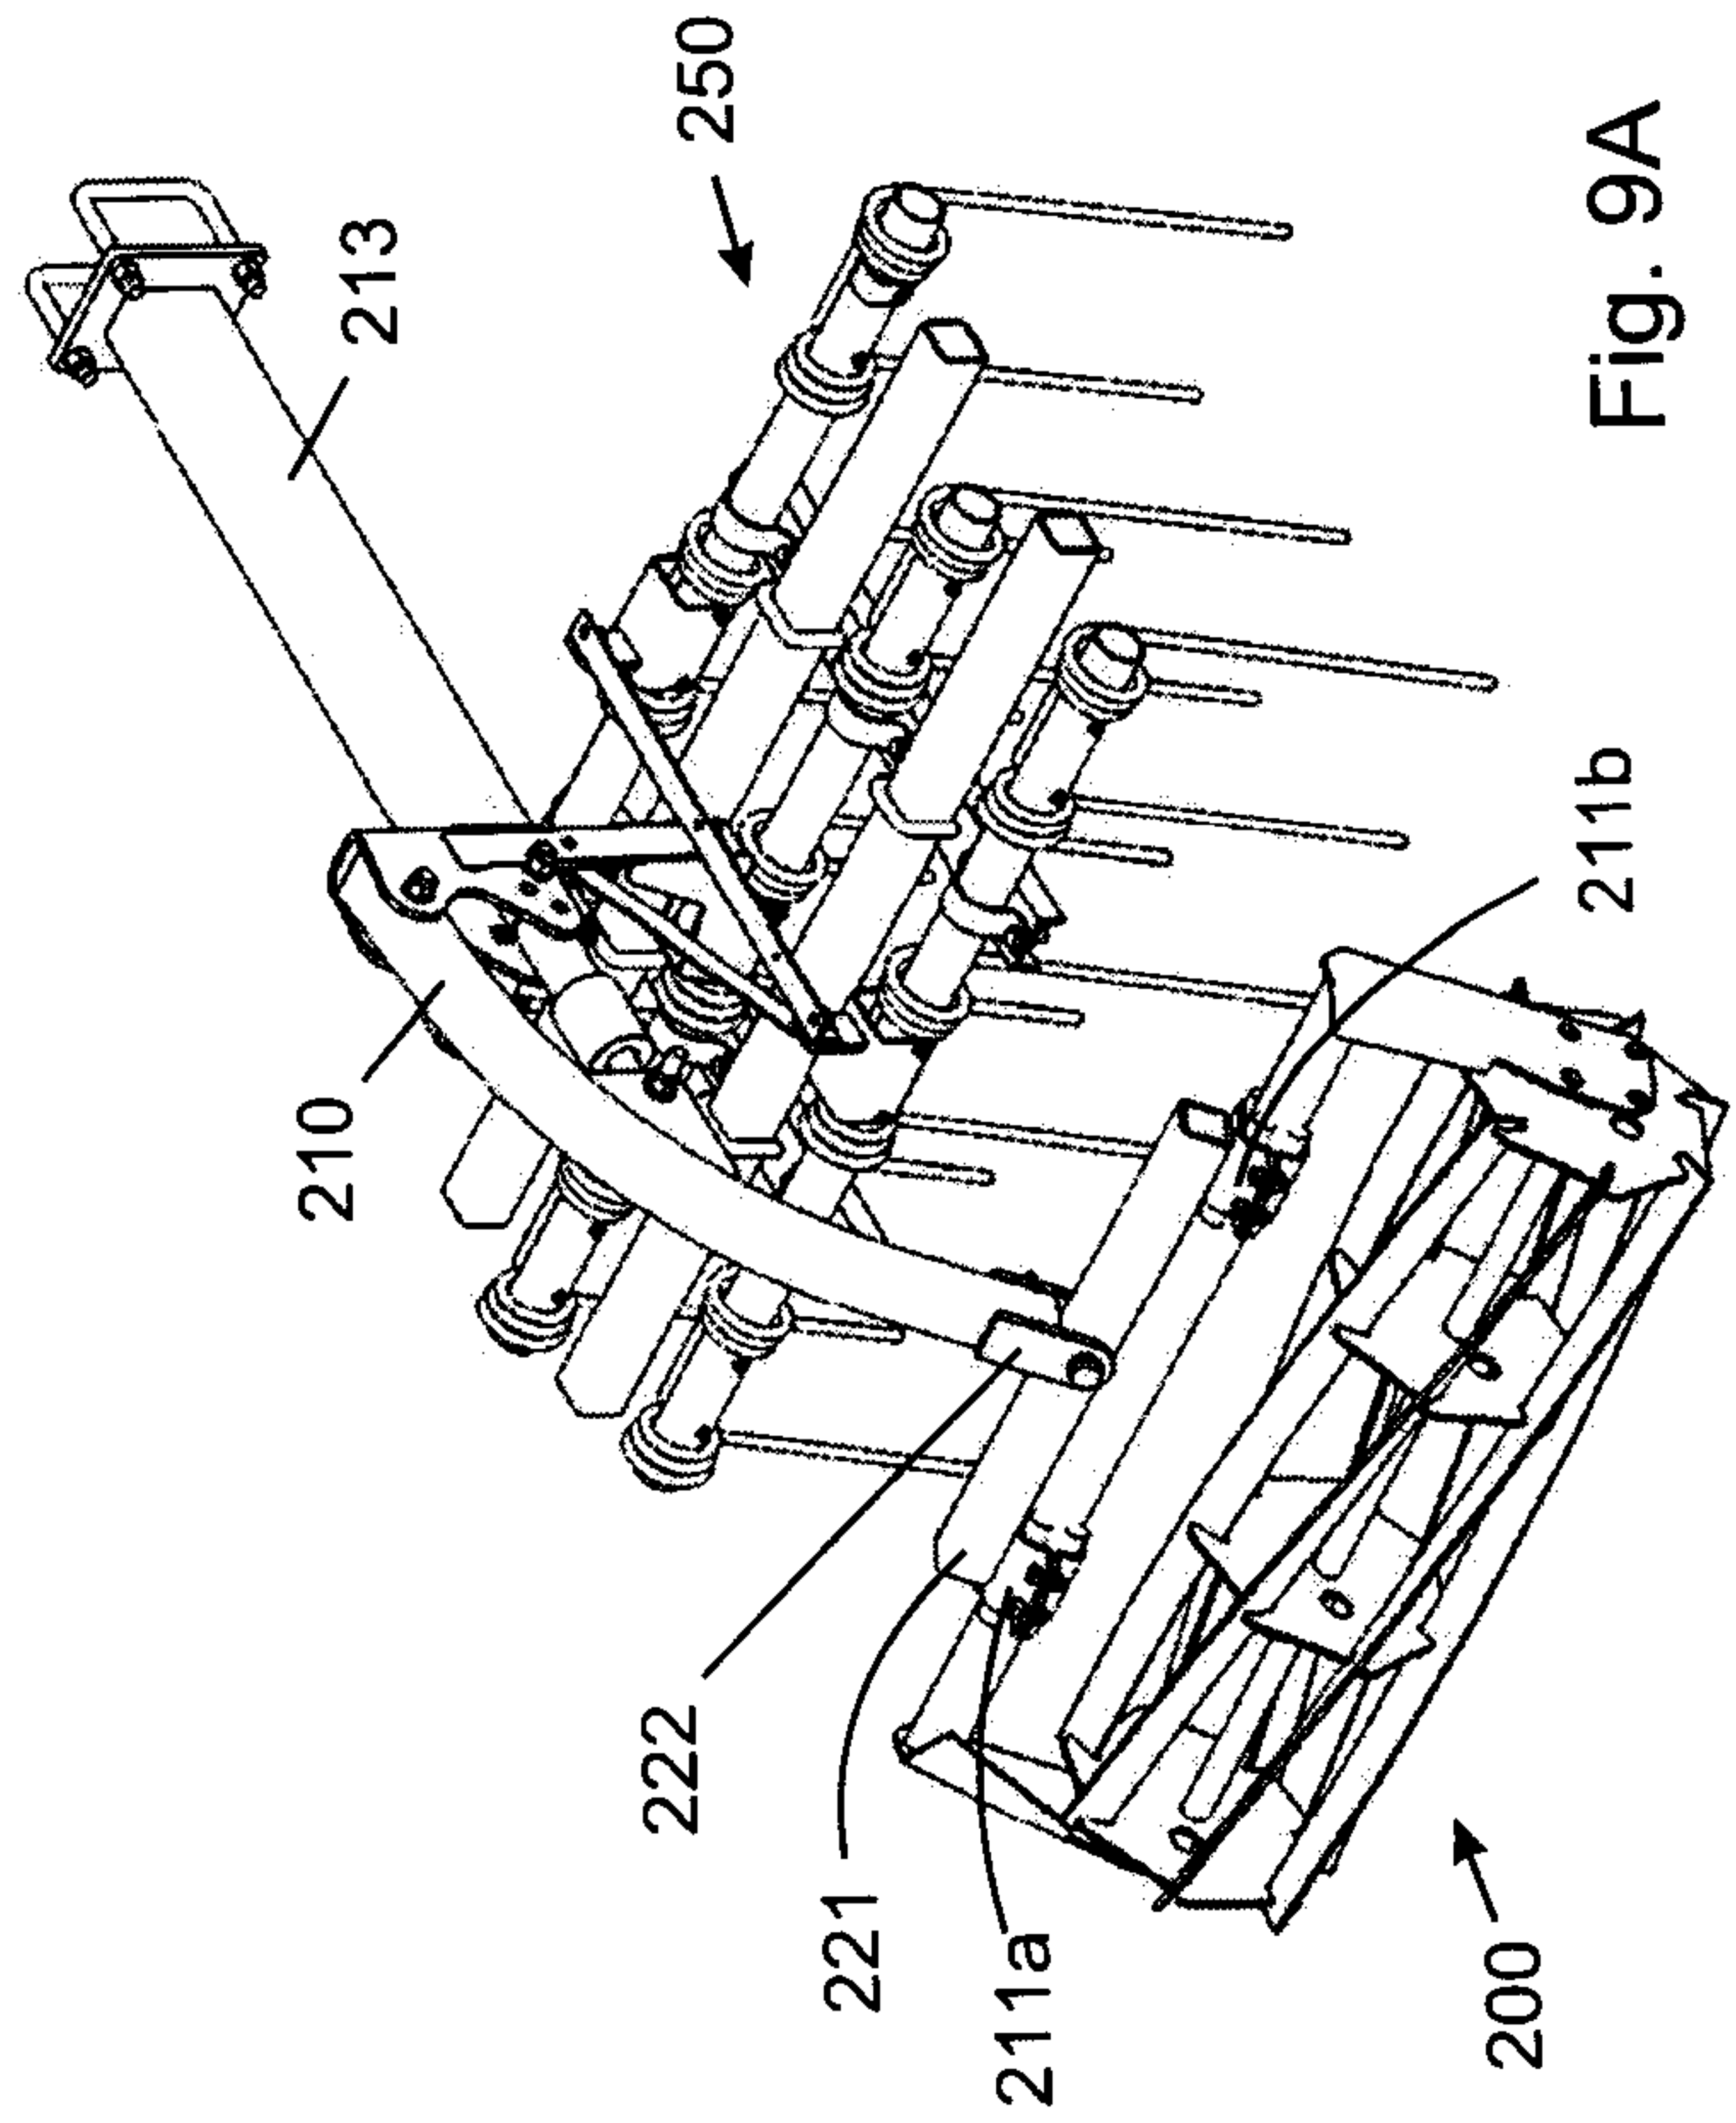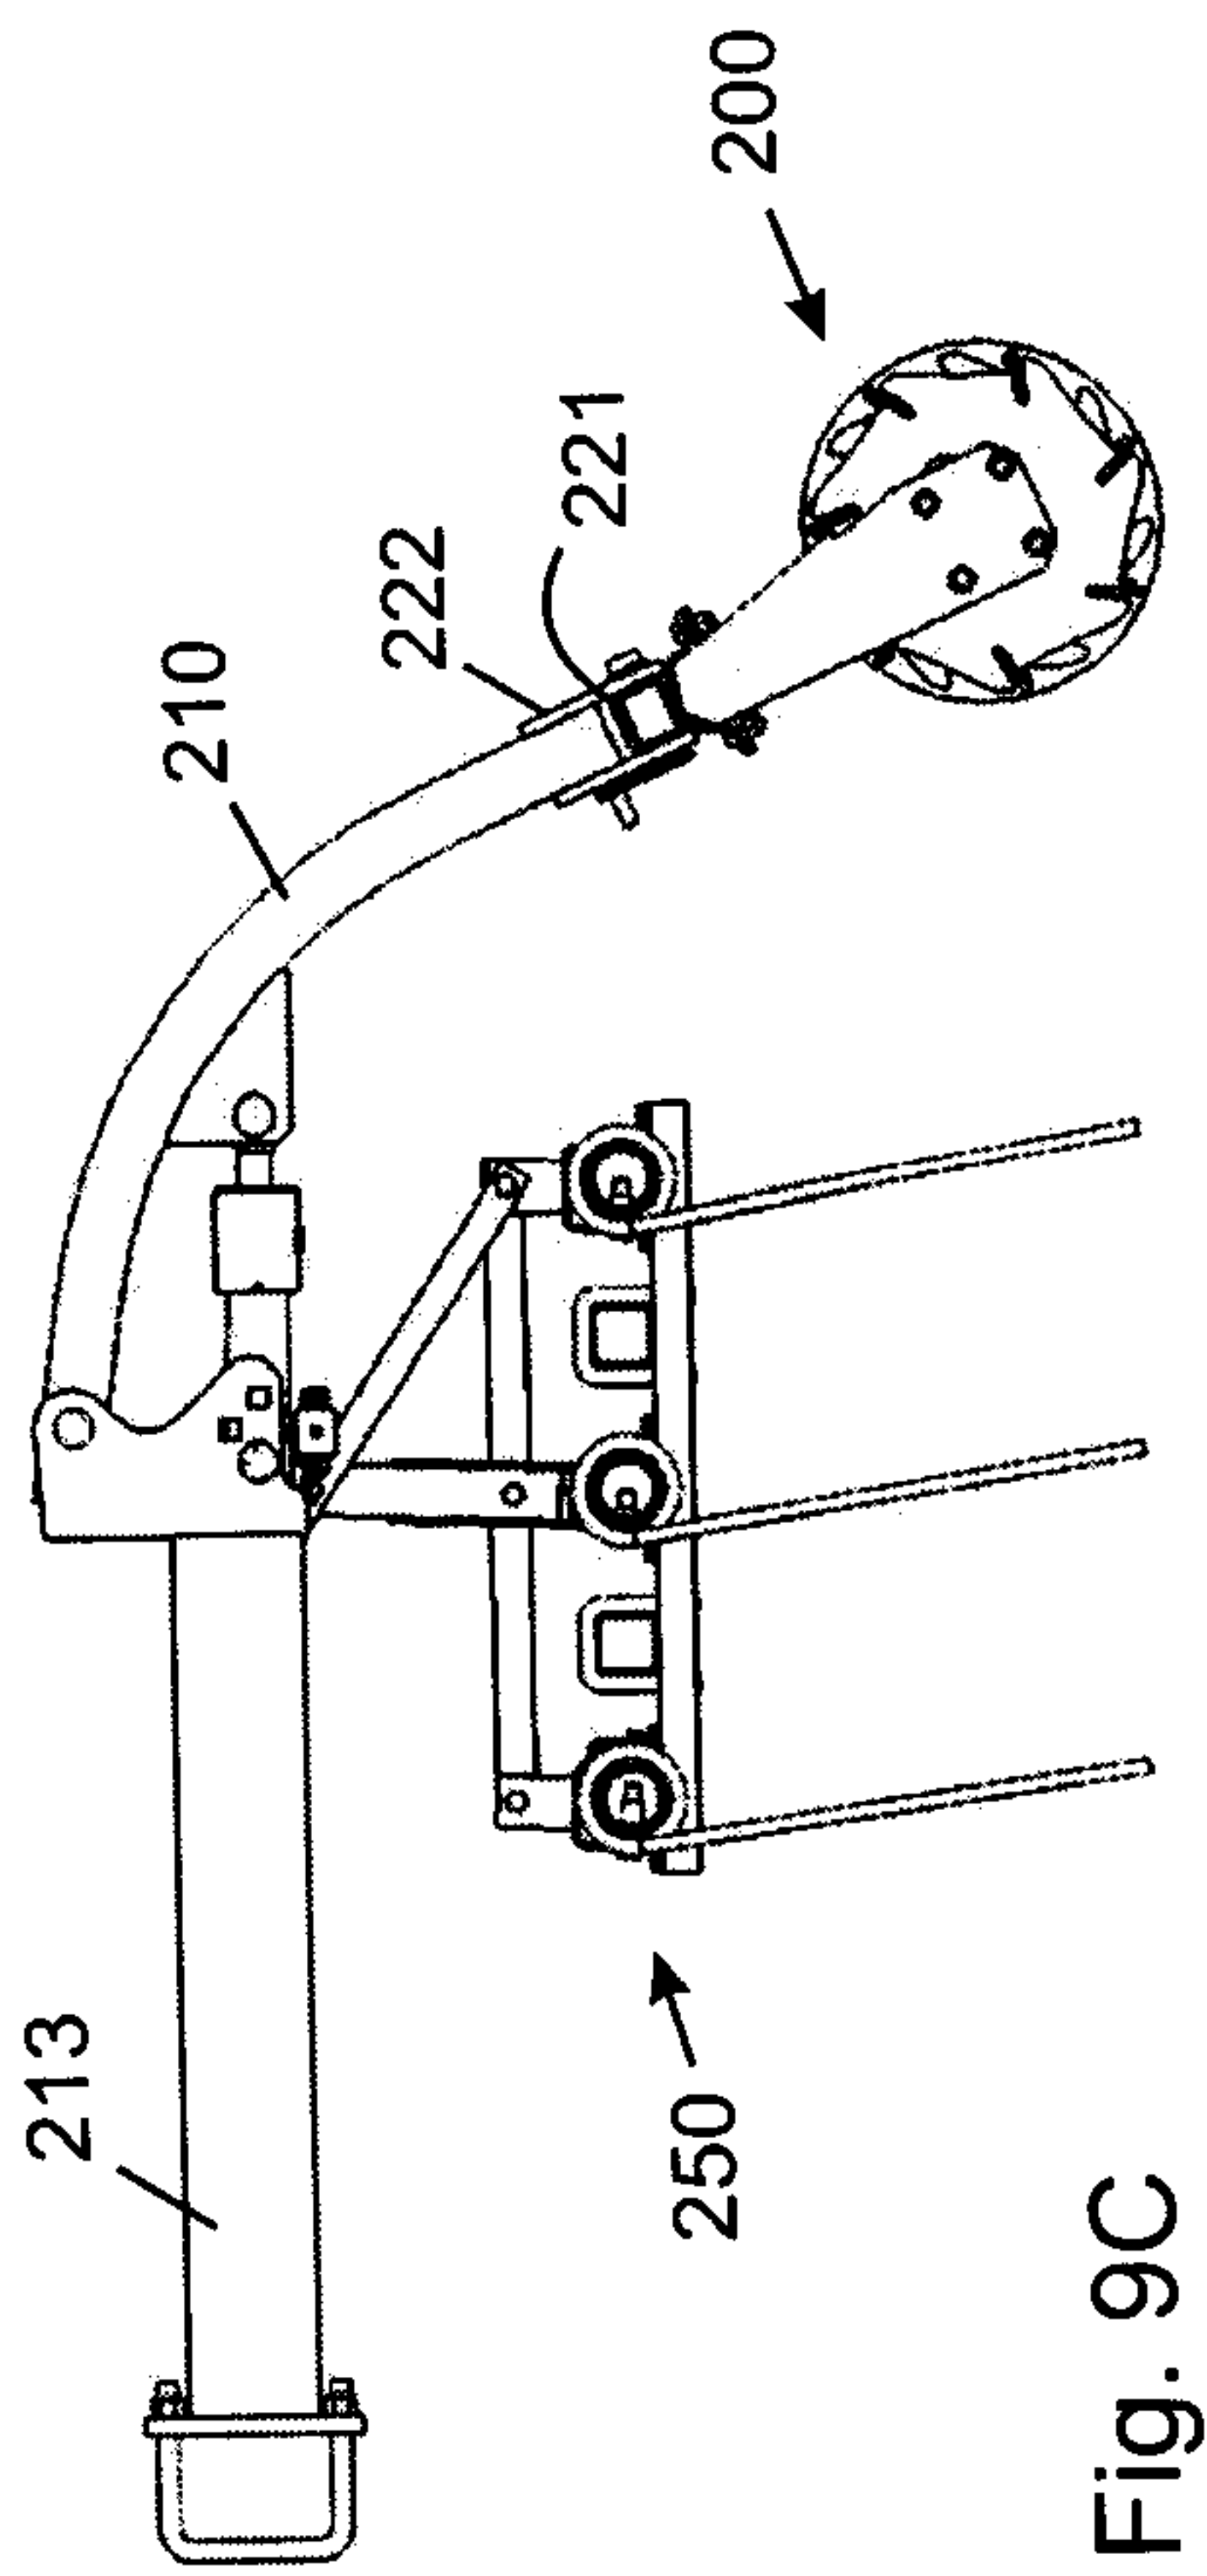

11/26

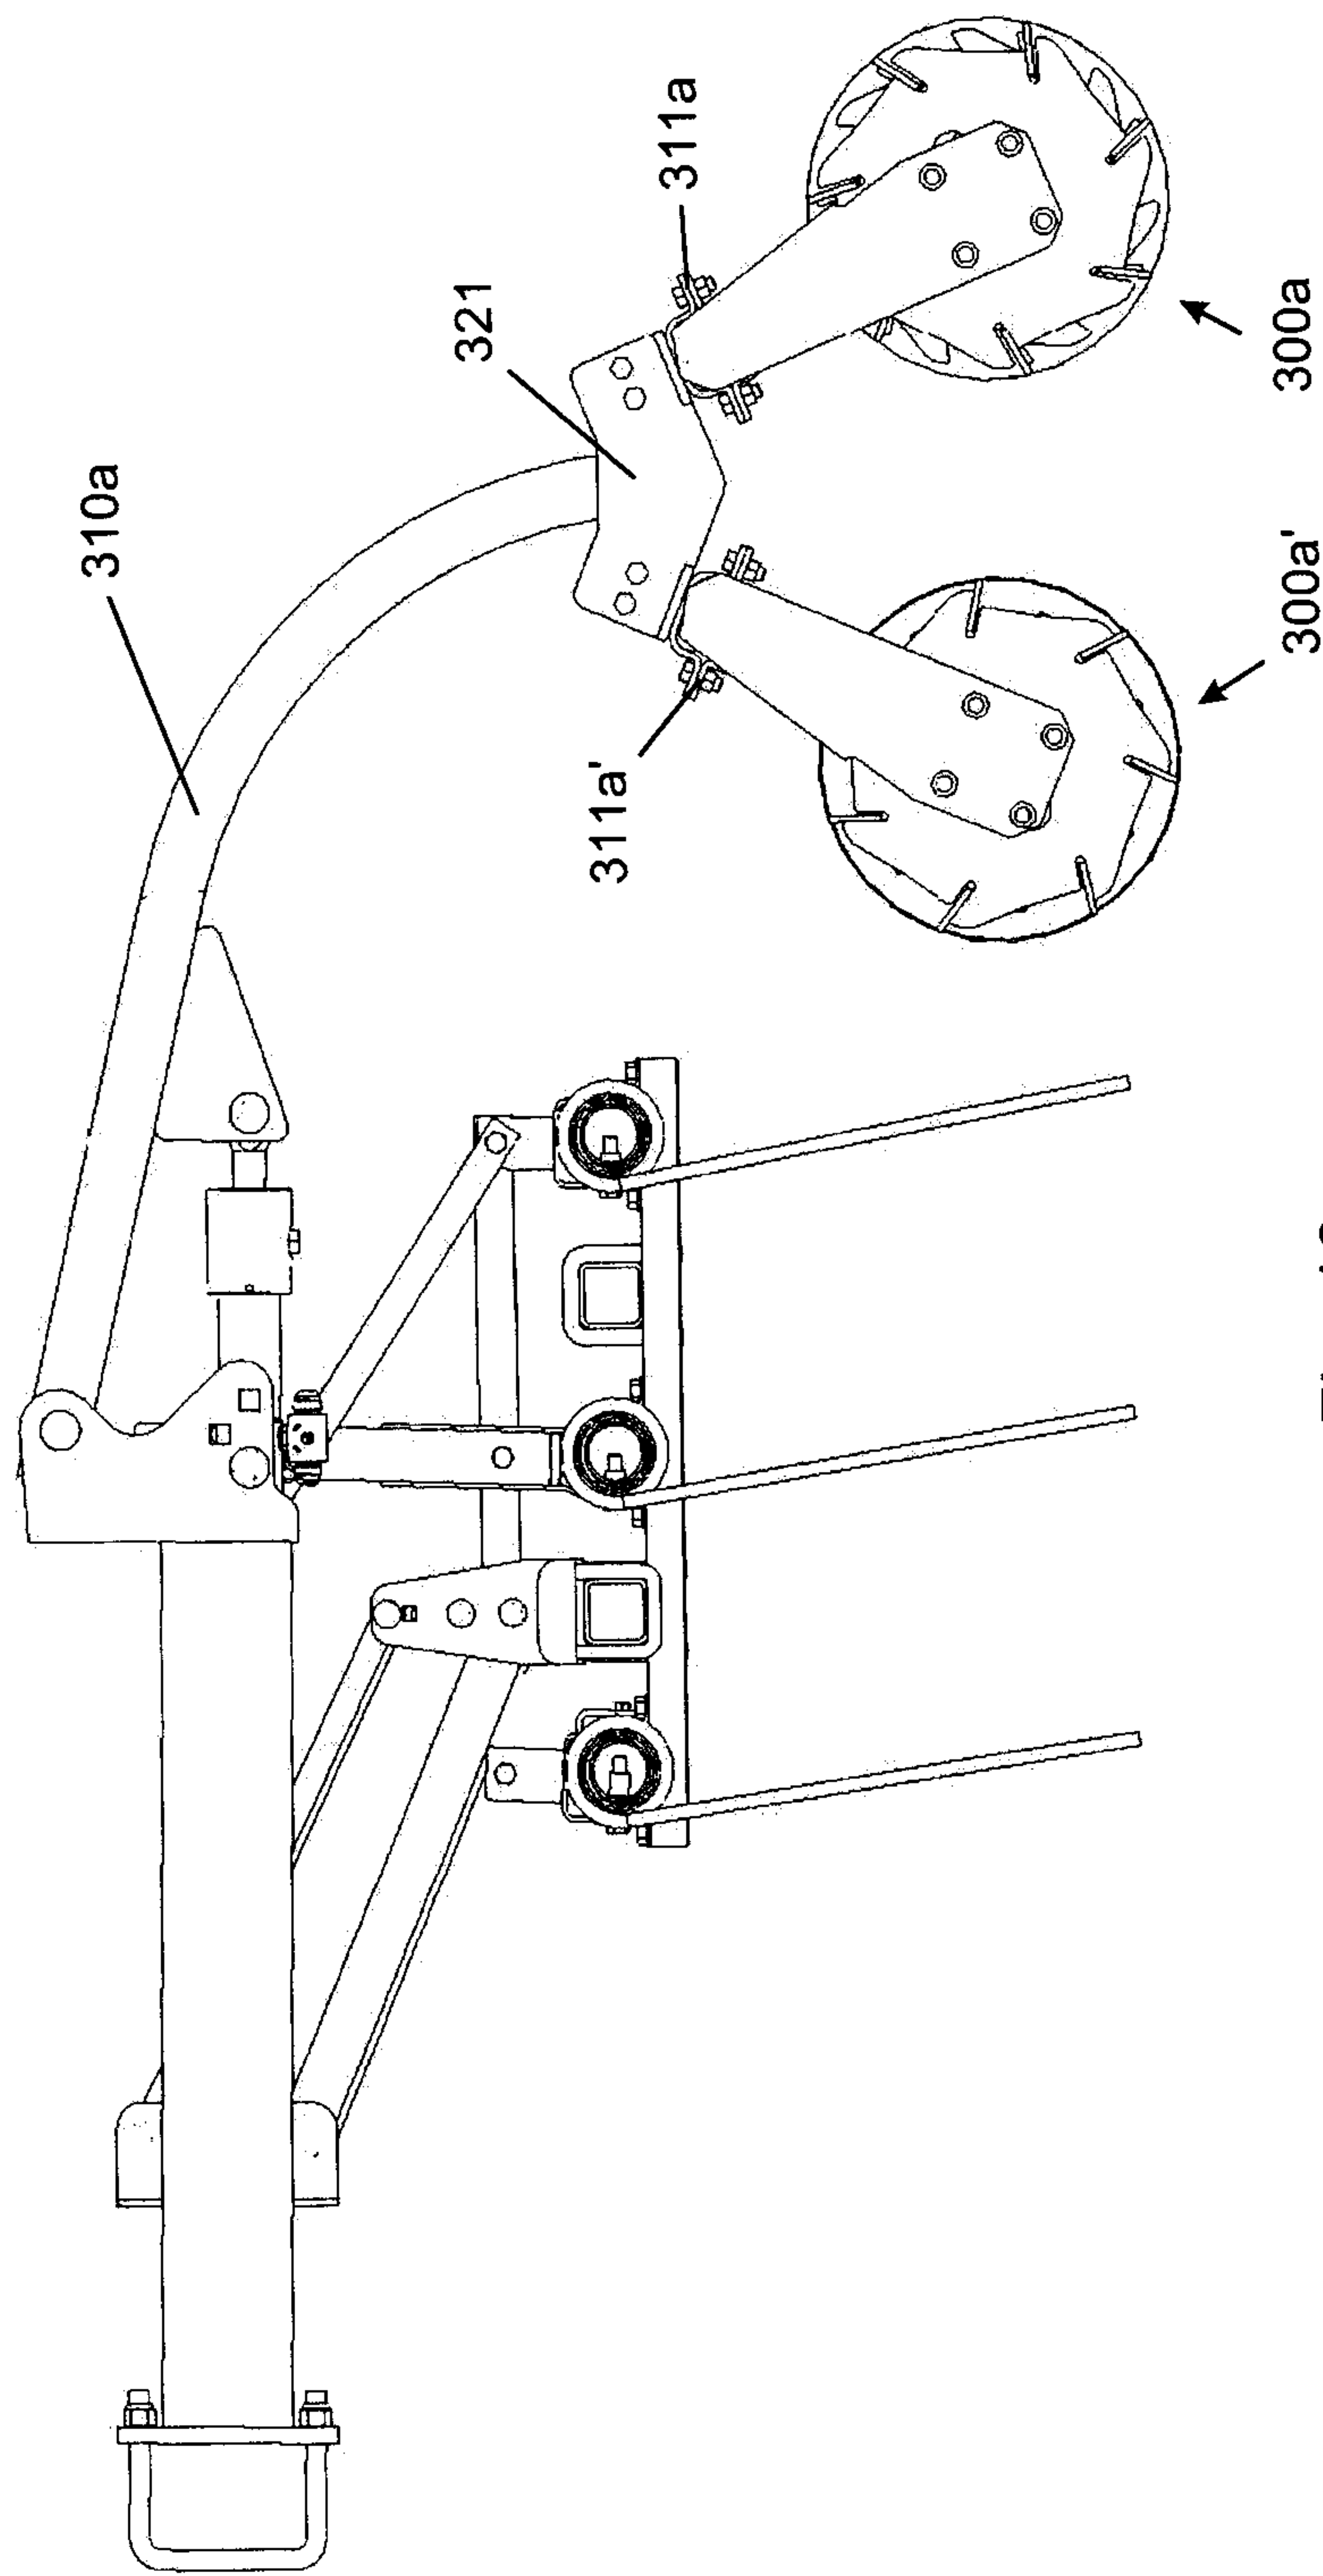


Fig. 10

12/26

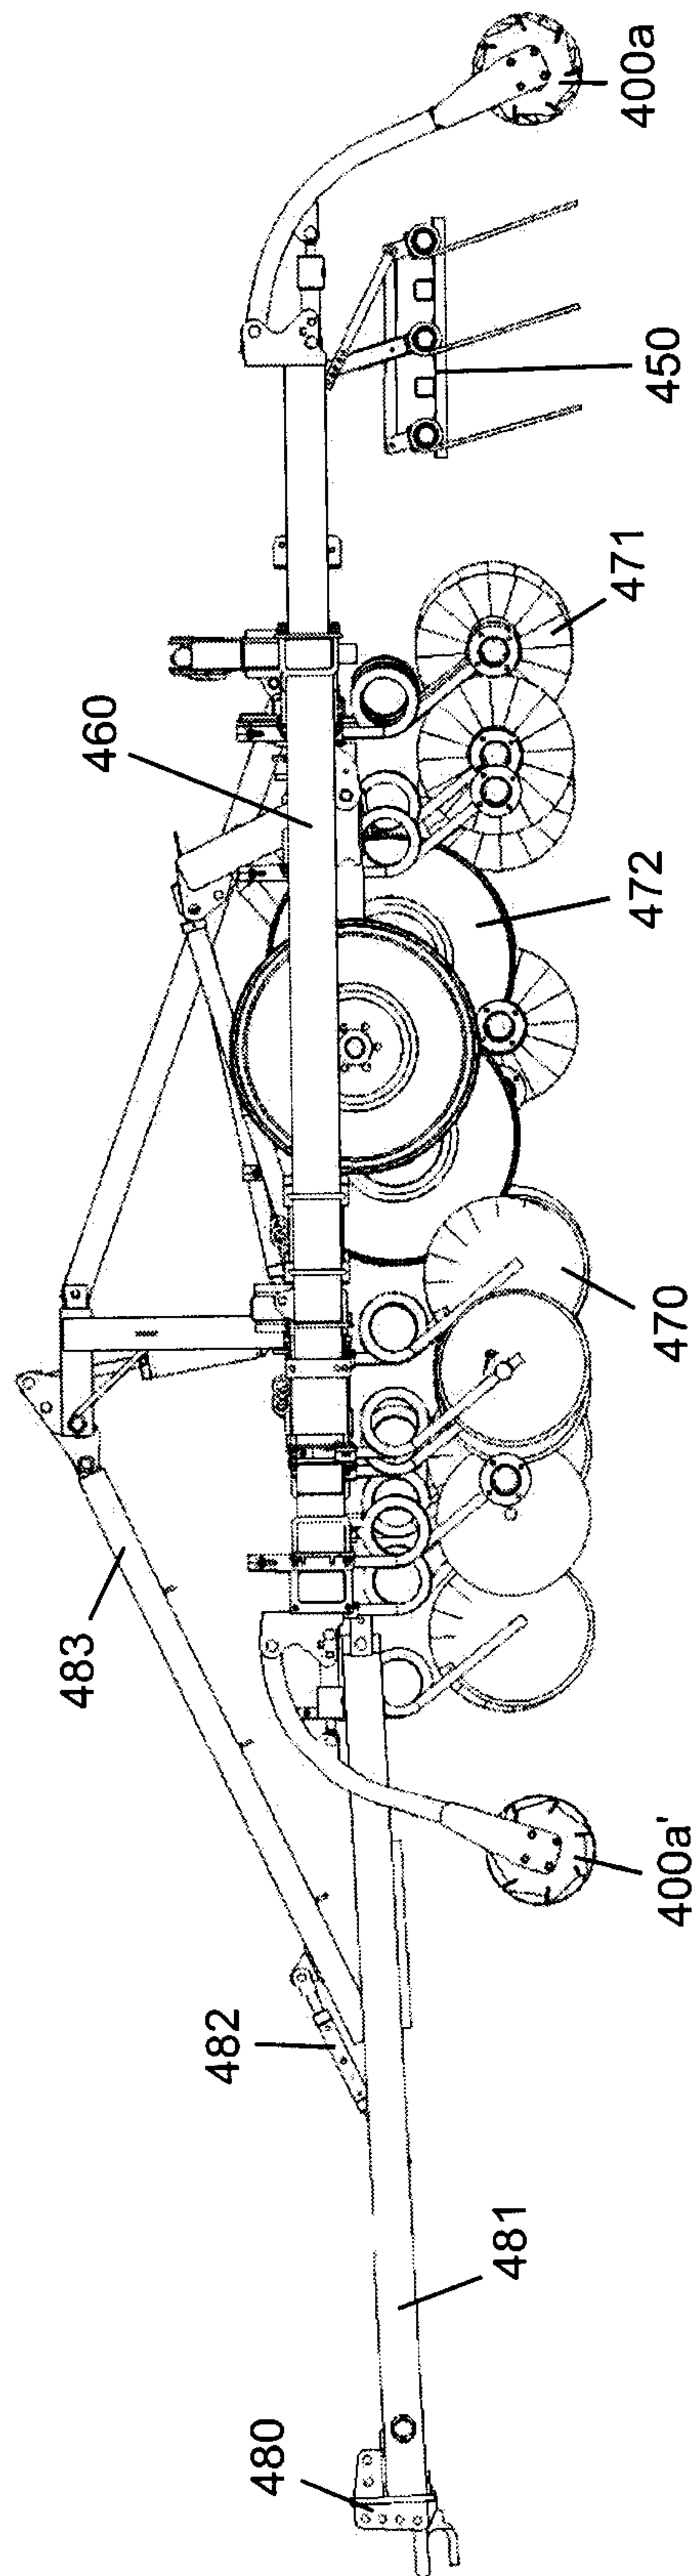


Fig. 11

13/26

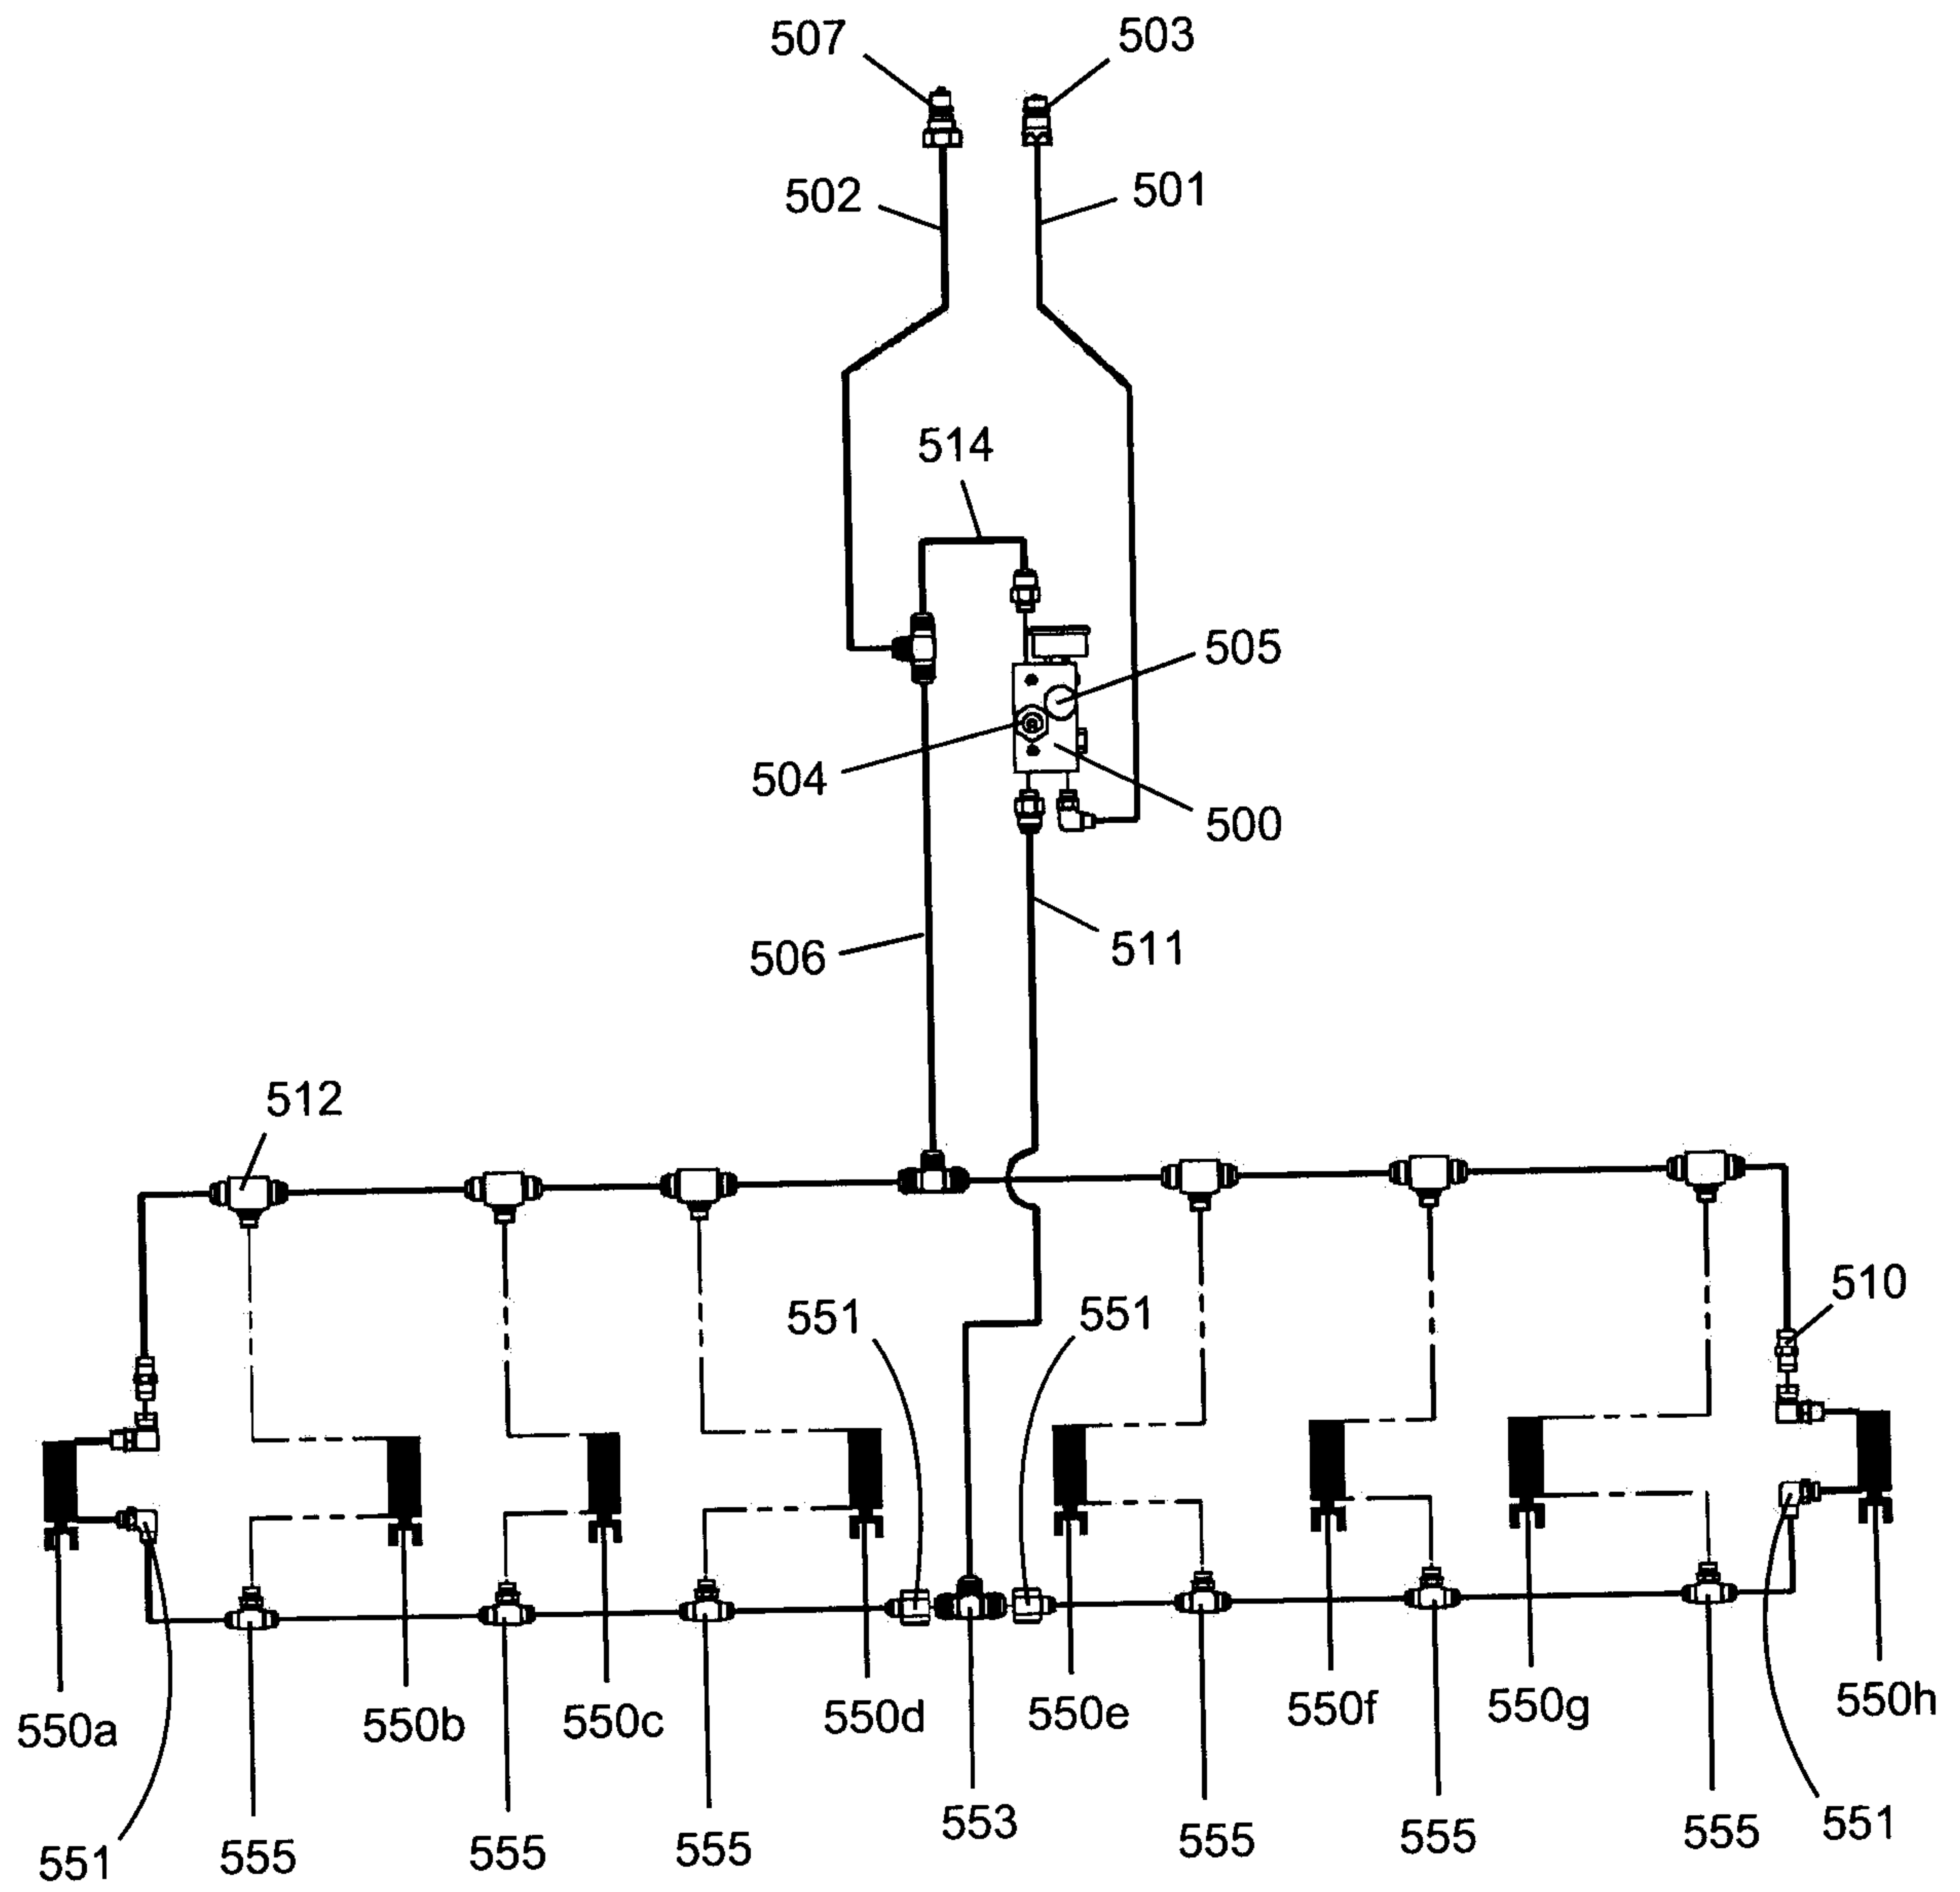


Fig. 12A

14/26

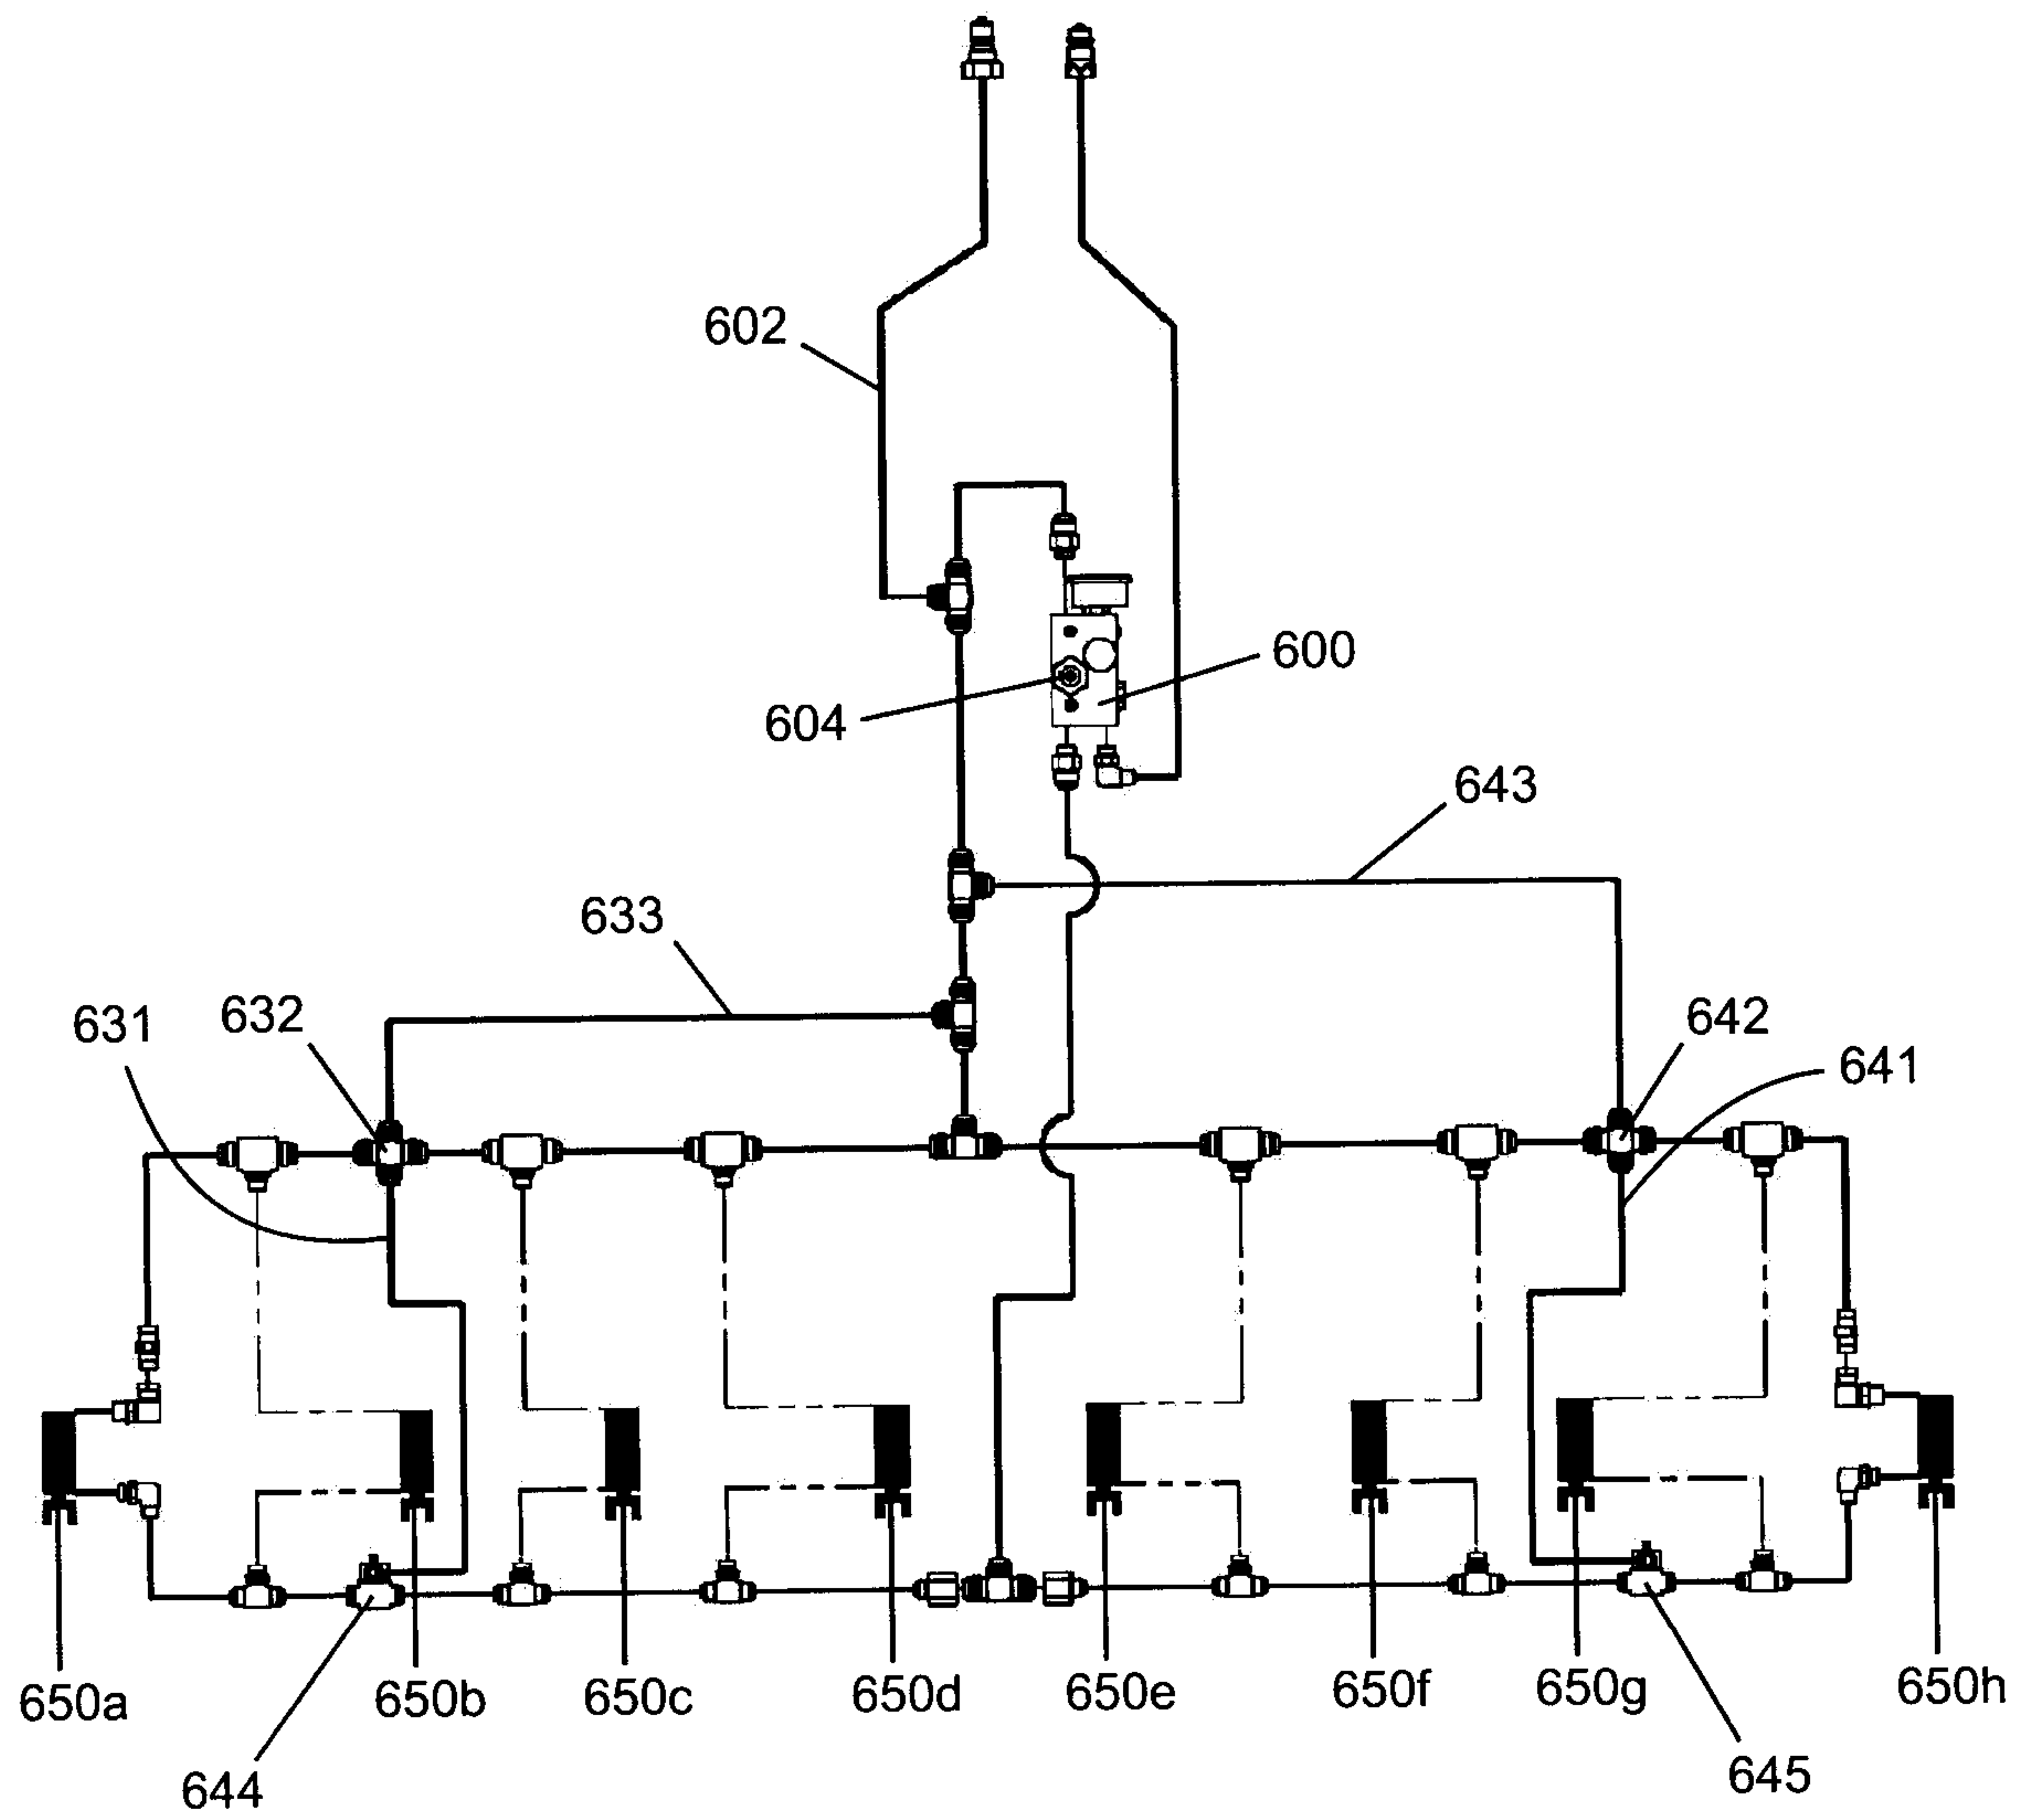


Fig. 12B

15/26

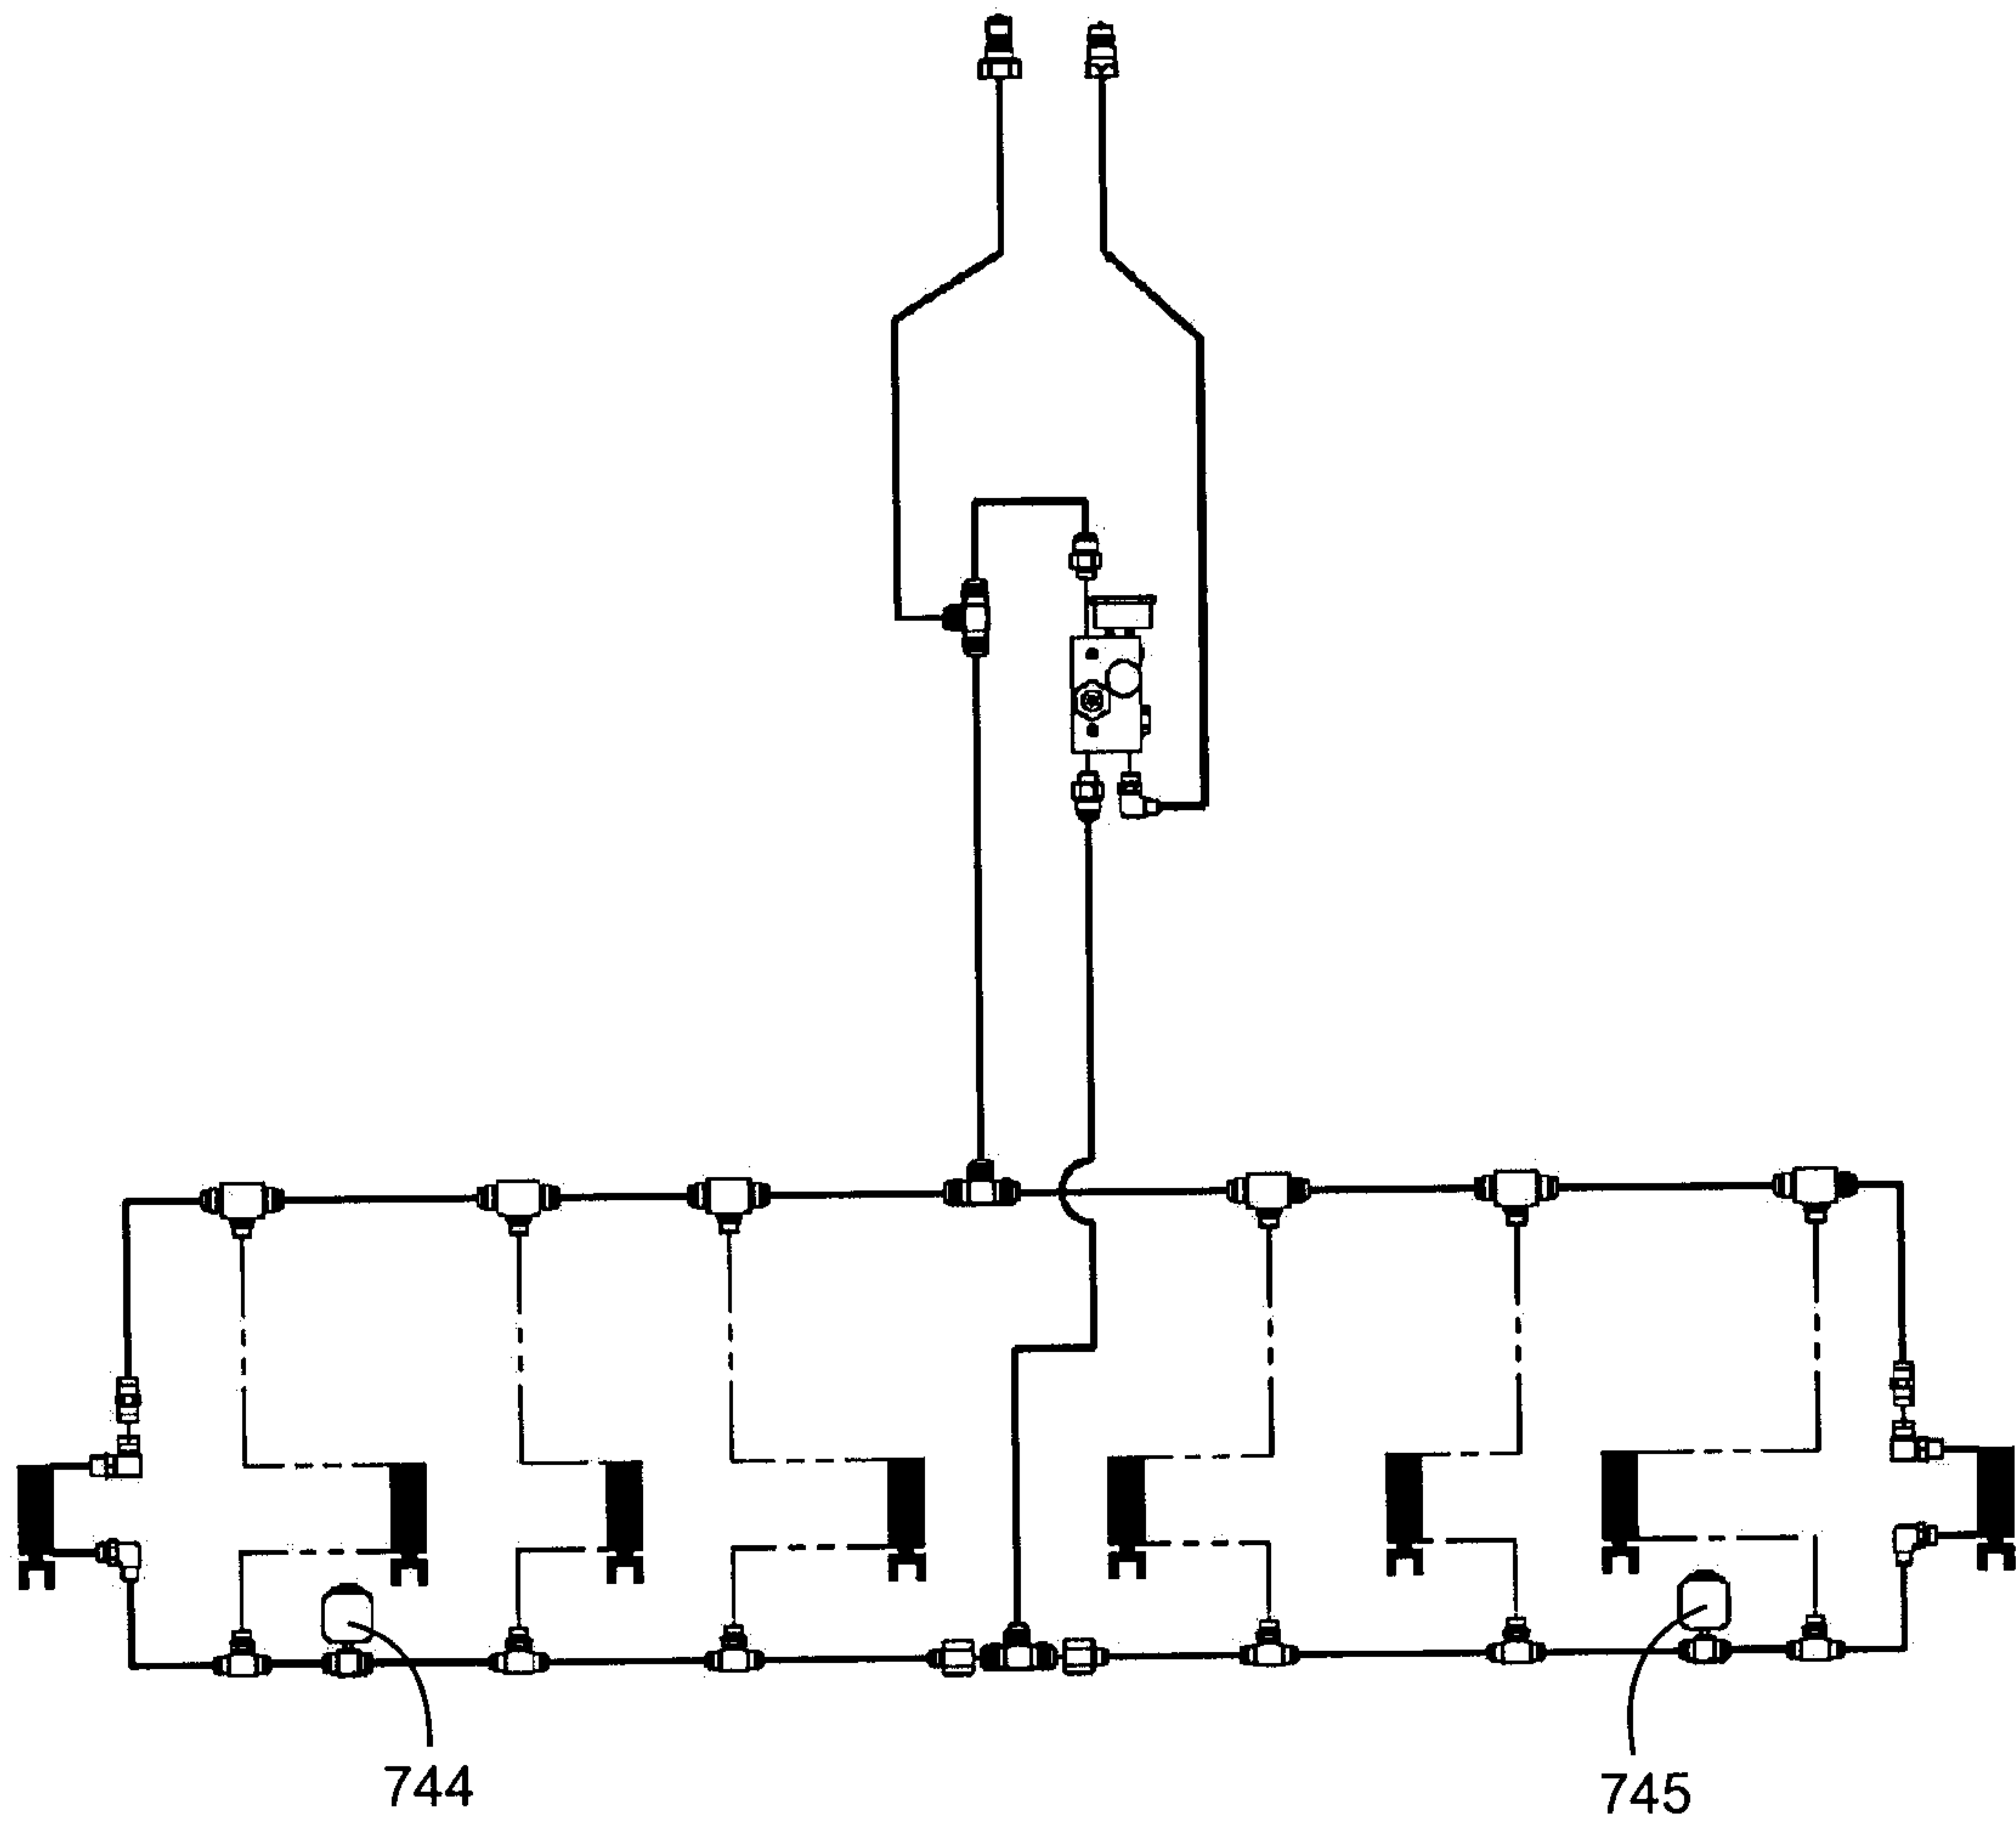


Fig. 12C

18/26

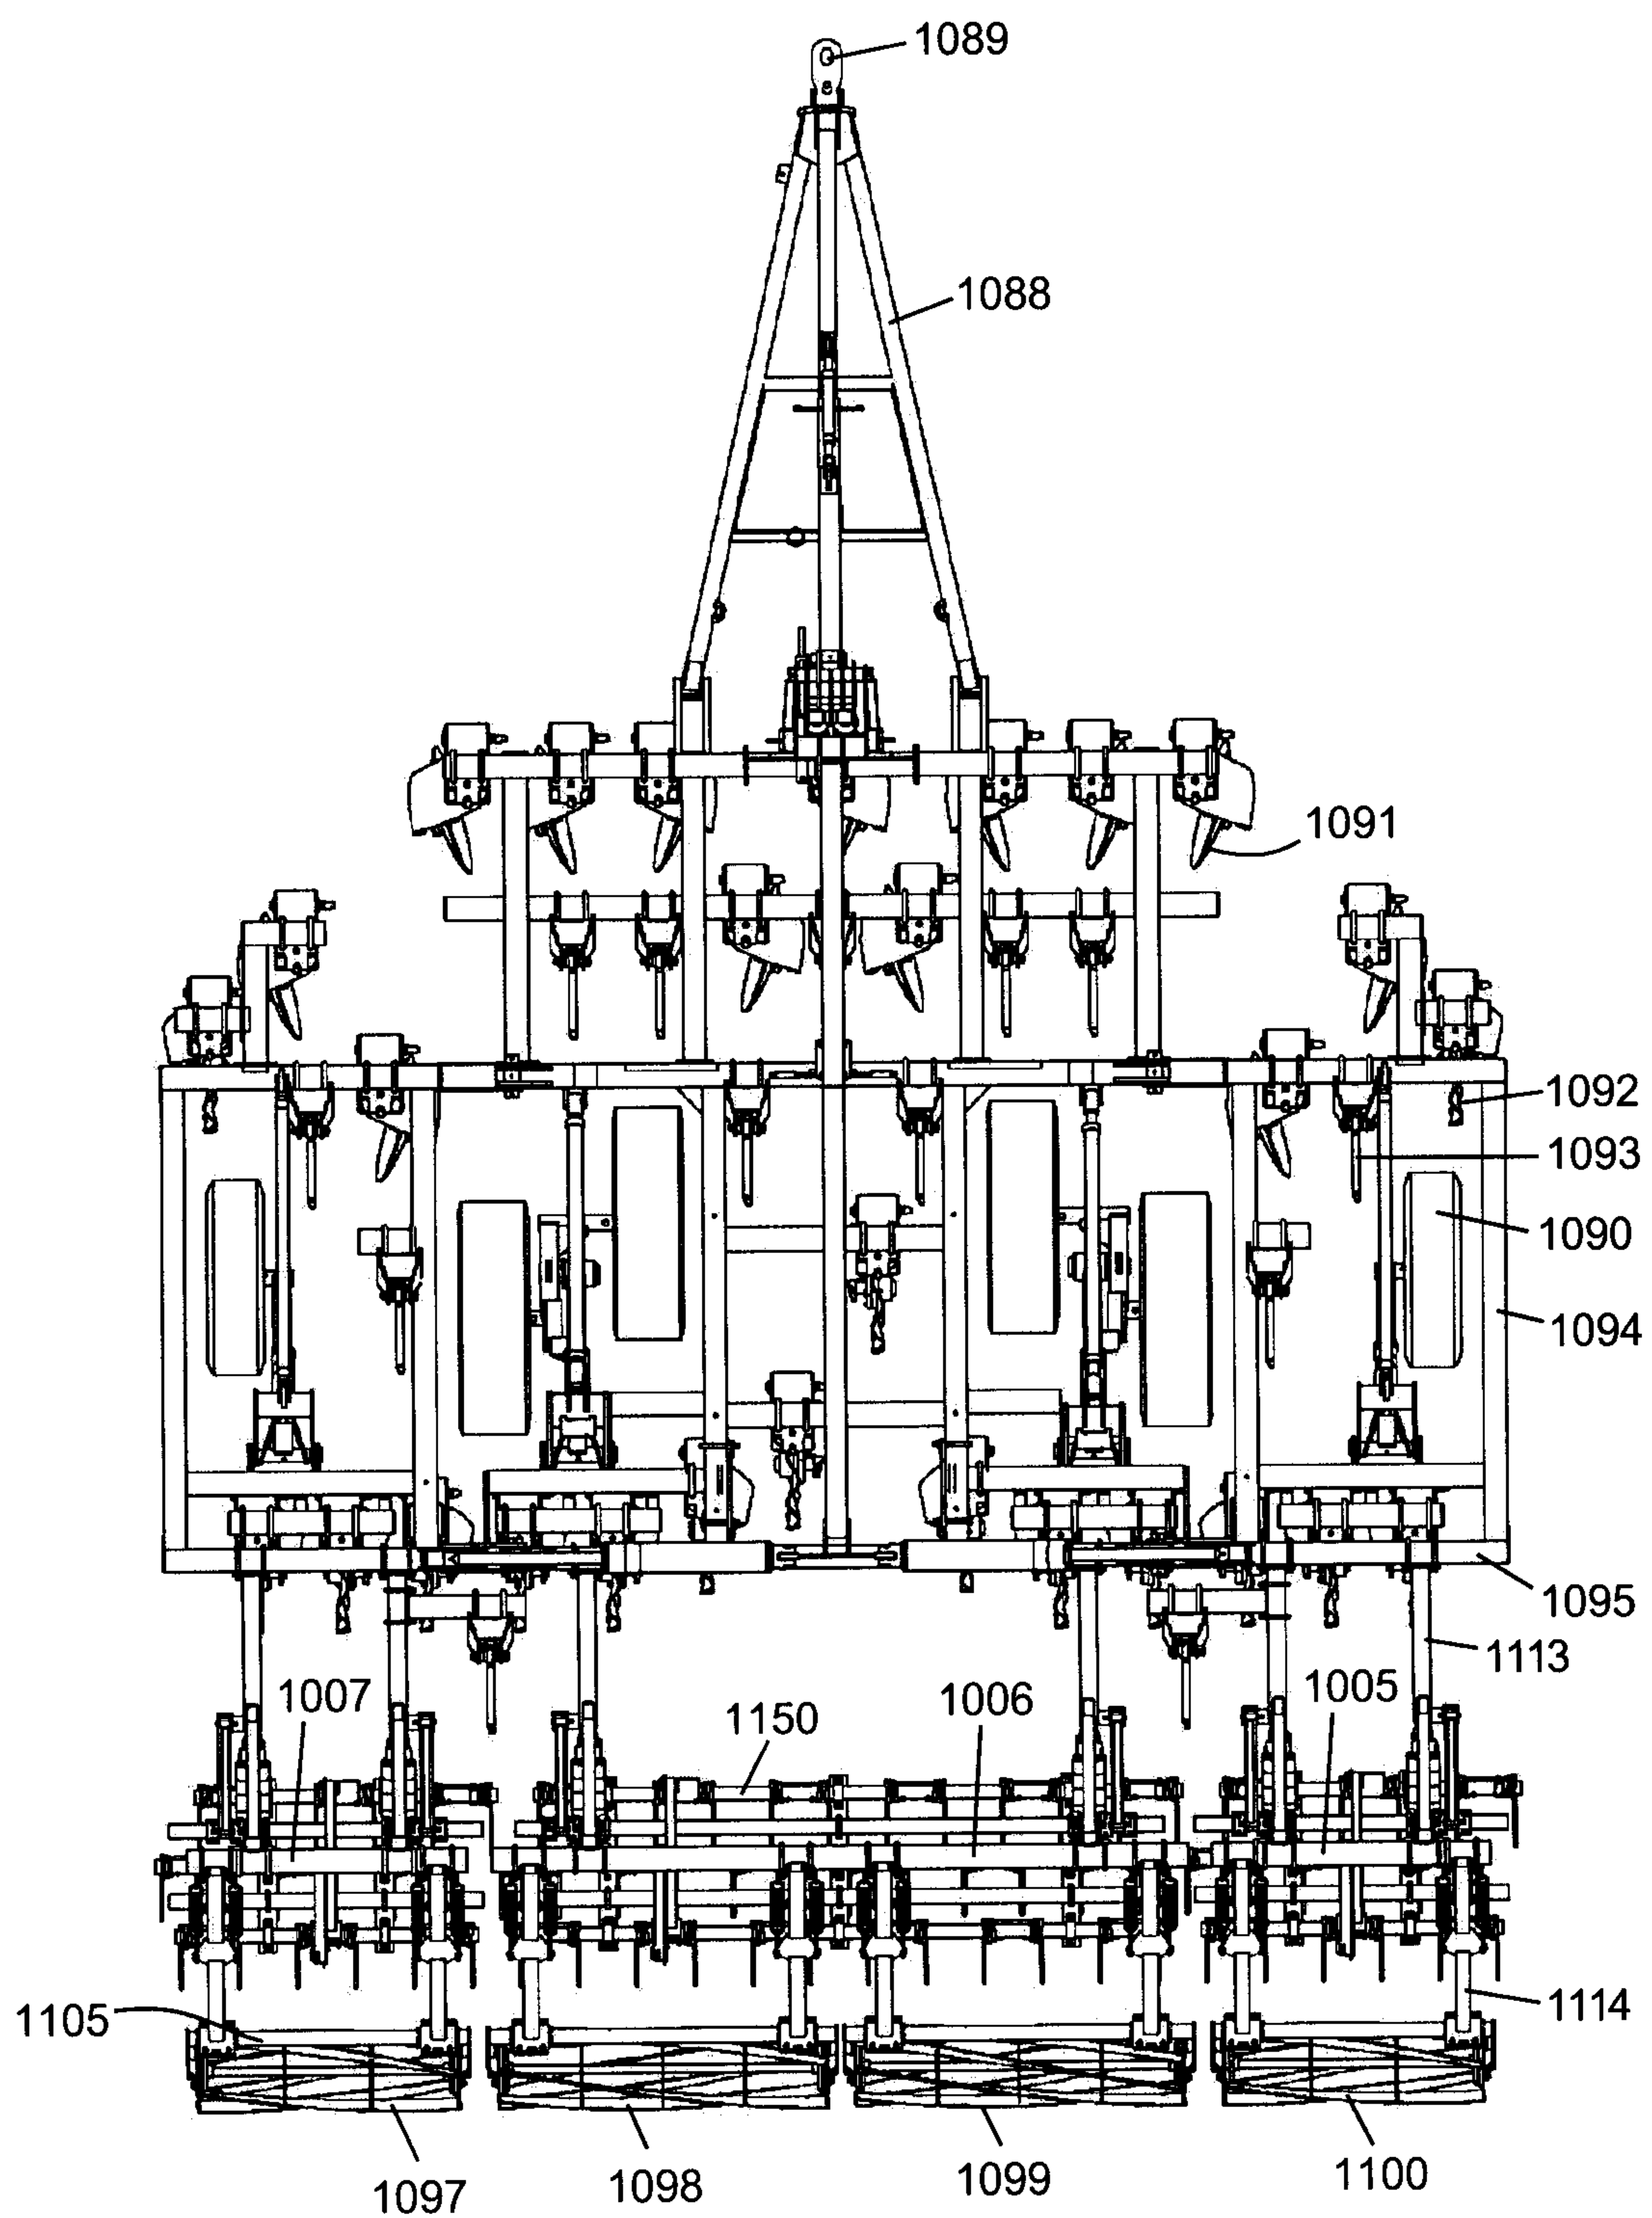


Fig. 14

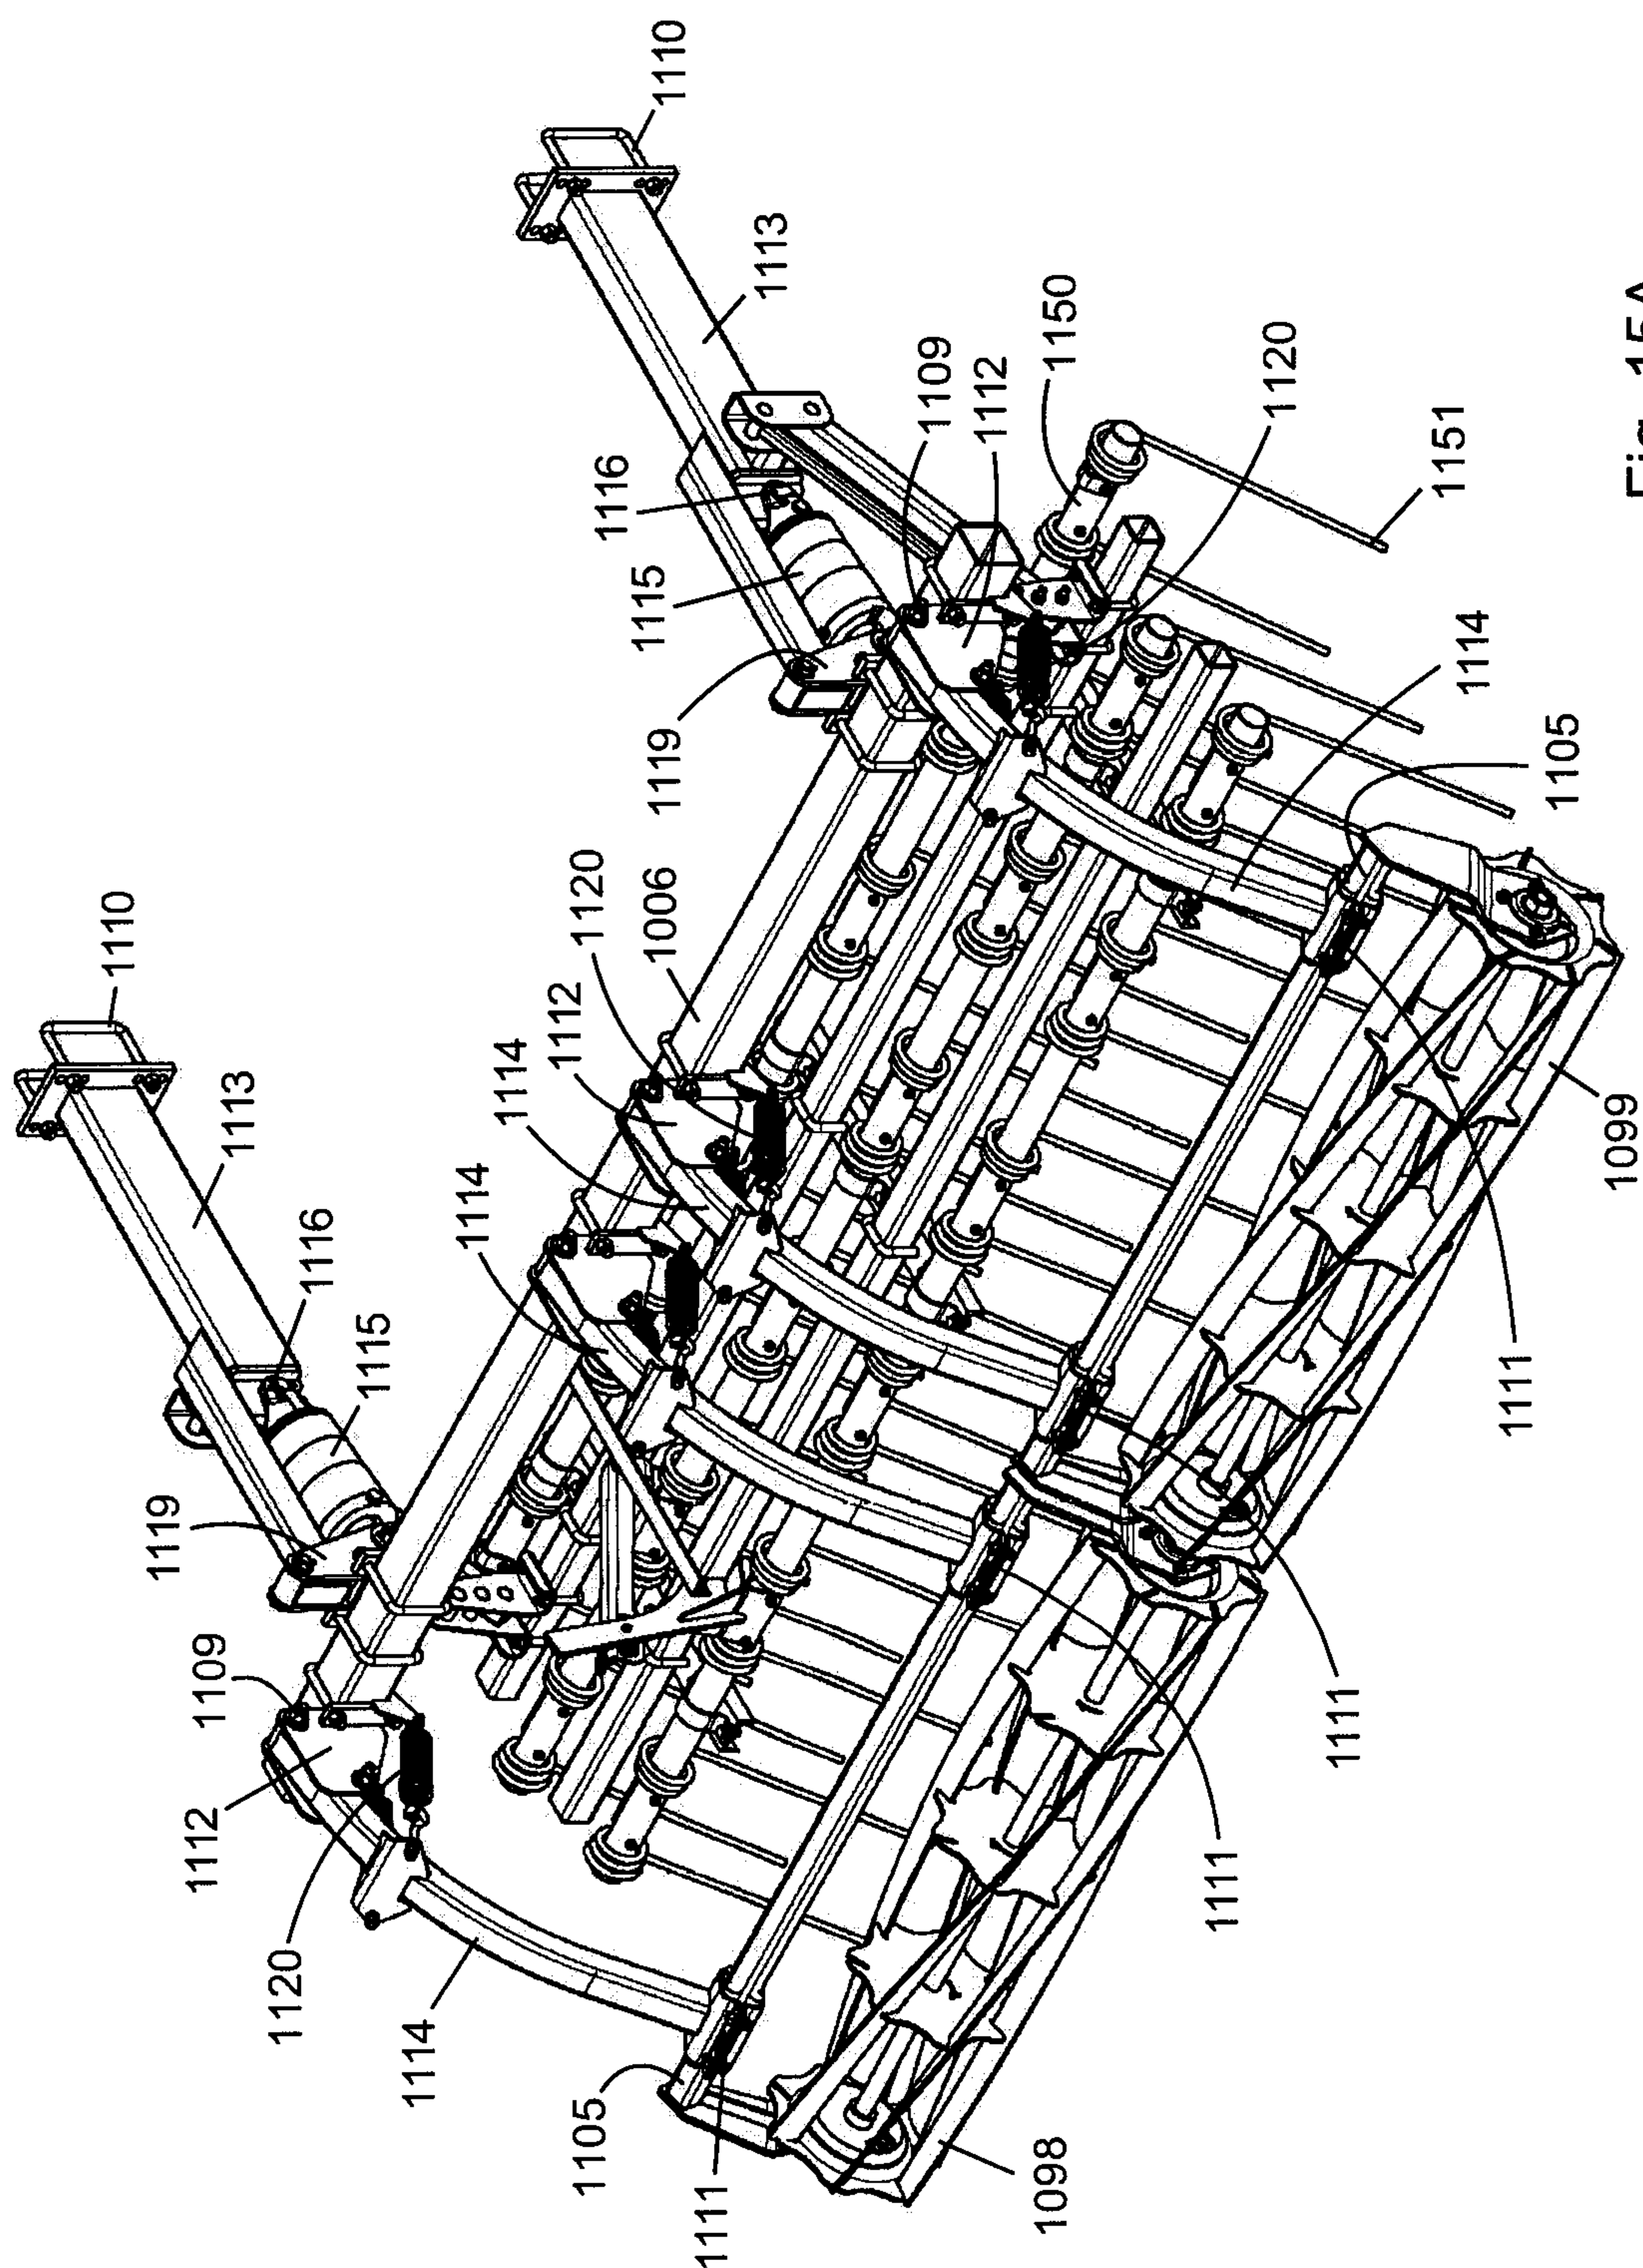


Fig. 15A

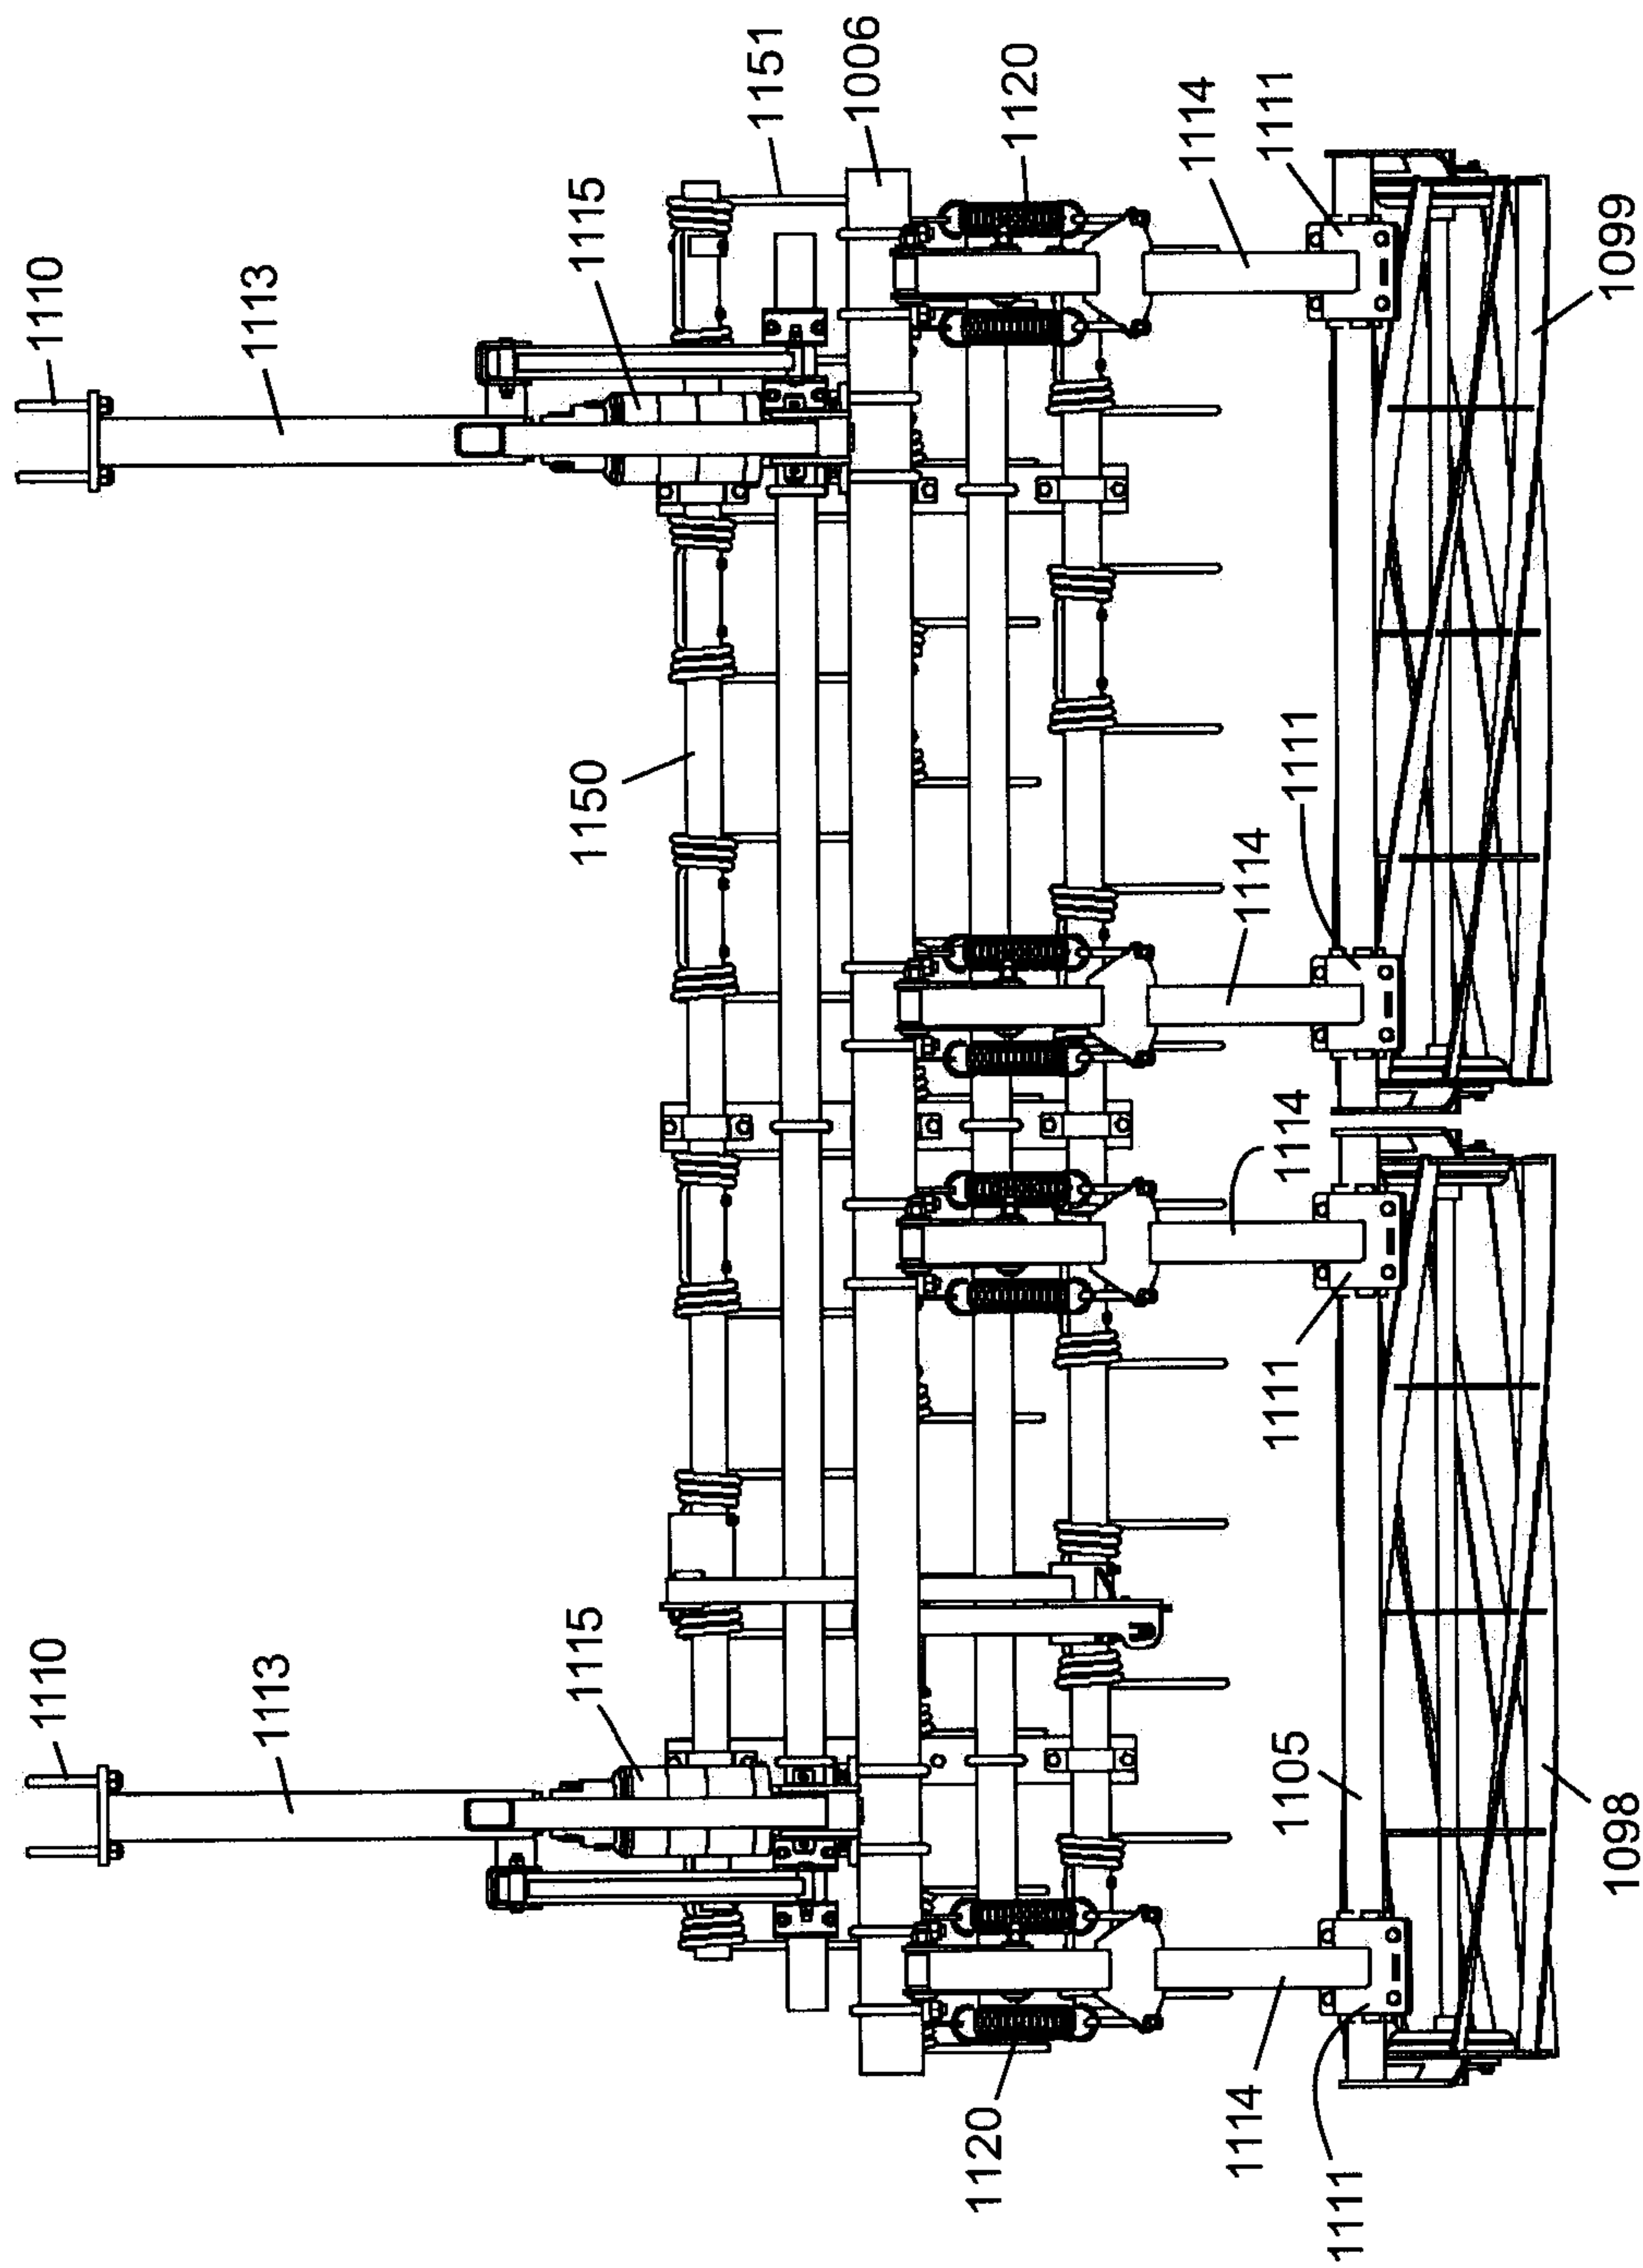


Fig. 15B

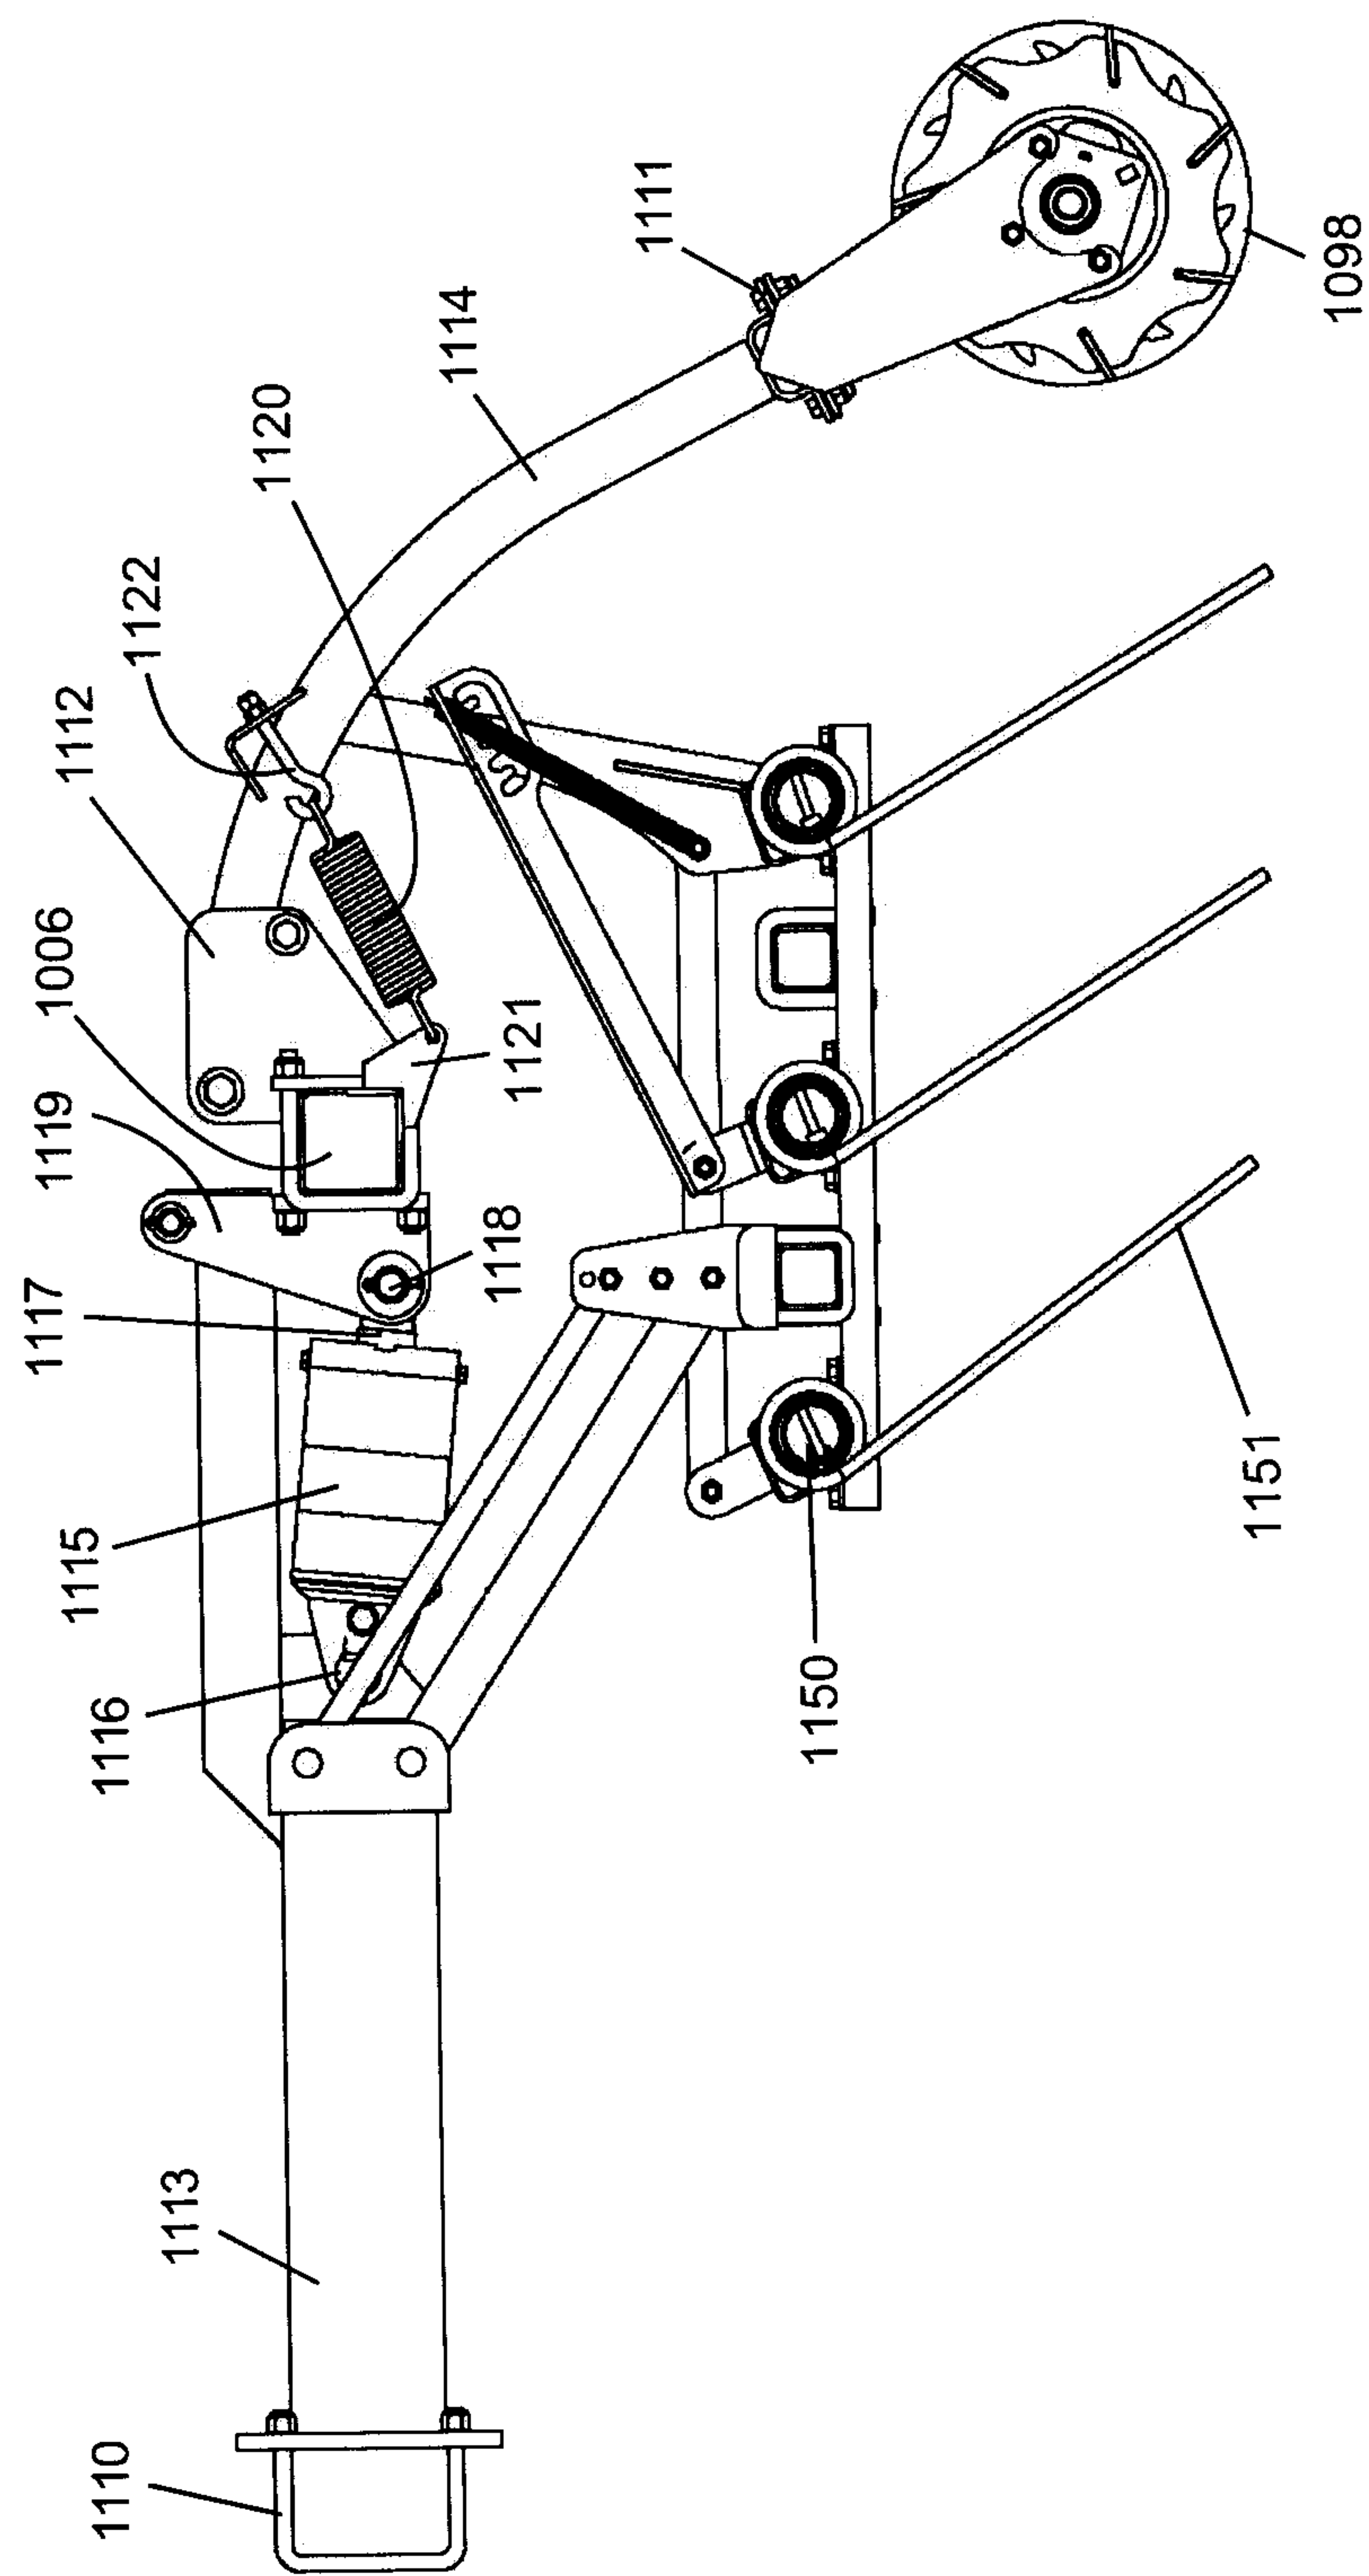


Fig. 15C

22/26

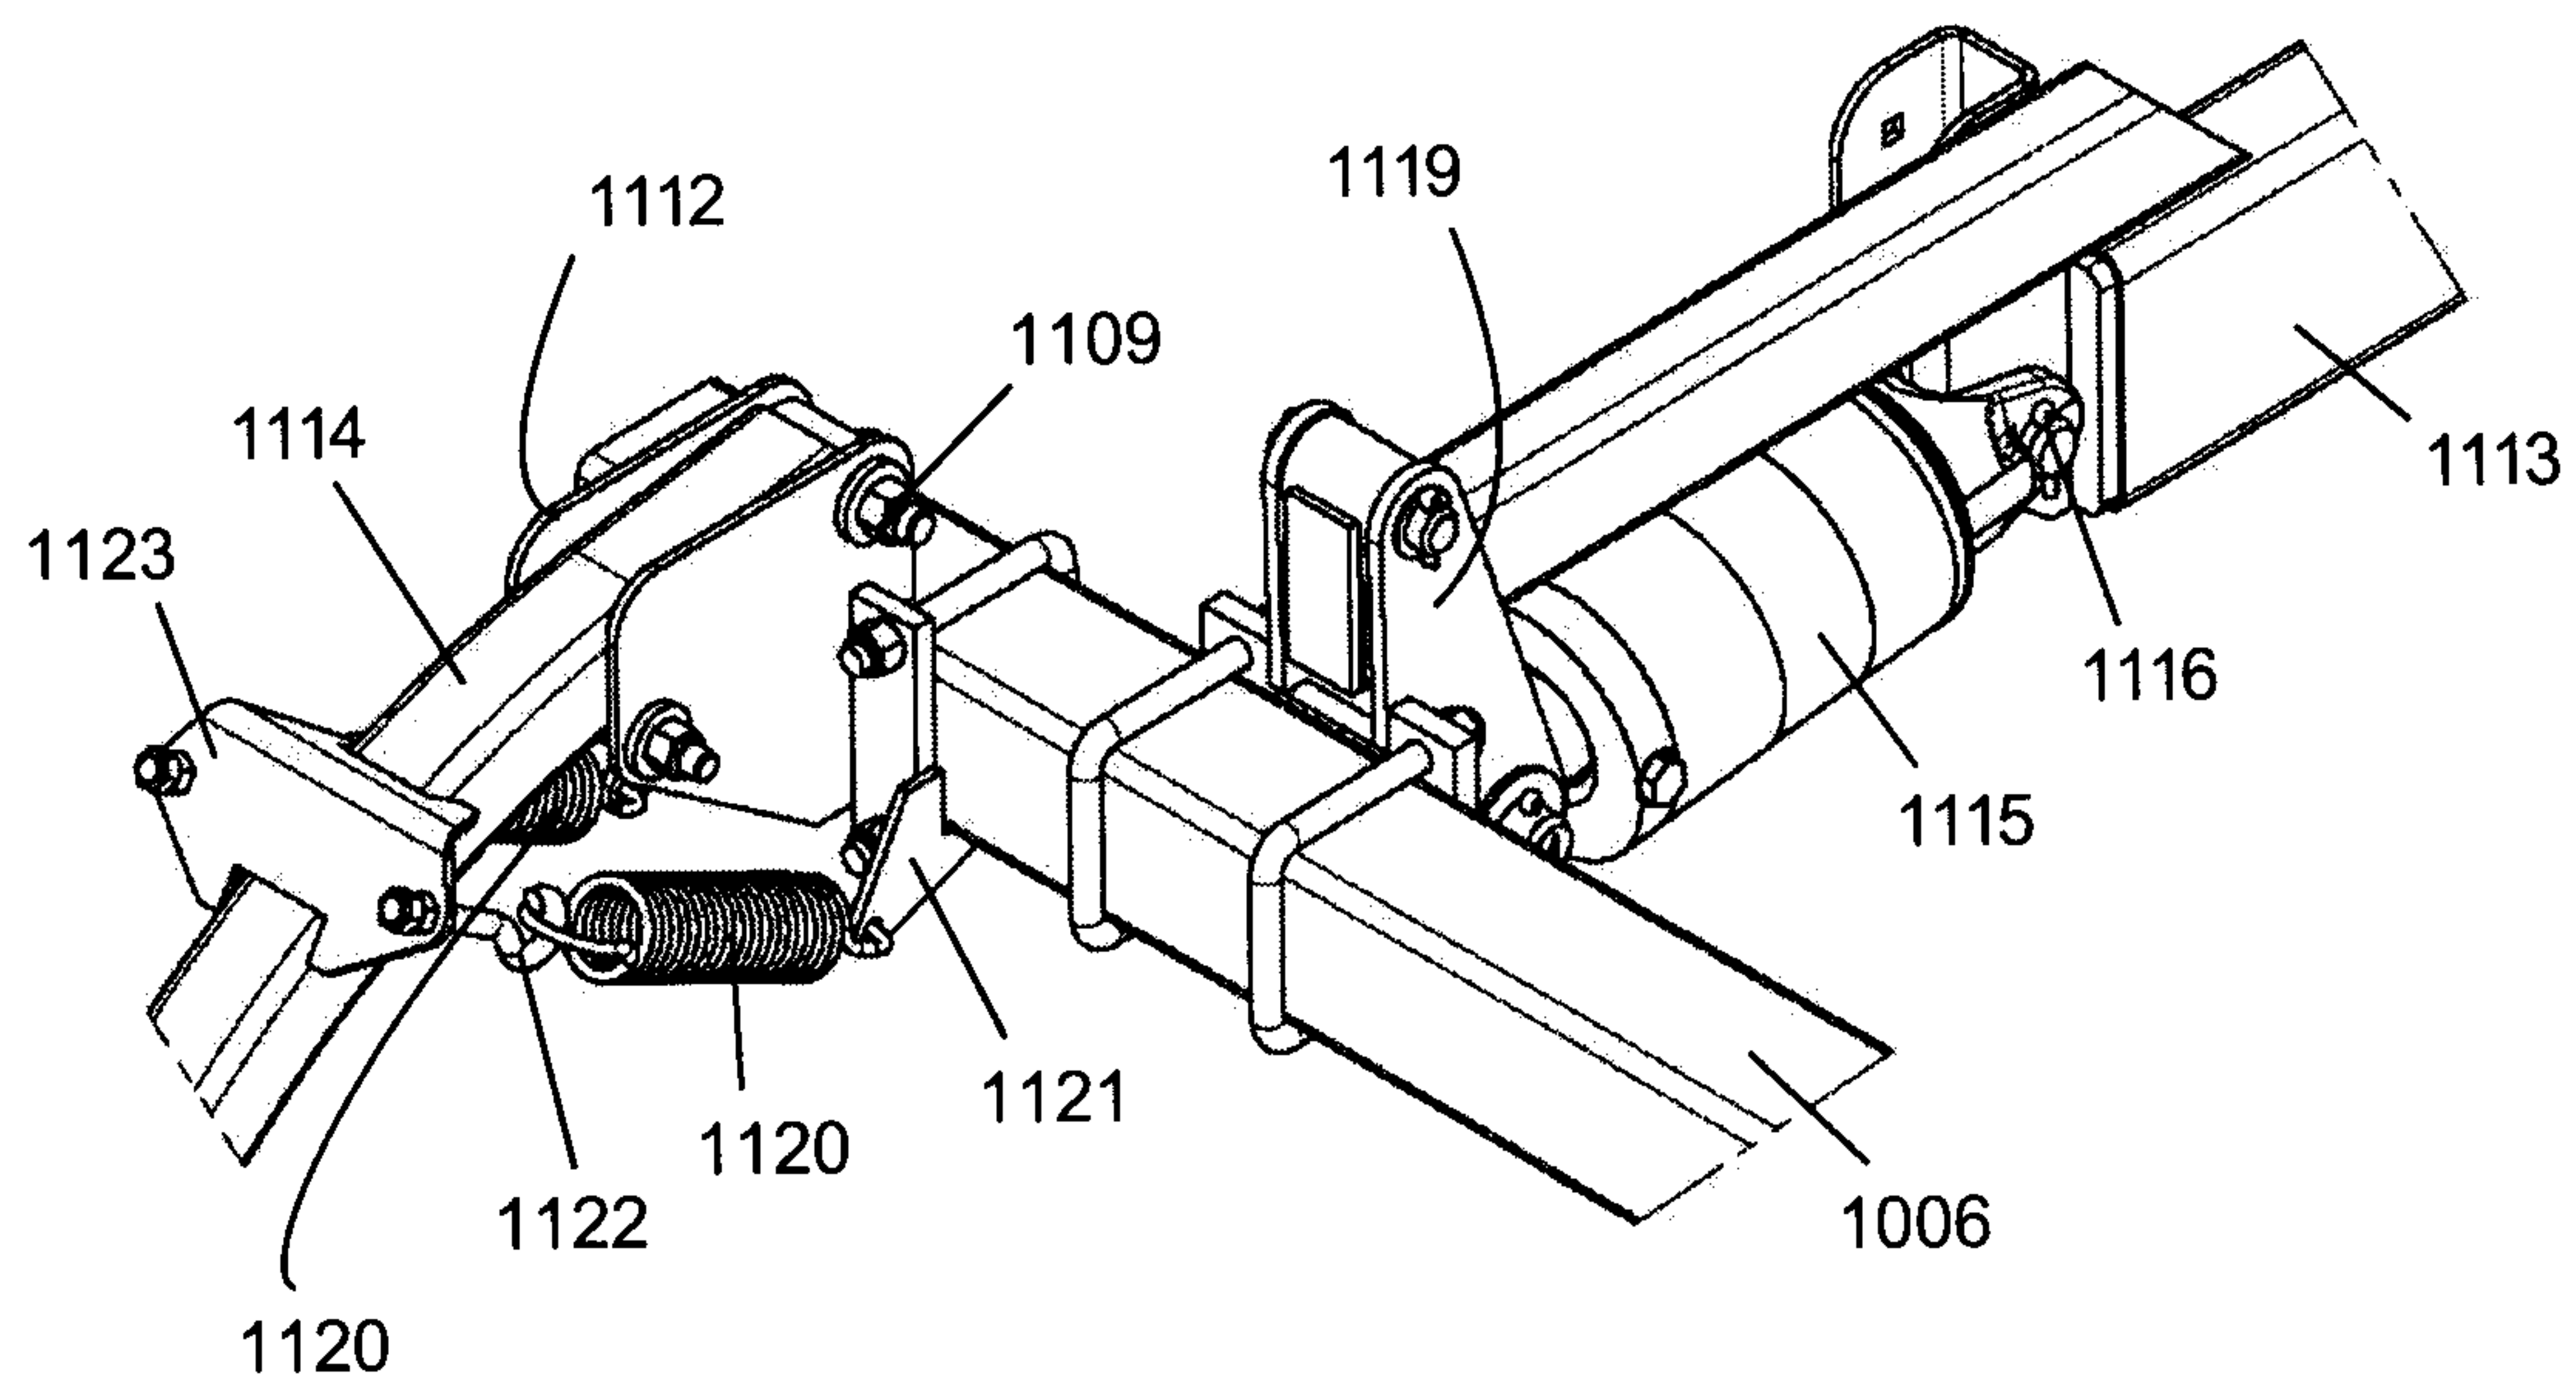


Fig. 16A

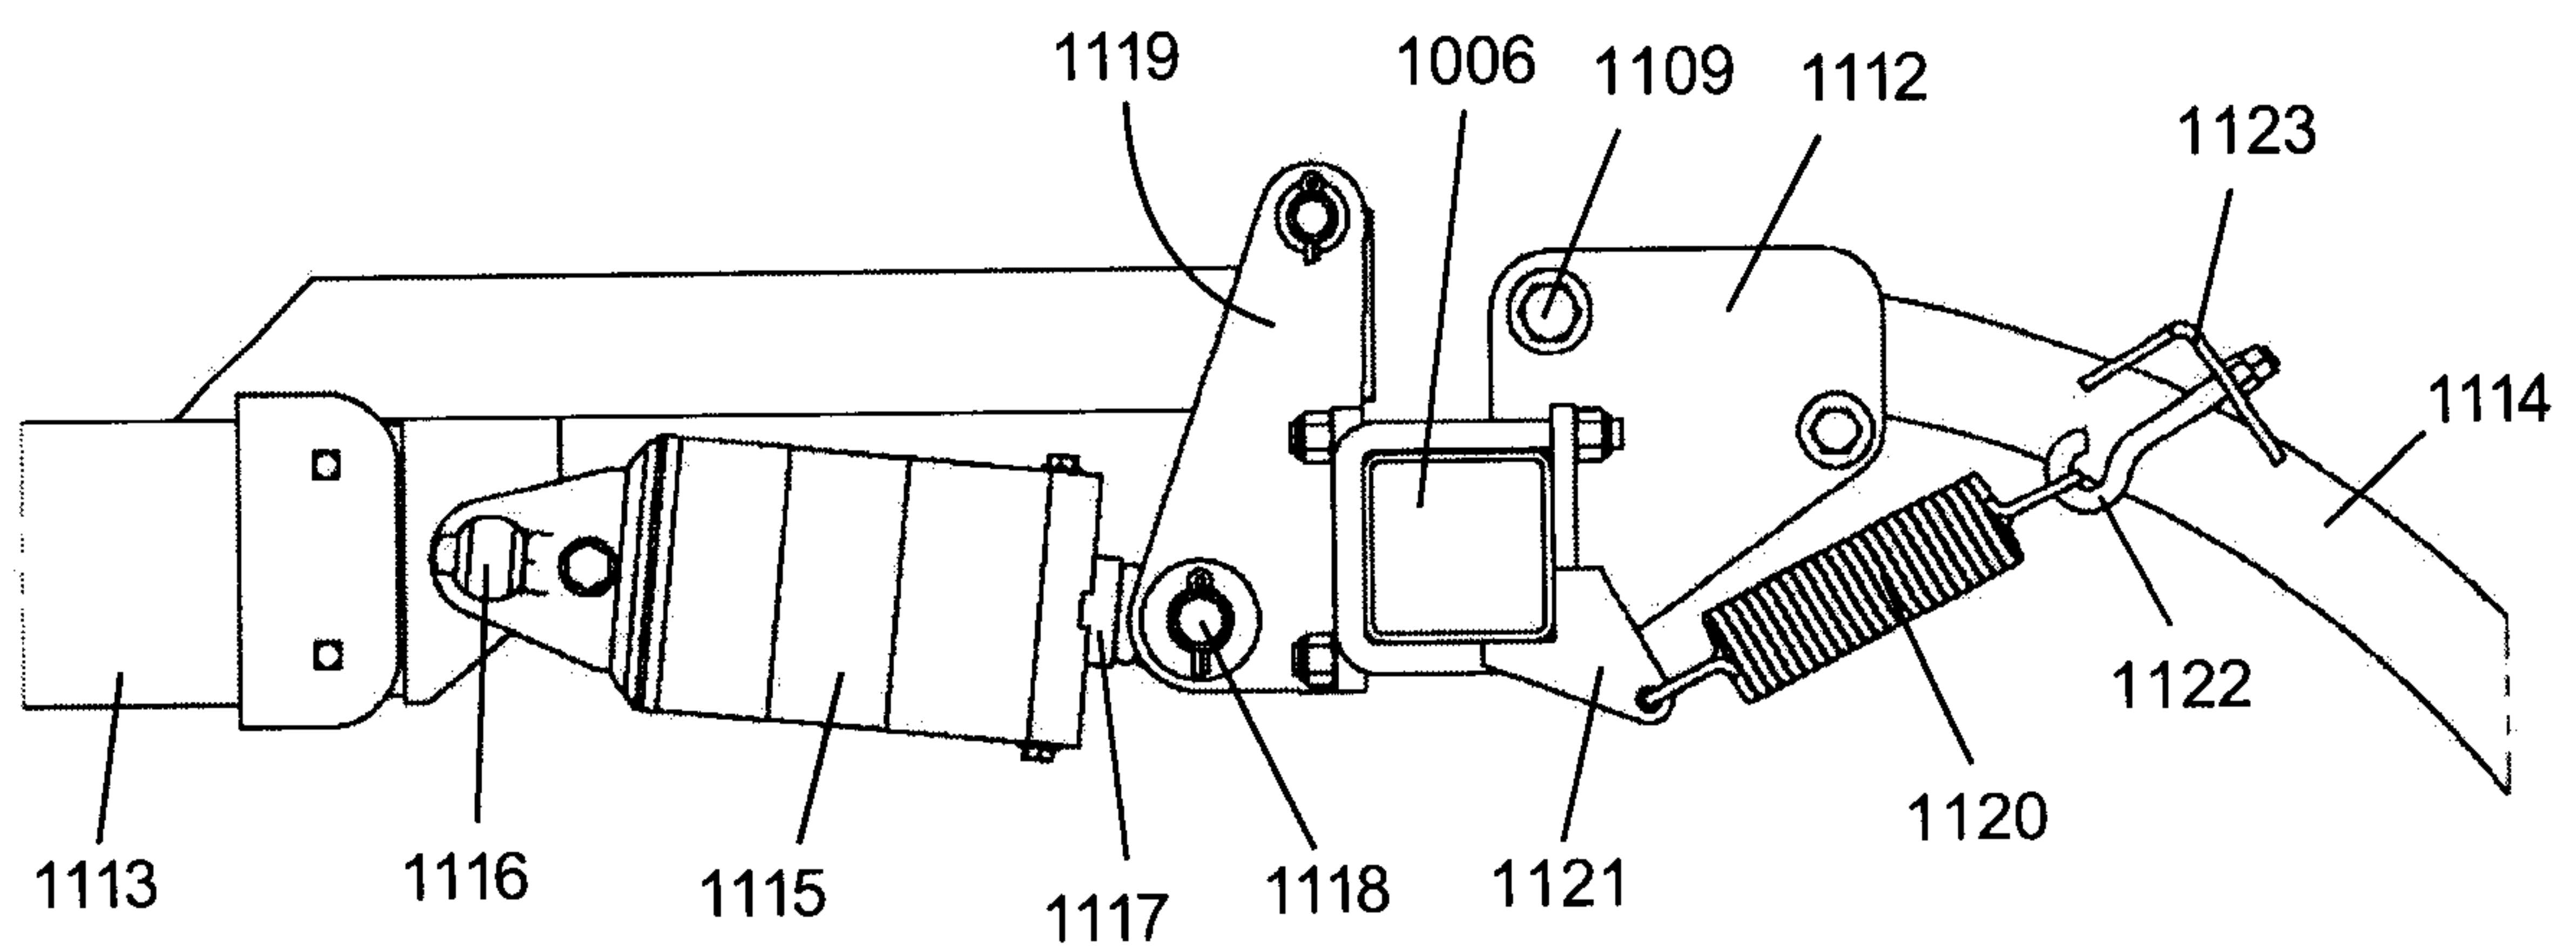


Fig. 16B

23/26

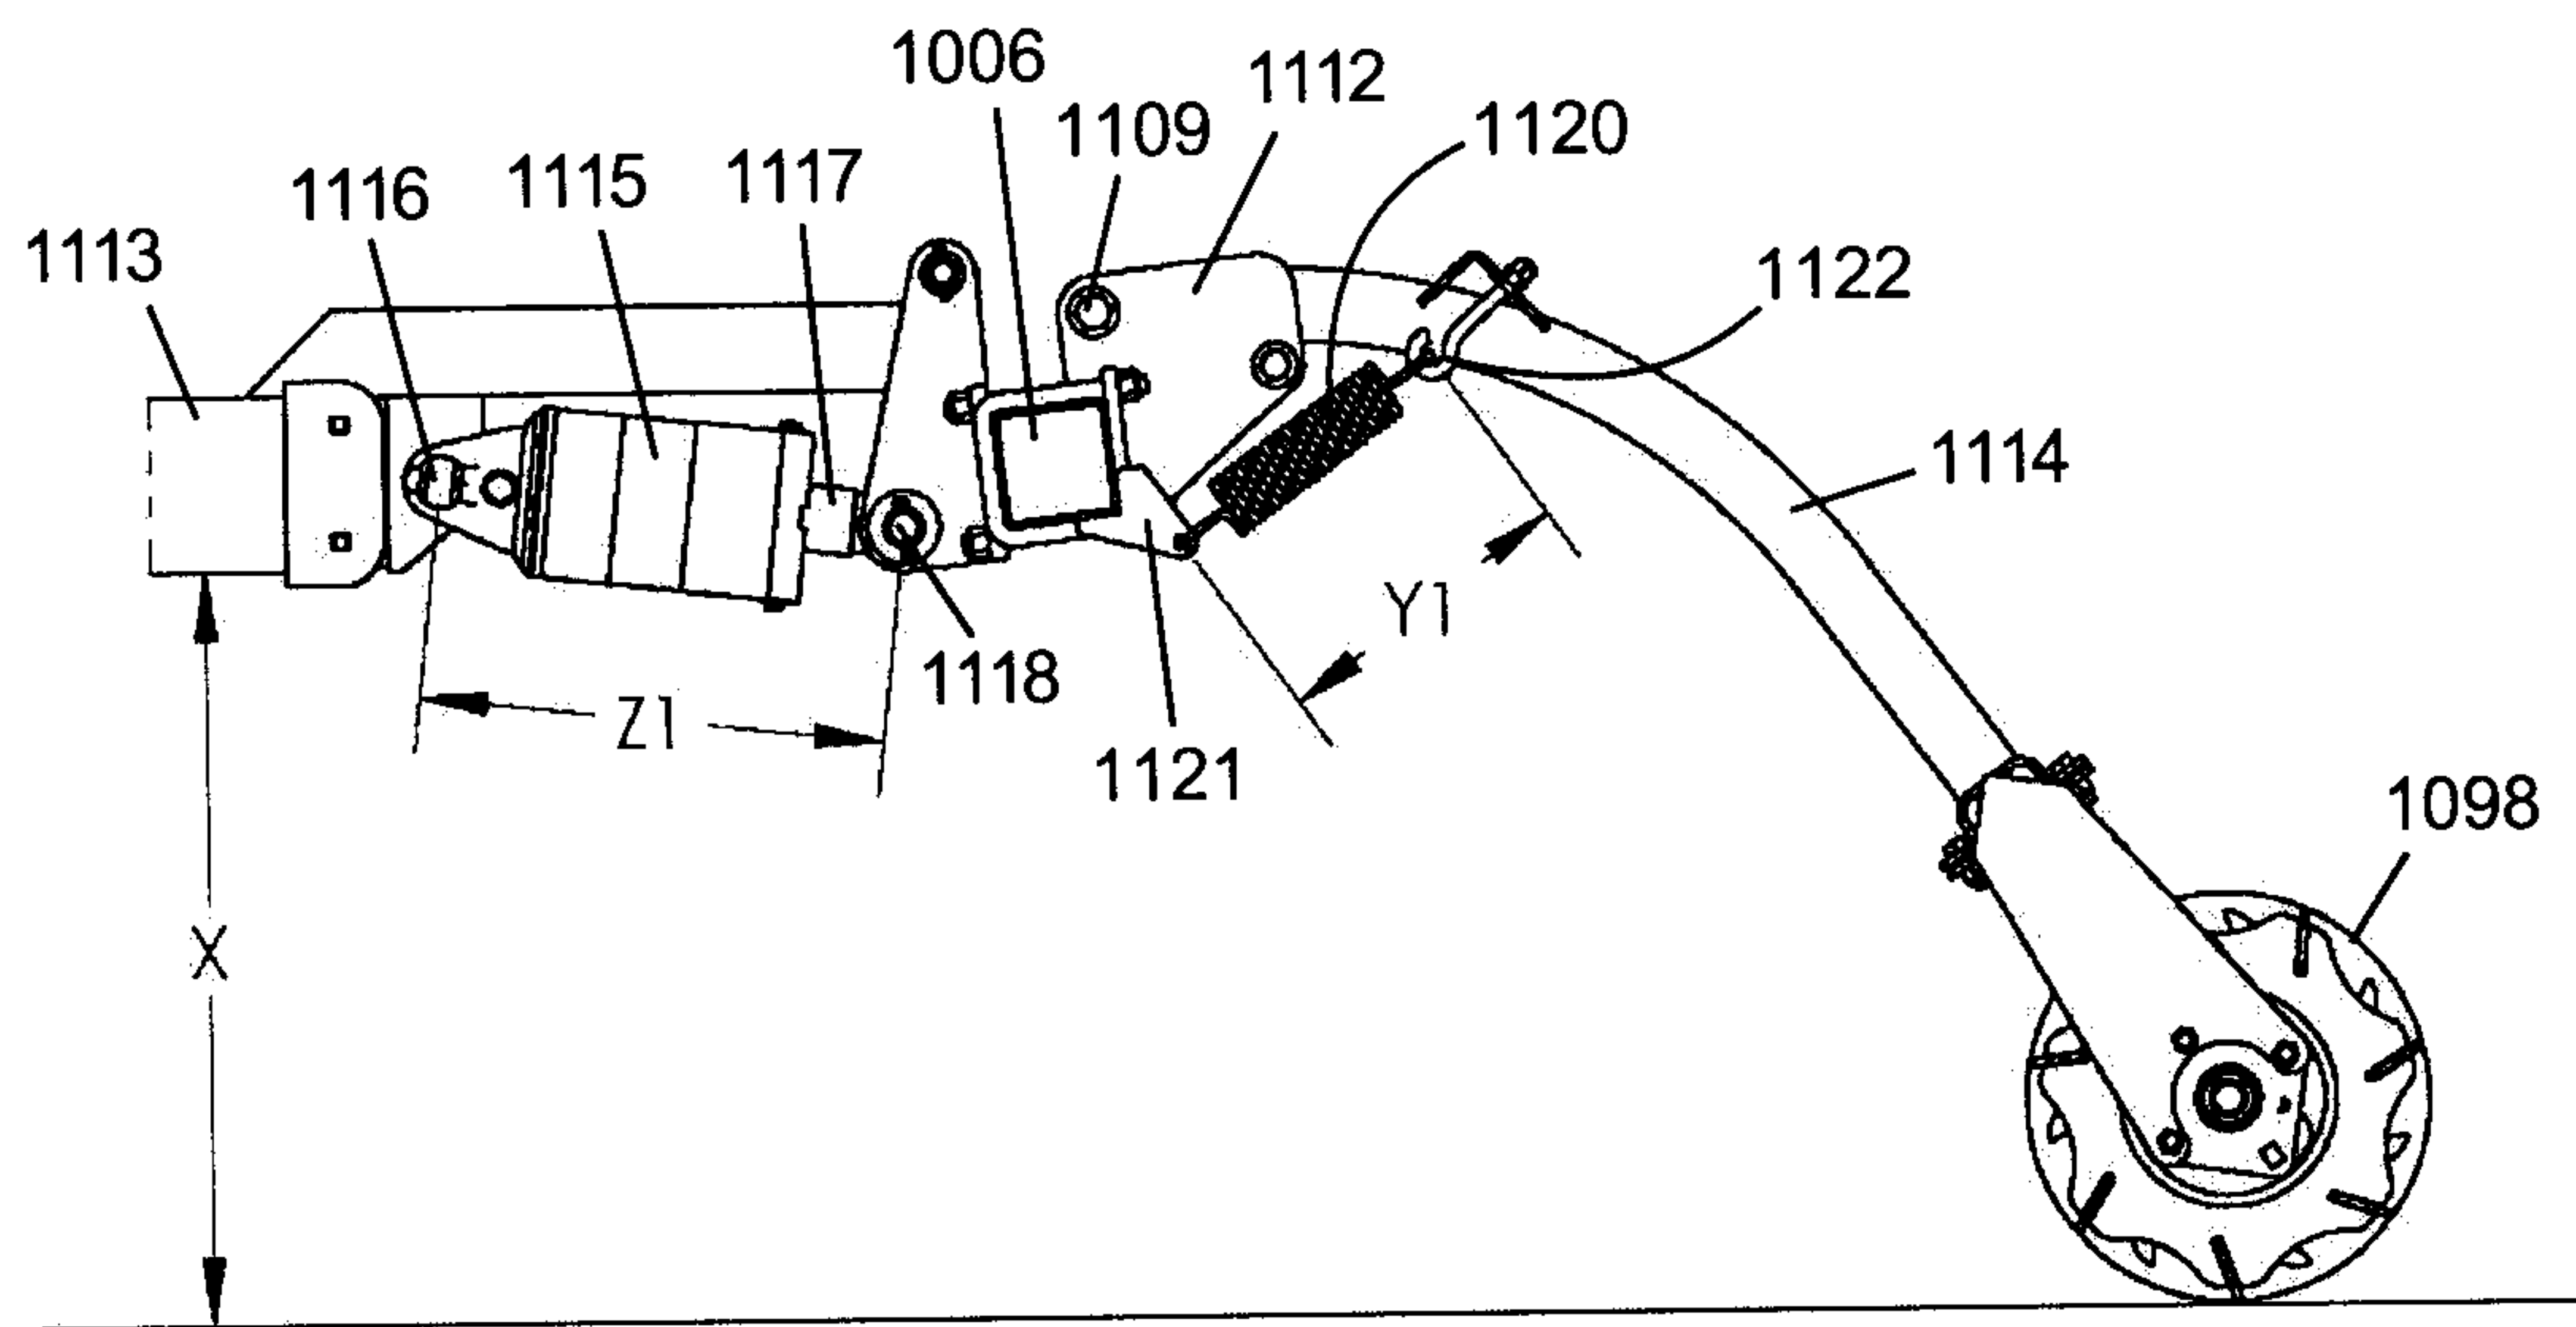


Fig. 17A

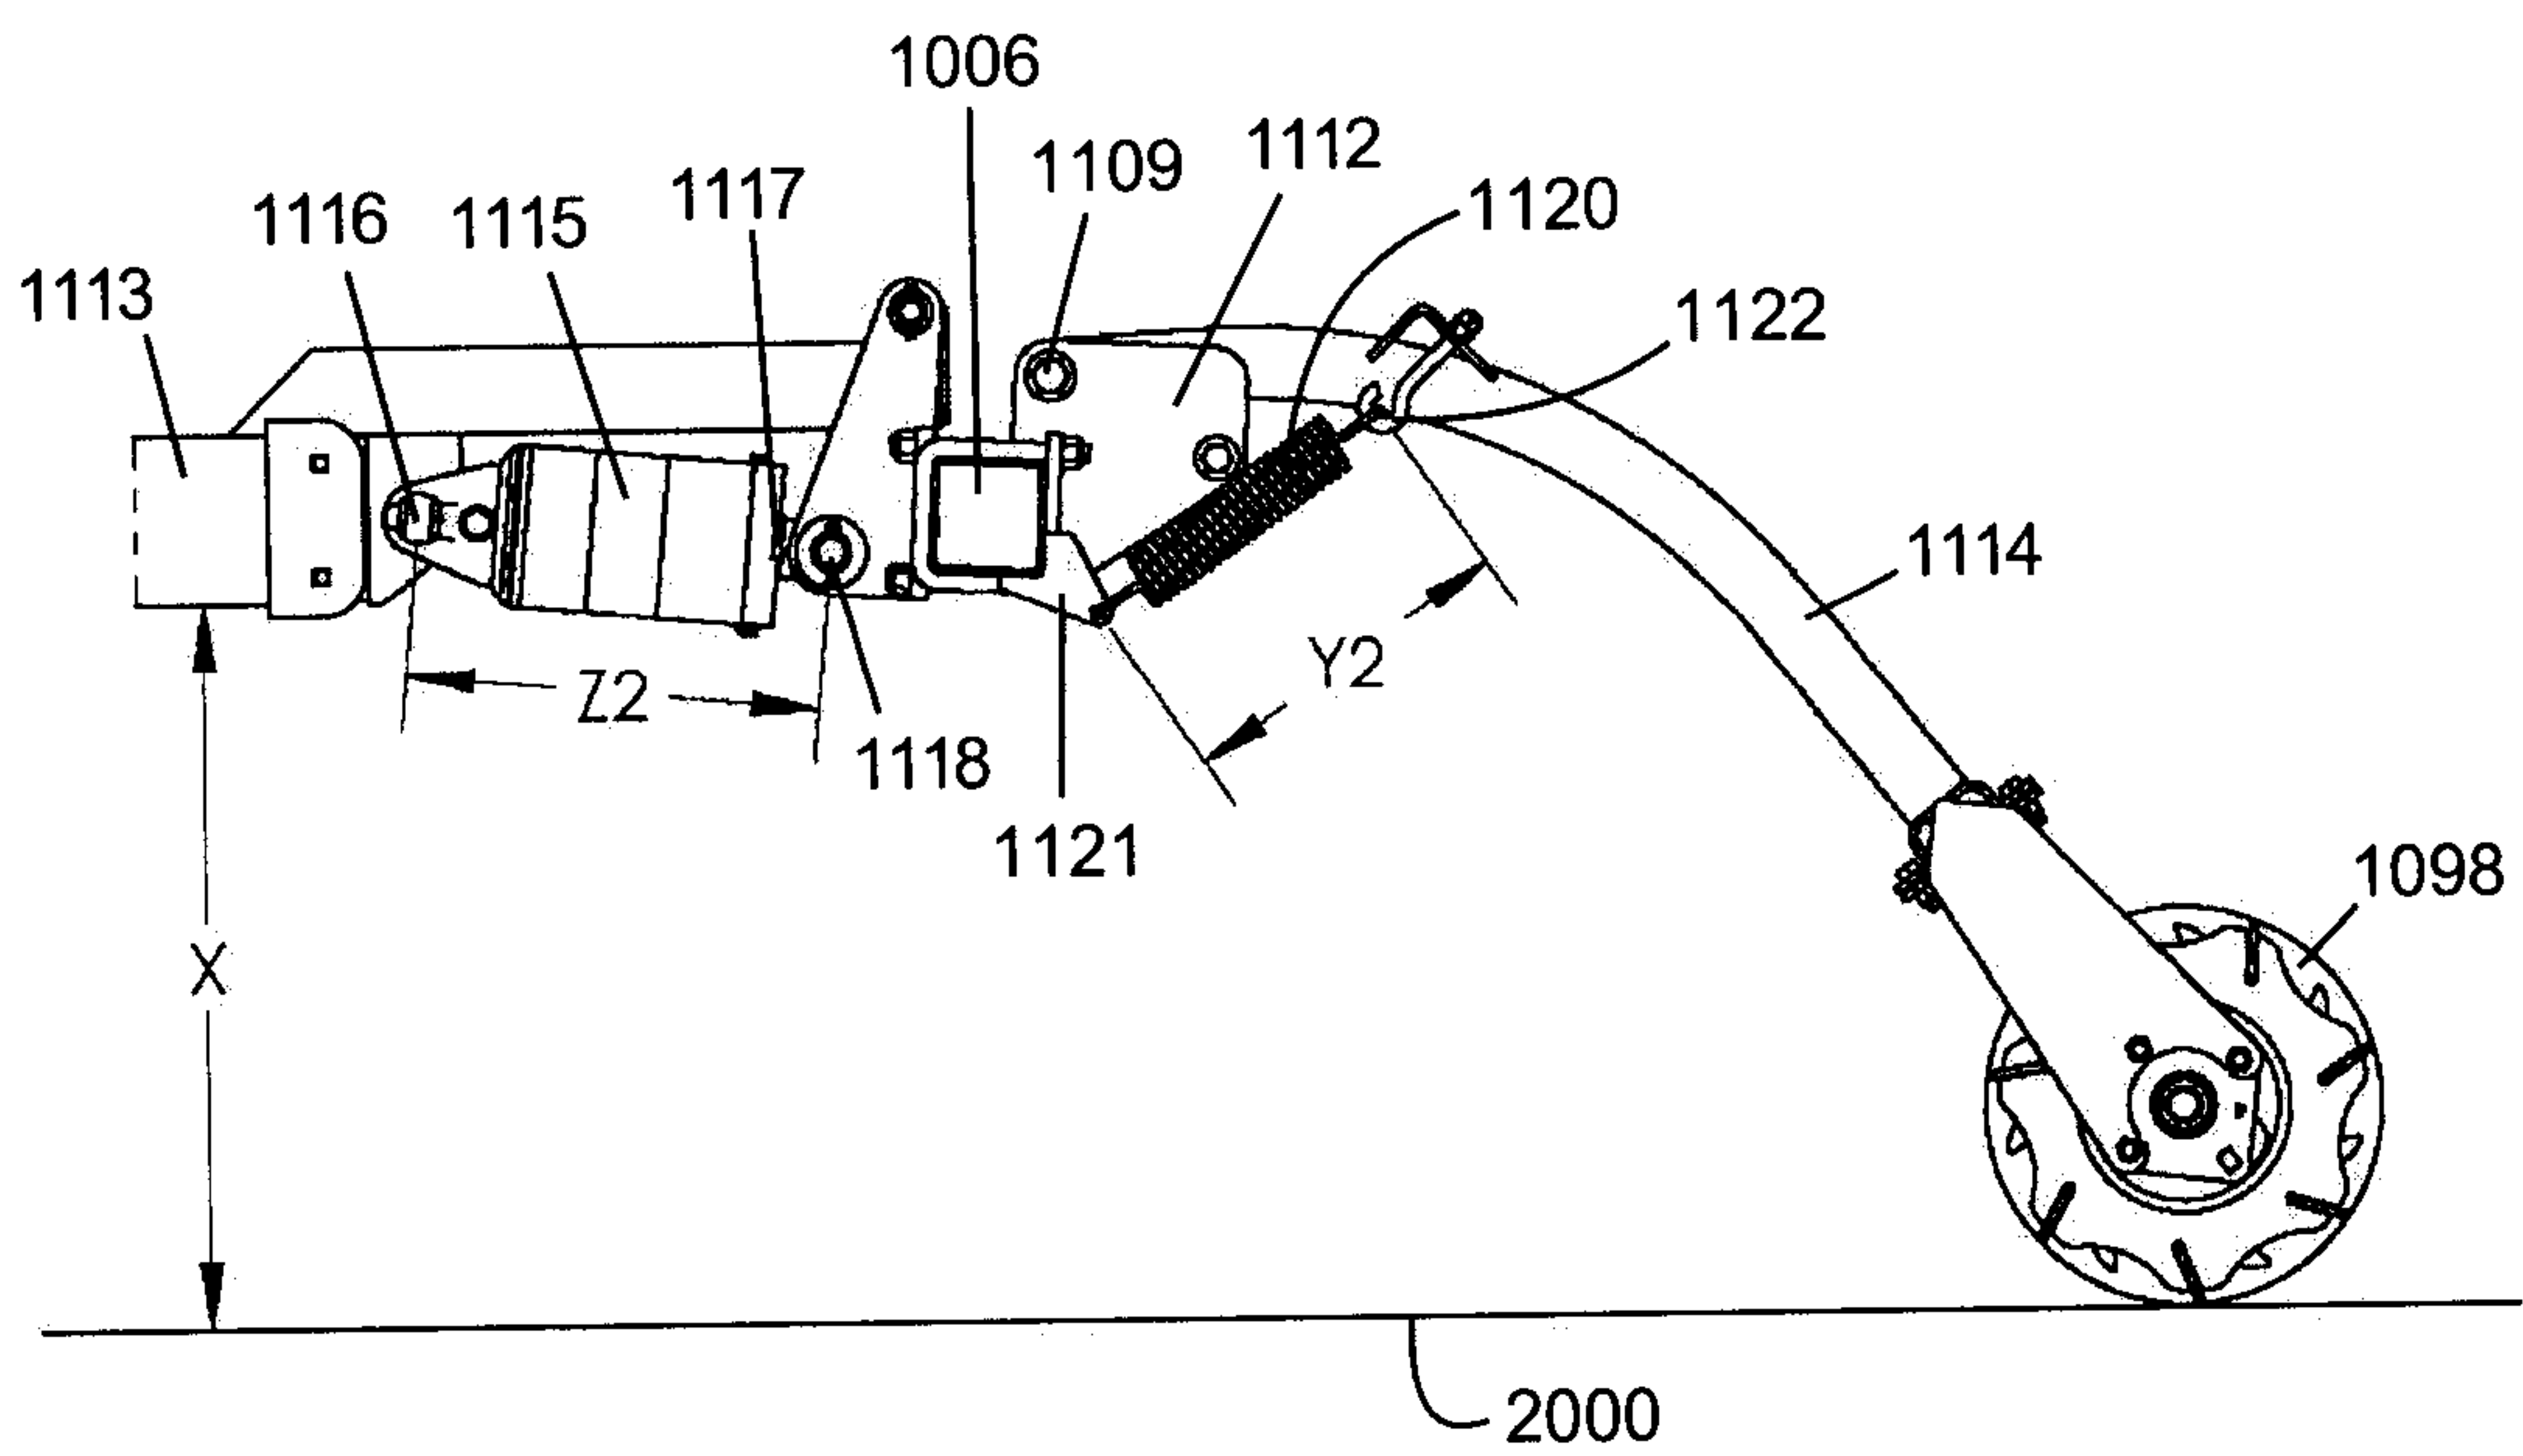


Fig. 17B

24/26

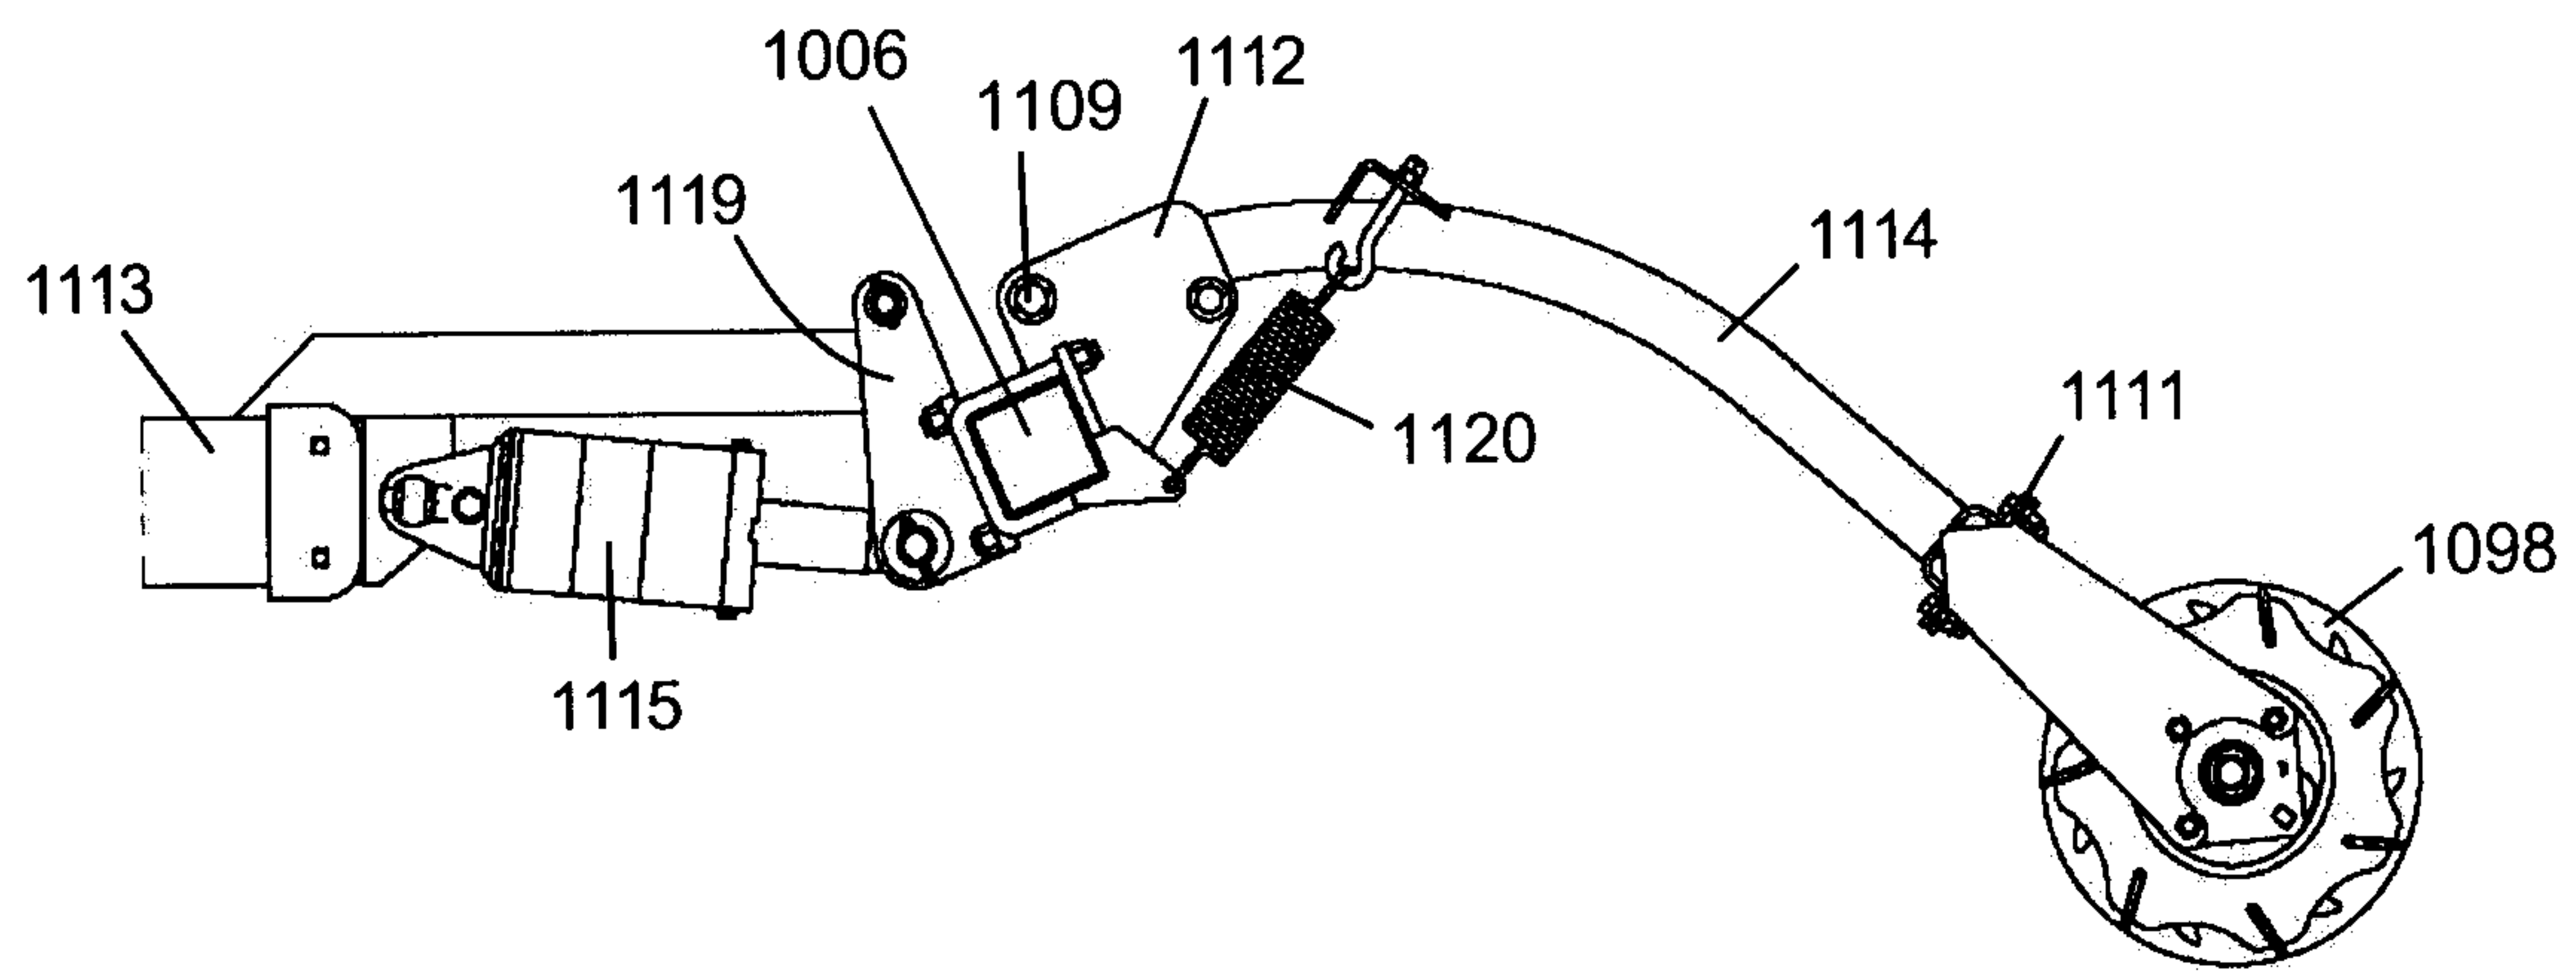


Fig. 18A

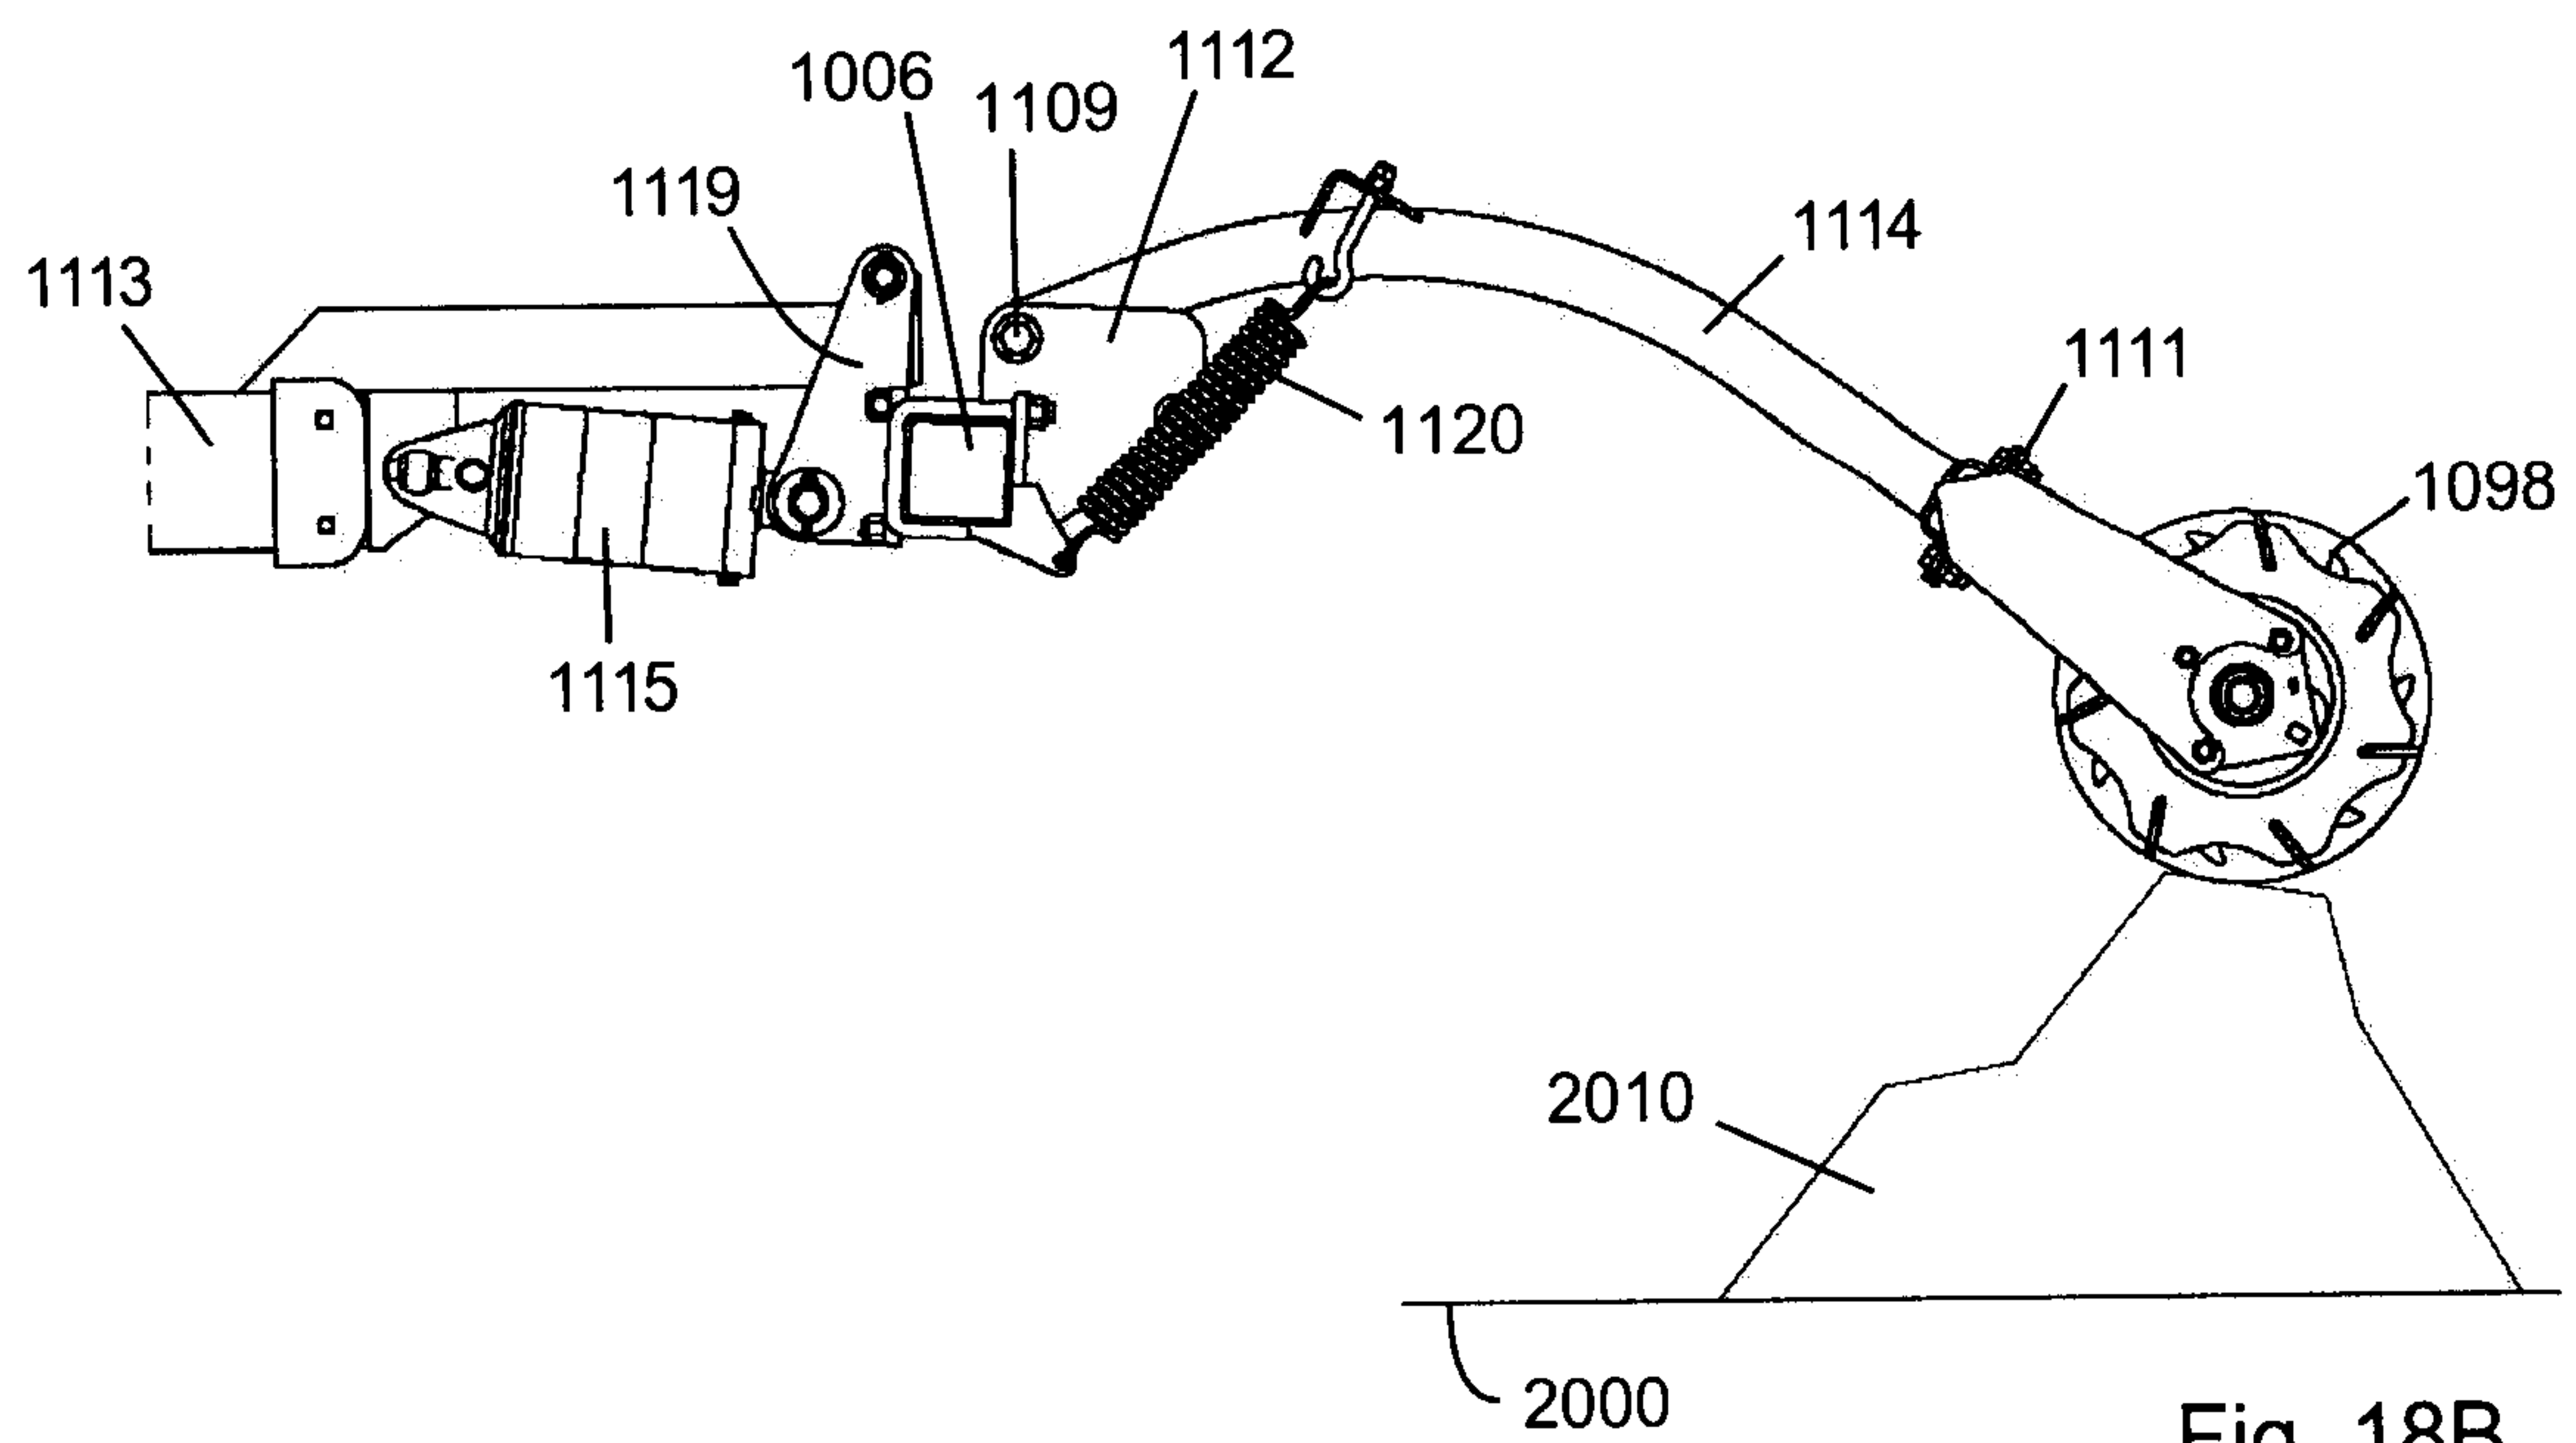


Fig. 18B

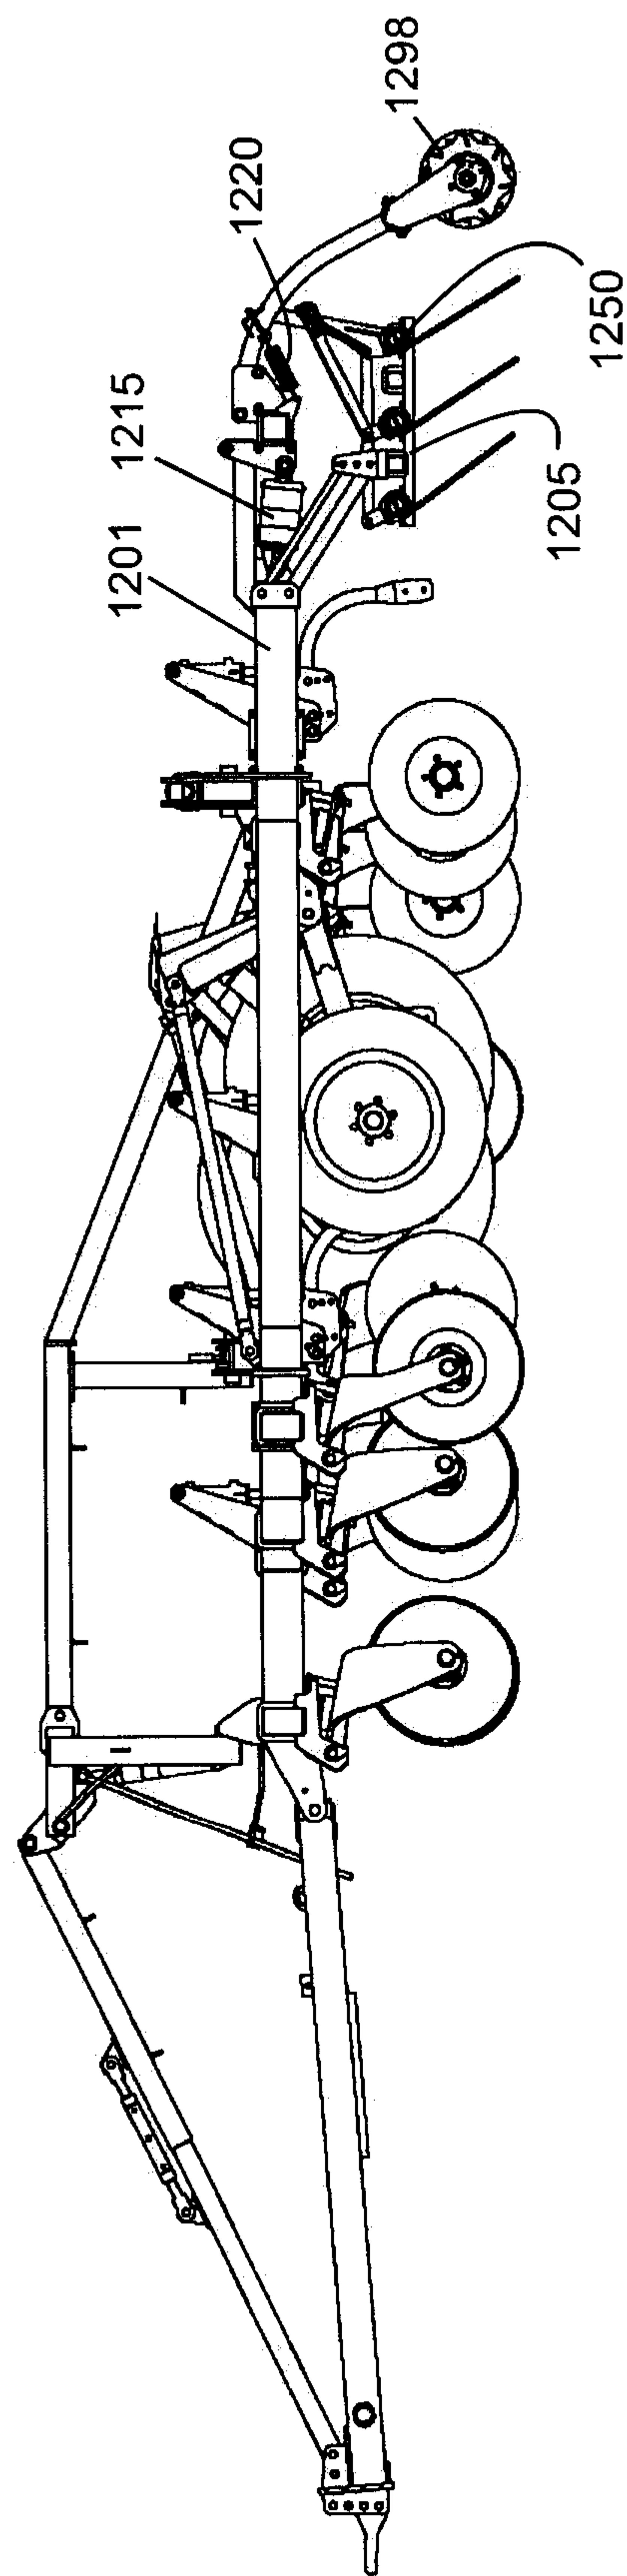


Fig. 19

26/26

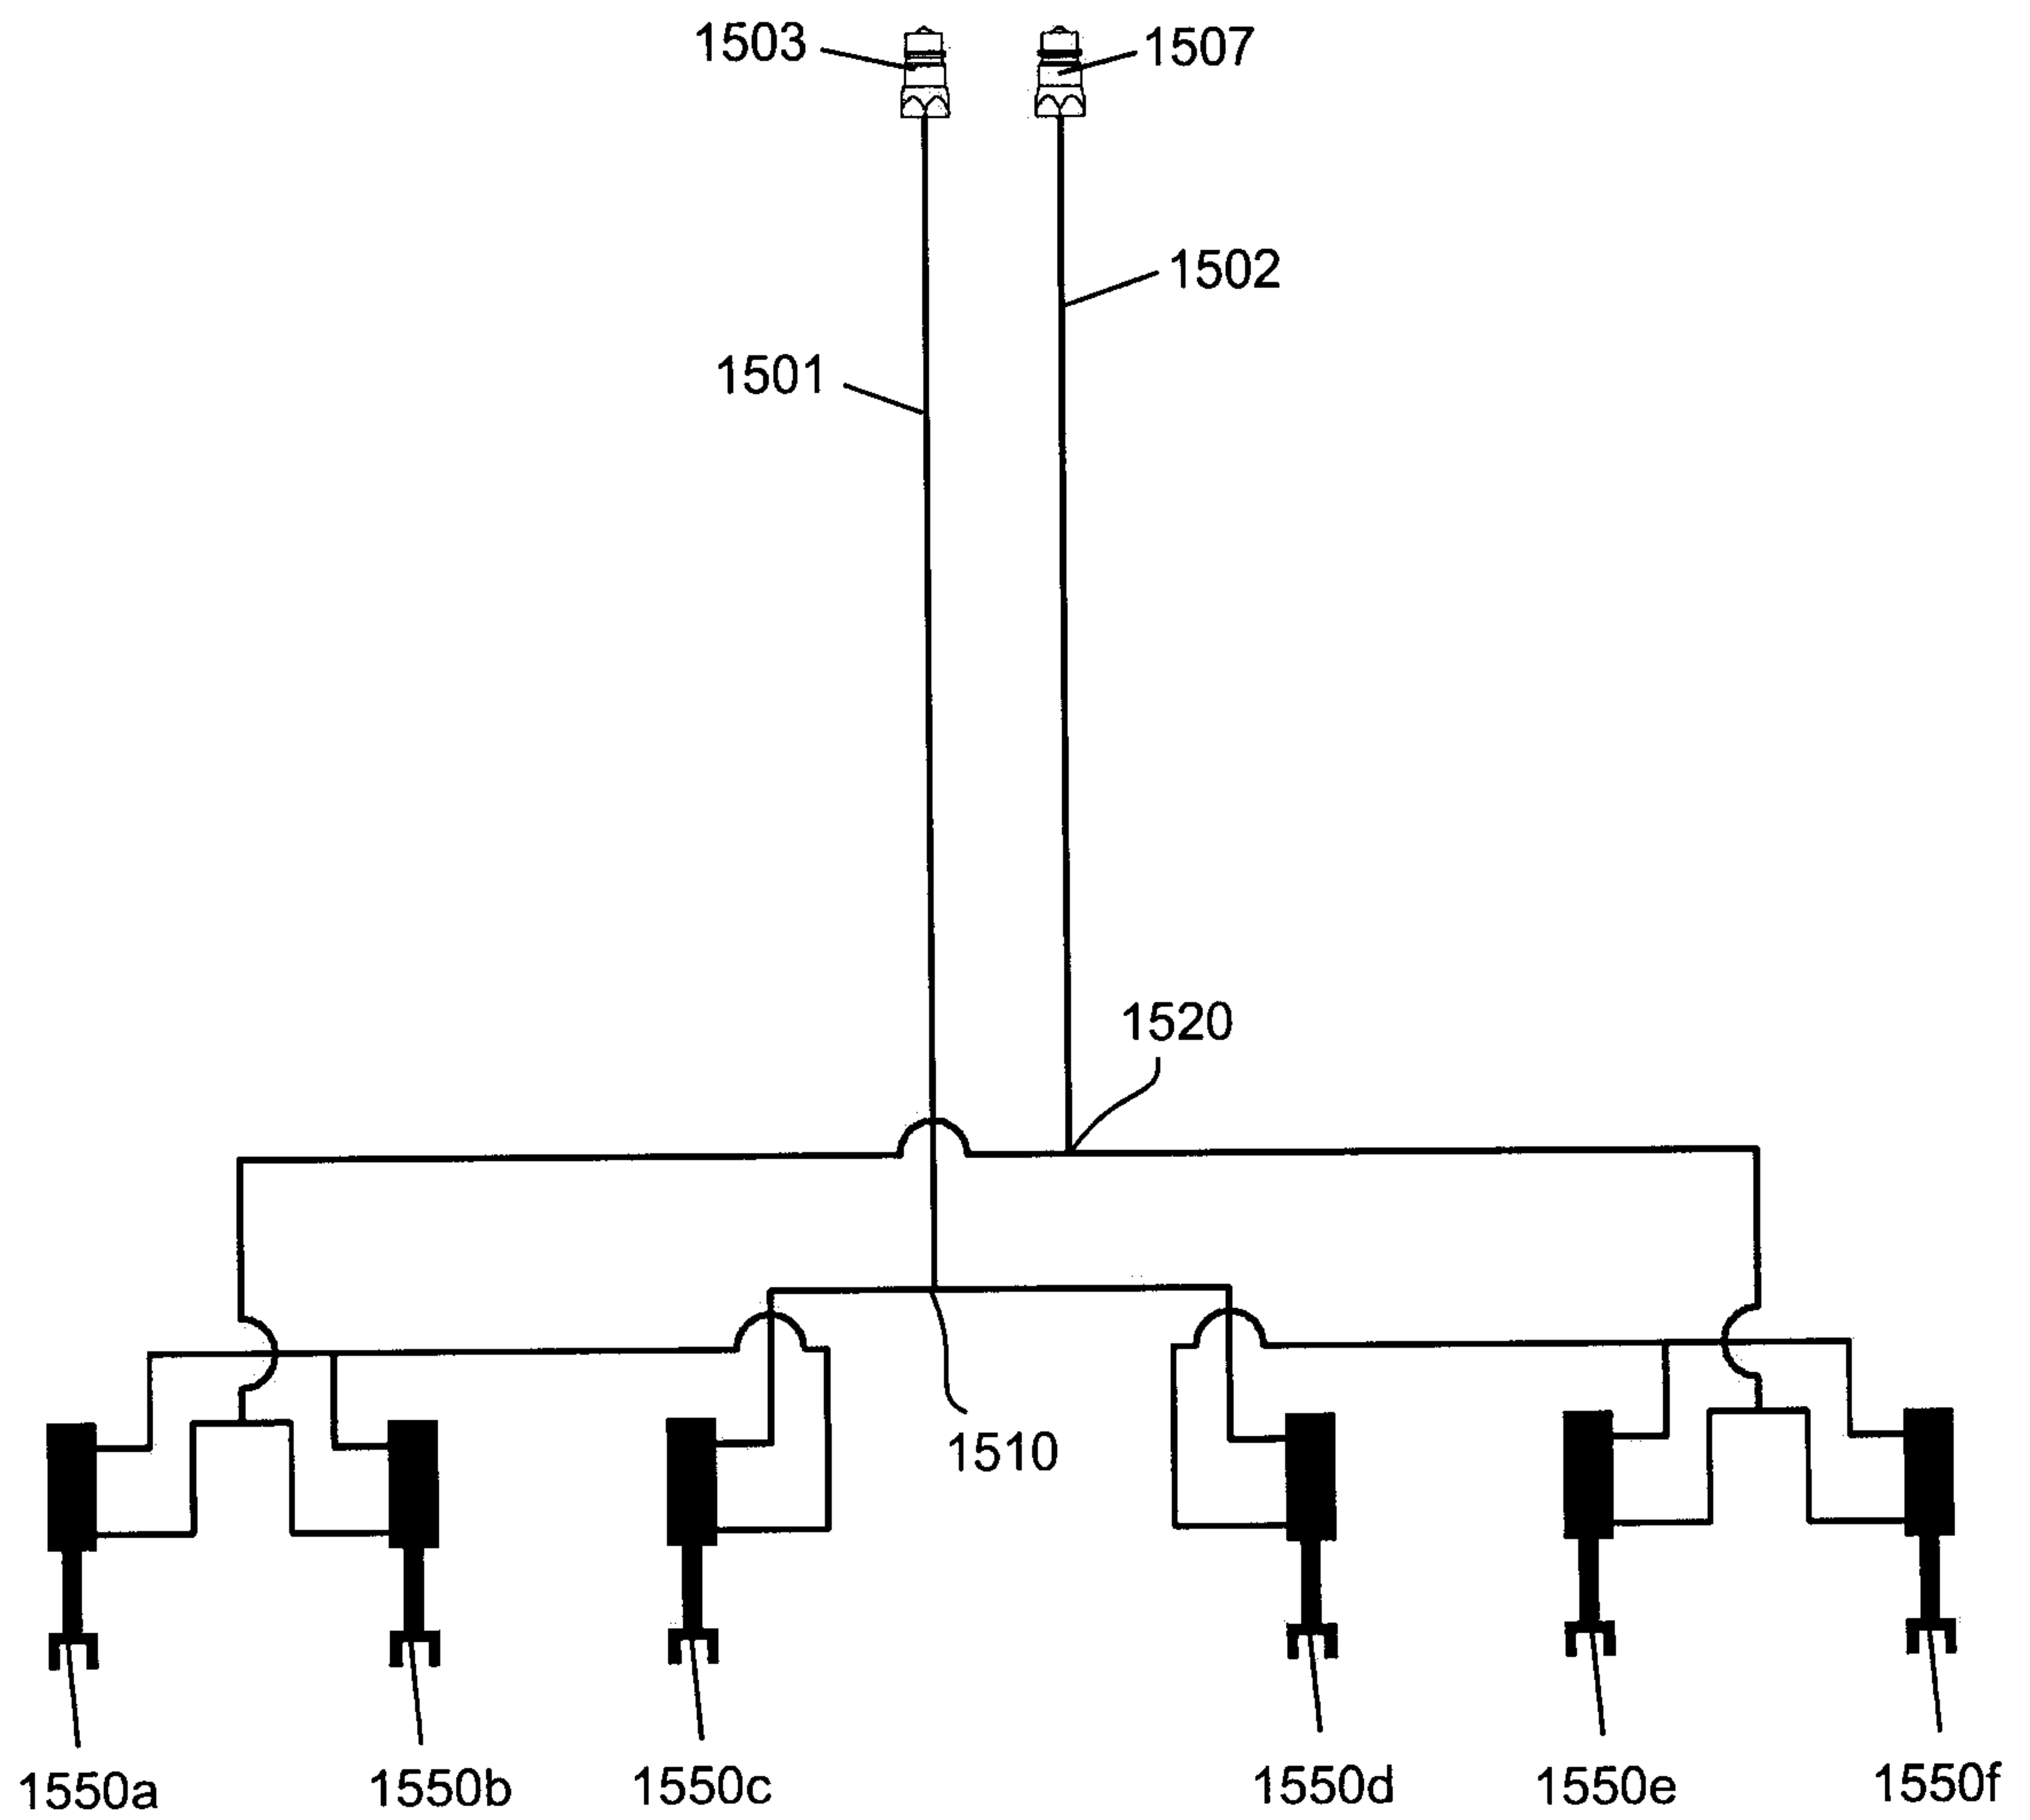


Fig. 20

