



(51) International Patent Classification:

H02M 3/335 (2006.01) H02M 1/34 (2007.01)

H02M 1/00 (2007.01)

US

PCT/US2019/065912 (CIP)

Filed on

12 December 2019 (12.12.2019)

US

62/838,227 (CIP)

Filed on

24 April 2019 (24.04.2019)

(21) International Application Number:

PCT/US2021/022100

(71) Applicant: POWER INTEGRATIONS, INC. [US/US];

5245 Hellyer Ave., San Jose, California 95138 (US).

(22) International Filing Date:

12 March 2021 (12.03.2021)

(72) Inventors: TIAN, Jinyuan; 2606 Gimelli Way, San Jose,

California 95133 (US). AHMED, Munadir Aziz; 4172

George Avenue, Unit 6, San Mateo, California 94402 (US).

ODELL, Arthur B.; 2776 Hay Loft Court, Morgan Hill,

California 95037 (US). DUVNJAK, Rajko; 12 Gray Cres-

cent, Kanata, Ontario K2K 3J5 (CA).

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/989,048 13 March 2020 (13.03.2020) US

17/193,402 05 March 2021 (05.03.2021) US

(74) Agent: LEAL, Peter R.; 5245 Hellyer Ave., San Jose, Cal-

ifornia 95138 (US).

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier applications:

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

(54) Title: MODE OPERATION DETECTION FOR CONTROL OF A POWER CONVERTER WITH AN ACTIVE CLAMP SWITCH

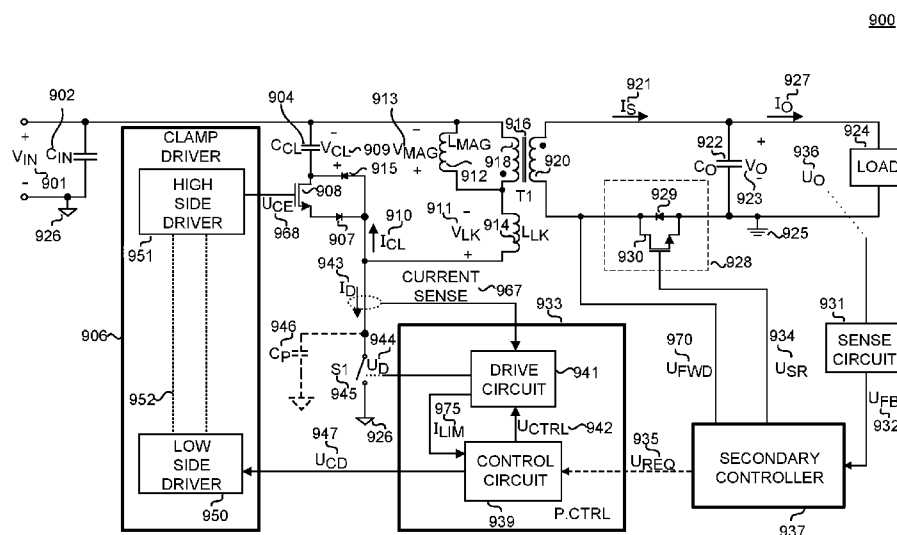


FIG. 9

(57) Abstract: A primary controller configured for use in a power converter comprising a control circuit configured to determine a mode of operation of the power converter in response to a drive signal of a power switch. The control circuit further configured to generate a control signal in response to a signal representative of the mode of operation of the power converter, wherein the control signal represents a delay time to enable a turn on of the power switch after a turn off of a clamp switch. The control circuit further configured to generate a clamp drive signal to control the clamp switch. The primary controller further comprises a drive circuit configured to generate a drive signal to enable the power switch to transfer energy from an input of the power converter to an output of the power converter.

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

MODE OPERATION DETECTION FOR CONTROL OF A POWER CONVERTER WITH AN ACTIVE CLAMP SWITCH

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Patent Application No. 17/193,402, filed March 5, 2021, which is a continuation-in-part of International Patent Application No. PCT/US19/65912, filed December 12, 2019, which claims the benefit of U.S. Provisional Application No. 62/838,227 filed on April 24, 2019. U.S. Patent Application No. 17/193,402, International Patent Application No. PCT/US19/65912 and US Provisional Application No. 62/838,227 are hereby incorporated by reference in their entirety.

[0002] This application claims the benefit of U.S. Patent Application No. 17/193,402, filed March 5, 2021, which claims the benefit of U.S. Provisional Application No. 62/989,048, filed March 13, 2020. U.S. Provisional Application No. 62/989,048 is hereby incorporated by reference in its entirety.

BACKGROUND INFORMATION

Field of the Disclosure

[0003] The present invention relates generally to power converters, and more specifically zero voltage switching (ZVS) for variable frequency flyback power converters.

Background

[0004] Electronic devices (such as cell phones, tablets, laptops, *etc.*) use power to operate. Switched mode power supplies are commonly used due to their high efficiency, small size, and low weight to power many of today's electronics. Conventional wall sockets provide a high voltage alternating current. In a switching power supply, a high voltage alternating current (ac) input is converted with switched mode power converters to provide a well-regulated direct current (dc) output through an energy transfer element to a load. In operation, a switch is turned ON and OFF to provide the desired output by varying the duty cycle (typically the ratio of the on time of the switch to the total switching period), varying the switching frequency, or varying the number of on/off pulses per unit time of the switch in a switched mode power converter.

[0005] In a power converter such as a flyback converters when a primary power switch is turned off, the path for the current on the primary side is interrupted abruptly. The energy stored in the magnetizing energy of an energy transfer element can be transferred to the output but the energy in the leakage inductance cannot be transferred to the output. The stored energy is transferred to the drain to source capacitance of the main power switch. This can have catastrophic effects on the device as the voltage developed across the drain to source can exceed

the device rating. Traditional flyback converters use passive clamps, e.g. RCD clamp where the leakage energy is captured in a clamp capacitor and the energy is burned in a resistor. This wasted energy reduces the overall efficiency of the system.

[0006] Active clamp strategies have been proposed that recycles the leakage energy to achieve zero voltage switching on the primary switch. This increases the efficiency of the overall system. The ZVS technique most commonly used today uses an active clamp on the primary side and a resonant LC secondary output winding structure. While this method has excellent efficiency and reliable ZVS operation, at times the controller may be operated in burst mode. Burst mode is a complex control strategy which requires careful optimization of the loop speed and stability of the system. This can be particularly challenging for adapters where the output voltage can vary over a wide range, e.g. USB Power Delivery (USBPD) applications.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Non-limiting and non-exhaustive embodiments of the present invention are described with reference to the following figures, wherein like reference numerals refer to like parts throughout the various views unless otherwise specified.

[0008] **FIG. 1** illustrates one example of a power converter with a primary controller, a secondary controller, and a clamp driver, in accordance with embodiments of the present disclosure

[0009] **FIG. 2** illustrates one example of a timing diagram that illustrates a current of a power switch used in the power converter of **FIG. 1**, in accordance with embodiments of the present disclosure.

[0010] **FIG. 3** illustrates one example of a control circuit used in **FIG. 1**, in accordance with embodiments of the present disclosure.

[0011] **FIG. 4A** illustrates another example of a timing diagram that illustrates signals of a power converter such as a drain voltage, a clamp current, a drain current, a secondary current, an enable signal, and a drive signal, in accordance with embodiments of the present disclosure.

[0012] **FIG. 4B** illustrates another example of a timing diagram that illustrates signals of a power converter such as a drain-source voltage, a clamp current, a drain current, a secondary current, an enable signal, and a drive signal, in accordance with embodiments of the present disclosure.

[0013] **FIG. 4C** illustrates a timing diagram illustrating a drain-source voltage, a clamp current, a switch current of the power switch, a secondary current, a clamp enable signal, and a drive signal, in accordance with embodiments of the present disclosure.

[0014] **FIG. 5A** illustrates an example of a timing diagram that illustrates signals of a power converter such as a drain voltage, an enable signal, and a drive signal, in accordance with embodiments of the present disclosure.

[0015] **FIG. 5B** illustrates an example of a timing diagram that illustrates signals of a power converter such as a drain voltage, an enable signal, and a drive signal, in accordance with embodiments of the present disclosure.

[0016] **FIG. 6A** illustrates an example timing diagram of a drain voltage of a power switch, in accordance with embodiments of the present disclosure.

[0017] **FIG. 6B** illustrates another example timing of a drain voltage of a power switch, in accordance with embodiments of the present disclosure.

[0018] **FIG. 6C** illustrates another example of a timing diagram drain voltage of a power switch, in accordance with embodiments of the present disclosure.

[0019] **FIG. 7** illustrates a timing diagram of a drain voltage of a power switch, in accordance with embodiments of the present disclosure.

[0020] **FIG. 8** illustrates a timing diagram of a drain voltage of a synchronous rectifier switch, and a drain voltage of a power switch, in accordance with embodiments of the present disclosure.

[0021] **FIG. 9** illustrates one example of a power converter with a primary controller, a secondary controller, and a clamp driver, in accordance with embodiments of the present disclosure.

[0022] **FIG. 10** illustrates one example of a control circuit for the power converter of **FIG. 9** which can determine a mode of operation from the request signal U_{REQ} , in accordance with embodiments of the present disclosure.

[0023] **FIG. 11A** illustrates one example of a secondary controller for the power converter of **FIG. 9**, in accordance with embodiments of the present disclosure.

[0024] **FIG. 11B** illustrates another example of a secondary controller for the power converter of **FIG. 9**, in accordance with embodiments of the present disclosure.

[0025] **FIG. 12A** illustrates one example of a pattern of the request signal U_{REQ} of **FIGS. 9, 10, 11A, and 11B**, in accordance with embodiments of the present disclosure.

[0026] **FIG. 12B** illustrates another example of a pattern of the request signal U_{REQ} of **FIGS. 9, 10, 11A, and 11B**, in accordance with embodiments of the present disclosure.

[0027] **FIG. 13** illustrates a further example of a power converter with a primary controller, a secondary controller, a clamp driver, and a bias winding in accordance with embodiments of the present disclosure.

[0028] **FIG. 14** illustrates of one example of a control circuit for the primary controller of **FIG. 13** which can determine the operation of the power converter in response to a bias winding voltage of **FIG. 13**, in accordance with embodiments of the present disclosure.

[0029] **FIG. 15A** illustrates a timing diagram of a request signal, a clamp enable signal, a drive signal, a drain-source voltage of the power switch, a bias winding voltage, a zero-crossing signal, and a DCM signal of the power converter of **FIG. 13** and the control circuit of **FIG. 14**, in accordance with embodiments of the present disclosure.

[0030] **FIG. 15B** illustrates a timing diagram of a request signal, a clamp enable signal, a drive signal, a drain-source voltage of the power switch, a bias winding voltage representative of an input winding, a zero-crossing signal, and a CCM signal of the power converter of **FIG. 13** and the control circuit of **FIG. 14**, in accordance with embodiments of the present disclosure.

[0031] **FIG. 16** illustrates of another example of a control circuit in a primary controller which can determine the mode of operation of the power converter in response to a drive signal, in accordance with embodiments of the present disclosure.

[0032] **FIG. 17** illustrates one example of mode detection circuit for the control circuit of **FIG. 16**, in accordance with embodiments of the present disclosure.

[0033] **FIG. 18** illustrates an example timing diagram which illustrates a drive signal, a voltage of a mode capacitor, and an operation signal, in accordance with embodiments of the present disclosure.

[0034] Corresponding reference characters indicate corresponding components throughout the several views of the drawings. Skilled artisans will appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to other elements to help to improve understanding of various embodiments of the present invention. Also, common but well-understood elements that are useful or necessary in a commercially feasible embodiment are often not depicted in order to facilitate a less obstructed view of these various embodiments of the present invention.

DETAILED DESCRIPTION

[0035] Examples of a power converter that can transition from a discontinuous conduction mode of operation to a continuous conduction mode of operation in response to a line input voltage are described herein. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be apparent, however, to one having ordinary skill in the art that the specific detail need not be

employed to practice the present invention. In other instances, well-known materials or methods have not been described in detail in order to avoid obscuring the present invention.

[0036] Reference throughout this specification to “one embodiment,” “an embodiment,” “one example,” or “an example” means that a particular feature, structure or characteristic described in connection with the embodiment or example is included in at least one embodiment of the present invention. Thus, appearances of the phrases “in one embodiment,” “in an embodiment,” “one example,” or “an example” in various places throughout this specification are not necessarily all referring to the same embodiment or example. Furthermore, the particular features, structures or characteristics may be combined in any suitable combinations and/or subcombinations in one or more embodiments or examples. Particular features, structures or characteristics may be included in an integrated circuit, an electronic circuit, a combinational logic circuit, or other suitable components that provide the described functionality. In addition, it is appreciated that the figures provided herewith are for explanation purposes to persons ordinarily skilled in the art and that the drawings are not necessarily drawn to scale.

[0037] A power converter such as a flyback converter can provide low output currents at low component cost and is relatively simple in comparison to other converter topologies. The flyback converter may also utilize an active clamp circuit to prevent excess voltage from damaging components within the flyback converter.

[0038] Conduction losses and switching losses occur due to the electrical resistance in the circuit and the parasitic capacitance that is switched by the power converter, particularly when the power switch is a transistor. When the power switch conducts current, the resistance of the circuit along with the current passing in the circuit generates conduction loss. Switching losses are generally associated with the losses, which occur while the power switch of the power converter is transitioning between an ON state and an OFF state or vice versa. In one example, a switch that is ON (or closed) may conduct current while a switch that is OFF (or open) cannot conduct current. When the power switch is open, voltage across the switch stores energy in the parasitic capacitance. The parasitic capacitance discharges when the power switch closes, dissipating the energy stored in the parasitic capacitance in the resistance of the power switch to produce switching loss. Further, switching losses may result from having a non-zero voltage across the power switch at the moment the power switch turns ON or from having a non-zero current through the power switch when the power switch turns OFF. The active clamp circuit may be used to reduce the switching losses through the use of zero voltage switching techniques.

[0039] For a power converter to maintain high efficiency in light load or no load conditions, a power converter controller may implement a burst mode operation by turning on and turning off the power switch for an interval of time (also referred to as a burst interval)

followed by an interval of no switching. For flyback converters with an active clamp, it can be difficult to optimize loop speed, stability and ripple for wide output voltage ranges or designs that require stable constant current (CC) operation. To avoid the complexity of burst mode, the disclosure shows a power converter controller that controls an active clamp and a flyback converter that provides a continuous variable frequency for zero voltage switch (ZVS) without the necessity of burst mode or the complexity of a LC output winding network. The variable frequency can easily be controlled for optimal loop response for output response and line rejection. In addition, the power converter controller can determine whether to operate in a discontinuous conduction mode (DCM) and continuous conduction mode (CCM) in response to a line sense input voltage representative of the input line voltage. In one example, when operating in CCM at lower input voltages, the root mean square (RMS) currents of the power switch is reduced which improves the efficiency of the power converter.

[0040] To illustrate, **FIG. 1** shows a block diagram of an example power converter 100 including a clamp driver 106, a primary controller 133, and a secondary controller 137 in accordance with the teachings of the present disclosure. The illustrated example of the power converter 100 includes an input capacitor C_{IN} 102, an energy transfer element 116, a primary winding 118 of the energy transfer element 116, a secondary winding 120 of the energy transfer element 116, a power switch S1 145, a clamp capacitor C_{CL} 104, diodes 107 and 115, a clamp switch 108, an output capacitor C_O 122, an input return 126, an output return 125, a synchronous rectifier 128, and a sense circuit 131.

[0041] The clamp driver 106 is shown including a low side driver 150 and a high side driver 151. The low side driver 150 is configured to control the high side driver through the communication link 152. The high side driver is configured to generate a clamp enable signal U_{CE} 168 to control the clamp switch 108.

[0042] The secondary controller 137 is configured to generate a secondary drive signal 134 to control the synchronous rectifier 128, and a request signal U_{REQ} 135. The request signal U_{REQ} 135 is communicated to the primary controller to enable the power switch S1 145. Furthermore, the secondary controller 137 is coupled to receive a feedback signal U_{FB} 132 representative of an output of the power converter 100.

[0043] The primary controller 133 is shown comprising a control circuit 139 and a drive circuit 141. The control circuit 139 is coupled to receive the request signal U_{REQ} 135 from the secondary controller 137 and a current sense signal representative of the switch current I_D 143 of the power switch. The control circuit 139 is configured to generate a control signal U_{CTRL} 142 in response to the input line voltage sense signal U_{LS} 149. The control signal U_{CTRL} 142 represents a delay time to turn on the power switch S1 145 after a turn off of the clamp switch 108. The

input line voltage sense signal U_{LS} 149 is representative of an input voltage V_{IN} 101 of the power converter 100. As will be further explained, the delay time of the control signal U_{CTRL} 142 is selected in response to the input line voltage sense signal U_{LS} 149. The drive circuit 141 is coupled to receive the control signal U_{CTRL} 142 and generate a drive signal U_D 144 to control the power switch 145. The drive circuit 141 is further coupled to receive a current sense signal representative of a switch current I_D 143 of the power switch 145. The drive circuit 141 is coupled to turn on the power switch S1 145, and coupled to turn off the power switch S1 145 in response to the switch current I_D 143 reaching the current limit (not shown).

[0044] Further illustrated is a magnetizing inductance L_{MAG} 112, a leakage inductance LLK 114, which may represent the magnetizing and leakage inductance associated with the energy transfer element 116 or a discrete inductor. In dashed lines, a parasitic capacitance C_P 146 is shown to represent all the capacitance that couples to the power switch S1 145 and may include natural capacitance internal to the energy transfer element 116, the natural internal capacitance of power switch S1 145 and/or discrete capacitors. Also shown in **FIG. 1** are a secondary current I_S 121, an output voltage V_O 123, an output current I_O 127, an output quantity U_O 136, a feedback signal U_{FB} 132, a clamp voltage V_{CL} 109, clamp current I_{CL} 110, and a leakage voltage V_L 111. In the illustrated example, the power converter 100 is shown as having a flyback topology. It is appreciated that other known topologies and configurations of power converters may also benefit from the teachings of the present disclosure.

[0045] The power converter 100 provides output power to a load 124 from an unregulated input voltage V_{IN} 101. In one embodiment, the input voltage V_{IN} 101 is a rectified and filtered ac line voltage. In another embodiment, the input voltage V_{IN} 101 is a dc input voltage. The energy transfer element 116 is coupled to receive the input voltage V_{IN} 101. In some embodiments, the energy transfer element 116 may be a coupled inductor, transformer, or an inductor. The example energy transfer element 116 is shown as including two windings, a primary winding 118 (with N_P number of turns) and secondary winding 120 (with N_S number of turns). However, the energy transfer element 116 may have more than two windings. The voltage across the primary winding 118 is illustrated as the primary voltage with the positive polarity at the dot end of the primary winding 118. When the power switch S1 145 is ON, the primary voltage is substantially equal to the negative sum of the input voltage V_{IN} 101 and the leakage voltage V_L 111, or mathematically: $V_P = -(V_{IN} + V_L)$. When the power switch S1 145 is OFF, the primary voltage is substantially equal to the reflected output voltage of the secondary winding 120. The primary winding 118 of the energy transfer element is further coupled to the power switch S1 145 and the power switch S1 145 is further coupled to input return 126.

[0046] In operation, the primary controller 133 determines a first mode of operation in response to the input line voltage sense signal U_{LS} 149. The first mode of operation occurs when the input line voltage sense signal U_{LS} 149 is less than a CCM threshold. In one example, the CCM threshold can be in the range of 130 volts. When the power switch S1 145 is turned off, after being turned on, the drain-source voltage rises at a rate that is determined by the peak current at turn-off of the power switch and the capacitance C_P 146. The drain to source voltage will continue to rise until clamped to the clamp voltage V_{CL} 109 of the clamp capacitor C_{CL} 104 through diode 115. Prior to the turn on of the power switch S1 145, the clamp switch 108 is turned on by the clamp driver 106. The leakage inductance L_{LK} 114 and the primary winding 118 is charged by the clamp capacitor voltage across C_{CL} 104 through the clamp switch 108 in the on state. When the clamp switch 108 is turned on, voltage is applied to the leakage inductance L_{LK} 114 which causes current to rise through in the opposite direction of when the power switch S1 145 was on. After a specified time, clamp switch 108 is turned off. The turn off of the clamp switch 108 causes the drain to source voltage of the power switch S1 145 to fall substantially to zero. During that time, the leakage and energy that had been charged by the clamp switch 108 being on is discharged. After the drain voltage has reach substantially to zero volts the power switch S1 145 can be turned on.

[0047] Furthermore, the primary controller 133 can determine a second mode of operation in response to the input line voltage sense signal U_{LS} 149. The second mode of operation occurs when the input line voltage sense signal U_{LS} 149 is greater than a DCM threshold. In one example the DCM threshold is in the range of 150 volts.

[0048] When the power switch S1 145 is turned off, after being turned on, the drain-source voltage rises at a rate that is determined by the peak current at turn-off of power switch S1 145 and the capacitance C_P 146. The drain to source voltage will continue to rise until clamped to the clamp voltage V_{CL} 109 through diode 115. Prior to the turn on of the power switch S1 145, the clamp switch 108 is turned on by the clamp driver 106. When the clamp switch 108 is turned on, voltage is applied to the leakage inductance L_{LK} 114 and the magnetizing inductance L_{MAG} 112 which causes current to rise through in the opposite direction as compared to when the power switch S1 145 was on. After a specified time, clamp switch 108 is turned off. The turn off clamp switch causes the drain to source voltage of power switch S1 145 to fall substantially to zero. During that time the leakage and magnetizing energy that had been charged by the clamp switch 108 being on is discharged. This causes the voltage across drain to source of the power switch S1 145 to decrease and eventually reach zero. This mode typically takes longer to reach zero volts on the drain of the power switch S1 145 which is accommodated by second mode of operation by increasing the delay between clamp switch 108

turning off and the power switch S1 145 turning on. After the drain voltage has reached substantially to zero volts the main switch is turned on.

[0049] As shown, the leakage inductance L_{LK} 114 may be coupled between the power switch S1 145 and the primary winding 118. The leakage inductance L_{LK} 114 which may represent the leakage inductance associated with the energy transfer element 116 or a discrete inductor. The voltage across the uncoupled leakage inductance L_{LK} 114 may be denoted as the leakage voltage V_L 111.

[0050] Coupled across the primary winding 118 and the leakage inductance L_{LK} 114 is the clamp switch 108. The clamp driver 106 is coupled to the clamp capacitance C_{CL} 104 through the clamp switch 108. The voltage across the clamp capacitance C_{CL} 104 is denoted as the clamp voltage V_{CL} 109 while the current in the clamp circuit is denoted as clamp current I_{CL} 110. The clamp switch 108 limits the maximum voltage on the power switch S1 145 and control of the clamp switch 108 (generated by the clamp driver 106) facilitates zero voltage switching of the power switch S1 145. In addition, the clamp driver 106 in conjunction with the clamp switch 108 may reduce RMS current in the power converter 100. Specifically, the clamp drive signal U_{CD} 147 is received at a high side driver 151 which drives the clamp switch 108 (illustrated as a transistor). The clamp switch 108 is controlled to turn ON to inject current into the primary winding 118. The clamp switch 108 is turned ON for a first duration prior to the power switch S1 145 turning ON. In other words, the clamp switch 108 is not turned ON for the entire duration that the power switch S1 145 is turned off. At or near the beginning of the OFF time of the power switch S1 145, the charge associated with the leakage inductance L_{LK} 114 of the power converter 100 is transferred to the clamp capacitance C_{CL} 104 through the diode 115 and is stored. The diode 115 stops conducting substantially after the net charge associated with leakage inductance L_{LK} 114 of the power converter 100 has been transferred. The clamp switch 108 remains OFF until near the end of the OFF time of the power switch S1 145. Once it is determined that the power switch should turn ON, the clamp switch 108 is turned on for a first duration of time. The transistor of the clamp switch 108 is turned on such that the net charge previously transferred to the clamp capacitance C_{CL} 104 associated with the leakage inductance L_{LK} 114 is transferred to the primary winding 118. As such, the energy associated with the leakage inductance L_{LK} 114 is returned to the system rather than being dissipated. In one example, the leakage inductance L_{LK} 114 represents the leakage inductance of the energy transfer element 116. The clamp switch 108 is controlled such that the leakage energy is reset and returned to the power converter rather than being dissipated.

[0051] Secondary winding 120 is coupled to the synchronous rectifier 128. The current outputted from the secondary winding 120 is illustrated as secondary current I_S 121. Output

capacitor C_O 122 is shown as being coupled to the synchronous rectifier 128 and the output return 125. The power converter 100 further includes circuitry to regulate the output, which is exemplified as output quantity U_O 136. In general, the output quantity U_O 136 can be an output voltage V_O 123, and output current I_O 127, or a combination of the two. A sense circuit 131 is coupled to sense the output quantity U_O 136 and to provide the feedback signal U_{FB} 132, which is representative of the output quantity U_O 136.

[0052] As shown, the secondary controller 137 is coupled to receive the feedback signal U_{FB} 132 and generate a request signal U_{REQ} 135 when the feedback signal U_{FB} 132 is below a regulation threshold. The request signal U_{REQ} 135 is transmitted to the primary controller 133 through a communication link to enable the power switch S1 145. In one example, the primary controller 133 and the secondary controller 137 are galvanically isolated from each other. The communication link can be a magnetic coupling or an optical coupling.

[0053] The primary controller 133 is coupled to receive the current sense signal 167 and generates the drive signal U_D 144 and the clamp enable signal U_{CE} 168. The current sense signal 167 may be representative of the switch current I_D 143 which is received by the power switch S1 145 and may be a voltage signal or a current signal. In addition, the primary controller 133 provides a drive signal U_D 144 to the power switch S1 145 to control various switching parameters to control the transfer of energy from the input of power converter 100 through the energy transfer element 116 to the output of power converter 100. Examples of such parameters may include switching frequency (or period), duty cycle, ON and OFF times of the power switch S1 145, or varying the number of pulses per unit time of the power switch S1 145. In addition, the power switch S1 145 may be controlled such that it has a fixed switching frequency or a variable switching frequency. In one example of variable switching frequency control, the switching frequency may be reduced for light-load or no-load conditions. Previously, it was difficult to achieve zero voltage switching (ZVS) for flyback converters at lower switching frequencies with conventional active clamp techniques where the clamp circuit is turned on for the entire off-time of the power switch.

[0054] Power switch S1 145 is opened and closed in response to the drive signal U_D 144. In operation, the switching of the power switch S1 145 produces a pulsating secondary current I_S 121 which is filtered by the output capacitor C_O 122 to produce a substantially constant output voltage V_O 123, output current I_O 127, or a combination of the two. In one example, the power switch S1 145 may be a transistor such as a metal-oxide-semiconductor field-effect transistor (MOSFET). In another example, the power switch S1 145 may comprise a cascode configuration such that a low voltage transistor is coupled to a high voltage junction field effect transistor (JFET). In one example, the JFET may comprise of gallium nitride (GaN) or silicon

carbide (SiC) material. The primary controller 133, secondary controller 137, and power switch 145 may be implemented as a monolithic integrated circuit or may be implemented with discrete electrical components or a combination of discrete and integrated components.

[0055] FIG. 2 illustrates a diagram of current through the power switch S1 145 of FIG. 1 for various modes of control including a switch on-time t_{ON} 269, switch off-time t_{OFF} 270, a switching period T_S 271, a trapezoidal shape 272, and triangular shape 273. FIG. 2 illustrates the general waveforms of the current through the power switch S1 145 over time in both continuous conduction mode (CCM) and discontinuous conduction mode (DCM).

[0056] During any switching period T_S 271, power switch S1 145 may conduct in response to the drive signal U_D 144 from the primary controller 133 to regulate the output quantity U_O 136. The switching period T_S 271 may be separated into two sections of time: switch on-time t_{ON} 269 and switch off-time t_{OFF} 270. Switch on-time t_{ON} 269 denotes the portion of the switching period T_S 271 which the power switch S1 145 is conducting. Switch off-time t_{OFF} 270 denotes the remaining portion of the switching period T_S 271 when the power switch S1 145 is not conducting. The current waveform of FIG. 2 shows two fundamental modes of operation. The trapezoidal shape 272 is characteristic of CCM, whereas the triangular shape 273 is characteristic of DCM. During CCM, the current through the power switch S1 145 is substantially non-zero immediately after the start of the switch on-time t_{ON} 269 and steadily increases throughout the switch on-time t_{ON} 269. During DCM, the current through the power switch S1 145 is substantially zero at the beginning of the switch on-time t_{ON} 269, and steadily increases from zero throughout the switch on-time t_{ON} 269.

[0057] FIG. 3 illustrates one example of a control circuit used in FIG. 1, in accordance with embodiments of the present disclosure. It is appreciated that control circuit 339 of FIG. 3 may be one example of control circuit 139 of FIG. 1, and that similarly named and numbered elements referenced below are coupled and function similar to as described above.

[0058] The control circuit 339 includes an enable circuit 305, flip flops 315, 375, a set-reset (SR) latch 338, comparators 317, 319, a delay circuit 360, and a monostable multivibrator 307. The delay circuit 360 comprises a first switch 358, a second switch 359, a first delay circuit 361, and a second delay circuit 362.

[0059] The control circuit 339 can select the control signal U_{CTRL} 342, which is representative of the delay time to turn on the power switch. The delay time depends on the mode of operation of the power converter, which is in response to the input line voltage sense signal U_{LS} 349, the input line voltage sense signal is representative of the line input voltage. The comparator 317 is coupled to receive the input line voltage sense signal U_{LS} 349 at the inverting input and a CCM threshold V_{CCM} 365 at the non-inverting input. Comparator 317 is configured

to generate an output with a first state when the input line voltage sense signal U_{LS} 349 is less than the CCM threshold V_{CCM} 365, and further generates the output with a second state when the input line voltage sense signal U_{LS} 349 is not less than the CCM threshold V_{CCM} 365. The output of comparator 317 is coupled to the set input of the SR latch 338. The SR latch 338 is configured to output a first state of a first mode of operation signal U_{M1} 363 in response to the set input. In the example of **FIG. 3**, the first state of the first mode of operation signal U_{M1} 363 can be a logic high. The first mode of operation represents a CCM operation of the power converter. The SR latch 338 is further configured to output a second mode of operation signal U_{M2} 364 at the inverted output of the SR latch 338. In the example of **FIG. 3**, the first state of the second mode of operation signal U_{M2} 364 can be a logic low.

[0060] Comparator 319 is coupled to receive the input line voltage sense signal U_{LS} 349 at the non-inverting input and a DCM threshold V_{DCM} 366 at the inverting input. Comparator 319 is configured to generate an output with a first state when the input line voltage sense signal U_{LS} 349 is greater than the DCM threshold V_{DCM} 366, and further generates the output with a second state when the input line voltage sense signal U_{LS} 349 is not greater than the DCM threshold V_{DCM} 366. The output of comparator 319 is coupled to the reset input of the SR latch 338. The SR latch 338 is configured to output the second state of the first mode of operation signal U_{M1} 364 in response to the reset input. In the example of **FIG. 3**, the second state of the first mode of operation signal U_{M1} 363 can be a logic low. The SR latch 338 is further configured to output the second mode of operation signal U_{M2} 364 at the inverted output of the SR latch 338. In the example of **FIG. 3**, the second state of the second mode of operation signal U_{M2} 364 can be a logic high. The second mode of operation represents a DCM operation of the power converter.

[0061] Prior to the turn on of the power switch, control circuit 339 turns on the clamp switch to discharge the clamp capacitor. The enable circuit 305 is coupled to receive the request signal U_{REQ} 135 and configured to generate the enable signal U_{EN} 374. The request signal U_{REQ} 337 is representative of a determination to turn on the power switch. The monostable multivibrator 307 is coupled to the enable circuit 305. The monostable multivibrator 307 is configured to output a pulse for a first duration, wherein the first duration begins near an end of an off time of the power switch in response to a determination to turn on the power switch through the request signal U_{REQ} 337. The pulse is represented by a clamp drive signal U_{CD} 347. After the duration of the pulse ends, the flip flop 315 is configured to generate a first logic state in response to the clamp drive signal U_{CD} 347. The output of flip flop 315 is coupled to switches 358 and 359. The switch 359 is closed by the first mode of operation signal U_{M1} 359, and the flip flop 375 is clocked by the output of the first delay circuit 361. The first delay circuit

361 outputs a first delay, which is the control signal U_{CTRL} 342. The switch 358 is closed by the second mode of operation signal U_{M2} 364, and the flip flop 375 is clocked by the output of the second delay circuit 362. The second delay circuit 362 outputs a second delay, which is the control signal U_{CTRL} 342. The second delay time is greater than the first delay. In one example, the first delay time can be in the range of 50ns and the second delay time can be in the range from 200ns. In the first mode of operation, the first delay time accounts for the time of the leakage inductance to bring the drain to source voltage of the power switch to substantially zero. In the second mode of operation, the second delay time accounts for the time of the leakage inductance and the magnetizing inductance to bring the drain to source voltage of the power switch to substantially zero.

[0062] FIG. 4A illustrates a timing diagram illustrating a drain-source voltage, a clamp current, a switch current of the power switch, a secondary current, an enable signal, and a drive signal. It is appreciated that the signals mentioned of **FIG. 4A** may be one example of signals of **FIG. 1**, and that similarly named and numbered elements referenced below are coupled and function similar to as described above.

[0063] The first timing diagram illustrates a drain to source voltage V_{DS} 453. The second timing diagram illustrates a clamp current I_{CL} 410. The third timing diagram illustrates a switch current I_D 443. The fourth timing diagram illustrates a secondary current I_S 421. The fifth timing diagram illustrates clamp enable signal U_{CE} 468. The sixth timing diagram illustrates a drive signal U_D 444.

[0064] In the example of **FIG.4A**, the mode of operation for the power converter is critical conduction mode (CRM), signified by the triangular shape of the switch current I_D 443. CRM can occur when the line sense input voltage is above the CCM threshold, but below the DCM threshold. In some designs, CRM is capable of using the control signal generated by either the first delay circuit or the second delay circuit as discussed in **FIG.3**. At time before t_1 , the power switch is turned on, such that the drain to source voltage V_{DS} 453 is zero. The clamp current I_{CL} 410 is zero. The switch current I_D 443 is rising. The secondary current I_S 421 is zero. The clamp enable signal U_{CE} 468 is zero. The drive signal U_D 444 is a logic high.

[0065] At time t_1 , the power switch is turned off, as denoted by the drive signal U_D 444 is a logic low. As a result, the drain to source voltage V_{DS} 453 rises to the input voltage plus the clamp voltage. The clamp capacitor is being charged as denoted by the clamp current I_{CL} 410. Energy stored in the energy transfer element is transferred from the primary winding to the secondary winding as shown by the linearly decreasing waveform of the secondary current I_S 421. After t_1 and before t_2 , the drain to source voltage V_{DS} 453 rises and is equal to the input voltage plus the clamp voltage. The clamp capacitor continues charging as denoted by the

clamp current I_{CL} 410 decaying to zero. The drive signal U_D 444 is logic low, therefore the switch current I_D 443 is also zero.

[0066] At time t_2 , drain to source voltage V_{DS} 453 reduces to the input voltage plus the reflected output voltage of the secondary winding. The clamp current I_{CL} 410 is zero, signifying the clamp capacitor is no longer being charged. The switch current I_D 443 is zero as energy was transferred by the primary winding to the secondary winding. The secondary current I_S 421 is a non-zero value and reducing in a linear fashion. The clamp enable signal U_{CE} 468 is logic low. The drive signal U_D 444 is logic low. At time between t_2 to t_3 , the drain to source voltage V_{DS} 453 is a non-zero value and with a slope of zero representing that the synchronous rectifier is conducting. The clamp current I_{CL} 410 is zero. The secondary current I_S 421 is decreasing linearly. The clamp enable signal U_{CE} 468 is logic low. The drive signal U_D 444 is logic low.

[0067] At time t_3 , the clamp driver generates a clamp enable signal U_{CE} 468 to turn on the clamp switch prior to the turn of the power switch. The drain to source voltage V_{DS} 453 rises to the clamp voltage plus the input voltage. The clamp capacitor discharges as denoted by the negative polarity of the clamp current I_{CL} 410 due to energy being transferred to the secondary winding of the energy transfer element. The switch current I_D 443 is zero. The secondary current I_S 421 begins to increase due to the turn of the clamp switch. The drive signal U_D 444 is logic low as the power switch is off.

[0068] At time t_4 , the clamp enable signal U_{CE} 468 transitions to logic low. The clamp current I_{CL} 410 drops to zero. The switch current I_D 443 is zero. The drain to source voltage V_{DS} 453 reduces toward the input voltage. The drive signal U_D 444 is logic low.

[0069] The time between t_4 and time t_5 represents the second delay time as discussed in FIG.3, shown as by t_{DEL2} . With respect to **FIG. 3**, the second delay time is represented as T_B of second delay circuit 362. The magnetizing inductance and the leakage inductance reduces the drain to source voltage V_{DS} 453 to zero to provide zero voltage switching. In other examples for CRM, the leakage inductance can reduce the drain to source voltage V_{DS} 453 to zero to provide ZVS of the power switch. The clamp current I_{CL} 410 is zero. The switch current I_D 443 is zero. The secondary current I_S 421 is zero. The clamp enable signal U_{CE} 468 is logic low. The drive signal U_D 444 is logic low.

[0070] At time t_5 , is the end of the delay time t_{DEL2} . The drain to source voltage V_{DS} 453 is zero, and the power switch is turned on as denoted by the drive signal U_D 444 transitioning to logic high. The clamp current I_{CL} 410 is zero. The switch current I_D 443 begins to increase linearly. The secondary current I_S 421 is zero. The clamp enable signal U_{CE} 468 is logic low.

[0071] At time after t_5 and before t_6 , the power switch is on as denoted by the logic high of the drive signal U_D 444. The drain to source voltage V_{DS} 453 is zero. The switch current I_D

443 rises linearly. In one example, the switch current I_D 443 continues to rise until it hits the current limit (not shown). The secondary current I_S 421 is zero. The clamp enable signal U_{CE} 468 is zero.

[0072] At time t_6 , the power switch is turned off, as denoted by the drive signal U_D 444 is a logic low. As a result, the drain to source voltage V_{DS} 453 rises to the input voltage plus the clamp voltage. The clamp capacitor is being charged as denoted by the clamp current I_{CL} 410. Energy stored in the energy transfer element is transferred from the primary winding to the secondary winding as shown by the linearly increasing waveform of the secondary current I_S 421. After t_1 and before t_2 , the drain to source voltage is equal to the input voltage plus the clamp voltage. The clamp capacitor is still charging as denoted by the clamp current I_{CL} 410 decaying to zero. The drive signal U_D 444 is logic low, therefore the switch current I_D 443 is also zero.

[0073] FIG. 4B illustrates a timing diagram illustrating a drain-source voltage, a clamp current, a switch current of the power switch, a secondary current, a clamp enable signal, and a drive signal. It is appreciated that the signals mentioned of FIG. 4B may be one example of signals of FIG. 1, and that similarly named and numbered elements referenced below are coupled and function similar to as described above.

[0074] The first timing diagram illustrates a drain to source voltage V_{DS} 453. The second timing diagram illustrates a clamp current I_{CL} 410. The third timing diagram illustrates a switch current I_D 443. The fourth timing diagram illustrates a secondary current I_S 421. The fifth timing diagram illustrates clamp enable signal U_{CE} 468. The sixth timing diagram illustrates a drive signal U_D 444.

[0075] In the example of FIG. 4B, the mode of operation for the power converter is CCM, signified by the trapezoidal shape of the switch current I_D 443. At time before t_1 , the power switch is turned on, such that the drain to source voltage V_{DS} 453 is zero. The clamp current I_{CL} 410 is zero. The switch current I_D 443 is rising. The secondary current I_S 421 is zero. The clamp enable signal U_{CE} 468 is zero. The drive signal U_D 444 is a logic high.

[0076] At time t_1 , the power switch is turned off, as denoted by the drive signal U_D 444 transitioning to a logic low. As a result, the drain to source voltage V_{DS} 453 rises to the input voltage plus the clamp voltage. The clamp capacitor is being charged as denoted by the clamp current I_{CL} 410. Energy stored in the energy transfer element is transferred from the primary winding to the secondary winding as shown by the increase in secondary current I_S 421. After t_1 and before t_2 , the drain to source voltage V_{DS} 453 is equal to the input voltage plus the clamp voltage. The clamp capacitor continues charging as denoted by the clamp current I_{CL} 410 decaying to zero. The secondary current I_S 421 rises as energy is transferred from the primary

winding to the secondary winding. The drive signal U_D 444 is logic low, therefore the switch current I_D 443 is also zero.

[0077] At time t_2 , the drain to source voltage V_{DS} 453 reduces to the input voltage plus the reflected output voltage of the secondary winding. The clamp current I_{CL} 410 is zero, indicating the clamp capacitor is no longer being charged. The switch current I_D 443 is zero as energy was transferred by the primary winding to the secondary winding. The secondary current I_S 421 is a non-zero value and reducing in a linear fashion. The clamp enable signal U_{CE} 468 is logic low. The drive signal U_D 444 is logic low. At time between t_2 to t_3 , the drain to source voltage V_{DS} 453 is a non-zero value and with slope of zero representing that the synchronous rectifier is conducting. The clamp current I_{CL} 410 is zero. The secondary current I_S 421 is decreasing linearly. The clamp enable signal U_{CE} 468 is logic low. The drive signal U_D 444 is logic low.

[0078] At time t_3 , the clamp driver generates a clamp enable signal U_{CE} 468 to turn on the clamp switch prior to the turn of the power switch. The drain to source voltage V_{DS} 453 rises to the clamp voltage plus the input voltage. The clamp capacitor discharges as denoted by the negative polarity of the clamp current I_{CL} 410 due to energy being transferred from the primary winding to the secondary winding of the energy transfer element. The secondary current I_S 421 is non zero and rises slightly due to energy stored in the clamp capacitor being transferred to the secondary. The switch current I_D 443 is zero. The drive signal U_D 444 is logic low as the power switch is off.

[0079] At time t_4 , the clamp enable signal U_{CE} 468 transitions to logic low. The drain to source voltage V_{DS} 453 is decaying quickly to zero. The clamp current I_{CL} 410 is zero. The switch current I_D 443 is zero. The drive signal U_D 444 is logic low.

[0080] The time between t_4 and time t_5 represents the first delay time as discussed in **FIG.3** shown as time T_A of first delay circuit 361, and illustrated as T_{DEL1} in **FIG. 4B**. The discharging of the leakage inductance reduces to the drain to source voltage V_{DS} 453 to zero to provide ZVS of the power switch. The clamp current I_{CL} 410 is zero. The switch current I_D 443 is zero. The secondary current I_S 421 is decreasing toward zero. The clamp enable signal U_{CE} 468 is logic low. The drive signal U_D 444 is logic low.

[0081] At time t_5 , the drain to source voltage V_{DS} 453 is zero, and the power switch is turned on as denoted by the drive signal U_D 444 transitioning to logic high. The clamp current I_{CL} 410 is zero. The switch current I_D 443 begins to increase linearly. The secondary current I_S 421 is zero. The clamp enable signal U_{CE} 468 is logic low.

[0082] At time after t_5 and before t_6 , the power switch is on as denoted by the logic high of the drive signal U_D 444. The drain to source voltage V_{DS} 453 is zero. The switch current I_D

443 continues to rise linearly. In one example, the switch current I_D 443 continues to rise until it hits the current limit (not shown). The secondary current I_S 421 is zero. The clamp enable signal U_{CE} 468 is zero.

[0083] At time t_6 , the power switch is turned off, as denoted by the drive signal U_D 444 transitioning to a logic low. As a result, the drain to source voltage V_{DS} 453 rises to the input voltage. The clamp capacitor is being charged as denoted by the clamp current I_{CL} 410. Energy stored in the energy transfer element is transferred from the primary winding to the secondary winding as shown by the increase in secondary current I_S 421. After t_6 , the drain to source voltage V_{DS} 453 rises to the input voltage plus the clamp voltage. The clamp capacitor continues charging as denoted by the clamp current I_{CL} 410 decaying to zero. The drive signal U_D 444 is logic low, therefore the switch current I_D 443 is also zero.

[0084] FIG. 4C illustrates a timing diagram illustrating a drain-source voltage, a clamp current, a switch current of the power switch, a secondary current, a clamp enable signal, and a drive signal. It is appreciated that the signals mentioned of FIG. 4C may be one example of signals of FIG. 1, and that similarly named and numbered elements referenced below are coupled and function similar to as described above.

[0085] The first timing diagram illustrates a drain to source voltage V_{DS} 453. The second timing diagram illustrates a clamp current I_{CL} 410. The third timing diagram illustrates a switch current I_D 443. The fourth timing diagram illustrates a secondary current I_S 421. The fifth timing diagram illustrates a clamp enable signal U_{CE} 468. The sixth timing diagram illustrates a drive signal U_D 444.

[0086] In the example of FIG. 4C, the mode of operation for the power converter is DCM, signified by the triangular shape of the switch current I_D 443. At time before t_1 , the power switch is turned on, such that the drain to source voltage V_{DS} 453 is zero. The clamp current I_{CL} 410 is zero. The switch current I_D 443 is rising. The secondary current I_S 421 is zero. The clamp enable signal U_{CE} 468 is zero. The drive signal U_D 444 is a logic high.

[0087] At time t_1 , the power switch is turned off, as denoted by the drive signal U_D 444 is a logic low. As a result, the drain to source voltage V_{DS} 453 rises to the input voltage. The clamp capacitor charges as denoted by the clamp current I_{CL} 410. Energy stored in the energy transfer element is transferred from the primary winding to the secondary winding as shown by the sharp increase of the secondary current I_S 421. After t_1 and before t_2 , the drain to source voltage V_{DS} 453 rises to the input voltage plus the clamp voltage. The clamp capacitor continues charging as denoted by the clamp current I_{CL} 410 decaying to zero. The drive signal U_D 444 is logic low, therefore the switch current I_D 443 is also zero.

[0088] At time t_2 , the drain to source voltage V_{DS} 453 reduces to the input voltage plus the reflected output voltage of the secondary winding. The clamp current I_{CL} 410 is zero, signifying the clamp capacitor is no longer being charged. The switch current I_D 443 is zero as energy was transferred from the primary winding to the secondary winding. The secondary current I_S 421 is a non-zero value and reducing in a linear fashion. The clamp enable signal U_{CE} 468 is logic low. The drive signal U_D 444 is logic low. At time between t_2 to t_3 , the drain to source voltage V_{DS} 453 is a non-zero value and with slope of zero representing that the synchronous rectifier is conducting. The clamp current I_{CL} 410 is zero. The secondary current I_S 421 decreases linearly. The clamp enable signal U_{CE} 468 is logic low. The drive signal U_D 444 is logic low.

[0089] At time t_3 , the drain to source voltage V_{DS} 343 begins to oscillate caused by completion of energy transfer from the primary winding and the secondary winding, such that the secondary current I_S 421 is zero. The oscillation is caused by the resonant tank formed by the leakage and magnetizing inductances and the resonant capacitance of the power switch. At time t_4 , the drain to source voltage V_{DS} 453 is at peak value and the clamp driver generates a clamp enable signal U_{CE} 468 to turn on the clamp switch prior to the turn of the power switch which causes the drain to source voltage V_{DS} 453 to rise to the input voltage plus the clamp voltage again. The clamp capacitor discharges as denoted by the negative polarity of the clamp current I_{CL} 410 due to energy being transferred from the clamp capacitor through the primary winding to the secondary winding of the energy transfer element. The switch current I_D 443 is zero. The secondary current I_S 421 begins to increase due to the turn on of the clamp switch, signifying energy stored from the clamp capacitor is transferred to the secondary winding through the primary winding. The drive signal U_D 444 is logic low as the power switch is off.

[0090] At time t_5 , the clamp enable signal U_{CE} 468 transitions to logic low. The clamp current I_{CL} 410 drops to zero. The switch current I_D 443 is zero. The drain to source voltage V_{DS} 453 reduces towards zero. The drive signal U_D 444 is logic low.

[0091] The time between t_5 and before time t_6 represents the delay time as discussed in **FIG.3** as delay T_B of second delay circuit 362, as shown by t_{DEL2} . Although the drain to source voltage V_{DS} 453 is decreasing towards zero, the leakage inductance causes a slight increase momentarily. For DCM operation, the leakage inductance and the magnetizing inductance can reduce the drain to source voltage V_{DS} 453 to zero to provide zero voltage switching. The clamp current I_{CL} 410 is zero. The switch current I_D 443 is zero. The secondary current I_S 421 is zero. The clamp enable signal U_{CE} 468 is logic low. The drive signal U_D 444 is logic low.

[0092] At time t_6 , the drain to source voltage V_{DS} 453 is zero, and the power switch is turned on as denoted by the drive signal U_D 444 transitioning to logic high. The clamp current

I_{CL} 410 is zero. The switch current I_D 443 begins to increase linearly. The secondary current I_S 421 is zero. The clamp enable signal U_{CE} 468 is logic low.

[0093] At time after t_6 and before t_7 , the power switch is on as denoted by the logic high of the drive signal U_D 444. The drain to source voltage V_{DS} 453 is zero. The switch current I_D 443 rises linearly. In one example, the switch current continues to rise until it hits the current limit (not shown). The secondary current I_S 421 is zero. The clamp enable signal U_{CE} 468 is zero.

[0094] At time t_7 , the power switch is turned off and the behavior is the same as after time t_1 , described before.

[0095] FIG. 5A illustrates an example of a timing diagram that illustrates signals of a power converter such as a drain voltage, an enable signal, and a drive signal, in accordance with embodiments of the present disclosure. It is appreciated that the signals mentioned in FIG. 5A may be one example of signals from previous figures and that similarly named and numbered elements referenced below are coupled and function similar to as described above. It should also be appreciated that the signals mentioned in FIG. 5A may be one example of signals in upcoming figures and that similarly named and numbered elements referenced couple and function similar to as described above and below.

[0096] The first timing diagram is a drain to source voltage V_{DS} 553. The second timing diagram is a clamp enable signal U_{CE} 568. The third timing diagram is a drive signal U_D 544. The operation of the power converter is CRM, but could also be CCM. As mentioned previously, CRM can occur when the line sense input voltage is above the CCM threshold, but below the DCM threshold. In some designs, CRM is capable of using the control signal generated by either the first delay circuit or the second delay circuit.

[0097] At time before t_1 , the drive signal U_D 544 is logic high, which signifies the power switch is turned on. The drain to source voltage V_{DS} 553 is zero. The clamp enable signal U_{CE} 568 is logic low. At time t_1 , the drive signal U_D 544 transitions to logic low, which signifies the power switch is turned off. The drain to source voltage V_{DS} 553 rises to the input voltage. At after time t_1 and before t_2 , the drain to source voltage V_{DS} 553 rises to the clamp voltage plus the input voltage. At time t_2 , the drain to source voltage V_{DS} 553 reduces to the input voltage plus the reflected output voltage of the secondary winding. At time t_3 , the clamp enable signal U_{CE} 568 transitions to a logic high. The drain to source voltage V_{DS} 553 rises to the clamp voltage because the clamp switch is turned on. At time after t_3 and before t_4 , the drain to source voltage V_{DS} 553 begins to decrease. The clamp enable signal U_{CE} 568 is logic high. The drive signal U_D 544 is logic low.

[0098] At time t_4 , the clamp enable signal U_{CE} 568 transitions to a logic low. The drain to source voltage V_{DS} 553 reduces towards zero. After time t_4 and before t_5 represents the first delay time t_{DEL1} generated as the control signal prior to the turn on of the power switch. It should be appreciated that in one example the first delay time T_{DEL1} is also referred to as delay T_A of first delay circuit 361 in FIG. 3. At time t_5 , the drain to source voltage V_{DS} 553 is at zero. The drive signal U_D 544 transitions to a logic high. At time after t_5 and before t_6 , the drain to source voltage V_{DS} 553 is zero. The clamp enable signal U_{CE} 568 is zero. The drive signal U_D 544 is logic high. At time t_6 , the drive signal U_D 544 transitions to logic low, which signifies the power switch is turned off. The drain to source voltage V_{DS} 553 rises to the input voltage. At after time t_6 and before t_7 , the drain to source voltage V_{DS} 553 rises to the clamp voltage plus the input voltage. At time t_7 , the drain to source voltage V_{DS} 553 reduces to the input voltage plus the reflected output voltage of the secondary winding.

[0099] FIG. 5B illustrates an example of a timing diagram that illustrates signals of a power converter such as a drain voltage, an enable signal, and a drive signal, in accordance with embodiments of the present disclosure. It is appreciated that the signals mentioned of FIG. 5B may be one example of signals from previous figures, and that similarly named and numbered elements referenced below are coupled and function similar to as described above. It should also be appreciated that the signals mentioned in FIG. 5B may be one example of signals in upcoming figures and that similarly named and numbered elements referenced couple and function similar to as described above and below.

[00100] The power converter is operating in DCM. The first timing diagram is a drain to source voltage V_{DS} 553. The second timing diagram is a clamp enable signal U_{CE} 568. The third timing diagram is a drive signal U_D 544.

[00101] At time before t_5 , the power switch is turned on, such that the drain to source voltage V_{DS} 553 is zero. The drive signal U_D 544 is logic high. The clamp enable signal U_{CE} 568 is logic low.

[00102] At time t_5 , the power switch is turned off, as denoted by the drive signal U_D 544 is a logic low. As a result, the drain to source voltage V_{DS} 553 rises to the input voltage. The clamp enable signal U_{CE} 568 is logic low. After t_5 and before t_6 , the drain to source voltage V_{DS} 553 rises to the input voltage plus the clamp voltage. Afterwards, the drain to source voltage begins to oscillate that is caused by completion of energy transfer from the primary winding to the secondary winding. The oscillation is caused by the resonant tank formed by the leakage and magnetizing inductances and the resonant capacitance of the power switch. The drive signal U_D 444 is logic low. The clamp enable signal U_{CE} 568 is logic low.

[00103] At time t_6 , the clamp enable signal U_{CE} 568 becomes logic high. The drain to source voltage V_{DS} 553 is clamped by the clamp capacitor and the input voltage. At time t_7 , the clamp enable signal U_{CE} 568 becomes logic low. The drain to source voltage V_{DS} 553 reduces towards zero. After time t_7 and before t_8 represents the delay t_{DEL2} generated as the control signal prior to the turn on of the power switch. It should be appreciated that in one example the second delay time T_{DEL2} is also referred to as delay T_B of second delay circuit 362 in FIG. 3. At time t_8 , the drain to source voltage V_{DS} 553 is at zero. The drive signal U_D 544 transitions to a logic high. At time t_8 , the power switch is turned on, such that the drain to source voltage V_{DS} 553 is zero. The drive signal U_D 544 is logic high until time t_9 . The clamp enable signal U_{CE} 568 is logic low until time t_9 . At time t_9 , the drive signal U_D 544 becomes logic low and power switch is turned off, and the drain to source voltage V_{DS} 553 starts to rise.

[00104] FIG. 6A illustrates an example timing diagram of a drain voltage of a power switch, in accordance with embodiments of the present disclosure. It is appreciated that the signals mentioned of FIG. 6A may be one example of signals of previous figures, and that similarly named and numbered elements referenced below are coupled and function similar to as described above. It should also be appreciated that the signals mentioned in FIG. 6A may be one example of signals in upcoming figures and that similarly named and numbered elements referenced couple and function similar to as described above and below.

[00105] In FIG. 6A, the drain to source voltage V_{DS} 653 is representative of a power converter operating in CCM. The delay time t_{DEL1} represented by time t_1 to time t_2 , is the delay between the clamp switch turning off and the power switch turning on. It should be appreciated that in one example the first delay time T_{DEL1} is also referred to as delay T_A of first delay circuit 361 in FIG. 3. As mentioned previously, only the energy from the leakage inductance can be used to bring the drain to source voltage V_{DS} 653 to zero. After time t_2 , the dashed line of the drain-source voltage V_{DS} will increase sharply if the power switch does not turn on caused by the resonant tank of the leakage inductance and the resonant capacitance of the power switch.

[00106] FIG. 6B illustrates another example timing of a drain voltage of a power switch, in accordance with embodiments of the present disclosure. It is appreciated that the signals mentioned of FIG. 6B may be one example of signals of previous figures, and that similarly named and numbered elements referenced below are coupled and function similar to as described above. It should also be appreciated that the signals mentioned in FIG. 6B may be one example of signals in upcoming figures and that similarly named and numbered elements referenced couple and function similar to as described above and below.

[00107] The drain to source voltage V_{DS} 653 is representative of a power converter operating in DCM. The delay time t_{DEL2} represented by time $t1$ to time $t2$, represents the delay between the clamp switch turning off and the power switch turning on. It should be appreciated that in one example the second delay time T_{DEL2} is also referred to as delay T_B of second delay circuit 362 in FIG. 3. The second delay time t_{DEL2} is longer than the first delay time in t_{DEL1} in **FIG. 6A**. The energy from the leakage inductance and the magnetizing inductance can be used to bring the drain to source voltage V_{DS} 653 to zero. After time $t2$, the dashed line of the drain-source voltage increases sharply if the power switch does not turn on is caused by the resonant tanking comprising of the leakage and the magnetizing inductances and the resonant capacitance of the power switch .

[00108] **FIG. 6C** illustrates another example of a timing diagram drain voltage of a power switch, in accordance with embodiments of the present disclosure. It is appreciated that the signals mentioned of **FIG. 6C** may be one example of signals of previous figures, and that similarly named and numbered elements referenced below are coupled and function similar to as described above. It should also be appreciated that the signals mentioned in **FIG. 6C** may be one example of signals in upcoming figures and that similarly named and numbered elements referenced couple and function similar to as described above and below.

[00109] The drain to source voltage V_{DS} 653 is representative of a power converter operating in DCM. The delay time t_{DEL2} represented by time $t1$ to time $t2$, represents the delay between the clamp switch turning off and the power switch turning on. It should be appreciated that in one example the second delay time T_{DEL2} is also referred to as delay T_B of second delay circuit 362 in FIG. 3. Prior to time $t1$, the oscillation of the drain to source V_{DS} 653 represents the end of secondary of conduction caused by the resonant tank of the leakage inductance and the output capacitance. The time t_{DEL2} represents the time before turning on the power switch. The energy from the leakage inductance and the magnetizing inductance can be used to bring the drain to source voltage V_{DS} 653 to zero. The benefit of using the magnetizing inductance to reduce the drain to source voltage V_{DS} 653 allows for minimal overshoot of a drain to source voltage of a synchronous rectifier.

[00110] **FIG. 7** illustrates a timing diagram of a drain voltage of a power switch, in accordance with embodiments of the present disclosure. It is appreciated that the signals mentioned of **FIG. 7** may be one example of signals of previous figures, and that similarly named and numbered elements referenced below are coupled and function similar to as described above. It should also be appreciated that the signals mentioned in **FIG. 7** may be one example of signals in upcoming figures and that similarly named and numbered elements referenced couple and function similar to as described above and below.

[00111] The timing diagram illustrates a drain to source voltage V_{DS} 753 that rises to the voltage V_{CL1} 710 which is equal to the clamp voltage V_{CL} 709 plus the input voltage V_{IN} 701 when the power switch is turned off, and reaches zero at t_2 . At time t_1 , when the clamp switch turns off, the energy stored in the leakage inductance is $L_{LK}I^2$ with respect to V_{CL} . The turn off the clamp switch causes current into the resonant capacitor and begins to charge negatively with respect to the clamp voltage. Depending on the application, the peak current of the power switch is defined. When the peak current of the power switch has been defined, and the amount of energy that will charge the clamp capacitor can be determined, and the leakage inductance to achieve ZVS can be defined by $L_{LK} = (C_{RES} * V_{CL1}^2) / (0.65 * I_{LIMPK})^2$. The capacitor C_{RES} is the capacitance of the power switch, and I_{LIMPK} is the peak current of the switch. The time from t_1 to t_2 represents the time for ZVS to occur is a function of the resonant period formed by the leakage inductance and the resonant capacitance and the theoretical unclamped voltage amplitude of the ring V_{TOTAL} can be defined by

$$t_{ZVS} = \frac{\pi \sqrt{L_{LK} \times C_{RES}}}{2 \times \sin^{-1} \frac{V_{CL1}}{V_{LK}}} \quad (1)$$

[00112] At time t_3 , if the power switch is not turned on the resonant tank formed by the leakage inductance and the output capacitance of the power switch can cause the drain to source voltage to rise rapidly.

[00113] **FIG. 8** illustrates a timing diagram of a drain voltage of a synchronous rectifier switch, and a drain voltage of a power switch, in accordance with embodiments of the present disclosure. It is appreciated that the signals mentioned of **FIG. 8** may be one example of signals mentioned in previous figures, and that similarly named and numbered elements referenced below are coupled and function similar to as described above. It should also be appreciated that the signals mentioned in **FIG. 8** may be one example of signals in upcoming figures and that similarly named and numbered elements referenced couple and function similar to as described above and below.

[00114] The first timing diagram illustrates a drain to source voltage V_{SR} 855 of the synchronous rectifier. The second timing diagram illustrates a drain to source voltage V_{DS} 853 of the power switch. The drain to source voltage V_{SR} 855 of the synchronous rectifier and the drain to source voltage V_{DS} 853 of the power switch can be reflections of each other. In other words, when the drain to source voltage V_{DS} 853 of the power switch is zero, the drain to source voltage V_{SR} 855 of the synchronous rectifier is positive. When the drain to source voltage V_{DS} 853 of the power switch is positive, the drain to source voltage V_{SR} 855 of the synchronous rectifier is zero.

[00115] In **FIG. 8**, the operation of the power converter is DCM. At time t_1 , the drain to source voltage V_{SR} 855 of the synchronous rectifier is zero as the synchronous rectifier switch is switched on, while the drain to source voltage V_{DS} 853 of the power switch is at the input voltage plus the clamp voltage when the power switch is off. Prior to the turn of the power switch, the clamp switch is enabled to bring the drain to source voltage V_{DS} 853 of the power switch to zero. As such the energy is stored in the leakage and magnetizing inductance. When the clamp switch is turned off, the leakage inductance reduces the drain to source voltage V_{DS} 853 from the input voltage plus the clamp voltage to a lower value that is clamped by the magnetizing inductance which is represented by the small oscillation in voltage. The discharging of the magnetizing inductance continues to reduce the drain to source voltage V_{DS} 853 of the power switch all the way to zero. The dashed line of the drain to source voltage V_{DS} 853 of the power switch represents the resonant tank that would cause the drain to source voltage V_{DS} 853 to oscillate if the power switch was not turned on.

[00116] At time t_2 , the power switch is turned on when the drain to source voltage V_{DS} 953 of the power switch is zero, which provides a minimal overshoot of the synchronous rectifier.

[00117] Referring now to **FIG. 9**, an example power converter 900 is illustrated including a clamp driver 906, a primary controller 933, and a secondary controller 937 in accordance with the teachings of the present disclosure. The illustrated example of the power converter 900 includes an input capacitor C_{IN} 902, an energy transfer element 916, a primary winding 918 of the energy transfer element 916, a secondary winding 920 of the energy transfer element 916, a power switch S_1 945, a clamp capacitor C_{CL} 904, diodes 907 and 915, a clamp switch 908, an output capacitor C_O 922, an input return 926, an output return 925, a synchronous rectifier 928, and a sense circuit 931. It should be appreciated that the similarly named and numbered elements couple and function as described above and below. In particular, the power converter 900 shares many similarities with power converter 100 shown in **FIG. 1**, at least one difference however, is the secondary controller 937 is shown as coupled to the secondary winding 920 and configured to receive forward signal UFWD 970 representative of a voltage of the secondary winding 920. The forward signal UFWD 970 is also representative of a voltage of the synchronous rectifier 928. It should be further appreciated that although a synchronous rectifier 928 is exemplified as the output rectifier of the power converter 100, a diode may also be used as the output rectifier.

[00118] The clamp driver 906 is shown including a low side driver 950 and a high side driver 951. The low side driver 950 is configured to control the high side driver through the

communication link 952. The high side driver 951 is configured to generate a clamp enable signal U_{CE} 968 to control the switching of clamp switch 908.

[00119] The secondary controller 937 is configured to generate a secondary drive signal U_{SR} 934 to control the synchronous rectifier 928, and a request signal U_{REQ} 935. As shown, the secondary controller 937 is coupled to receive a feedback signal U_{FB} 932 representative of an output quantity U_O 936 of the power converter 900. The output quantity U_O 936 may be representative of the output voltage V_O 923, output current I_O 927, or a combination of the two. The request signal U_{REQ} 935 is communicated to the primary controller 933 to enable the turn on of the power switch S_1 945. In addition, the secondary controller 937 is shown as coupled to the secondary winding 920 and configured to receive the forward signal U_{FWD} 970 representative of a voltage of the secondary winding 920. In response to the forward signal U_{FWD} 970 representative of a voltage of the secondary winding 920, the secondary controller 937 may determine if the power converter 100 is operating in CCM or DCM and relays the CCM or DCM operation to the primary controller 933 via the request signal.

[00120] The primary controller 933 is shown comprising a control circuit 939 and a drive circuit 941. The control circuit 939 is coupled to receive the request signal U_{REQ} 935 from the secondary controller 937 and a current sense signal representative of the switch current I_D 943 of the power switch. The control circuit 939 is configured to generate the clamp drive signal U_{CD} 947 and a control signal U_{CTRL} 942 and in response to the request signal U_{REQ} 935. In one example, the control circuit 939 outputs the clamp drive signal U_{CD} 947 to control the turn on of the clamp switch 908 in response to the request signal U_{REQ} 935. The control signal U_{CTRL} 942 represents a delay time to turn on the power switch S_1 945 after a turn on and then turn off of the clamp switch 908. As will be further explained, the delay time of the control signal U_{CTRL} 942 is selected in response to the received the request signal U_{REQ} 935, which also provides information regarding CCM or DCM operation. The duration of the delay time is determined by the sensed CCM or DCM operation. The drive circuit 941 is coupled to receive the control signal U_{CTRL} 942 and generate a drive signal U_D 944 to control the power switch 945. The drive circuit 941 is further coupled to receive a current sense signal representative of a switch current I_D 943 of the power switch 945. The drive circuit 941 is coupled to turn on the power switch S_1 945 a delay time after the turn off of the clamp switch 908 in response to the control signal U_{CTRL} 942, and coupled to turn off the power switch S_1 945 in response to the switch current I_D 143 reaching the current limit (not shown).

[00121] Further illustrated is a magnetizing inductance L_{MAG} 112, a leakage inductance LLK 914, which may represent the magnetizing and leakage inductance associated

with the energy transfer element 916 or a discrete inductor. In dashed lines, a parasitic capacitance C_P 946 is shown to represent all the capacitance that couples to the power switch S1 945 and may include natural capacitance internal to the energy transfer element 916, the natural internal capacitance of power switch S1 945 and/or discrete capacitors. Also shown in **FIG. 1** are a secondary current I_S 921, an output voltage V_O 923, an output current I_O 927, an output quantity U_O 936, a feedback signal U_{FB} 932, a clamp voltage V_{CL} 909, clamp current I_{CL} 910, and a leakage voltage V_{LK} 911. In the illustrated example, the power converter 900 is shown as having a flyback topology. It is appreciated that other known topologies and configurations of power converters may also benefit from the teachings of the present disclosure.

[00122] The power converter 900 provides output power to a load 924 from an unregulated input voltage V_{IN} 901. In one embodiment, the input voltage V_{IN} 901 is a rectified ac line voltage. In another embodiment, the input voltage V_{IN} 101 is a dc input voltage. Input capacitor C_{IN} 902 is coupled to receive the input voltage V_{IN} 901 and, in one example, filters the input voltage V_{IN} 901. The energy transfer element 916 is coupled to receive the input voltage V_{IN} 901. In some embodiments, the energy transfer element 916 may be a coupled inductor, transformer, or an inductor. The example energy transfer element 916 is shown as including two windings, a primary winding 918 and secondary winding 920. However, the energy transfer element 916 may have more than two windings. The voltage across the primary winding 918 is illustrated as the primary voltage with the positive polarity at the dot end of the primary winding 918. When the power switch S1 945 is ON, the primary voltage is substantially equal to the negative sum of the input voltage V_{IN} 901 and the voltage across the inductance L_{LK} 914 (e.g. leakage voltage V_{LK} 911), or mathematically: $V_P = -(V_{IN} + V_L)$. When the power switch S1 945 is OFF, the primary voltage is substantially equal to the reflected output voltage of the secondary winding 920. The primary winding 918 of the energy transfer element is further coupled to the power switch S1 945 and the power switch S1 945 is further coupled to input return 926.

[00123] Coupled across the primary winding 918 and the uncoupled inductance L_{LK} 914 is the active clamp circuit. The active clamp circuit is shown as including clamp capacitance C_{CL} 904 which is coupled in series with the clamp switch 90 and steering diodes 915 and 907. Steering diode D1 915 is coupled across the clamp switch 908 and steering diode 907. The clamp switch 908 is exemplified as a transistor, in particular a metal-oxide field effect transistor (MOSFET) but it should be appreciated that other transistors may be used. The clamp switch 908 is coupled such that the drain of the transistor is coupled to the clamp capacitance C_{CL} 904 while the source of the transistor is coupled to the steering diode 907. Further the anode of steering diode 915 is coupled to the cathode of steering diode 907. The cathode of

steering diode 915 is coupled to the clamp capacitance C_{CL} 904. The anode of steering diode 907 is coupled to the clamp switch 908. The voltage across the clamp capacitance C_{CL} 904 is denoted as the clamp capacitance voltage V_{CL} 909, and the current in the clamp circuit is denoted as clamp current I_{CL} 910.

[00124] The active clamp circuit limits the maximum voltage on the power switch S1 945. Further, control of the clamp switch 908 of the active clamp circuit facilitates zero voltage switching of the power switch S1 945. Steering diodes 915, 907 may be utilized to control the clamp current I_{CL} 910 flow to the clamp capacitance C_{CL} 904, in particular when an associated anti-parallel diode (not shown) of the clamp switch 908 is slow.

[00125] The clamp driver 906 is configured to receive the clamp drive signal U_{CD} 947 from the primary controller 933 and outputs the clamp enable signal U_{CE} 968 to control the turn-on and turn-off the clamp switch 908. The clamp switch 908 is controlled to turn-on to inject current into the primary winding 918. The clamp switch 908 is turned on for a first duration prior to the power switch S1 945 turning on. In other words, the clamp switch 908 is not turned on for the entire duration that the power switch S1 945 is turned off. At or near the beginning of the off-time of the power switch S1 945, the steering diode 915 conducts the charge associated with the uncoupled inductance L_{LK} 914 of the power converter 100. In one example, the steering diode 915 turns on when the drain voltage V_D of the power switch S1 945 increases to a high enough voltage to forward biases the steering diode 915. The drain voltage V_D increases at or near the beginning of the off-time of the power switch S1 945. Steering diode 907 blocks the charge associated with the uncoupled inductance L_{LK} 914 from conducting through the anti-parallel diode (not shown) of the clamp switch 908. The charge from the uncoupled inductance L_{LK} 914 is transferred to the clamp capacitance C_{CL} 904 through the steering diode 915 and is stored. The steering diode 915 stops conducting substantially after the net charge associated with uncoupled inductance L_{LK} 914 of the power converter 100 has been transferred to the clamp capacitance C_{CL} 904.

[00126] The clamp switch 908 remains OFF until near the end of the OFF time of the power switch S1 945. Once it is determined that the power switch should turn ON, the clamp switch 908 is turned ON for a first duration of time. The turn on of the clamp switch 908 occurs prior to the turn on of the power switch S1 945, near the end of the off-time of the power switch S1 945. The transistor of the clamp switch 908 is turned on such that the net charge previously transferred to the clamp capacitance C_{CL} 904 is transferred to the primary winding 918. As such, the energy associated with the uncoupled inductance L_{LK} 914 is returned to the system rather than being dissipated. In one example, the uncoupled inductance L_{LK} 914 represents the leakage inductance of the energy transfer element 916. The clamp switch 908 is

controlled such that the leakage energy is reset and returned to the power converter rather than being dissipated.

[00127] Secondary winding 920 is coupled to the output rectifier 928, which is exemplified as a transistor 930 with anti-parallel diode 929 used as a synchronous rectifier. However, the output rectifier 928 may be a diode. Output capacitor CO 922 is shown as being coupled to the output rectifier 928 and the output return 925. The power converter 900 further includes circuitry to regulate the output quantity U_O 936, which in one example may be the output voltage V_O 923, output current I_O 927, or a combination of the two. A sense circuit 931 is shown as configured to sense the output quantity U_O 936 and provide a feedback signal U_{FB} 932 representative of the output of the power converter 900 (e.g. the output quantity U_O 936).

[00128] As shown, the secondary controller 937 is coupled to receive the feedback signal U_{FB} 932 and outputs the secondary drive signal U_{SR} 934 and request signal U_{REQ} 935. The secondary drive signal U_{SR} 934 is received by the output rectifier 928 (e.g. synchronous rectifier 928) and controls the turn on and turn off of the output rectifier 928. The request signal REQ is representative of a request to turn on the primary switch S1 945. Further, the request signal REQ is also representative of a request to turn on the clamp switch 908. The request signal U_{REQ} 935 may include request events which are generated in response to the feedback signal U_{FB} 932. In one example, the request signal U_{REQ} 935 may include request events which are generated in response to a comparison of the feedback signal U_{FB} 932 to a target value. The request signal U_{REQ} 935 may be a rectangular pulse waveform which pulses to a logic high value and quickly returns to a logic low value. The logic high pulses may be referred to as request events.

[00129] In addition, the secondary controller 937 is shown as coupled to the secondary winding 920 and configured to receive the forward signal UFWD 970 representative of a voltage of the secondary winding 920. As will be further discussed, in response to the forward signal UFWD 970 representative of a voltage of the secondary winding 920, the secondary controller 937 may determine if the power converter 900 is operating in CCM or DCM. In one example, a change in slope of the forward signal UFWD 970 could indicate DCM operation. In another example, conduction or non-conduction of the output rectifier 928 could indicate CCM or DCM operation. As previously discussed, the mode of operation (e.g. CCM or DCM) can determine the duration of time between the turning off of the clamp switch 908 and the turning on of the power switch S1 945.

[00130] The mode of operation is then provided to the primary controller 933 via the request signal U_{REQ} 935. For example, the secondary controller 937 may provide a single pulse as a request event to turn on the primary switch S1 945 and the clamp switch 908.

Provision of a single pulse request event may also be indicative of CCM operation of the power converter 900. The secondary controller 937 may provide a double pulse as the request event to turn on the primary switch S1 945 and the clamp switch 908 and to indicate DCM operation of the power converter 900. While a single or double pulse example is discussed, it should be appreciated that any number of pulses may be utilized.

[00131] The request signal U_{REQ} 935 is transmitted to the primary controller 933 through a communication link, shown as a dashed line, to enable the power switch S1 945 and the clamp switch 908. In embodiments, the primary controller 933 and the secondary controller 937 are galvanically isolated from one another and the communication link provides galvanic isolation using an inductive coupling, such as a transformer or a coupled inductor, an optocoupler, capacitive coupling, or other device that maintains the isolation. However, it should be appreciated that in some embodiments, the secondary controller 937 is not galvanically isolated from the primary controller 933.

[00132] In one example, the primary controller 933 and secondary controller 937 may be formed as part of an integrated circuit that is manufactured as either a hybrid or monolithic integrated circuit. In one example, the power switch S1 945 may also be integrated in a single integrated circuit package with the primary controller 933 and the secondary controller 937. In addition, in one example, primary controller 933 and secondary controller 937 may be formed as separate integrated circuits. The power switch S1 945 may also be integrated in the same integrated circuit as the primary controller 933 or could be formed on its own integrated circuit. Further, it should be appreciated that both the primary controller 933, the secondary controller 937 and power switch S1 945 need not be included in a single package and may be implemented in separate controller packages or a combination of combined/separate packages.

[00133] It is generally understood that a switch that is closed may conduct current and is considered on, while a switch that is open cannot conduct current and is considered off. In one example, the power switch S1 112 may be a transistor such as a metal-oxide-semiconductor field-effect transistor (MOSFET), bipolar junction transistor (BJT), silicon carbide (SiC) based transistor, gallium nitride (GaN) based transistor, or an insulated-gate bipolar transistor (IGBT). In another example, the power switch S1 945 may include two transistors coupled together in a cascode configuration such that a low voltage transistor, generally a normally-off device, is coupled to a high voltage transistor, generally a normally-on device. The high voltage transistor may be a junction field effect transistor (JFET). In one example, the JFET may comprise of gallium nitride (GaN) or silicon carbide (SiC) material.

[00134] The primary controller 933 includes the control circuit 939 and the drive circuit 941. The control circuit 939 is coupled to receive the request signal U_{REQ} 935 from the secondary controller 937 and a current sense signal representative of the switch current I_D 943 of the power switch. The control circuit 939 is configured to generate the clamp drive signal U_{CD} 947 and a control signal U_{CTRL} 942 and in response to the request signal U_{REQ} 935. In one example, the control circuit 939 outputs the clamp drive signal U_{CD} 947 to control the turn on of the clamp switch 908 in response to the request signal U_{REQ} 935. The control signal U_{CTRL} 942 represents a delay time to turn on the power switch S1 945 after a turn on and then turn off of the clamp switch 908. The duration of the delay time of the control signal U_{CTRL} 942 is selected in response to the request signal U_{REQ} 935, which also provides information regarding CCM or DCM operation of the power converter 900. The drive circuit 941 is coupled to receive the control signal U_{CTRL} 942 and generate a drive signal U_D 944 to control the power switch 945. The drive circuit 941 is further coupled to receive a current sense signal representative of a switch current I_D 943 of the power switch 945. The drive circuit 941 is coupled to turn on the power switch S1 945 a delay time after the turn off of the clamp switch 908 in response to the control signal U_{CTRL} 942, and coupled to turn off the power switch S1 945 in response to the switch current I_D 143 reaching the current limit (not shown). However, it should be appreciated that other control schemes could determine the turn-off of the power switch S1 945.

[00135] In operation, the primary controller 933 determines a first mode of operation in response to the request signal U_{REQ} 935. The first mode of operation is indicative of CCM operation. In one example, CCM operation may be determined while the output rectifier 928 is conducting. When the power switch S1 945 is turned off, after being turned on, the drain-source voltage of the power switch S1 945 rises. The drain to source voltage will continue to rise until clamped to the clamp voltage V_{CL} 909 of the clamp capacitor C_{CL} 904 through diode 915. Prior to the turn on of the power switch S1 945, the clamp switch 908 is turned on by the clamp driver 906. The leakage inductance L_{LK} 914 and the primary winding 918 is charged by the clamp capacitor voltage across C_{CL} 904 through the clamp switch 908 being in the on state. When the clamp switch 908 is turned on, voltage is applied to the leakage inductance L_{LK} 914 which causes current to flow in the opposite direction of when the power switch S1 945 was on. After a specified time, clamp switch 908 is turned off. The turn off of the clamp switch 908 causes the drain to source voltage of the power switch S1 945 to decrease. After turn off of the clamp switch 908, the leakage energy that had been charged by the clamp switch 908 being on is discharged. After the drain voltage has reached substantially zero volts the power switch S1 945 can be turned on for zero voltage switching (ZVS) operation. For the first mode of operation, the power switch S1 945 is turned on a first delay time T_{DEL1} after the

clamp switch 908 is turned off. However, it should be appreciated that if the drain voltage has not reached zero, the power switch S1 945 can still be turned on. Although not necessarily zero-voltage switching, the power converter 900 could still benefit from reduced switching losses.

[00136] Further, the primary controller 933 determines a second mode of operation in response to the request signal U_{REQ} 935. The second mode of operation is indicative of DCM operation. During the off-time of the power switch S1 945, the clamp switch 908 is turned on and then turned off. When the clamp switch 908 is turned on voltage is applied to the leakage inductance L_{LK} 914 and the magnetizing inductance L_{MAG} 912 which causes current to flow in the opposite direction as compared to when the power switch S1 945 was on. After a specified time, clamp switch 908 is turned off and during that time the leakage and magnetizing energy that had been charged by the clamp switch 908 being on is discharged. This causes the voltage across drain to source of the power switch S1 945 to decrease and, given enough time, eventually reach zero or a small non-zero value. The second mode of operation (e.g. DCM) typically takes longer to reach zero volts on the drain to source of the power switch S1 945 as compared to the first mode of operation (e.g. CCM). For the second mode of operation, the power switch S1 945 is turned on a second delay time T_{DEL2} after the clamp switch 908 is turned off. The duration of the second delay time T_{DEL2} is longer than the duration of the first delay time T_{DEL1} .

[00137] **FIG. 10** illustrates one example of a control circuit 1039 for a primary controller. It is appreciated that control circuit 1039 of **FIG. 10** may be one example of control circuit 939 of **FIG. 9**, and that similarly named and numbered elements referenced below are coupled and function similar to as described above. Further, the control circuit 1039 shares many similarities with control circuit 339 shown in **FIG. 3**, at least one difference however, is the first mode of operation signal U_{M1} 1063 and the second mode of operation signal U_{M2} 1064 are outputted by the enable circuit 1005.

[00138] As shown, the control circuit 1039 includes an enable circuit 105, flip-flops 1015, 1075, a delay circuit 1060, and a monostable multivibrator 1007. The delay circuit 1060 comprises a first switch 1058, a second switch 1059, a first delay circuit 1061, and a second delay circuit 1062.

[00139] The control circuit 1039 can output the control signal U_{CTRL} 1042, which is representative of the delay time to turn on the power switch. Further, the control circuit 1039 determines the delay time which the control signal U_{CTRL} 1042 is representative of (e.g. first delay time T_{DEL1} or second delay time T_{DEL2}). The delay time depends on the mode of operation of the power converter, which in one example is determined in response to the request signal U_{REQ} 1035. Prior to the turn on of the power switch S1 945, control circuit 1039 outputs a

clamp drive signal UCD 1047 to indicate the turn on of the clamp switch 908 to discharge the clamp capacitor C_{CL} 904.

[00140] The enable circuit 1005 is coupled to receive the request signal U_{REQ} 1035 and configured to generate the enable signal U_{EN} 1074. The request signal U_{REQ} 1037 is representative of a determination to turn on the power switch. Further, the request signal U_{REQ} 1035 is representative of a mode of operation of the power converter 900, such as CCM or DCM operation. The enable circuit 1005 is further configured to output the first mode of operation signal U_{M1} 1063 and the second mode of operation signal U_{M2} 1064 in response to the request signal U_{REQ} 1035. In one example, the first mode of operation signal U_{M1} 1063 is asserted in response to a first pattern in request signal U_{REQ} 1035 while the second mode of operation signal U_{M2} 1064 is asserted in response to a second pattern in request signal U_{REQ} 1035. The first pattern may be representative of CCM operation while the second pattern may be representative of DCM operation. The first pattern may be a single pulse in the request signal U_{REQ} 1035 while the second pattern may be two consecutive received pulses in the request signal U_{REQ} 1035.

[00141] The monostable multivibrator 1007 is coupled to the enable circuit 1005. The monostable multivibrator 1007 is configured to the clamp drive signal UCD 1047. Further, monostable multivibrator 1007 outputs a pulse for a first duration in the clamp drive signal UCD 1047 in response to an edge in the enable signal U_{EN} 1074 (e.g. a rising or falling edge). In one example, the pulse is representative of the on-time of the clamp switch 908. The first duration begins near an end of an off-time of the power switch S1 945 in response to a switching request to turn on the power switch S1 945 through the request signal U_{REQ} 1037.

[00142] The inverted clamp drive signal U_{CD} 1047 clocks flip-flop 1015. After the pulse ends, the flip-flop 1015 is configured to generate a first logic state in response to the falling edge of the clamp drive signal U_{CD} 1047.

[00143] Delay circuit 1060 receives the Q-output of flip flop. Further, the output of delay circuit 1060 clocks flip-flop 1075. As shown, switches 1058, 1059 are coupled to the Q-output of flip-flop 1015. The switch 1059 is controlled by the first mode of operation signal U_{M1} 1059. In operation, if the first mode of operation signal U_{M1} 1059 is asserted, flip-flop 1075 is clocked by the output of the first delay circuit 1061. The first delay circuit 1061 outputs a first delay, representative of first delay time T_{DEL1}, which is then outputted as the control signal U_{CTRL} 1042. In the example, the first delay time T_{DEL1} is also shown as T_A. The switch 1058 is controlled by the second mode of operation signal U_{M2} 1064. If the second mode of operation signal U_{M2} 1064 is asserted, flip-flop 1075 is clocked by the output of the second delay circuit 1062. The second delay circuit 1062 outputs a second delay, representative of second delay time T_{DEL2}, which is then outputted as control signal U_{CTRL} 342. In the example, the second delay

time T_{DEL2} is also shown as T_B . The second delay time T_{DEL2} is greater than the first delay time T_{DEL1} . In one example, the first delay time T_{DEL1} (T_A) can be in the range of 50 nanoseconds (ns) and the second delay time T_{DEL2} (T_B) can be in the range from 200 ns. When the first mode of operation signal U_{M1} 1059 is asserted, and the primary controller 933 is operating in the first mode of operation, the first delay time T_{DEL1} accounts for the duration of time for the leakage inductance to reduce the drain to source voltage of the power switch S1 945 to substantially zero. When the second mode of operation signal U_{M2} 1064 is asserted and the primary controller 933 is operating in the second mode of operation, the second delay time T_{DEL2} accounts for the duration of time for the leakage inductance and the magnetizing inductance to reduce the drain to source voltage of the power switch S1 945 to substantially zero.

[00144] **FIG. 11A** illustrates one example of a secondary controller 1137 for the power converter. It is appreciated that secondary controller 1137 of **FIG. 11A** may be one example of secondary controller 937 of **FIG. 9**, and that similarly named and numbered elements referenced below are coupled and function similar to as described above. The secondary controller 1137 is illustrated as including comparator 1176, mode detection circuit 1178, second control circuit 1179, detector 1180, comparator 1181, and flip-flop 1185. For the example of 11A, the mode detection circuit 1178 is shown as including multiplexer 1188. Further shown in **FIG. 11A** are feedback signal U_{FB} 1132, secondary drive signal U_{SR} 1134, request signal U_{REQ} 1135, reference V_{REF} 1177, CCM threshold V_{CCM} 1165, DCM threshold V_{DCM} 1166, mode signal U_{MODE} 1163, forward voltage signal U_{FWD} 1170, crossing threshold signal U_{FWS} 1183, turn off threshold V_{SR_OFF} 1182, and off signal U_{SR_OFF} 1184.

[00145] Detector 1180 is shown as coupled to receive the forward voltage signal U_{FWD} 1170 and configured to generate the crossing threshold signal U_{FWS} 1183 in response to the forward voltage signal U_{FWD} 1170 crossing below a threshold. In general, the power switch S1 945 and the synchronous rectifier 928 are controlled such that these switches are not on at the same time. In one embodiment, detector 1180 may be utilized to determine when the power switch S1 945 stops conducting in response to the forward voltage signal U_{FWD} 1170. If the power switch S1 945 is conducting, the forward voltage signal U_{FWD} 1170 would be substantially equal to the input voltage V_{IN} 901 multiplied by the turns ratio of energy transfer element T1 916 plus the output voltage V_O . When the power switch S1 945 turns off, the forward voltage signal U_{FWD} 1170 would decrease. If the forward voltage signal U_{FWD} 1170 decreases below the threshold of the detector 1180, the detector determines that the power switch S1 945 has been turned off. For the example shown, when the forward voltage signal U_{FWD} 1170 crosses below the threshold, the detector 1180 asserts the crossing threshold signal U_{FWS} 1183. The crossing threshold signal U_{FWS} 1183 is received at the clock input of flip-flop

1185. In the example shown, leading edges in the crossing threshold signal U_{FWS} 1183 clock the flip-flop 1185 and result in a logic high output of the secondary drive signal U_{SR} 1134.

[00146] Comparator 1181 is configured to receive the forward voltage signal U_{FWD} 1170 and the turn off threshold V_{SR_OFF} 1182. As shown, turn off threshold V_{SR_OFF} 1182 is received at the inverting input while the forward voltage signal U_{FWD} 1170 is received at the non-inverting input of comparator 1181. The output of the comparator is the off signal U_{SR_OFF} 1184, the off signal U_{SR_OFF} 1184 is logic high (e.g. first state) when the forward voltage signal U_{FWD} 1170 is greater than the turn off threshold V_{SR_OFF} 1182 and logic low (e.g. second state) when the forward voltage signal U_{FWD} 1170 is less than the turn off threshold V_{SR_OFF} 1182. Once the power switch S1 945 turns off, the forward voltage signal U_{FWD} 1170 falls below the turn off threshold V_{SR_OFF} 1182 and the off signal U_{SR_OFF} 1184 is logic low (e.g. not asserted). When all the energy from the primary winding is transferred to the secondary winding, the forward voltage signal U_{FWD} 1170 rises above the turn off threshold V_{SR_OFF} 1182, and the off signal U_{SR_OFF} 1184 is logic high (e.g. asserted), indicating that the secondary controller 937 can turn off the transistor 930 of the synchronous rectifier. As shown, the off signal U_{SR_OFF} 1184 is received at the clear-input of flip-flop 1185.

[00147] Flip-flop 1185 is shown as receiving the crossing threshold signal U_{FWS} 1183 at its clock input, the off signal U_{SR_OFF} 1184 at its clear-input, and the d-input of the flip-flop 1185 is shown as tied to a logic high value. In operation, when the power switch S1 945 turns off, the forward voltage signal U_{FWD} 1170 decreases below the threshold of the detector 1180 and the crossing threshold signal U_{FWS} 1183 is asserted. The leading edge of the crossing threshold signal U_{FWS} 1183 results in a logic high output of the secondary drive signal U_{SR} 1134 and turning on the synchronous rectifier 928. When the forward voltage signal U_{FWD} 1170 rises above the turn off threshold V_{SR_OFF} 1182, and the off signal U_{SR_OFF} 1184 is asserted (e.g. logic high) and clears the flip-flop 1185, the secondary drive signal U_{SR} 1134 transitions to a logic low value and the synchronous rectifier 928 is turned off. In another example, the second control circuit 1179 can clear flip-flop 1185. For example, in response to a switching request to turn on the power switch S1 945, the second control circuit 1179 can clear flip-flop 1185 (not shown) and the secondary drive signal U_{SR} 1134 transitions to a logic low value and the synchronous rectifier 928 is turned off.

[00148] Comparator 1176 is coupled to receive the feedback signal U_{FB} 1132 and the reference V_{REF} 1177. As shown, the reference V_{REF} 1177 is received at the non-inverting input while the feedback signal U_{FB} 1132 is received at the inverting input of comparator 1176. Reference V_{REF} 1177 is representative of the target value to regulate the output of power converter 100. The feedback signal U_{FB} 1132 falling below the reference V_{REF} 1177 could

indicate that the power switch S1 945 should be turned on to transfer energy to the output of the power converter 900.

[00149] Second control circuit 1179 is configured to receive the output of comparator 1176, the secondary drive signal U_{SR} 1134, and the crossing threshold signal U_{FWS} 1183 and outputs the request signal U_{REQ} 1135. In one example, the second control circuit 1179 determines whether the request signal U_{REQ} 1135 should indicate a turn on request of the power switch S1 945 in response to the output of comparator 1176. Further, the second control circuit 1179 may determine the timing of the request to turn on the power switch S1 945 in the request signal U_{REQ} 1135 in response to the secondary control signal U_{SR} 1134 or the crossing threshold signal U_{FWS} 1183.

[00150] As mentioned above, the request signal U_{REQ} 1135 is representative of a request to turn on the power switch S1 945 and a mode of operation of the power converter 900. As discussed, the mode of operation of the power converter 900 may be utilized to determine the duration of delay time between turning off the clamp switch 908 and turning on the power switch S1 945. The second control circuit 1179 is also configured to receive a mode signal U_{MODE} 1163 from the mode detection circuit 1178. Mode detection circuit 1178 determines whether the power converter 900 is operating in a first mode (e.g. CCM operation) or a second mode (e.g. DCM operation). Mode detection circuit includes a multiplexer 1188. Multiplexer 1188 is configured to receive the CCM threshold V_{CCM} 1165 at its “1” address input (e.g. high input), the DCM threshold V_{DCM} 1166 at its “0” address input (e.g. low input), and the secondary drive signal U_{SR} 1134 at its select input. In response to the value of the secondary drive signal U_{SR} 1134 (e.g. high “1” or low “0”), the output of the multiplexer (e.g. mode signal U_{MODE} 1163) is either the CCM threshold V_{CCM} 1165 or the DCM threshold V_{DCM} 1166. In another example, the multiplexer may receive the off signal U_{SR_OFF} 1184 at its select input and the off signal U_{SR_OFF} 1184 determines whether the mode signal U_{MODE} 1163 is substantially the CCM threshold V_{CCM} 1165 or the DCM threshold V_{DCM} 1166. In one example, the CCM threshold V_{CCM} 1165 may be a logic high value while the DCM threshold V_{DCM} 1166 may be a logic low value. Optionally, the multiplexer 1188 may receive the output of comparator 1176 (as shown by dashed lines). The output of comparator 1176 may be utilized by the multiplexer 1188 to determine the timing which the mode signal U_{MODE} 1163 is outputted to the second control circuit 1179. In one example, the mode signal U_{MODE} 1163 is not outputted to the second control circuit 1179 until the feedback signal U_{FB} 1132 falls below the reference V_{REF} 1177. In another example, the multiplexer 1188 may be controlled by the off signal U_{SR_OFF} 1184. Additionally, the mode detection circuit 1178 may implement buffering or delays in

determining CCM or DCM operation in response to either the off signal U_{SR_OFF} 1184 or the secondary drive signal U_{SR} 1134.

[00151] In response to the mode signal U_{MODE} 1163, the second control circuit 1179 is configured to generate a first pattern for the request signal U_{REQ} 1135 in response to the mode signal U_{MODE} 1163 indicating the first mode of operation (e.g. CCM operation). The second control circuit 1179 is further configured to generate a second pattern for the request signal U_{REQ} 1135 in response to the mode signal U_{MODE} 1163 indicating the second mode of operation (e.g. DCM operation). For example, the first pattern for the request signal U_{REQ} 1135 may be a single pulse to indicate a request to turn the power switch S1 945 and CCM operation of the power converter 900. The second pattern for the U_{REQ} 1135 may be a two consecutive pulses to indicate a request to turn the power switch S1 945 and DCM operation. As such, the request signal U_{REQ} 1135 is representative of a request to turn on the power switch and the mode of operation of the power converter.

[00152] **FIG. 11B** illustrates another example secondary controller 1137 for the power converter. It is appreciated that secondary controller 1137 of **FIG. 11B** may be one example of secondary controller 937 of **FIG. 9**, and that similarly named and numbered elements referenced below are coupled and function similar to as described above. Further, the secondary controller 1137 shown in **FIG. 11B** shares many similarities with secondary controller 1137 shown in **FIG. 11A**, at least one difference however, is mode detection circuit 1178 shown in **FIG. 11B** includes the multiplexer 1188, flip-flop 1186, and switch 1190.

[00153] As shown, the flip-flop 1186 of the mode detection circuit 1178 is configured to receive the output of comparator 1176. In particular, the output of comparator 1176 is coupled to the clock-input of flip-flop 1186. The D-input is coupled to a logic high value, while the clear input is configured to receive the request signal U_{REQ} 1135. The output of the flip-flop 1186 is configured to control the switch 1190. Similar to what is described above with respect to **FIG. 11A**, multiplexer 1188 is configured to receive the CCM threshold V_{CCM} 1165 at its “1” input (e.g. high input) and the DCM threshold V_{DCM} 1166 at its “0” input (e.g. low input).

[00154] In operation, the output of the multiplexer 1188 is controlled by the secondary drive signal U_{SR} 1134. In response to the value of the secondary drive signal U_{SR} 1134 (e.g. high “1” or low “0”), the output of the multiplexer (e.g. mode signal U_{MODE} 1163) is either the CCM threshold V_{CCM} 1165 or the DCM threshold V_{DCM} 1166. In one example, the CCM threshold V_{CCM} 1165 may be a logic high value while the DCM threshold V_{DCM} 1166 may be a logic low value. In other words, the mode detection circuit 1178 is configured to output the mode signal U_{MODE} 1163 representative of a first operating mode (e.g CCM operation) in

response to feedback signal U_{FB} 1132 being below reference V_{REF} 1177 and a first state of a secondary drive signal U_{SR} 1134 (e.g. logic high). The mode detection circuit 1178 is further configured to output a second mode signal in response to the feedback signal being below the reference and the mode signal $UMODE$ 1163 representative of a second mode of operation (e.g. DCM operation) in response to the feedback signal U_{FB} 1132 being below reference V_{REF} 1177 and a second state of the secondary drive signal U_{SR} 1134 (e.g. logic low).

[00155] The switch 1190 is controlled by the output of flip-flop 1186. When the feedback signal U_{FB} 1132 falls below the reference V_{REF} 1177, the flip-flop 1186 is clocked and the output of flip-flop 1186 is logic high. At that instance, the switch 1190 is closed and the mode signal $UMODE$ 1163 is substantially equal to the output of multiplexer 1188. The output of flip-flop 1186 transitions to a logic low value when the request signal U_{REQ} 1135 indicates a request to turn on the power switch $S1$ 945 and the switch 1190 is open. As such, the mode signal $UMODE$ 1163 provides an indication of the mode of operation of the power converter 900 along with a request to turn on the power switch $S1$ 945.

[00156] **FIGS. 11A and 11B** illustrate a secondary controller 1137 which determines CCM and DCM operation from a forward voltage signal U_{FWD} 1170 and controls a synchronous rectifier. It should be appreciated that embodiments of the present invention may be utilized with a power converter in which the output rectifier is exemplified as a diode rather than a synchronous rectifier. As such, variations in the forward voltage signal U_{FWD} 1170 could determine CCM or DCM operation. For example, a change in slope of the forward signal U_{FWD} 970 could indicate DCM operation or falling below a threshold could indicate DCM operation. In another example, detecting a relaxation ring in the forward voltage signal U_{FWD} 1170 could determine DCM operation.

[00157] **FIG. 12A** is a timing diagram illustrating example waveforms of the forward voltage signal U_{FWD} 1270, feedback signal U_{FB} 1232, and request signal U_{REQ} 1235 while the power converter 900 is operating in DCM. It should be appreciated that the forward voltage signal U_{FWD} 1270, feedback signal U_{FB} 1232, and request signal U_{REQ} 1235 are examples of the forward voltage signal U_{FWD} , feedback signal U_{FB} , and request signal U_{REQ} discussed with respect to **FIGS. 9, 10, 11A and 11B**.

[00158] During the on-time T_{ON} of the power switch $S1$ 945, the forward voltage signal U_{FWD} 1270 is substantially equal to the input voltage V_{IN} 901 multiplied by the turns ratio of the energy transfer element $T1$ 916 plus the output voltage V_O . When the power switch $S1$ 945 is turned off, forward voltage signal U_{FWD} 1270 decreases. As shown, the forward voltage signal U_{FWD} 1270 is below the turn off threshold V_{SR_OFF} 1282 at the beginning of the off-time T_{OFF} of the power switch $S1$ 945.

[00159] At time t_1 shown in **FIG. 12A**, the forward voltage signal U_{FWD} 1270 rises above the turn off threshold V_{SR_OFF} 1282 indicating that the energy from the primary side of the power converter 900 has been transferred to the secondary side of the power converter 900. A relaxation ring can be seen in the forward voltage signal U_{FWD} 1270. At time t_1 shown in **FIG. 12A**, the feedback signal U_{FB} 1232 is still above the reference V_{REF} 1277. At time t_2 of **FIG. 12A**, the feedback signal U_{FB} 1232 falls below the reference V_{REF} 1277. Since the feedback signal U_{FB} 1232 fell below the reference V_{REF} 1277 after the forward voltage signal U_{FWD} 1270 increased above the turn off threshold V_{SR_OFF} 1282, the power converter 900 is operating in DCM. As shown, the request signal U_{REQ} 1235 includes two consecutive pulses, which is one example of the second pattern. While **FIG. 12A** illustrates the forward voltage U_{FWD} 1270 crossing the turn off threshold V_{SR_OFF} 1282 as an indication of DCM operation, it should be appreciated that a change in the slope of the forward voltage signal U_{FWD} 1270 could be utilized as an indication of DCM operation.

[00160] **FIG. 12B** is a timing diagram illustrating example waveforms of the forward voltage signal U_{FWD} 1270, feedback signal U_{FB} 1232, and request signal U_{REQ} 1235 while the power converter 900 is operating in CCM. It should be appreciated that the forward voltage signal U_{FWD} 1270, feedback signal U_{FB} 1232, and request signal U_{REQ} 1235 are examples of the forward voltage signal U_{FWD} , feedback signal U_{FB} , and request signal U_{REQ} discussed with respect to **FIGS. 9, 10, 11A and 11B**.

[00161] At time t_1 shown in **FIG. 12B**, the forward voltage signal U_{FWD} 1270 is still below the turn off threshold V_{SR_OFF} 1282 indicating that the energy from the primary side of the power converter 900 has not been completely transferred to the secondary side of the power converter 900. Further, the feedback signal U_{FB} 1232 falls below the reference V_{REF} 1277 at time t_1 of **FIG. 12B**. Since the feedback signal U_{FB} 1232 fell below the reference V_{REF} 1277 while the forward voltage signal U_{FWD} 1270 is below the turn off threshold V_{SR_OFF} 1282, the power converter 900 is operating in CCM. As shown, the request signal U_{REQ} 1235 includes a single pulse, which is one example of the first pattern.

[00162] Referring now to **FIG. 13**, an example power converter 1300 is illustrated including a clamp driver 1306, a primary controller 1333, and a secondary controller 1337 in accordance with the teachings of the present disclosure. The illustrated example of the power converter 1300 includes an input capacitor C_{IN} 1302, an energy transfer element 1316, a primary winding 1318 of the energy transfer element 1316, a secondary winding 1320 of the energy transfer element 1316, a power switch S_1 1345, a clamp capacitor C_{CL} 1304, diodes 1307 and 1315, a clamp switch 1308, an output capacitor C_O 1322, an input return 1326, an output return 1325, an output rectifier 1328, and a sense circuit 1331. The output rectifier 1328 is exemplified

as a synchronous rectifier including a transistor 1330 and anti-parallel diode 1329, the output rectifier 1328 of the power converter 1300 may also be a diode. For the example shown in **FIG. 13**, the clamp driver 1306 and primary controller 1333 have been simplified but may include elements such as a high side driver, low side driver, drive circuit and control circuit as discussed above. It should be appreciated that the similarly named and numbered elements couple and function as described above and below. In particular, the power converter 1300 shares many similarities with power converter 100 shown in **FIG. 1** and power converter 900 shown in **FIG. 9**, at least one difference however, is the energy transfer element T1 1306 further includes a third winding 1390 (also referred to as a bias winding) referenced to input return 1326. The third winding 1390 is also galvanically isolated from the secondary winding 1320.

[00163] In the example shown, resistors 1391 and 1392 are coupled across the third winding 1390. Further, diode 1393 and bias circuit 1394 are also coupled across the third winding 1390. As shown, the scaled bias voltage V_B 1395 is the voltage at the node between resistors 1391 and 1392, which forms a voltage divider of the voltage across the third winding 1390. As such, the scaled bias voltage V_B 1395 is a scaled version of the voltage across the third winding 1390. Further, the scaled bias voltage V_B 1395 is representative of a voltage of the primary winding 1318 (e.g. input winding).

[00164] **FIG. 14** illustrates one example of a control circuit 1439 for a primary controller. It is appreciated that control circuit 1439 of **FIG. 14** may be one example of a control circuit for the primary controller 1333 shown with respect to of **FIG. 13**, however, similarly named and numbered elements couple and function similar to as described above. Further, the control circuit 1439 shares many similarities with control circuit 339 shown in **FIG. 3**, and control circuit 1039 shown in **FIG. 10**, at least one difference however, is the control circuit 1439 further includes a zero crossing detector 1484 and flip-flop 1488. The zero crossing detector 1484 is coupled to receive the scaled bias voltage V_B 1495, which is one example of scaled bias voltage V_B 1395 of **FIG. 13**. Further, similar to **FIG. 10**, the first mode of operation signal U_{M1} 1463 and the second mode of operation signal U_{M2} 1464 are outputted by the enable circuit 1405.

[00165] Zero crossing detector 1484 is coupled to receive the scaled bias voltage V_B 1495 and configured to output a zero crossing signal U_{ZCD} 1486 in response to the scaled bias voltage V_B 1495 crossing a zero crossing reference. In one example, the zero crossing detector 1484 detects the first instance which the scaled bias winding voltage V_B 1595 falls below the zero crossing reference after the turn off the power switch. In another example, the zero crossing detector 1484 could also output a pulse for every instance which the scaled bias winding voltage V_B 1495 crosses the zero crossing reference. In other words, the zero crossing

signal U_{ZCD} 1486 is representative of a zero crossing of the scaled bias voltage V_B 1495. In one example, the zero crossing signal U_{ZCD} 1486 is a rectangular pulse waveform, with pulses in the waveform representative of zero crossings of the scaled bias voltage V_B 1495. Flip-flop 1488 is shown as receiving the inverted drive signal U_D 1444 at its clock input, the zero crossing signal U_{ZCD} 1486 at its clear input, and a high value at its D-input. The Q-bar output of flip-flop 1488 is the DCM signal U_{DCM} 1466 (also referred to as a second mode of operation signal) while the Q-output of flip-flop 1488 is the CCM signal U_{CCM} 1465 (also referred to as a first mode of operation signal). The DCM signal U_{DCM} 1466 is representative of a determination of DCM operation of power converter 1300 while the CCM signal U_{CCM} 1465 is representative of a determination of CCM operation of power converter 1300. In one example, both the CCM signal U_{CCM} 1465 and DCM signal U_{DCM} 1466 are rectangular pulse waveforms with varying lengths of logic high and logic low sections with logic high sections indicating an asserted signal.

[00166] The enable circuit 1405 is coupled to receive the request signal U_{REQ} 1435, the CCM signal U_{CCM} 1465, and the DCM signal U_{DCM} 1466, and configured to generate the enable signal U_{EN} 1474. As previously discussed, the request signal U_{REQ} 1437 is representative of a determination to turn on the power switch S1 1345. The enable circuit 1305 is further configured to output the first mode of operation signal U_{M1} 1363 and the second mode of operation signal U_{M2} 1464 in response to the CCM signal U_{CCM} 1465 or the DCM signal U_{DCM} 1466, or both along with the request signal U_{REQ} 1435. In one example, the first mode of operation signal U_{M1} 1063 is asserted in response to an asserted CCM signal U_{CCM} 1465 coincident with a received request in request signal U_{REQ} 1435. The second mode of operation signal U_{M2} 1064 is asserted in response to an asserted DCM signal U_{DCM} 1466 coincident with a received request in request signal U_{REQ} 1435.

[00167] In operation, the CCM signal U_{CCM} 1465 signal is asserted in response to a trailing edge in drive signal U_D 1444. The DCM signal U_{DCM} 1466 is asserted in response to the zero crossing signal U_{ZCD} 1486 indicating a detected zero crossing in scaled bias voltage V_B 1495. If the CCM signal U_{CCM} 1465 signal is asserted when a request to turn on the power switch S1 1345 is received from request signal U_{REQ} 1435, the first mode of operation signal U_{M1} 1363 is asserted, which closes switch 1459 and control signal U_{CTRL} 1442 outputs the first delay time T_{DEL1} (T_A). If the DCM signal U_{DCM} 1466 is asserted when a request to turn on the power switch S1 1345 is received from request signal U_{REQ} 1435, the second mode of operation signal U_{M2} 1464 is asserted, which closes switch 1458 and control signal U_{CTRL} 1442 outputs the second delay time T_{DEL2} (T_B). The duration of the first delay time T_{DEL1} is shorter than the duration of the second delay time T_{DEL2} .

[00168] **FIG. 15A** illustrates a timing diagram 1500 with example waveforms of a request signal U_{REQ} 1535, a clamp enable signal U_{CE} 1568, a drive signal U_D 1544, a drain-source voltage V_{DS} 1553 of the power switch S1 1345, a scaled bias winding voltage V_B 1595, a zero crossing signal U_{ZCD} 1586, and a DCM signal U_{DCM} 1566 for the power converter 1300 of **FIG. 13** and the control circuit 1439 of **FIG. 14**. **FIG. 15A** illustrates the example waveforms for DCM operation of power converter 1300. It should be appreciated that similarly named and numbered elements couple and function as described above.

[00169] After receipt of a request (e.g. pulse) in request signal U_{REQ} 1535, the clamp switch 1308 is controlled on by the clamp enable signal U_{CE} 1568 (e.g. logic high value). After the clamp switch 1308 is controlled off (e.g. logic low value of clamp enable signal U_{CE} 1568), the drive signal U_D 1544 transitions to a logic high value to turn on power switch S1 1345 at time t_1 of **FIG. 15A**. The drain-source voltage V_{DS} 1553 is substantially equal to zero while the power switch S1 1345 is on. Scaled bias winding voltage V_B 1595 is shown as a scaled and level-shifted version of the drain-source voltage V_{DS} 1553, however, there is some clamping of the scaled bias winding voltage V_B 1595.

[00170] At time t_2 of **FIG. 15A**, the drive signal U_D 1544 transitions to a logic low value and the power switch S1 1345 is turned off and the drain-source voltage V_{DS} 1553 increases. At the beginning of the off-time of power switch S1 1345, a small hump is illustrated in the drain-source voltage V_{DS} 1553, illustrating the transfer of leakage energy to the clamp capacitor C_{CL} 1304. Once the leakage energy transfer is complete, the drain-source voltage V_{DS} 1553 settles to substantially the input voltage V_{IN} plus the reflected output across the primary winding. At the trailing edge of the drive signal U_D 1544, the DCM signal U_{DCM} 1566 transitions to a logic low value (e.g. not asserted).

[00171] At time t_3 of **FIG. 15A**, the output rectifier 1328 of power converter 1300 stops conducting. After which, a relaxation ring can be seen in the drain-source voltage V_{DS} 1553, indicating that the energy from the input of the power converter has been transferred to the output of the power converter. Similarly, a scaled and level-shifted version of the relaxation ring can be observed on the scaled bias winding voltage V_B 1595.

[00172] At time t_4 of **FIG. 15A**, the scaled bias winding voltage V_B 1595 crosses zero and a pulse occurs in the zero crossing signal U_{ZCD} 1586. As such, the DCM signal U_{DCM} 1566 transitions to a logic high value and is asserted. For the example shown of the zero crossing signal U_{ZCD} 1586, the zero crossing detector 1484 of **FIG. 14** detects the first instance which the scaled bias winding voltage V_B 1595 falls below zero after the turn off the power switch. However, it should be appreciated that the zero crossing detector could also output a

pulse for every zero crossing of the scaled bias winding voltage V_B 1595 detected after the turn off of the power switch.

[00173] At time t_5 of **FIG. 15A**, a pulse is received in request signal U_{REQ} 1535, indicating a request to turn on power switch S1 1345 and the clamp enable signal U_{CE} 1568 transitions to a logic high value (e.g. asserted) to turn on clamp switch 1308. At time t_6 of **FIG. 15A**, the clamp enable signal U_{CE} 1568 transitions to a logic low value (e.g. deasserted) and the clamp switch 1308 is turned off. The drain-source voltage V_{DS} 1553 and the scaled bias winding voltage V_B 1595 decrease. At time t_7 of **FIG. 15A**, the drive signal U_D 1544 transitions to a logic high value (e.g. asserted) and power switch S1 1345 is turned on. At time t_8 of **FIG. 15A**, the drive signal U_D 1544 transitions to a logic low value and the power switch S1 1345 is turned off.

[00174] The duration between time t_6 and time t_7 of **FIG. 15A** is generally selected to allow the drain-source voltage V_{DS} 1553 to fall to zero to facilitate zero-voltage switching. Since the DCM signal U_{DCM} 1566 is asserted at the time t_5 of **FIG. 15A** when the pulse in the request signal U_{REQ} 1535 is received, the enable circuit 1405 of **FIG. 14** asserts the second mode of operation signal UM_2 1464 to close switch 1458. As such the duration of time between the turn off of clamp switch 1308 and the turn on of power switch S1 1345 is substantially the second delay time T_{DEL2} .

[00175] Although the example shown illustrates utilizing the zero crossing of the scaled bias winding voltage V_B 1595 to determine DCM or CCM operation, it should be appreciated that other embodiments may be used to determine the end of secondary power transfer using the scaled bias winding voltage V_B 1595 (also shown as the knee point in the waveform). For example, the change in the slope of the scaled bias winding voltage V_B 1595 may also be utilized to discriminate between DCM and CCM operation.

[00176] **FIG. 15B** illustrates a timing diagram 1501 with example waveforms of a request signal U_{REQ} 1535, clamp enable signal U_{CE} 1568, drive signal U_D 1544, drain-source voltage V_{DS} 1553 of the power switch S1 1345, scaled bias winding voltage V_B 1595, zero crossing signal U_{ZCD} 1586, and CCM signal U_{CCM} 1565 for the power converter 1300 of **FIG. 13** and the control circuit 1439 of **FIG. 14**. **FIG. 15B** illustrates the example waveforms for CCM operation of power converter 1300. It should be appreciated that similarly named and numbered elements couple and function as described above.

[00177] After receipt of a request (e.g. pulse) in request signal U_{REQ} 1535, the clamp switch 1308 is controlled on by the clamp enable signal U_{CE} 1568 (e.g. logic high value). After the clamp switch 1308 is controlled off (e.g. logic low value of clamp enable signal U_{CE} 1568), the drive signal U_D 1544 transitions to a logic high value to turn on power switch S1

1345 at time t1 of **FIG. 15B**. The drain-source voltage V_{DS} 1553 is substantially equal to zero while the power switch S1 1345 is on. Scaled bias winding voltage V_B 1595 is shown as a scaled and level-shifted version of the drain-source voltage V_{DS} 1553, however, there is some clamping of the scaled bias winding voltage V_B 1595.

[00178] At time t2 of **FIG. 15B**, the drive signal U_D 1544 transitions to a logic low value and the power switch S1 1345 and the drain-source voltage V_{DS} 1553 increases. At the beginning of the off-time of power switch S1 1345, a small hump is illustrated in the drain-source voltage V_{DS} 1553, illustrating the transfer of leakage energy to the clamp capacitor C_{CL} 1304. Once the leakage energy transfer is complete, the drain-source voltage V_{DS} 1553 settles to substantially the input voltage V_{IN} plus the reflected output across the primary winding. At the trailing edge of the drive signal U_D 1544, the DCM signal U_{DCM} 1566 (not shown) transitions to a logic low value (e.g. not asserted). The CCM signal U_{CCM} 1565 transitions to a logic high value (e.g. asserted) in response to the trailing edge of the drive signal U_D 1544.

[00179] At time t3 of **FIG. 15B**, a pulse is received in request signal U_{REQ} 1535, indicating a request to turn on power switch S1 1345 and the clamp enable signal U_{CE} 1568 transitions to a logic high value (e.g. asserted) to turn on clamp switch 1308. The scaled bias winding voltage V_B 1595 has not crossed zero at this time and there is no pulse in the zero crossing signal U_{ZCD} 1586.

[00180] At time t4 of **FIG. 15B**, the clamp enable signal U_{CE} 1568 transitions to a logic low value (e.g. deasserted) and the clamp switch 1308 is turned off. The drain-source voltage V_{DS} 1553 and the scaled bias winding voltage V_B 1595 decrease. The scaled bias winding voltage V_B 1595 is shown as crossing zero at time t5 of **FIG. 15B** and a pulse is shown in the zero crossing signal U_{ZCD} 1586.

[00181] At time t6 of **FIG. 15B**, the drive signal U_D 1544 transitions to a logic high value (e.g. asserted) and power switch S1 1345 is turned on.

[00182] The duration between time t4 and time t6 of **FIG. 15B** is generally selected to allow the drain-source voltage V_{DS} 1553 to fall to zero to facilitate zero-voltage switching. Since the CCM signal U_{CCM} 1565 is asserted at the time t3 of **FIG. 15B** when the pulse in the request signal U_{REQ} 1535 is received, the enable circuit 1405 of **FIG. 14** asserts the first mode of operation signal U_{M1} 1463 to close switch 1459. As such the duration of time between the turn off of clamp switch 1308 and the turn on of power switch S1 1345 is substantially the first delay time T_{DEL1} . The duration of the first delay time T_{DEL1} is shorter than the duration of the second delay time T_{DEL2} .

[00183] **FIG. 16** illustrates of another example of a control circuit 1639 for a primary controller. In one example, the control circuit 1639 can determine the mode of

operation of a power converter in response to the drive signal U_D 1644. Control circuit 1639 of **FIG. 16** may be one example of a control circuit for the primary controller shown with respect to any of the above figures and similarly named and numbered elements couple and function similar to as described above. Further, the control circuit 1639 shares many similarities with control circuit 339 shown in **FIG. 3**, and control circuit 1039 shown in **FIG. 10**, and control circuit 1439 shown in **FIG. 14**, at least one difference however, is the control circuit 1639 further includes a mode detection circuit 1678 which is coupled to receive the drive signal U_D 1644 and configured to output an operation signal U_{OP} 1668 to enable circuit 1605. Further, similar to **FIGS. 10 and 14**, the first mode of operation signal U_{M1} 1663 and the second mode of operation signal U_{M2} 1664 are outputted by the enable circuit 1605.

[00184] Mode detection circuit 1678 is configured to generate the operation signal U_{OP} 1663 in response to the drive signal U_D 1644. The operation signal U_{OP} 1663 (also referred to as a mode signal U_{MODE} in **FIGS. 11A and 11B**) is representative of a mode of operation of the power converter. In one example, operation signal U_{OP} 1668 is a rectangular pulse waveform with varying lengths of logic high and logic low sections, logic high sections are representative of a first mode of operation of the power converter (such as CCM operation) while logic low sections are representative of a second mode of operation of the power converter (such as DCM operation).

[00185] Enable circuit 1605 of **FIG. 16** asserts the first mode of operation signal U_{M1} 1663 and the second mode of operation signal U_{M2} 1664 in response to the operation signal U_{OP} 1668. If the operation signal U_{OP} 1668 indicates CCM operation, the enable circuit 1605 outputs the first mode of operation signal U_{M1} 1663 to turn on the switch 1659 the control signal U_{CTRL} 1642 outputs the first delay time T_{DEL1} . If the operation signal U_{OP} 1668 indicates DCM operation, the enable circuit 1605 outputs the second mode of operation signal U_{M2} 1664 to turn on the switch 1658 and the control signal U_{CTRL} 1642 outputs the second delay time T_{DEL2} .

[00186] **FIG. 17** illustrates one example of mode detection circuit 1778, which is one example of mode detection circuit 1678 of **FIG. 16**. The mode detection circuit 1778 is shown as including switch 1797, capacitor 1798 with voltage V_C 1701, current source 1799, diode 1787, voltage source 1788, and comparator 1719. It should be appreciated that similarly named and numbered elements couple and function as described above.

[00187] Switch 1797 is coupled across capacitor and configured to be controlled by the drive signal U_D 1744. Comparator is coupled to capacitor 1798. As shown, the comparator 1719 is coupled such that the voltage V_C 1701 is compared to the DCM threshold V_{DCM} (e.g. voltage reference). Comparator 1719 is coupled to receive the voltage V_C 1701 at its

inverting input and the DCM threshold V_{DCM} 1766 at its non-inverting input. The output of comparator 1719 is the operation signal U_{OP} 1668.

[00188] Diode 1787 and voltage source 1788 are coupled to capacitor 1798 and are configured to provide an upper clamp voltage for capacitor 1798. Current source 1799 is also coupled to capacitor 1798 and configured to charge the capacitor 1798 when switch 1797 is open.

[00189] In operation, the drive signal U_D 1744 opens and closes switch 1797. Logic high sections of the drive signal U_D 1744 is representative of the on time of the power switch S1 while logic low sections are representative of the off time of the power switch S1. When the drive signal U_D 1744 is logic high (e.g. power switch S1 is on), the capacitor 1798 is discharged. When the drive signal U_D 1744 is logic low (e.g. the power switch S1 is off), the capacitor 1798 is charged by current source 1799. If the voltage V_C 1701 reaches the DCM threshold V_{DCM} 1766 during the off-time of the power switch S1, the mode detection circuit outputs a logic low value for the operation signal U_{OP} 1768 to indicate DCM operation. Logic high values for the operation signal U_{OP} 1768 are representative of CCM operation during the off time of the power switch S1.

[00190] FIG. 18 illustrates a timing diagram 1800 which illustrates example waveforms of the drive signal U_D 1844, voltage V_C 1801 of a mode capacitor 1798, and operation signal U_{OP} 1863 of the mode detection circuit 1778 of FIG. 17 and mode detection circuit 1678 of FIG. 16. It should be appreciated that similarly named and numbered elements couple and function as described above.

[00191] The left hand side of the timing diagram 1800 illustrates CCM operation. At time t_1 of FIG. 18, the drive signal U_D 1844 transitions to a logic high value and the power switch S1 is on, the mode capacitor 1798 is discharged and the voltage V_C 1801 decreases. At time t_1 of FIG. 18, the drive signal U_D 1844 transitions to the logic low value and the power switch S1 is off, the capacitor 1798 is charged by current source 1799 and the voltage V_C 1801 is shown as increasing. The drive signal U_D 1844 transitions to a logic high value at time t_3 of FIG. 18. By time t_3 of FIG. 18, the voltage V_C 1801 has not reached the DCM threshold V_{DCM} 1866 and the operation signal U_{OP} 1863 is logic high, indicating CCM operation (e.g. first mode of operation).

[00192] The right hand side of the timing diagram 1800 illustrates the detection of DCM operation. At time t_5 of FIG. 18, the drive signal U_D 1844 transitions to a logic high value and the power switch S1 is on, the mode capacitor 1798 is discharged and the voltage V_C 1801 decreases. At time t_6 of FIG. 18, the drive signal U_D 1844 transitions to the logic low value and the power switch S1 is off, the capacitor 1798 is charged by current source 1799 and the voltage

V_C 1801 is shown as increasing. The drive signal U_D 1844 remains logic low (e.g. power switch S1 is off) and the voltage V_C 1801 reaches the DCM threshold V_{DCM} 1866 at time t_7 of FIG. 18. As such, the operation signal U_{OP} 1863 transitions to a logic low value, indicating DCM operation (e.g. second mode of operation).

[00193] The above description of illustrated examples of the present invention, including what is described in the Abstract, are not intended to be exhaustive or to be limitation to the precise forms disclosed. While specific embodiments of, and examples for, the invention are described herein for illustrative purposes, various equivalent modifications are possible without departing from the broader spirit and scope of the present invention. Indeed, it is appreciated that the specific example voltages, currents, frequencies, power range values, times, etc., are provided for explanation purposes and that other values may also be employed in other embodiments and examples in accordance with the teachings of the present invention.

[00194] Although the present invention is defined in the claims, it should be understood that the present invention can alternatively be defined in accordance with the following examples:

[00195] Example 1: A controller configured for use in a power converter, the controller comprising: a control circuit coupled to receive an input line voltage sense signal representative of an input voltage of the power converter, the control circuit configured to generate a control signal in response to a request signal representative of an output of the power converter, wherein the control signal represents a delay time to turn on a power switch after a turn on of a clamp switch, in response to the input line voltage sense signal, the control circuit further configured to generate a clamp drive signal to control a clamp driver; and a drive circuit configured to generate a drive signal to control the power switch to transfer energy from an input of the power converter to the output of the power converter.

[00196] Example 2: The controller of example 1, the control circuit comprising: an enable circuit configured to generate an enable signal in response to the request signal; and a monostable multivibrator configured to generate the clamp drive signal to turn on the clamp switch in response to the enable signal, the monostable multivibrator configured to output a pulse for a first duration, wherein the first duration begins near an end of an off time of the power switch to in response to a determination to turn on the power switch.

[00197] Example 3: The controller of any of the previous examples, the control circuit further comprising a flip flop coupled to the monostable multivibrator, the flip flop configured to generate a first logic state in response to the clamp drive signal.

[00198] Example 4: The controller of any of the previous examples, wherein the control circuit is further configured to control the clamp driver to inject charge stored in a clamp

capacitor into an energy transfer element to discharge a parasitic capacitance of the power switch into the energy transfer element before the power switch is turned on.

[00199] Example 5: The controller of any of the previous examples, wherein the control circuit further comprises a delay circuit configured to delay the turn on of the power switch to provide sufficient time for a parasitic capacitance of the power switch to be discharged into an energy transfer element before the power switch is turned on.

[00200] Example 6: The controller of any of the previous examples, the delay circuit comprising: a first switch controlled by a first mode of operation signal; a first delay circuit coupled to the first switch, the first delay circuit configured to output the control signal after a first delay time; a second switch controlled by a second mode of operation signal; and a second delay circuit coupled to the second switch, the second delay circuit configured to output the control signal after a second delay time, wherein the second delay time is greater than the first delay time.

[00201] Example 7: The controller of any of the previous examples, wherein the control circuit further comprises: a first comparator configured to determine if the input line voltage sense signal is less than a continuous conduction mode (CCM) threshold; a second comparator configured to determine if the input line voltage sense signal is greater than a discontinuous conduction mode (DCM) threshold; and a set-reset (SR) latch having a set input coupled to an output of the first comparator, the SR latch further coupled having a reset input coupled to an output of the second comparator, the SR latch configured to output a first mode of operation signal, the SR latch further configured to output a second mode of operation signal.

[00202] Example 8: The controller of any of the previous examples, wherein the first mode of operation signal represents a DCM operation of the power converter.

[00203] Example 9: The controller of any of the previous examples, wherein the second mode of operation signal represents a CCM operation of the power converter.

[00204] Example 10: A power converter, comprising: an energy transfer element coupled between an input of the power converter and an output of the power converter; a power switch coupled to the energy transfer element; a clamp driver coupled to the energy transfer element and the power switch; and a primary controller coupled to the clamp driver and the power switch, the primary controller comprising: a control circuit configured to generate a control signal in response to a request signal representative of an output of the power converter, wherein the control signal selects one of a plurality of modes of operation to turn on a power switch after a turn on of a clamp switch in response to an input line voltage sense signal, the control circuit further configured to generate a clamp drive signal to control a clamp driver; and

a drive circuit configured to generate a drive signal to control the power switch to transfer energy from the input of the power converter to the output of the power converter.

[00205] Example 11: The power converter of example 10, the clamp driver comprising a clamp capacitor coupled to the clamp switch, wherein the clamp capacitor is coupled to store a charge that is injected into a primary winding of the energy transfer element through the clamp switch in response to the clamp drive signal.

[00206] Example 12: The power converter of any of the previous examples, wherein the energy transfer element further comprises a magnetizing inductance and a leakage inductance between the clamp driver and the primary winding.

[00207] Example 13: The power converter of any of the previous examples, wherein the plurality of modes of operation comprises a first mode of operation and a second mode of operation, wherein the first mode of operation is continuous conduction mode (CCM), and wherein the second mode of operation is discontinuous conduction mode (DCM).

[00208] Example 14: The power converter of any of the previous examples, wherein the leakage inductance of the energy transfer element reduces a drain to source voltage of the power switch to substantially zero in response to the turn on of the clamp switch.

[00209] Example 15: The power converter of any of the previous examples, wherein the leakage inductance and the magnetizing inductance of the energy transfer element reduces a drain to source voltage of the power switch to substantially zero in response to the turn on of the clamp switch.

[00210] Example 16: The power converter of any of the previous examples, the clamp driver comprising: a low side driver coupled to receive the clamp drive signal, the low side driver configured to communicate the turn on of the clamp switch; a high side driver coupled to the clamp switch, the high side driver configured to generate a clamp enable signal to control the clamp switch; and a communication link coupled to the low side driver and the high side driver.

[00211] Example 17: The power converter of any of the previous examples, the power converter further comprising a secondary controller configured to generate the request signal in response to a feedback signal representative of the output of the power converter.

[00212] Example 18: The power converter of any of the previous examples, wherein the secondary controller is galvanically isolated from the primary controller.

[00213] Example 19: The power converter of any of the previous examples, an enable circuit configured to generate an enable signal in response to the request signal; and a monostable multivibrator configured to generate the clamp drive signal to turn on the clamp switch in response to the enable signal, the monostable multivibrator further configured to

output a pulse for a first duration, wherein the first duration begins near an end of an off time of the power switch in response to a determination to turn on the power switch.

[00214] Example 20: The power converter of any of the previous examples, the control circuit further comprising a flip flop coupled to the monostable multivibrator, the flip flop configured to generate a first logic state in response to the clamp drive signal.

[00215] Example 21: The power converter of any of the previous examples, wherein the control circuit further comprises a delay circuit configured to delay turning on the power switch to provide sufficient time for a parasitic capacitance of the power switch to be discharged into the energy transfer element before the power switch is turned on.

[00216] Example 22: The power converter of any of the previous examples, wherein the delay circuit comprises: a first switch configured to be controlled by a first mode of operation signal; a first delay circuit configured to output the control signal after a first delay time; a second switch coupled to be controlled by a second mode of operation signal; a second delay circuit configured to output the control signal after a second delay time, wherein the second delay time is greater than the first delay time.

[00217] Example 23: The power converter of any of the previous examples, the control circuit further comprising: a first comparator configured to determine if the input line voltage sense signal is less than a continuous conduction mode (CCM) threshold; a second comparator configured to determine if the input line voltage sense signal is greater than a discontinuous conduction mode (DCM) threshold; and a set-reset (SR) latch having a set input coupled to an output of the first comparator, the SR latch further coupled having a reset input coupled to an output of the second comparator, the SR latch configured to output a first mode of operation signal, the SR latch further configured to output a second mode of operation signal.

[00218] Example 24: A secondary controller configured for use in a power converter, the secondary controller comprising a detector circuit configured to generate a crossing threshold signal in response to a forward voltage signal crossing below a threshold; a comparator coupled to generate a first state of an off signal in response to the forward voltage signal being greater than a turn off threshold, the comparator further coupled to generate a second state of the off signal in response to the forward voltage signal being less than the turn off threshold; a first flip flop coupled to turn on a synchronous rectifier in response to the crossing threshold signal and to turn off the synchronous rectifier in response to the second state of the off signal; a mode detection circuit configured to output a first mode signal in response to a feedback signal being below a reference and a first state of a secondary drive signal, the mode detection circuit further configured to output a second mode signal in response to the feedback signal being below the reference and a second state of the secondary drive

signal; and a control circuit configured to generate a first pattern of a request signal in response to the first mode signal, the control circuit further configured to generate a second pattern of the request signal in response to the second mode signal.

[00219] Example 25: The secondary controller of example 24, wherein the first pattern of the request signal is representative of a continuous conduction mode (CCM) of the power converter.

[00220] Example 26: The secondary controller of example 24 or 25, wherein the second pattern of the request signal is representative of a discontinuous conduction mode (DCM) of the power converter.

[00221] Example 27: The secondary controller of any one of examples 24 to 26, wherein the mode detection circuit comprises: a multiplexer configured to select the first mode signal or the second mode signal in response to the turn on or turn off of the synchronous rectifier.

[00222] Example 28: The secondary controller of any one of examples 24 to 27, wherein the mode detection circuit further comprises a mode flip-flop coupled to control a switch in response to the feedback signal being below the threshold, wherein the mode detection circuit outputs the first mode signal or the second mode signal when the switch is closed.

[00223] Example 29: A power converter, comprising an energy transfer element coupled between an input of the power converter and an output of the power converter; a power switch coupled to the energy transfer element; a clamp driver coupled to a clamp capacitor and a clamp switch; a primary controller coupled to the clamp driver and the power switch; and a secondary controller configured to control switching of the power switch to control a transfer of energy through the energy transfer element from the input of the power converter to the output of the power converter, the secondary controller comprising a detector circuit configured to generate a crossing threshold signal in response to a forward voltage signal crossing below a threshold; a comparator coupled to generate a first state of an off signal in response to the forward voltage signal being greater than a turn off threshold, the comparator further coupled to generate a second state of the off signal in response to the forward voltage signal being less than the turn off threshold; a first flip flop coupled to turn on a synchronous rectifier in response to the crossing threshold signal and to turn off the synchronous rectifier in response to the first state of the off signal; a mode detection circuit configured to output a first mode signal in response to conduction of the synchronous rectifier, the mode detection circuit further configured to output a second mode signal in response to no conduction of the synchronous rectifier; and a secondary control circuit configured to generate a first pattern of a request signal in response to the first mode signal, the secondary control circuit further configured to generate

a second pattern of the request signal in response to the second mode signal.

[00224] Example 30: The power converter of example 29, the primary controller comprising a primary control circuit configured to generate a control signal in response to the request signal, wherein the control signal represents a delay time to enable the power switch after turn off of the clamp switch, the primary control circuit further configured to generate a clamp drive signal to control the clamp driver to turn on the clamp switch in response to the request signal; and a drive circuit configured to generate a drive signal in response to the control signal to enable the power switch to transfer energy from the input of the power converter to the output of the power converter.

[00225] Example 31: The power converter of example 29 or 30, the primary control circuit comprising an enable circuit configured to generate an enable signal in response to the request signal, the enable circuit further configured to generate a first mode of operation signal in response to the first pattern of the request signal, and further configured to generate a second mode of operation signal in response to the second pattern of the request signal; and a monostable multivibrator coupled to generate the clamp drive signal to turn on the clamp switch in response to the enable signal and to output a pulse for a first duration, wherein the first duration is the turn on time for the clamp switch.

[00226] Example 32: The power converter of any one of examples 29 to 31, the primary control circuit further comprising a second flip flop coupled to the monostable multivibrator to generate a first logic state in response to the clamp drive signal.

[00227] Example 33: The power converter of any one of examples 29 to 32, wherein the primary control circuit is further configured to control the clamp driver to inject charge stored in the clamp capacitor into the energy transfer element to discharge a parasitic capacitance of the power switch into the energy transfer element before the power switch is turned on.

[00228] Example 34: The power converter of any one of examples 29 to 33, wherein the primary control circuit further comprises a delay circuit configured to vary the delay time between of the turn off of the clamp switch and the turn on of the power switch in response to the first mode of operation signal or the second mode of operation signal.

[00229] Example 35. The power converter of any one of examples 29 to 34, the delay circuit comprising a first switch coupled to be controlled by the first mode of operation signal; a first delay circuit coupled to the first switch, the first delay circuit configured to output the control signal after a first delay time, wherein the delay time is substantially the first delay time; a second switch controlled by the second mode of operation signal; and a second delay circuit coupled to the second switch, the second delay circuit configured to output the control

signal after a second delay time, wherein the delay time is substantially the second delay time, wherein the second delay time is greater than the first delay time.

[00230] Example 36: A primary controller configured for use in a power converter, the primary controller comprising a control circuit configured to determine a mode of operation of the power converter in response to a bias voltage representative of a voltage of an input winding of an energy transfer element, the control circuit configured to generate a control signal in response to the mode of operation of the power converter, wherein the control signal represents a delay time to enable a turn on of a power switch after a turn off of a clamp switch, the control circuit further configured to generate a clamp drive signal to control a clamp driver in response to a request signal representative of an output of the power converter; and a drive circuit configured to generate a drive signal to control the power switch in response to the control signal to transfer energy from an input of the power converter to an output of the power converter.

[00231] Example 37: The primary controller of example 36, the control circuit comprising an enable circuit configured to generate an enable signal in response to a request signal; a monostable multivibrator coupled to generate the clamp drive signal to turn on the clamp switch in response to the enable signal and to output a pulse for a first duration, wherein the first duration is the turn on time for the clamp switch; a zero crossing detector configured to generate a zero crossing signal representative of the bias voltage crossing a zero crossing reference; and a flip flop coupled to assert a first mode of operation signal in response to a drive signal and to assert a second mode of operation signal in response to the zero crossing signal.

[00232] Example 38: The primary controller of example 36 or 37, wherein an output of the flip flop is sampled in response to the request signal.

[00233] Example 39: The primary controller of any one of examples 36 to 38, wherein the first mode of operation signal represents a continuous conduction mode (CCM) operation of the power converter.

[00234] Example 40: The primary controller of any one of examples 36 to 39, wherein the second mode of operation signal represents a discontinuous conduction mode (DCM) operation of the power converter.

[00235] Example 41: A power converter, comprising an energy transfer element coupled between an input of the power converter and an output of the power converter; a power switch coupled to the energy transfer element; a clamp switch coupled to the energy transfer element and the power switch, the clamp switch configured to be controlled by a clamp driver; and a primary controller coupled to the power switch, the primary controller comprising a control circuit configured to determine a mode of operation of the power converter in response

to a bias voltage representative of a voltage of an input winding of the energy transfer element, the control circuit further configured to generate a control signal in response to the mode of operation, wherein the control signal represents a delay time to enable a turn on of the power switch after a turn off of the clamp switch, the control circuit further configured to generate a clamp drive signal to output to the clamp driver; and a drive circuit configured to generate a drive signal to control the power switch to transfer energy from the input of the power converter to the output of the power converter.

[00236] Example 42: The power converter of example 41, wherein the power converter exhibits two modes of operation comprising a first mode of operation, wherein the first mode of operation is representative of continuous conduction mode (CCM); and a second mode of operation, wherein the second mode of operation is representative of discontinuous conduction mode (DCM).

[00237] Example 43: The power converter of example 41 or 42, wherein the energy transfer element further comprises a magnetizing inductance and a leakage inductance between the clamp driver and a primary winding of the energy transfer element.

[00238] Example 44: The power converter of any one of examples 41 to 43, wherein the leakage inductance of the energy transfer element reduces a drain to source voltage of the power switch to substantially zero in response to the turn off of the clamp switch in CCM.

[00239] Example 45: The power converter of any one of examples 41 to 44, wherein the leakage inductance and the magnetizing inductance of the energy transfer element reduces a drain to source voltage of the power switch to substantially zero in response to the turn on of the clamp switch in DCM.

[00240] Example 46: The power converter of any one of examples 41 to 45, further comprising a secondary controller configured to generate a request signal representative of a request to turn on the power switch in response to a feedback signal representative of the output of the power converter.

[00241] Example 47: The power converter of any one of examples 41 to 46, wherein the secondary controller is galvanically isolated from the primary controller.

[00242] Example 48: The power converter of any one of examples 41 to 47, the control circuit comprising a zero crossing detector configured to generate a zero crossing signal representative of the bias voltage crossing a zero crossing reference; a first flip flop coupled to assert a first mode of operation signal in response to the drive signal and to assert a second mode of operation signal in response to the zero crossing signal; an enable circuit configured to generate an enable signal in response to a request signal representative of an output of the power converter, the enable circuit further configured to generate a first mode signal in response to the

first mode of operation signal and to generate a second mode signal in response to the second mode of operation signal; and a monostable multivibrator coupled to generate a clamp drive signal to turn on the clamp switch in response to the enable and to output a pulse in the clamp drive signal for a first duration, wherein the first duration is representative of a turn on time of the clamp switch.

[00243] Example 49: The power converter of any one of examples 41 to 48, wherein the control circuit further comprises a delay circuit configured to vary the delay time between the turn off of the clamp switch and a turn on the power switch.

[00244] Example 50: The power converter of any one of examples 41 to 49, wherein the delay circuit comprises a first switch coupled to be controlled by the first mode signal; a first delay circuit configured to output the control signal after a first delay time, wherein the first delay time is substantially the delay time between the turn off of the clamp switch and the turn on the power switch; a second switch coupled to be controlled by the second mode signal; and a second delay circuit configured to output the control signal after a second delay time, wherein the second delay time is substantially the delay time between the turn off of the clamp switch and the turn on the power switch, wherein the second delay time is greater than the first delay time.

[00245] Example 51: A primary controller configured for use in a power converter, the primary controller comprising a control circuit configured to determine a mode of operation of the power converter in response to a drive signal of a power switch, the control circuit further configured to generate a control signal in response to a signal representative of the mode of operation of the power converter, wherein the control signal represents a delay time to enable a turn on of the power switch after a turn off of a clamp switch, the control circuit further configured to generate a clamp drive signal to control the clamp switch; and a drive circuit configured to generate a drive signal to enable the power switch to transfer energy from an input of the power converter to an output of the power converter.

[00246] Example 52: The primary controller of example 51, the control circuit comprising a mode detection circuit configured to generate an operation signal in response to the drive signal; an enable circuit configured to generate an enable signal in response to a request signal representative of an output of the power converter, the enable circuit further configured to generate a first mode signal and a second mode signal in response to the operation signal; and a monostable multivibrator coupled to generate the clamp drive signal to turn on the clamp switch in response to the enable signal and to output a pulse in the clamp drive signal for a first duration, wherein the first duration is the turn on time of the clamp switch.

[00247] Example 53: The primary controller of example 51 or 52, the mode

detection circuit comprising a switch configured to be controlled by the drive signal; a current source coupled to the switch and configured to charge a capacitor, wherein the capacitor is charged and discharged in response to the drive signal that controls the switch; and a comparator coupled to output a first state of the operation signal in response to a voltage reference being greater than a voltage of the capacitor and to output a second state of the operation signal in response to the voltage reference being substantially equal or less than the voltage of the capacitor.

[00248] Example 54: The primary controller of any one of examples 51 to 53, wherein the first state of the operation signal is representative of continuous conduction mode of operation (CCM), and wherein the second state of the operation signal is representative of a discontinuous conduction mode of operation (DCM).

[00249] Example 55: The primary controller of any one of examples 51 to 54, the mode detection circuit further comprising a diode coupled to a voltage source, the diode and the voltage source configured to clamp the voltage of the capacitor.

[00250] Example 56: The primary controller of any one of examples 51 to 55, wherein the control circuit further comprises a delay circuit configured to vary the delay time to turn on the power switch

[00251] Example 57: The primary controller of any one of examples 51 to 56, wherein the delay circuit comprises a first switch coupled to be controlled by the first mode signal; a first delay circuit configured to output the control signal after a first delay time, wherein the first delay time is substantially the delay time to turn on the power switch; a second switch coupled to be controlled by the second mode signal; and a second delay circuit configured to output the control signal after a second delay time, wherein the second delay time is substantially the s delay time to turn on the power switch, wherein the second delay time is greater than the first delay time.

[00252] Example 58: A power converter, comprising an energy transfer element coupled between an input of the power converter and an output of the power converter; a power switch coupled to the energy transfer element; a clamp driver configured to control a clamp switch ; and a power converter controller configured to control the power switch to transfer energy from the input of the power converter to the output of the power converter, the power converter controller further configured to generate a control signal in response to a mode of operation signal and to enable a turn on of a power switch after a turn off of the clamp switch, wherein the control signal varies a duration between the turn off of the clamp switch and the turn on of the power switch in response to the mode of operation signal.

[00253] Example 59: The power converter of example 58, wherein the power

converter controller comprises a primary controller and a secondary controller.

[00254] Example 60: The power converter of example 58 or 59, the secondary controller comprising a detector circuit configured to generate a crossing signal in response to a forward voltage signal crossing below a threshold; a comparator coupled to generate a first state of an off signal in response to the forward voltage signal being greater than a turn off threshold, the comparator further coupled to generate a second state of the off signal in response to the forward voltage signal being less than the turn off threshold; a first flip flop coupled to turn on a synchronous rectifier in response to the crossing signal and to turn off the synchronous rectifier in response to the first state of the off signal; a mode detection circuit configured to output a first mode signal in response to a conduction of the synchronous rectifier when a feedback signal is below a reference, the mode detection circuit further configured to output a second mode signal in response to no conduction of the synchronous rectifier when the feedback signal is below the reference; and a secondary control circuit configured to generate a first pattern of a request signal in response to the first mode signal, the secondary control circuit further configured to generate a second pattern of the request signal in response to the second mode signal.

[00255] Example 61: The power converter of any one of examples 58 to 60, the primary controller configured to generate the control signal in response to the first pattern of the request signal, the primary controller further configured to generate the control signal in response to the second pattern of the request signal.

[00256] Example 62: The power converter of any one of examples 58 to 61, the mode of operation signal comprising a first mode of operation signal, wherein the first mode of operation signal is representative of continuous conduction mode (CCM); and a second mode of operation signal, wherein the second mode of operation signal is representative of discontinuous conduction mode (DCM).

[00257] Example 63: The power converter of any one of examples 58 to 62, the power converter controller comprising a zero crossing detector configured to generate a zero crossing signal representative of a bias voltage crossing below a zero reference, wherein the bias voltage is representative of a voltage of the power switch; a flip flop coupled to assert a first mode of an operation signal in response to a drive signal and to assert a second mode of the operation signal in response to the zero crossing signal; and a drive circuit configured to generate the drive signal to control the power switch to transfer energy from the input of the power converter to the output of the power converter.

[00258] Example 64: The power converter of any one of examples 58 to 63, the power converter controller further comprising an enable circuit configured to generate an enable signal in response to a request signal representative of an output of the power converter, the

enable circuit further configured to generate a first mode signal and a second mode signal in response to the operation signal; and a monostable multivibrator coupled to generate a clamp drive signal to turn on the clamp switch in response to the enable signal, the monostable multivibrator further coupled to output a pulse in the clamp drive signal for a first duration, wherein the first duration represents a turn on time of the clamp switch.

[00259] Example 65: The power converter of any one of examples 58 to 60, the power converter controller comprising a control circuit configured to determine the mode of operation signal in response to a drive signal of the power switch; and a drive circuit configured to generate the drive signal to control the power switch to transfer energy from an input of the power converter to an output of the power converter.

[00260] Example 66: The power converter of any one of examples 58 to 65, further comprising a communication link between the primary controller and the secondary controller, wherein the communication link provides galvanic isolation between the primary controller and the secondary controller and is formed from a leadframe.

[00261] Example 67: A secondary controller configured for use in a power converter, the secondary controller comprising a mode detection circuit configured to determine a mode of operation of the power converter in response to a forward voltage representative of a voltage of a secondary winding of an energy transfer element of a power converter, the mode detection circuit configured to output a first mode signal in response to no detection of a relaxation ring in the forward voltage and to output a second mode signal in response to detection of the relaxation ring; and a control circuit configured to generate a first pattern of a request signal in response to the first mode signal and to generate a second pattern of the request signal in response to the second mode signal, wherein the request signal is representative of a request to turn on a power switch of the power converter and the power switch is turned on after a first delay time in response to the first pattern and turn on after a second delay time in response to the second pattern.

[00262] Example 68: The secondary controller of example 67, wherein the mode detection circuit is configured to output the first mode signal in response to a feedback signal representative of an output of the power converter falling below a reference and no detection of the relaxation ring and to output the second mode signal in response to the feedback signal falling below the reference and detection of the relaxation ring.

[00263] Example 69: The secondary controller of examples 67 or 68, wherein the first pattern of the request signal is representative of a continuous conduction mode (CCM) of the power converter and the second pattern of the request signal is representative of a discontinuous conduction mode (DCM) of the power converter.

CLAIMS

What is claimed is:

1. A secondary controller configured for use in a power converter, the secondary controller comprising:
 - a detector circuit configured to generate a crossing threshold signal in response to a forward voltage signal crossing below a threshold;
 - a comparator coupled to generate a first state of an off signal in response to the forward voltage signal being greater than a turn off threshold, the comparator further coupled to generate a second state of the off signal in response to the forward voltage signal being less than the turn off threshold;
 - a first flip flop coupled to turn on a synchronous rectifier in response to the crossing threshold signal and to turn off the synchronous rectifier in response to the second state of the off signal;
 - a mode detection circuit configured to output a first mode signal in response to a feedback signal being below a reference and a first state of a secondary drive signal, the mode detection circuit further configured to output a second mode signal in response to the feedback signal being below the reference and a second state of the secondary drive signal; and
 - a control circuit configured to generate a first pattern of a request signal in response to the first mode signal, the control circuit further configured to generate a second pattern of the request signal in response to the second mode signal.
2. The secondary controller of claim 1, wherein the first pattern of the request signal is representative of a continuous conduction mode (CCM) of the power converter.
3. The secondary controller of claim 1, wherein the second pattern of the request signal is representative of a discontinuous conduction mode (DCM) of the power converter.
4. The secondary controller of claim 1, wherein the mode detection circuit comprises:
 - a multiplexer configured to select the first mode signal or the second mode signal in response to the turn on or turn off of the synchronous rectifier.
5. The secondary controller of claim 4, wherein the mode detection circuit further comprises:

a mode flip-flop coupled to control a switch in response to the feedback signal being below the threshold, wherein the mode detection circuit outputs the first mode signal or the second mode signal when the switch is closed.

6. A power converter, comprising:

- an energy transfer element coupled between an input of the power converter and an output of the power converter;

- a power switch coupled to the energy transfer element;

- a clamp driver coupled to a clamp capacitor and a clamp switch;

- a primary controller coupled to the clamp driver and the power switch; and

- a secondary controller configured to control switching of the power switch to control a transfer of energy through the energy transfer element from the input of the power converter to the output of the power converter, the secondary controller comprising:

 - a detector circuit configured to generate a crossing threshold signal in response to a forward voltage signal crossing below a threshold;

 - a comparator coupled to generate a first state of an off signal in response to the forward voltage signal being greater than a turn off threshold, the comparator further coupled to generate a second state of the off signal in response to the forward voltage signal being less than the turn off threshold;

 - a first flip flop coupled to turn on a synchronous rectifier in response to the crossing threshold signal and to turn off the synchronous rectifier in response to the first state of the off signal;

 - a mode detection circuit configured to output a first mode signal in response to conduction of the synchronous rectifier, the mode detection circuit further configured to output a second mode signal in response to no conduction of the synchronous rectifier; and

 - a secondary control circuit configured to generate a first pattern of a request signal in response to the first mode signal, the secondary control circuit further configured to generate a second pattern of the request signal in response to the second mode signal.

7. The power converter of claim 6, the primary controller comprising:

- a primary control circuit configured to generate a control signal in response to the request signal, wherein the control signal represents a delay time to enable the power switch after turn off of the clamp switch, the primary control circuit further configured to generate a

clamp drive signal to control the clamp driver to turn on the clamp switch in response to the request signal; and

a drive circuit configured to generate a drive signal in response to the control signal to enable the power switch to transfer energy from the input of the power converter to the output of the power converter.

8. The power converter of claim 7, the primary control circuit comprising:

an enable circuit configured to generate an enable signal in response to the request signal, the enable circuit further configured to generate a first mode of operation signal in response to the first pattern of the request signal, and further configured to generate a second mode of operation signal in response to the second pattern of the request signal; and

a monostable multivibrator coupled to generate the clamp drive signal to turn on the clamp switch in response to the enable signal and to output a pulse for a first duration, wherein the first duration is the turn on time for the clamp switch.

9. The power converter of claim 8, the primary control circuit further comprising a second flip flop coupled to the monostable multivibrator to generate a first logic state in response to the clamp drive signal.

10. The power converter of claim 8, wherein the primary control circuit is further configured to control the clamp driver to inject charge stored in the clamp capacitor into the energy transfer element to discharge a parasitic capacitance of the power switch into the energy transfer element before the power switch is turned on.

11. The power converter of claim 8, wherein the primary control circuit further comprises a delay circuit configured to vary the delay time between of the turn off of the clamp switch and the turn on of the power switch in response to the first mode of operation signal or the second mode of operation signal.

12. The power converter of claim 11, the delay circuit comprising:

a first switch coupled to be controlled by the first mode of operation signal;

a first delay circuit coupled to the first switch, the first delay circuit configured to output the control signal after a first delay time, wherein the delay time is substantially the first delay time;

a second switch controlled by the second mode of operation signal; and

a second delay circuit coupled to the second switch, the second delay circuit configured to output the control signal after a second delay time, wherein the delay time is substantially the second delay time, wherein the second delay time is greater than the first delay time.

13. A primary controller configured for use in a power converter, the primary controller comprising:

a control circuit configured to determine a mode of operation of the power converter in response to a bias voltage representative of a voltage of an input winding of an energy transfer element, the control circuit configured to generate a control signal in response to the mode of operation of the power converter, wherein the control signal represents a delay time to enable a turn on of a power switch after a turn off of a clamp switch, the control circuit further configured to generate a clamp drive signal to control a clamp driver in response to a request signal representative of an output of the power converter; and

a drive circuit configured to generate a drive signal to control the power switch in response to the control signal to transfer energy from an input of the power converter to an output of the power converter.

14. The primary controller of claim 13, the control circuit comprising:

an enable circuit configured to generate an enable signal in response to a request signal;

a monostable multivibrator coupled to generate the clamp drive signal to turn on the clamp switch in response to the enable signal and to output a pulse for a first duration, wherein the first duration is the turn on time for the clamp switch;

a zero crossing detector configured to generate a zero crossing signal representative of the bias voltage crossing a zero crossing reference; and

a flip flop coupled to assert a first mode of operation signal in response to a drive signal and to assert a second mode of operation signal in response to the zero crossing signal.

15. The primary controller of claim 14, wherein an output of the flip flop is sampled in response to the request signal.

16. The primary controller of claim 14, wherein the first mode of operation signal represents a continuous conduction mode (CCM) operation of the power converter.

17. The primary controller of claim 14, wherein the second mode of operation signal represents a discontinuous conduction mode (DCM) operation of the power converter.

18. A power converter, comprising:

- an energy transfer element coupled between an input of the power converter and an output of the power converter;
- a power switch coupled to the energy transfer element;
- a clamp switch coupled to the energy transfer element and the power switch, the clamp switch configured to be controlled by a clamp driver; and
- a primary controller coupled to the power switch, the primary controller comprising:
 - a control circuit configured to determine a mode of operation of the power converter in response to a bias voltage representative of a voltage of an input winding of the energy transfer element, the control circuit further configured to generate a control signal in response to the mode of operation, wherein the control signal represents a delay time to enable a turn on of the power switch after a turn off of the clamp switch, the control circuit further configured to generate a clamp drive signal to output to the clamp driver; and
 - a drive circuit configured to generate a drive signal to control the power switch to transfer energy from the input of the power converter to the output of the power converter.

19. The power converter of claim 18, wherein the power converter exhibits two modes of operation comprising:

- a first mode of operation, wherein the first mode of operation is representative of continuous conduction mode (CCM); and
- a second mode of operation, wherein the second mode of operation is representative of discontinuous conduction mode (DCM).

20. The power converter of claim 18, wherein the energy transfer element further comprises a magnetizing inductance and a leakage inductance between the clamp driver and a primary winding of the energy transfer element.

21. The power converter of claim 20, wherein the leakage inductance of the energy transfer element reduces a drain to source voltage of the power switch to substantially zero in response to the turn off of the clamp switch in CCM.

22. The power converter of claim 20, wherein the leakage inductance and the magnetizing inductance of the energy transfer element reduces a drain to source voltage of the power switch to substantially zero in response to the turn on of the clamp switch in DCM.

23. The power converter of claim 18, further comprising a secondary controller configured to generate a request signal representative of a request to turn on the power switch in response to a feedback signal representative of the output of the power converter.

24. The power converter of claim 23, wherein the secondary controller is galvanically isolated from the primary controller.

25. The power converter of claim 18, the control circuit comprising:

- a zero crossing detector configured to generate a zero crossing signal representative of the bias voltage crossing a zero crossing reference;
- a first flip flop coupled to assert a first mode of operation signal in response to the drive signal and to assert a second mode of operation signal in response to the zero crossing signal;
- an enable circuit configured to generate an enable signal in response to a request signal representative of an output of the power converter, the enable circuit further configured to generate a first mode signal in response to the first mode of operation signal and to generate a second mode signal in response to the second mode of operation signal; and
- a monostable multivibrator coupled to generate a clamp drive signal to turn on the clamp switch in response to the enable and to output a pulse in the clamp drive signal for a first duration, wherein the first duration is representative of a turn on time of the clamp switch.

26. The power converter of claim 25, wherein the control circuit further comprises a delay circuit configured to vary the delay time between the turn off of the clamp switch and a turn on the power switch.

27. The power converter of claim 26, wherein the delay circuit comprises:

- a first switch coupled to be controlled by the first mode signal;
- a first delay circuit configured to output the control signal after a first delay time, wherein the first delay time is substantially the delay time between the turn off of the clamp switch and the turn on the power switch;
- a second switch coupled to be controlled by the second mode signal; and

a second delay circuit configured to output the control signal after a second delay time, wherein the second delay time is substantially the delay time between the turn off of the clamp switch and the turn on the power switch, wherein the second delay time is greater than the first delay time.

28. A primary controller configured for use in a power converter, the primary controller comprising:

a control circuit configured to determine a mode of operation of the power converter in response to a drive signal of a power switch, the control circuit further configured to generate a control signal in response to a signal representative of the mode of operation of the power converter, wherein the control signal represents a delay time to enable a turn on of the power switch after a turn off of a clamp switch, the control circuit further configured to generate a clamp drive signal to control the clamp switch; and

a drive circuit configured to generate a drive signal to enable the power switch to transfer energy from an input of the power converter to an output of the power converter.

29. The primary controller of claim 28, the control circuit comprising:

a mode detection circuit configured to generate an operation signal in response to the drive signal;

an enable circuit configured to generate an enable signal in response to a request signal representative of an output of the power converter, the enable circuit further configured to generate a first mode signal and a second mode signal in response to the operation signal; and

a monostable multivibrator coupled to generate the clamp drive signal to turn on the clamp switch in response to the enable signal and to output a pulse in the clamp drive signal for a first duration, wherein the first duration is the turn on time of the clamp switch.

30. The primary controller of claim 29, the mode detection circuit comprising:

a switch configured to be controlled by the drive signal;

a current source coupled to the switch and configured to charge a capacitor, wherein the capacitor is charged and discharged in response to the drive signal that controls the switch; and

a comparator coupled to output a first state of the operation signal in response to a voltage reference being greater than a voltage of the capacitor and to output a second state of the operation signal in response to the voltage reference being substantially equal or less than the voltage of the capacitor.

31. The primary controller of claim 30, wherein the first state of the operation signal is representative of continuous conduction mode of operation (CCM), and wherein the second state of the operation signal is representative of a discontinuous conduction mode of operation (DCM).

32. The primary controller of claim 30, the mode detection circuit further comprising a diode coupled to a voltage source, the diode and the voltage source configured to clamp the voltage of the capacitor.

33. The primary controller of claim 29, wherein the control circuit further comprises a delay circuit configured to vary the delay time to turn on the power switch

34. The primary controller of claim 33, wherein the delay circuit comprises:
a first switch coupled to be controlled by the first mode signal;
a first delay circuit configured to output the control signal after a first delay time, wherein the first delay time is substantially the delay time to turn on the power switch;
a second switch coupled to be controlled by the second mode signal; and
a second delay circuit configured to output the control signal after a second delay time, wherein the second delay time is substantially the s delay time to turn on the power switch, wherein the second delay time is greater than the first delay time.

35. A power converter, comprising:
an energy transfer element coupled between an input of the power converter and an output of the power converter;
a power switch coupled to the energy transfer element;
a clamp driver configured to control a clamp switch ; and
a power converter controller configured to control the power switch to transfer energy from the input of the power converter to the output of the power converter, the power converter controller further configured to generate a control signal in response to a mode of operation signal and to enable a turn on of a power switch after a turn off of the clamp switch, wherein the control signal varies a duration between the turn off of the clamp switch and the turn on of the power switch in response to the mode of operation signal.

36. The power converter of claim 35, wherein the power converter controller comprises a primary controller and a secondary controller.

37. The power converter of claim 36, the secondary controller comprising:

a detector circuit configured to generate a crossing signal in response to a forward voltage signal crossing below a threshold;

a comparator coupled to generate a first state of an off signal in response to the forward voltage signal being greater than a turn off threshold, the comparator further coupled to generate a second state of the off signal in response to the forward voltage signal being less than the turn off threshold;

a first flip flop coupled to turn on a synchronous rectifier in response to the crossing signal and to turn off the synchronous rectifier in response to the first state of the off signal;

a mode detection circuit configured to output a first mode signal in response to a conduction of the synchronous rectifier when a feedback signal is below a reference, the mode detection circuit further configured to output a second mode signal in response to no conduction of the synchronous rectifier when the feedback signal is below the reference; and

a secondary control circuit configured to generate a first pattern of a request signal in response to the first mode signal, the secondary control circuit further configured to generate a second pattern of the request signal in response to the second mode signal.

38. The power converter of claim 37, the primary controller configured to generate the control signal in response to the first pattern of the request signal, the primary controller further configured to generate the control signal in response to the second pattern of the request signal.

39. The power converter of claim 35, the mode of operation signal comprising:

a first mode of operation signal, wherein the first mode of operation signal is representative of continuous conduction mode (CCM); and

a second mode of operation signal, wherein the second mode of operation signal is representative of discontinuous conduction mode (DCM).

40. The power converter of claim 35, the power converter controller comprising:

a zero crossing detector configured to generate a zero crossing signal representative of a bias voltage crossing below a zero reference, wherein the bias voltage is representative of a voltage of the power switch;

a flip flop coupled to assert a first mode of an operation signal in response to a drive signal and to assert a second mode of the operation signal in response to the zero crossing

signal; and

a drive circuit configured to generate the drive signal to control the power switch to transfer energy from the input of the power converter to the output of the power converter.

41. The power converter of claim 40, the power converter controller further comprising:
an enable circuit configured to generate an enable signal in response to a request signal representative of an output of the power converter, the enable circuit further configured to generate a first mode signal and a second mode signal in response to the operation signal; and
a monostable multivibrator coupled to generate a clamp drive signal to turn on the clamp switch in response to the enable signal, the monostable multivibrator further coupled to output a pulse in the clamp drive signal for a first duration, wherein the first duration represents a turn on time of the clamp switch.

42. The power converter of claim 35, the power converter controller comprising:
a control circuit configured to determine the mode of operation signal in response to a drive signal of the power switch; and
a drive circuit configured to generate the drive signal to control the power switch to transfer energy from an input of the power converter to an output of the power converter.

43. The power converter of claim 36, further comprising a communication link between the primary controller and the secondary controller, wherein the communication link provides galvanic isolation between the primary controller and the secondary controller and is formed from a leadframe.

44. A secondary controller configured for use in a power converter, the secondary controller comprising:
a mode detection circuit configured to determine a mode of operation of the power converter in response to a forward voltage representative of a voltage of a secondary winding of an energy transfer element of a power converter, the mode detection circuit configured to output a first mode signal in response to no detection of a relaxation ring in the forward voltage and to output a second mode signal in response to detection of the relaxation ring; and
a control circuit configured to generate a first pattern of a request signal in response to the first mode signal and to generate a second pattern of the request signal in response to the second mode signal, wherein the request signal is representative of a request to turn on a power switch of the power converter and the power switch is turned on after a first delay time in

response to the first pattern and turn on after a second delay time in response to the second pattern.

45. The secondary controller of claim 44, wherein the mode detection circuit is configured to output the first mode signal in response to a feedback signal representative of an output of the power converter falling below a reference and no detection of the relaxation ring and to output the second mode signal in response to the feedback signal falling below the reference and detection of the relaxation ring.

46. The secondary controller of claim 44, wherein the first pattern of the request signal is representative of a continuous conduction mode (CCM) of the power converter and the second pattern of the request signal is representative of a discontinuous conduction mode (DCM) of the power converter.

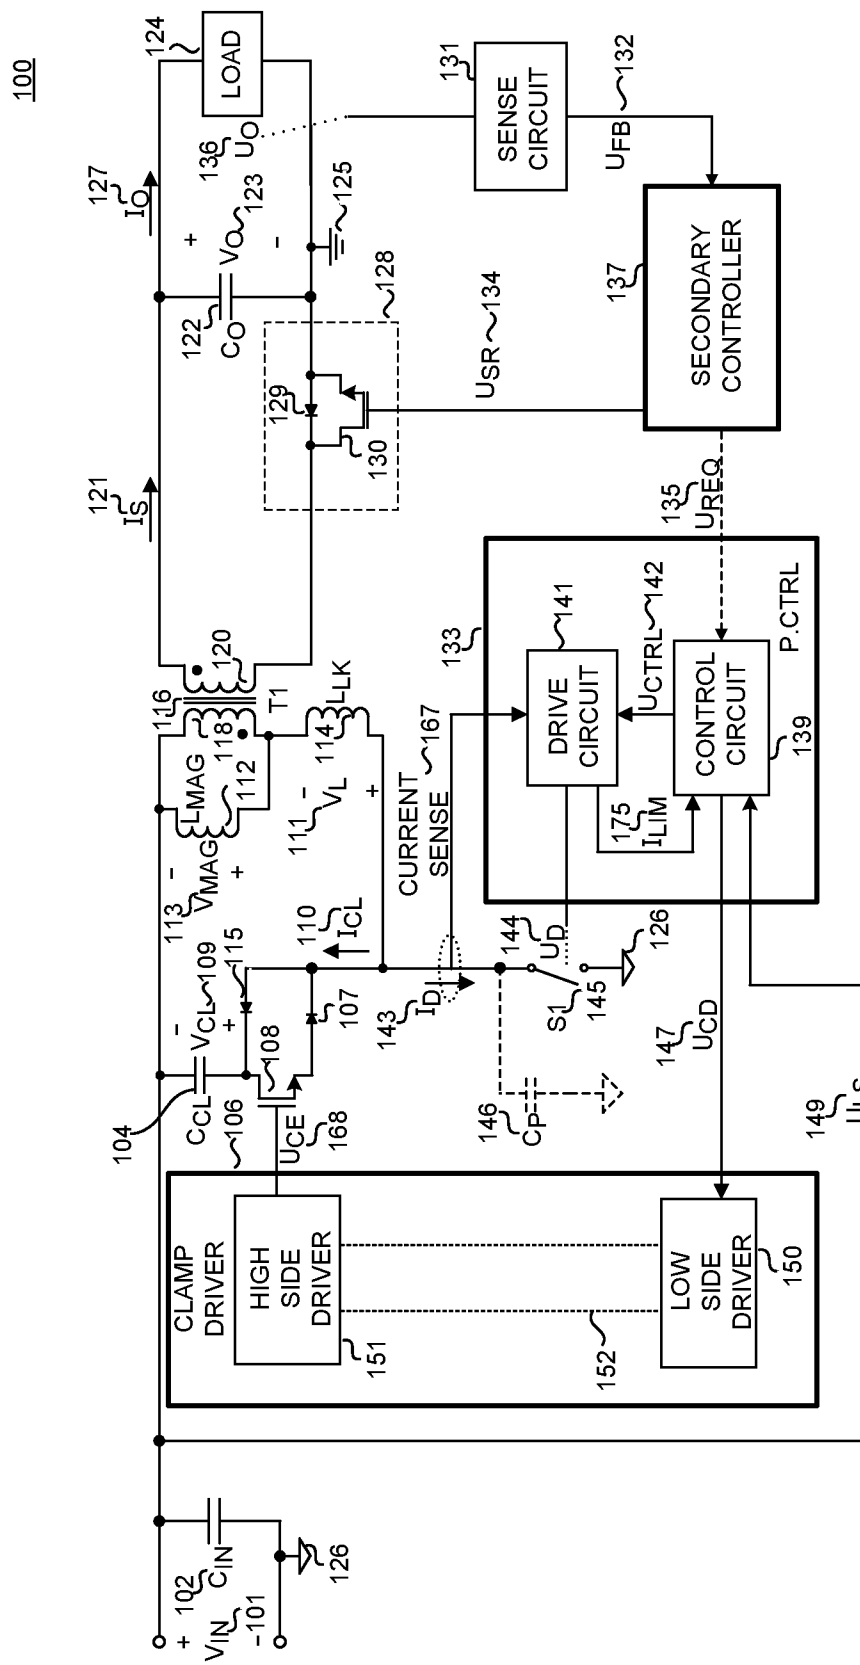


FIG. 1

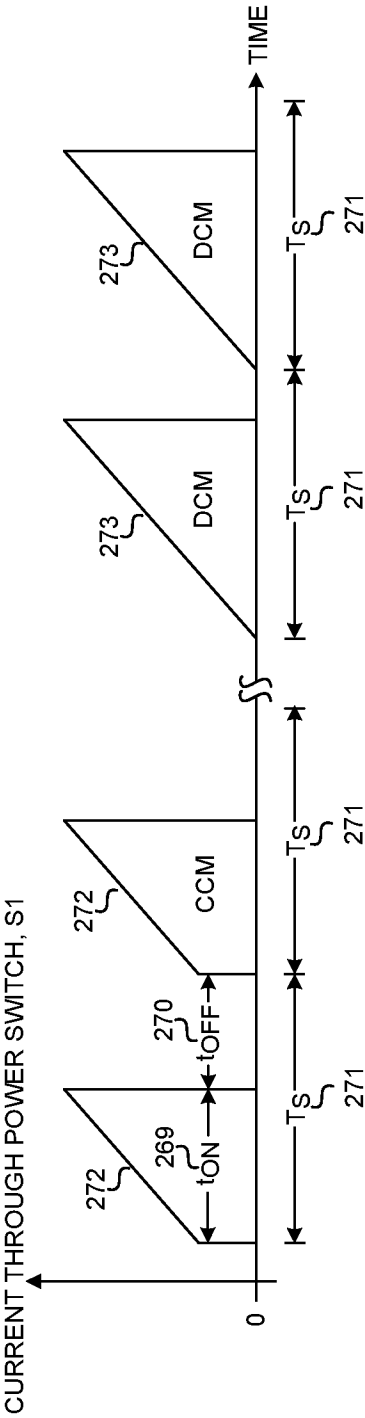
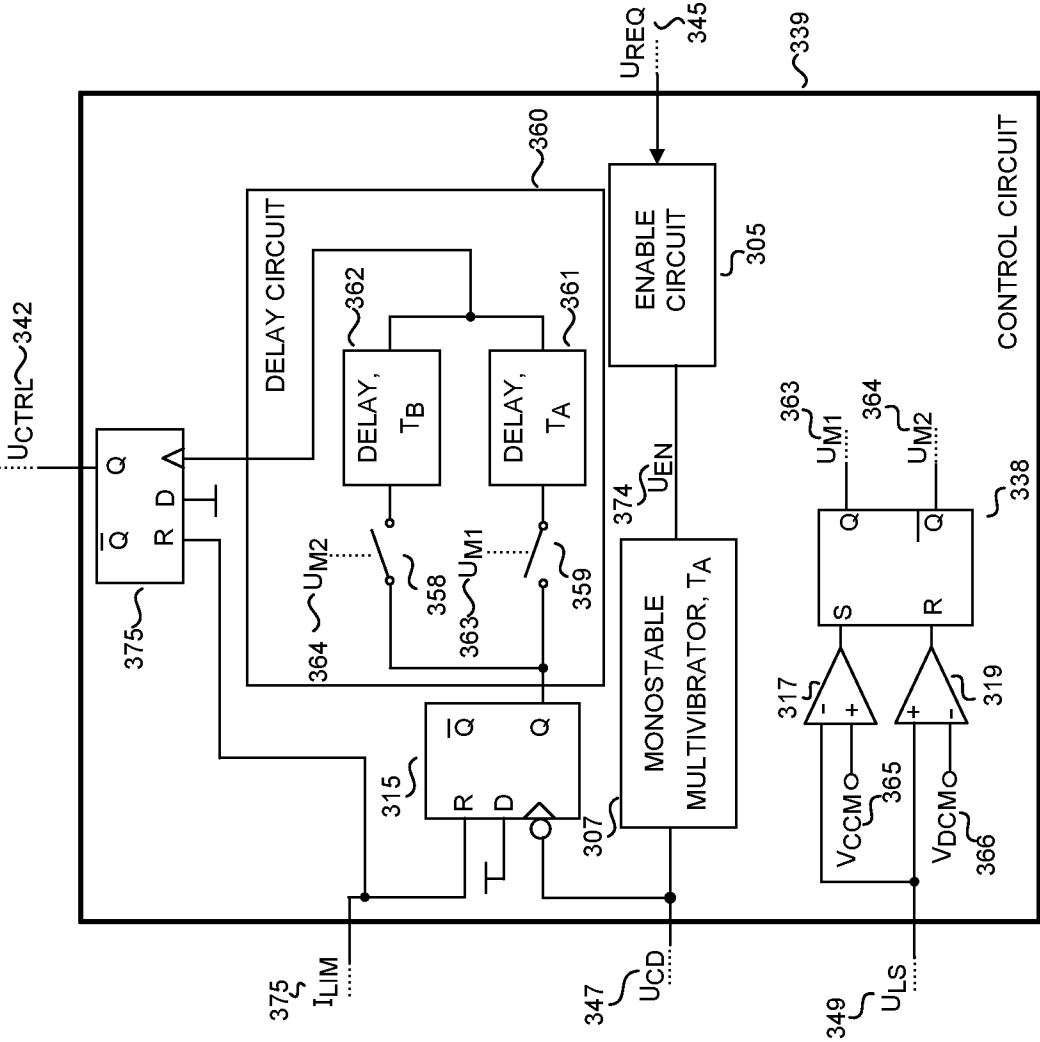


FIG. 2

FIG. 3



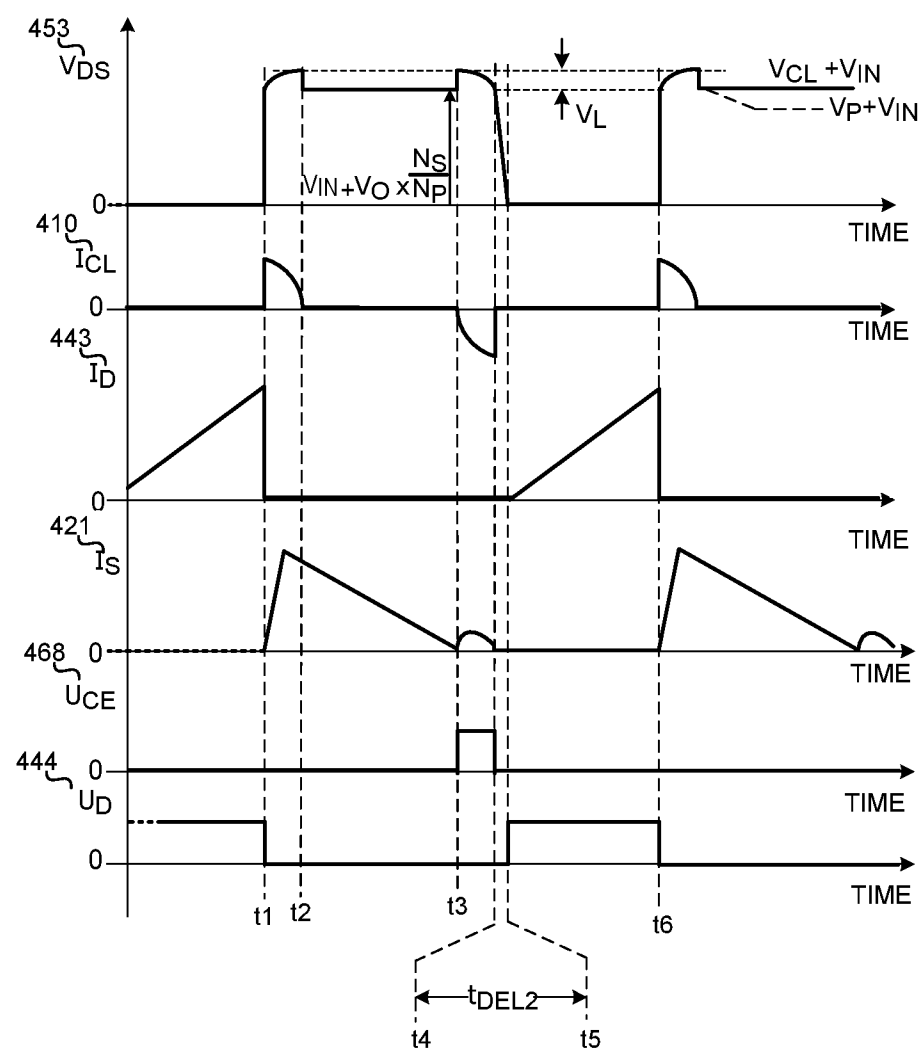


FIG. 4A

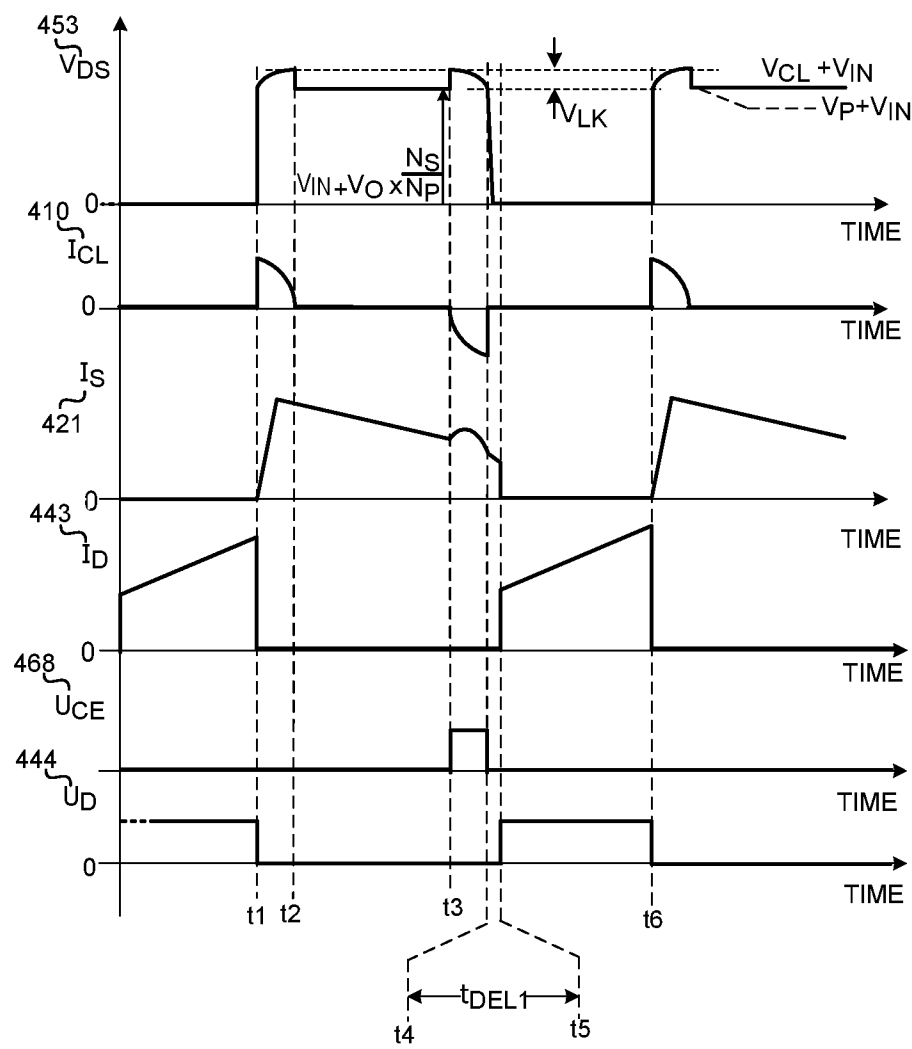


FIG. 4B

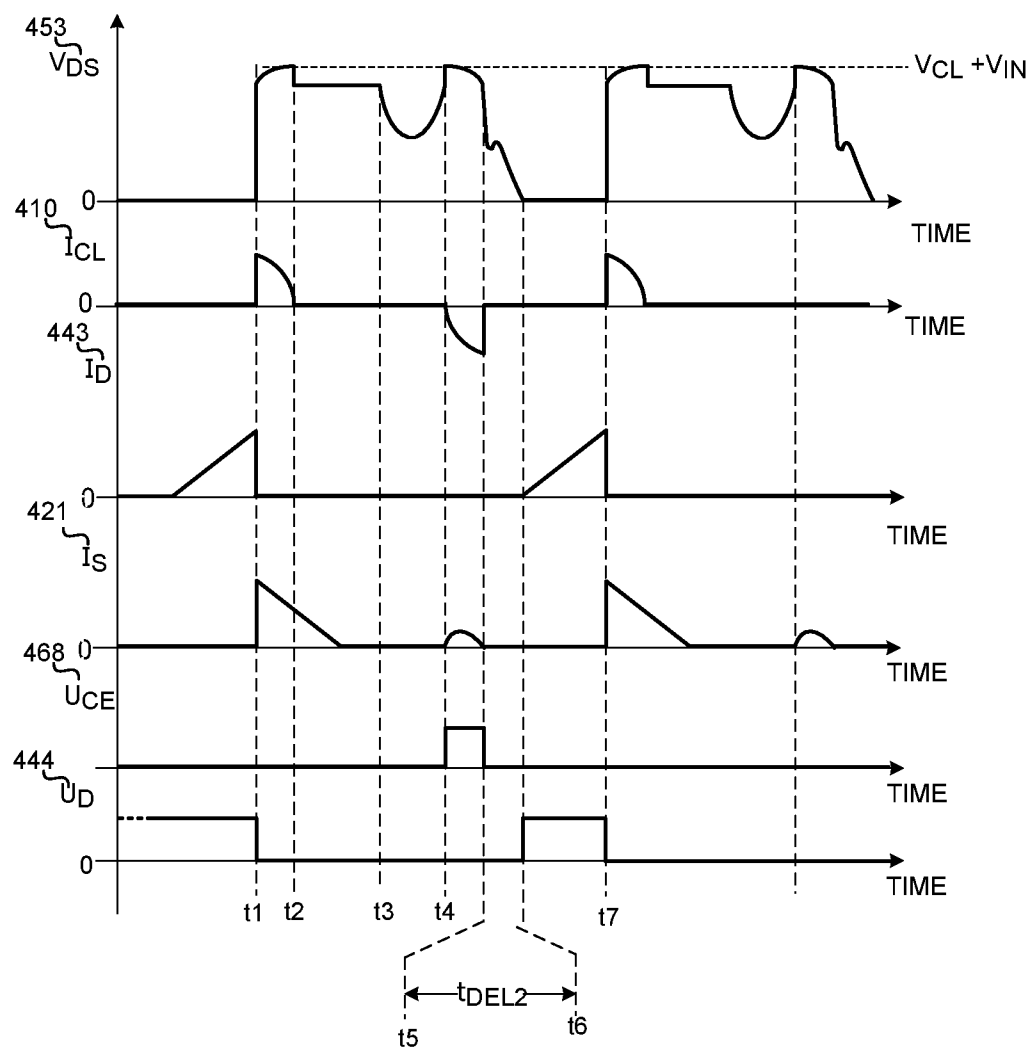


FIG.4C

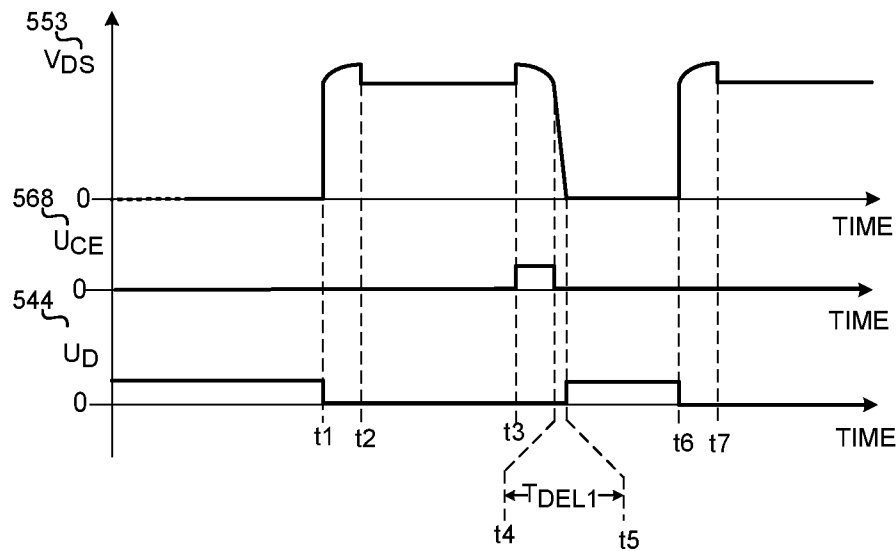


FIG. 5A

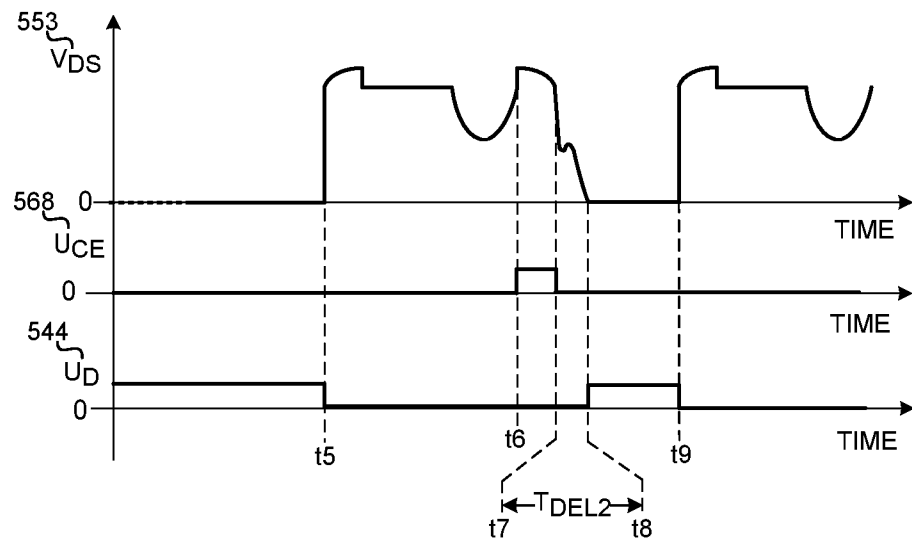


FIG. 5B

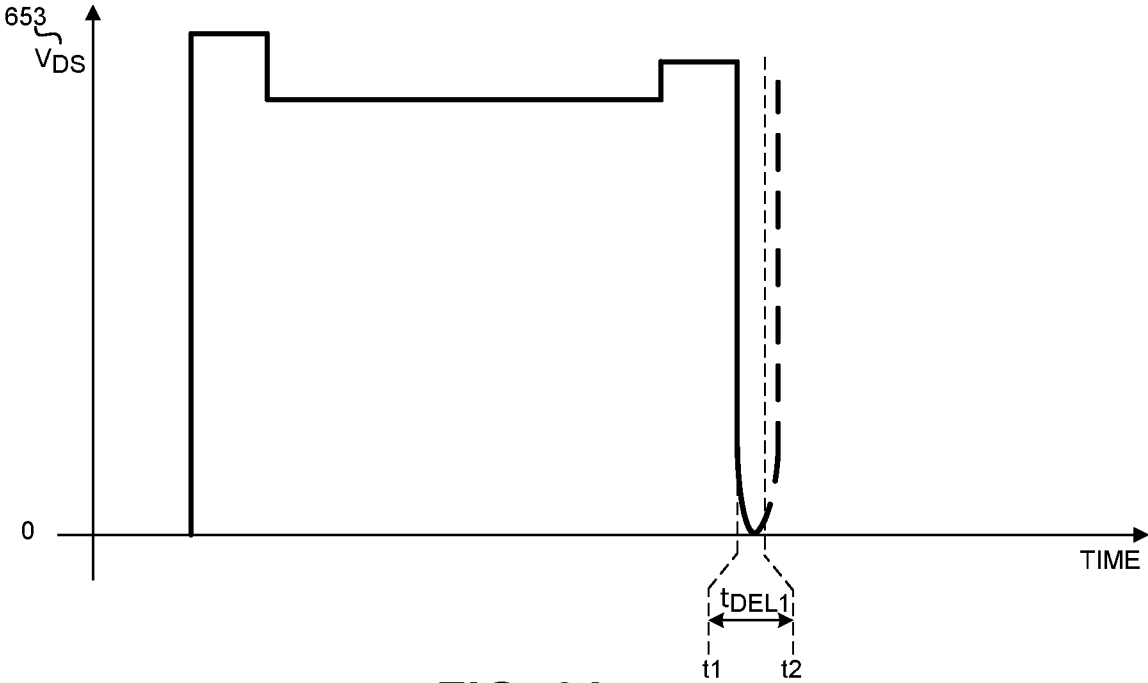


FIG. 6A

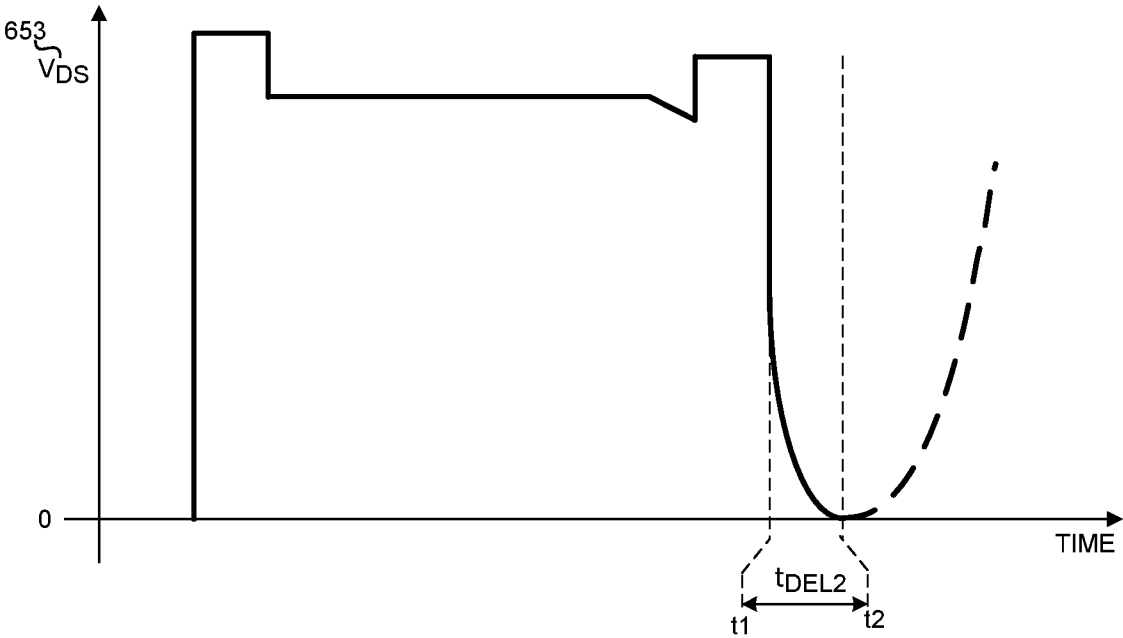


FIG. 6B

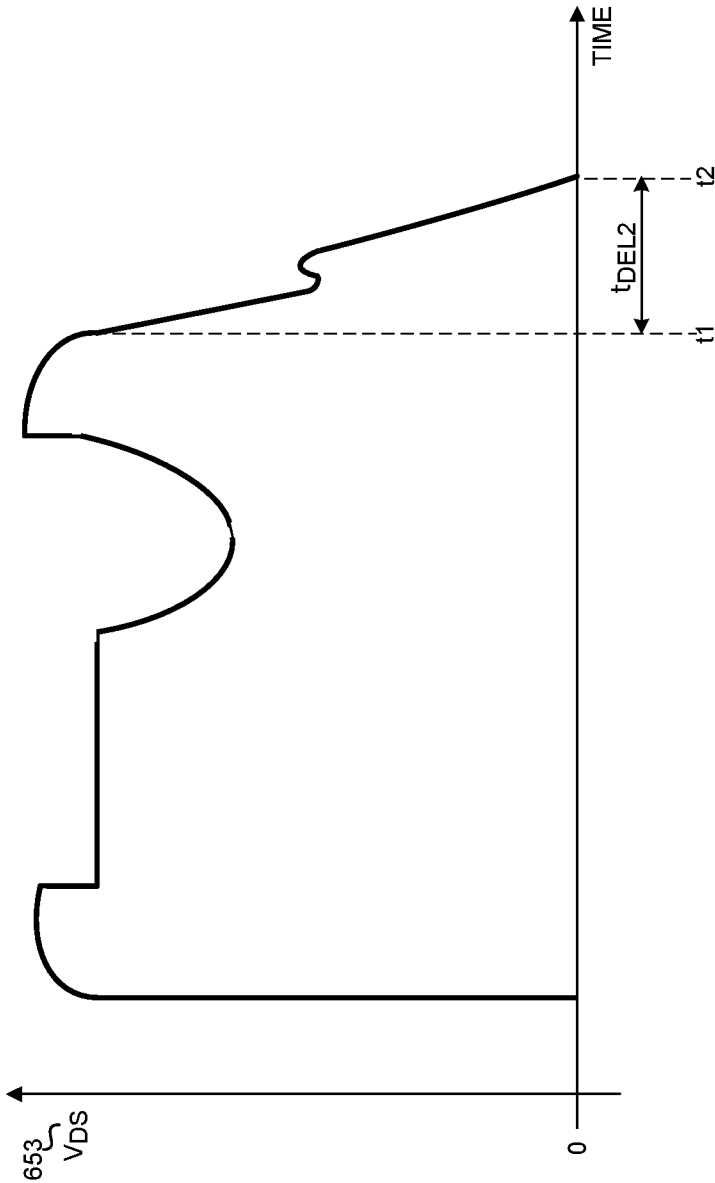


FIG. 6C

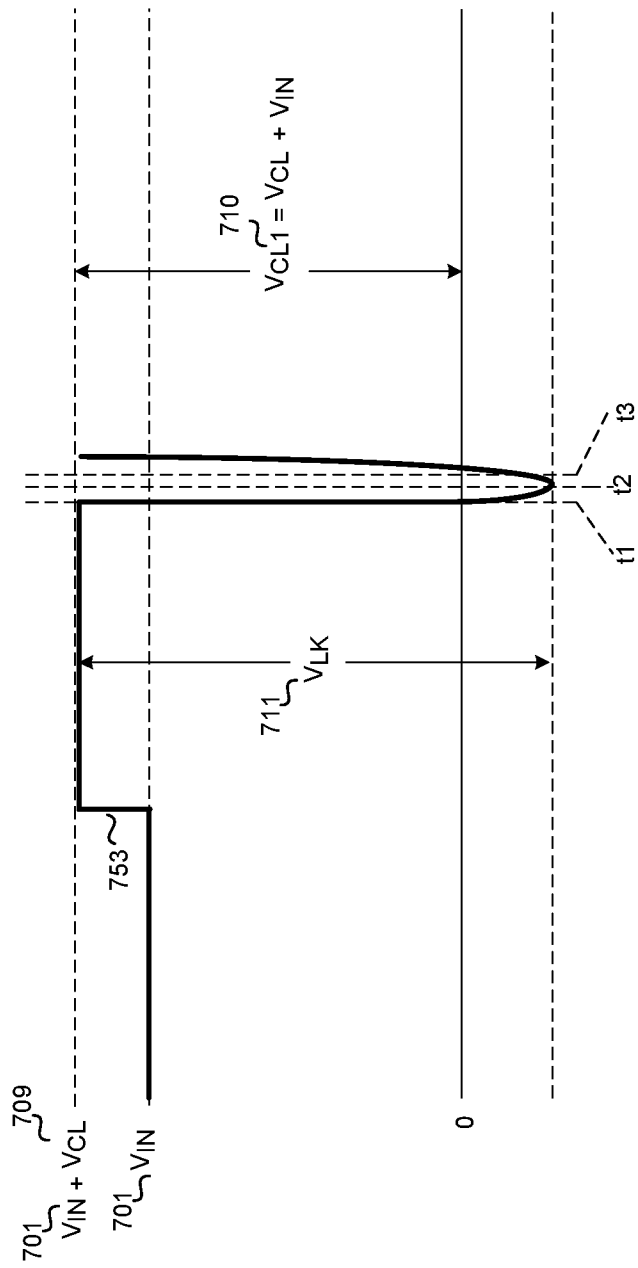


FIG. 7

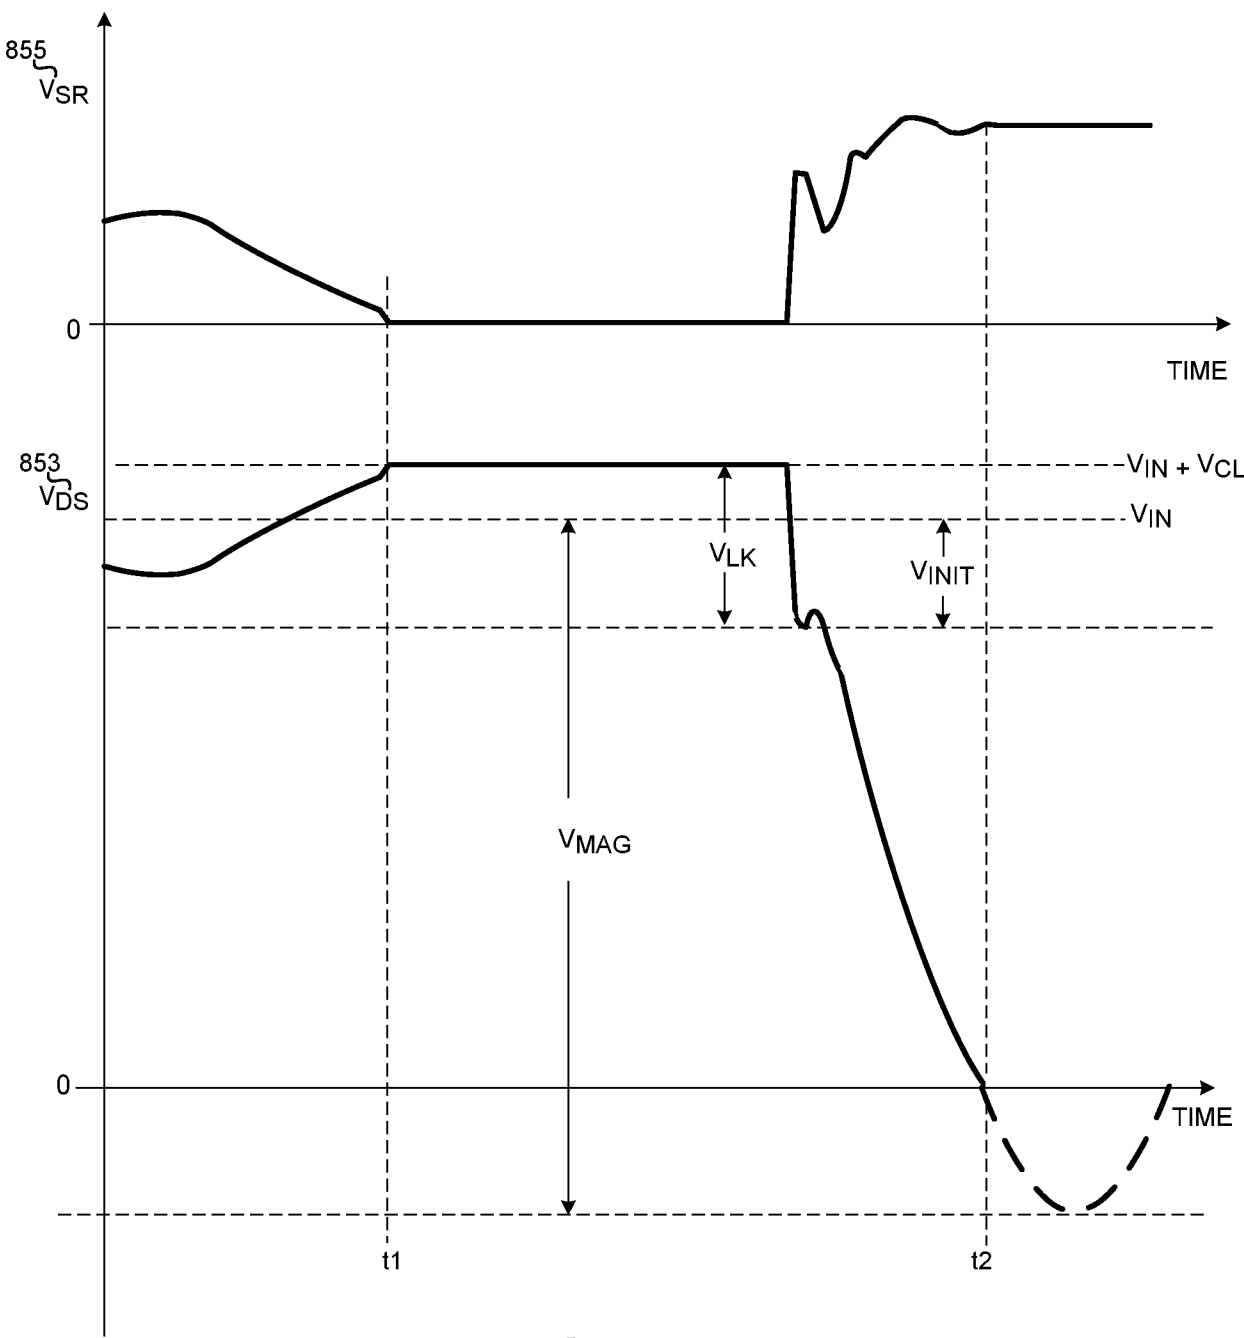


FIG. 8

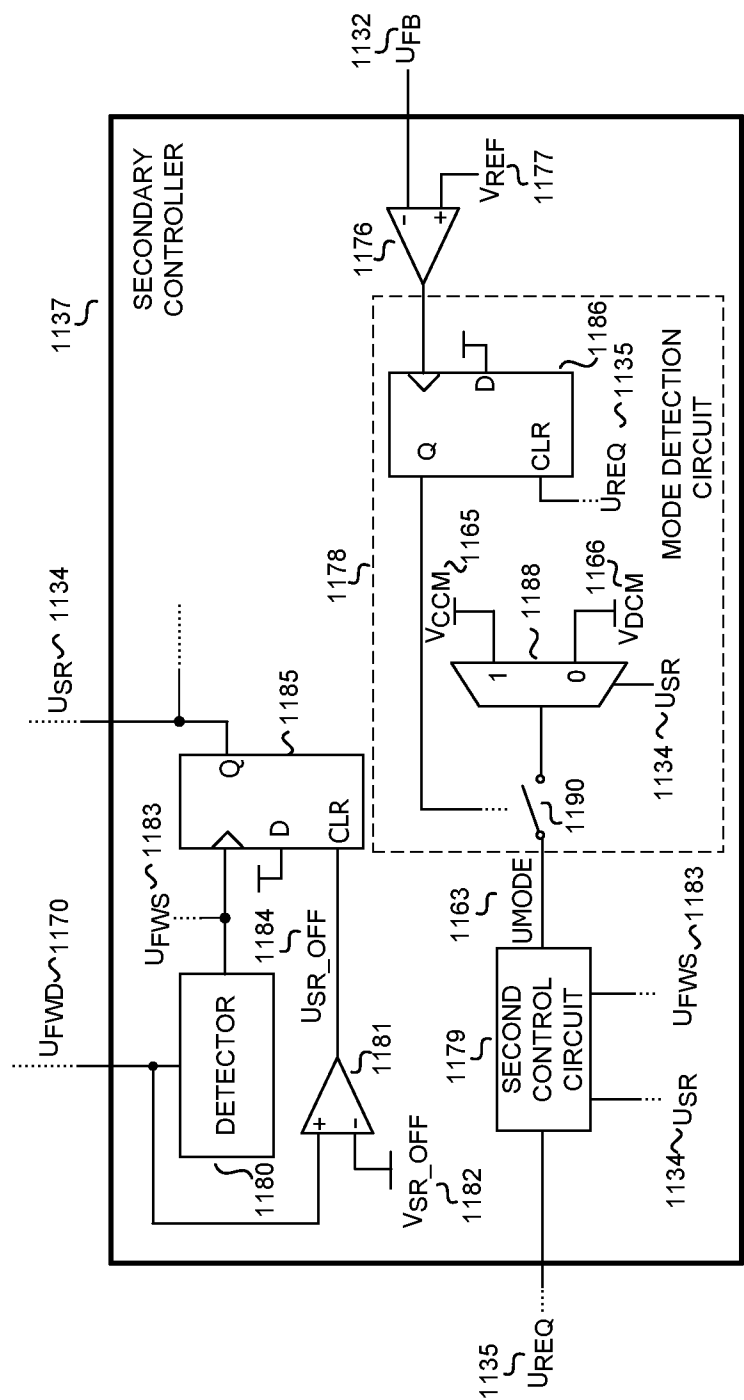


FIG. 11B

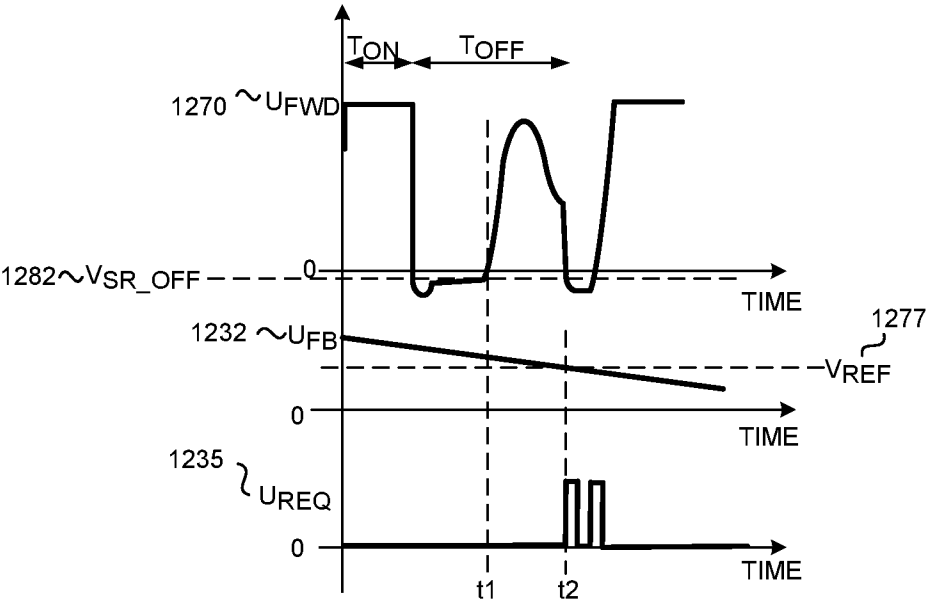


FIG. 12A

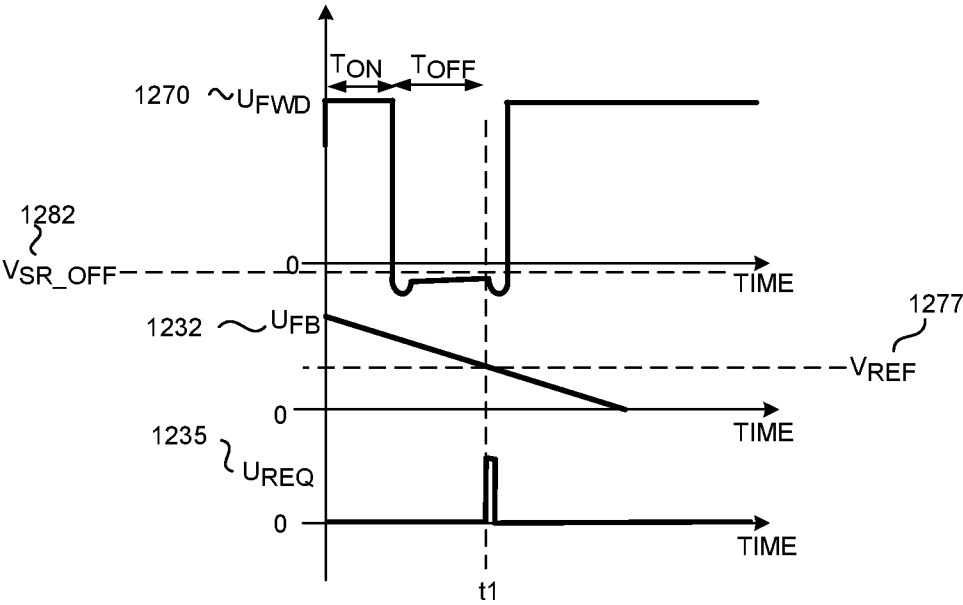


FIG. 12B

1300


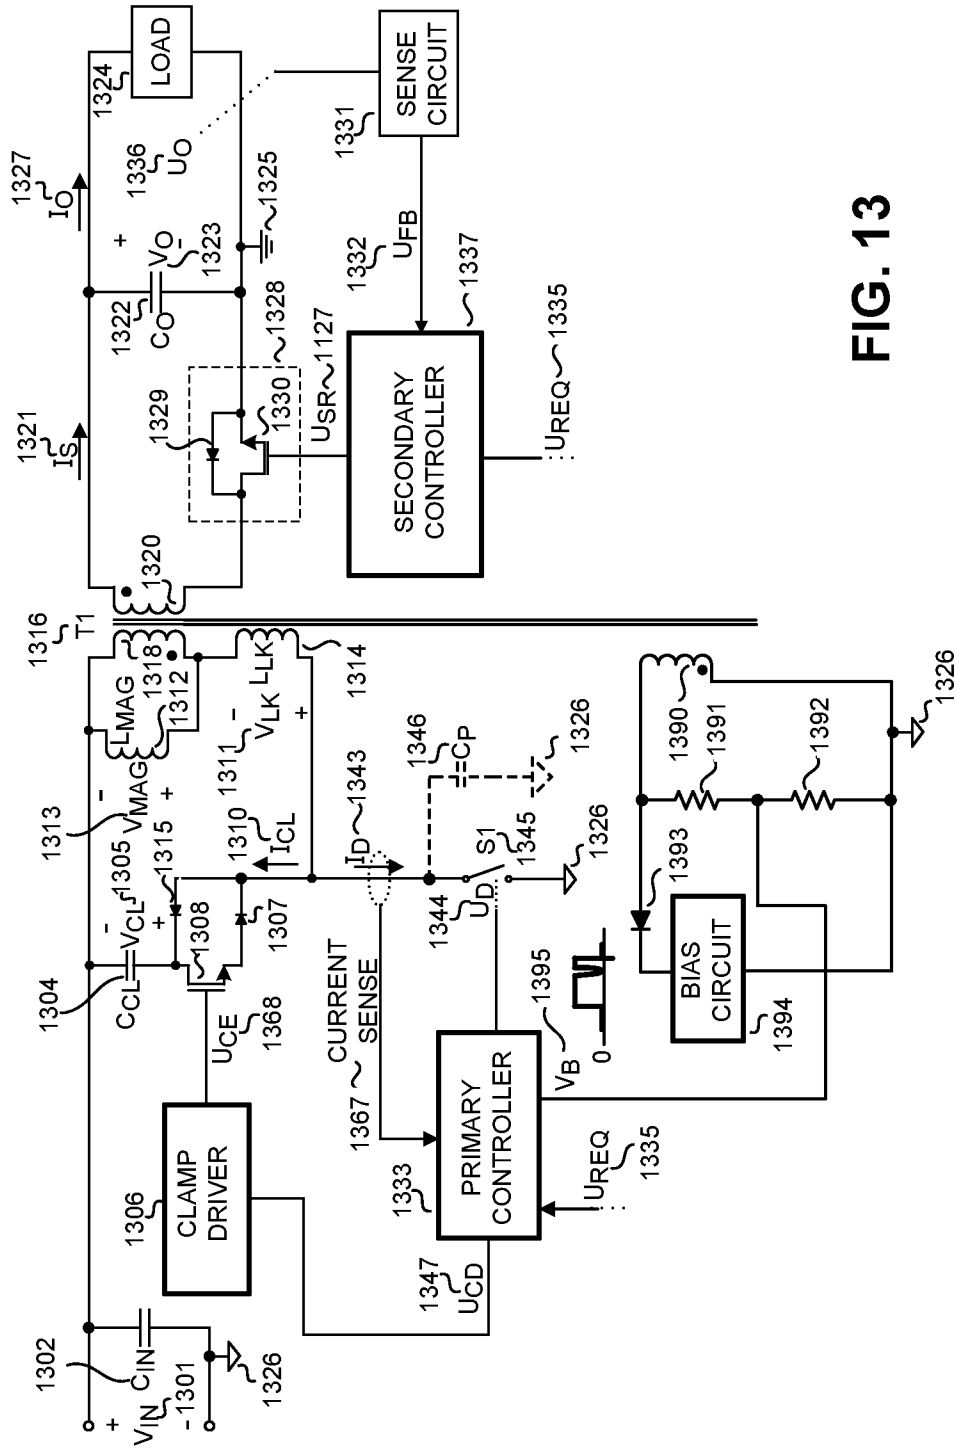


FIG. 13

FIG. 14

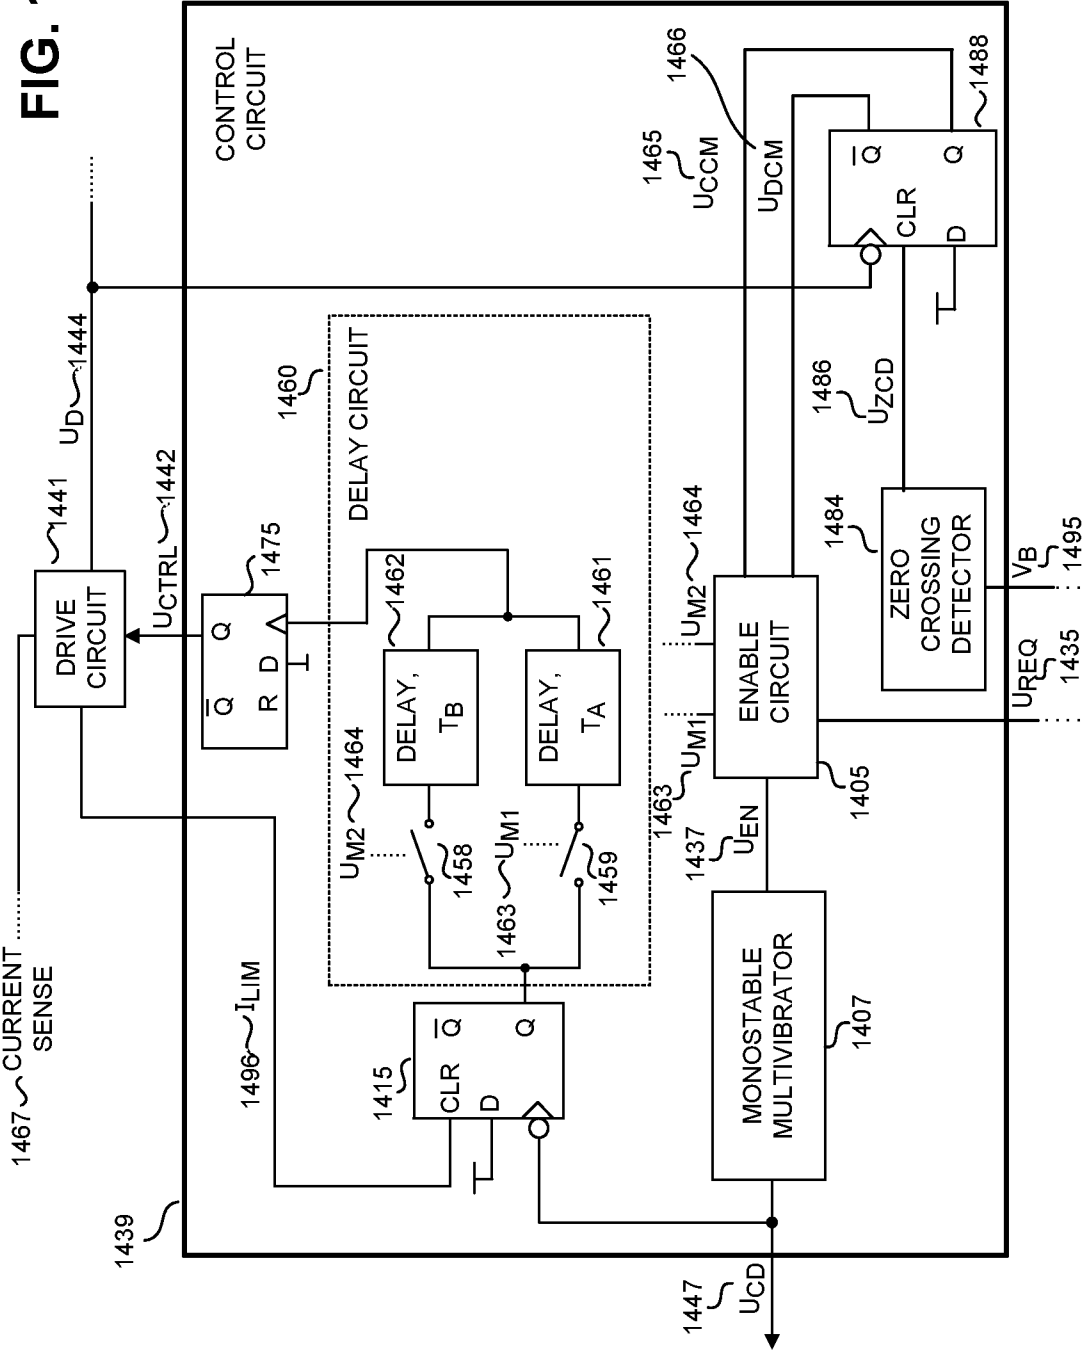

1500

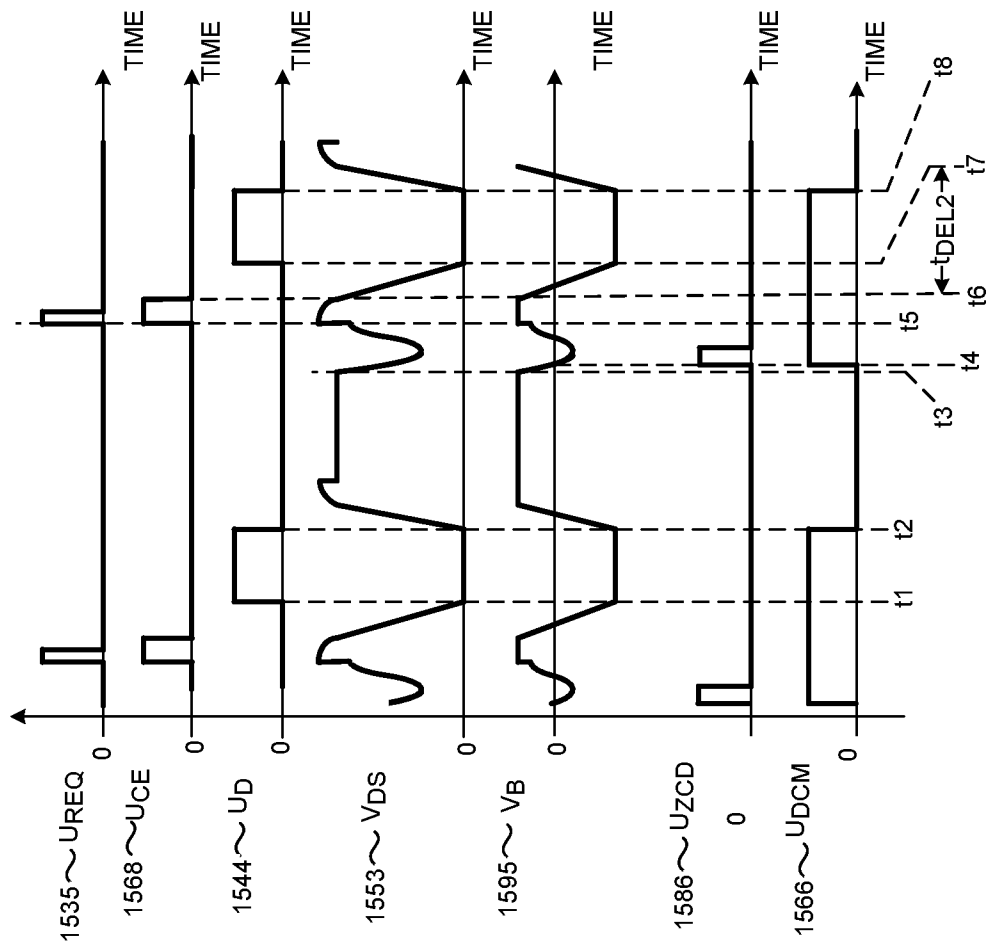


FIG. 15A

1501

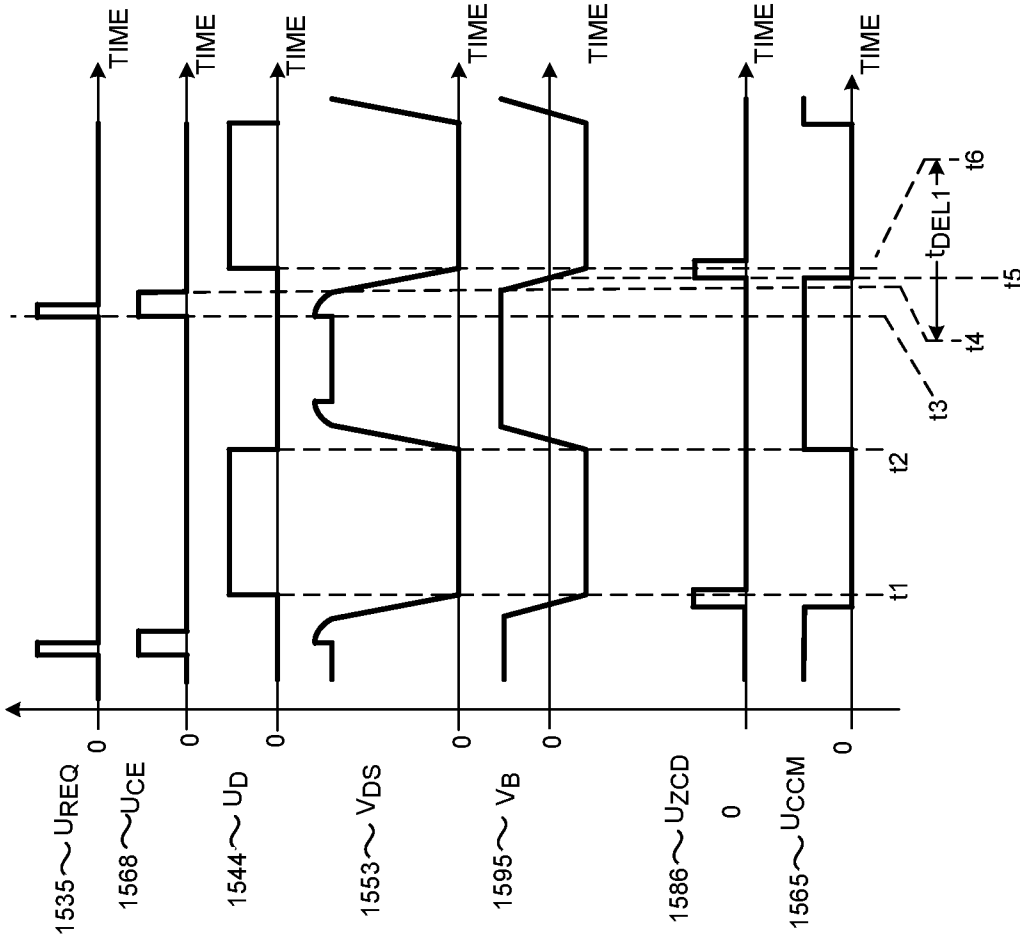


FIG. 15B

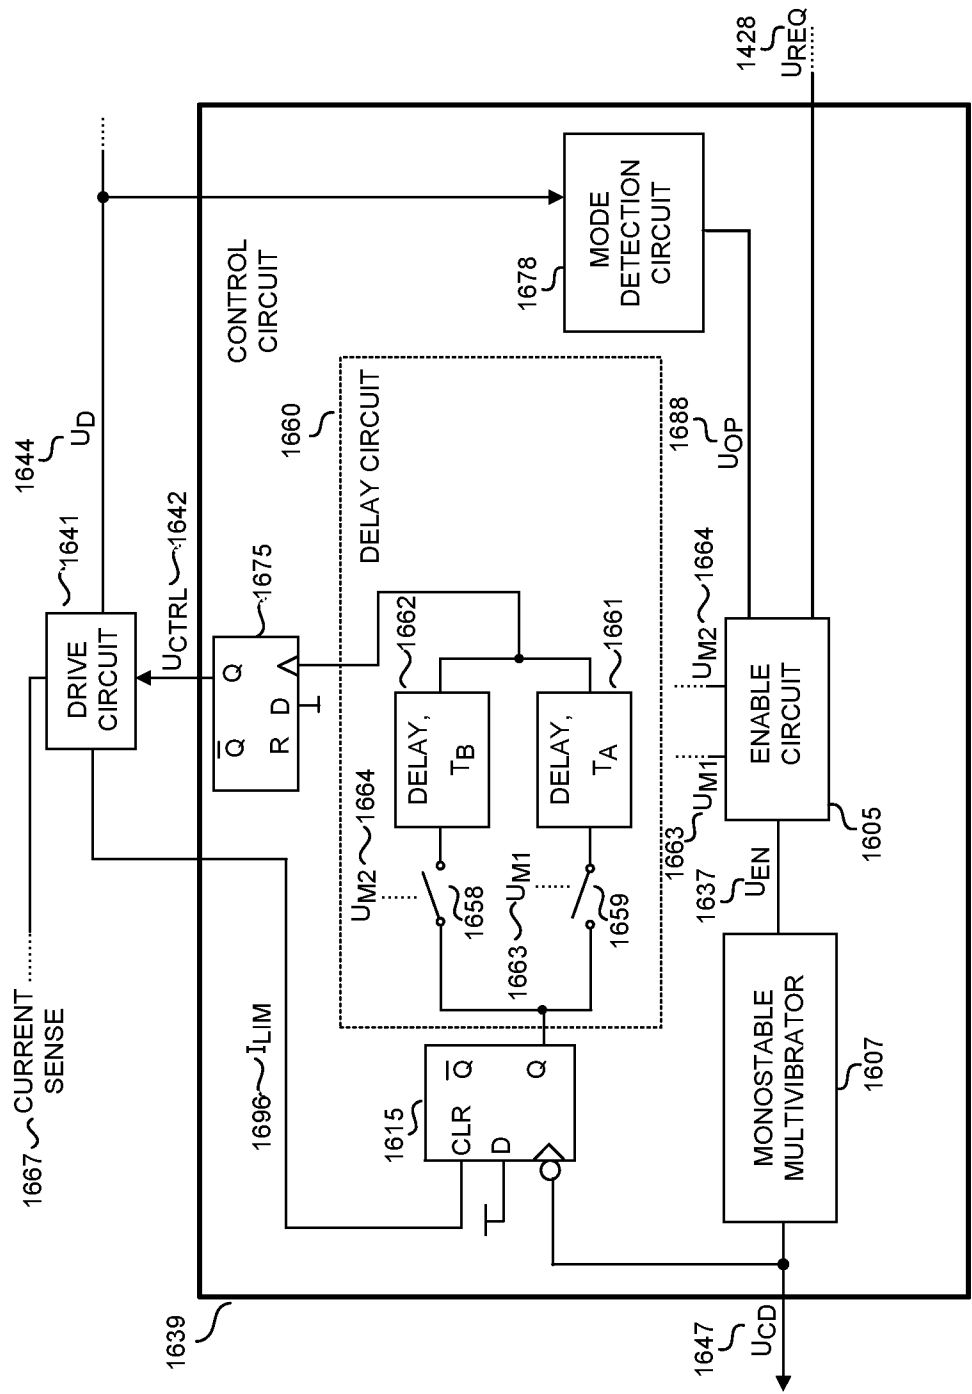


FIG. 16

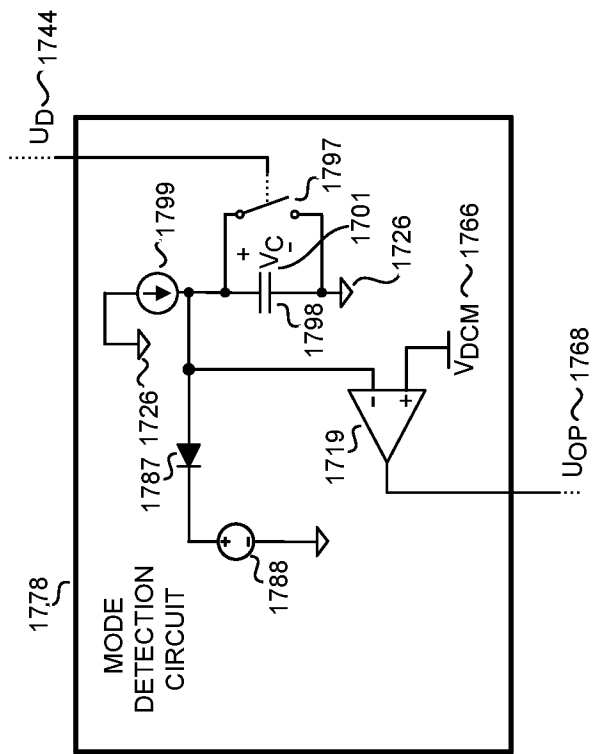


FIG. 17

1800

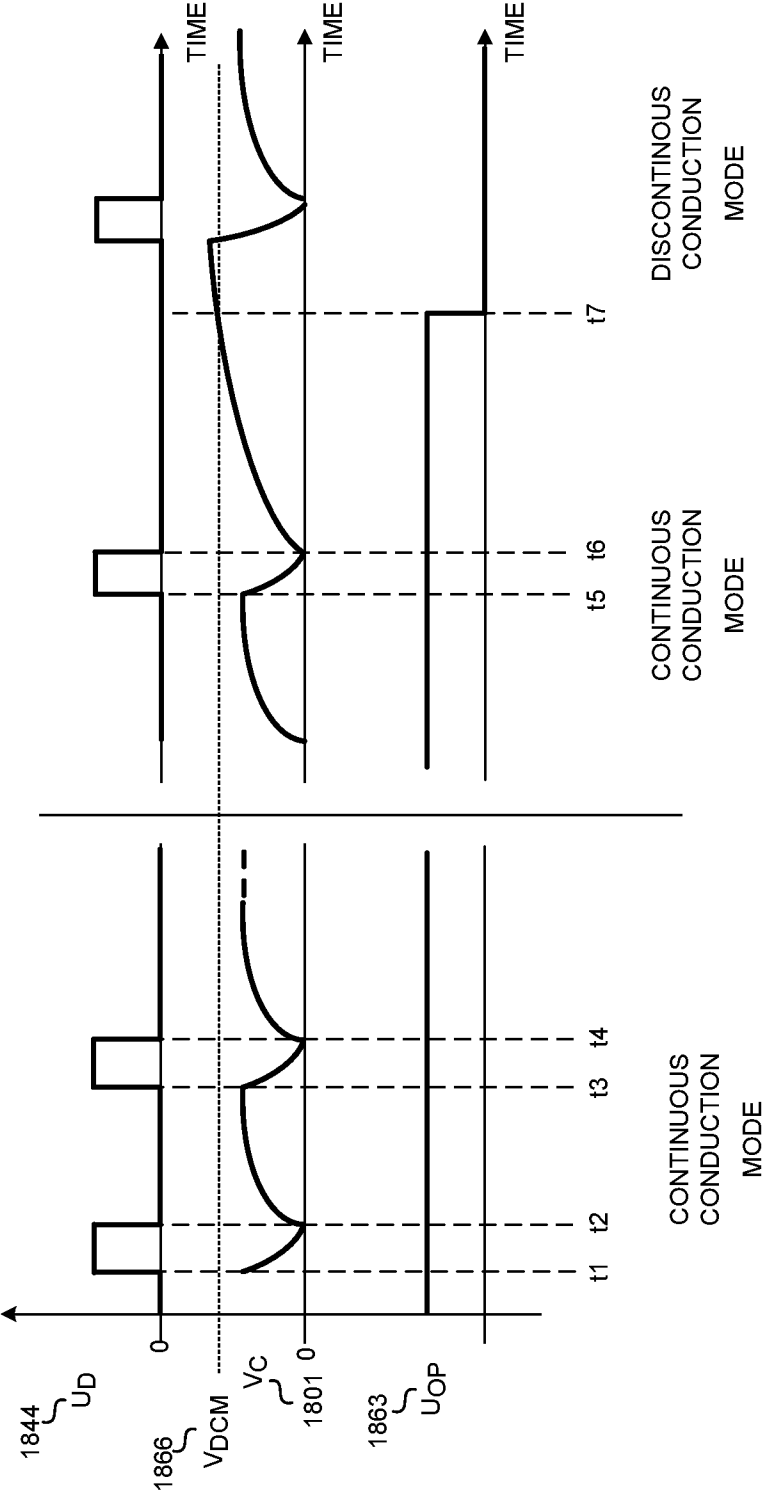


FIG. 18