



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 521 839 B1

(12)

EUROPEAN PATENT SPECIFICATION

(49) Date of publication of patent specification: **29.11.95** (51) Int. Cl.⁶: **F41G 7/30**

(21) Application number: **92850151.9**

(22) Date of filing: **18.06.92**

(54) **Determination of roll angle.**

(30) Priority: **02.07.91 SE 9102056**

(43) Date of publication of application:
07.01.93 Bulletin 93/01

(45) Publication of the grant of the patent:
29.11.95 Bulletin 95/48

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IT LI NL PT SE

(56) References cited:
EP-A- 0 239 156
EP-A- 0 343 131
WO-A-83/03894
DE-A- 3 529 277

(73) Proprietor: **Bofors AB**

S-691 80 Karlskoga (SE)

(72) Inventor: **Hansen, Ake**
Persiljevägen 13
S-653 51 Karlstad (SE)

(74) Representative: **Falk, Bengt**
Bofors AB,
Patents and Trademarks
S-691 80 Karlskoga (SE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

The present invention relates to an arrangement for determining the roll attitude of a rotating projectile, grenade, missile or the like with the aid of polarised electromagnetic radiation.

The invention is applicable to all types of projectiles, missiles or the like which are shot out of a firing tube or launching tube and which rotate in their track. In particular, the invention can be used with so-called end-phase-controlled ammunition, that is to say projectiles which are fired in the conventional manner in a ballistic track to the immediate vicinity of the target where they receive a command for required correction. Due to the fact that the projectile is rotating in its track, its roll attitude must be determined when the command is executed. In the absence of roll attitude determining elements, an error is otherwise produced when the course correction is carried out.

It is already known from Swedish Patent 8801831-2 to determine the roll angle attitude with the aid of polarised electromagnetic radiation comprising a transmitter arranged to emit a polarised radiation in the direction of the projectile and a polarisation-sensitive receiver arranged in the projectile. By allowing the emitted polarised radiation to comprise at least two mutually phase-locked radiation components with wavelength relations of 2:1 and/or multiples thereof and which are superimposed and form an asymmetric curve shape, the roll attitude of the projectile can be unambiguously determined.

The abovementioned arrangement presupposes that a transmitter is placed in connection with the launching place of the projectile and that the projectile is provided with a receiver antenna directed towards the back for receiving the emitted radiation.

The arrangement furthermore presupposes that two mutually phase-locked radiation components with different frequencies are sent out. This entails that both transmitter and receiver become relatively complicated in their construction.

It is also known from EP O 341 772 to determine the roll angle attitude by providing the single carrier wave with a sinusoidal amplitude modulation for continuously transmitting information about the phase angle. The description shows that such a system has advantages through a simpler construction of the receiver section in the projectile. But it is also disclosed that it requires two antennas in the receiver with known mutual orientation.

From Swedish Patent Application 9001370-7, it is also already known to determine the roll angle attitude with the aid of partly a polarised sinusoidal radiation within the longwave band and partly a microwave radiation in the form of a pulse train

where the pulses indicate that the long wave component is located at a certain phase angle, for example the sinusoidal signal zero transition with positive derivative. The two radiation components are then detected in the grenade and supplied to a microprocessor system for evaluation.

The advantage of transferring the message about the phase angle only at certain times is that such a system becomes more interference-proof. The risk of detection becomes less, it is more difficult to calculate the frequency utilised for transmission from the short pulses and in this way to interfere with the transmission.

In the said system, one therefore depends on two radiation components, both a longwave component and a microwave component. A synchronisation between transmitter and receiver is also necessary.

It is the aim of this invention, as defined in the appended claims, to produce an alternative to the arrangements described above for roll angle determination, where instead a polarised carrier wave is phase-modulated with a significantly lower frequency which forms a submultiple of the carrier wave frequency. In the receiver, the phase of the received radiation is decoded and compared with the carrier wave reference for calculating the current roll angle attitude.

The advantage of utilising a phase-modulated carrier wave according to the invention is that the receiver section in the projectile/grenade can be made to be completely autonomous, without requirement for synchronisation with the transmitter. The transmitter is preferably operating within the longwave band (30-300 kHz), the carrier wave frequency must exceed 100 Hz, for example it can be 300 kHz and the modulation frequency can be 3 kHz.

An embodiment of the invention is shown diagrammatically in the attached drawings, in which Figure 1 is a view of the projectile and a ground-based transmitter, Figure 2 shows the curve shape of the radiation transmitted, Figure 3 shows a block diagram of the transmitter, Figure 4 shows the envelope shaper and phase shifter used in the transmitter, Figure 5 shows a block diagram of the receiver and Figure 6 shows the behaviour of the signal on demodulation in the receiver.

Figure 1 shows a projectile, grenade, missile or the like 1 which is rotating in its track on the way towards a target. For different reasons it is required to determine the roll attitude angle of the projectile. On the launching arrangement, for example a canon, or in its immediate vicinity, a transmitter 2 is placed, for example a longwave transmitter which sends out a polarised space wave 4 via an antenna 3 towards the projectile 1. The projectile is provided with a receiver 5 with an antenna 6 and

evaluating element (electronics) for determining the roll angle attitude.

In the transmitter, a carrier wave reference i_{REF} with a frequency f_1 is generated, see Figure 2a. A modulation signal, i_{MOD} , Figure 2b, the frequency of which if $f_2 \ll f_1$ and where f_2 is a multiple or submultiple of the carrier wave frequency f_1 , is supplied through a phase modulator 7. For example, the carrier wave frequency f_1 can go up to 300 kHz and the modulation frequency to 3 kHz. Figure 2c shows the phase-modulated space wave 4.

The transmitter comprises an HF oscillator of the stable type 8 for generating the nominal carrier wave frequency, an envelope shaper 9 and a phase shifter 10, see Figure 3. The output of the phase shifter is connected to the transmitter antenna 3 via an amplifier 11.

The envelope shaper is made up of an address register 12, a programmable memory (PROM) 13 and a digital/analog converter 14 and the phase shifter 10 can be an active phase shift filter of a type known per se, see Figure 4b, with two inputs, on the one hand for the carrier wave reference and on the other hand for the control signal from the envelope shaper 9.

The receiver comprises an amplifier 15, a phase detector 16 with a so-called VCO circuit 17 (voltage control oscillator) for detecting the phase shift. The phase detector output is connected to a comparator 18 and the comparator output signal is used for clocking a memory circuit (D-type flip flop) 19, the output of which stores a status level from the phase angle of the VCO circuit (UP/DOWN information).

The arrangement operates in the following manner. The nominal carrier wave frequency is generated in the transmitter by the HF oscillator 8, for example an oscillator with crystal element. A carrier wave reference of digital appearance is supplied to the envelope shaper 9 in which an address register 12 is clocked with the carrier wave reference. The address register fetches weighted digital values for a sinusoidal envelope from the programmable memory (PROM) 13. The digital/analog converter 14 converts the digital values to an analog signal. The analog signal is supplied to the output as control signal which is used for phase-shifting the original carrier wave in the phase shifter 10 which is constructed of an active phase-shift filter, see Figure 4b, with two inputs. After that, the modulated signal is amplified before it is supplied to the antenna 3.

The space wave thus phase-modulated is received by the antenna 6 in the projectile. The antenna signal is supplied after amplification to a so-called phase-locked loop in the phase detector 16 in the receiver. The phase-locked loop detects the phase shift of the received signal with the aid

of a frequency which is generated by the VCO circuit 17. If the phase difference deviates from 90° , the phase detector generates a signal which deviates from zero. This error signal is used as control signal for the VCO circuit for regulating the frequency of the latter. The oscillator will follow the phase of the incoming signal and the control voltage from the phase detector is an image of the phase modulation signal. The reference signal thus detected is supplied to the comparator 18 which has a threshold level which corresponds to the zero transition of the modulator signal at the transmitter end. The comparator output signal is used for clocking the memory circuit in the form of a D-type flip flop 19, the output of which stores a status level from the phase angle of the VCO circuit (UP/DOWN information).

The signal behaviour on demodulation in the receiver can be seen in Figure 6. The appearance of the antenna signal with the antenna pointing upward or downward is shown in Figure 6a. The VCO signals for the antenna pointing upward or the antenna pointing downward, respectively, are seen in Figure 6b. It also shows that the control voltage from the phase detector, see Figure 6c, is an image of the phase modulation signal, see Figure 2b. The comparator output signal or the memory circuit output signal (status level) with the antenna pointing upward or the antenna pointing downward, respectively, is shown in Figure 6d. Using this up/down information, the current roll angle attitude can then be calculated in a conventional manner.

Claims

1. Arrangement for determining the roll angle attitude of a rotating projectile, grenade, missile or the like with the aid of polarised electromagnetic radiation comprising a transmitter arranged to emit a position-determining polarised radiation in the direction of the projectile and a receiver arranged in the projectile for receiving the emitted radiation, characterised in that the radiation (4) emitted is made up of a carrier wave reference with frequency f_1 which is phase-modulated with a modulation frequency f_2 , where f_2 is $\ll f_1$ and form a submultiple of the carrier wave frequency f_1 .
2. Arrangement according to Claim 1, characterised in that the transmitter (2) operates within the longwave band.
3. Arrangement according to Claim 1 characterised in that the transmitter comprises an HF oscillator (8) for generating the nominal carrier wave reference, an envelope shaper (9), the output of which is connected to a phase shifter

(10), the output of which, in turn, is connected to the transmitter antenna (3).

4. Arrangement according to Claim 3, characterised in that the envelope shaper (9) comprises an address register (12), a programmable memory (PROM) (13) and a digital/analog converter (14). 5
5. Arrangement according to Claim 1, characterised in that the receiver (5) comprises a phase detector (16) for detecting the phase shift of the received signal. 10
6. Arrangement according to Claim 5, characterised in that the phase detector (16) output is connected to a comparator (18), the comparator output signal being used for clocking a memory circuit (D-type flip flop) (19), the output of which stresses a status level relating to the phase angle (UP/DOWN information). 15 20

Patentansprüche

1. Anordnung zum Bestimmen der Rollwinkellage einer rotierenden Projektils, Granate, Flugkörpers od. dgl. mit Hilfe polarisierter elektromagnetischer Strahlung, mit einem Transmitter zum Aussenden einer positionsbestimmenden polarisierten Strahlung in Richtung des Projektils und einen im Projektil angeordneten Empfänger zum Empfangen der emittierten Strahlung, dadurch **gekennzeichnet**, daß die emittierte Strahlung (4) besteht aus einer Bezugsträgerquelle mit einer Frequenz f_1 , die phasenmoduliert ist mit einer Modulationsfrequenz f_2 , wobei $f_2 \ll f_1$ ist und in einem ganzzahligen Teilverhältnis zur Trägerwellenfrequenz f_1 steht. 25 30 35 40
2. Anordnung nach Anspruch 1, dadurch **gekennzeichnet**, daß der Sender (2) im Langwellenband arbeitet. 45
3. Anordnung nach Anspruch 1, dadurch **gekennzeichnet**, daß der Sender einen HF-Oszillator (8) zum Erzeugen der Trägerwellenbezugsfrequenz, einen Umhüllungsformer (9) aufweist, dessen Ausgang mit einem Phasenschieber (10) verbunden ist, dessen Ausgang seinerseits mit der Senderantenne (3) verbunden ist. 50
4. Anordnung nach Anspruch 3, dadurch **gekennzeichnet**, daß der Umhüllungsformer (9) ein Adressenregister (12), einen programmierbaren Speicher (PROM) (13) und einen Digital-/Analogwandler (14) aufweist. 55

5. Anordnung nach Anspruch 1, dadurch **gekennzeichnet**, daß der Empfänger (5) einen Phasendetektor (16) zum Detektieren der Phasenverschiebung des empfangenen Signals aufweist.
6. Anordnung nach Anspruch 5, dadurch **gekennzeichnet**, daß der Ausgang des Phasendetektors (16) mit einem Komparator (18) verbunden ist, wobei das Ausgangssignal des Komparators zum Takten einer Speicherschaltung (D-Typ Flip-Flop) (19) dient, deren Ausgang einen vom Phasenwinkel abhängenden Pegelzustand (UP/DOWN Information) speichert.

Revendications

1. Ensemble destiné à déterminer l'attitude correspondant à l'angle de roulis d'un projectile, d'une grenade, d'un engin ou analogue qui présente une rotation, à l'aide du rayonnement électromagnétique polarisé, comprenant un émetteur destiné à émettre un rayonnement polarisé déterminant la position dans la direction du projectile, et un récepteur placé dans le projectile et destiné à recevoir le rayonnement émis, caractérisé en ce que le rayonnement (4) émis est constitué d'une référence d'onde porteuse de fréquence f_1 qui est modulée en phase par une fréquence de modulation f_2 telle que $f_2 \ll f_1$ et qui forme un sous-multiple de la fréquence de l'onde porteuse f_1 .
2. Ensemble selon la revendication 1, caractérisé en ce que l'émetteur (2) travaille dans la bande des grandes ondes.
3. Ensemble selon la revendication 1, caractérisé en ce que l'émetteur comporte un oscillateur à hautes fréquences (8) destiné à créer la référence nominale d'onde porteuse, un organe conformateur d'enveloppe (9) dont le signal de sortie est connecté à un circuit déphaseur (10) dont le signal de sortie est lui-même connecté à l'antenne (3) de l'émetteur.
4. Ensemble selon la revendication 3, caractérisé en ce que l'organe conformateur (9) d'enveloppe comporte un registre (12) d'adresse, une mémoire programmable (PROM) (13) et un convertisseur numérique-analogique (14).
5. Ensemble selon la revendication 1, caractérisé en ce que le récepteur (5) comporte un détecteur de déphasage (16) destiné à détecter le déphasage du signal reçu.

6. Ensemble selon la revendication 5, caractérisé en ce que le signal de sortie du détecteur de déphasage (16) est connecté à un comparateur (18), le signal de sortie du comparateur étant utilisé pour la commande d'horloge d'un circuit de mémoire (bascule D) (19) dont le signal de sortie garde un niveau d'état relatif à l'angle de phase (information de comptage-décomptage).

10

15

20

25

30

35

40

45

50

55

5

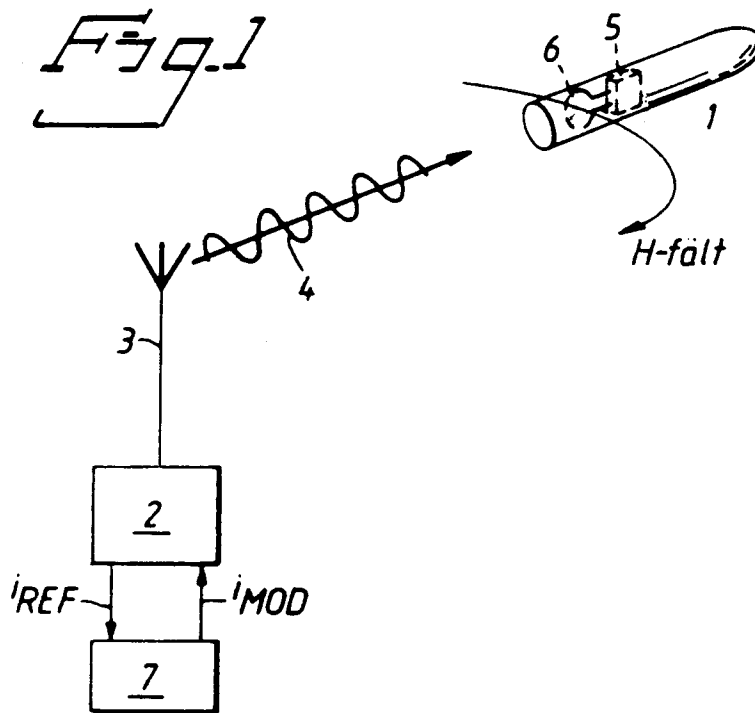


Fig. 2

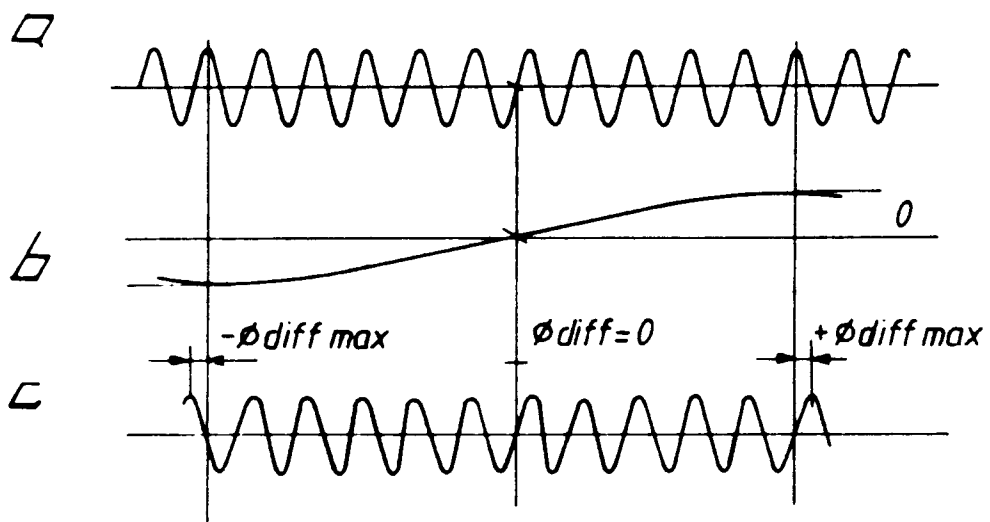


Fig. 3

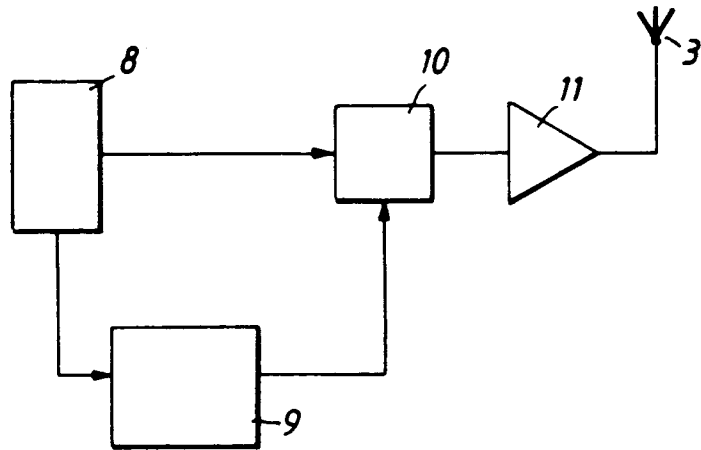


Fig. 4a

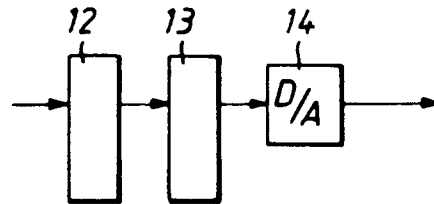


Fig. 4b

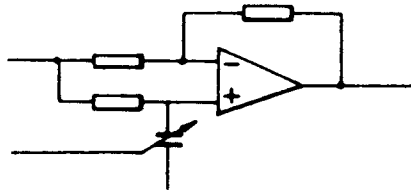


Fig. 5

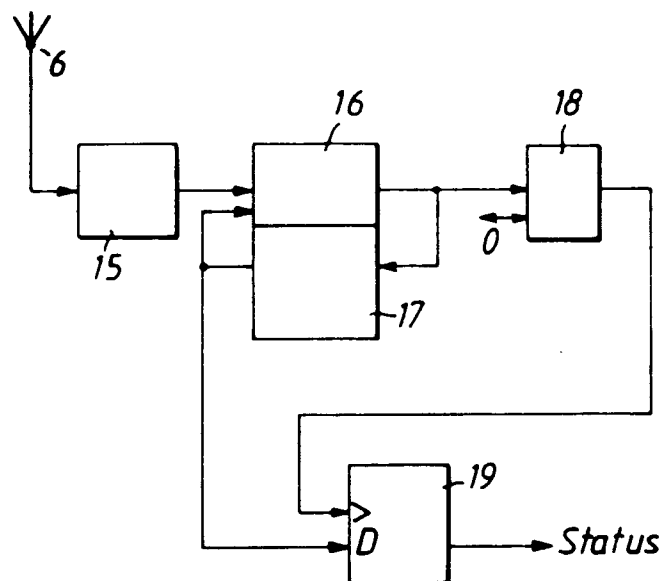


Fig. ba

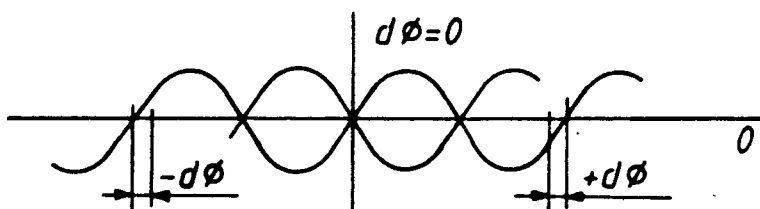


Fig. bb




Fig. bc

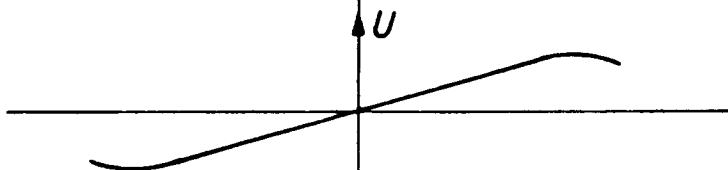


Fig. bd

