United States Patent [19]

Carlson

[11] **3,870,929**

[45] **Mar. 11, 1975**

[54] **IGNITION SYSTEM AND COMPONENTS THEREOF**

[75] Inventor: **Elmer A. Carlson**, Agoura, Calif.

[73] Assignee: **International Telephone and Telegraph Corporation**, New York, N.Y.

[22] Filed: **Mar. 4, 1974**

[21] Appl. No.: **447,889**

[52] **U.S. Cl.** **317/96**, 307/106, 331/187, 431/74, 431/266

[51] **Int. Cl.** **F23q 3/00**

[58] **Field of Search** 317/79, 96, 97; 307/106; 331/187; 431/71, 74, 264, 266

[56] **References Cited**

UNITED STATES PATENTS

3,338,288	8/1967	Walker	431/71
3,377,125	4/1968	Zielinski	431/74
3,632,285	1/1972	Foster	431/264
3,662,185	5/1972	Sapir	307/106
3,781,163	12/1973	Ovens	431/266
3,813,581	5/1974	Hewitt	317/96
3,818,377	6/1974	Gersing	317/79
3,824,432	7/1974	Gersing	317/79

Primary Examiner—Volodymyr Y. Mayewsky
Attorney, Agent, or Firm—A. Donald Stolzy

[57] **ABSTRACT**

A system for igniting, by a spark, the main burner of a gas fired device without the use of a pilot light from, for example, 12 or 24 volts. A unique oscillator provides the spark power and voltage. The oscillator also supplies the power to open the gas valve. A capacitor momentarily opens the valve. The valve is maintained open when a flame is present at the main burner.

4 Claims, 11 Drawing Figures

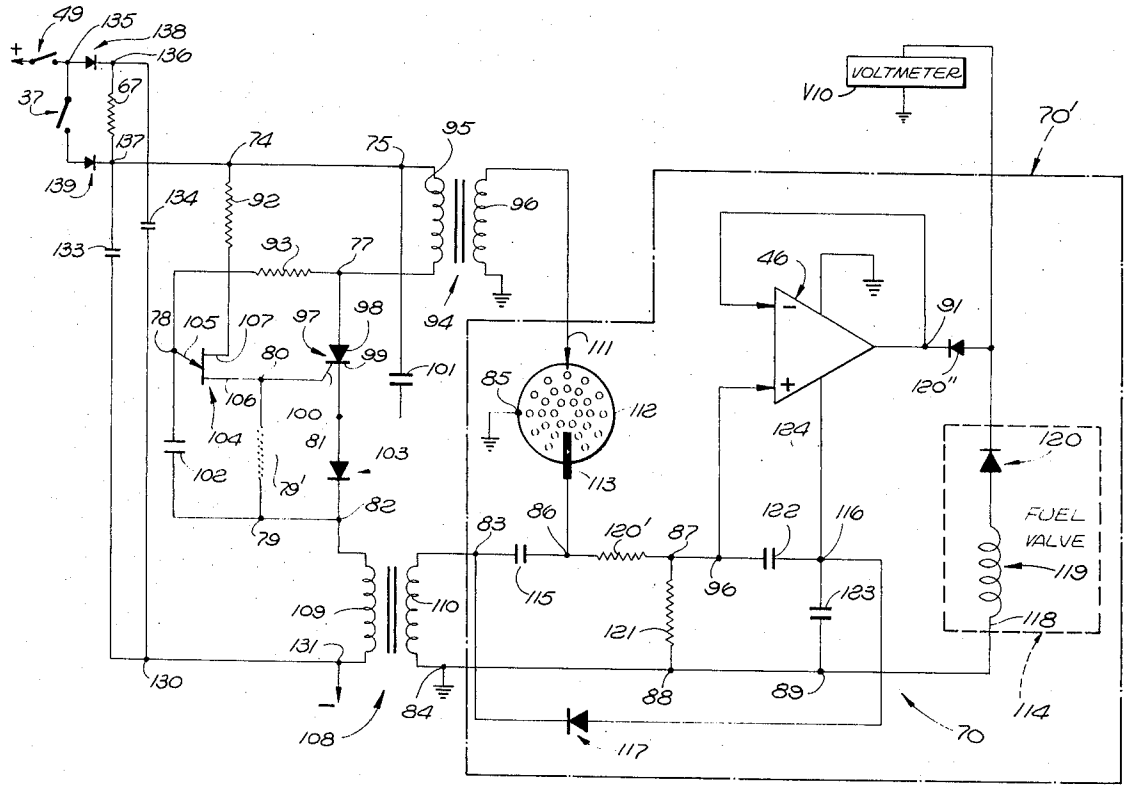

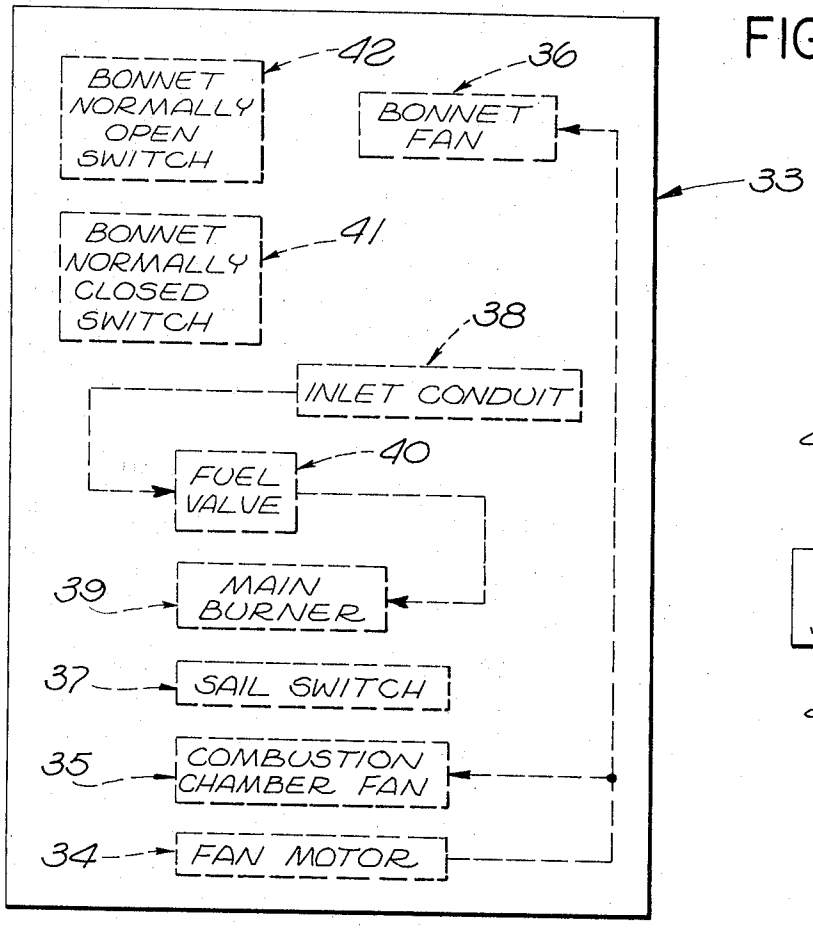

FIG. 1.



FIG. 3.

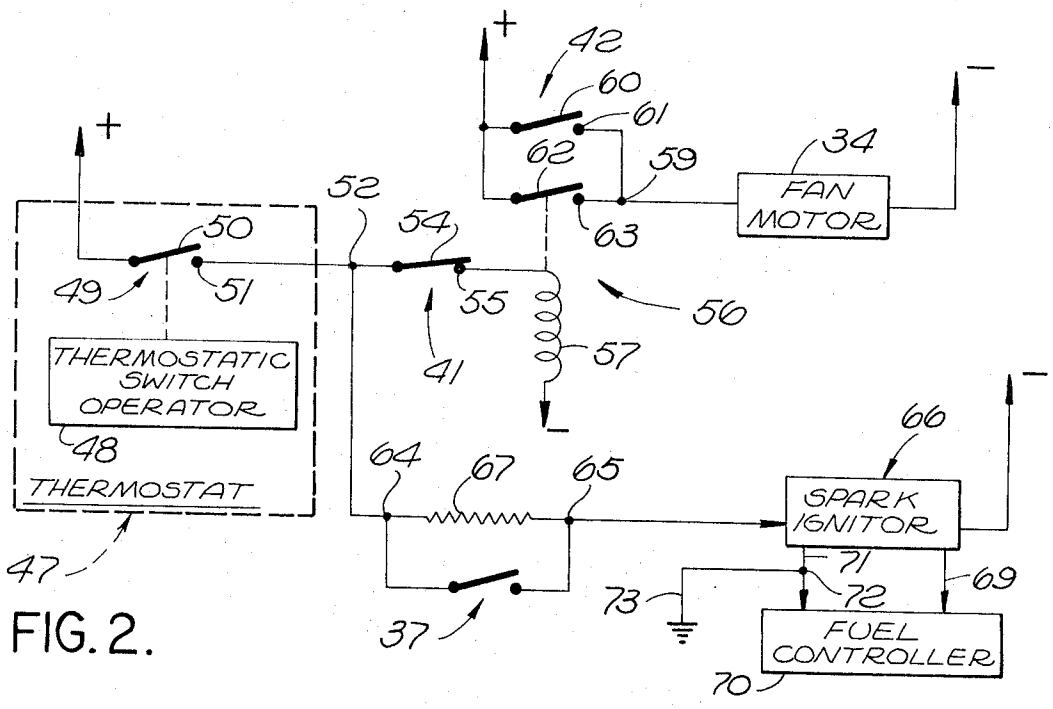

FIG. 2.

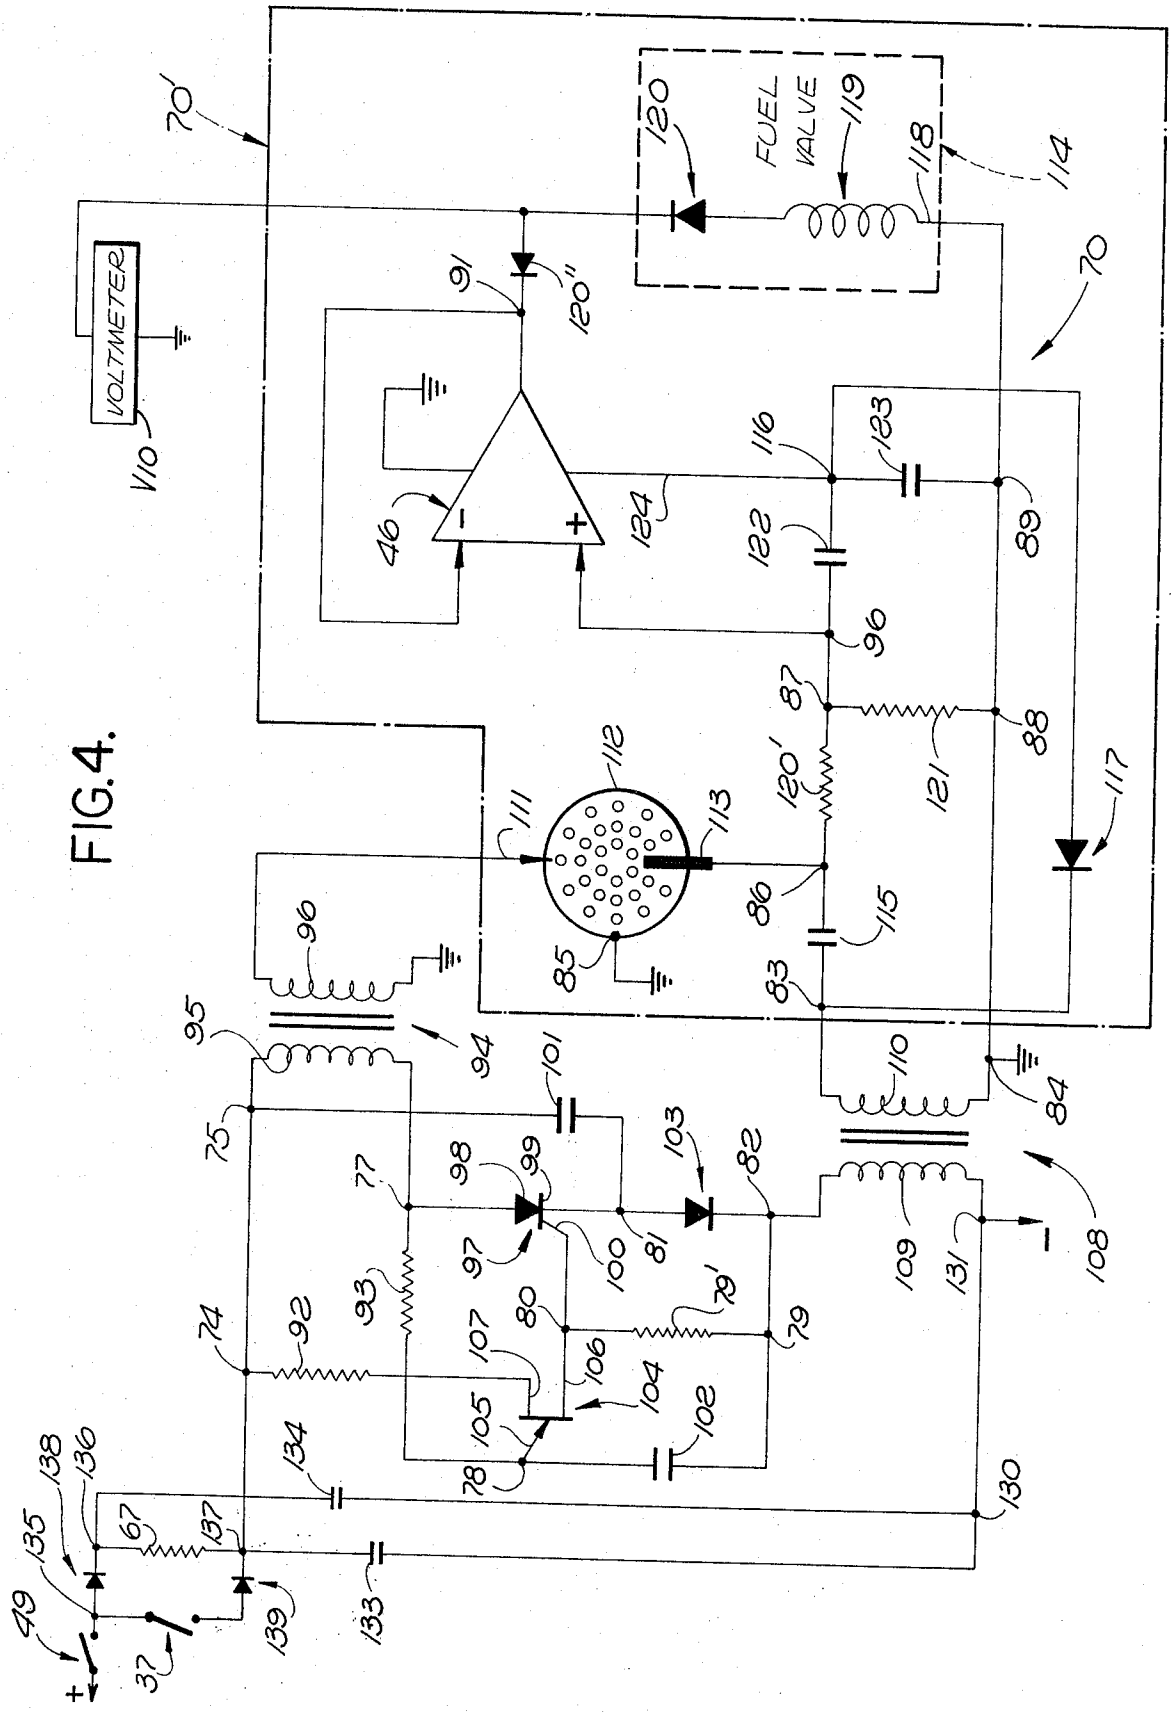
70'
VOLTMETER
110
FUEL VALVE
120
119
118
114
91
120''
70
46
116
123
124
122
89
96
87
88
121
120'
117
112
111
113
86
115
85
83
96
95
94
101
110
84
75
77
98
99
103
82
97
100
81
109
131
108
74
92
93
80
107
106
104
105
102
79'
79
78
134
130
136
138
135
67
137
49
37
139
133

FIG.4.



FIG. 6.



FIG. 5.



FIG. 7.

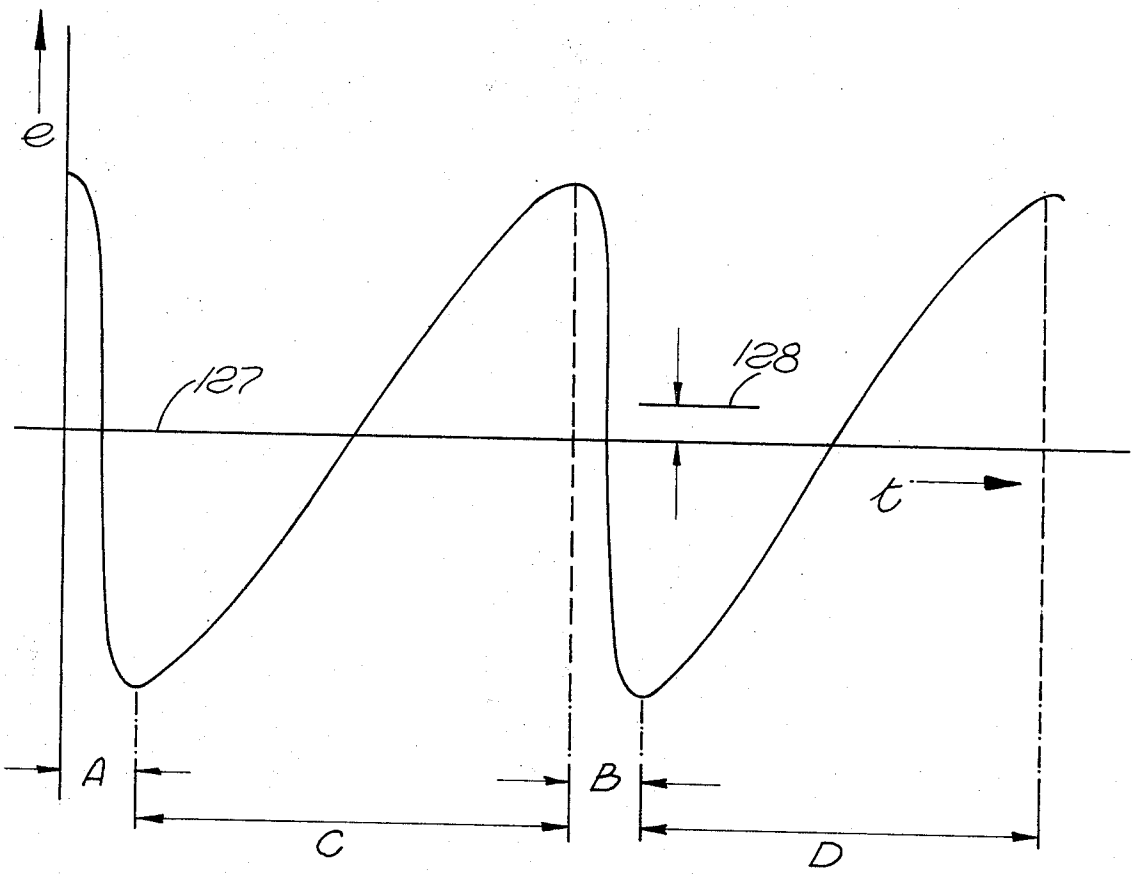

FIG. 8.

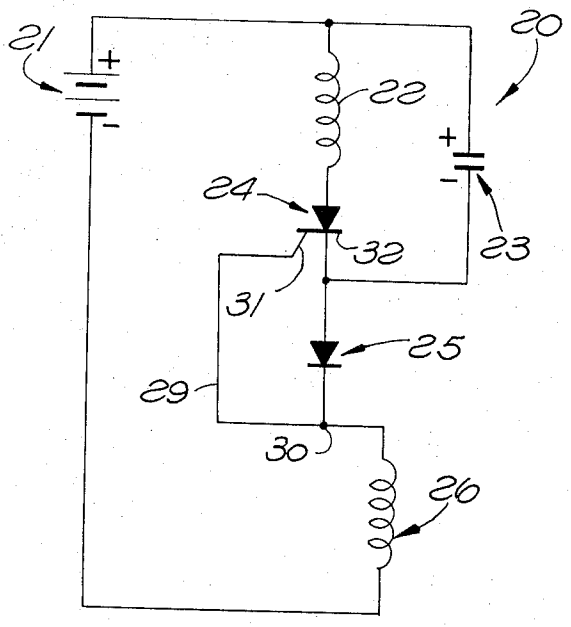

FIG. 9.

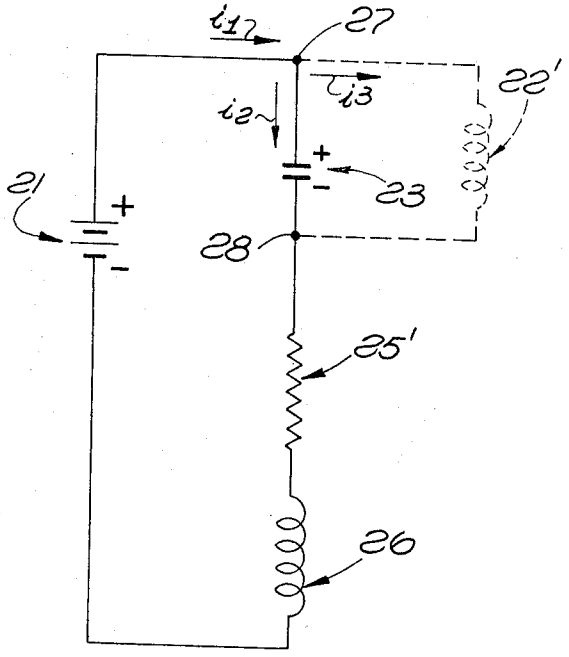

FIG. 10.

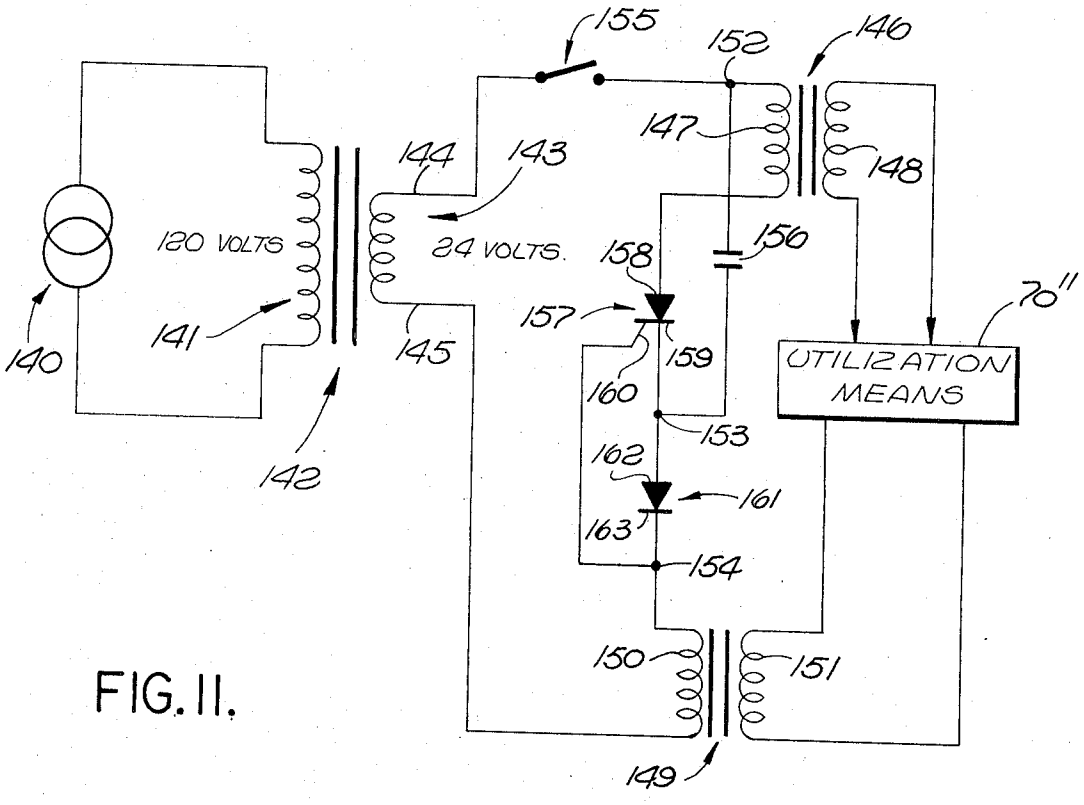

FIG. 11.

IGNITION SYSTEM AND COMPONENTS THEREOF

BACKGROUND OF THE INVENTION

This invention relates to combustible fuel ignition systems, and more particularly, to a system for pilotless ignition and components thereof.

In the past, the use of a pilot burner has been relatively safe but does waste a significant amount of gas.

SUMMARY OF THE INVENTION

In accordance with the present invention, the above-described and other disadvantages of the prior art are overcome by providing a system for igniting a main burner and a spark oscillator therefor.

In accordance with another feature of the invention, a fuel valve is turned on momentarily, and then shut off if combution fails to take place.

The above-described and other advantages of the present invention will be better understood from the following detailed description when considered in connection with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings which are to be regarded as merely illustrative:

FIG. 1 is a block diagram of a fuel combustion system;

FIG. 2 is a block diagram of a portion of the system shown in FIG. 1;

FIG. 3 is a block diagram of a power supply;

FIG. 4 is a schematic diagram of a spark ignitor and fuel valve control system;

FIG. 5 is a top plan view of a flame rod and a main burner;

FIG. 6 is a view of a switch;

FIG. 7 is a view of a diode;

FIG. 8 is a graph of a waveform characteristic of the operation of the oscillator of the present invention;

FIG. 9 is a schematic diagram of an alternative embodiment of the present invention;

FIG. 10 is a schematic diagram illustrative of the operation of the circuit of FIG. 9; and

FIG. 11 is a schematic diagram of still another embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fuel combustion apparatus is illustrated in FIG. 1 including a fan motor **34** which drives both a combustion fan **35** and a bonnet fan **36.** A sail switch is indicated at **37.** An inlet conduit is illustrated at **38** connected to a main burner **39** by a fuel valve **40.** A normally closed bonnet switch is illustrated at **41.** A normally open bonnet switch is illustrated at **42.**

Fan motor **34** is turned on by normally open bonnet switch **42** when the temperature in the bonnet is sufficiently high. The normally closed bonnet switch **41** turns off the power except for the fan motor when the temperature of the bonnet exceeds a safe value. Both of the bonnet switches **41** and **42** are temperature operated.

Everything shown in FIG. **1** is conventional. Combustion chamber fan motor **34** drives out whatever gas may be filling this chamber prior to ignition. The sail switch **37** is located in an air duct from the bonnet fan **36** or from the combustion chamber fan **35,** but preferably,

the latter. Sail switch **37** is normally open and is closed when the air velocity is at or above a predetermined magnitude.

One embodiment of the system of the present invention may be operated from a **12** or **24** volt power supply as indicated at **43** in FIG. **3** having a positive terminal **44** and a negative terminal **45.**

Plus and minus signs are employed to indicate a connection to a respective terminal to power supply **43** except in the case of amplifier **46** shown in FIG. **4** where the plus and minus signs are employed respectively to indicate the noninverting and inverting inputs of the amplifier **46.**

The system of the present invention is employed to be operated by a thermostat **47** shown in FIG. **2** having a thermostatic switch operator **48** that closes a switch **49** when the temperature in the space to be heated falls below a predetermined or set point temperature. Switch **49** has a pole **50** and a contact **51.** Pole **50** is connected to power supply terminal **44** which is positive. A junction is provided at **52.** The normally closed bonnet switch is shown again at **41.** Switch **41** has a pole **54** and a contact **55.** Contact **51** and pole **54** are connected to junction **52.** A relay **56,** having a coil **57,** has one end connected from switch contact **55** to negative power supply terminal **45.** The normally open bonnet switch **42** is again shown in FIG. **2.** Fan motor **34** has the same number and is connected from a junction **59** to the negative terminal **45** of power supply **43.** Switch **42** has a pole **60** and a contact **61.** Relay **56** operates a pole **62** which has a contact **63.** Poles **60** and **62** are connected to the positive power terminal **44.** Contacts **61** and **63** are connected to junction **59.** A junction **64** is connected from junction **52.** A junction **65** is connected to a spark ignitor **66** which is, in turn, connected to the negative terminal **45** of D.C. power supply **43.** A resistor **67** is connected between junctions **64** and **65.** The same is true of sail switch **37.**

Spark ignitor **66** has an output lead **69** connected to fuel controller **70.** Spark ignitor **66** also has an output lead **71** connected to a junction **72** that is, in turn, connected to controller **70.** A lead **73** connects junction **72** to ground.

Spark ignitor **66** is shown in FIG. **4** with utilization means **70'** including a controller **70.** Various junctions are illusted in FIG. **4** including junctions **130, 131, 135,** 136 and **137.** Junction **131** is connected to the negative terminal **45** of D.C. power supply **43.** Junctions **130** and **131** are connected together. As shown in FIG. **4,** switch **49** is again shown and is connected from the positive terminal **44** of D.C. power supply **43** to junction **135.** Sail switch **37** is again shown with a diode **139** in FIG. **4,** the same being connected in series in that order from junction **135** to junction **137,** diode **139** being poled to be conductive toward junction **137.**

A diode **138** is connected between junctions **135** and **136,** and is poled to be conductive in a direction toward junction **136.** A smoothing capacitor **134** is connected between junctions **130** and **136.** Another smoothing capacitor **133** is connected between junctions **130** and **137.** Resistor **67** is again shown in FIG. **4** and is connected between junctions **136** and **137.**

The purpose of diodes **138** and **138** is to prevent the oscillator of the present invention from driving the D.C. power supply **43.**

In accordance with the first embodiment of the present invention, D.C. power supply **43** may be a battery

or a half wave or full wave rectifier which may be or is connected to the line of an A.C. voltage source. In other words, D.C. power supply **43** may also be a converter.

The circuit of FIG. **4** has various other junctions **74**, 75, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90 and **91**. Junctions **74**, **75** and **137** are connected together. A resistor **92** is connected between junction **74** and a second base **107** of a unijunction transistor **104**. A resistor **93** is connected between junctions **77** and **78**. A transformer **94** is provided having a primary winding **95** and a secondary winding **96**. Primary winding **95** is connected between junctions **75** and **77**. A silicon-controlled rectifier (SCR) is illustrated at **97** having an anode **98**, a cathode **99** and a gate **100**. Anode **98** is connected from junction **77** to junction **81** through cathode **99**. A capacitor **101** is connected between junctions **75** and **81**. A resistor **79'** of one ohm, more or less, is connected between junctions **79** and **80**. Gate **100** is connected from junction **80**. A capacitor **102** is connected from junction **78** to junction **79**. Junctions **79** and **82** are connected together. A diode **103** is connected between junctions **81** and **82**, and poled to be conductive in a direction toward junction **82**. Unijunction transistor **104** is provided with an emitter **105** and a first base **106** in addition to a second base **107**. First base **106** is connected to junction **80**. Emitter **105** is connected from junction **78**. Another transformer **108** is provided having a primary winding **109** and a secondary winding **110**. Primary winding **109** is connected from junction **82** to junction **131**. In FIG. **4**, the secondary winding **110** is connected between junctions **83** and **84**, junction **84** being grounded.

The purpose of the transformers **94** and **108** are to provide for spark ignition and fuel valve control, respectively.

Transformers **108** and **94** have conventional (in themselves) ferrite cores **108'** and **108''**, respectively. Core **108'** is not conventional in the system. Core **108''** is conventional in a spark ignitor. Core **108'** prevents unwanted valve actuation upon oscillator failure. Core **108'** also provides a good low impedance device for coupling the 1,000 Hz. signal to utilization means **70'**.

As will be explained, it is an outstanding feature of the present invention that spark ignitor **66** includes an oscillator which provides a continuos spark when the thermostat calls for it whether or not gas is supplied. Moreover, the oscillator provides a voltage across primary **95** from capacitor **101** which is of the order of **80** volts when the power supply **43** supplies **12** volts D.C., filtered or not.

One end of transformer secondary **96** is connected to a spark electrode **111** which sparks to a main burner **112**, shown in plan in FIG. **4**, that is grounded from junction **85** therewith. A flame rod **113** is located over main burner **112** to be in contact with the flame and to close a fuel valve indicated at **114** when no flame exists. A capacitor **115** is connected between junctions **83** and **86**. Flame rod **113** is positioned contiguous to main burner **112** but spaced therefrom in a position to be in contact with the flame. Flame rod **113** is connected to junction **86**. A further junction **116** is provided from which a diode **117** is connected to junction **83** and is poled to be conductive in a direction toward junction **83**. Junctions **84**, **88** and **89** are all connected together and are connected also to one end **118** of the coil **119** of fuel valve **114**. Preferably, diodes **120** and **120''** are connected from the other end of coil **119** to junction **91**, and are both poled to conductive toward junction **91**. A voltmeter V10 for monitoring is connected from the anode of diode **120'** to ground.

Preferably, diode **120** is packaged with fuel valve **114** so that use thereof may not be made except in accordance with the present invention. A resistor **120** is connected between junctions **86** and **87**. A resistor **121** is connected between junctions **87** and **88**. Junctions **87** and **90** are connected together. A capacitor **122** is connected between junctions **90** and **116**. A capacitor **123** is connected between junctions **116** and **89**. A lead **124** is provided which is the power input lead of amplifier **46**. Lead **124** is connected from junction **116**.

Junction **96** is connected to the noninverting input of amplifier **46**. Junction **91** is connected to the inverting input of amplifier **46**. Amplifier **46** has a gain of unity.

Amplifier **46** may be any conventional amplifier, but is preferably one which has short circuit (milliampere region) protection such as the one disclosed as model μA741 in Fairchild Semiconductor Integrated Circuits Catalog (November, 1971). Short circuiting of valve **114** is, therefore, permitted for testing.

OPERATION

In the operation of the circuit of the present invention, in FIG. **4**, thermostat switch **49** closes. Sail switch **68** is not yet closed. A trickle charge is provided through resistor **67** charging capacitor **101**. When sail switch **37** closes, the oscillator is connected directly across the line. Resistor **67** is shorted out. Resistors **92** and **93**, unijunction **104** and capacitor **102** provide delayed firing of SCR **97**. SCR **97** is not fired until capacitor **102** is adequately charged, i.e., the standoff ratio of unijunction **104** is reached. Unijunction **104** then fires SCR **97**. This connects capacitor **101** directly across the primary **95** of transformer **94** through SCR **97**.

It is an outstanding feature of the present invention that the ratio of the resonant frequency of capacitor **101** and primary **95** of transformer **94** is perhaps **100** times greater than the resonant frequency of capacitor **101** with the primary **109** of transformer **108**. It is for this reason that SCR **97** is cut off at **90** electrical degrees. In this case, the circuit resonates at the lower frequency determined by the capacitance of the capacitor **101** and transformer primary **109**.

Once the oscillator has started, the starting mechanism and structures including unijunction **104** and the circuit elements connected therewith and also resistor **97** have nothing to do with the operation.

When capacitor **101** and transformer primary **109** resonate, the resonant action terminates when the capacitor **101** charged to its maximum value with junction **75** being positive with respect to junction **81**. This is true even though a power supply charging current back through the power supply would be possible. The reason this does not exist is that diode **103** prevents such further oscillation.

It is when the SCR **97** fires that the high frequency discharge of the energy of capacitor **101** in transformer primary **95** causes the spark to be generated between electrode **111** and main burner **112**.

In FIG. **4**, when the oscillator oscillates, junction **116** through the charge placed upon capacitor **123** causes junction **116** to have a potential of perhaps **12** volts negative with respect to ground. At the same time, capacitor **122** momentarily opens fuel valve **114** by the

connection to amplifier **46** from junction **90.** Diode **117** acts as a half wave rectifier to charge capacitor **123.**

Resistors **120** and **121** act as a voltage divider.

Flame rod **113** acts either as a normally open switch **125** illustrated in FIG. **6** or as a diode **126** and resistor **126'** as illustrated in FIG. **7.**

Capacitor **115** prevents the diode **126** from shorting secondary **110** of transformer **108.**

After momentary actuation of valve **114** through charging of capacitor **123** and through the use of capacitor **122,** if the burner **112** is lit as shown in FIG. **5,** flame rod **113** becomes the diode **126** and resistor **126'** which allows a half wave rectified negative voltage to be placed across resistor **120** and resistor **121** to keep fuel valve **114** open. Filtering is provided by resistor **120'** and capacitors **122** and **123** in series.

The approximate voltage across a capacitor **23** shown in FIG. **9** is shown in FIG. **8.**

An oscillator **20** constructed in accordance with the present invention is illustrated in FIG. **9** including a D.C. source of potential **21,** an inductor **22,** a silicon-controlled rectifier (SCR) **24,** a diode **25** and an inductor **26** connected in a manner identical to similar components shown in FIG. **4.**

The oscillator of FIG. **9** has three different successive modes of oscillation. When SCR **24** is cut off, the circuit of FIG. **9** looks as shown in FIG. **10,** where diode **25** is illustrated as a resistor **25'**. The resistance of diode **25** may be considered zero or infinite depending upon whether or not it is forward or back biased, respectively.

When SCR **24** is fired, the circuit of FIG. **9** looks the same as in FIG. **10** except that in FIG. **9,** inductor **22** is, when SCR **24** is fired, connected in parallel with capacitor **23** at junctions **27** and **28** shown in FIG. **10.**

If the resistance of **25'** in FIG. **10** is zero, it is well known that

$$i_o = I_m \sin(\omega_o t_o + \psi) \tag{1}$$

where,

i is the variable circuit current,

t_o is time,

I_m is the maximum circuit current, and

ω_o is the radian frequency of oscillation.

I_m being defined by

$$I_m = 1/\omega_o L_2 \sqrt{(E - E_o)^2 + \omega_o^2 L_2^2 I_o^2} \tag{2}$$

where,

L_2 is the inductance of inductor **26,**

E is the voltage supplied by source **21,**

E_o is the voltage across capacitor **23** at $t_o = 0$, E_o being positive when the polarity thereof is as shown in FIG. **10,**

I_o is the current of the FIG. **10** circuit at $t_o = 0$,

ψ and ω_o being defined by

$$\psi = \arctan \omega_o L_2 I_o / E - E I_o$$

and

$$\omega_o = 1/\sqrt{L_2 C} \tag{3}$$

where C is the capacitance of capacitor **23.**

The first oscillation of the FIG. **10** circuit can start ($t_o = 0$) at $E_o \approx 0$ and $I_o = 0$, if desired, by closing the sail switch **37** shown in FIG. **4** (not shown in FIG. **10**). The FIG. **10** circuit then can ring if underdamped. No advance trickle charge may be necessary if other circuit values are changed.

Due to the use of the diode **25,** the circuit of FIG. **10** can never ring more than one cycle. The latter is due to the fact that diode **25** stops the ringing.

It is striking and unexpected that the peak voltage across capacitor **23** can and does grow for each of the lowest frequency cycles 1/A + C (see FIG. **8**) of voltage oscillation across capacitor **23.** This growth can be from, for example, a little above about 12 or 24 volts to about **80** volts peak-to-peak. The peak-to-peak voltage across capacitor **23** is limited by the losses and resistances in the circuit of FIG. **9** not shown therein. The growth of the voltage across the capacitor **23** will be explained in the following.

For a beginning, assume

$$E_o = 0 \quad \text{and} \tag{4}$$

$$I_o = 0 \quad \text{at} \tag{5}$$

$$t_o = 0. \tag{6}$$

From equation (1),

$$i_o = I_{mo} \sin \omega_o t_o \tag{7}$$

where,

$$I_{mo} = E/\omega_o L_2 \tag{8}$$

The voltage across capacitor **23** is then

$$e_o = 1/C \int i_o dt + C_1 \tag{9}$$

From equation (7),

$$e_o = -I_{mo}/C\omega_o \cos \omega_o t_o + C_1 \tag{10}$$

When at

$$t_o = 0 \tag{11}$$

$$e_o = 0 \tag{12}$$

then

$$C_1 = I_{mo}/C\omega_o \tag{13}$$

From equations (10) and (13),

$$e_o = Im_o/C\omega_o\ (1 - \cos\ \omega_o t_o) \tag{14}$$

Diode **25** always stops the oscillation of the FIG. **10** circuit when e_o is at a positive peak with the polarity shown in FIG. **10.** This peak is

$$E_c = 2Im_o/C\omega_o \tag{15}$$

From equations (8) and (14),

$$E_c = 2E \tag{16}$$

In FIG. **9,** when capacitor **23** reaches E_c, the voltage across inductor **26** reverses and lead **26** from junction **30** to SCR gate **31** fires SCR **24** because the connection of inductor **26** to junction **30** places SCR gate **31** at or about the potential of cathode **32** thereof.

When SCR **24** fires, the circuit looks the same as FIG. **10** except inductor **22** is connected between junctions **27** and **28** as indicated at **22'**.

The circuit of FIG. **10** with inductor **22** added may be analyzed as follows by applying Kirchoff's law twice.

As stated previously, the circuit of FIG. **9** has three successive modes of operation, namely:

A. SCR **24** is cut off;

B. SCR **24** is fired and the capacitor voltage e_1 begins at peak E_c; and

C. SCR **24** is fired and the capacitor voltage e_o is equal to E to start with

$$(\text{time } t_k = 0). \tag{17}$$

The inductor **22** and the capacitor **23** have a current in mode (B),

$$i = E_c/\omega_1 L_1 \sin\ \omega_1 t \tag{18}$$

where,

i is current,

$$\omega_1 = 1/\sqrt{L_1 C} \tag{19}$$

L_1 is the inductance of inductor **22,** and

t is time.

The voltages e_2 and e_1 across inductor **22** and the capacitor **23** are then

$$e_2 = E_c \cos\ \omega_1 t \quad \text{and} \tag{20}$$

$$e_1 = -E_c \cos\ \omega_1 t \tag{21}$$

However, in terms of i_2 and 3,

$$e_3 = -e_1 \quad \text{and} \tag{22}$$

$$i = i_2 = -i_3 \tag{23}$$

Thus

$$e_3 = E_c \cos\ \omega_1 t \quad \text{and} \tag{24}$$

$$i_3 = -E_c/\omega_1 L_1 \sin\ \omega_1 t \tag{25}$$

When

$$e_3 = E,\ t = t_x \tag{26}$$

$$E = E_c \cos\ \omega_1 t_x \quad \text{and} \tag{27}$$

$$i_x = -E_c/\omega_1 L_1 \sin\ \omega_1 t_x \tag{28}$$

$$i_x = -\sqrt{E_c^2 - E^2}/\omega_1 L_1 \tag{29}$$

The next equation to develop for the next mode of operation is the capacitor current i_3 at and after the capacitor voltage e_3 is at and after

$$e_3 = E. \tag{30}$$

$$E = 1/C \int i_3\, dt_k + L_2\, di_1/dt_k \tag{31}$$

$$i_1 = i_2 + i_3 \tag{32}$$

$$di_1/dt_k = di_2/dt_k + di_3/dt_k \tag{33}$$

$$E = 1/C \int i_3\, dt_k + L_2\, (di_2/dt_k + di_3/dt_k) \tag{34}$$

$$1/C \int i_3\, dt_k = L_1\, di_2/dt_k \tag{35}$$

where,

E is the battery voltage,

C is the capacitor capacitance,

i_3 is the capacitor current (see arrows in FIG. **10**),

i_1 is the current through inductor **26,**

i_2 is the current through inductor **22,**

L_1 is the inductance of inductor **22,**

L_2 is the inductance of the inductor **26,** and

t_k is time.

Equation (34) combines (31) and (33). Equation (36) combines (34) and (35).

$$E = [1/C + L_2/L_1 C][\int i_3\, dt_k] + L_2\, di_3/dt_k \tag{36}$$

$$L_2\, d^2 i_3/dt_k^2 + [1/C + L_2/L_1 C][i_3] = 0 \tag{37}$$

$$di_3^2/dt_k^2 + [1/L_2 C + 1/L_1 C][i_3] = 0 \tag{38}$$

Defining,

$$\omega_o^2 = 1/L_2C \tag{39}$$

$$\omega_1^2 = 1/L_1C \tag{40}$$

$$\omega_2^2 = \omega_o^2 + \omega_1^2 \tag{41}$$

$$k = \omega_1/\omega_o \tag{42}$$

Equation (38) easily integrates by known methods to

$$[di_3/dt_k]^2 = -\omega_2^2 i_3^2 + C_1 \tag{43}$$

When $t_k = 0$,

$$di_3/dt_k = E/L_1 \tag{44}$$

and i_3 is determined as follows.

During the prior phase,

$$i_2 = E_c/\omega_1 L_1 \sin \omega_1 t_1 \tag{45}$$

$$e_3 = E_c \cos \omega_1 t_1 \tag{46}$$

where E_c is the starting peak voltage in the first phase.

$$\cos \omega_1 t_1 = E/E_3 \tag{47}$$

at $t_k = 0$, the magnitude of i_3 is

$$\sin \omega_1 t_1 = \sqrt{1 - E^2/E_c^2} \tag{48}$$

Combining (43), (44) and (48),

$$E^2/L_1^2 = -\omega_2^2 (E_c^2 - E^2/\omega_1^2 L_1^2) + C_1 \tag{49}$$

$$C_1 = E^2/L_1^2 + (E_c^2 - E^2/\omega_1^2 L_1^2)(\omega_2^2) \tag{50}$$

With (52), (49) easily integrates to

$$i_3 = -a_1 \sin (\omega_2 t_k + \psi_k) \tag{51}$$

where,

$$a_1 = \sqrt{E^2/\omega_2^2 L_1^2 + E_c^2 - E^2/\omega_1^2 L_1^2} \quad \text{and} \tag{52}$$

$$\psi k = \arctan \omega_2 \sqrt{E_c^2/E^2 + 1}/\omega_1 \tag{53}$$

$$L_1 di_2/dt = +1/C \int i_3 dt \tag{54}$$

i_3 is negative.

$$L_1 di_2/dt = a_1/C\omega_2 \cos (\omega_2 t_k + \omega_k) + C_2 \tag{55}$$

$$E = a_1 \cos \psi_k/C\psi_2 + C_2 \tag{56}$$

$$C_2 = E - a_1 \cos \psi_k/C\omega_2 \tag{57}$$

$$di_2/dt = E/L_1 - a_1 \cos \psi_k/L_1C\omega_2 + a_1 \cos (\omega_2 t_k + \psi_k)/LC\omega_2 \tag{58}$$

$$i_2 = [E/L_1 - a_1 \cos \psi_k/CL_1\omega_2][t_k] + [a_1/C\omega_2^2 L_1 \sin (\omega_2 t_k + \psi_k)] + C_3 \tag{59}$$

$$E/L_1 = \omega_2 a_1 \cos \psi_k \tag{60}$$

$$a_1\omega_2/CL_1\omega_2^2 = [a_1\omega_2][k^2/1 + k^2] \tag{61}$$

When

$$k = \omega_1/\omega_o \quad \text{and} \tag{62}$$

$$k = 100 \tag{63}$$

$$i_2 = a_1 \sin (\omega_2 t_k + \psi_k) \tag{64}$$

To find $t_k = t_{ko}$ when $i_2 = 0$,

$$\phi + \psi_k = \pi \tag{65}$$

The peak resulting voltage across the capacitor is

$$E_p = \sqrt{(E - e_{ko})^2 + \omega_o^2 L_2^2 i_{ko}^2} \tag{66}$$

Where $\beta = \phi + \psi_k$ (66)

$$E_p = E_c \sqrt{(\cos \beta - \cos \psi_k)^2 + k^2 \sin^2 \beta} \tag{67}$$

$$\cos \beta = -1 \tag{68}$$

$$\sin \beta = 0 \tag{69}$$

$$\cos \psi_k = 1/R \tag{70}$$

$$R = E_c/E \tag{71}$$

The voltage gain G is then

$$G = 1 + 1/R \tag{72}$$

This places the capacitor and battery with voltage polarities to add E to the capacitor voltage each time the oscillator goes through all three of its phases.

Note in an only voltage equation

$$E_{p1} = E - E_o \tag{73}$$

The capacitor voltage E_o, if turned negative, adds to E_{p1}. This is done in the oscillator while the diode prevents charging the battery during capacitor voltage polarity reversal.

$k = 100$ is not necessarily optimum for all circumstances or maximum gain. k may be varied from above 100 to much lower, e.g., to near $k = 1$ or $k = 2$. However, if k is too low, the SCR will not cut off. With no losses, k must be about

$$k \cong 4.5 \tag{74}$$

Maximum gain may be achieved at widely varying values other than $k = 100$. Many of the other values set forth herein may also be widely varied.

In FIG. **8**, period C shows a half cycle of operation at frequency ω_o. The same is true of half cycle D. e is voltage across capacitors **23** and **101.** t is time. What appears to be another half cycle of operation is illustrated as A or B in FIG. **8.** This is not true. As explained previously, if line **127** is zero volts, the line **128** is 12 volts or E.

Within the periods A and B, above the line **128,** the frequency is ω_1. Below the line **128,** the frequency is ω_2. The frequency during the periods C and D is ω_o.

As a fail safe measure, two capacitors may be connected in series between junctions **90** and **116** and in lieu of the one capacitor **122** in FIG. **4.**

The phrase "source of D.C. potential" or any equivalent thereto is hereby defined to include, but not be limited to, a battery, a half wave rectifier, filtered or not, and a full wave rectifier, filtered or not.

The phrase "inductor means" or any equivalent thereto and the phrase "inductor device" or any equivalent thereto, is hereby defined to include, but not be limited to, an inductor and/or a transformer.

With losses considered, the capacitor voltage E_p is approximately

$$E_p = (E + E_e e^{-\alpha_1 t_1})(e^{-\alpha_2 t_2}) \tag{75}$$

where,

$$\alpha_1 = R_1 + R_3/2L_1 \tag{76}$$

R_1 is the L_1 resistance,

R_2 is the L_2 resistance,

R_3 is the capacitor circuit resistance,

where

$$R_2/R_1 >> 1 \tag{77}$$

$$t_1 = \pi/\omega_{10} \tag{78}$$

$$\omega_{10} = \sqrt{1/L_1C - (R_1 + R_3)^2/4L_1^2} \tag{79}$$

$$\alpha_2 = R_2 + R_3/2L_2 \tag{80}$$

$$t_2 = \pi/\omega_{o1}$$

$$\omega_{o1} = \sqrt{1/L_2C - (R_2 + R_3)^2/4L_2^2} \tag{81}$$

$$L_2/L_1 = 10{,}000 \tag{82}$$

The gain G is thus

$$G = \left(\frac{1}{R} + e^{-\alpha_1 t_1}\right)(e^{-\alpha_2 t_2}) \tag{83}$$

where

$$R = E_c/E \tag{84}$$

The maximum capacitor voltage E_m is approximately

$$E_m = \frac{Ee^{-\alpha_2 t_2}}{1 - e^{-(\alpha_2 t_2 + \alpha_1 t_1)}} \tag{85}$$

For maximum gain, R_1, R_2 and R_3 should be as small as possible. L_2 should be as large as possible. C should be as small as possible. If L_1 is large, gain is increased. However, if L_1 is too large, the SCR will not cut off.

To prove $i_{20} = 0$ at $\beta = \pi$ for losses, in the first phase

$$i_{10} = \frac{+E_c}{\omega_{10}L_1} e^{-\alpha t_{10}} \sin \omega_{10} t \tag{86}$$

$$i_{10x} = i_{10} \qquad \text{at} \qquad t = t_{10x} \tag{87}$$

Find t_{10x} from finding e_{10}

$$e_{10} = \frac{-E_c e^{-\alpha_{10} t} \sin\left(\omega_{10} t + \tan^{-1}\frac{\omega_{10}}{\alpha_{10}}\right)}{\omega_{10} L_1 C \sqrt{\alpha_{10}^2 + \omega_{10}^2}} \tag{88}$$

Find t_{10x} from

$$E = \frac{E_c e^{-\alpha_{10} t_{10x}} \sin\left(\omega_{10} t_{10x} + \tan^{-1}\frac{\omega_{10}}{\alpha_{10}}\right)}{\omega_{10} L_1 C \sqrt{\alpha_{10}^2 + \omega_{10}^2}} \tag{89}$$

The second phase is

$$i_{30} = +a_{30} e^{-\alpha_{30} t} \sin(\omega_{30} t + \psi_{30}) \tag{90}$$

where

$$a_{30} = \sqrt{((R_1 E/R_1 + R_2) - E - (R_a i_{10}/2)/\omega_{30} L_e) + i_{10x}^2} \tag{91}$$

$$R_a = R_1R_2/R_1 + R_2 + R_3$$

(92)

$$L_e = L_1L_2/L_1 + L_2$$

(93)

$$\omega_{20} = 1/L_eC - R_a^2/4L_e^2$$

(94)

$$\alpha_{20} = R_a/2L_e$$

(95)

Note if

$$K^2 = L_2/L_1$$

(96)

then, in general,

$$K^2 = R_2/R_1$$

(97)

$$R_1E/R_1 + R_2 - E = E/1 + K^2 - E \quad \text{and}$$

(98)

$$E/1 + K^2$$

(99)

is very small if

$$K^2 = 10{,}000$$

(100)

Also

$$R_a = R_1/1 + 1/K^2 + R_3 \quad \text{and}$$

(101)

$$L_e = L_1/1 + 1/K^2$$

(102)

$$\psi_{30} = \tan^{-1} \omega_{30}L_ei_{10x}/(-K^2E/1 + K^2) - (R_ai_{10x}/2)$$

(103)

ψ_{30} is third quadrant. i_{10x} is negative.

$$e_{30} = -a_{30}e^{-\alpha_{30}t} \quad \sin(\omega_{30}t + \psi_{30} + \tan^{-1}\omega_{30}/\alpha_{30}/C\sqrt{\alpha_{30}^2 + \omega_{30}^2} + E/1 + K^2$$

(104)

$$L_1\, di_{20}/dt + i_{20}R_1 = i_{30}R_3 + 1/C \int i_{30}dt$$

(105)

This integrates by formula. Where if

$$R_o = i_{30}R_3/L_1 + 1/L_1C \int i_{30}dt$$

(106)

$$i_{20} = C_ye^{-\frac{R_1}{L_1}t} + e^{-\frac{R_1t}{L_1}}\int R_oe^{\frac{R_1t}{L_1}}dt$$

(107)

and where C_y is the only constant after the e_{30} integration.

$$i_{20} = C_ye^{-R_1/L_1t} + a_{30}R_3e^{-\alpha_{30}t} \quad \sin(\omega_{30}t + \psi_{30} - \tan^{-1}\omega_{30}/\alpha_{40})/L_1 \quad \sqrt{\alpha_{40}^2 + \omega_{30}^2} - a_{30}e^{-\alpha_{30}t} \quad \sin(\omega_{30}t + \psi_{30} + \tan^{-1}\omega_{30}/\alpha_{30} - \tan\omega_{30}/\alpha_{40})/L_1C \quad \sqrt{\alpha_{30}^2 + \omega_{30}^2} \quad \sqrt{\alpha_{40}^2 + \omega_{30}^2} + E/R_1(1 + K^2)$$

(108)

where

$$\alpha_{40} = R_1/L_1 - \alpha_{30} \quad \text{and}$$

(109)

$$R_1/L_1 - \alpha_{30} = R_1/L_1 - R_a/2L_e$$

(110)

$$R_a/2L_e \cong R_1 + R_3/2L_1$$

(111)

$$\alpha_{40} \cong R_1 - R_3/2L_1$$

(112)

$$i_{20} = C_ye^{-\frac{R_1t}{L_1}} - a_{30}e^{-\alpha_{30}t}\sin(\omega_{30}t + \psi_{30}) + E/R_1(1 + K^2)$$

(113)

$$C_y = i_{20x} + a_{30}\sin\psi_{30} - E/R_1(1 + K^2)$$

(114)

where,

$$i_{20x} = -i_{10x} \quad \text{and}$$

(115)

$$i_{10x} = a_{30}\sin\psi_{30}$$

(116)

i_{10x} is negative. ψ_{30} is third quadrant. Thus,

$$C_y = -E/R_1(1 + K^2) \quad \text{and}$$

(117)

$$i_{20} = E\,1 - e^{-R_1t/L_1}/R_1(1 + K^2) - a_{30}e^{-\alpha_{30}t} \quad \sin(\omega_{30}t + \psi_{30})$$

(118)

From

$$+K^2E/1 + K^2 = -R_ai_{10x}/2 - \omega_{30}L_ea_{30}\cos\psi_{30}$$

(119)

where,

$$R_a = R_1 + R_3$$

(120)

$$i_{10x} = a_{30}\sin\psi_{30}$$

(121)

$$i_{20} = -[(1 + R_3/R_1/2K^2)(a_{30}\sin\psi_{30}) + \omega_{30}L_ea_{30}\cos\psi_{30}/K^2R_1] \times \left[1 - e^{-\frac{R_1t}{L_1}}\right] \quad a_{30}e^{-\alpha_{30}t}\sin(\omega_{30}t + \psi_{30})$$

(122)

$$L_e = L_1$$

The worst case is

$$\psi_{30} = 0$$

Thus, when $i_{20} = 0$, (a_{30} is negative)

$$\left[\frac{\omega_{30}L_1}{K^2R_1}\right]\left[1-e^{-\frac{R_1t_{20x}}{L_1}}\right] = -e^{-\alpha_{30}t_{20x}}\sin\omega_{30}t_{20x} \quad (125)$$

If $\omega_{30}t_{20x}$ is 180 to 188 degrees and

$$R_1t_{20x}/L_1 << 1 \quad \text{and}$$

(126)

$$\alpha_{30}t_{20x} << 1$$

(127)

$$\omega_{30}t_{20x}/K^2 = (1-\alpha_{30}t_{20x})(\omega_{30}t_{20x}-\pi) \quad (128)$$

$$[\omega_{30}t_{20x}][1-1/K^2\,(1-\alpha_{30}t_{20x})] = \pi \quad (129)$$

$$[\omega_{30}t_{20x}][K^2-1/(1-\alpha_{30}t_{20x})/K^2] = \pi \quad (130)$$

Because

$$\alpha_{30}t_{20x} << 1 \quad (131)$$

approximately

$$(\omega_{30}t_{20x})(K^2-1/K^2) = \pi \quad (132)$$

Thus, if

$$K^2 = 10{,}000 \quad (133)$$

almost exactly

$$\omega_{30}t_{20x} = \pi \quad (134)$$

In FIG. **11**, an A.C. source of potential **140** is illustrated. Source **140** is connected across the primary **141** of a transfomer **142** having a secondary **143** with upper and lower leads **144** and **145**, respectively.

Utilization means **70''** are also illustrated in FIG. **11** which may be identical to utilization means **70'** illustrated in FIG. **4**.

A transfomer **146** is illustrated in FIG. **11** having a primary winding **147** and a secondary winding **148**. Secondary winding **148** is connected to utilization means **70''**. If desired, transformer **146** may be identical to transformer **94** shown in FIG. **4**.

Also shown in FIG. **11** is a transformer **149** having a primary **150** and a secondary **151**. Secondary **151** is also connected to utilization means **70''**. If desired, transformer **149** may be identical to transformer **108** shown in FIG. **4**. Junctions **152**, **153** and **154** are shown in FIG. **11**. A switch **155** of a thermostat is connected in series between transformer secondary lead **144** and junction **152**. A capacitor **156** is connected between junctions **152** and **153**. A silicon-controlled rectifier **157** is illustrated in FIG. **11** having an anode **158**, a cathode **159** and a gate **160**. Anode **158** is connected from the lower end of transformer primary **147**, the upper end thereof being connected to junction **152**.

Cathode **159** is connected to junction **153**. A diode is provided at **161** having an anode **162** connected from junction **153** and a cathode **163** connected to junction **154**.

Gate **160** is connected to junction **154**.

Transformer primary **150** has one end connected to junction **154** and its other end connected to lead **145** of transformer secondary **143**.

Although the circuit of FIG. **11** looks much like and may employ many components identical to respective ones in the oscillator of the present invention illustrated in FIGS. **2**, **3**, **4**, **9** and **10**, the circuit of FIG. **11** is not an oscilllator. It is operated strictly by the A.C. input thereto supplied thereto by source **140** through transformer **142**.

The phrase "means providing an A.C." or other source of potential or an equivalent phrase is hereby defined for use herein and for use in the claims to mean one or more conductive leads or otherwise.

The phrase "utilization means" is hereby defined for use herein and for use in the claims to mean means **70'** or means **70''** or the electrode means of a spark ignitor or otherwise.

Notwithstanding the foregoing, transformers **108** and **94** may have cores other than ferrite cores which are either conventional or not.

What is claimed is:

1. A spark ignitor for a combustible fuel, said ignitor comprising: a first junction; a first switch for connection to a conductor having a positive potential to said first junction; first and second inductive means each having first and second leads; a charging resistor connected from said first junction to said first inductive means first lead; a second switch for closure after said first switch is connected in parallel with said charging resistor; a silicon-controlled rectifier (SCR) having an anode, a cathode and a gate, said anode being connected from said first inductive means second lead; a diode having an anode connected from said SCR cathode, and a cathode connected to said second inductive means first lead, said second inductive means second lead being adapted for connection to a conductor of a negative potential; a main capacitor connected from said first inductive means first lead to said diode anode; said diode cathode being connected to said SCR gate; a second junction connected from said first inductive means first lead; starting means and hold off connected from said second junction to said SCR gate to fire said SCR when said second switch is closed; and conductor means connected with said first inductive means to establish an arc when the energy stored in said main capacitor is transferred to said first inductive means.

2. The invention as defined in claim **1**, wherein said starting and hold off means includes first and second resistors, a unijunction transistor having an emitter and first and second bases, an auxiliary capacitor, and third, fourth and fifth junctions, sid first resistor being connected between said second and third junctions, said second resistor being connected between said third and

fourth junctions, said SCR anode being connected from said fourth junction, said transistor second base being connected from said third junction, said transistor emitter being connected from said fifth junction, said auxiliary capacitor being connected from said fifth junctionn to said SCR gate, said transistor first base being connected to said SCR gate.

3. Apparatus for periodically producing first signal portions of a higher frequency and for periodically producing second signal portions alternately with said first signal portions, said second signal portions being of a frequency lower than said higher frequency, said apparatus comprising: means for providing a source of potential including first and second leads; a circuit connected between said first and second leads, said circuit including first, second and third junctions, first and second inductor means, a capacitor, a silicon-controlled rectifier (SCR) having an anode, a cathode and a gate, and a diode, said first lead being connected to said first junction, said first inductor means being connected from said first junction to said SCR anode, said capacitor being connected between said first and second junctions, said SCR cathode being connected to said second junction, said diode being connected between said second and third junctions and being poled to be conductive toward said third junction, said second inductor means being connected from said third junction to said second lead, said SCR gate being connected from said third junction; and utilization means coupled to said circuit, said utilization means includes spark electrode means for ignition of a combustible fuel.

4. Apparatus for periodically producing first signal portions of a higher frequency and for periodically producing second signal portions alternately with said first signal portions, said second signal portions being of a frequency lower than said higher frequency, said apparatus comprising: means for providing a source of potential including first and second leads; a circuit connected between said first and second leads, said circuit including first, second and third junctions, first and second inductor means, a capacitor, a silicon-controlled rectifier (SCR) having an anode, a cathode and a gate, and a diode, said first lead being connected to said first junction, said first inductor means being connected from said first junction to said SCR anode, said capacitor being connected between said first and second junctions, said SCR cathode being connected to said second junction, said diode being connected between said second and third junctions and being poled to be conductive toward said third junction, said second inductor means being connected from said third junction to said second lead, said SCR gate being connected from said third junction; and utilization means coupled to said circuit, at least one of said inductor means includes a first transformer having a primary winding connected in said circuit, and a secondary winding connected to said utilization means, said utilization means includes spark electrode means for ignition of a combustible fuel, said first transformer secondary being connected to said spark electrode means.

* * * * *