



(11) (21) (C) **2,153,170**
(86) 1994/11/15
(87) 1995/06/08
(45) 2000/12/19

(72) Wynn, Woodson Dale, US


(73) AT&T CORP., US

(51) Int.Cl.⁶ H04B 15/00

(30) 1993/11/30 (160,770) US

(54) **REDUCTION DU BRUIT TRANSMIS DANS LES SYSTEMES DE TELECOMMUNICATIONS**

(54) **TRANSMITTED NOISE REDUCTION IN COMMUNICATIONS SYSTEMS**

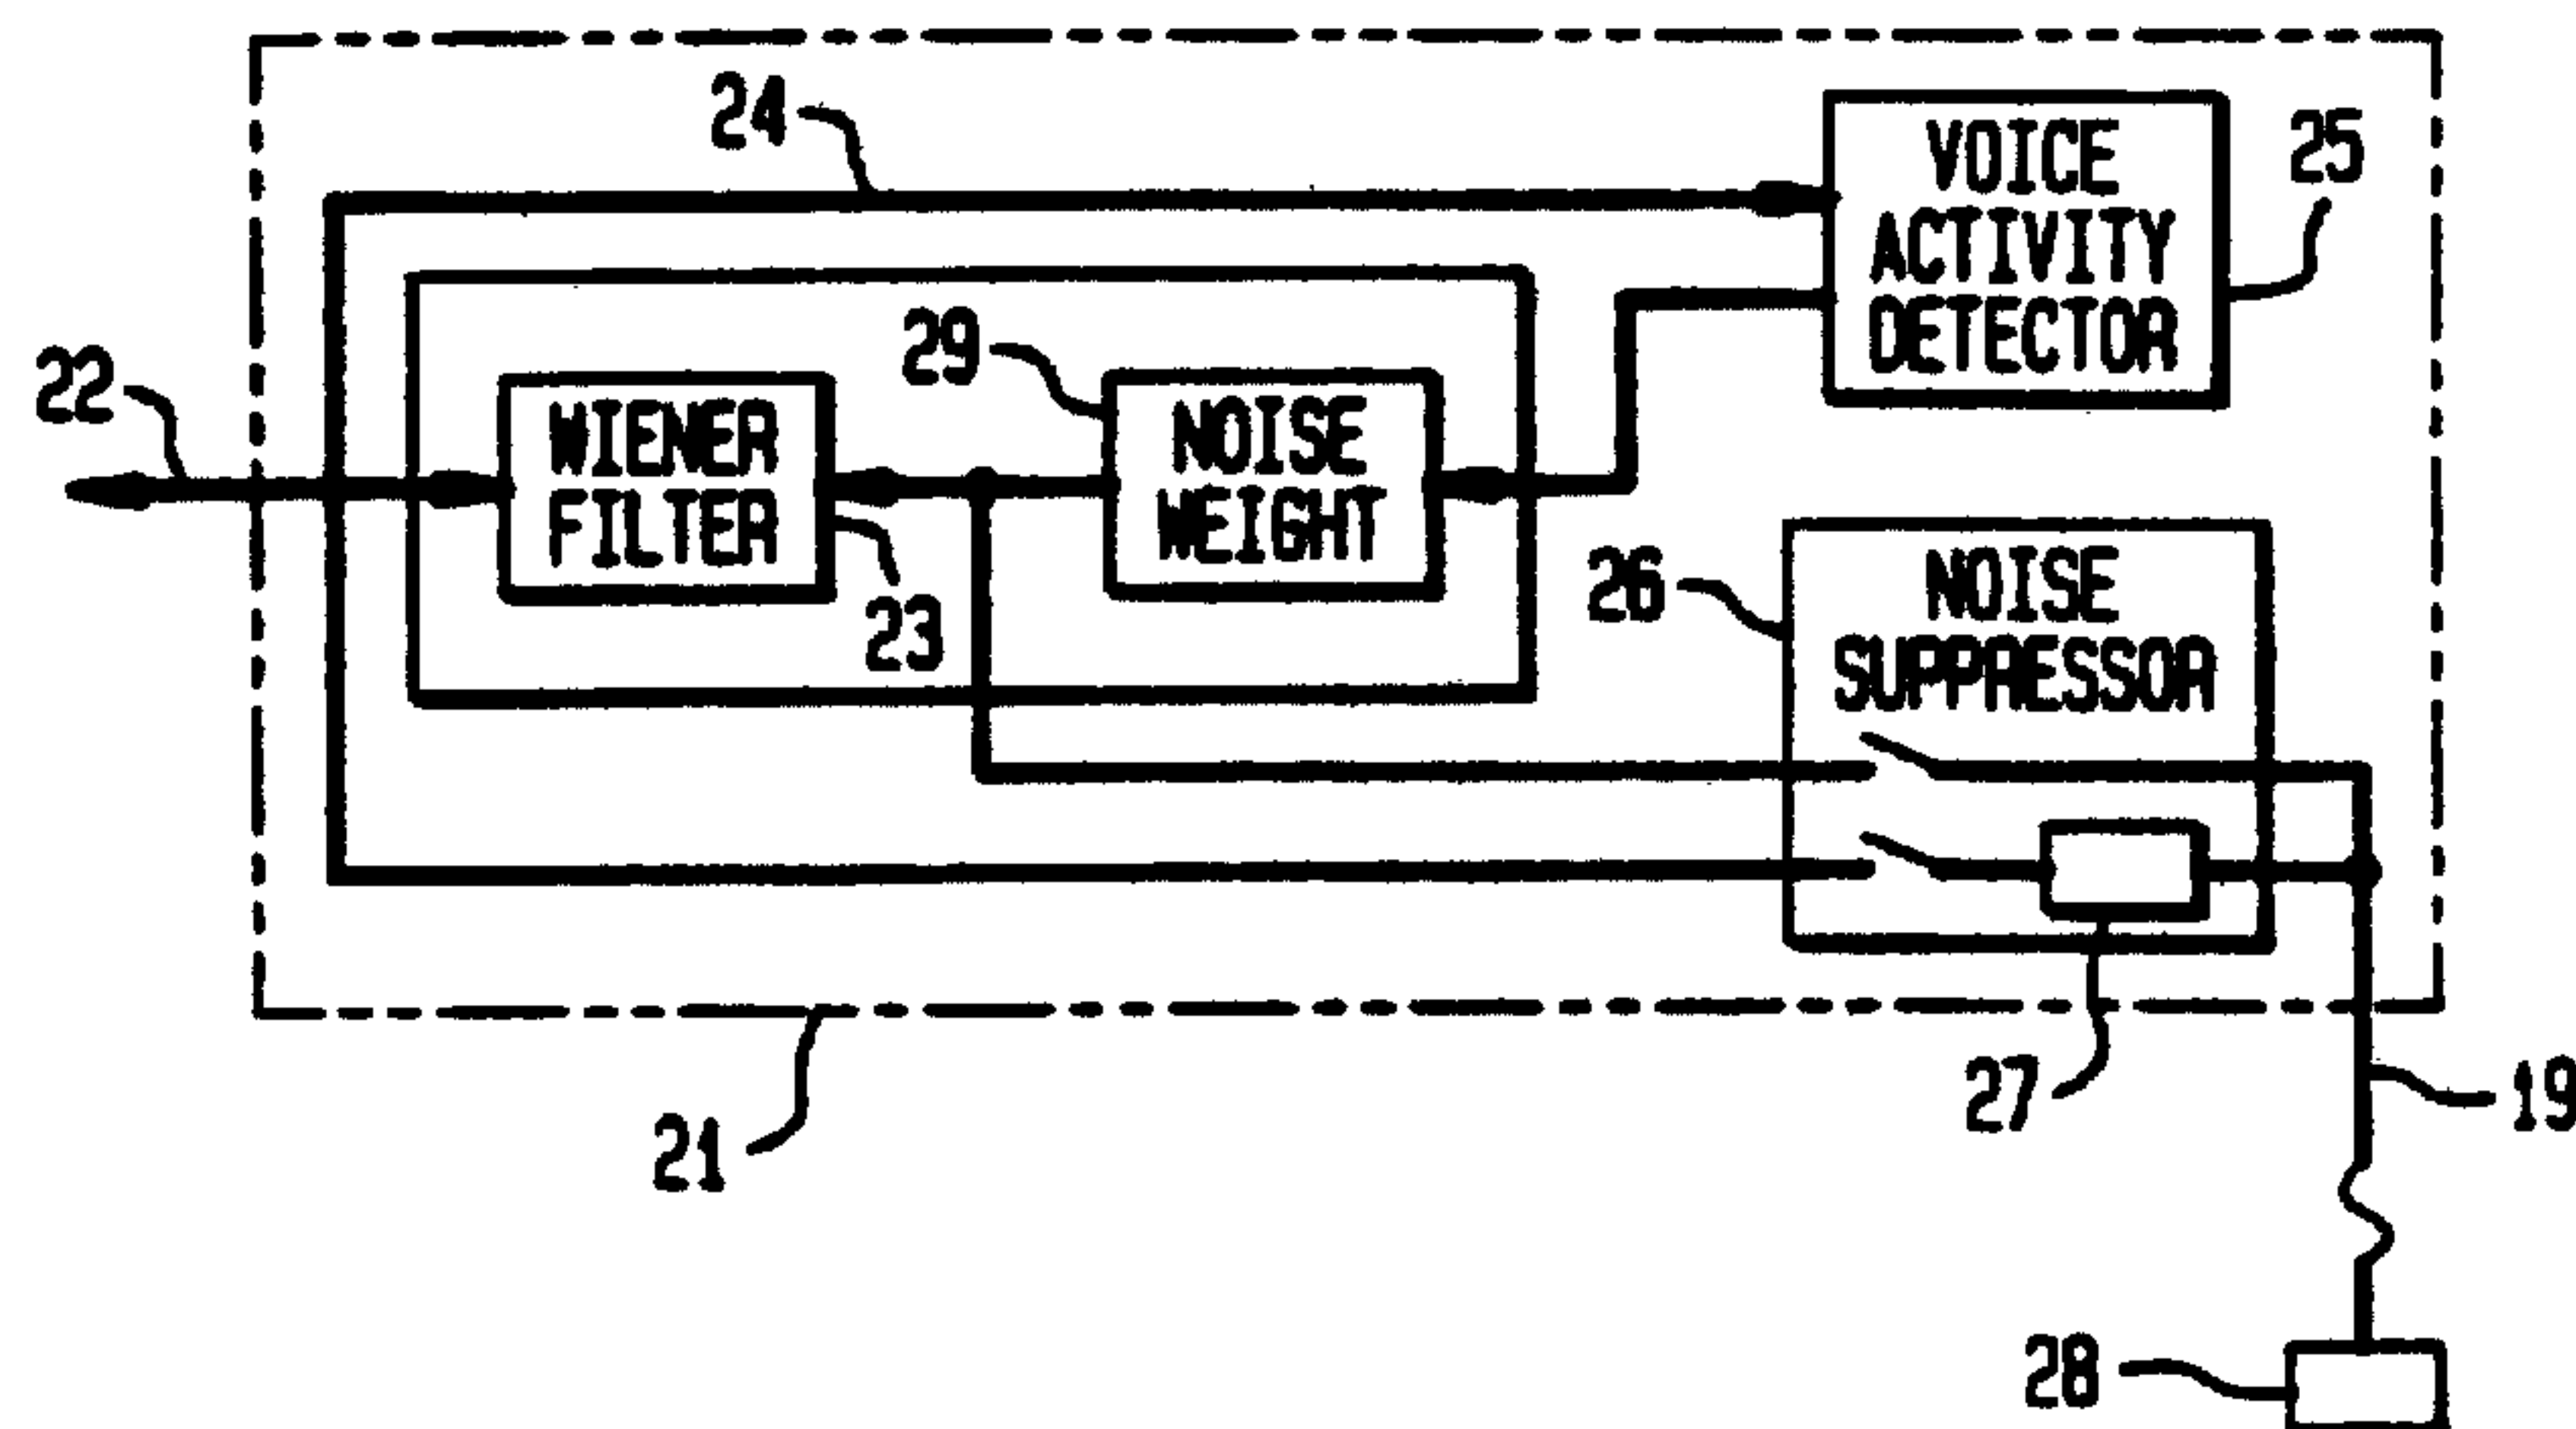

(57) La présente invention permet au service (figure 1) réseau télécommunications de supprimer les effets indésirables du bruit de transmission. Pour cela, un dispositif de traitement du signal filtre et élimine le bruit grâce aux estimations interactives fournies par un modèle de voix pour codage prédictif linéaire. Le filtre modèle de voix utilise une estimation de la densité actuelle du spectre de puissance du bruit mise à jour avec précision. Pour cela, il utilise des échantillons de trame de signal d'entrée qu'un détecteur (25) d'activité vocale considère comme n'étant que des trames de bruit. Le nouveau procédé de calcul du signal d'entrée par modèle de voix pour codage prédictif linéaire produit des itérations intertrame de la trame actuelle en se basant sur une sélection de trames récentes et un maximum de deux trames à venir (figure 3 et figure 10). Le procédé est efficace, sans que le signal de bruit doive être authentifié par sa source.

(57) A telecommunications network service (figure 1) overcomes the annoying effects of transmitted noise by a signal processing which filters out the noise using interactive estimations of a linear predictive coding speech model. The speech model filter uses an accurate updated estimate of the current noise power spectral density, based upon incoming signal frame samples which are determined by a voice activity detector (25) to be noise-only frames. A novel method of calculating the incoming signal using the linear predictive coding model provides for making intraframe iterations of the present frame based upon a selected number of recent past frames and up to two future frames (figure 3 and figure 10). The processing is effective notwithstanding that the noise signal is not ascertainable from its source.





INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G10L 9/00	A1	(11) International Publication Number: WO 95/15550 (43) International Publication Date: 8 June 1995 (08.06.95)
<p>(21) International Application Number: PCT/US94/12998</p> <p>(22) International Filing Date: 15 November 1994 (15.11.94)</p> <p>(30) Priority Data: 08/160,770 30 November 1993 (30.11.93) US</p> <p>(71) Applicant: AT & T CORP. [US/US]; 32 Avenue of the Americas, New York, NY 10013-2412 (US).</p> <p>(72) Inventor: WYNN, Woodson, Dale; 56 Juniper Way, Basking Ridge, NJ 07920 (US).</p> <p>(74) Agents: WILDE, P., V., D. et al.; P.O. Box 679, Holmdel, NJ 07733 (US).</p>	<p>(81) Designated States: CA, CN, JP, KR, PL, UA, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	


(54) Title: TRANSMITTED NOISE REDUCTION IN COMMUNICATIONS SYSTEMS

(57) Abstract


A telecommunications network service (figure 1) overcomes the annoying effects of transmitted noise by a signal processing which filters out the noise using interactive estimations of a linear predictive coding speech model. The speech model filter uses an accurate updated estimate of the current noise power spectral density, based upon incoming signal frame samples which are determined by a voice activity detector (25) to be noise-only frames. A novel method of calculating the incoming signal using the linear predictive coding model provides for making intraframe iterations of the present frame based upon a selected number of recent past frames and up to two future frames (figure 3 and figure 10). The processing is effective notwithstanding that the noise signal is not ascertainable from its source.

SMOOTHING OF LSP ROOTS OVER SEVEN FRAMES, PAST & FUTURE

FRAME WEIGHTS: SUM=1

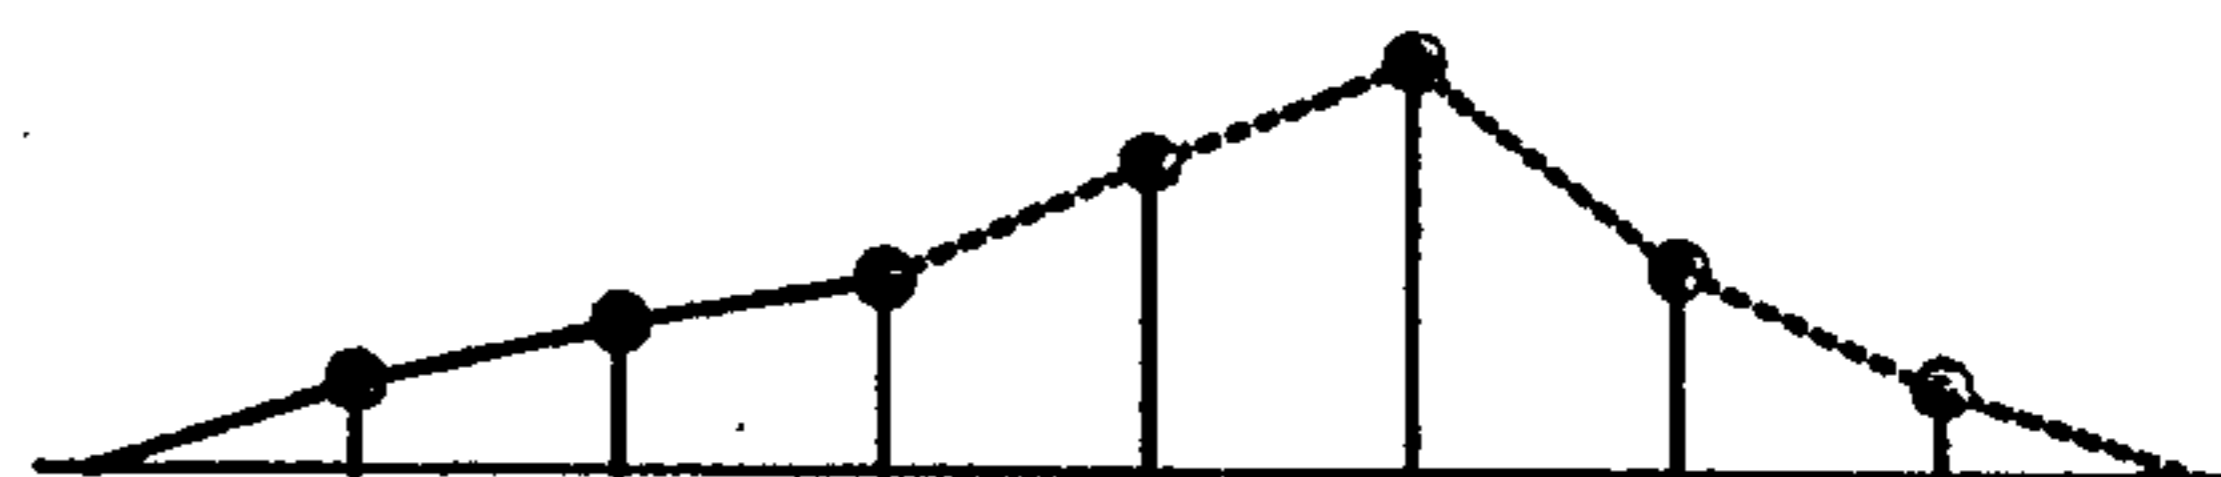INPUT FRAMES $y(n)$

FRAMES HAVE 50% OVERLAPS

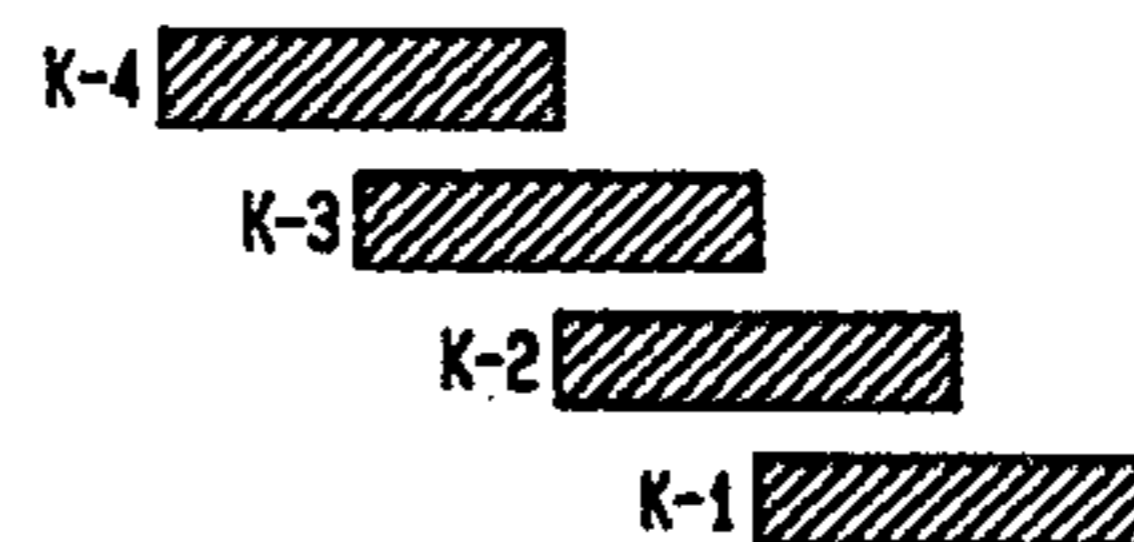

PRESENT FRAME

K+1

K+2

FUTURE FRAMES

TIME

ITERATION 1

ITERATION 2

ITERATION 3

ITERATION j-1

ITERATION j

FILTER-LSP
ITERATION
SEQUENCE FOR
FRAME K

TRANSMITTED NOISE REDUCTION IN COMMUNICATIONS SYSTEMS

FIELD OF THE INVENTION

This invention relates to enhancing the quality of speech in a noisy
5 telecommunications channel or network and, particularly, to apparatus which
enhances the speech by continuously removing noise content through a novel use of
linear predictive coding.

BACKGROUND OF THE INVENTION

In all forms of voice communications systems, noise from a variety of
10 causes can interfere with the user's communications. Corrupting noise can occur
with speech at the input of a system, in the transmission path(s), and at the receiving
end. The presence of noise is annoying or distracting to users, can adversely affect
speech quality, and can reduce the performance of speech coding and speech
recognition apparatus.

15 Speech enhancement technology is important to cellular radio telephone
systems which are subjected to car noise and channel noise, to pay phones located in
noisy environments, to long-distance communications over noisy radio links or other
poor paths and connections, to teleconferencing systems with noise at the speech
source, and air-ground communication systems where loud cockpit noise corrupts
20 pilot speech and is both wearing and dangerous. Further, as in the case of a speech
recognition system for automatic dialing, recognition accuracy can deteriorate in the
noisy environment if the recognizer algorithm is based on a statistical model of clean
speech.

Noise in the transmission path is particularly difficult to overcome, one
25 reason being that the noise signal is not ascertainable from its source. Therefore,
suppressing it cannot be accomplished by generating an "error" signal from a direct
measurement of the noise and then cancelling out the error signal by phase inversion.

Various approaches to enhancing a noisy speech signal when the noise
component is not directly observable have been attempted. A review of these
30 techniques is found in "Enhancement and Bandwidth Compression of Noisy Speech,"
by J. S. Lim and A. V. Oppenheim, Proceedings of the IEEE, Vol. 67, No. 12,
December 1979, Section V, pp 1586-1604. These include spectral subtraction of the
estimated noise amplitude spectrum from the whole spectrum computed for the
available noisy signal, and an iterative model-based filter proposed by Lim and

- 2 -

Oppenheim which attempts to find the best all-pole model of the speech component given the total noisy signal and an estimate of the noise power spectrum. The model-based approach was used by J. H. L. Hansen, in "Constrained Iterative Speech Enhancement with Application to Speech Recognition," by J. H. L. Hansen and M. A. Clements, IEEE Transactions On
5 Signal Processing, Vol. 39, No. 4, April. 1991, pp. 795-805, to develop a non-real-time speech smoother, where additional constraints across time were imposed on the speech model during the Lim-Oppenheim iterations to limit the model to changes characteristic of speech.

The effects of the earlier methods in the Lim/Oppenheim reference are to improve the signal-to-noise ratio after the processing, but with poor speech quality improvement due to
10 the introduction of non-stationary noise in the filtered outputs. Even very low level non-stationary noise can be objectionable to human hearing. The advantage of smoothing across time frames in Hansen's non-real-time smoother is to further reduce the level of the non-stationary noise that remains. Hansen's smoothing approach provides considerable speech quality enhancement compared with the methods in Lim/Oppenheim reference, but
15 this technique cannot be operated in real-time since it processes all data, past and future, at each time frame. Then the improvement cannot work effectively in a telecommunications environment. One of the improvements described below is to alter the Hansen smoother to function as a filter that is compatible with this environment.

SUMMARY OF THE INVENTION

20 The invention is a signal processing method for a communication network, which filters out noise using iterative estimation of the LPC speech model with the addition of real-time operation continuous estimation of the noise power spectrum, modification of the signal refiltered each iteration, and time constraints on the number of poles and their movements across time frames. The noise-corrupted input speech signal is applied to a
25 special iterated linear Wiener Filter the purpose of which is to output in real-time an estimate of the speech which then is transmitted into the network.

The filter requires an accurate estimate of the current noise power spectral density function. This is obtained from spectral estimation of the input in noise gaps that are typical in speech. The detection of these noise-only frames is accomplished by a Voice Activity
30 Detector (VAD). When noise-only is detected in the VAD, the filter output is attenuated so

that the full noise power is not propagated onto the network.

When speech plus noise is detected in the time frame under consideration by the filter, an estimate is made as to whether the speech is voiced or unvoiced. The order of the LPC model assumed in the iterated filter is modified according to the speech type detected. As a rule, the LPC model order is $M = F_s + (4 \text{ or } 5)$ if voiced speech and $M = F_s$ if unvoiced speech in the time frame, where F_s is the speech bandwidth in KHz. This dynamic adaptation of model order is used to suppress stray model poles that can produce time-dependent modulated tonelike noise in the filtered speech.

In accordance with another aspect of the invention, a tracking of changes in the noise spectrum is provided by updating with new noise-only frames to a degree that depends on a "distance" between the new and old noise spectrum estimates. Parameters may be set on the minimum number of contiguous new noise frames that must be detected before a new noise spectrum update is estimated and on the weight the new noise spectrum update is given.

These and further inventive improvements to the art of using iterative estimation of a filter that incorporates an adaptive speech model and noise spectral estimation with updates to suppress noise of the type which cannot be directly measured, are hereinafter detailed in the description to follow of a specific novel embodiment of the invention used in a telecommunication network.

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram of an illustrative telecommunications network containing the invention;

FIG. 1a is a signal processing resource;

FIG. 2 is a diagram of a smoothing operation practiced in the invention;

FIG. 3 is a flowchart showing the framework for speech enhancement;

FIG. 4 is a diagram of apparatus which generates the iteration sequence for constrained speech enhancement;

FIGS. 5a, 5b and 5c are diagram depicting the interframe smoothing operation for LPC roots of the speech model; and the intraframe LPC autocorrelation matrix relaxation from iteration to iteration;

- 4 -

FIG. 6a is a diagram showing a method for updating each iteration of the current frame;

FIG. 6b is a diagram showing the improved method used for updating each iteration of the current frame;

5 FIGS. 7a and 7b are tables of smoothing weights for the LSP position roots to smooth across seven speech frames around the current frame;

FIGS. 8 and 9 are signal traces showing aspects of the noise estimator; and

FIG. 10 is a description of the steps used to update the required noise spectrum used in the Wiener Filter.

10 **DETAILED DESCRIPTION OF AN ILLUSTRATIVE EMBODIMENT**

The invention is essentially an enhancement process for filtering in-channel speech-plus-noise when no separate noise reference is available and which operates in real time. The invention will be described in connection with a telecommunications network, although it is understood that the principles of the invention are applicable to many situations where noise on an electronic speech transmission medium must be reduced. An exemplary
15 telecommunications network is shown in FIG. 1, consisting of a remotely located switch 10 to which numerous communications terminals such as telephone 11 are connected over local lines such as 12 which might be twisted pair. Outgoing channels such as path 13 emanate from remote office 10. The path 13 may cross over an international border 14. The path 13
20 continues to a U.S. based central office 15 with a switch 16 which might be a No. 4ESS switch serving numerous incoming paths denoted 17 including path 13.

Switch 16 sets up an internal path such as path 18 which, in the example, links an incoming call from channel 13 to an eventual outgoing transmission channel 19, which is one of a group of outgoing channels. The incoming call from channel 13 is assumed to contain
25 noise generated in any of the segments 10, 11, 12, 13 of the linkage; the noise source, therefore, cannot be directly measured.

In accordance with the invention, a determination is made in logic unit 20 whether noise above a certain predetermined threshold is present in the switch output from channel 13. Logic unit 20 also determines whether the call is voice, by ruling out fax, modem
30 and other possibilities. Further, logic unit 20 determines whether the originating number is a

- 5 -

customer of the transmitted noise reduction service. If logic unit 20 makes all three determinations, the call is routed to processing 21 by switch 22; otherwise the call is passed directly through to channel 19. While only one processing 21 is shown, all of the channels outgoing from switch 16 are connectable to other processors 21 (not shown).

5 The incoming signal from noisy channel 13 may be processed to advantage by an analog filter (not shown) which has a frequency response restricted to that of the baseband telephone signal.

 In the system discussed here, the noisy speech presented to processor 21 is digitized at an 8 KHz rate, and the time series are processed in frames. The frame size used is 160
10 samples (20 msec.) and a 50% overlap is imposed on these blocks to insure continuity of the reconstructed filtered speech.

 Referring now to FIG. 1A, processor 21 consists of a Wiener Filter, where the signal spectrum for this filter is estimated by assuming an all-pole LPC model and iterating each frame to get the unknown parameters. This is filter 23 to which the noisy call is routed. The
15 call also is routed via bypass 24 to the Voice Activity Detector (VAD) 25, which continuously detects noise or speech-plus-noise frames and determines if a speech frame is voiced or unvoiced. The required noise spectrum to be used in the Wiener Filter 23 is estimated from noise-only frames detected by the VAD 25.

 When a processed frame is detected as noise only, VAD 25 signals a noise
20 suppression circuit 26 to switch in a suppressor 27. In this mode, the noise-only input to filter 23 is attenuated substantially before its entry to the outgoing path 19 to the far-end listener at terminal 28. Additionally, when a noise-only frame is detected, the VAD 25 signals the update function 29 in filter 23 to make a new noise spectral estimate based on the current noise frames and to weight it with the previous noise spectral estimate.

25 When speech is detected by VAD 25, input to circuit 26 is switched to filter 23 such that the filtered speech is passed to the outgoing line 19. In addition, the order of the LPC speech model for the iterated Wiener Filter 23 is set at 10-th order if voiced speech is detected and at 4-th to 6-th order for an unvoiced speech frame. The motivation for this adaptive order of speech model is that the iterative search for the LPC poles can result in false
30 formants in parts of the frequency band where the ratio of signal power spectrum to noise power spectrum is low. This results in noise tones of random frequency and duration in the

- 6 -

filtered output that can be objectionable to the human ear, even though they are very low level relative to the average signal amplitude. Hence, since the LPC order typically needed for unvoiced speech is only half that of voiced speech for the bandwidth of interest, and since unvoiced speech is usually weaker than voiced speech, it is

5 important to modulate the LPC order such that the speech model is not over specified.

The processes practiced in the iterative filter 23 are based on the available filter approach in the Lim/Oppenheim reference and on the interframe and intraframe smoothing applied by J. H. L. Hansen to improve the iterative convergence for his non-real-time AUTO-LSP smoother discussed in the Hansen/Clements reference. Filter 23 operates on an
10 incoming noisy speech signal to obtain the approximate speech content. The filter operation will now be described.

SIGNAL-MODEL SMOOTHING ACROSS ADJACENT TIME FRAMES

If the speech is not already in digital form, processor 21 contains an incoming signal analog-to-digital converter 30, which generates frame blocks of sampled input. Frame size of
15 160 samples, or 20 msec., is a time duration sufficient for speech to be approximated as a statistically stationary process for LPC modeling purposes. The iterated Wiener Filter and the LPC model of the speech process used as one component of processor 21 are based on a stationary process assumption. Hence, it is significant that the frames are processed in these short time blocks.

20 Referring now to FIG. 2, the input signal plus noise may be expressed by $y[n]=s[n]+d[n]$, where y is the available input sample, and s and d are the signal and noise parts. The samples are blocked into frames which overlap substantially, for example, by 50%. The data blocks are each weighted by a time window, such as the Hanning window, so that the sum of the overlapped windowed frames correctly spaced in time will add to give the
25 original input time series. The use of a window reduces the variance in the LPC model estimated for a data frame, and frame overlap provides a continuity in the reconstructed filtered signal output to channel 19 in FIG. 1a.

As in the iterative AUTO-LSP smoother in the Hansen/Clements reference, there are two types of constraints for the present invention that are applied at each iteration of the
30 Wiener Filter during the processing of the current frame of input data. These are the LPC

- 6a -

Autocorrelation matrix relaxation constraint applied at each intraframe iteration of the current frame, and the interframe smoothing of the current frame's LPC speech model pole positions across the LPC pole positions realized at each iteration for adjacent past and future frames. The LPC pole constraints are not applied directly since these occur as complex numbers in the Z-plane, and the proper association to make of the complex pole positions for interframe smoothing is not clear. An indirect but simpler approach is possible by using an equivalent representation of the LPC poles called the Line Spectral Pair

5

(LSP), the details of which are discussed in the Hansen/Clements reference and in Digital Speech Processing, Synthesis, and Recognition, by S. Fururi, Marcel Dekker, Inc., New York, NY, 1989, Chapter V. The N-th order LPC model pole positions are equivalently represented by a set of N/2 LSP "position" roots and N/2 LSP

5 'difference' roots that lie on the Unit Circle in the complex Z-plane. The utility of this equivalent LSP representation of the LPC poles is that lightly damped formant locations in the signal's LPC model spectrum are highly correlated with the LSP position roots, and the bandwidths of the LPC spectrum at these formants are highly correlated with the LSP difference roots. For a stable LPC model, the two kinds of

10 LSP roots will lie exactly on the Unit Circle and will alternate around this circle. The ordering in position of LSP roots is obvious, and their smoothing across time frames is much simpler than in the smoothing of complex LPC roots. In summary, the LPC poles at each iteration of the current frame being filtered are smoothed across LPC poles at the same iteration in adjacent frames by smoothing the equivalent LSP

15 position roots and by applying a lower bound on the minimum distance of a "difference" root to adjacent "position" root. The latter bounding restrains the sharpness of any LPC model's formants to be speech like.

The invention calls for performing the LSP position smoothing across nearby contiguous time frames, but in the filter implemented for real-time

20 application in a communication network, only a few frames ahead of the current frame being filtered can be available. For 20 msec. frames with 50% overlap, the minimum delay imposed by using two future frames as indicated in FIG. 2 is 30 msec. Even this small delay may be significant in some communication networks. The filter discussed here assumes four past frames and two future frames for

25 smoothing. Although the entire past frames are available, only those correlated with the current frame should be used.

ITERATION PROCESS

The constrained iterative steps performed for the current frame K are shown in FIG. 3 with the iteration 1,...,J details indicated in FIG. 4. The Wiener

30 Filter-LSP cycle is initiated by filtering the input block $y[n]$ in the frequency domain, by the Wiener Filter (WF) where the signal and noise power spectral estimates used are $C \cdot S_y(f)$ and $S_d(f)$. That is, the initial filter's signal spectrum is the total input spectrum scaled by C to have the expected power of the signal:

$P_{signal} = P_{total} - P_{noise}$. After initialization, the loop in FIG. 3 performs of the

35 following steps for iterative filtering of frame K ;

2153170

- 8 -

(1) Start the iteration loop by estimating the LPC parameters of the WF output signal in the Time Domain where the LPC autocorrelation calculation is subject to a relaxation over autocorrelation values of previous iterations for the frame. This relaxation step attempts to further stabilize the iterative search for the best speech LPC model. This is discussed below in conjunction with FIG. 5.

(2) From the LPC model found in (1) at iteration j for speech frame K , solve for the LSP position roots P_j and difference roots Q_j . This requires the real-root solution of two polynomials each of one-half the LPC order.

(3) Smooth the LSP position roots P_j for the current frame K across adjacent frames as indicated in FIG. 2 and FIG 5c, and constrain the LSP difference roots Q_j away from the smoothed P_j roots. Each difference root Q_j is constrained to be more than a minimum distance D_{\min} away from its closest smoothed P_j root. This prevents the smoothed LPC pole positions from being driven to the Unit Circle of the complex Z-plane. This "divergence" was a problem in the Lim-Oppenheim iterative filter of the Lim/Oppenheim reference that was addressed in the smoother in the Hansen/Clements reference. The constraint is desirable for realistic speech transmission. The value $D_{\min} = 0.086$ radians has been used in telecommunications tests of the method.

(4) Convert the smoothed LSP roots to smoothed LPC parameters, compute the LPC signal model power spectrum $S_s(f)_j$ scaled such that the average power equals the current K -th frame estimated signal power: $P_{\text{signal}} = P_{\text{total}} - P_{\text{noise}}$.

(5) Use the smoothed LPC model signal spectrum $S_s(f)_j$ and the current noise power spectrum estimate $S_d(f)$ to construct the next iteration's Wiener Filter $H_j(f)$ as shown in FIG. 3 and FIG. 4. We use the term Wiener Filter loosely here since this filter is the usual non-casual WF raised to a power pow . Values for pow between 0.6 and 1.0 have been used in telecommunications tests of the method. The larger pow is the greater the change that occurs with each iteration, but with smaller pow the iterative search for the signal component should be more stable.

(6) Filter a combination of the previous iterations WF time-series output $s_{j-1}[n]$ and the original input data $y[n]$ with the current $H_j(f)$ to get the next iteration of signal estimate $s_j[n]$. The linear combination used is $(1-B) \cdot y[n] + B \cdot s_{j-1}[n]$, where $0 \leq B \leq 1$. If $B = 0$, the filter becomes an unconstrained Lim-Oppenheim iterative filter, and if $B = 1$ the input to the next WF is the previous WF output as done in the Hansen AUTO-LSP smoother in Hansen/Clements reference. Values of B between 0.80 and 0.95 have been used in

2153170

- 9 -

most of the experiments on this filter. With these values of B , some desirable features of both the Lim-Oppenheim filter and Hansen smoother were combined. This weighting concept is new in the present method. It gives additional control of the amount of final noise content vs. the degree of high-frequency filtering observed
5 in the iterated filtered speech.

The combining of features of the two previous signal-modeled iterative algorithms in the Lim/Oppenheim and Hansen/Clements references, specifically the weighted combination of Wiener Filter inputs each iteration, has been found
10 subjectively to result in a less muffled sounding speech estimate, with a trade-off of slightly increased residual noise in the output. Combining is shown in FIGS. 2 and 3, where it is seen that the input signal to the FILTER at the j -th iteration is the TOTAL INPUT $y[n]$ and the Wiener Filter OUTPUT $s[n]_{j-1}$ from the $(j-1)$ -th iteration.

(7) In the present implementation of the method the number of
15 iterations *intra* is an input parameter determined by experiment. For the results obtained in experiments, a value of 4 to 7 intraframe iterations were used in combinations [*Intra*, *pow*] such as [7, 0.65], [5, 0.8], and [4, 1.0] where values of the feedback factor B were between 0.80 and 0.95. The best values depend on the noise class and speech type. For broad band flat noise, *intra* = 6 may be typical while only
20 4 or 5 iterations may suffice when the noise power spectrum is heavily biased below 1 KHz of the [0, 4 KHz] voice-band spectrum.

An important aspect of the invention that is illustrated in FIG. 1A, item 25, and also in FIG. 3 is the multiple application of a Voice Activity Detector (VAD), to both detect noise-only frames and to determine the best model order to
25 apply in each frame by detecting voice or unvoiced speech if speech is present. As noted before, the best order for a LPC speech model differs for voiced and unvoiced speech frames. Also, as noted earlier, the noise spectrum is updated only when no voice signal is detected in a sufficient number of contiguous frames. During a time interval when noise only is detected, noise suppressor 27 in switch 26 is activated to
30 attenuate the outgoing signal, and the iterative filter 23 is then inactive. If, however, speech is detected, then 26 switches 30 to the output 19. And the class of speech, voiced or unvoiced, conditions the order of the LPC speech model to be used in the iterations. Also, the detection of change between the three possible states, noise-
frame voiced-frame and unvoiced-frame, causes the LSP history for past frames
35 $K-4, K-3, K-2$, and $K-1$ to be reinitialized before application of smoothing to the current K -th frame. This is both necessary and logical for best speech filtering since

2153170

- 10 -

the purpose of smoothing across past time frames is to average disparate noise by making use of the short term stationary of speech across the frames averaged.

FRAME PROCESSING

The method of processing the frames to achieve real-time operation of filter 23 is shown in FIG. 6b. The K _{*th*} frame is assumed to be the present time reference point with frames $K-4, K-3, K-2, K-1$ the previously processed and archived frames while frames $K+1$ and $K+2$ are the available future frames. As in the smoothing approach in the Hansen/Clements reference, filter 23 smoothes the LSP roots of the K _{*th*} frame speech model with those of the past and future frames at each K _{*th*} frame iteration by using the past frame LSP histories at the iteration number in process. However, unlike the non-real-time smoother in Hansen/Clements reference, the invention uses only two future frames and also stores the required past-frame LSP histories during the iterations done for each frame so that it accumulates these histories for the previous four frames to be smoothed with the current frame during the intraframe iterations. As in the method of Hansen/Clements reference, the weights are tapered across the frames and the taper from each LSP foot depends on the current frames SNR as well as the SNR history up to this K _{*th*} frame.

Another improvement in the invention is the use of table lookup for the frame LSP weights to be applied across frames. Weight tables applied in the invention are of the type shown in FIG. 7, whereas the weights required in Hansen/Clements reference are obtained by time-consuming formula computations. The values applied in the tables in FIG. 7 can be easily and independently adjusted, unlike the constraints imposed by the formula used in Hansen/Clements reference. The speech-frame thresholds at which a weight vector are applied to a particular LSP root is switched from one table to another are selected independently. The general strategy in constructing smoothing vectors is to apply more smoothing to the higher order LSP positions (i.e. higher formant frequencies) as indicated reading left to right in these tables. This is due to the greater influence of noise at given SNR observed on the higher order LSP speech positions. Another trend imposed on the table values is that smoothing is broad and uniform when the frame SNR is low and is decreased as SNR is increased to the point where no smoothing is applied at high SNR. This trend is due to the decreasing effect of noise on the filtered speech as frame SNR is improved. The frame SNR thresholds used to switch from one table of weight vectors to another are presently selected as multiples of the running estimate

N_{pow} of the noise power estimated in the VAD. The increasing thresholds used are $Th1 = 2.N_{pow}$ for change from table Win1 to Win2, $Th2 = 3.N_{pow}$ from table Win2 to Win3, $Th3 = 7.N_{pow}$ from table Win 3 to Win4, $Th4 = 11.N_{pow}$ from table Win4 to Win5, with Win0 imposed if a sufficiently long run of low SNR frames occurs.

5 USE OF VOICE ACTIVITY DETECTION

Estimating the noise power spectral density $S_d(f)$ from noise-only frames using a voice activity detector (VAD), in accordance with the invention, provides an advantage. The filter process outlined in FIG. 3 is based on the assumption that the noise present during speech has the same average power spectrum as the estimated $S_d(f)$. If the noise is statistically wide-sense stationary, noise estimates would not need to be updated. However, for the speech enhancement applications illustrated herein, and also for many other transmitted noise reduction applications, the noise energy is only approximately stationary. In these cases, a running estimate of $S_d(f)$ is needed. Accordingly, a VAD such as detector 25 in FIG. 1A, having good immunity to noise at the operating SNR is used to identify when speech is not present. Noise-only frames detected between speech segments are used to update the noise power spectrum estimate, as shown in FIG. 10. One suitable VAD for use in the FIG. 1A application is obtained from the GSM 06.32 VAD Standard discussed in "The Voice Activity Detector for the PAN-EUROPEAN Digital Cellular Mobile Telephone Service," by D. K. Freeman et al., in IEEE Conf. ICASSP. 1989, Setion S7.6, pp. 369-372.

The pre-filtered and post-filtered speech examples shown in of FIGS. 8 and 9 indicate how voice activity detection is used to trigger attenuation of the outgoing signal when no voice is detected. As discussed in the Freeman et al. reference, the activation of the VAD on a noise frame is a convoluted balance of detected input level and repeated frame decisions of "no speech" properties.

IMPROVED OUTPUT USING SPEECH CLASSIFIER

Advantageously, a VAD speech classifier decision may be incorporated in the front end of the LPC model step as shown in FIG. 3. This is because the parameter settings such as LPC order in the AUTO_LSP algorithm are best adjusted according to the speech class (voiced or unvoiced) which is being filtered in the currently processed frame. If the speech within the processed frame can be classified reliably in the presence of noise, the enhancement may be improved.

2153170

- 12 -

NOISE SPECTRUM ESTIMATION

In accordance with another aspect of the invention, and referring to FIG. 3 and FIG. 10, an improved sensitivity to changes in the noise signal spectra is provided by apparatus which updates spectrum $S_d(f)$ with new "noise-only" frames to a degree that depends on how different the new noise spectra estimate $S_d(f)_{new}$ is from the prior estimate $S_d(f)$. If $S_d(f)_{L-1}$ denotes the prior noise spectrum, the updated spectrum is

$$S_d(f)_L = (1-A) \cdot S_d(f)_{L-1} + A \cdot S_d(f)_{new}$$

where $0 \leq A \leq 1$ is a normalized average of the error $|S_d(f)_{L-1} - S_d(f)_{new}|^p$ over the frequency band. Typical values for p are $1 \rightarrow 2$. When a new noise spectrum estimate is "near" the prior estimate shape, A is near 0, but when the two spectral shapes are very different, A will be nearer 1 and the new noise frames will be heavily weighted in $S_d(f)_L$. Noise-frame decisions are made by the VAD which is a relatively conservative estimator in the proper SNR range, hence the probability of correct noise decisions is high for SNR above 10 dB. The time between noise updates is not a parameter in this approach, only average spectral difference. In order to decrease the variance in estimating the spectrum $S_d(f)_{new}$ it is desirable to require a number of contiguous noise-frame decisions from the VAD before and update is valid. In test of the enhancement, 5 or 6 contiguous noise-frames are required in order to update the spectrum.

ADDITIONAL COMMENTS ON THE AUTO-LSP IMPROVED ITERATIVE FILTER

As discussed previously, two types of constraints are used in the AUTO-LSP filter approach to improve the Lim-Oppenheim model-based iterative filter. These are the intraframe autocorrelation relaxation placed on the autocorrelation matrix which is computed for the LPC model each iteration, and the interframe smoothing over LSP roots that occurred in the iteration for the time frames around the frame being filtered. The constraint operations, performed each iteration, are shown in in FIG. 5. The Smoothing Operation shows the order in which the constraints are to be applied during an iteration to obtain that iteration's Wiener Filter (WF) signal power estimate $S_s(f)_j$ from the previous iteration signal result $s[n]_{j-1}$. The iterative sequence of filtering the whole Signal + Noise $y[n]$ with the WF where at each iteration the new estimate of the signals spectrum is

inserted into the WF model will, in theory, converge to the "best" signal estimate under the statistical assumptions imposed in the Lim/Oppenheim reference. In the real-world speech signal and noise classes of interest, the additional AUTO-LSP intraframe and interframe constraints assist the convergence and impose speech-like requirements on the signal spectrum in the WF. The intraframe autocorrelation relaxation is shown in Part B of FIG. 5, where the desired LPC model parameters are denoted as \mathbf{a} , the autocorrelation matrix of the latest signal estimate $s[n]_j$ is \mathbf{R}_j , and \mathbf{b}_j is the cross-correlation vector in the Yule-Walker AR method. The proposed relaxation factor is $c = 0.7$. The relaxation can be expanded to smooth over more than just the previous frame, but no significant advantage has been observed in doing this. The smoothing process is shown in FIG. 5C. Each large circle indicates the Unit Circle in the complex Z-plane. For the K_{th} frame and iteration j , the symbol 'o' marks the LSP difference roots \mathbf{Q}_{Kj} and '*' marks the position roots \mathbf{P}_{Kj} . For a LPC model that is Minimum Phase, the poles lie inside the Unit Circle and the \mathbf{P}_{Kj} and \mathbf{Q}_{Kj} will alternate along this circle. LSP smoothing is over the past and future frames, where the present set is $K-4, K-3, K-2, K-1, K, K+1, K+2$. Only the position roots \mathbf{P}_{Kj} are smoothed directly, and the difference roots \mathbf{Q}_{Kj} are forced to track the smoothed \mathbf{P}_{Kj} . An inverse step gives the smoothed, scaled LPC signal model's spectrum $S_s(f)_j$. The complex roots of an equivalent LSP representation are simply the solution of a pair of real-root polynomials each with half the order of the original LPC polynomial, as is fully described in the Hansen/Clements and Furui references.

A clear computational advantage exists in smoothing LSP roots in the AUTO-LSP approach rather than directly smoothing the complex domain roots of the LPC autoregressive models. Even though the LPC and LSP model representations are equivalent, a possible disadvantage of smoothing LSP roots across frames is that a nonlinear relationship exists between the LPC spectrum formant locations/bandwidths and the corresponding LSP position/distance roots. Specifically, as LPC roots move away from the Unit Circle, LSP position roots do not identify well with the LPC formant frequencies or bandwidths. However, this nonlinear mapping does not seem to limit the effectiveness of constrained LSP roots in providing improved speech enhancement.

The described process is particularly effective when the noise is statistically wide-sense stationary during the time interval from the point of estimation of the noise power spectrum to the end of the Speech+Noise processed using this noise estimate. It seems to be most effective for signal-to-noise ratios

2153170

- 14 -

above 10dB SNR. For interference cases such as automobile road noise and aircraft cockpit noise where much of the spectral energy is at the lower part of the audio band, it may function usefully down to 5dB SNR. For stationary tone-like noise such as In-Network hum, the filter has been operated with considerable success for 5 SNRs below 0 dB when the VAD gives clear indication of the noise-only frames.

Claims:

1. In a telecommunications network carrying an incoming signal, said incoming signal having both speech and noise energy, a method for real-time processing of said incoming signal using an iterated filter operated as a Linear Predictive Coding speech model comprising filter-order adjustments and means for equivalently representing pole positions of said Linear Predictive Coding speech model with Line Spectral Pair position roots and difference roots, in which said iterated filter creates an estimate of the speech power spectrum component of said incoming signal for each current frame for transmission to said telecommunications network, said method comprising the steps of:

10 converting said incoming signal to a time-series of spectral domain data frames;

 selecting from said time-series of data frames a subset of consecutive data frames including a group of past data frames, the current data frame and up to two future data frames;

15 performing a selected number of iterations upon said current data frame across said subset of data frames, each said iteration generating values of said Line Spectral Pair position roots and difference roots; said iterations comprising the steps of:

 creating a succession of Wiener Filters in which the signal spectrum entering the initial said Wiener Filter includes a noise power spectrum estimate;

20 at each present iteration stage, determining the best current estimates of speech power spectrum and noise power spectrum, and summing the two said estimates to form a current said Wiener Filter; and

 summing a large fraction of the output of said current Wiener Filter with a small amount equal to 1 minus said large fraction of the unfiltered said incoming signal to create an input to the next said Wiener Filter;

25 during said iteration sequence, for each iteration smoothing said Line Spectral Pair root positions generated for said past data frames, with the Line Spectral Pair root position of said current frame, using values of Line Spectral Pair root positions calculated for the current iteration of said sequence;

30

- 16 -

creating estimates of said incoming speech power spectrum from the output of a succession of said iteration sequences of said current frames;

forming a noise-reduced speech signal based on said incoming speech power spectrum estimates; and

5 transmitting said noise-reduced speech signal to said telecommunications network.

2. The method of claim 1, wherein the decimal equivalent of said large fraction is from 0.80 to 0.95.

10 3. The method of claim 2, wherein said step of determining the best current said estimate of noise power spectrum comprises:

detecting a succession of said data frames which according to a predetermined criterion contain only noise energy; and

making and continuously updating said estimate of said noise power spectrum using only spectra of said data frames containing noise energy.

15 4. The method according to claim 3, wherein the step of making and continuously updating an estimate of said noise power spectrum further comprises the substeps of:

measuring differences in noise power spectrum between a new said noise power spectrum estimate and the prior said noise power spectrum estimate; and

20 giving greater weight in said updating to the frames of said new noise power spectrum estimate by an amount proportional to said last-named differences.

5. The method in accordance with claim 4, wherein the step of making and continuously updating said estimate of said noise power spectrum is performed only when at least a small predetermined number of noise-only frames are detected.

25 6. The method according to claim 5, wherein said predetermined number of noise-only frames is five to six.

- 17 -

7. The method of claim 6, comprising the further steps of:
detecting in said data frames speech energy which according to predetermined
criteria is voiced and speech energy which is unvoiced; and
adjusting said Linear Predictive Coding speech model filter-order to
5 substantially the 10th order in response to said detecting of said voiced speech energy.

8. The method of claim 7, comprising the further step of:
adjusting said Linear Predictive Coding speech model filter-order to
substantially the 4th to 6th order in response to said detecting of said unvoiced speech energy.

9. The method of claim 8, comprising the further step of:
10 connecting said noise-reduced speech signal to said network only in response
to said detection of either voiced speech or unvoiced speech.

10. The method of claim 9, comprising the further steps of:
attenuating said estimate of said noise power spectrum; and
passing said attenuated noise power spectrum estimate to said network when
15 neither voiced nor unvoiced speech is detected.

11. The method of claim 10, comprising the further step of:
overlapping adjacent ones of said subset of consecutive data frames prior to
performing said sequence of iterations.

12. The method of claim 11, wherein said adjacent data frames overlap by
20 substantially 50%.

13. The process of claim 12, wherein said telecommunications network comprises
a remote switch located on a first side of an international border, a central office containing a
second switch located on an opposite side of said border, and a communications path between
said remote switch and said second switch, said incoming signal having both speech and
25 noise energy being received by said second switch.

- 18 -

14. The method of claim 13, wherein said subset of consecutive data frames includes up to four past frames.

15. The method in accordance with claims 1 or 14, comprising the further steps of:
prior to activating said real-time processing method, setting a transmitted
5 incoming noise energy threshold;
determining whether noise energy above said threshold is present in said
incoming signal;
determining whether said incoming signal contains any speech signal energy;
determining whether said incoming signal constitutes a call in said network
10 involving a customer of noise-reduction service; and
if and only if all three preceding said determinations are affirmative, activating
said real-time processing method.

16. The method in accordance with claim 15, comprising the further steps of:
detecting a transition in said incoming signal from any one of the possible
15 conditions of noise-only, voiced speech and unvoiced speech to another of said states; and
before commencing said iterations on said current frame, reinitializing said
Line Spectral Pair roots of said past four frames.

17. The method of claim 16, wherein said selected number of iterations number from four to seven.

20 18. The method of claim 17, further comprising constraining each said Line Spectral Pair difference root to be more than a minimum predetermined distance away from its closest said Line Spectral Pair smoothed position root.

25 19. In a telecommunications network carrying an incoming signal, said incoming signal having both speech and noise energy, a method for real-time processing of said incoming signal using an iterated filter operated as a Linear Predictive Coding speech model comprising filter-order adjustments and means for equivalently representing pole positions of

- 19 -

said Linear Predictive Coding speech model with Line Spectral Pair position roots and difference roots, in which said iterated filter creates an estimate of the speech power spectrum component of said incoming signal for each current frame for transmission to said telecommunications network, said method comprising the steps of:

- 5 converting said incoming signal to a time-series of spectral domain data frames;
- selecting from said time-series of data frames a subset of consecutive data frames including a group of past data frames, the current data frame and up to two future data frames;
- 10 performing a selected number of iterations upon said current data frame across said subset of data frames, each said iteration generating values of said Line Spectral Pair position roots and difference roots;
- during said iteration sequence, for each iteration smoothing said Line Spectral Pair root positions generated for said past data frames, with the Line Spectral Pair root
- 15 position of said current frame, using values of Line Spectral Pair root positions calculated for the current iteration of said sequence;
- creating estimates of said incoming speech power spectrum from the output of a succession of said iteration sequences of said current frames;
- forming a noise-reduced speech signal based on said incoming speech power
- 20 spectrum estimates; and
- transmitting said noise-reduced speech signal to said telecommunications network.

20. The process of claim 19, wherein said iterations comprise the steps of:
- creating a succession of Wiener Filters in which the signal spectrum entering
- 25 the initial said Wiener Filter includes a noise power spectrum estimate; and
- at each present iteration stage, determining the best current estimates of speech power spectrum and noise power spectrum, and summing the two said estimates to form a current said Wiener Filter.

FIG. 1

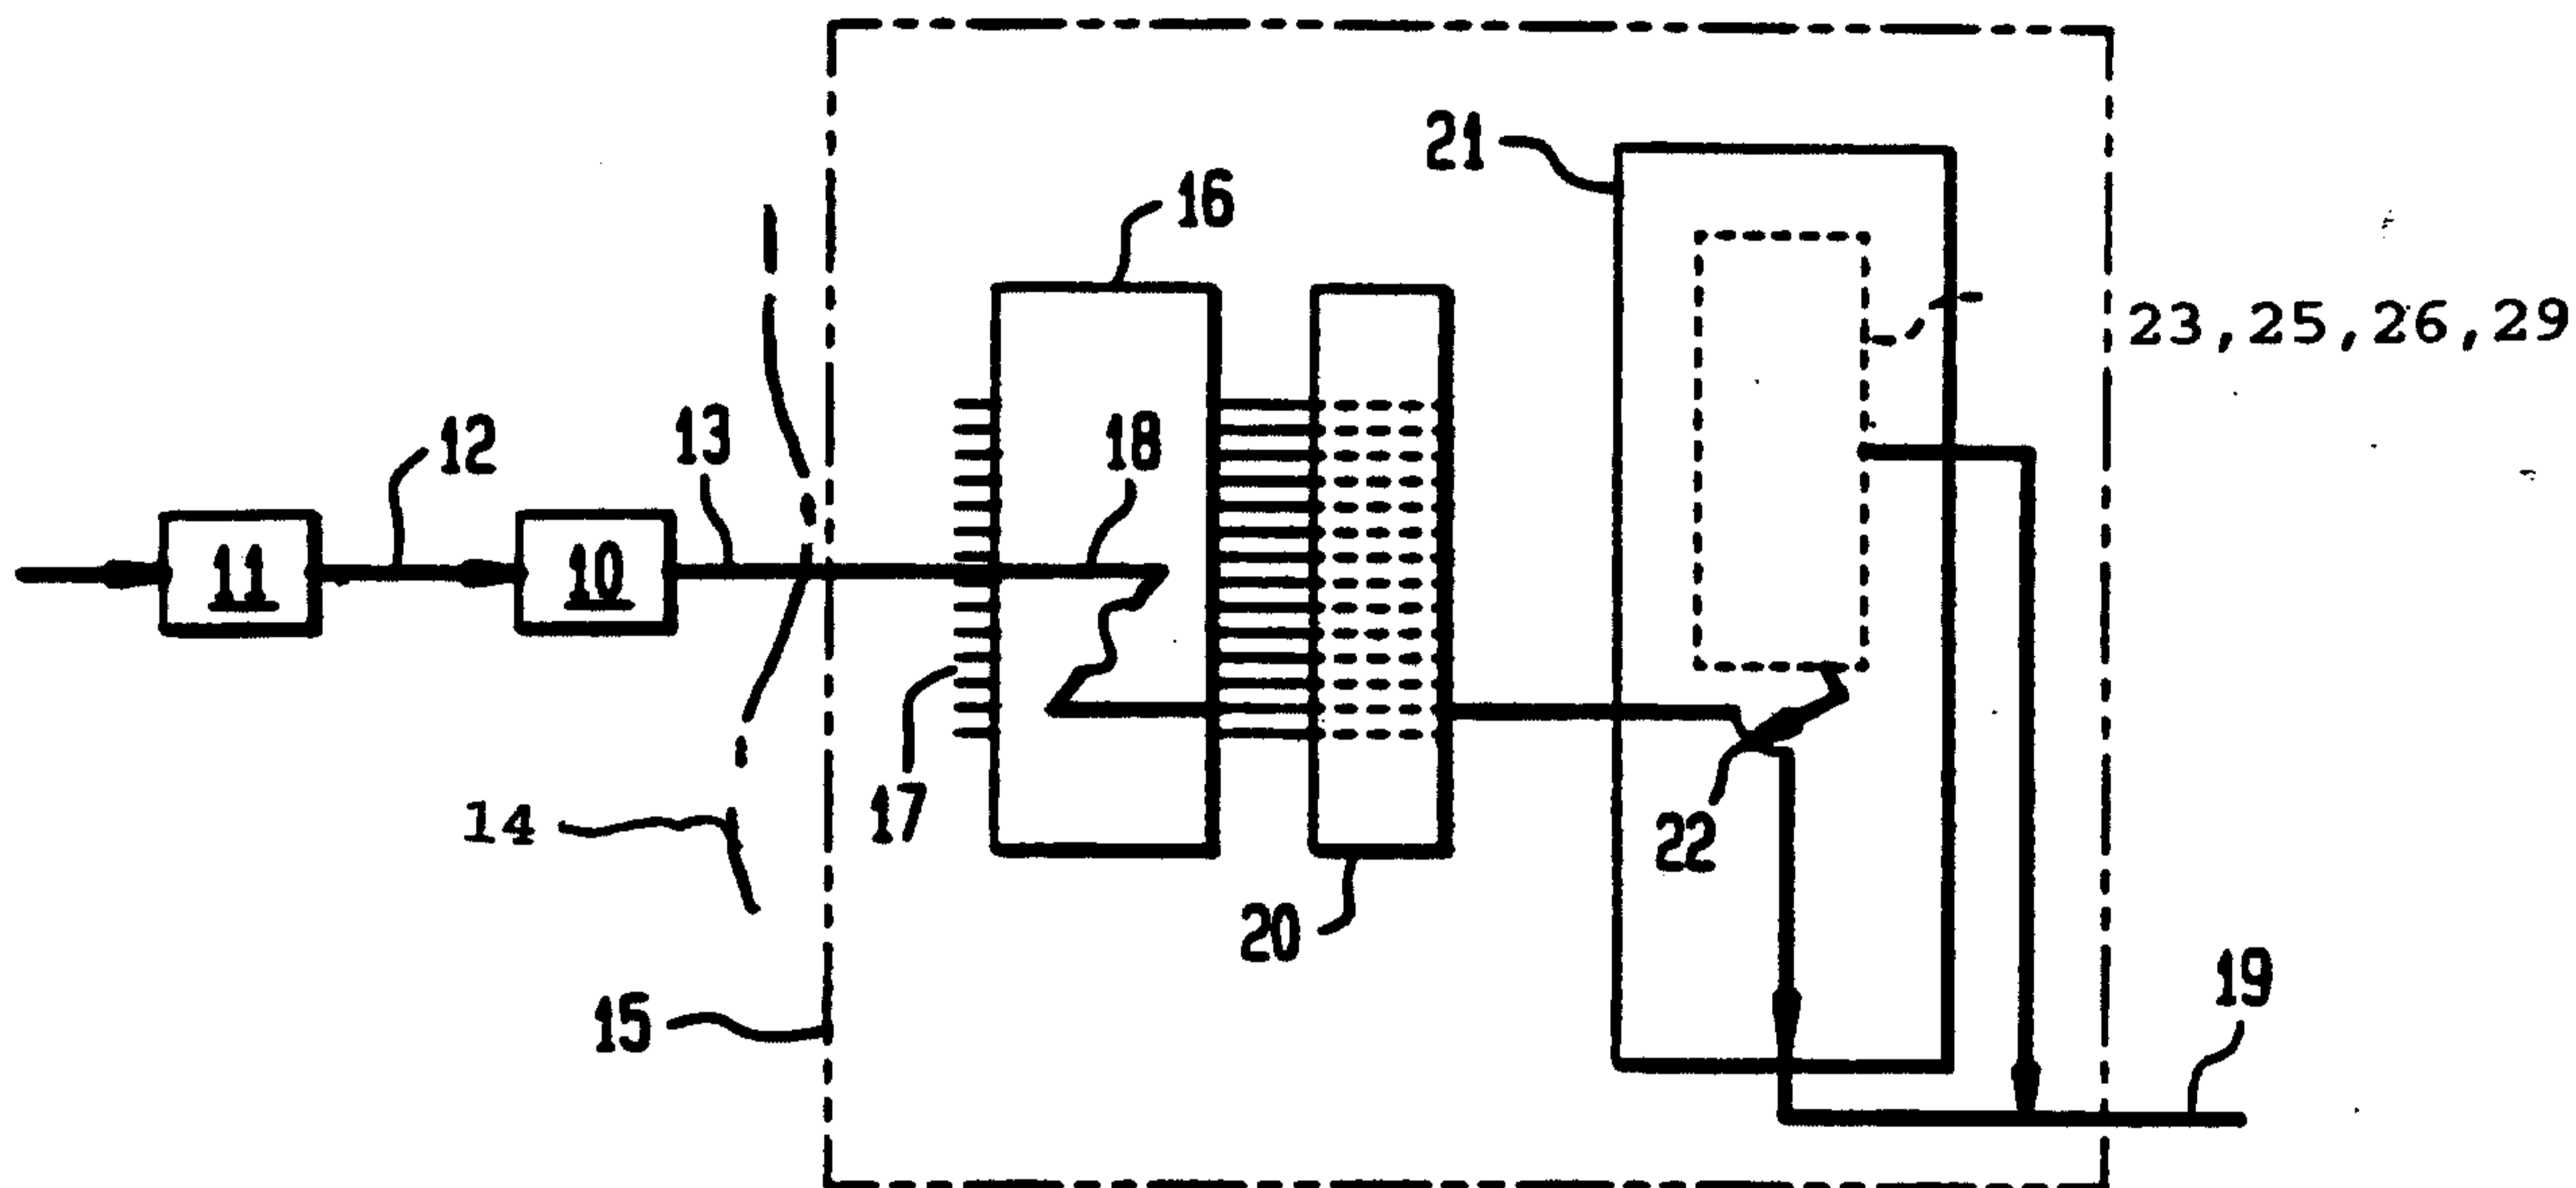


FIG. 1a


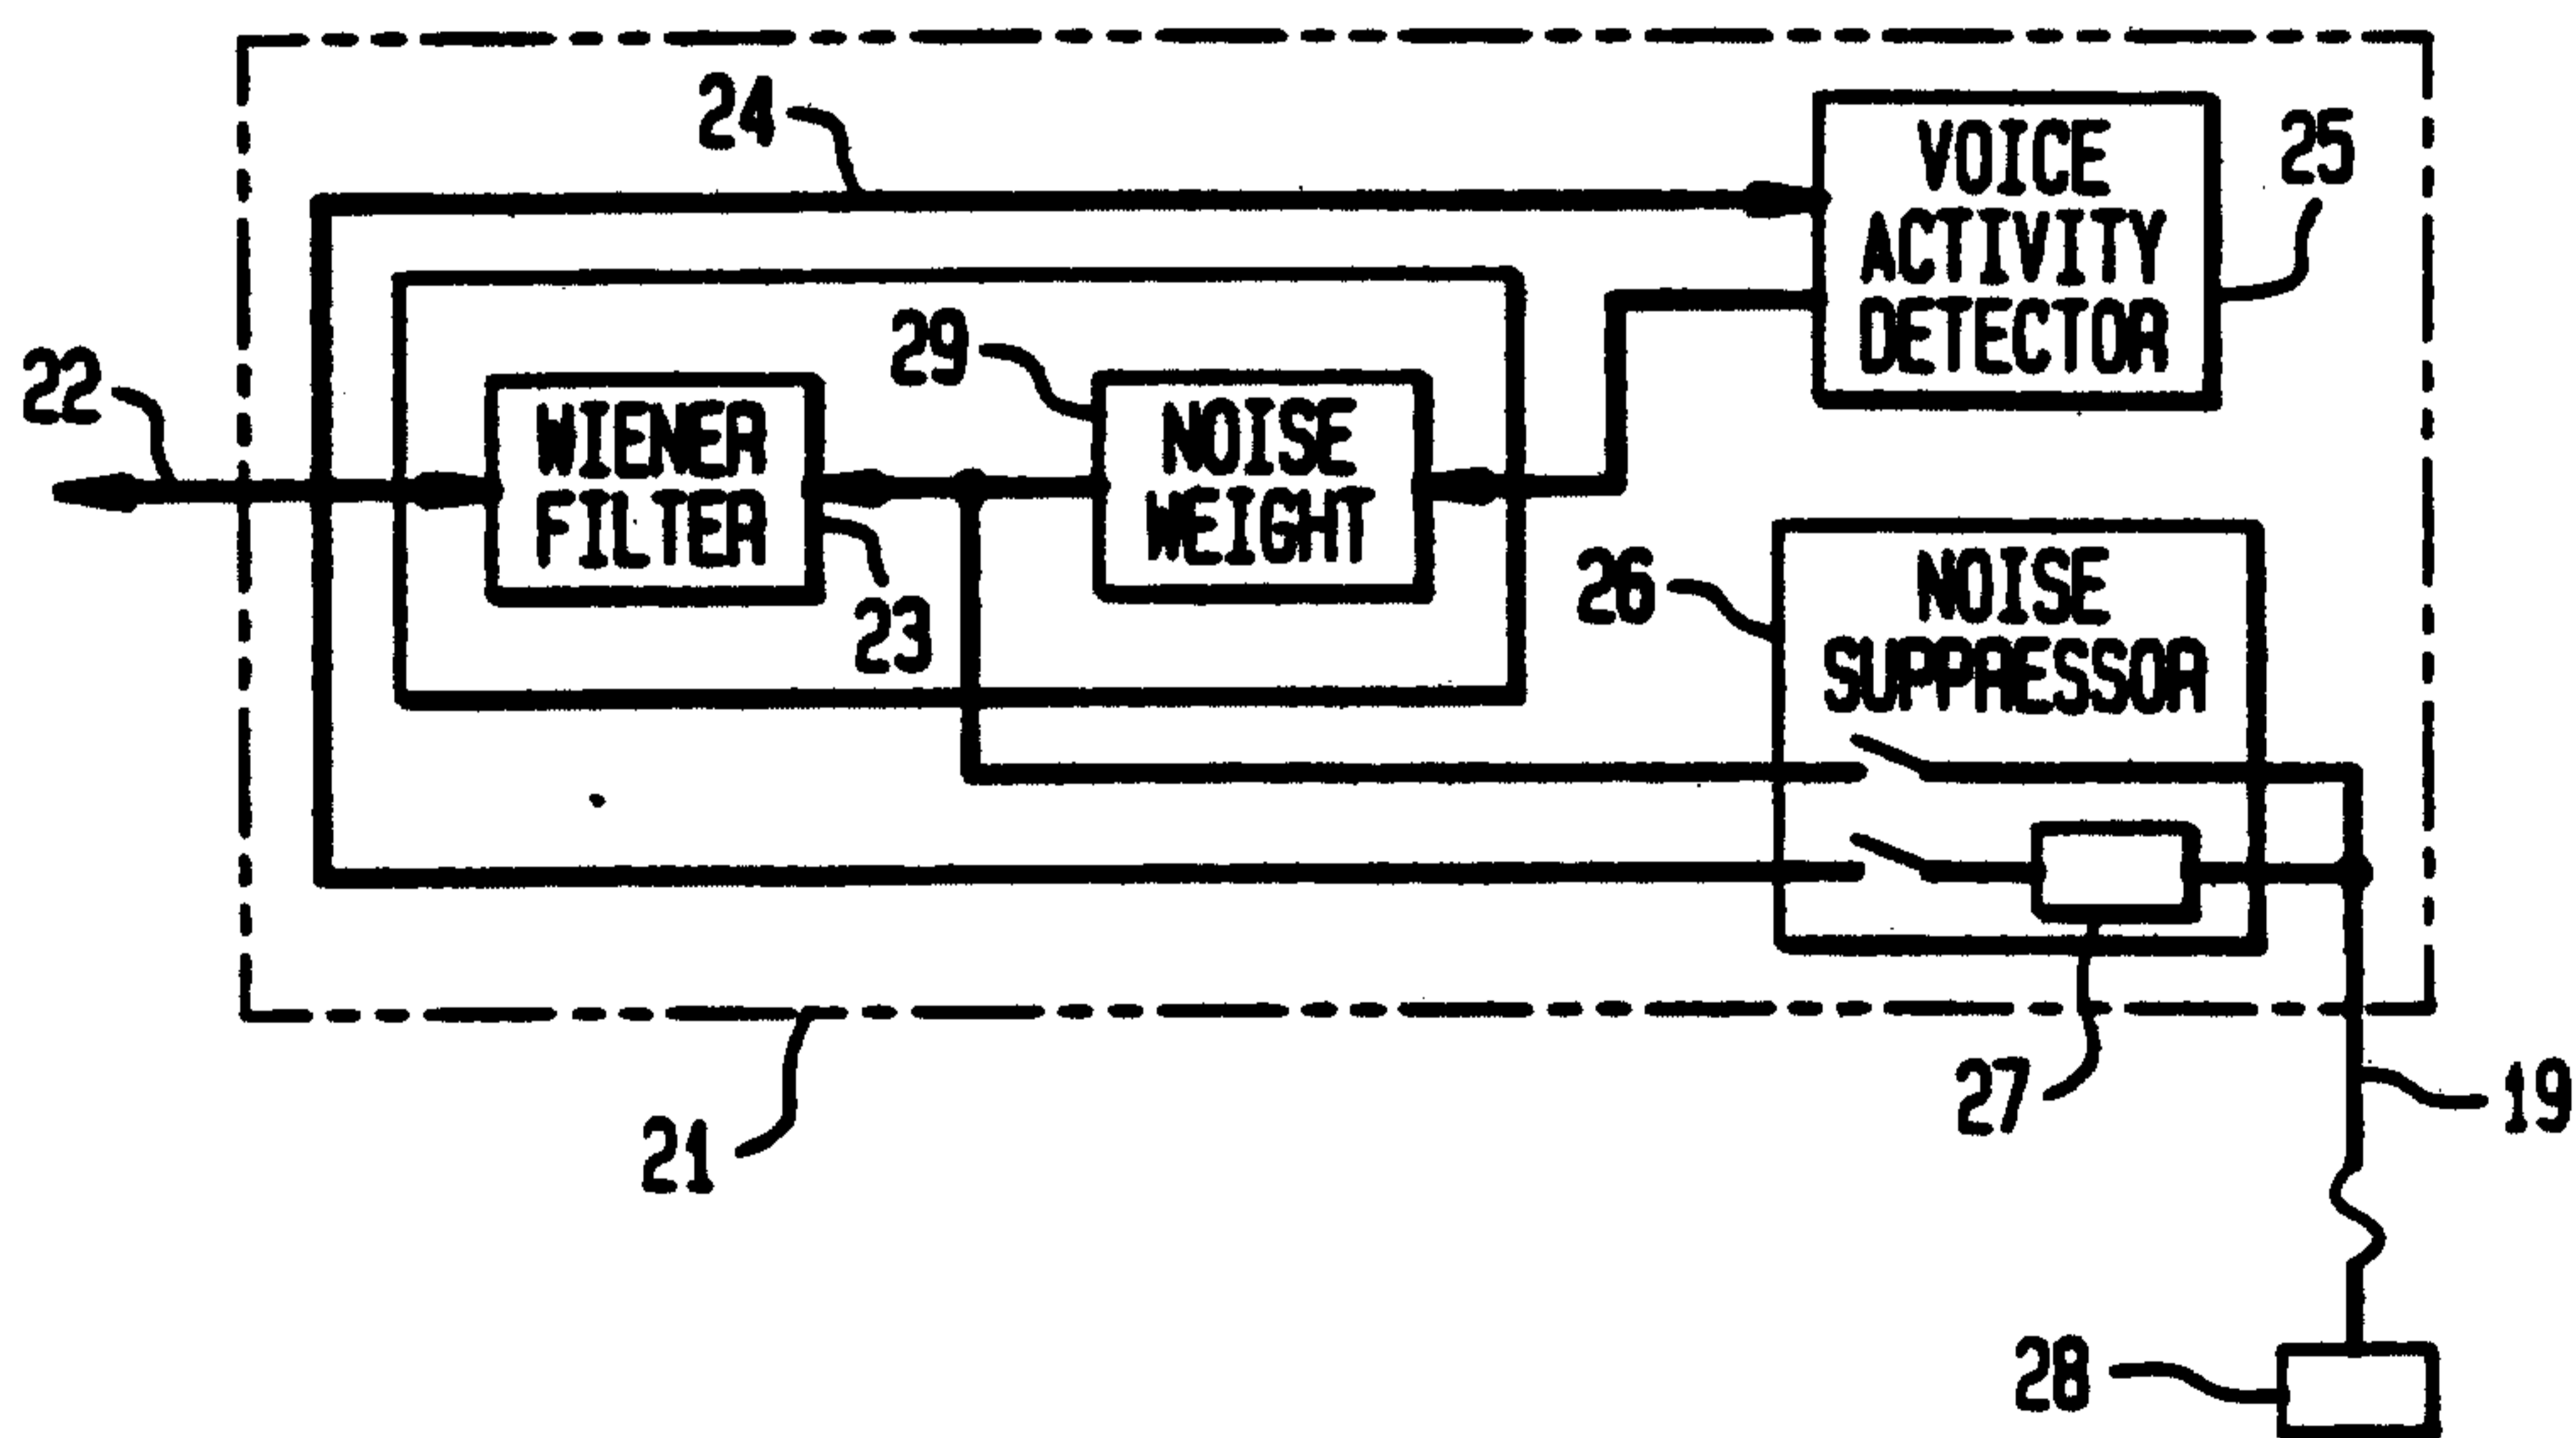


FIG. 2



SMOOTHING OF LSP ROOTS OVER SEVEN FRAMES, PAST & FUTURE

FRAME WEIGHTS; SUM=1

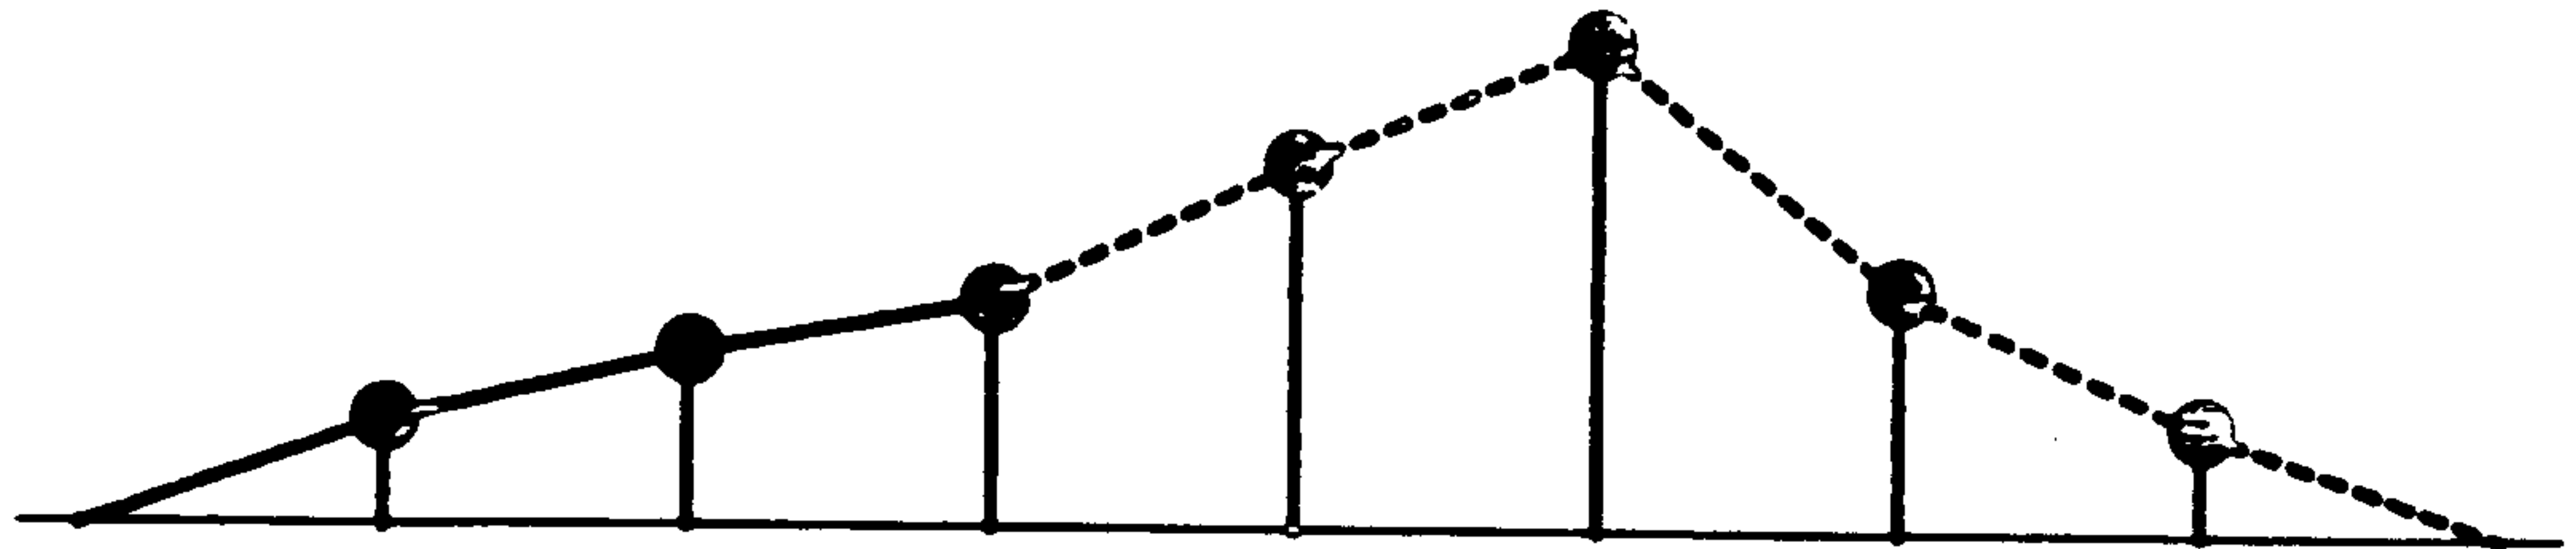

INPUT FRAMES $y[n]$

FRAMES HAVE 50% OVERLAPS

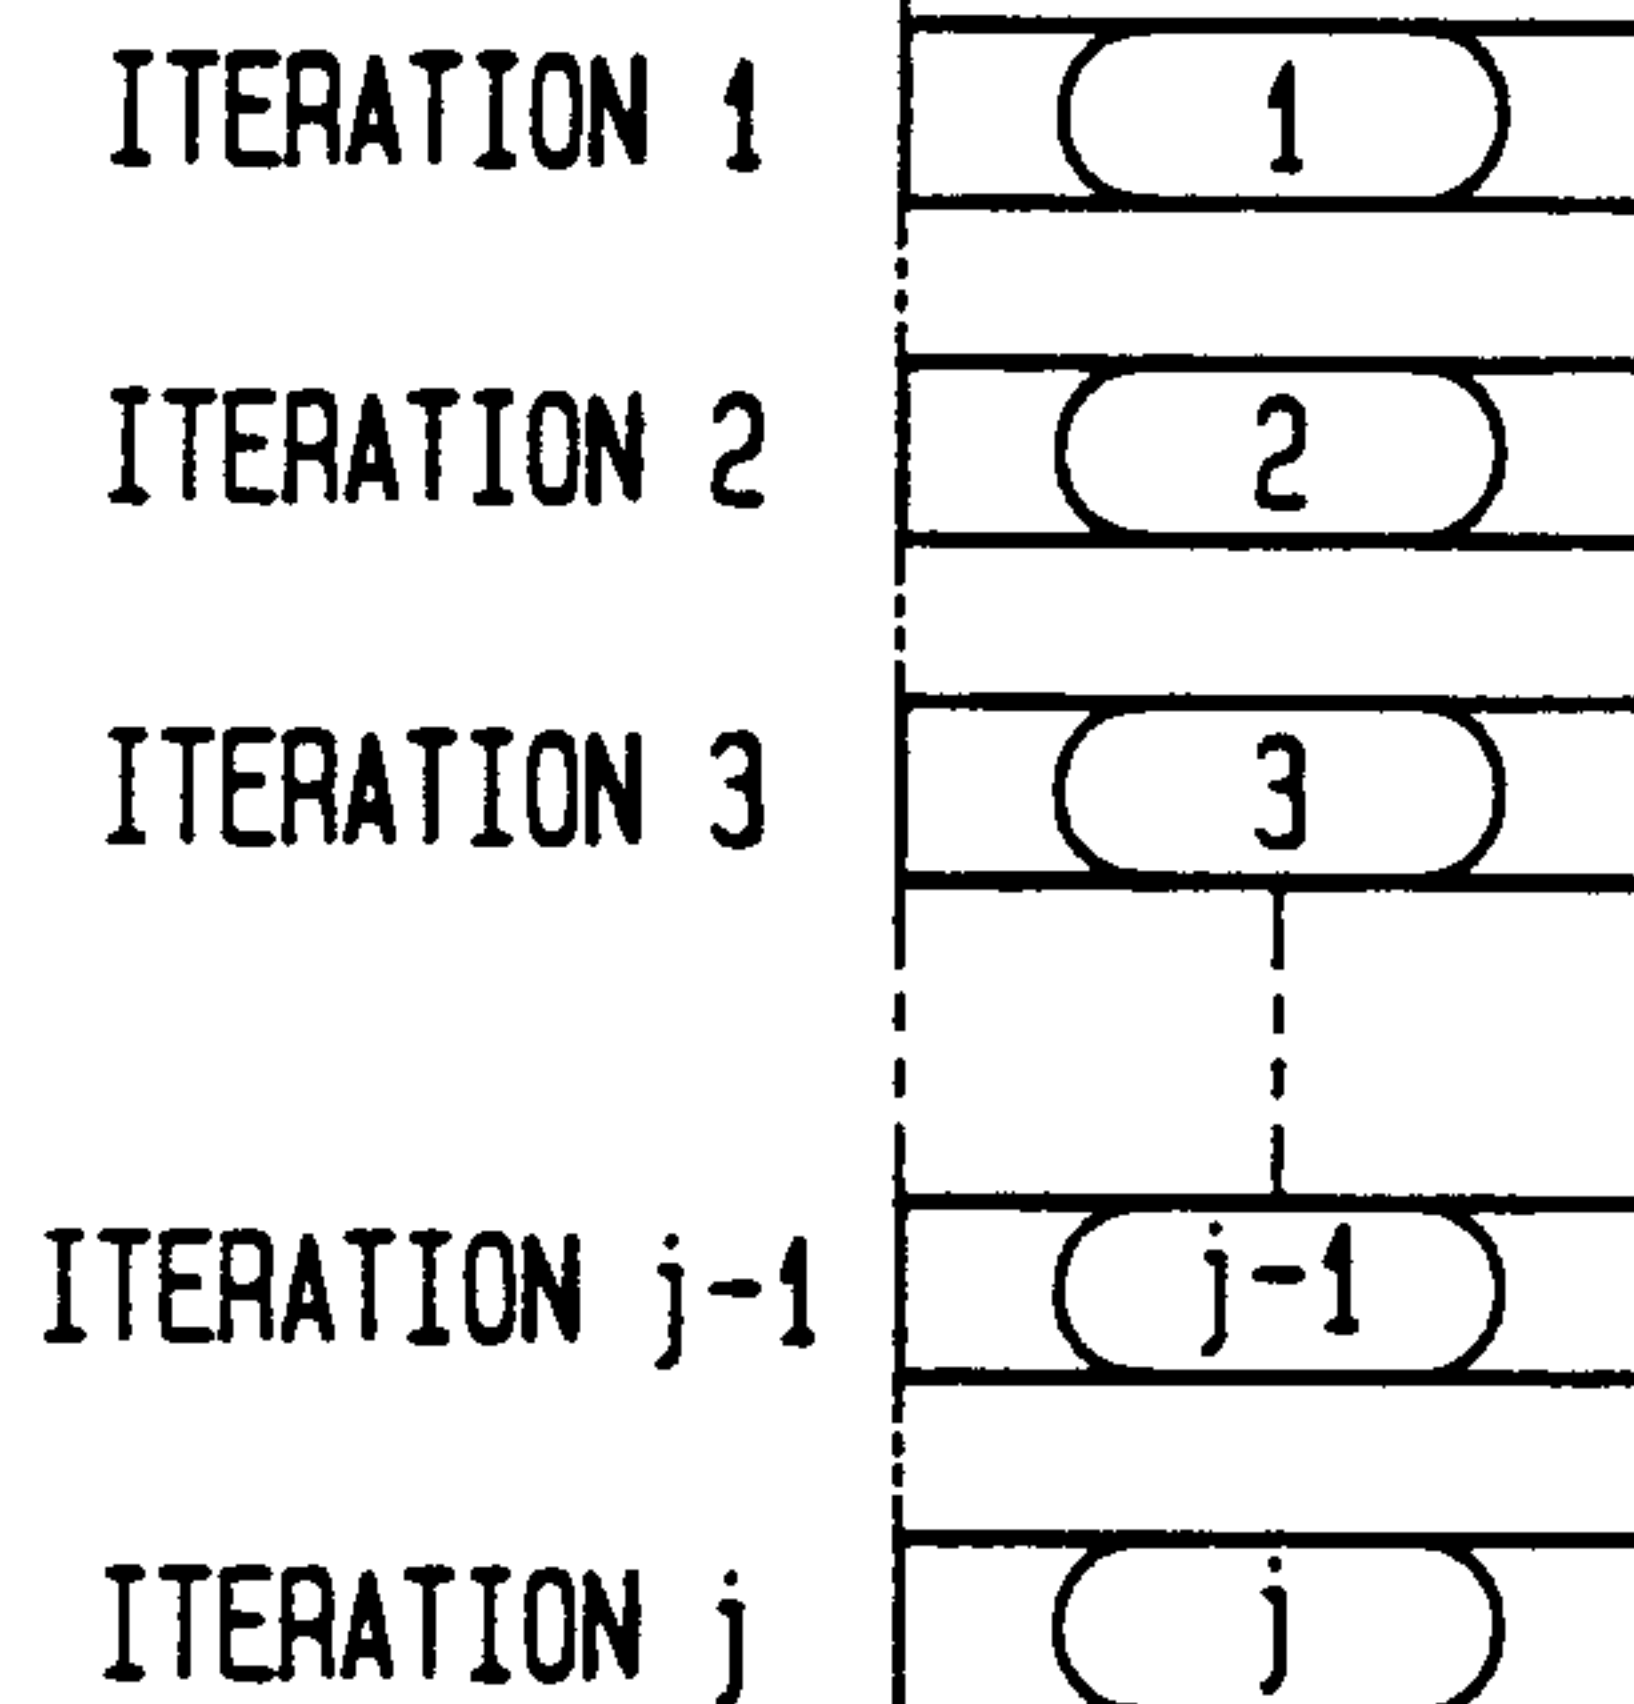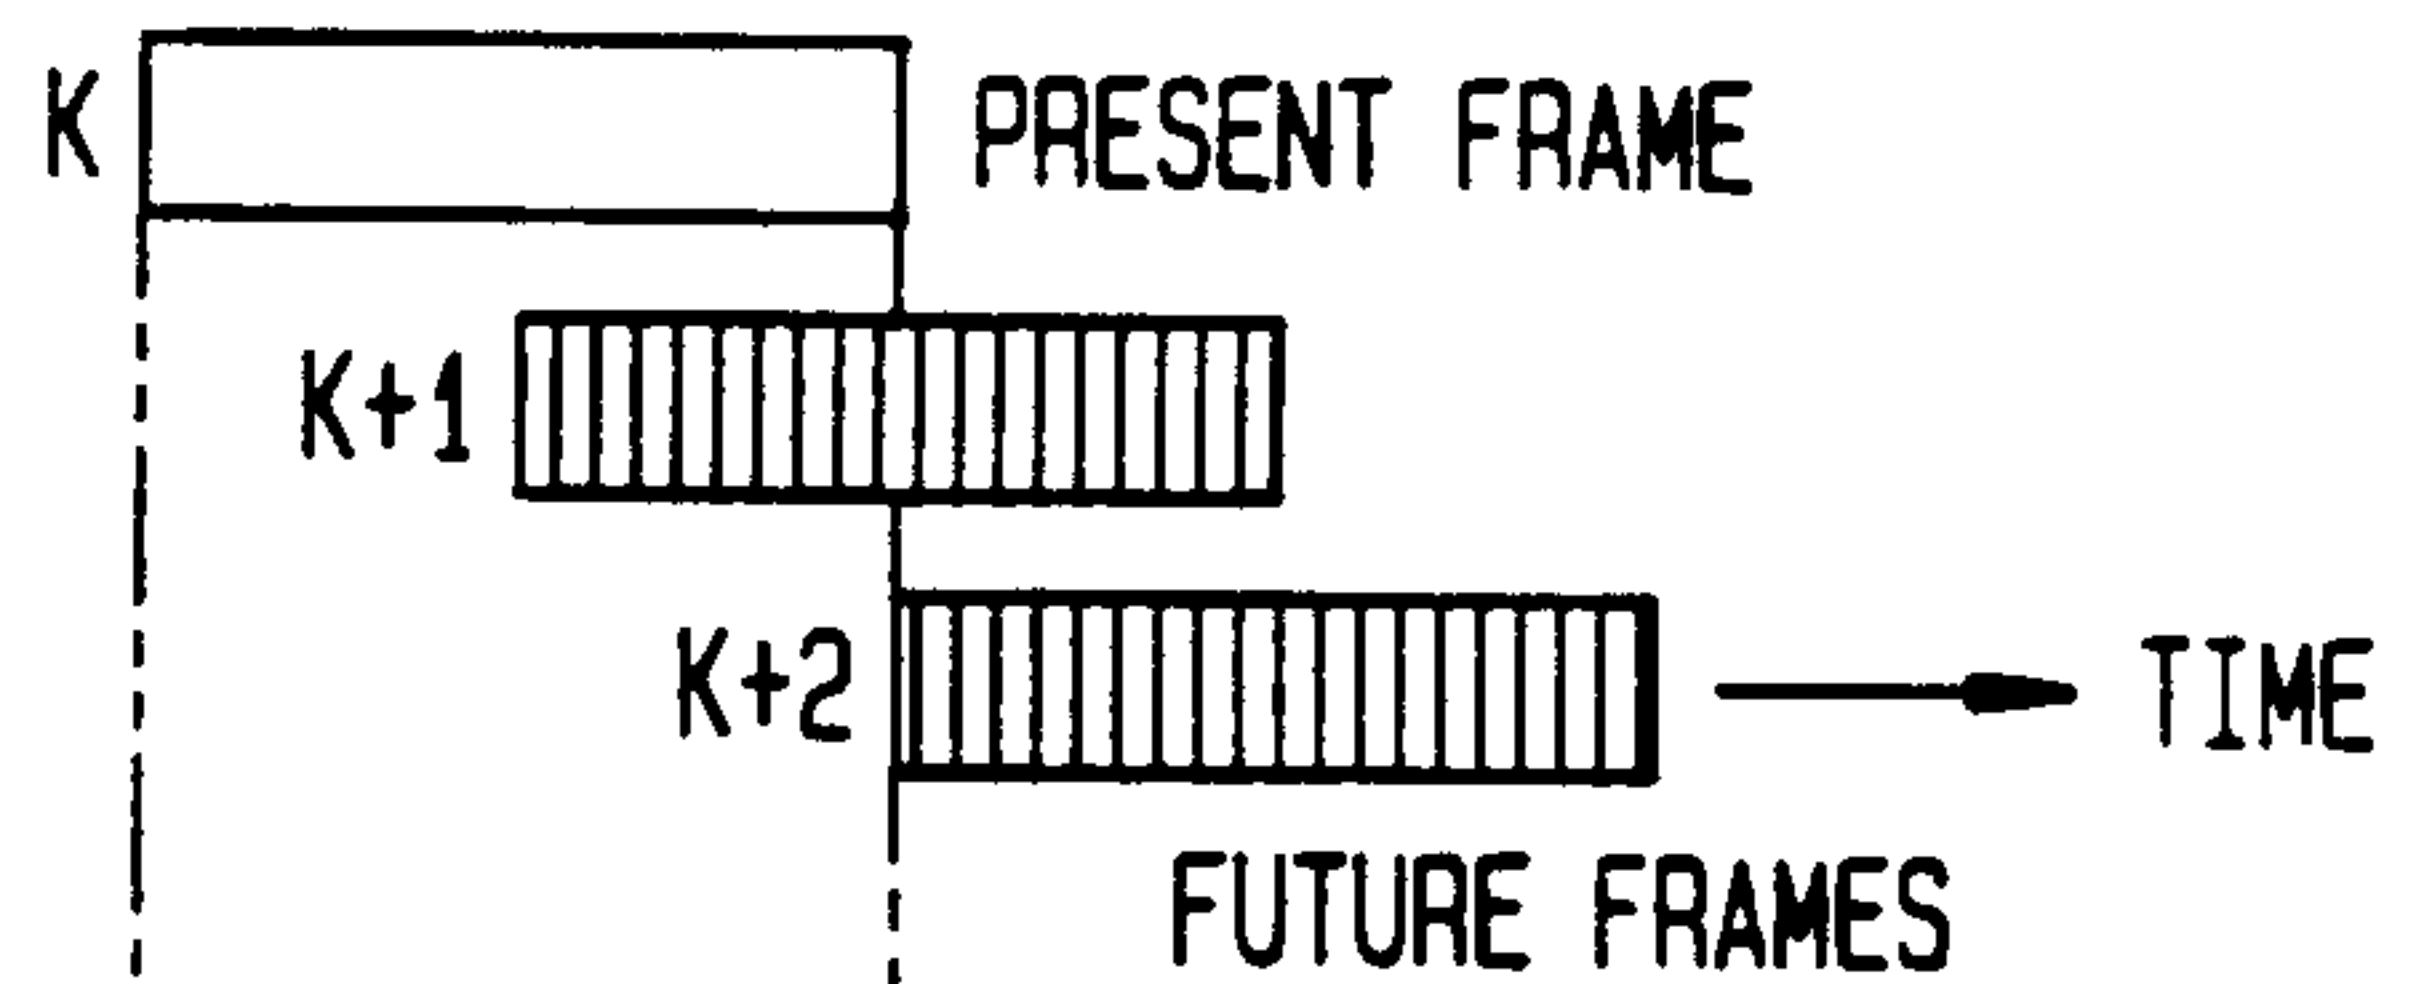

FILTER-LSP
ITERATION
SEQUENCE FOR
FRAME K

FIG. 3


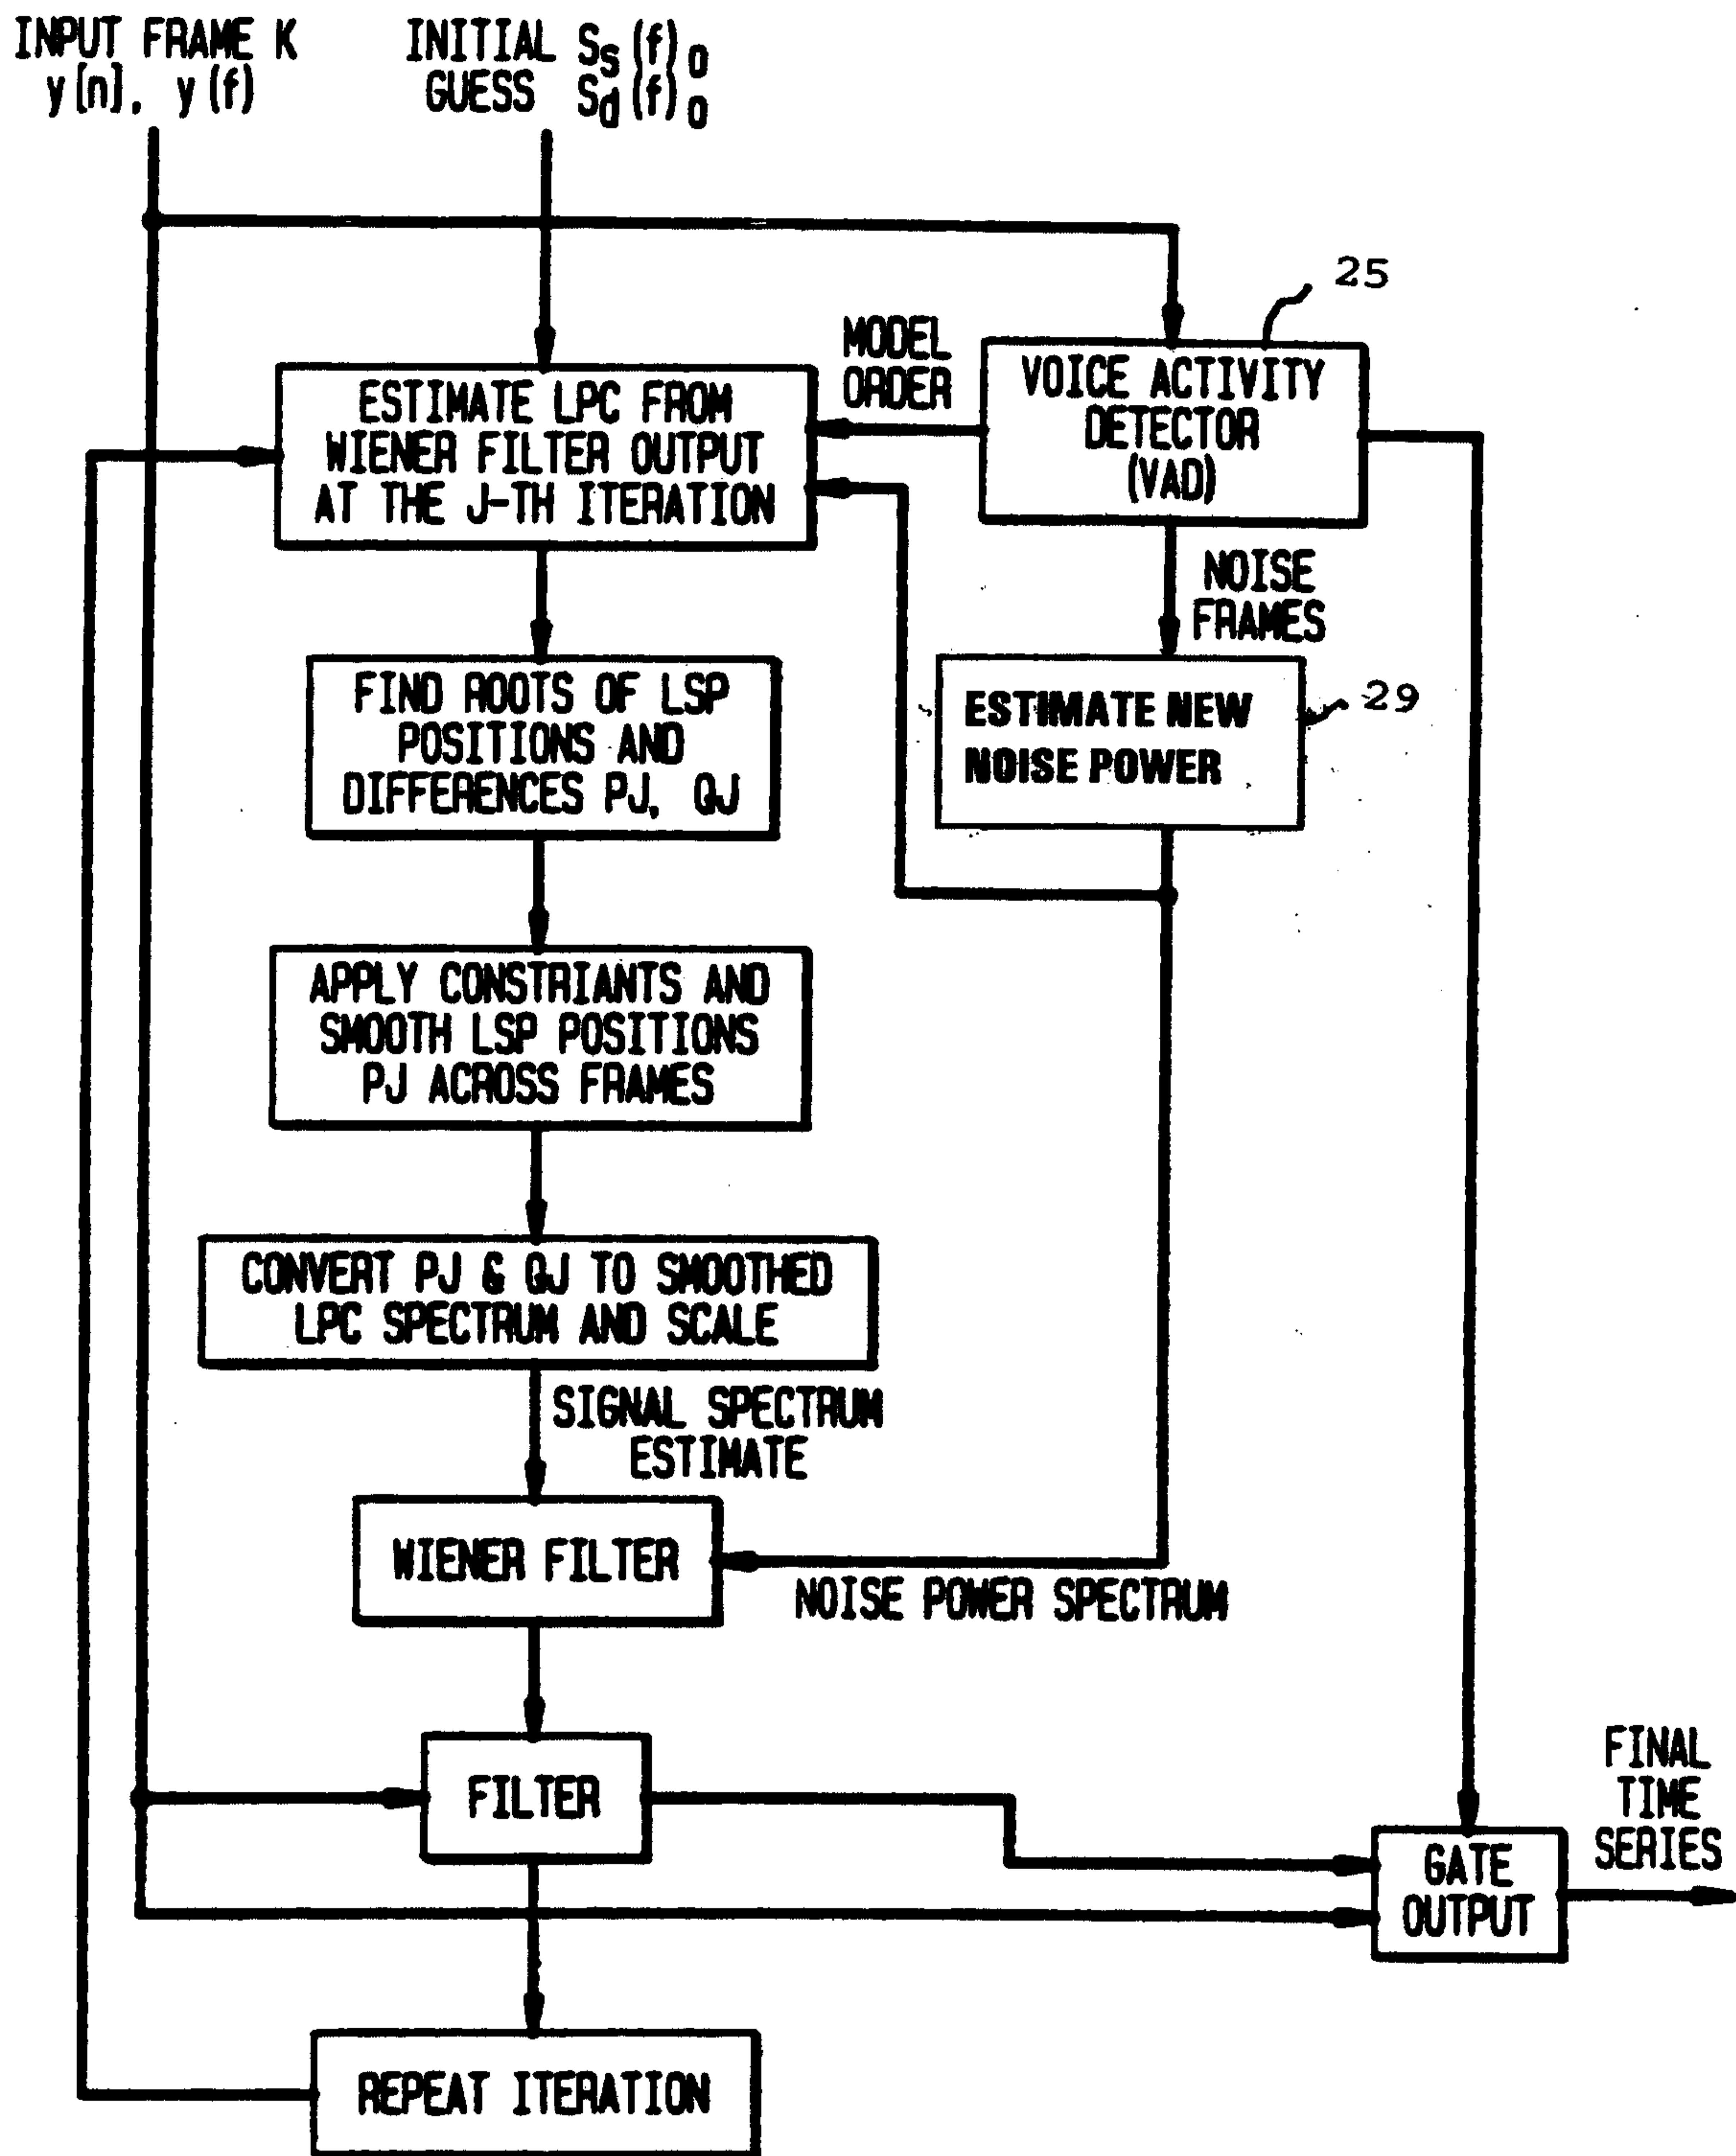


FIG. 4

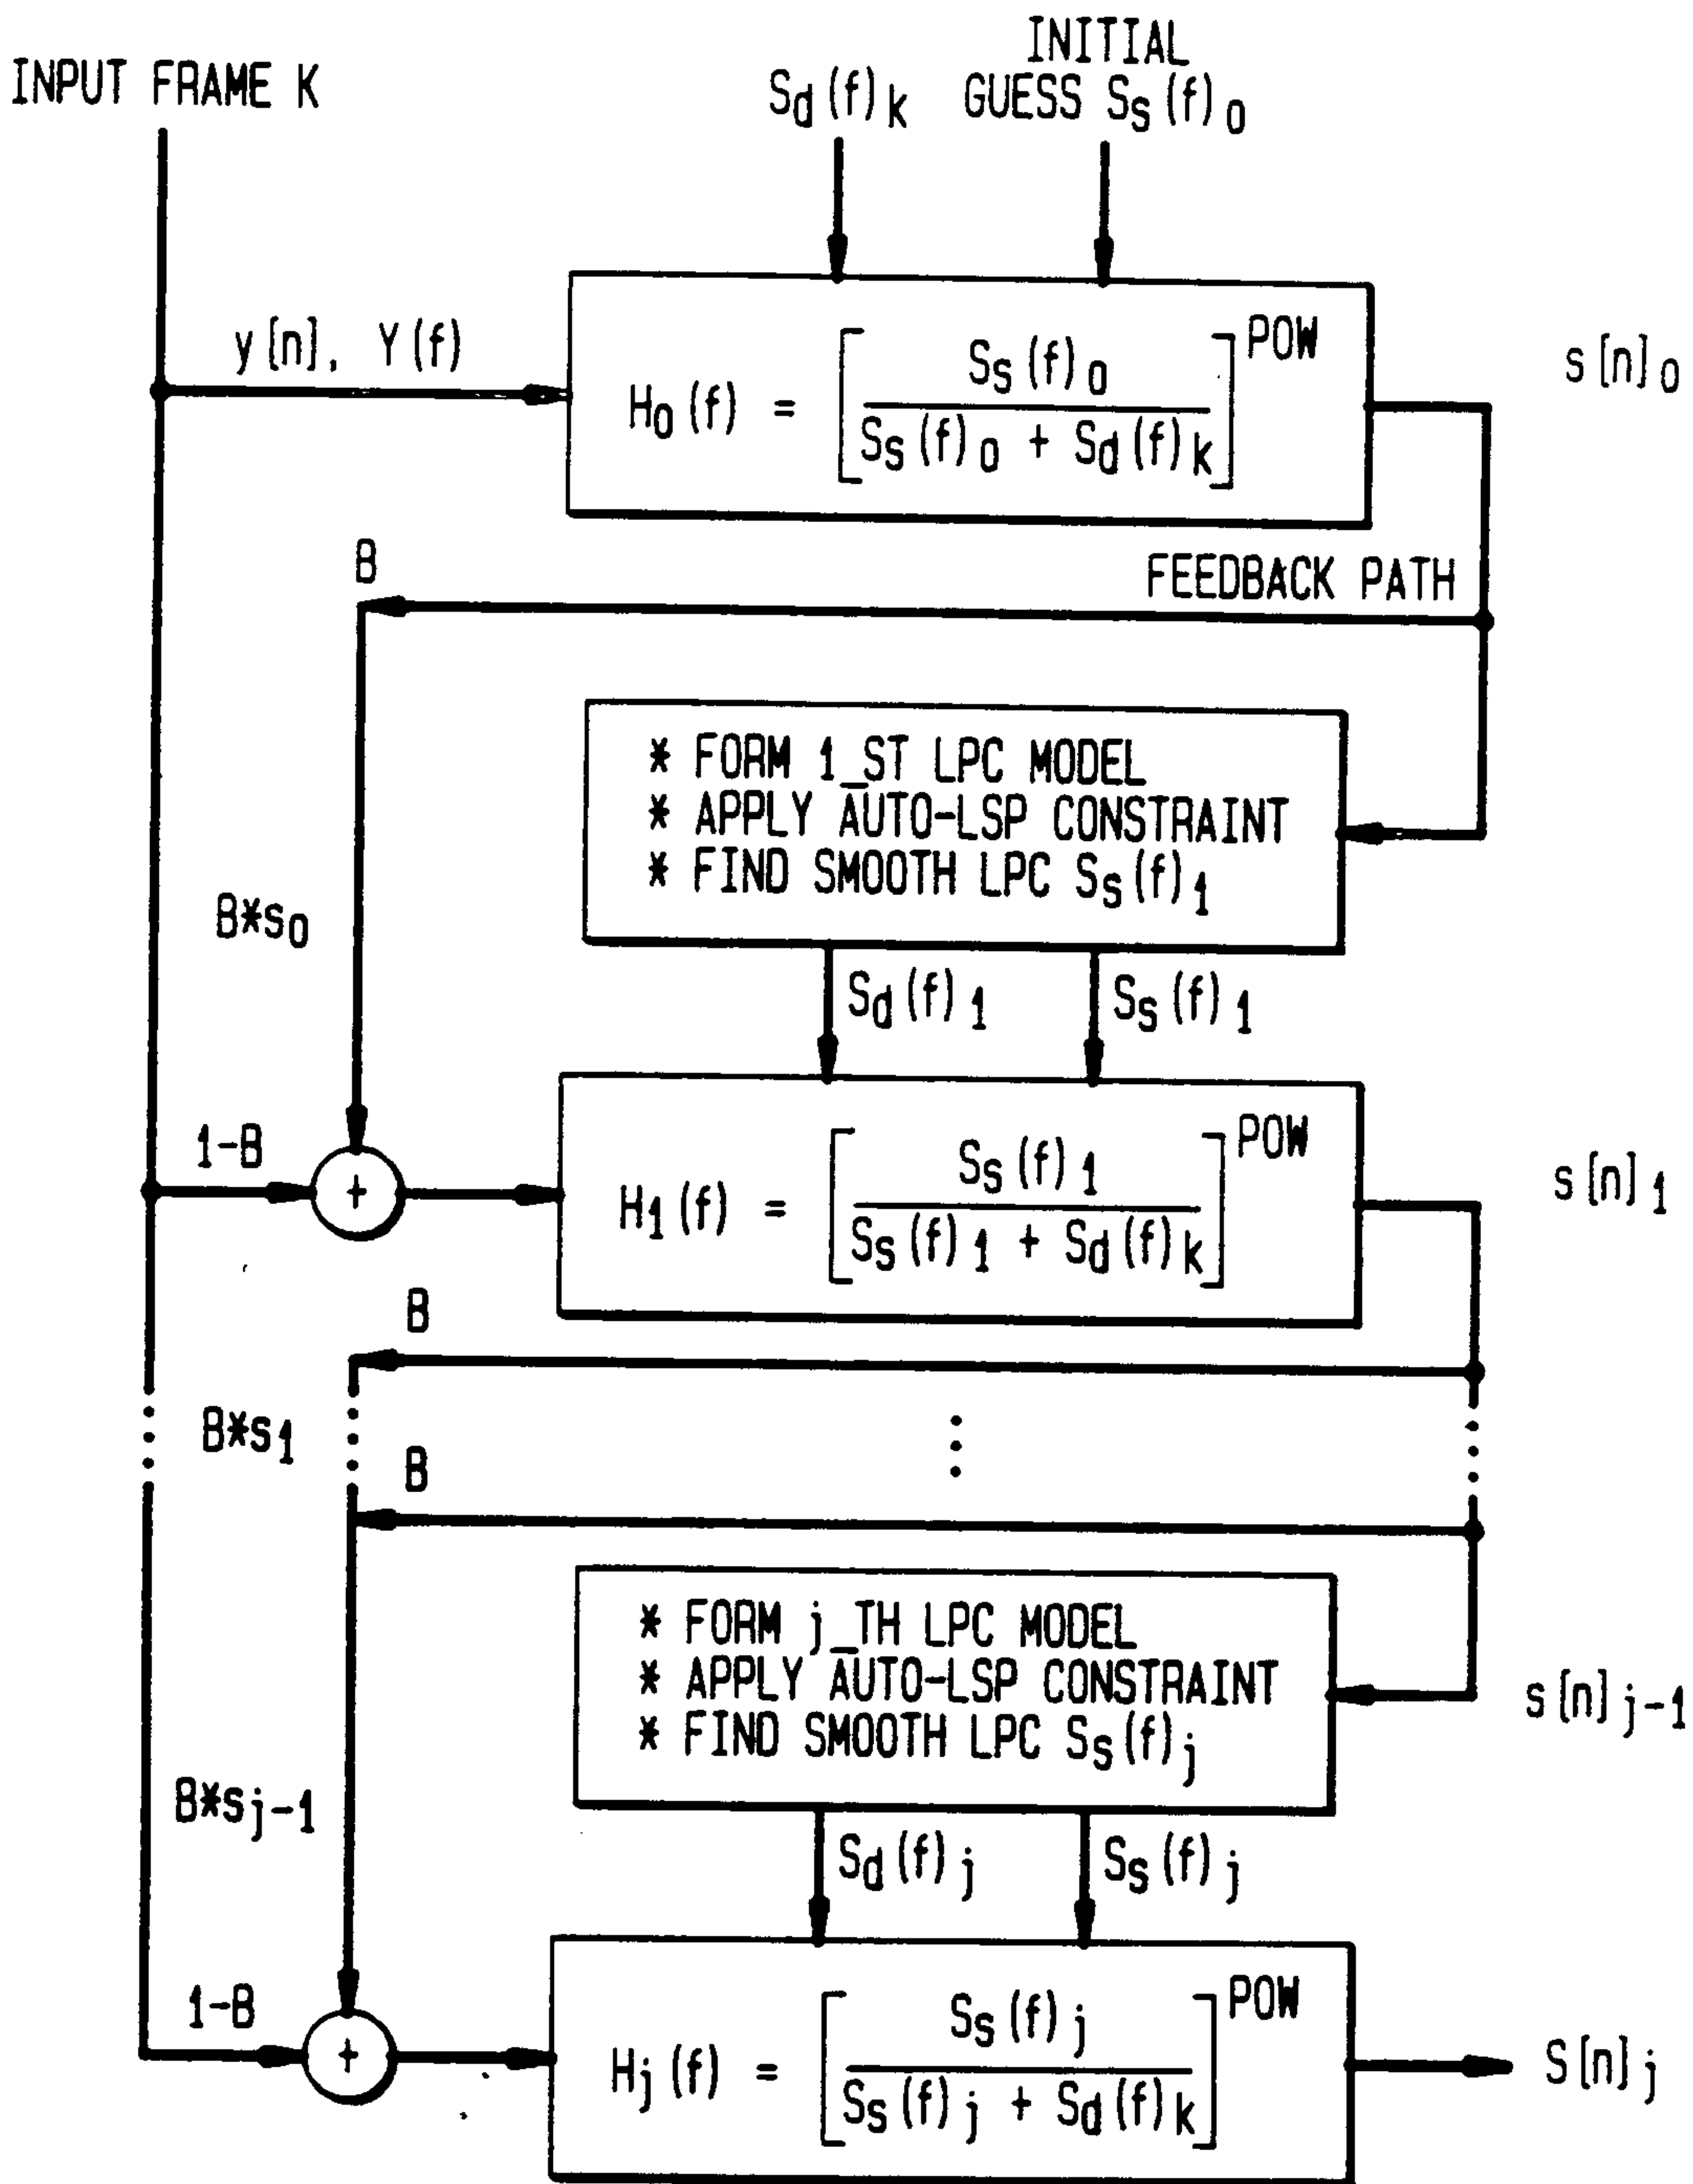

A

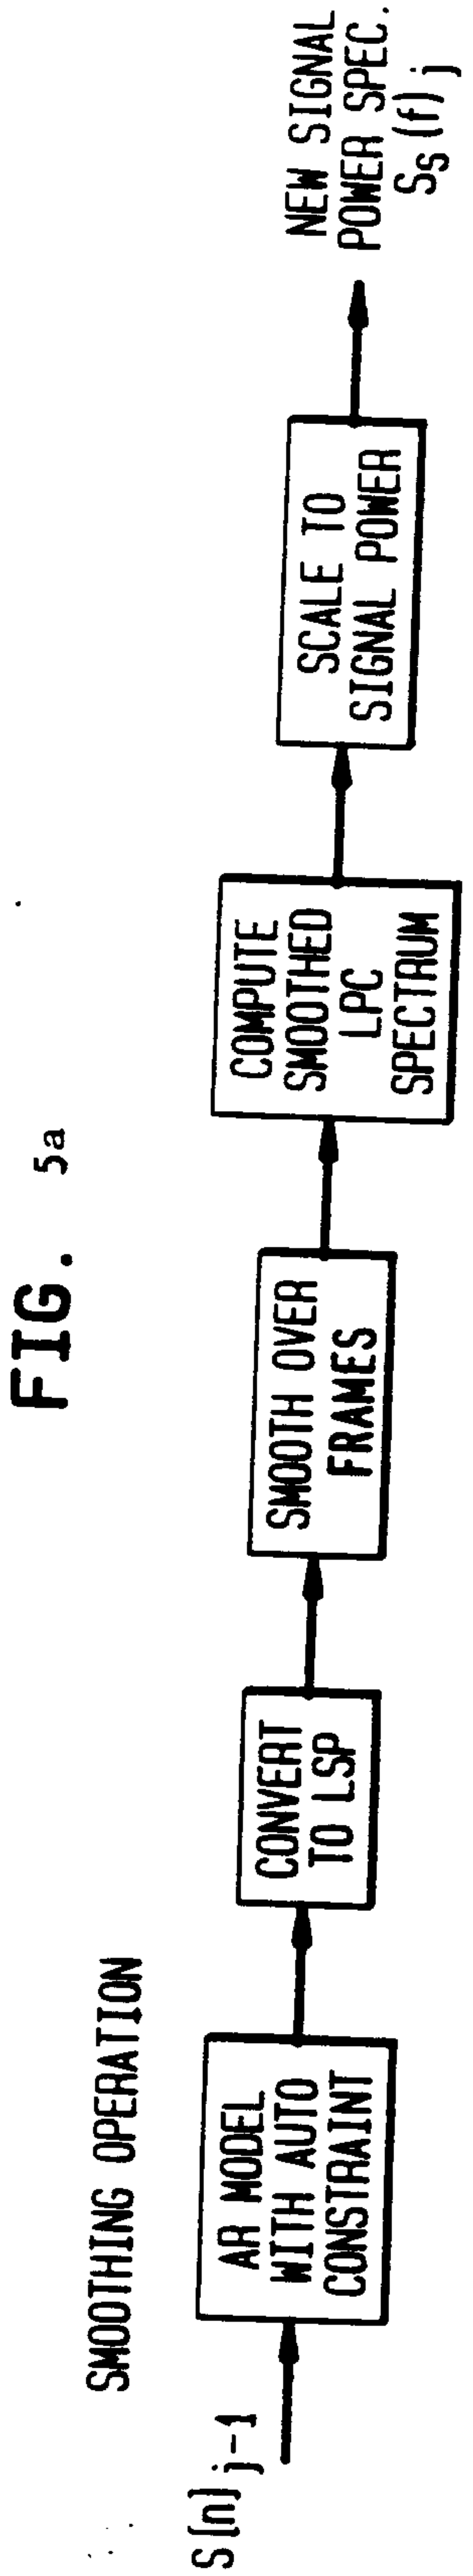



FIG. 5b
RELAXATION OF LPC AUTOCORRELATION IN ITERATIONS

$$\begin{aligned}
 a_j &= \bar{R}_j^{-1} * b_j \\
 R_j &= cR_j + (1-c) R_{j-1} \\
 b_j &= cb_j + (1-c) b_{j-1}
 \end{aligned}$$

$c \sim 0.7$

2153170

FIG. 5c
SMOOTHING OF THE LSP ROOTS ON THE UNIT CIRCLE

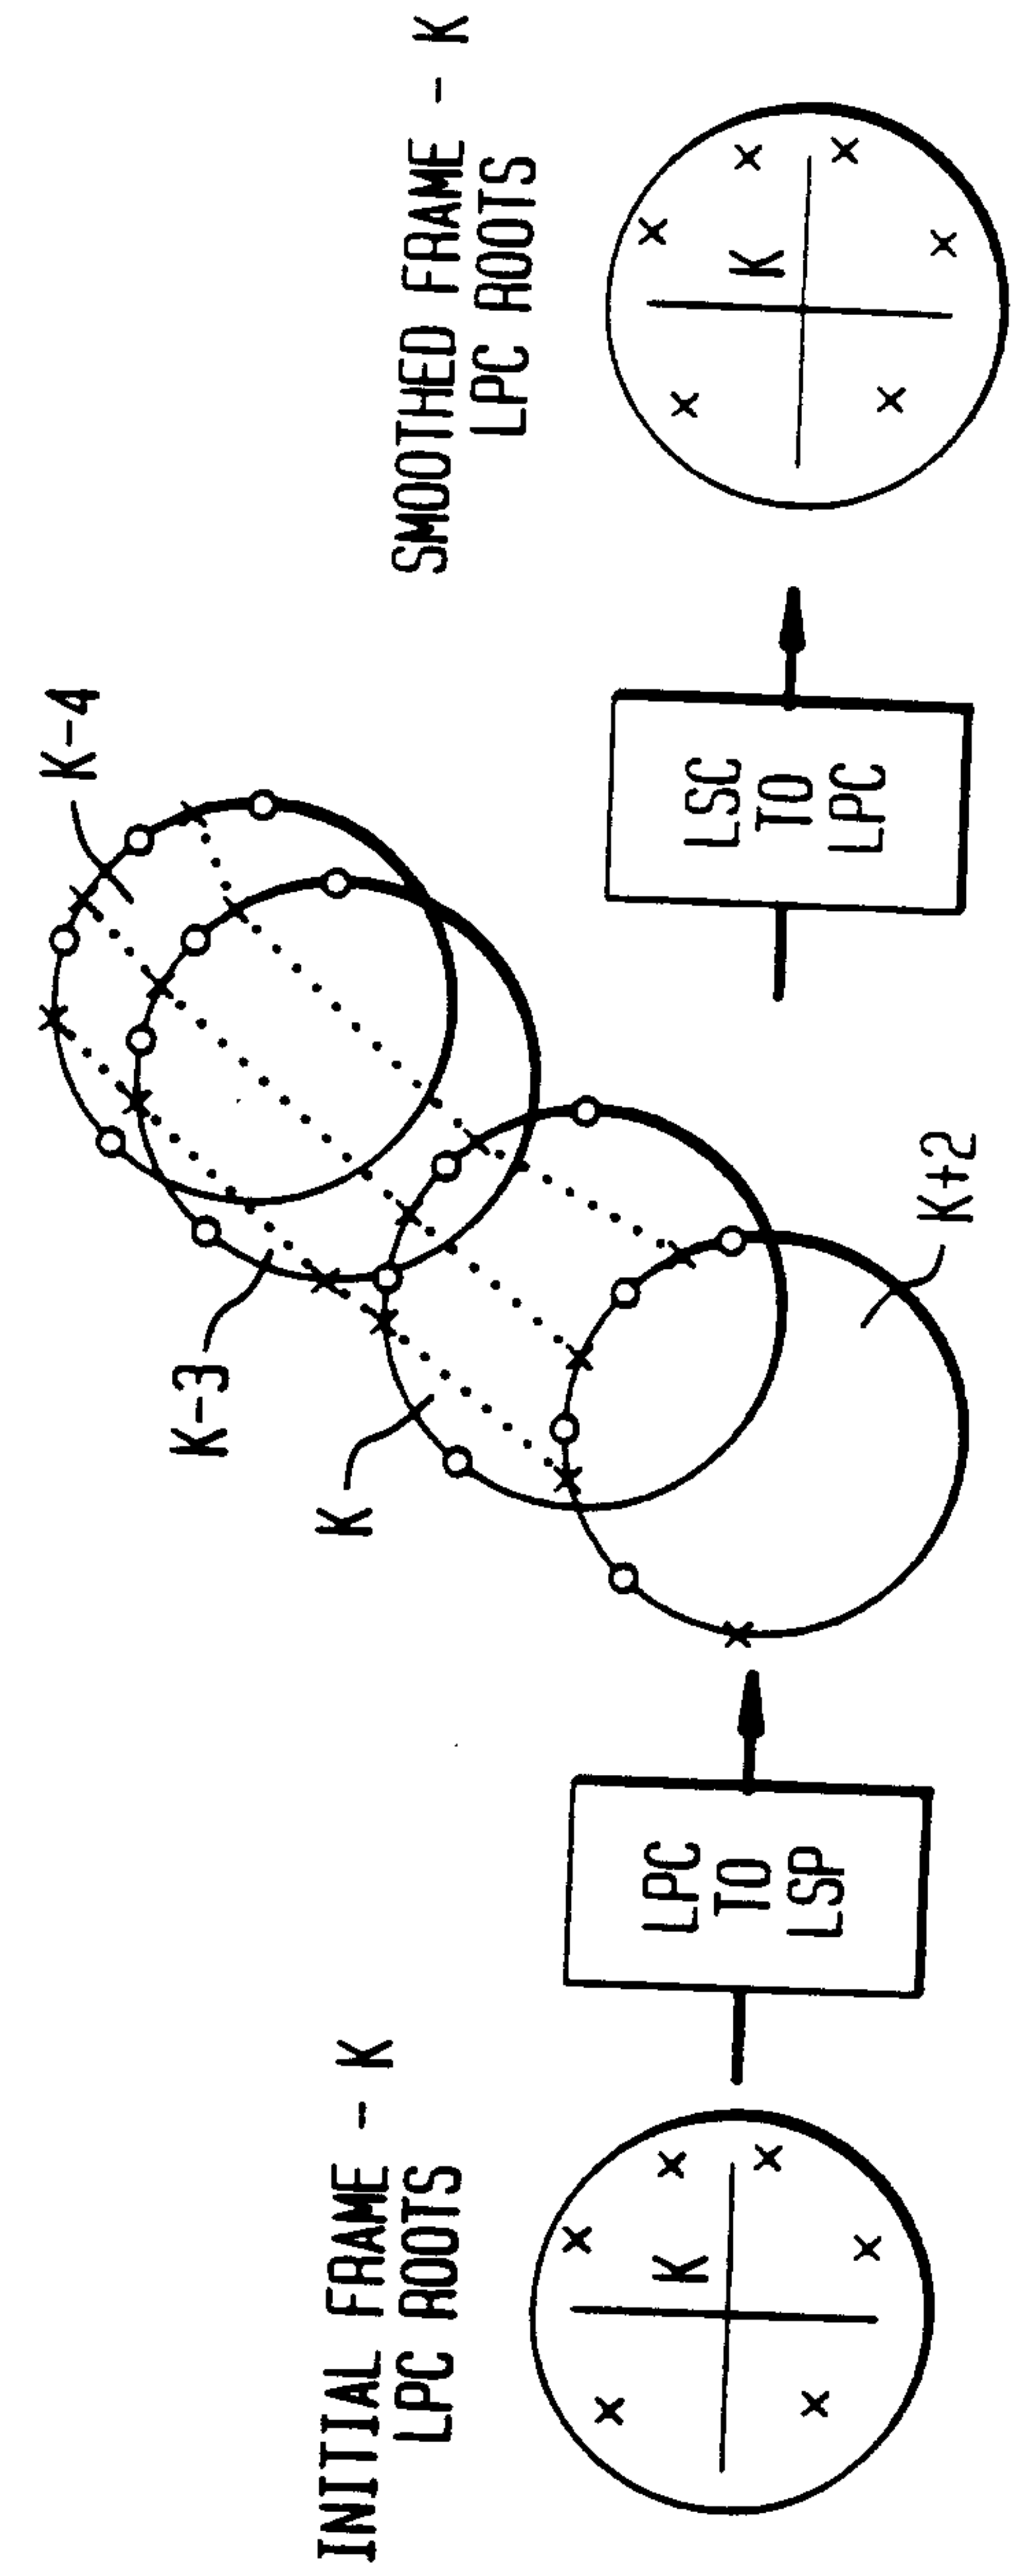

6/10

FIG. 6a


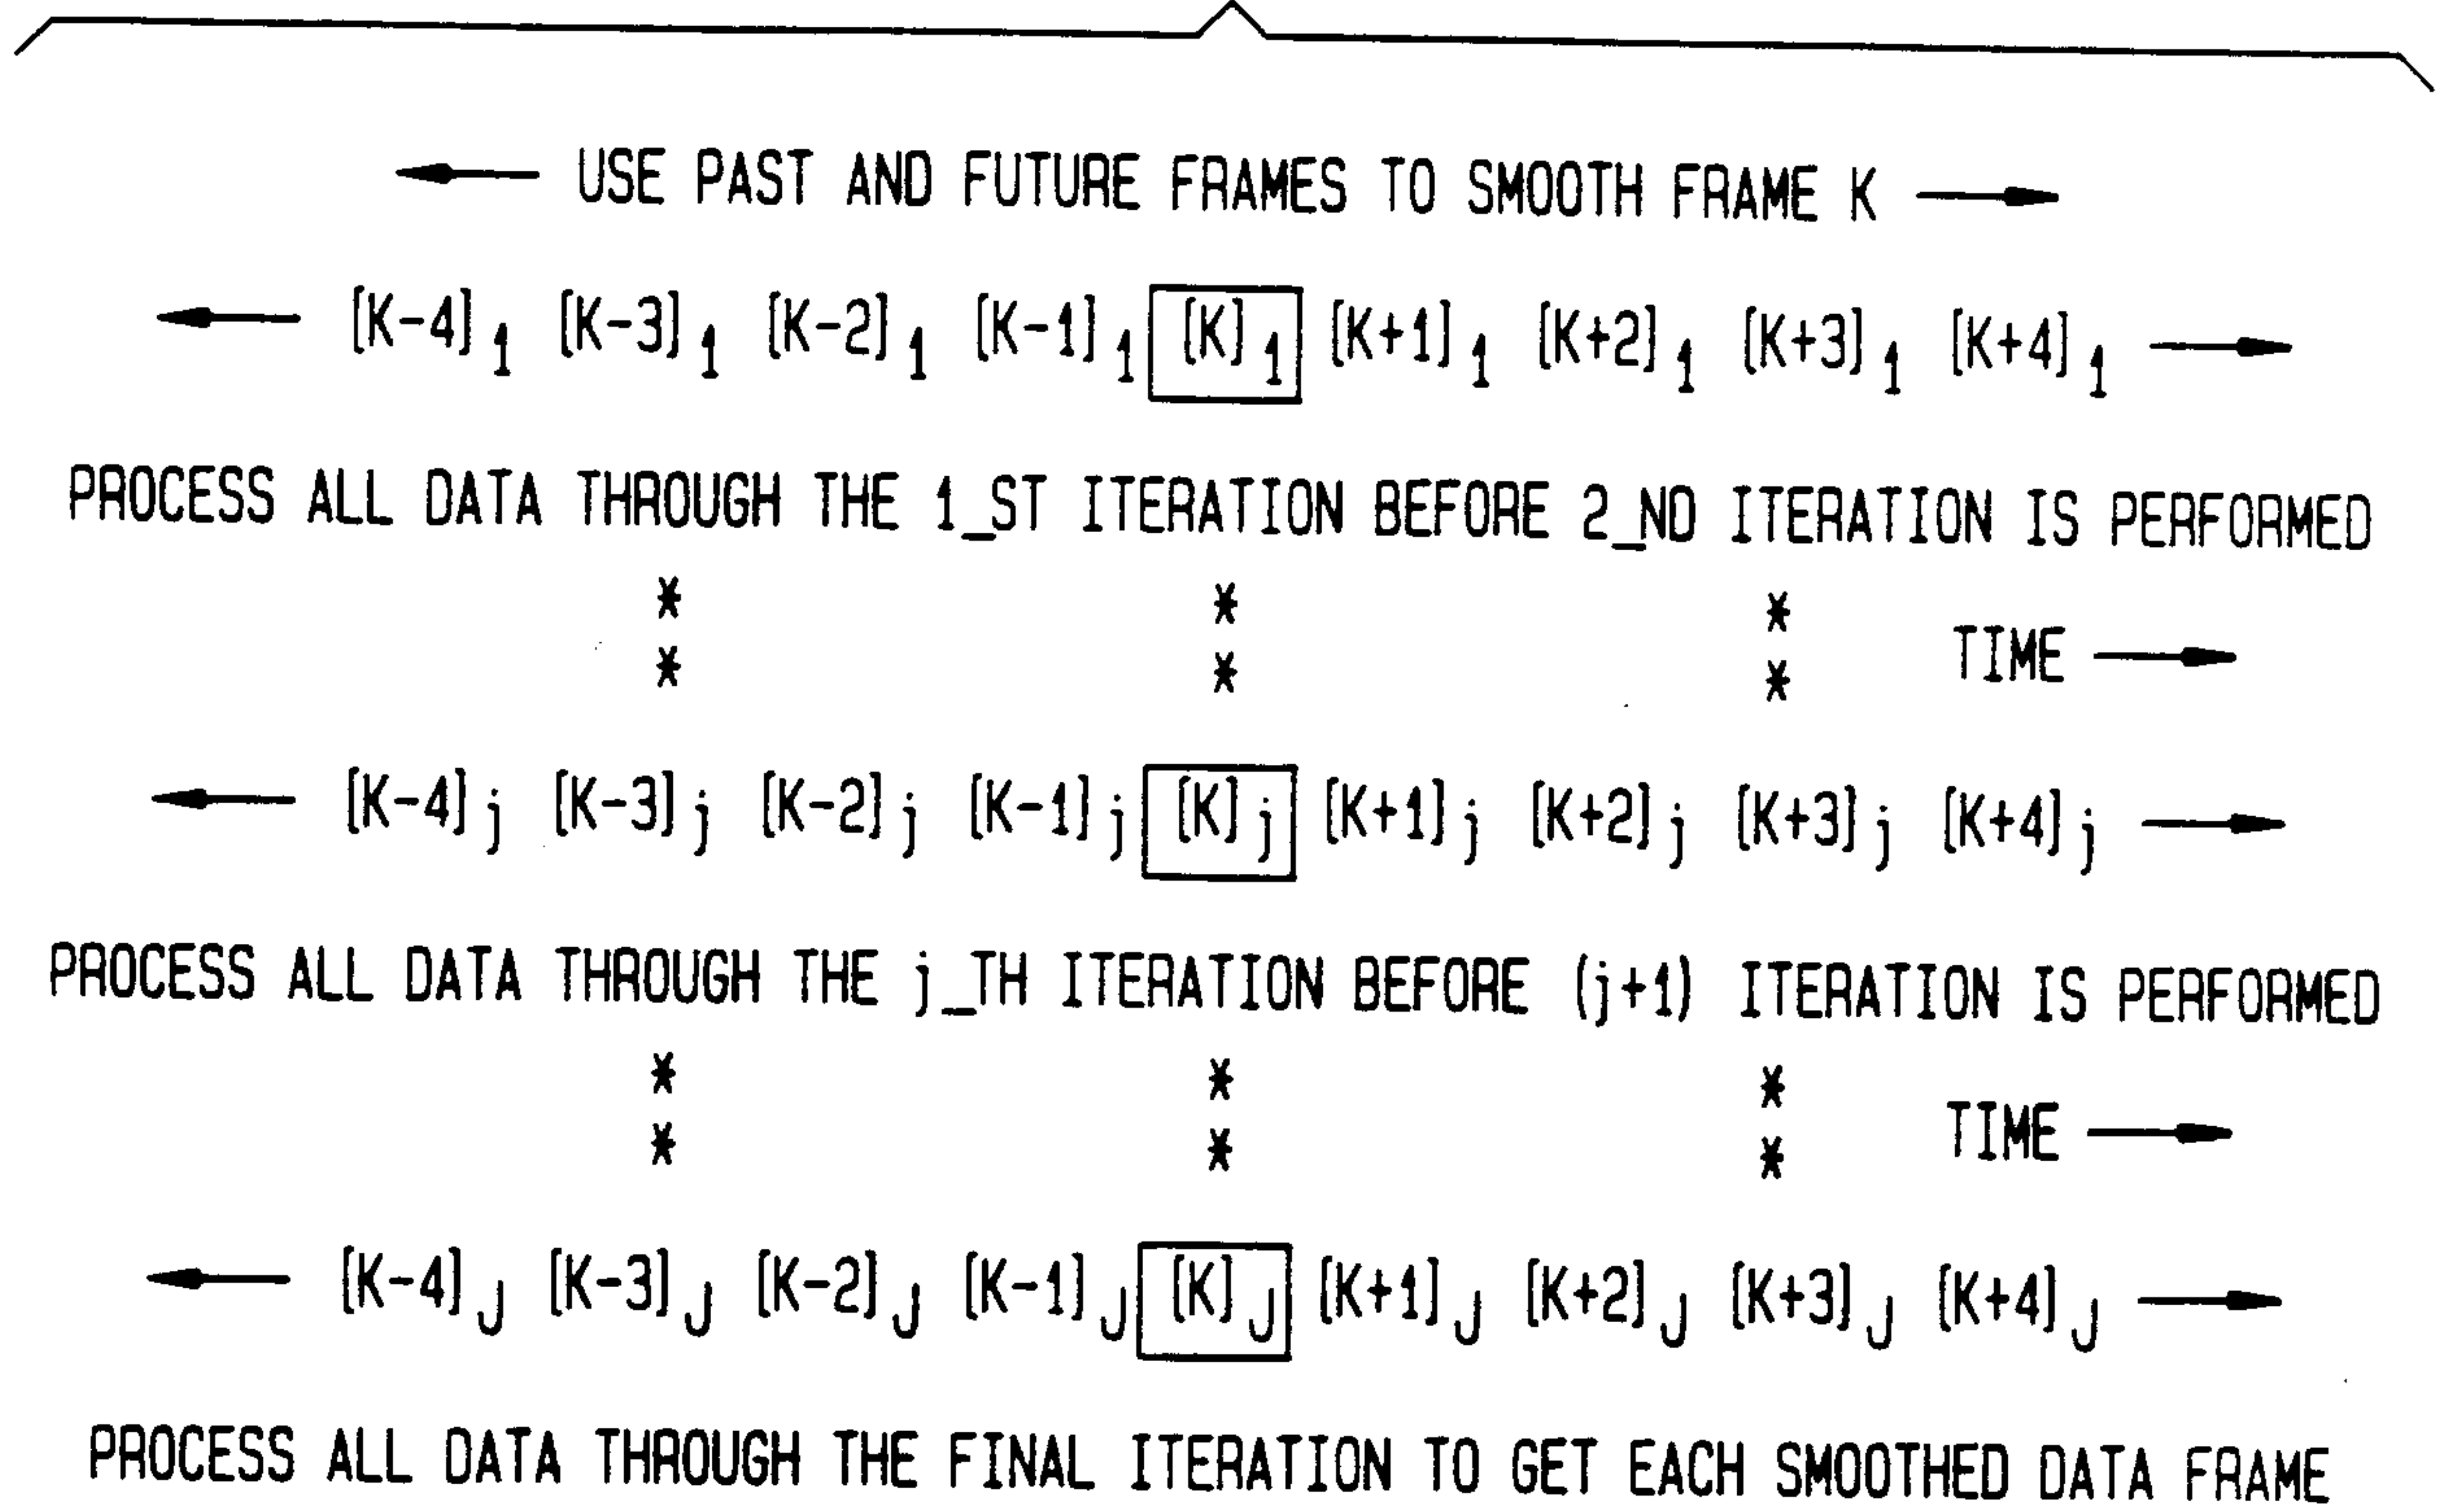


FIG. 6b

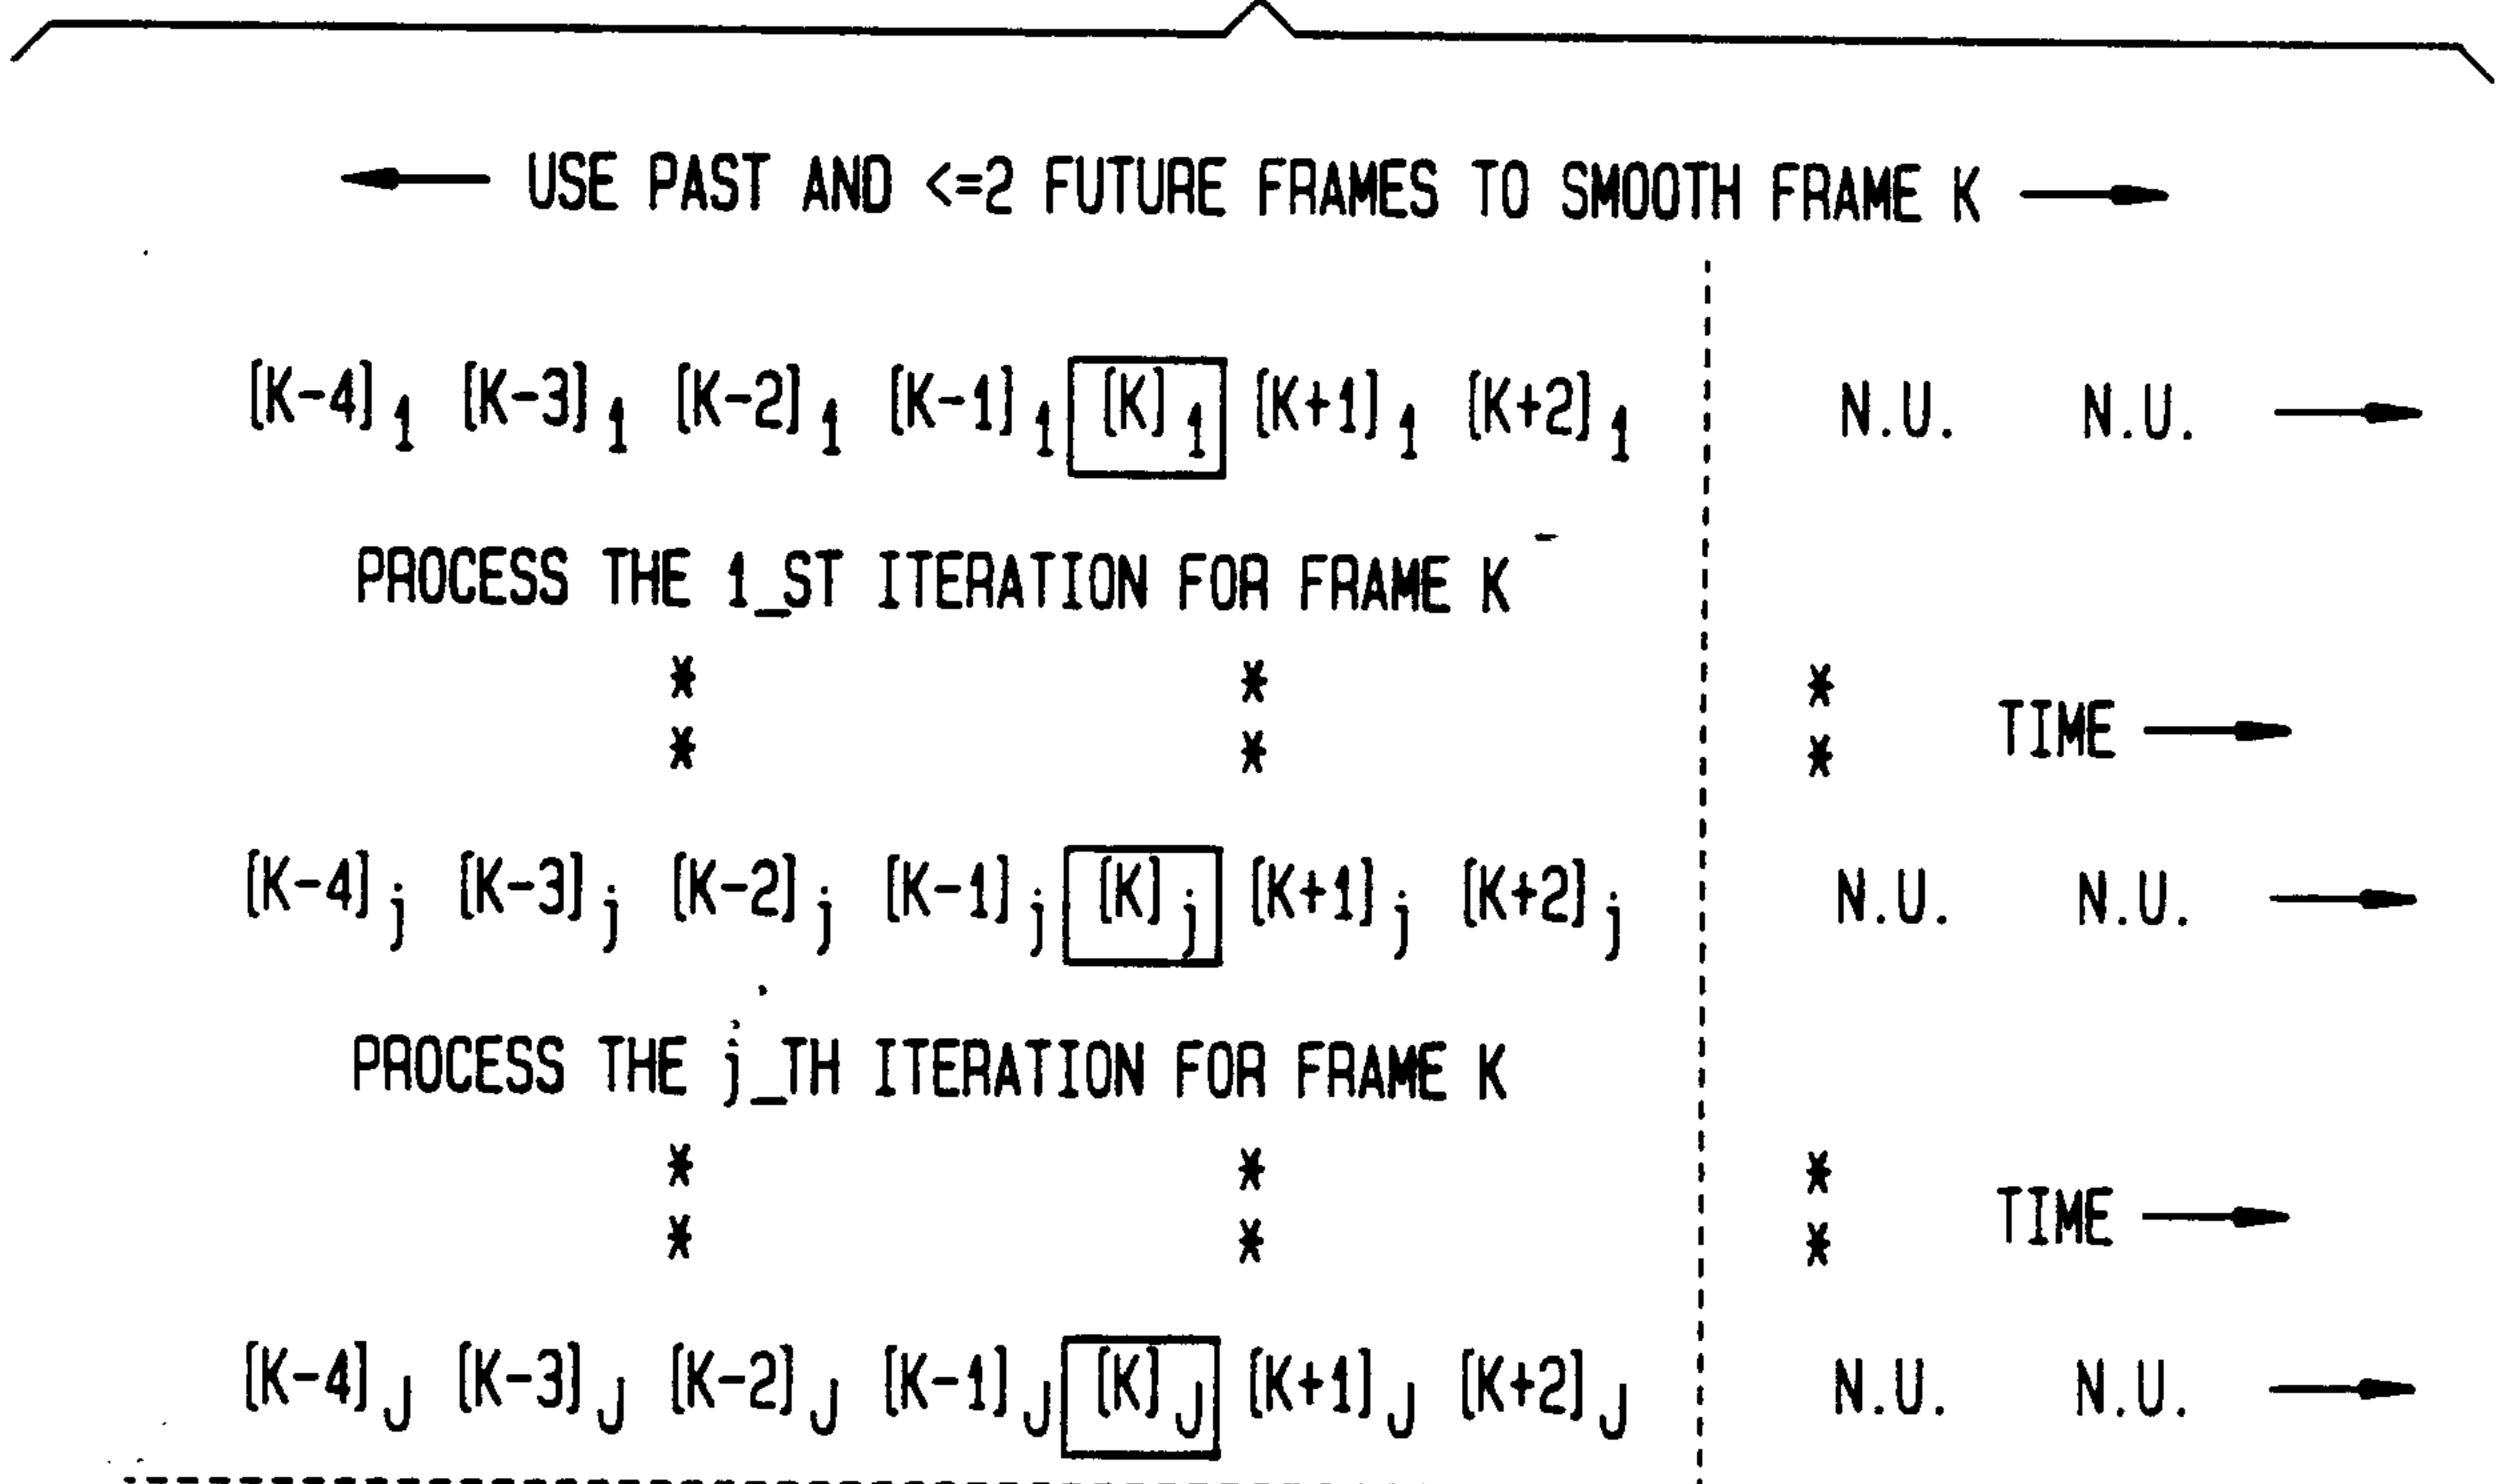

7/10

FIG. 7a

WIN 0	LSP	ROOT	POSITION	NUMBER	→
FRAME NO.	1	2	3	4	5
K-4	0.0	.1429	.1429	.1429	.1429
K-3	0.0	.1429	.1429	.1429	.1429
K-2	.15	.1429	.1429	.1429	.1429
K-1	.25	.1429	.1429	.1429	.1429
K	.1429	.1429	.1429	.1429	.1429
K+1	.1429	.1429	.1429	.1429	.1429
K+2	.1429	.1429	.1429	.1429	.1429

WIN 1	LSP	ROOT	POSITION	NUMBER	→
FRAME NO.	1	2	3	4	5
K-4	0.0	0.0	0.0	.05	.05
K-3	0.0	0.0	.10	.10	.10
K-2	.15	.15	.15	.15	.15
K-1	.25	.25	.20	.20	.20
K	.50	.50	.30	.25	.25
K+1	.10	.10	.15	.15	.15
K+2	0.0	0.0	.10	.10	.10

WIN 2	LSP	ROOT	POSITION	NUMBER	→
FRAME NO.	1	2	3	4	5
K-4	0.0	0.0	0.0	.05	.05
K-3	0.0	0.0	.10	.10	.10
K-2	.10	.10	.15	.15	.15
K-1	.20	.20	.20	.15	.15
K	.60	.60	.35	.40	.40
K+1	.10	.10	.15	.10	.10
K+2	0.0	0.0	.05	.05	.05

WIN 3	LSP	ROOT	POSITION	NUMBER	→
FRAME NO.	1	2	3	4	5
K-4	0.0	0.0	0.0	0.0	0.0
K-3	0.0	0.0	0.0	.05	.05
K-2	.10	.10	.15	.10	.10
K-1	.20	.20	.25	.25	.25
K	.60	.60	.50	.50	.50
K+1	.10	.10	.10	.10	.10
K+2	0.0	0.0	0.0	0.0	0.0

A

FIG. 7b

WIN 4	LSP	ROOT	POSITION	NUMBER	→
FRAME NO.	1	2	3	4	5
K-4	0.0	0.0	0.0	0.0	0.0
K-3	0.0	0.0	0.0	0.0	0.0
K-2	0.0	0.0	.10	.10	.10
K-1	.20	.20	.20	.20	.20
K	.70	.70	.60	.60	.60
K+1	.10	.10	.10	.10	.10
K+2	0.0	0.0	0.0	0.0	0.0

WIN 6	LSP	ROOT	POSITION	NUMBER	→
FRAME NO.	1	2	3	4	5
K-4	0.0	0.0	0.0	0.0	0.0
K-3	0.0	0.0	0.0	0.0	0.0
K-2	0.0	0.0	0.0	0.0	0.0
K-1	0.0	0.0	0.0	0.0	0.0
K	1.0	1.0	1.0	1.0	1.0
K+1	0.0	0.0	0.0	0.0	0.0
K+2	0.0	0.0	0.0	0.0	0.0

WIN 5	LSP	ROOT	POSITION	NUMBER	→
FRAME NO.	1	2	3	4	5
K-4	0.0	0.0	0.0	0.0	0.0
K-3	0.0	0.0	0.0	0.0	0.0
K-2	0.0	0.0	0.0	0.0	0.0
K-1	.20	.20	.20	.20	.20
K	.80	.80	.70	.70	.70
K+1	0.0	0.0	.10	.10	.10
K+2	0.0	0.0	0.0	0.0	0.0

FIG. 8
INPUT SIGNAL & NOISE


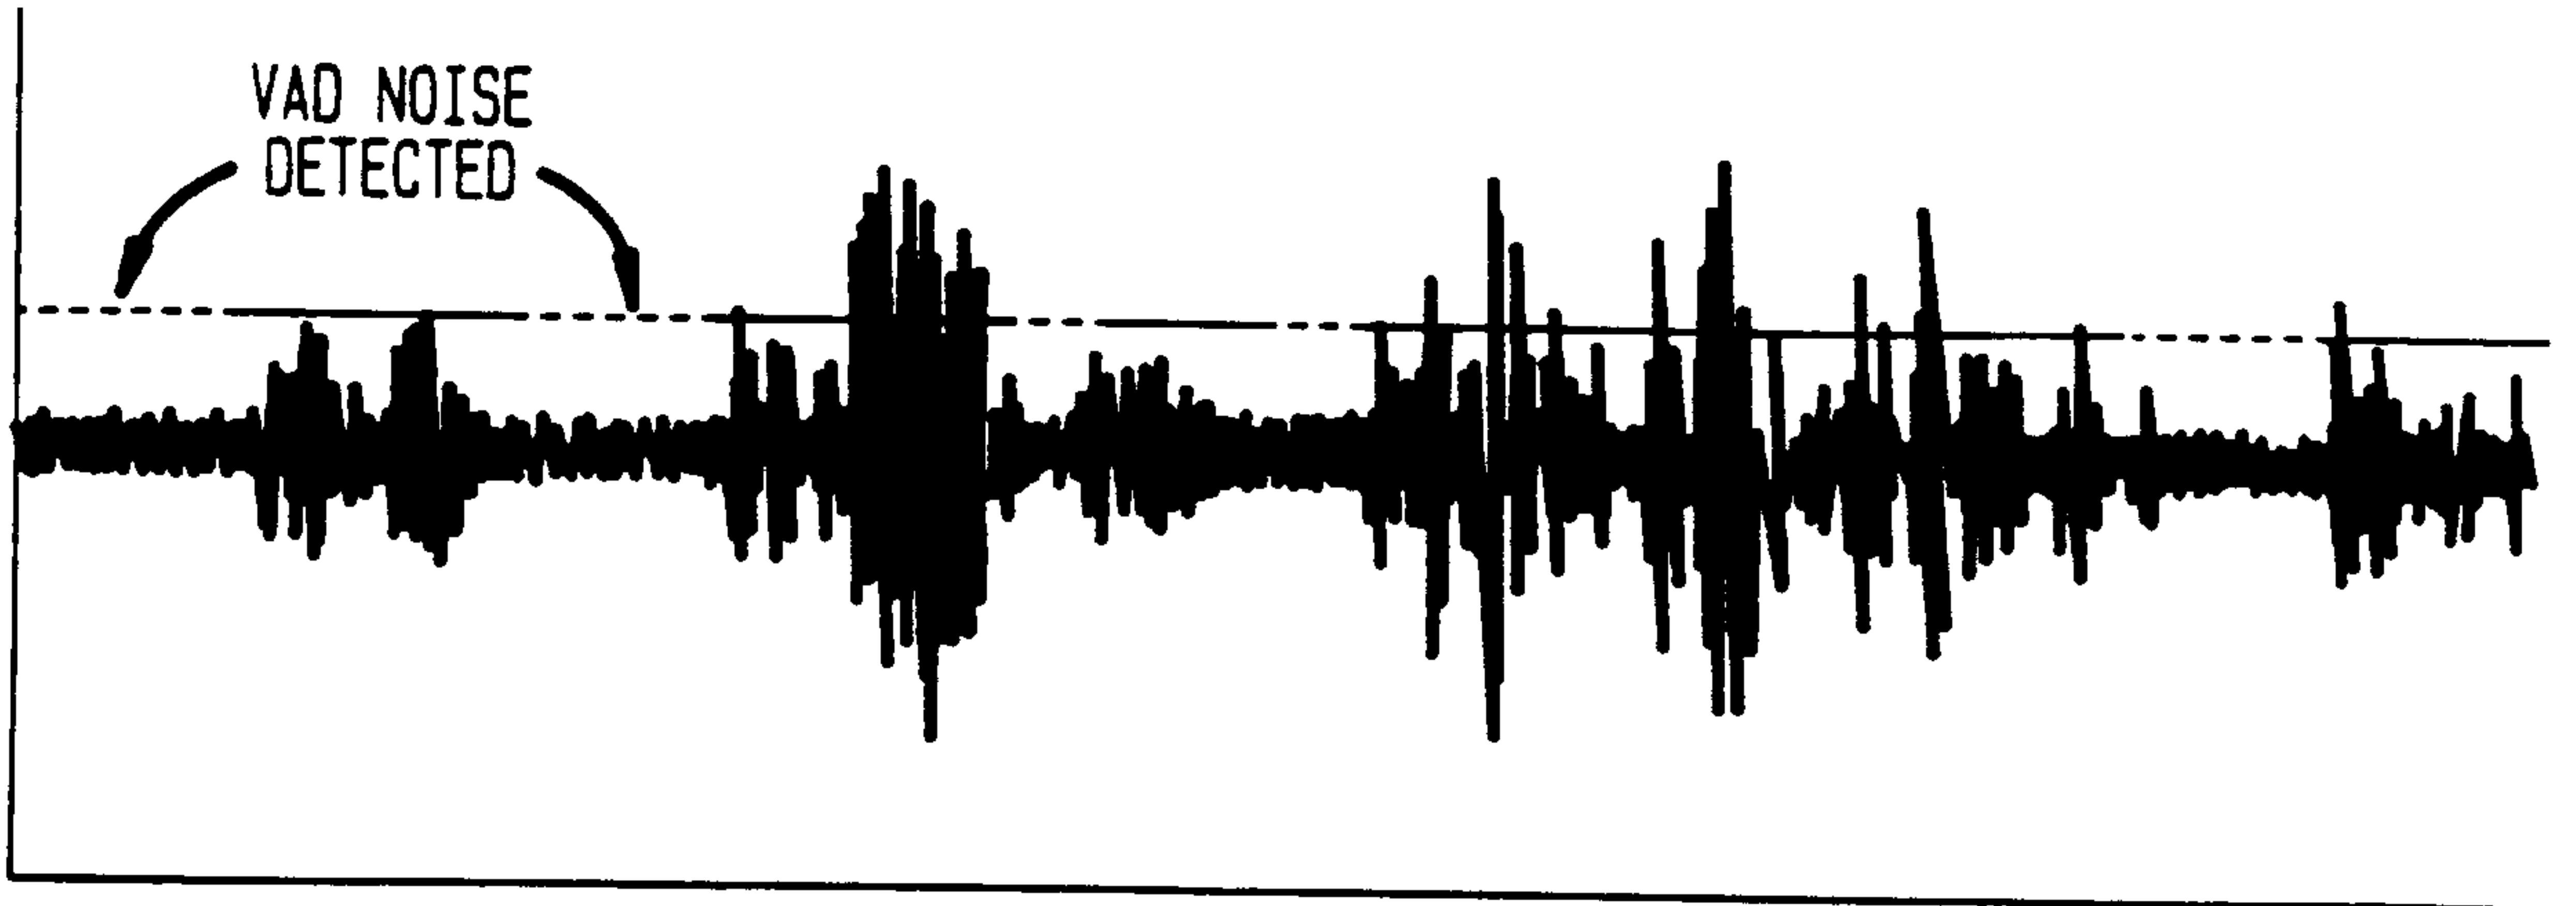


FIG. 9
FILTERED SIGNAL OUTPUT

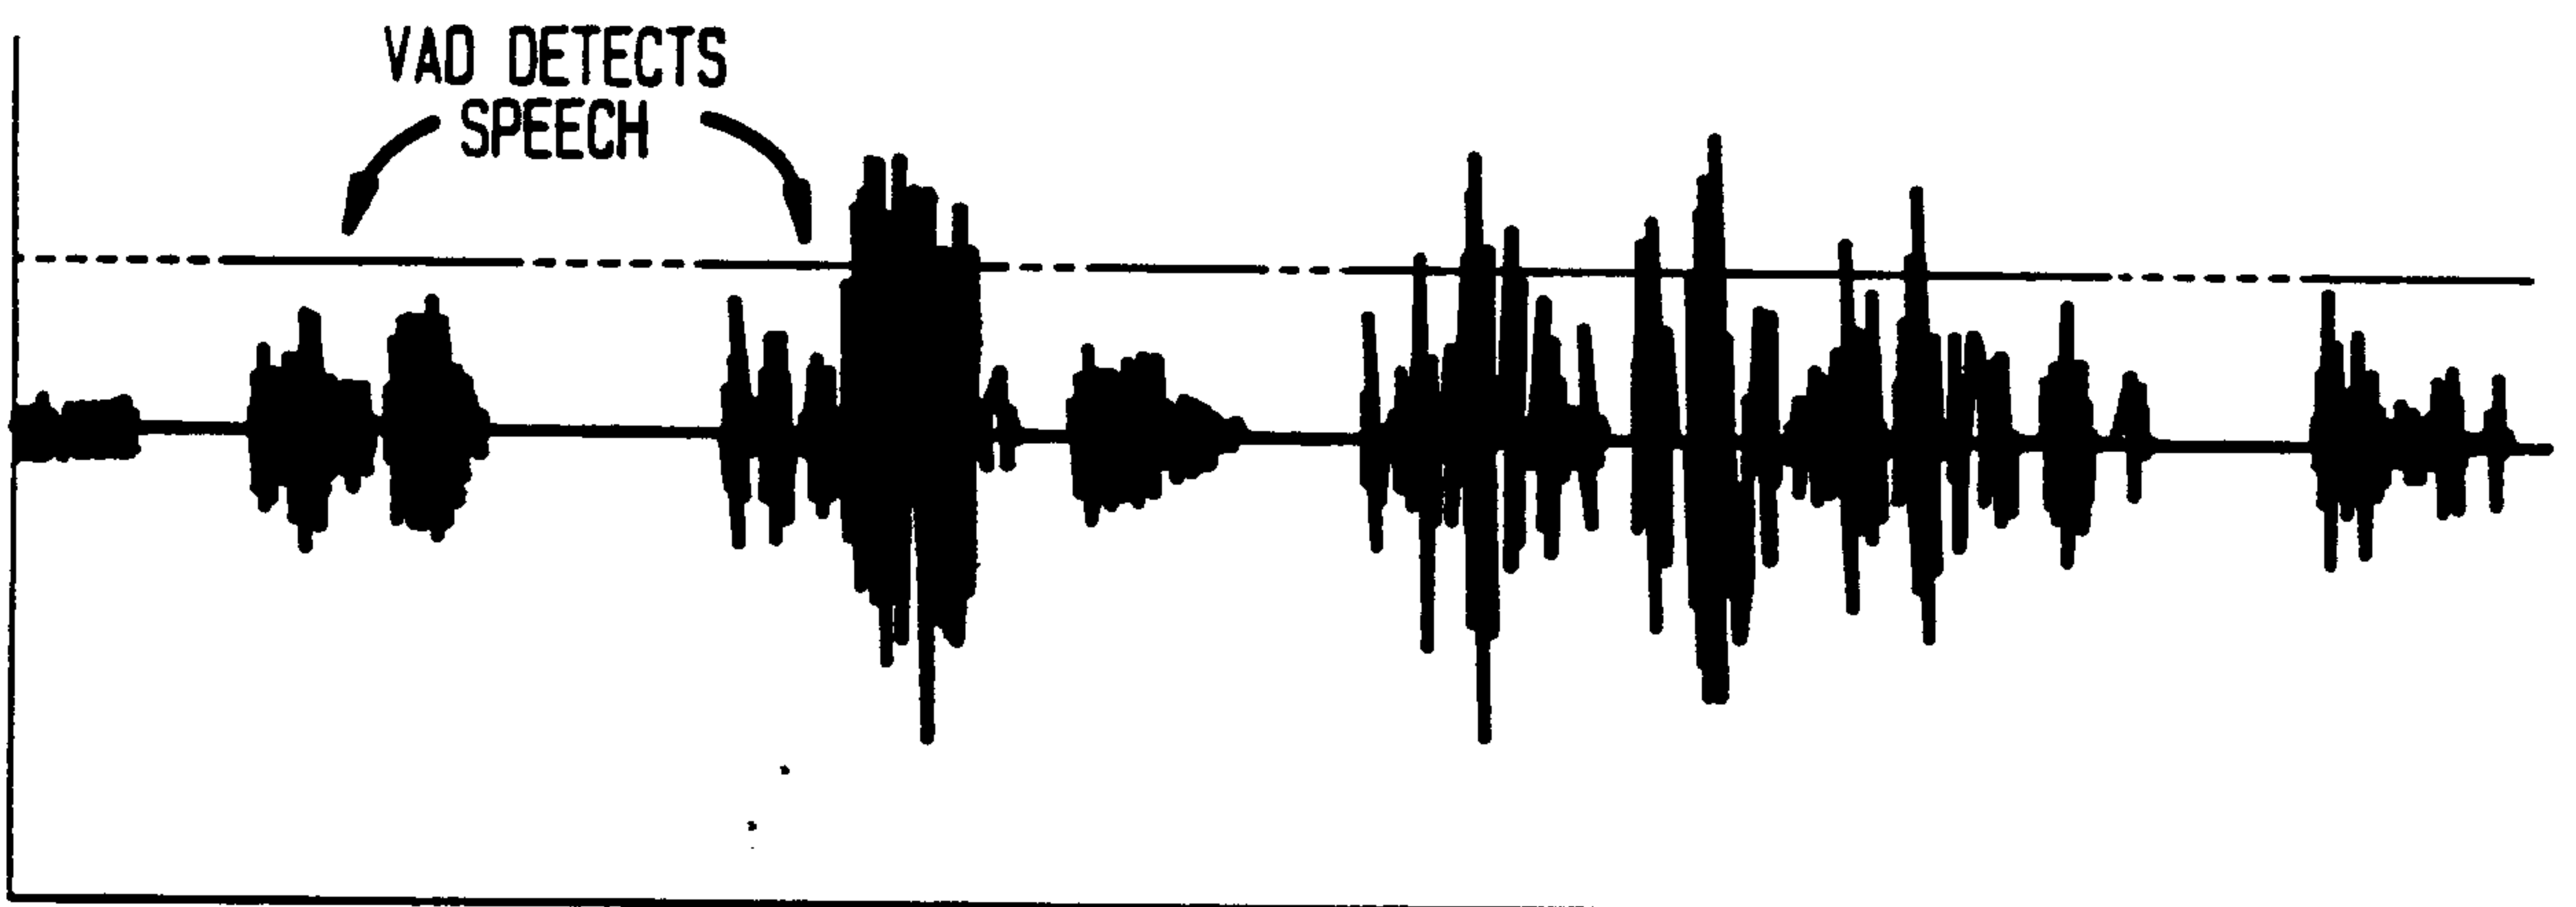

W.D. WYNN 2

10/10

FIG. 10

