

R. GILL.
Gas Burner.

No. 94,103.

Patented Aug. 24, 1869.

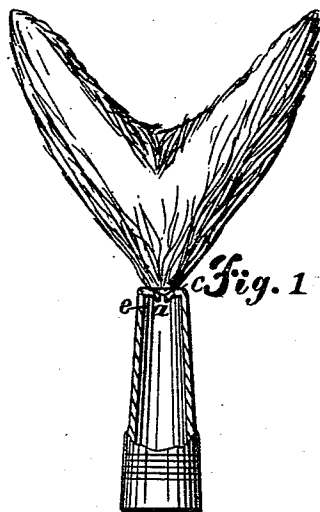


Fig. 1



Fig. 2

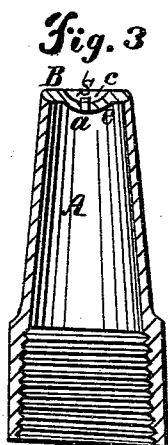


Fig. 3

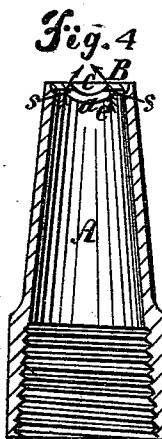


Fig. 4



Fig. 6




Fig. 5

Witnesses:

J. M. Coombs
Fred. W. Hayes

Inventor:

Robert Gill.

United States Patent Office.

ROBERT GILL, OF NEW YORK, N. Y., ASSIGNOR TO ELLIOTT P. GLEASON, OF SAME PLACE.

Letters Patent No. 94,103, dated August 24, 1869.

IMPROVEMENT IN GAS-BURNERS.

The Schedule referred to in these Letters Patent and making part of the same.

To all whom it may concern:

Be it known that I, ROBERT GILL, of the city, county, and State of New York, have invented a new and useful Improvement in Gas-Burner Tips; and I do hereby declare that the following is a full, clear, and exact description of the same, reference being had to the accompanying drawings, which form part of this specification, and in which—

Figures 1 and 2 represent longitudinal sections of a burner-tip, constructed according to my invention, taken at right angles to each other;

Figures 3 and 4 represent similar views of the same, somewhat enlarged for sake of better illustration; and

Figures 5 and 6 represent end views thereof, taken at right angles to each other, also enlarged.

Similar letters of reference indicate corresponding parts in the several figures.

The invention relates to a burner which produces a "fish-tail" flame; and

It consists in a novel construction of the tip of the burner, whereby a more satisfactory result is produced, and at a less cost of the tip than with the so-called "fish-tail" burners.

The conical shell or body A, and the end B of this burner-tip, may be constructed in the usual way, of one piece of metal, as represented in figs. 1 and 2, or it may have said parts formed of separate pieces and fitted together afterward, as shown in figs. 3 and 4, the usual depression *c* being made in the end.

This depression *c* is so formed as to cause a corresponding inward swell or projection, *e*, on the inner side of the end, as also shown.

Centrally across this swell *e* is made an incision or elongated slot, *a*, from the end of which, on the inner side, are formed grooves *s s*.

These grooves *s s* and slot *a* may be formed at the time of constructing the tip, or by a suitably-formed stamp and die after the tip has been otherwise finished, or when the body and end are made of separate parts, as in figs. 3 and 4, the grooves *s s* and the slot *a* may be made in the end-piece B, before its insertion, by a straight cut across its inner surface, by means of a saw or other suitable implement.

By means of the grooves *s s*, two converging currents of gas are conducted into and through the slot *a*, which, when meeting each other at a central point, are caused to spread transversely in the usual way, but so as, when ignited, to produce a more perfectly-formed flame, and consequently a better light.

What is here claimed, and desired to be secured by Letters Patent, is—

The combination of the slot *a* and the conducting-grooves *s s* in the burner-tip, substantially as and for the purpose herein described.

ROBERT GILL.

Witnesses:

FRED. HAYNES,
HENRY PALMER.