

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2014/070475 A1

(43) International Publication Date
8 May 2014 (08.05.2014)

WIPO | PCT

(51) International Patent Classification:
H03F 3/68 (2006.01)

(74) Agents: SCOTT, John, C. et al.; Daly, Crowley, Mofford & Durkee, LLP, 354A Turnpike Street, Suite 301A, Canton, Massachusetts 02021 (US).

(21) International Application Number:

PCT/US2013/065553

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:

18 October 2013 (18.10.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/663,887 30 October 2012 (30.10.2012) US


(71) Applicant: ETA DEVICES, INC. [US/US]; 245 First Street, Suite 1125, Cambridge, Massachusetts 02142 (US).

(72) Inventors: BRIFFA, Mark, A.; Sommarlidens 16, 135 61 Tyreso (SE). DAWSON, Joel, L.; 7 Clifftondale Street, Roslindale, Massachusetts 02131 (US). DEROO, John, E.; 30 West Main Street, Hopkinton, Massachusetts 01748-1620 (US). KOMONI, Krenar; 202 Church Street, Waltham, Massachusetts 02452 (US). PERREAULT, David, J.; 78 Fuller Street, Brookline, Massachusetts 02246 (US). UYAR, Oguzhan; 35 Myrtle Avenue, Apt. 1, Cambridge, Massachusetts 02138 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: RF AMPLIFIER ARCHITECTURE AND RELATED TECHNIQUES

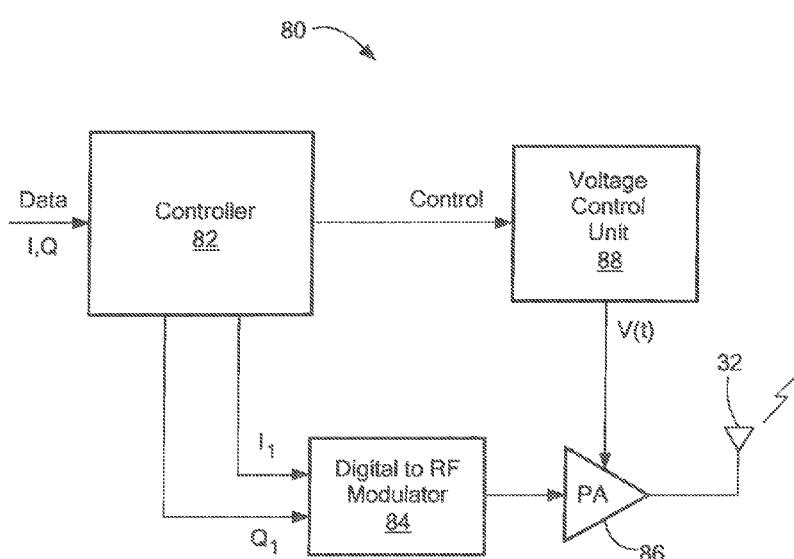

(57) Abstract: A radio frequency (RF) power amplifier system or transmitter includes one or more power amplifiers and a controller that is configured to adjust amplitudes and phases of RF input signals of the one or more power amplifiers and supply voltages applied to the one or more power amplifiers. In embodiments where multiple power amplifiers are used, a combiner may be provided to combine outputs of the power amplifiers. In at least one implementation, amplitude adjustment of the RF input signals of the one or more power amplifiers may be used to provide transmit power control and/or power backoff.

FIG. 4

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

RF AMPLIFIER ARCHITECTURE AND RELATED TECHNIQUES

FIELD

[0001] Subject matter disclosed herein relates generally to radio frequency (RF) circuits and, more particularly, to devices, systems, and techniques for implementing RF amplifiers and transmitters that are capable of achieving high linearity and high efficiency simultaneously.

BACKGROUND

[0002] As is known in the art, a radio frequency (RF) transmitter is a device that produces RF signals. RF transmitters may be included, for example, as part of a radio communication system that uses electromagnetic waves (radio waves) to transport information over a distance.

[0003] As is also known, a trade-off must generally be made in RF communications transmitters between energy efficiency and linearity. Over the decades of development of the RF transmitter and corresponding RF amplifiers, it has generally been true that one could obtain either high efficiency or high linearity, but not both. It would, therefore, be desirable to provide systems and techniques that allow a user to amplify RF signals and/or transmit data carrying RF signals with both high efficiency and high linearity.

SUMMARY

[0004] Systems and techniques are described herein that allow radio frequency (RF) signals to be amplified and/or transmitted with both high efficiency and high linearity. Digital control may be maintained over both the amplitudes and the phases of RF input signals applied to one or more power amplifiers. Digital control may also be maintained over the supply voltages applied to the one or more power amplifiers. In some embodiments, non-linear power amplifiers may

be used to achieve high power efficiency within the RF transmitter. Digital control techniques may be used to achieve linearity and to further enhance efficiency. In at least one implementation, the amplitudes of one or more RF input signals of the one or more power amplifiers may be controlled to achieve backoff in the power amplifier to generate a desired output power level.

[0005] In accordance with one aspect of the concepts, systems, circuits, and techniques described herein, an RF power amplifier system comprises: an RF power amplifier; a digital-to-RF modulator to generate an RF input signal for the RF power amplifier based on input information indicative of amplitude values and phase values; a voltage control unit to provide a variable supply voltage to the RF power amplifier in response to a control signal, the variable supply voltage being selected from a plurality of discrete voltage levels; and a controller to provide the input information to the digital-to-RF modulator and the control signal to the voltage control unit based, at least in part, on data to be transmitted from the RF transmitter, the controller being configured to make decisions about voltage level changes for the RF power amplifier based, at least in part, on a window of data samples representing data to be transmitted by the RF transmitter.

[0006] In one embodiment, the controller is configured to select amplitude and phase values for the digital-to-RF modulator and voltage values for the RF power amplifier to generate an accurate representation of the transmit data within an output signal of the RF power amplifier system.

[0007] In one embodiment, the controller is configured to select a discrete voltage level for a current data sample based, at least in part, on a voltage level selected for at least one previous sample, the current data sample, and at least one future data sample.

[0008] In one embodiment, the voltage control unit includes a transition shaping filter to filter a voltage signal applied to the power amplifier.

[0009] In one embodiment, the controller is configured to make voltage level change decisions for the power amplifier in a manner that achieves efficient power amplifier operation with a reduced number of voltage level transitions.

- [0010] In one embodiment, the controller is capable of adapting the length of the window of data samples over time based on a predetermined amplifier performance criterion.
- [0011] In one embodiment, the window of data samples has a fixed length.
- [0012] In one embodiment, the controller is configured to adapt one or more values of the plurality of discrete voltage levels used by the voltage control unit over time.
- [0013] In one embodiment, to determine a voltage level for use by the power amplifier for a current sample, the controller is configured to: select a new voltage level that is lower than that used for the previous sample for use with the current sample if all samples in the window of data samples can use a lower voltage level than was used for a previous sample to achieve a desired output power.
- [0014] In one embodiment, to determine a voltage level for use by the power amplifier for a current sample, the controller is further configured to: if all samples in the window of data samples cannot use a lower voltage level than the previous sample to achieve a desired output power; if the voltage level used for the previous sample is sufficient for use with the current sample, use the voltage level used for the previous sample for the current sample; and if the voltage level used for the previous sample is not sufficient for use with the current sample, select a new voltage level for the current sample.
- [0015] In one embodiment, the controller is capable of selecting a voltage value for the power amplifier that is lower than required to generate a desired instantaneous output power level if the need for a higher voltage level is short in duration compared to the time duration of the window of data samples.
- [0016] In one embodiment, the controller is capable of selecting a voltage value for the power amplifier that is higher than a minimum voltage sufficient to generate a desired instantaneous output power level if the duration of time for which a lower voltage level is sufficient is short compared to the time duration of the window of data samples.
- [0017] In one embodiment, the RF power amplifier is a first RF power amplifier; and the RF power amplifier system further comprises: at least one additional RF

power amplifier; and a combiner to combine the output signals of the first RF power amplifier and the at least one additional RF power amplifier.

[0018] In accordance with another aspect of the concepts, systems, circuits, and techniques described herein, a machine implemented method for operating an RF transmitter having a digital-to-RF modulator driving a power amplifier comprises: obtaining transmit data to be transmitted from the RF transmitter; providing input information for the digital-to-RF modulator based, at least in part, on the transmit data, the input information to control an amplitude and a phase of an RF output signal of the digital-to-RF modulator; and selecting a supply voltage for the power amplifier based, at least in part, on the transmit data, wherein selecting a supply voltage includes making decisions about voltage level changes for the RF power amplifier based, at least in part, on a window of data samples representing data to be transmitted by the RF transmitter.

[0019] In one embodiment, the method further comprises delivering an output signal of the power amplifier to one or more antennas for transmission.

[0020] In one embodiment, the method further comprises selecting a discrete supply voltage level for a current data sample based, at least in part, on a voltage level selected for at least one previous sample, the current data sample, and at least one future data sample.

[0021] In one embodiment, the amplitude of the RF output signal of the digital-to-RF modulator and the selection of the discrete supply voltage level are controlled to achieve a desired instantaneous output power of the RF transmitter.

[0022] In one embodiment, selecting a supply voltage for the power amplifier comprises: if all samples in the window of samples can use a lower voltage level than a previous sample to achieve a desired output power, selecting a new voltage level that is lower than that used for the previous sample.

[0023] In one embodiment, selecting a supply voltage for the power amplifier further comprises: if all samples in the window of samples cannot use a lower voltage level than the previous sample to achieve the desired output power: if the voltage level used to support the previous sample is sufficient for use with a current sample, continue using the voltage level used to support the previous

sample for the current sample; and if the voltage level used to support the previous sample is not sufficient for use with the current sample, selecting a new voltage level that is sufficient for use with the current sample.

[0024] In one embodiment, selecting a new voltage level that is lower than that used for the previous sample to support all samples includes selecting a new voltage level that is as low as possible and still capable of generating desired instantaneous output power levels for all samples in the window.

[0025] In one embodiment, selecting a new voltage level that is sufficient for use with the current sample includes selecting a new voltage level that is as low as possible to generate a desired instantaneous output power level for the current sample.

[0026] In accordance with still another aspect of the concepts, systems, circuits, and techniques described herein, an apparatus comprises a computer readable medium having instructions stored thereon that, when executed by a computer, perform a method for operating an RF transmitter having a digital-to-radio frequency (RF) modulator driving a power amplifier, the method comprising: obtaining transmit data to be transmitted from the RF transmitter; providing input information for the digital-to-RF modulator based, at least in part, on the transmit data, the input information to control an amplitude and a phase of an RF output signal of the digital-to-RF modulator; and selecting a supply voltage for the power amplifier based, at least in part, on the transmit data, the supply voltage being selected from a plurality of discrete voltage levels, wherein selecting a supply voltage includes making a decision about supply voltage level for the RF power amplifier based, at least in part, on a window of data samples representing data to be transmitted by the RF transmitter.

[0027] In one embodiment, selecting a supply voltage for the power amplifier includes selecting a discrete supply voltage level for a data sample based, at least in part, on the data sample, at least one subsequent data sample, and a voltage level selected for at least one previous sample.

[0028] In one embodiment, providing input information for the digital-to-RF modulator includes providing input information that controls an amplitude of an RF

output signal of the digital-to-RF modulator in a manner that achieves a desired power level at an output of the RF transmitter.

[0029] In one embodiment, selecting a supply voltage for the power amplifier is performed in a manner that achieves efficient power amplifier operation with a reduced number of voltage level transitions.

[0030] In one embodiment, the method further comprises adapting a length of the window of data samples over time based on a predetermined criterion.

[0031] In one embodiment, the window of data samples has a fixed length.

[0032] In accordance with a further aspect of the concepts, systems, circuits, and techniques described herein, a machine implemented method for selecting a voltage level for a power amplifier within a radio frequency (RF) transmitter based on input data to be transmitted comprises: identifying a window of samples to be transmitted from the transmitter; and if all samples in the window of samples can use a lower voltage level than a previous sample to achieve a desired instantaneous output power, selecting a new voltage level that is lower than that used for the previous sample.

[0033] In one embodiment, the method further comprises: if all samples in the window cannot use a lower voltage level than the previous sample to achieve the desired output power: if the voltage level used for the previous sample is sufficient for use with a current sample, using the voltage level used for the previous sample for the current sample; and if the voltage level used for the previous sample is not sufficient for use with the current sample, selecting a new voltage level that is sufficient for use with the current sample.

[0034] In one embodiment, selecting a new voltage level that is lower than that used for the previous sample includes selecting a new voltage level that is as low as possible to support all samples in the window.

[0035] In one embodiment, selecting a new voltage level that is sufficient for use with the current sample includes selecting a new voltage level that is as low as possible for use with the current sample.

BRIEF DESCRIPTION OF THE DRAWINGS

[0036] The foregoing features may be more fully understood from the following description of the drawings in which:

[0037] Fig. 1 is a block diagram illustrating an exemplary radio frequency (RF) transmitter in accordance with an embodiment;

[0038] Fig. 2 is a block diagram illustrating an exemplary RF transmitter in accordance with another embodiment;

[0039] Fig. 3 is a block diagram illustrating an exemplary RF transmitter having at least four power amplifiers in accordance with an embodiment;

[0040] Fig. 4 is a block diagram illustrating an exemplary RF transmitter having a single power amplifier in accordance with an embodiment;

[0041] Fig. 4A is a block diagram illustrating an exemplary RF transmitter having a single power amplifier that uses a discrete voltage switching in accordance with an embodiment;

[0042] Fig. 4B is a schematic diagram illustrating an exemplary switched capacitor converter circuit that may be used within a voltage control unit in accordance with an embodiment;

[0043] Fig. 4C is a schematic diagram illustrating a voltage control arrangement for switching among different discrete supply levels for a power amplifier in accordance with an embodiment;

[0044] Figs. 4D and 4E are schematic diagrams illustrating exemplary switching network architectures that may be used in power amplifier systems and RF transmitter systems in accordance with embodiments;

[0045] Figs. 4F-4I are schematic diagrams illustrating exemplary level-transition filter architectures that may be used in various embodiments;

[0046] Fig. 5 is a block diagram illustrating an exemplary RF transmitter in accordance with another embodiment;

[0047] Fig. 6 is a schematic diagram illustrating an exemplary voltage control unit in accordance with an embodiment;

[0048] Fig. 7 is a schematic diagram illustrating an exemplary voltage control unit in accordance with another embodiment;

[0049] Fig. 8 is a flow diagram illustrating a method for operating an RF transmitter having at least two digital-to-RF modulators driving at least two power amplifiers in accordance with an embodiment;

[0050] Fig. 9 is a flow diagram illustrating a method for operating an RF transmitter having a single digital-to-RF modulator driving a single power amplifier in accordance with an embodiment;

[0051] Fig. 10 is a diagram illustrating an exemplary sample window that may be used to make a voltage level change decision in a power amplification system in accordance with an embodiment; and

[0052] Fig. 11 is a flow diagram illustrating a method for selecting voltage levels for one or more power amplifiers of a power amplification system based on a sample window in accordance with an embodiment;

[0053] Fig. 12 is a plot illustrating the efficiency and output power of a power amplification system having a single power amplifier as a function of normalized RF drive power at two different dc power supply levels;

[0054] Fig. 13 is a pair of IQ plots illustrating achievable RF output amplitudes for a power amplification system having a single power amplifier using two different supply levels;

[0055] Fig. 14 is a plot of efficiency versus normalized output power for a power amplification system having a single power amplifier using two different supply levels in accordance with an embodiment;

[0056] Fig. 15 is an IQ plot illustrating achievable output signal ranges for a power amplification system having two power amplifiers and a combiner, where each power amplifier is supplied from one of two supply levels;

[0057] Fig. 16 is an IQ plot illustrating operation of an exemplary Asymmetric Multilevel Outphasing (AMO) based amplification system that includes two-power amplifiers and two power supply levels;

[0058] Fig. 17 is an IQ plot illustrating a control technique that may be used with a power amplification system having two power amplifiers and a combiner to operate the power amplifiers at or close to their achievable maximum amplitudes, while minimizing output at an isolation port of the combiner; and

[0059] Fig. 18 is a series of plots illustrating how power amplifier drive levels and supply levels may be adjusted to control output power over an output power range in accordance with an embodiment.

DETAILED DESCRIPTION

[0060] Fig. 1 is a block diagram illustrating an exemplary radio frequency (RF) transmitter 10 in accordance with an embodiment. As will be described in greater detail, RF transmitter 10 is capable of simultaneously achieving both high efficiency and high linearity. As illustrated, RF transmitter 10 may include: a controller 12; first and second digital to RF modulators 14, 16; first and second power amplifiers 18, 20; first and second voltage control units 22, 24; a power combiner 26; and an energy recovery module 30. RF transmitter 10 may be coupled to one or more antennas 32 and/or other transducers to facilitate the transmission of RF signals to one or more remote wireless entities. In some implementations, first and second power amplifiers 18, 20 may use substantially the same amplifier design. In other implementations, different amplifier designs and/or architectures may be used. In some embodiments, first and second power amplifiers 18, 20 may be non-linear amplifiers (and, in some cases, highly non-linear amplifiers). As is well known, non-linear amplifiers generally operate more efficiently than linear amplifiers.

[0061] First and second digital to RF modulators 14, 16 are operative for generating RF input signals for first and second power amplifiers 18, 20, respectively, based on information received from controller 12. First and second

voltage control units 22, 24 are operative for providing variable supply voltages to first and second power amplifiers 18, 20, respectively, based on control signals received from controller 12. In a typical implementation, controller 12 will receive or otherwise obtain a stream of data to be transmitted from RF transmitter 10 (i.e., transmit data). Controller 12 may then use this transmit data, among other things, to provide signals for first and second digital to RF modulators 14, 16 and first and second voltage control units 22, 24 that will result in the transmission of the transmit data from antenna(s) 32. Controller 12 may update the information delivered to first and second digital to RF modulators 14, 16 and the control signals delivered to first and second voltage control units 22, 24 on a sample-by-sample basis in some implementations.

[0062] In at least one implementation, controller 12 can provide independent control to each of first and second voltage control units 22, 24 so that different supply voltages can be simultaneously applied to first and second power amplifiers 18, 20. Likewise, in some implementations, controller 12 can provide different input information to first and second digital to RF modulators 14, 16 so that different RF input signals are simultaneously applied to first and second power amplifiers 18, 20. Power combiner 26 is operative for combining the output signals of first and second power amplifiers 18, 20 to generate an RF transmit signal at an output thereof. The RF transmit signal may then be delivered to antenna(s) 32 for transmission into a wireless channel. As will be appreciated, the RF transmit signal should include an accurate representation of the original transmit data.

[0063] First and second power amplifiers 18, 20 may each include any type of power amplifier capable of amplifying an RF signal. In some implementations, first and second power amplifiers 18, 20 may be non-linear amplifiers to improve the efficiency of operation of the RF transmitter. In some embodiments, highly non-linear amplifiers may be used. First and second power amplifiers 18, 20 may use the same amplifier design or different amplifier designs. Likewise, first and second power amplifiers 18, 20 may use the same amplifier architecture or different amplifier architectures. First and second voltage control units 22, 24 may each include any type of circuit, component, or system that is capable of

controllably varying a supply voltage level applied to a power amplifier in an RF transmitter. These units may include, for example, variable power supplies, discrete power supplies, batteries, multi-level power converters, and/or switching circuits that are capable of switching between preset voltage potentials.

[0064] First and second digital to RF modulators 14, 16 may include any type of circuits or components that are capable of converting digital input information representative of a time varying amplitude and a time-varying phase into an analog RF output signal having corresponding amplitude and phase characteristics. Power combiner 26 may include any type of device or structure that is capable of combining multiple RF signals. This may include, for example, a hybrid combiner, a transformer combiner, a Wilkinson combiner, and or others. Power combiner 26 may be an isolating combiner or a non-isolating combiner.

[0065] As described above, controller 12 may receive or otherwise acquire transmit data that needs to be transmitted into a wireless channel. The transmit data may be in any format (e.g., a binary bit stream; I and Q data; etc.). Controller 12 may then use this data, as well as other possible factors, to provide signals for first and second digital to RF modulators 14, 16 and first and second voltage control units 22, 24. In some implementations, the goal may be to generate an RF transmit signal that includes an accurate representation of the transmit data. Any of a number of different modulation and coding schemes (MCSs) may be used to represent the transmit data within the RF transmit signal. The MCS may include, for example, binary phase shift keying (BPSK), quadrature phase shift keying (QPSK), quadrature amplitude modulation (e.g., QAM, 16 QAM, 64 QAM, 128 QAM, etc), orthogonal frequency division multiplexing (OFDM), and/or others. Some of these MCSs have relatively high peak to average power ratios. As is well known, MCSs having high peak to average power ratios typically require highly linear power amplification to provide an accurate representation of transmit data. In various embodiments described herein, transmission systems and techniques are described that are capable of providing efficient power amplification with sufficient linearity to support MCSs having high peak to average power ratios.

[0066] As shown in Fig. 1, after controller 12 acquires transmit data, it may use the data to provide input information to first and second digital to RF modulators 14, 16. In one possible approach, controller 12 may provide separate I and Q data to each of the first and second digital to RF modulators 14, 16. That is, controller 12 may generate I_1, Q_1 for first digital to RF modulator 14 and I_2, Q_2 for second digital to RF modulator 16. First and second digital to RF modulators 14, 16 may then use the I, Q information to modulate an RF carrier wave to generate a corresponding RF signal at an output thereof. As is well known, I and Q data is generally representative of an amplitude and a phase. Thus, I_1 and Q_1 may, for example, have a corresponding amplitude A_1 and phase θ_1 . The RF signal output by first digital to RF modulator 14 in response to I_1 and Q_1 may therefore be an RF signal having amplitude A_1 and phase θ_1 . In some implementations, the input information provided to first and second digital to RF modulators 14, 16 may be in a format other than I and Q. For example, in one possible approach, amplitude (A_1, A_2) and phase (θ_1, θ_2) information may be delivered to first and second digital to RF modulators 14, 16 by controller 12. As described above, the input information applied to first and second digital to RF modulators 14, 16 may change on a sample by sample basis in some embodiments.

[0067] In some implementations, first and second voltage control units 22, 24 may each be capable of providing one of a plurality of predetermined voltages to corresponding power amplifiers 18, 20 in response to control signals from controller 12. Thus, a control signal V_{CONT1} may select a voltage value for power amplifier 18 and a control signal V_{CONT2} may select a voltage value for power amplifier 20. As with the input information applied to first and second digital to RF modulators 14, 16, the supply voltage values applied to first and second power amplifiers 18, 20 may change on a sample by sample basis in some embodiments.

[0068] In addition to the above, in some embodiments, controller 12 may use the amplitude information delivered to first and second digital to RF modulators 14, 16 (e.g., the amplitude value associated with I_1 and Q_1 , etc.) to control/adjust a power level output by the RF transmitter 10 (e.g., a transmit power level). For

example, controller 12 may use a reduced amplitude value for one or both of the digital to RF modulators 14, 16 when a lower transmit power level is desired.

[0069] In some embodiments, controller 12 may determine input information for first and second digital to RF modulators 14, 16 and control information for first and second voltage control units 22, 24 in real time based on the transmit data. In some other embodiments, an optional lookup table (LUT) 36 may be used to provide the required information. Controller 12 may retrieve values from LUT 36 for the first and second digital to RF modulators 14, 16 and the first and second voltage control units 22, 24 that are designed to accurately represent the transmit data in the transmit signal.

[0070] In some embodiments, power combiner 26 may be an isolating combiner having an isolation port. As is well known, an isolating combiner will sometimes output energy at the isolation port due to, for example, mismatches, imbalances, and/or reflections in the circuitry coupled to the combiner. Typically, a resistive termination will be coupled to the isolation port of an isolating combiner to provide an impedance match for the port and to dissipate any energy output from the port. In some embodiments, an energy recovery module 30 may be coupled to the isolation port of an isolating combiner, rather than a conventional resistive termination, for use in recovering some or all of the energy that would otherwise have been dissipated. Energy recovery module 30 may include circuitry for converting the recovered energy into a useful form. For example, the recovered energy may be converted to a form that can be used to charge a battery. Alternatively, the recovered energy may be converted to a form that may be used to energize other circuitry within RF transmitter 10.

[0071] In the embodiment illustrated in Fig. 1, separate voltage control units 22, 24 are provided for first and second power amplifiers 18, 20. In some implementations, the functions of multiple voltage control units may be implemented using a single voltage control structure. Fig. 2 is a block diagram illustrating an exemplary radio frequency (RF) transmitter 40 in accordance with an embodiment. As shown in Fig. 2, a single voltage control unit 34 may be used to provide variable voltages for both of power amplifiers 18, 20.

[0072] In some embodiments, power amplification systems are provided that incorporate dynamic selection from among a discrete set of voltage levels for providing drain bias voltages to a set of power amplifiers (PAs). Selection from among multiple discrete voltage levels in setting one or more drain bias voltages is common to a number of system architectures. This includes systems that select from among a discrete set of input voltages and then provide additional regulation to provide a continuously-varying drain voltage (see, e.g., "Multilevel Power Supply for High Efficiency RF Amplifiers," by Vasic et al., 2009 *IEEE Applied Power Electronics Conference*, pp. 1233-1238, Feb. 2009; and U.S. Patent 7,482,869 to Wilson, entitled "High Efficiency Amplification.") and systems that directly exploit discrete drain levels, including "class G" amplifiers (see, e.g., "Average Efficiency of Class-G Power Amplifiers," by F.H. Raab, *IEEE Transactions on Consumer Electronics*, Vol. CE-32, no. 2, pp. 145-150, May 1986; and "A Class-G Supply Modulator and Class-E PA in 130nm CMOS," by Walling et al., *IEEE Journal of Solid-State Circuits*, Vol. 44, No. 9, pp. 2339-2347, Sept. 2009), multi-level LINC (MLINC) Power Amplifiers (see, e.g., U.S. Patent Application Publication 2008/0019459 to Chen et al. entitled "Multilevel LINC Transmitter;" and U.S. Patent Application Publication US 2010/0073084 to Hur et al. entitled "Systems and Methods for a Level-Shifting High-Efficiency LINC Amplifier using Dynamic Power Supply" and Asymmetric Multilevel Outphasing (AMO) Power Amplifiers (see, e.g., U.S. Patent Nos. 8,026,763 and 8,164,384 to Dawson et al. entitled "Asymmetric Multilevel Outphasing Architecture for RF Amplifiers" and "A 2.4-GHz, 27-dBm Asymmetric Multilevel Outphasing Power Amplifier in 65-nm CMOS" by Godoy et al., *IEEE Journal of Solid-State Circuits*, 2012). In the present application, dynamic selection from among a discrete set of voltage levels (or "level selection") is primarily discussed in the context of a single or multi-amplifier, multi-level power amplifier architecture (such as, for example, the power amplifier architecture used in RF transmitter 10 of Fig. 1). However, the level selection techniques discussed herein can also be used to improve performance in other architectures utilizing discrete voltage levels, including those enumerated above.

[0073] Level selection can be performed based upon the instantaneous output envelope value or, when processing digital data from which to synthesize the RF output, upon an individual digital sample to be synthesized. In one possible approach, the lowest discrete voltage level or levels may be used that are compatible with synthesizing the required instantaneous RF output in order to provide the highest instantaneous “drain” efficiency. In at least one embodiment, discrete voltage levels may be selected based upon a “window” of data to be transmitted, rather than a single sample or “instantaneous” value. In this manner, the number of level transitions that are used to synthesize a particular data stream can be reduced. In many cases, this technique may result in higher voltage levels being used than are absolutely necessary to synthesize a particular sample (thus reducing power amplifier “drain” efficiency). However, overall efficiency can be improved (or at least its degradation reduced) by mitigating the energy cost of transitioning among levels. Moreover, linearity (e.g., as measured by adjacent channel leakage ratio (ACLR) or adjacent channel power ratio (ACPR)), error vector magnitude (EVM), and other waveform quality metrics can be improved by reducing the number of level transitions required. This is because the system disturbance caused by transitioning levels on one or more PAs will typically have a cost in terms of the output trajectory, even though this can be compensated for using digital pre-distortion or other techniques.

[0074] In some embodiments, decisions may be made about the discrete voltage levels to apply based on one or more extended time periods, rather than relying solely on instantaneous conditions. In one approach, for example, a decision as to whether or not to change selected level(s) looks across a window of samples N_w long (e.g., from a current sample under consideration into the future, from a previous sample in the past through the current sample and for one or more samples into the future, etc.). Fig. 10 is a diagram illustrating such a sample window 220. These samples may be represented as I,Q data values, as amplitudes/phases of the desired outputs, as vector values to be synthesized, etc., or may simply represent the output power or voltage amplitudes desired. For the current sample 222, the system may only transition to a lower level or set of levels (i.e., providing a lower maximum power) if that lower level or set of levels

can provide sufficient output power over the whole window 220 of N_w samples. If more power delivery is needed for the current sample 222 than can be provided by the level/set of levels used in the previous sample 224, then a transition is made to a level/set of levels capable of providing sufficient power. Otherwise, the level/set of levels remains unchanged from the previous sample 224 to the current sample 222.

[0075] Using the above-described technique reduces the number of transitions by ensuring that a “downward” level transition only occurs if an “upward” transition won’t be necessary again in the near future. At the same time, an “upward” transition may always be used if needed to support the required output power during a given sample. It will be appreciated that many variations are possible which provide further reduction in number of transitions. For example, in one alternative approach, a decision may be made to make either an “upward” or a “downward” transition as long as it is certain that another transition will not be needed for at least a minimum number of samples (i.e., within a window of samples). In another alternative approach, if an “upward” transition is needed to support an output for less than a certain number of samples, that transition could be eliminated, and the power amplifiers driven to provide an output as close as possible to the desired output (during either the sample in question or averaged in some manner over multiple samples). This may reduce transitions, at the expense of some waveform quality degradation. If any of the above-described techniques are used, the input drives for the individual power amplifiers may be adjusted accordingly for the selected drain voltage levels in order to provide the desired total output. In some embodiments, a controller may be programmed or configured to be capable of selecting a voltage value for a power amplifier that is lower than required to generate a desired instantaneous output power level if the need for a higher voltage level is short in duration compared to the time duration of the window of data samples. In other embodiments, a controller may be programmed or configured to be capable of selecting a voltage value for a power amplifier that is higher than a minimum voltage sufficient to generate a desired instantaneous output power level if the duration of time for which a lower voltage

level is sufficient is short compared to the time duration of the window of data samples.

[0076] In some implementations, the above-described technique may be combined with other techniques including, for example, peak-to-average power ratio (PAPR) reduction techniques, techniques using hysteresis in the thresholds used to make level selection determinations, techniques that filter the data before and/or after the level-selection process, and/or others. In some implementations, the window lengths that are used with the above-described techniques may be dynamically and/or adaptively selected based on a performance criterion. In one approach, for example, the window lengths may be selected to maximize a combination of efficiency and output quality metrics.

[0077] To provide a better understanding of the operation and benefits of the amplifier architectures described herein, the performance of a single power amplifier (PA) having two different dc supply voltages will now be described. This power amplifier could represent any number of PA classes (e.g., A,AB,B,F, inverse F, etc.) and could also represent a composite amplifier comprising an aggregation of output from multiple smaller PAs operated together (e.g., a Doherty amplifier, outphasing amplifier, etc.) Fig. 12 is a plot showing the efficiency and (normalized) output power of a power amplifier as a function of normalized RF drive power at two different dc power supply levels (i.e., a lower dc supply, level 1, and a higher dc supply, level 2). It can be seen that for the level 2 dc supply, at a certain RF input power (0.1 normalized) the output power reaches a maximum saturated output power (1 normalized). The output power can be reduced to any value below this saturated maximum (i.e., "backing off" the output power) by reducing the RF input power. For low levels of RF input and output power, there is a nearly linear (proportional) relation between RF input power and RF output power. However, efficiency in this region is relatively low (e.g., below 40% for RF output powers below 0.25 normalized). The highest efficiency is found in regions of output power at or somewhat below the level at which output power saturates (e.g., efficiency above 70% for output power above 0.83 normalized). Increasing RF input power beyond the level that saturates the power amplifier, however, actually reduces efficiency. This occurs because total input power = dc plus RF =

increases but output power does not increase (and in some cases can decrease with further increase in RF input power).

[0078] The power and efficiency for the lower voltage dc supply (level 1) is now considered. In this case, the maximum saturated output power is much lower than for the higher-voltage (level 2) dc supply (e.g., reaching a maximum output power of only 0.25 normalized). The output power can again be adjusted between zero and this lower maximum value by adjusting RF input power (e.g., backing off the output power by reducing the normalized input power to values below that which saturates the power amplifier), but higher output powers (above 0.25 normalized) are not obtainable at this supply level. It should be noted that for values of output power that can be reached at this lower supply level, higher efficiency is achieved using the lower dc supply level 1 than for the higher dc supply level 2, because the power amplifier is operated closer to its saturated value. Thus, for low values of output power, it is generally desirable to use a lower supply voltage value, so long as the desired output power is achievable and the desired level of linearity and controllability of the power amplifier is achievable.

[0079] The variation in efficiency with a given dc voltage supply level is a motivation for power amplifier systems such as "Class G," that switch the power amplifier dc supply among different levels depending on the desired RF output power level. Selecting from multiple dc supply values such that the power amplifier operates at as high an efficiency as possible while being able to provide the desired RF output power can yield significant improvements in efficiency over that achieved with a single supply level.

[0080] Fig. 13 includes two IQ plots illustrating the achievable RF outputs in terms of the output RF amplitude (i.e., phasor length, or RF voltage amplitude) for two different supply levels. For a given supply level, there is an RF output amplitude (proportional to the square root of RF output power) that may be specified as a maximum for that supply level. This maximum amplitude may be that corresponding to the absolute maximum saturated output power (under complete compression) for that supply level, as illustrated in Fig. 12, or may be a level somewhat below this. One may limit the maximum amplitude and power to

somewhat slightly lower than those for complete saturation to simplify predistortion of drive signals (for linearization), to account for part-to-part variations in absolute maximum power, to place the specified maximum level in a desirable location on the efficiency vs. output characteristic, or for other reasons. As illustrated in Fig. 13, with the higher supply level, any RF output voltage vector having an amplitude less than or equal to the radius of the circle labeled L2 can be synthesized. With the lower supply level, one can synthesize any RF output voltage vector having an amplitude less than or equal to the radius of the circle labeled L1.

[0081] To exploit the availability of multiple supply voltages to achieve increased efficiency, one may dynamically switch between the two supply levels. One way to do this is to switch supply levels based on the amplitude of the RF output vector being synthesized at any given time, such that the higher supply level is utilized whenever the desired output amplitude is between L1 and L2, and the lower supply level whenever the desired output amplitude is at or below L1. Using this approach, leads to the efficiency vs. normalized output power characteristic shown in Fig. 14.

[0082] In at least one embodiment, the signal to be synthesized is considered over a longer interval (e.g., a window including multiple future digital samples) and level switching is managed based on the moving window of data. For example, this may be done in a way that ensures that the desired instantaneous output amplitude can always be synthesized, but switch down to the lower supply level only if the desired output signal amplitude will remain at a level at or below L1 for a minimum duration. Amplitude or time hysteresis or other constraints can likewise be put into level switching decisions. For example, one may require that once a switching transition is made, no other transition will be made for a specified interval. Moreover, while this is illustrated for two power supply levels, the approach may be easily extended to an arbitrary number of supply levels. The length of the window used could be preselected, or could be dynamically selected based on one or more of a range of factors including output power levels (short or long term), channel characteristics, data bandwidth, signal statistics, transmit data, etc. Likewise, one could select the power supply levels based on the

contents of a block of samples at a time, where the block length is fixed or dynamically selected.

[0083] An important consideration in the above discussion is that instantaneous efficiency is higher for operating points where the length of the synthesized vector is close to the maximum achievable amplitude radius. From this perspective, it is desirable to operate from the lowest supply for which the desired output can be synthesized. However, as there is an energy cost to switching between levels (e.g., owing to capacitor charging loss and switching loss of transistors setting the supply), it may be beneficial to overall system efficiency to use a higher-than-necessary supply level to synthesize an output over a short duration, if the energy cost of switching back and forth between levels is greater than that saved by using a lower supply level over that duration. Moreover, there is also a cost to linearity associated with switching among levels, in terms of noise injected to the output and loss of linearity owing to temporary disturbance of the power amplifier each time a level transition is made. Even if there is an overall efficiency penalty, one may choose to operate from a higher supply level than necessary to synthesize a particular output over a short duration if it reduces the number of supply transitions necessary, in order to improve linearity. One may also choose not to briefly step up a power supply level for a short duration, even if the desired instantaneous power does not get synthesized (possibly briefly clipping the peak of the signal), owing to the loss and noise injection penalty of switching between levels. The impact of level transitions on both efficiency and linearity may thus be considered as factors in selecting what level to use in a particular interval.

[0084] Further advantage may be attained in some embodiments by combining power from multiple power amplifiers (see, e.g., system 10 of Fig. 1). In one multiple power amplifier embodiment, there may be, for example, two power amplifiers that can each be supplied from two different (nonzero) supply voltages and an isolating power combiner to combine the output signals of the amplifiers in an isolating fashion. The voltage vector at the output port of the power combiner is a weighted sum of the output voltage vectors of the two individual power amplifiers. Likewise, a 2-way isolating combiner may produce an isolation voltage

vector at the combiner isolation port that is a weighted difference of the two individual power amplifiers. The total energy delivered by the power amplifiers to the combiner is ideally delivered to either the output port (e.g., to be transmitted) or to the isolation port (e.g., where it may be dissipated in an isolation resistor, recovered via an energy recovery system, or transmitted via a second transmission path). For example, if the output phasor vectors of the individual PAs are V_1 , V_2 , the output port of the power combiner may produce a sum vector:

$$\Sigma = V_{\text{out}} = V_1 + V_2$$

and the isolation port of the combiner may produce a difference vector:

$$\Delta = V_{\text{iso}} = V_1 - V_2$$

As is known in the art, for an isolating combiner, the input impedances at the combiner inputs and the impedances of the loads at the output and isolation ports scale such that energy is conserved, as described above.

[0085] Because energy delivered to the isolation port is usually lost, it is usually desirable to synthesize the desired output voltage vector while minimizing the amplitude of the voltage vector at the isolation port. One may thus select the power supply levels, amplitudes and phases of the two power amplifiers to deliver the desired output while putting small (and preferably the minimum) power into the isolation port. Alternatively, if the signal to be provided at the isolation port is to be transmitted rather than dissipated, it may be desirable to control the supply voltages and PA input amplitudes such that the desired signals are synthesized at both the output and isolation ports while providing maximum overall efficiency of delivering energy to the two ports.

[0086] Fig. 15 is an IQ plot illustrating achievable output signal ranges for a 2-amplifier system where each power amplifier is supplied from one of two supply levels. This is illustrated as regions on the IQ diagram in terms of the output RF amplitude (phasor length, or RF voltage amplitude). As illustrated, each power

amplifier can generate an RF output with a maximum amplitude that depends on the power supply level selected for that amplifier. If both PAs are supplied using a higher voltage L2, an RF output vector anywhere inside the circle labeled L2/L2 can be synthesized, with this maximum achieved when the two individual PA vectors are in phase and at their specified maximum amplitudes for that supply level. If one PA is supplied at the higher voltage level and the other at the lower voltage level, an RF output vector anywhere inside the circle labeled L2/L1 can be synthesized, with this maximum achieved when the two individual PA vectors are in phase and each at their specified maximum amplitudes for their supply levels. At this maximum amplitude, nonzero output is delivered to the isolation port of the combiner, since there is a nonzero difference between the PA outputs. If both PAs are supplied at the lower voltage level, an RF output vector anywhere inside the circle labeled L1/L1 can be synthesized. Lastly, if only one PA, supplied at the lower voltage level drives the combiner (e.g., with the drive amplitude of the second PA set to zero and/or the power supply for the second PA set to zero), then a vector anywhere inside the circle labeled L1/- can be synthesized. Again, there is nonzero output delivered to the isolation port for this case if the combiner is isolating. An additional circle with only one PA supplied at the higher supply voltage level driving the combiner will also typically exist. However, operation within this circle will usually be less efficient than the other options. The above-described techniques may be extended for use within systems having more than two PAs, systems having more than two nonzero supply levels, systems using other types of power combiners, and/or a combination of the above.

[0087] Fig. 16 is an IQ plot illustrating operation of an Asymmetric Multilevel Outphasing (AMO) based amplification system that includes two-power amplifiers and two power supply levels. Each of the power amplifiers may be operated at a specified maximum output amplitude (with respect to the power supply voltage used by each amplifier) such that the efficiency of each PA can be high. To modulate output power, the two PAs may be outphased (or phase shifted) such that the sum vector has the desired amplitude and phase. With an isolating combiner, there may be some dissipation associated with the difference vector sent to the isolation port. By changing the power supply levels depending upon

the desired output amplitude, one can keep the amplitude of the difference vector small, maintaining high efficiency.

[0088] In at least one embodiment, multiple power amplifiers may be controlled such that they synthesize individual output vectors that are in phase, but with amplitudes that may be different (and selecting among different supply levels) depending upon desired output. That is, for a given supply level selection for the two PAs, there is an achievable output amplitude maximum, which is reached by operating the two PAs at their achievable maximum. One can reduce the output below this by backing off one or both PAs below their achievable maximum. While backing off the PAs reduces PA efficiency, keeping the PAs in phase keeps the amplitude at an isolation port small, which can provide enhanced efficiency. More generally, depending on the combiner type, keeping the two PA outputs having a specified fixed phase relationship provides low isolation port loss and enhanced efficiency. In one approach, the lowest supply level set may be utilized that will enable the desired output to be achieved, and the drive of one or both PAs will then be backed off to reduce power for output amplitudes above that achievable with the next lower supply level set. This keeps the PAs operated at or close to their achievable maximum while minimizing the output at the isolation port. Fig. 17 is an IQ plot illustrating this approach. Fig. 18 is a series of plots illustrating how power amplifier drive levels and supply levels may be adjusted to control output power over an output power range in accordance with an embodiment. As shown, peaks in efficiency may be attained through judicious supply level selection as a function of power, and good efficiency may be maintained over a wide output power range.

[0089] In some embodiments, both backoff and outphasing techniques may be combined in a power amplification system to reduce output amplitude below an achievable maximum with a given set of supply voltages, as illustrated in Fig. 15. In this case, for each supply level set and output amplitude, a combination of backoff and outphasing can be selected to provide desirable tradeoffs between efficiency and linearity. Moreover, at very low power, one of the power amplifiers may be completely turned off and the other amplifier may be operated under backoff alone. It should also be appreciated that the combination of outphasing

and backoff of the individual power amplifiers can be used to provide further control features. For example, instead of a difference vector being delivered to an isolation port to be dissipated, the “isolation port” can be connected to a second output for RF transmission (i.e., for a multi-output system). By controlling both backoff and outphasing of the two amplifiers, desired outputs can be provided at both the output port (first output) and the isolation port (second output) while preserving high efficiency.

[0090] In some embodiments, multiple different types of power amplifiers, or power amplifiers optimized for different characteristics, may be used within a power amplification system. The parameters of the system may then be controlled to best utilize the two types or characteristics of power amplifiers. For example, it may be desirable to optimize a first power amplifier for operation near its achievable maximum (e.g., a switched-mode or saturated power amplifier) and a second power amplifier for operation with good efficiency under a range of backoff (e.g., using a Doherty power amplifier or chireix outphasing power amplifier). In this case, one may control the system such that the first power amplifier usually operates at or near its achievable maximum, while the second regulates the output amplitude by backing off from its maximum. Different output power regions can further be covered by appropriately switching the supply levels of the power amplifier, with the second power amplifier operated at the higher of the supply levels if the supply levels are not the same. At the lowest output levels, the first power amplifier may be turned off, and the output controlled only with the second power amplifier.

[0091] In some embodiments, as described above, more than two power amplifiers may be used to generate a transmit signal in an RF transmitter. For example, Fig. 3 is a block diagram illustrating an RF transmitter 50 that includes at least four power amplifiers in accordance with an embodiment. As illustrated, RF transmitter 50 may include: a controller 52; first, second, third, and fourth digital to RF modulators 54, 56, 58, 60; first second, third, and fourth power amplifiers 62, 64, 66, 68; a power combiner 70; and a voltage control unit 72. As before, one or more antennas 32 may be coupled to an output of combiner 70. Voltage control unit 72 may provide variable supply voltages $V_1(t)$, $V_2(t)$, $V_3(t)$, $V_n(t)$ to first,

second, third, and fourth power amplifiers 62, 64, 66, 68, respectively, based on one or more control signals from controller 52. First, second, third, and fourth digital to RF modulators 54, 56, 58, 60 provide RF input signals to first, second, third, and fourth power amplifiers 62, 64, 66, 68, respectively based on input information received from controller 52. Combiner 70 combines the output signals of first, second, third, and fourth power amplifiers 62, 64, 66, 68 to generate an RF transmit signal for delivery to antenna(s) 32.

[0092] Controller 52 may use any of the control techniques described above in various embodiments. In some implementations, controller 52 may use the voltage control of voltage control unit 72 and the phase and amplitude information delivered to first, second, third, and fourth digital to RF modulators 54, 56, 58, 60 to ensure that transmit data is accurately represented within the RF output signal of combiner 70. In addition, controller 52 may use amplitude information delivered to first, second, third, and fourth digital to RF modulators 54, 56, 58, 60 to control/adjust an output power level of combiner 70 (e.g., a transmit power level, etc.). In some embodiments, this output power control capability may be used to provide power backoff for RF transmitter 50. As in previous embodiments, an energy recovery module 30 may be provided to recover energy at an isolation port of combiner 70 when an isolating combiner architecture is used.

[0093] In at least one embodiment, an RF transmitter may be provided that includes a single RF power amplifier. Fig. 4 is a block diagram illustrating an exemplary RF transmitter 80 that includes a single power amplifier in accordance with an embodiment. As shown, RF transmitter 80 includes: a controller 82, a digital to RF modulator 84, a power amplifier 86, and a voltage control unit 88. The output of power amplifier 86 may be coupled to one or more antennas 32 to facilitate the transmission of RF transmit signals to remote wireless entities. Voltage control unit 88 may provide a variable supply voltage $V(t)$ to power amplifier 86 based on a control signal from controller 82. Voltage control unit 88 may be configured to selectively supply one of a plurality of discrete voltages to power amplifier 86, and may supply the discrete voltage to the power amplifier via a transition shaping filter in some implementations. The transition shaping filter may, for example, comprise lossless filter elements, including inductors and

capacitors, and may further include lossy elements, such as resistors and magnetic beads. The transition shaping filter serves to provide shaping and/or bandwidth limitation of the voltage transitions between discrete levels and may provide damping of oscillations that might otherwise occur. The transition shaping filter may be selected to provide a low-pass filter response. Discrete voltage supply levels provided by voltage control unit 88 may be predetermined or may be adapted over time based on required average transmit power levels or other factors.

[0094] Digital to RF modulator 84 may provide an RF input signal to power amplifier 86 based on input information (e.g., I_1 , Q_1) received from controller 82. Controller 82 may use any of the control techniques described above in various embodiments. In some implementations, controller 82 may use the voltage control of voltage control unit 88 and the amplitude and phase information delivered to digital to RF modulator 84 to ensure that the transmit data is accurately represented within the RF output signal of RF transmitter 80. Controller 82 may use the amplitude information delivered to digital to RF modulator 84 to control/adjust an output power level of RF transmitter 80 (e.g., a transmit power level). As before, in some implementations, this output power control capability may be used to provide power backoff for RF transmitter 80.

[0095] Fig. 4A is a block diagram illustrating an exemplary RF transmitter 80A that includes a single power amplifier in accordance with an embodiment. The RF transmitter 80A is a specific embodiment of the transmitter 80 illustrated in Fig. 4. As shown, RF transmitter 80A includes: a controller 82A, a digital to RF modulator 84A, a power amplifier 86A, and a voltage control unit 88A. The output of power amplifier 86A may be coupled to one or more antennas 32A. Voltage control unit 80A includes: a supply select unit 241, a multilevel power converter 242, a switch unit 244, and a transition shaping filter 246. Multilevel power converter 242 is operative for generating a number of different voltage potentials (i.e., V_1 , V_2 , V_3 , V_4) on a plurality of corresponding voltage lines. Although illustrated with four different voltage levels, it should be appreciated that any number of different levels may be used in different embodiments. Switch unit 244 is capable of controllably coupling one of the plurality of voltage lines at a time to a

power supply input of power amplifier 86A. Supply select 241 is operative for switching switch unit 244 between different voltage lines in response to a switch control signal from controller 82A. In at least one embodiment, multilevel power converter 242 may be capable of adapting the voltage value on one or more of the voltage lines slowly over time to, for example, accommodate slow variations in a desired average output power. Transition shaping filter 246 is operative for shaping the transitions between voltage levels within the power amplifier supply voltage signal. In at least one implementation, the transition shaping filter 246 may include a low pass filter.

[0096] As described above, in some implementations, a voltage control unit or voltage control system may include a multi-output (or "multi-level") power converter to generate multiple voltages from a single input voltage. In one approach, a multi-output power converter may be implemented using a switched-capacitor circuit. A switched capacitor converter can provide very high power density for synthesizing multiple ratiometric voltages from a single voltage. Fig. 4B is a schematic diagram illustrating an exemplary switched capacitor converter circuit 300 in accordance with an implementation. The single input of this multiple-output converter may be fed directly from a source voltage or battery 302, or may be fed from another power converter that can adapt the input voltage to the multiple-output converter (and hence the multiple voltages) over time, including, for example, a buck converter, boost converter, and other magnetics-based converters. In some embodiments, a voltage control unit can operate by switching among different discrete supply levels and providing this switched supply directly to the power amplifier, as illustrated in Fig. 4C.

[0097] Figs. 4D and 4E are schematic diagrams illustrating two switching network architectures 310, 312 that may be used in power amplifier systems and RF transmitter systems in accordance with embodiments. These two architectures 310, 312 are both particularly well suited for use in low-power systems implemented in CMOS, but may also be used in other systems. In some implementations, both a switched-capacitor (SC) circuit and a switching network 310, 312 may be realized together on a single CMOS die. For higher-power systems, it may be advantageous to place a control circuit for switching an SC

circuit and/or the switching network on an integrated circuit. It should be appreciated that the switching network architectures 310, 312 of Figs. 4D and 4E represent two example architectures that may be used in some embodiments. Other switching network architectures may be used in other implementations.

[0098] As described above, in some embodiments, a supply voltage with switched discrete levels may be provided to a power amplifier through a transition shaping filter. The filter, which may be low-pass in nature, can limit the high frequency content of the PA supply voltage, provide shaping for the voltage transitions between levels, and provide damping for the transitions. This filter can also incorporate parasitic elements associated with the interconnect of the voltage control unit to the PA, and can be designed such that the frequency content of the supply voltage is matched to what may be adequately adjusted for in the PA drive waveform. Figs. 4F-4I are schematics illustrating some level-transition filter architectures that may be used in various embodiments. Other filter architectures may alternatively be used.

[0099] Fig. 5 is a block diagram illustrating an exemplary RF transmitter 100 in accordance with an embodiment. RF transmitter 100 is a specific implementation of RF transmitter 40 of Fig. 2. As illustrated, RF transmitter 100 includes: a controller 90; first and second digital to RF modulators 92, 94; first and second power amplifiers 96, 98; a voltage control unit 102; a power combiner 104; and an energy recovery module 120. In the illustrated implementation, voltage control unit 102 includes: a multi-level power converter 106; first and second switch units 108, 110; first and second supply selects 112, 114; and first and second transition shaping filters 116, 118. Multi-level power converter 106 is operative for generating a number of different voltage potentials (i.e., V_1 , V_2 , V_3 , V_4) on a plurality of corresponding voltage lines. Although illustrated with four different voltage levels, it should be appreciated that any number of different levels may be used in different embodiments. First and second switch units 108, 110 are each capable of controllably coupling one of the plurality of voltage lines at a time to a power supply input of a corresponding power amplifier 96, 98. First and second supply selects 112, 114 are operative for switching the first and second switch units 108, 110 between the different voltage lines in response to switch control

signals $S_1(t)$, $S_2(t)$ received from controller 90. In at least one embodiment, multilevel power converter 106 may be capable of adapting the voltage values on the plurality of voltage lines slowly over time to, for example, accommodate slow variations in a desired average output power. First and second transition shaping filters 116, 118 are operative for shaping the transitions between voltage levels within each power amplifier supply voltage signal. In at least one implementation, one or both of the transition shaping filters 116, 118 may include a low pass filter. In some implementations, transition shaping filtration is not used.

[00100] As shown in Fig 6, controller 90 may provide a time varying amplitude value and a time varying phase value to each of the digital to RF modulators 92, 94. That is, controller 90 may provide $A_1(t)$, $\theta_1(t)$ to first digital to RF modulator 92 and $A_2(t)$, $\theta_2(t)$ to second digital to RF modulator 94. As described previously, in some implementations, the amplitude and phase information may be specified using time varying I and Q data (or some other format), rather than amplitude and phase values.

[00101] Fig. 6 is a schematic diagram illustrating an exemplary voltage control unit 122 in accordance with an embodiment. As illustrated, voltage control unit 122 may include: first and second multi-level power converters 123, 124; first and second switch units 126, 128; and first and second supply selects 130, 132. First multi-level power converter 123, first switch unit 126, and first supply select 130 may be used to vary a supply voltage of a first power amplifier of an RF transmitter and second multi-level power converter 124, second switch unit 128, and second supply select 132 may be used to vary a supply voltage of a second power amplifier of the RF transmitter. First and second switch units 126, 128 and first and second supply selects 130, 132 may operate in substantially the same manner as the corresponding units described above.

[00102] As illustrated in Fig. 6, first multi-level power converter 123 may generate a first plurality of voltage levels (i.e., V_1 , V_2 , V_3 , V_4) on a first plurality of voltage lines 134 and second multi-level power converter 124 may generate a second plurality of voltage levels (i.e., V_5 , V_6 , V_7 , V_8) on a second plurality of voltage lines 136. In some embodiments, the voltage levels on the first plurality of

voltage lines 134 may be the same as the voltage levels on the second plurality of voltage lines 136. In other embodiments, they may be different. As described previously, in some embodiments, different power amplifier designs may be used for the multiple different power amplifiers within an RF transmitter. These different power amplifier designs may require different discrete voltage levels for optimal performance. In the embodiment depicted in Fig. 6, the same number of voltage levels are provided for the first and second power amplifier. In some other embodiments, different numbers of voltage levels may be used for different power amplifiers.

[00103] In some implementations, first and second multi-level power converters 123, 124 may each be capable of adapting corresponding output voltage levels over time. As described above, this may be performed to, for example, accommodate slow variations in a desired average output power level. In at least one implementation, first and second multi-level power converters 123, 124 may each include a control input 138, 140 to receive a control signal from a corresponding controller (not shown) indicating when such adaptation is to take place and/or values to use for the new voltage levels.

[00104] Fig. 7 is a schematic diagram illustrating an exemplary voltage control unit 160 in accordance with an embodiment. As illustrated, voltage control unit 160 may include: first, second, third, and fourth power supplies 162, 164, 168, 170; first and second switch units 170, 172; and first and second supply selects 174, 176. First, second, third, and fourth power supplies 162, 164, 168, 170 may each be operative for generating a unique supply potential on a corresponding output line. First and second switch units 170, 172 may each be capable of controllably coupling one of the supply potentials at a time to a power supply input of a corresponding power amplifier. First and second supply selects 174, 176 are operative for switching the first and second switch units 170, 172 between the different supply potentials in response to switch control signals $S_1(t)$, $S_2(t)$ received from a corresponding controller. In some implementations, first, second, third, and fourth power supplies 162, 164, 168, 170 may each adapt its output voltage value slowly over time to, for example, accommodate slow variations in desired average output power level. In at least one embodiment, first, second,

third, and fourth power supplies 162, 164, 168, 170 each comprise a battery or are synthesized from a single source using a multi-output switched capacitor converter. Although illustrated with four power supplies 162, 164, 168, 170, it should be appreciated that any number of different power supplies may be used in a particular implementation.

[00105] Figs. 8 and 9 are flow diagrams illustrating processes for operating RF transmitters in accordance with various embodiments.

[00106] The rectangular elements (typified by element 182 in Fig. 8) are herein denoted "processing blocks" and may represent computer software instructions or groups of instructions. It should be noted that the flow diagrams of Figs. 8 and 9 represent exemplary embodiments of designs described herein and variations in such diagrams, which generally follow the processes outlined, are considered to be within the scope of the concepts, systems, and techniques described and claimed herein.

[00107] Alternatively, the processing blocks may represent operations performed by functionally equivalent circuits, such as a digital signal processor circuit, an application specific integrated circuit (ASIC), a field programmable gate array (FPGA), or conventional electrical or electronic systems or circuits. Some processing blocks may be manually performed, while other processing blocks may be performed by circuitry and/or one or more processors. The flow diagrams do not depict the syntax of any particular programming language. Rather, the flow diagrams illustrate the functional information one of ordinary skill in the art may require to fabricate circuits and/or to generate computer software or firmware to perform the corresponding processing. It should be noted that many routine program elements, such as initialization of loops and variables and the use of temporary variables, are not shown. It will be appreciated by those of ordinary skill in the art that unless otherwise indicated herein, the particular sequences described are illustrative only and can be varied without departing from the spirit of the concepts described and/or claimed herein. Thus, unless otherwise stated, the processes described below are unordered meaning that, when possible, the

sequences shown in Figs. 8 and 9 can be performed in any convenient or desirable order.

[00108] Referring now to Fig. 8, a method 180 for operating an RF transmitter having at least two digital-to-RF modulators driving at least two power amplifiers will be described. First, transmit data may be obtained that is intended for transmission to one or more remote wireless entities (block 182). The transmit data may be used to provide input information for the at least two digital-to-RF modulators to control amplitudes and phases of output signals of the modulators (block 184). The input information generated for the at least two digital-to-RF modulators may be different for different modulators. The output signals of the at least two digital-to-RF modulators may then be delivered to corresponding inputs of the at least two power amplifiers of the RF transmitter (block 186).

[00109] The transmit data may also be used to select supply voltages for each of the at least two power amplifiers (block 188). The output signals of the at least two power amplifiers may be combined to generate a transmitter output signal for the RF transmitter (block 190). Any of the control techniques described herein may be used to generate the input information for the at least two digital-to-RF modulators and to select the supply voltages for the at least two power amplifiers. The transmitter output signal may be delivered to one or more antennas to be transmitted into a wireless channel (block 192). In at least one implementation, the input information generated for each digital-to-RF modulator may be representative of both an amplitude value and a phase value. The amplitude value and the phase value will typically vary with time (i.e., they can change from sample to sample). In at least one implementation, I and Q values may be provided for each of the at least two digital-to-RF modulators. In some other implementations, time varying amplitude and phase values may be provided. As described above, different input information may be generated for each of the at least two digital-to-RF modulators.

[00110] In at least one approach, the amplitude and phase values provided for the at least two digital-to-RF modulators and the supply voltages selected for the at least two power amplifiers may be selected in a manner that results in an

accurate representation of the transmit data within the RF output signal of the RF transmitter. The amplitude values generated for the at least two digital-to-RF modulators may be selected to control or adjust an output power level of the RF transmitter in some embodiments. In one approach, the amplitude values may be selected to achieve a desired level of power backoff within the RF transmitter.

[00111] Fig. 9 is a flow diagram illustrating a method 200 for operating an RF transmitter having a single digital-to-RF modulator and a single power amplifier. Transmit data is first obtained that is intended for transmission to one or more remote wireless entities (block 202). The transmit data may be used to generate input information for the digital-to-RF modulator to control an amplitude and phase of an output signal of the modulator (block 204). The amplitude of the output signal of the modulator may be controlled in order to achieve a desired transmit power level for the RF transmitter. The output signal of the digital-to-RF modulator may be delivered to a corresponding input of the power amplifier of the RF transmitter (block 206).

[00112] The transmit data may also be used to select a supply voltage for the power amplifier (block 208). Any of the control techniques described herein may be used to generate the input information for the single digital-to-RF modulator and to select the supply voltage for the single power amplifier. The output signal of the power amplifier may be coupled to one or more antennas for transmission into a wireless channel (block 210). In at least one implementation, the input information delivered to the digital-to-RF modulator may be representative of both an amplitude value and a phase value. In at least one approach, the phase value generated for the digital-to-RF modulator and the supply voltage selected for the power amplifier may be selected in a manner that provides an accurate representation of the transmit data at an output of the RF transmitter. The amplitude value generated for the digital-to-RF modulator may be selected to control or adjust an output power level of the RF transmitter. In one approach, this power control capability may be used to achieve a desired level of power backoff for the RF transmitter.

[00113] Fig. 11 is a flow diagram illustrating a method 230 for selecting voltage levels for one or more power amplifiers of a power amplification system based on a window of samples in accordance with an embodiment. As described previously, Fig. 10 is a diagram illustrating such a sample window 220. The method 230 may be used, for example, within the methods 180, 200 of Figs. 8 and 9 (e.g., in block 188 and block 208, respectively). As shown in Fig. 11, it may first be determined whether N_W current and future samples can use a lower set of voltage levels than a previous sample and still meet output power requirements (block 232). If so (block 232-Y), then a new set of voltage levels may be selected that are as low as possible (or at least lower than the previous sample) to support all N_W current and future samples (block 234). If the N_W samples cannot use a lower set of voltage levels than the previous sample, it may next be determined whether the set of voltage levels used for the previous sample is sufficient to support the current sample (block 236). If not (block 236-N), then a new set of voltage levels may be selected that are as low as possible to support the current sample (block 238). If the set of voltage levels used for the previous sample is sufficient to support the current sample (block 236-Y), then the same level selection may be used for the current sample that was used for the previous sample. This process may be repeated for each new sample.

[00114] In the description above, various concepts, circuits, and techniques are discussed in the context of RF transmitters that are operative for transmitting signals via a wireless medium. It should be appreciated that these concepts, circuits, and techniques also have application in other contexts. For example, in some implementations, features described herein may be implemented within transmitters or drivers for use in wireline communications. In some other implementations, features described herein may be implemented within other types of systems that require highly efficient and highly linear power amplification for data carrying signals. In other implementations, features described herein may be applied to systems that require linear power amplification for audio applications, for ultrasonic applications, and in RF power amplification for heating, industrial processing, imaging, and RF power delivery.

[00115] Having described exemplary embodiments of the invention, it will now become apparent to one of ordinary skill in the art that other embodiments incorporating their concepts may also be used. The embodiments contained herein should not be limited to disclosed embodiments but rather should be limited only by the spirit and scope of the appended claims. All publications and references cited herein are expressly incorporated herein by reference in their entirety.

What is claimed is:

1. A radio frequency (RF) power amplifier system, comprising:
 - an RF power amplifier;
 - a digital-to-RF modulator to generate an RF input signal for the RF power amplifier based on input information indicative of amplitude values and phase values;
 - a voltage control unit to provide a variable supply voltage to the RF power amplifier in response to a control signal, the variable supply voltage being selected from a plurality of discrete voltage levels; and
 - a controller to provide the input information to the digital-to-RF modulator and the control signal to the voltage control unit based, at least in part, on data to be transmitted from the RF transmitter, the controller being configured to make decisions about voltage level changes for the RF power amplifier based, at least in part, on a window of data samples representing data to be transmitted by the RF transmitter.
2. The RF power amplifier system of claim 1, wherein:
 - the controller is configured to select amplitude and phase values for the digital-to-RF modulator and voltage values for the RF power amplifier to generate an accurate representation of the transmit data within an output signal of the RF power amplifier system.
3. The RF power amplifier system of claim 1, wherein the controller is configured to select a discrete voltage level for a current data sample based, at least in part, on a voltage level selected for at least one previous sample, the current data sample, and at least one future data sample.
4. The RF power amplifier system of claim 3, wherein the voltage control unit includes a transition shaping filter to filter a voltage signal applied to the power amplifier.

5. The RF power amplifier system of claim 1, wherein:

the controller is configured to make voltage level change decisions for the power amplifier in a manner that achieves efficient power amplifier operation with a reduced number of voltage level transitions.

6. The RF power amplifier system of claim 1, wherein:

the controller is capable of adapting the length of the window of data samples over time based on a predetermined amplifier performance criterion.

7. The RF power amplifier system of claim 1, wherein:

the window of data samples has a fixed length.

8. The RF power amplifier system of claim 1, wherein:

the controller is configured to adapt one or more values of the plurality of discrete voltage levels used by the voltage control unit over time.

9. The RF power amplifier system of claim 1, wherein, to determine a voltage level for use by the power amplifier for a current sample, the controller is configured to:

if all samples in the window of data samples can use a lower voltage level than was used for a previous sample to achieve a desired output power, select a new voltage level that is lower than that used for the previous sample for use with the current sample.

10. The RF power amplifier system of claim 9, wherein, to determine a voltage level for use by the power amplifier for a current sample, the controller is further configured to:

if all samples in the window of data samples cannot use a lower voltage level than the previous sample to achieve a desired output power:

if the voltage level used for the previous sample is sufficient for use with the current sample, use the voltage level used for the previous sample for the current sample; and

if the voltage level used for the previous sample is not sufficient for use with the current sample, select a new voltage level for the current sample.

11. The RF power amplifier system of claim 1, wherein:

the controller is capable of selecting a voltage value for the power amplifier that is lower than required to generate a desired instantaneous output power level if the need for a higher voltage level is short in duration compared to the time duration of the window of data samples.

12. The RF power amplifier system of claim 1, wherein:

the controller is capable of selecting a voltage value for the power amplifier that is higher than a minimum voltage sufficient to generate a desired instantaneous output power level if the duration of time for which a lower voltage level is sufficient is short compared to the time duration of the window of data samples.

13. The RF power amplifier system of claim 1, wherein:

the RF power amplifier is a first RF power amplifier; and

the RF power amplifier system further comprises:

at least one additional RF power amplifier; and

a combiner to combine the output signals of the first RF power amplifier and the at least one additional RF power amplifier.

14. A machine implemented method for operating an RF transmitter having a digital-to-radio frequency (RF) modulator driving a power amplifier, the method comprising:

obtaining transmit data to be transmitted from the RF transmitter;

providing input information for the digital-to-RF modulator based, at least in part, on the transmit data, the input information to control an amplitude and a phase of an RF output signal of the digital-to-RF modulator; and

selecting a supply voltage for the power amplifier based, at least in part, on the transmit data, wherein selecting a supply voltage includes making decisions about voltage level changes for the RF power amplifier based, at least in part, on a window of data samples representing data to be transmitted by the RF transmitter.

15. The method of claim 14, further comprising:

delivering an output signal of the power amplifier to one or more antennas for transmission.

16. The method of claim 14, further comprising selecting a discrete supply voltage level for a current data sample based, at least in part, on a voltage level selected for at least one previous sample, the current data sample, and at least one future data sample.

17. The method of claim 16, wherein:

the amplitude of the RF output signal of the digital-to-RF modulator and the selection of the discrete supply voltage level are controlled to achieve a desired instantaneous output power of the RF transmitter.

18. The method of claim 14, wherein selecting a supply voltage for the power amplifier comprises:

if all samples in the window of samples can use a lower voltage level than a previous sample to achieve a desired output power, selecting a new voltage level that is lower than that used for the previous sample.

19. The method of claim 18, wherein selecting a supply voltage for the power amplifier further comprises:

if all samples in the window of samples cannot use a lower voltage level than the previous sample to achieve the desired output power:

if the voltage level used to support the previous sample is sufficient for use with a current sample, continue using the voltage level used to support the previous sample for the current sample; and

if the voltage level used to support the previous sample is not sufficient for use with the current sample, selecting a new voltage level that is sufficient for use with the current sample.

20. The method of claim 18, wherein:

selecting a new voltage level that is lower than that used for the previous sample to support all samples includes selecting a new voltage level that is as low as possible and still capable of generating desired instantaneous output power levels for all samples in the window.

21. The method of claim 18, wherein:

selecting a new voltage level that is sufficient for use with the current sample includes selecting a new voltage level that is as low as possible to generate a desired instantaneous output power level for the current sample.

22. An apparatus comprising a computer readable medium having instructions stored thereon that, when executed by a computer, perform a method for operating an RF transmitter having a digital-to-radio frequency (RF) modulator driving a power amplifier, the method comprising:

obtaining transmit data to be transmitted from the RF transmitter;

providing input information for the digital-to-RF modulator based, at least in part, on the transmit data, the input information to control an amplitude and a phase of an RF output signal of the digital-to-RF modulator; and

selecting a supply voltage for the power amplifier based, at least in part, on the transmit data, the supply voltage being selected from a plurality of discrete voltage levels, wherein selecting a supply voltage includes making a decision

about supply voltage level for the RF power amplifier based, at least in part, on a window of data samples representing data to be transmitted by the RF transmitter.

23. The apparatus of claim 22, wherein:

selecting a supply voltage for the power amplifier includes selecting a discrete supply voltage level for a data sample based, at least in part, on the data sample, at least one subsequent data sample, and a voltage level selected for at least one previous sample.

24. The apparatus of claim 22, wherein:

providing input information for the digital-to-RF modulator includes providing input information that controls an amplitude of an RF output signal of the digital-to-RF modulator in a manner that achieves a desired power level at an output of the RF transmitter.

25. The apparatus of claim 22, wherein:

selecting a supply voltage for the power amplifier is performed in a manner that achieves efficient power amplifier operation with a reduced number of voltage level transitions.

26. The apparatus of claim 22, wherein the method further comprises:

adapting a length of the window of data samples over time based on a predetermined criterion.

27. The apparatus of claim 22, wherein:

the window of data samples has a fixed length.

28. A machine implemented method for selecting a voltage level for a power amplifier within a radio frequency (RF) transmitter based on input data to be

transmitted, the voltage level being selected from a plurality of discrete voltage levels, the method comprising:

identifying a window of samples to be transmitted from the transmitter; and
if all samples in the window of samples can use a lower voltage level than a previous sample to achieve a desired instantaneous output power, selecting a new voltage level that is lower than that used for the previous sample.

29. The machine implemented method of claim 28 further comprising:

if all samples in the window cannot use a lower voltage level than the previous sample to achieve the desired output power:

if the voltage level used for the previous sample is sufficient for use with a current sample, using the voltage level used for the previous sample for the current sample; and

if the voltage level used for the previous sample is not sufficient for use with the current sample, selecting a new voltage level that is sufficient for use with the current sample.

30. The method of claim 28, wherein:

selecting a new voltage level that is lower than that used for the previous sample includes selecting a new voltage level that is as low as possible to support all samples in the window.

31. The method of claim 28, wherein:

selecting a new voltage level that is sufficient for use with the current sample includes selecting a new voltage level that is as low as possible for use with the current sample.

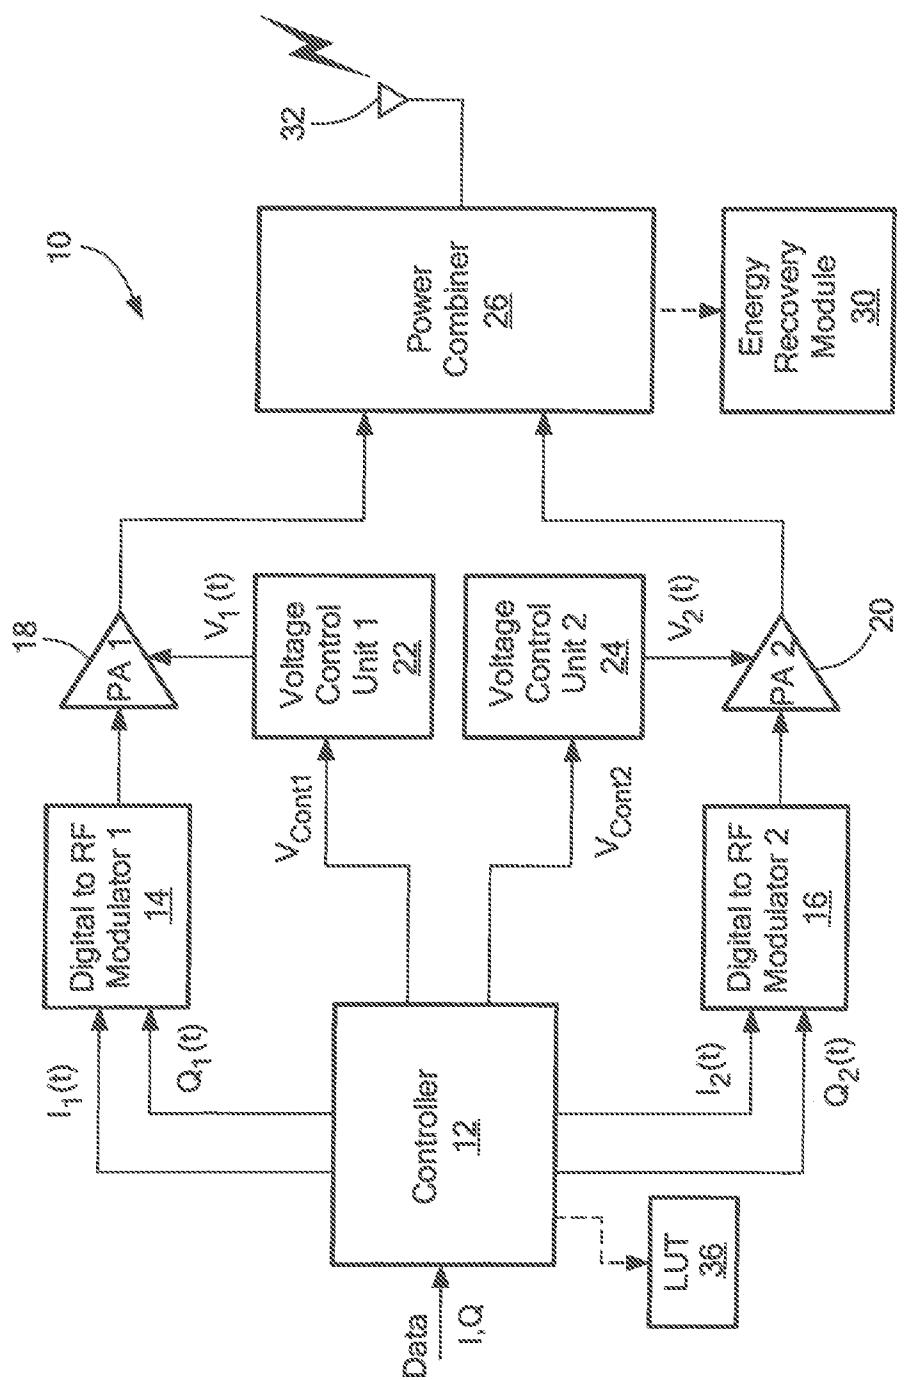


FIG. 1

2/21

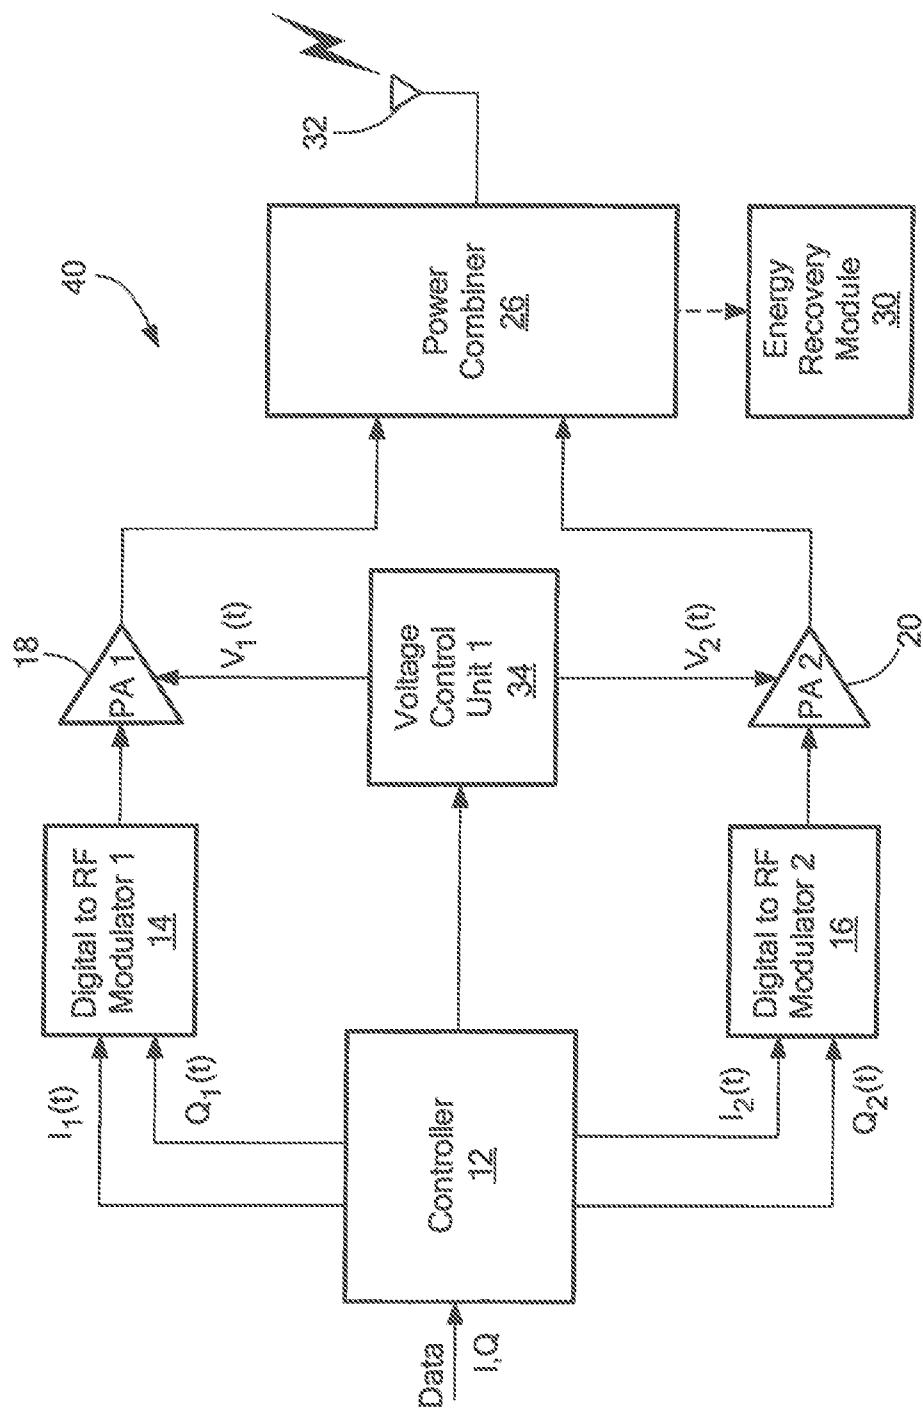


FIG. 2

3/21

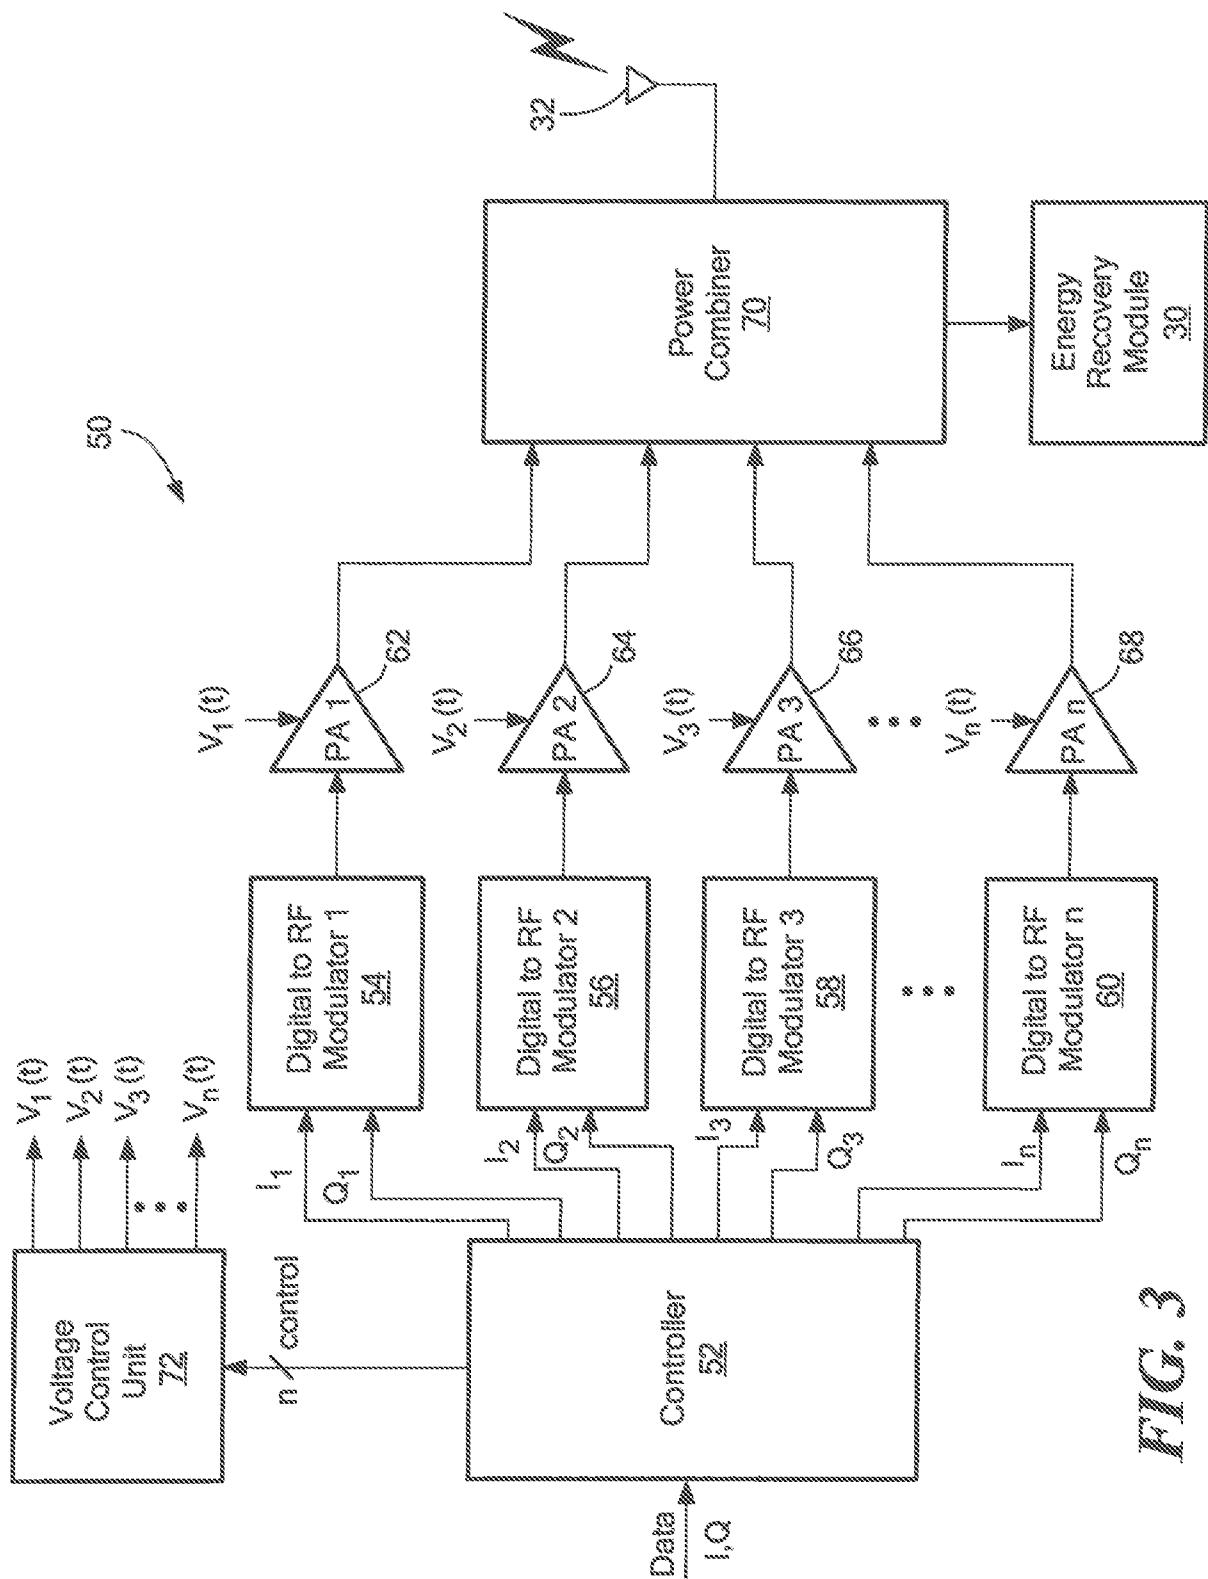
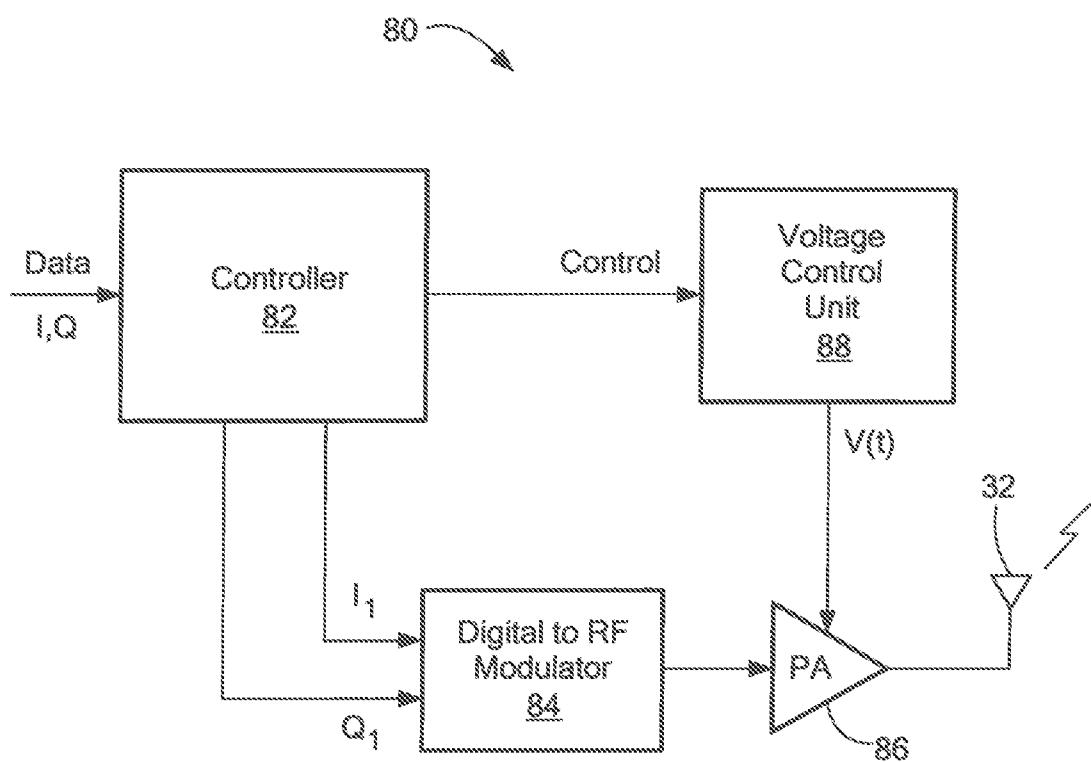
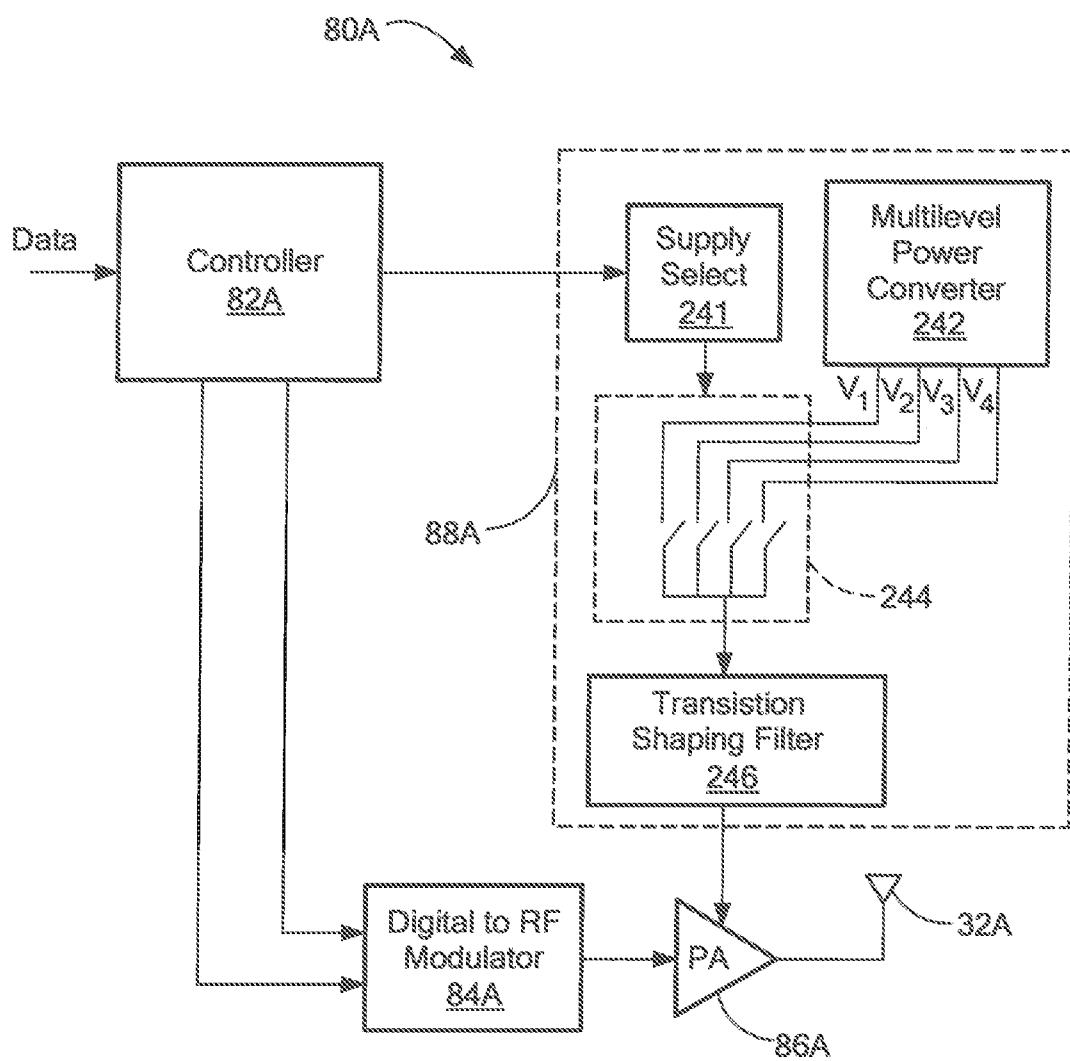


FIG. 3

4/21

**FIG. 4**

5/21

**FIG. 4A**

6/21

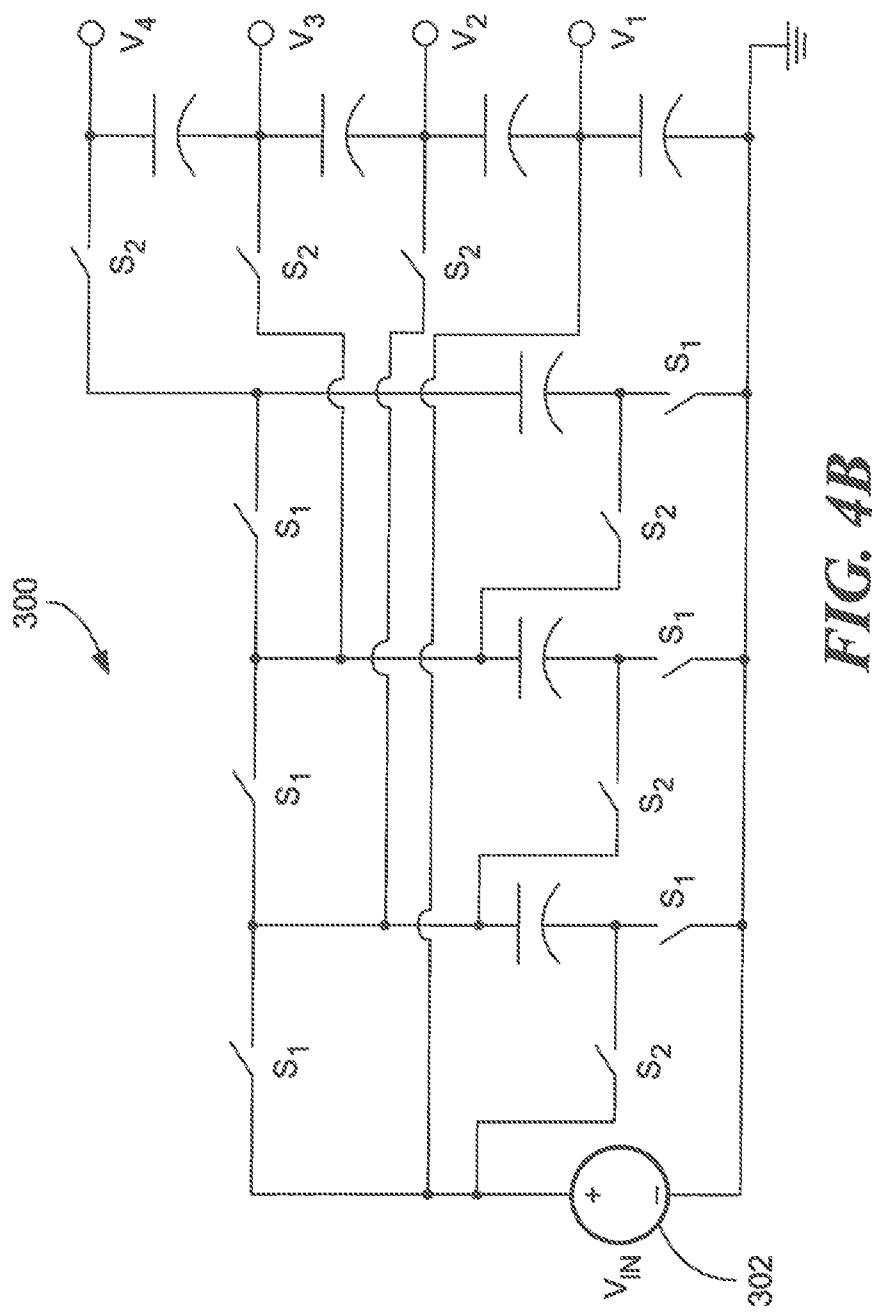


FIG. 4B

7/21

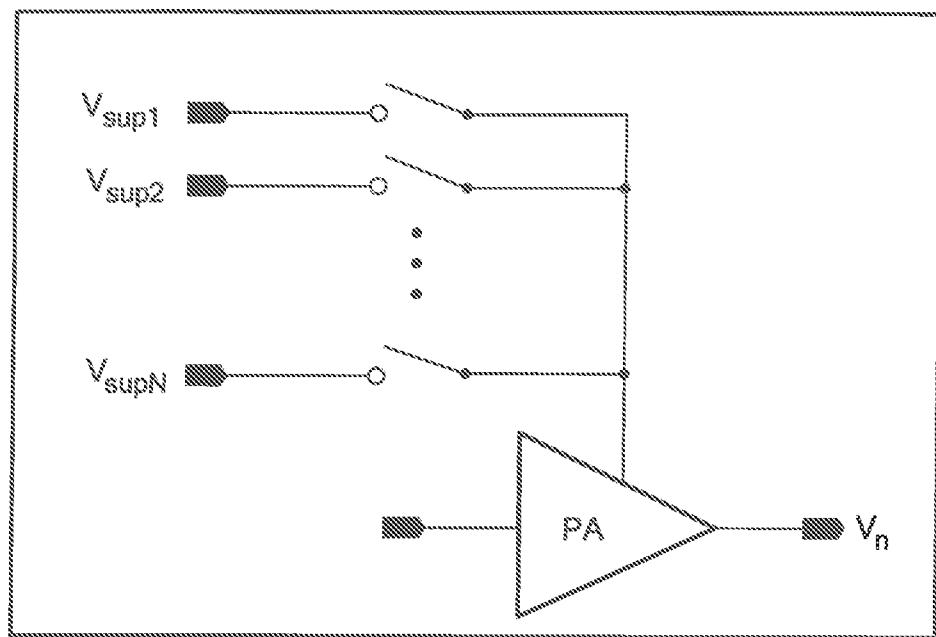


FIG. 4C

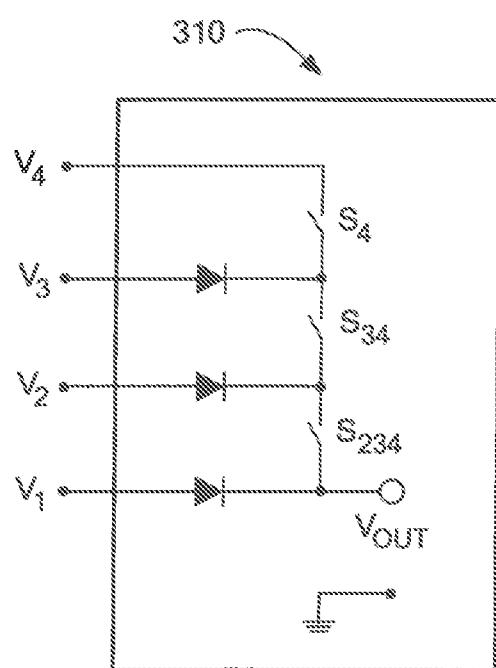


FIG. 4D

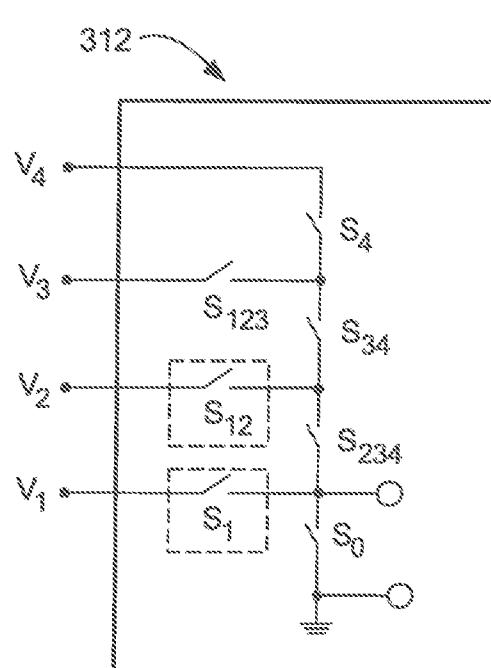
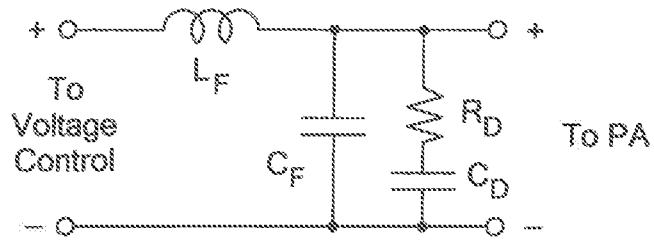
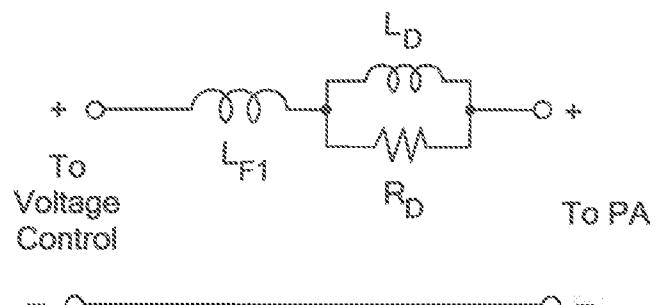
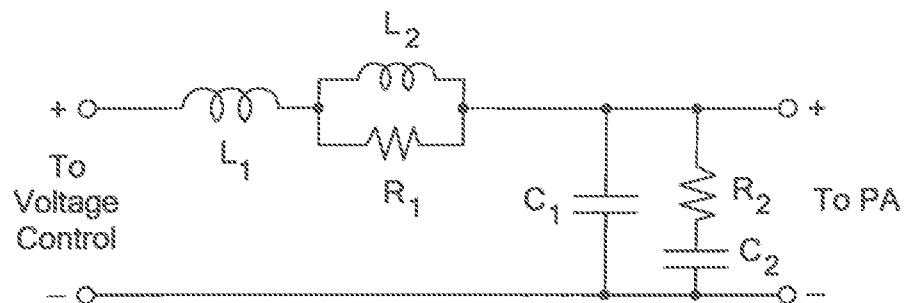
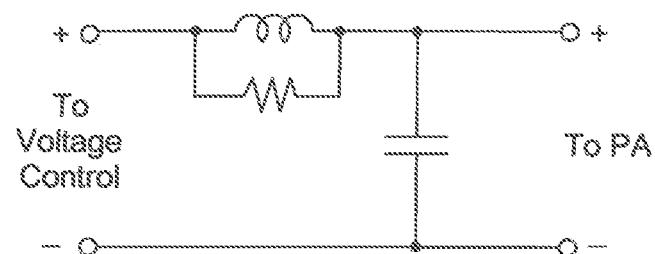


FIG. 4E

8/21

**FIG. 4F****FIG. 4G****FIG. 4H****FIG. 4I**

9/21

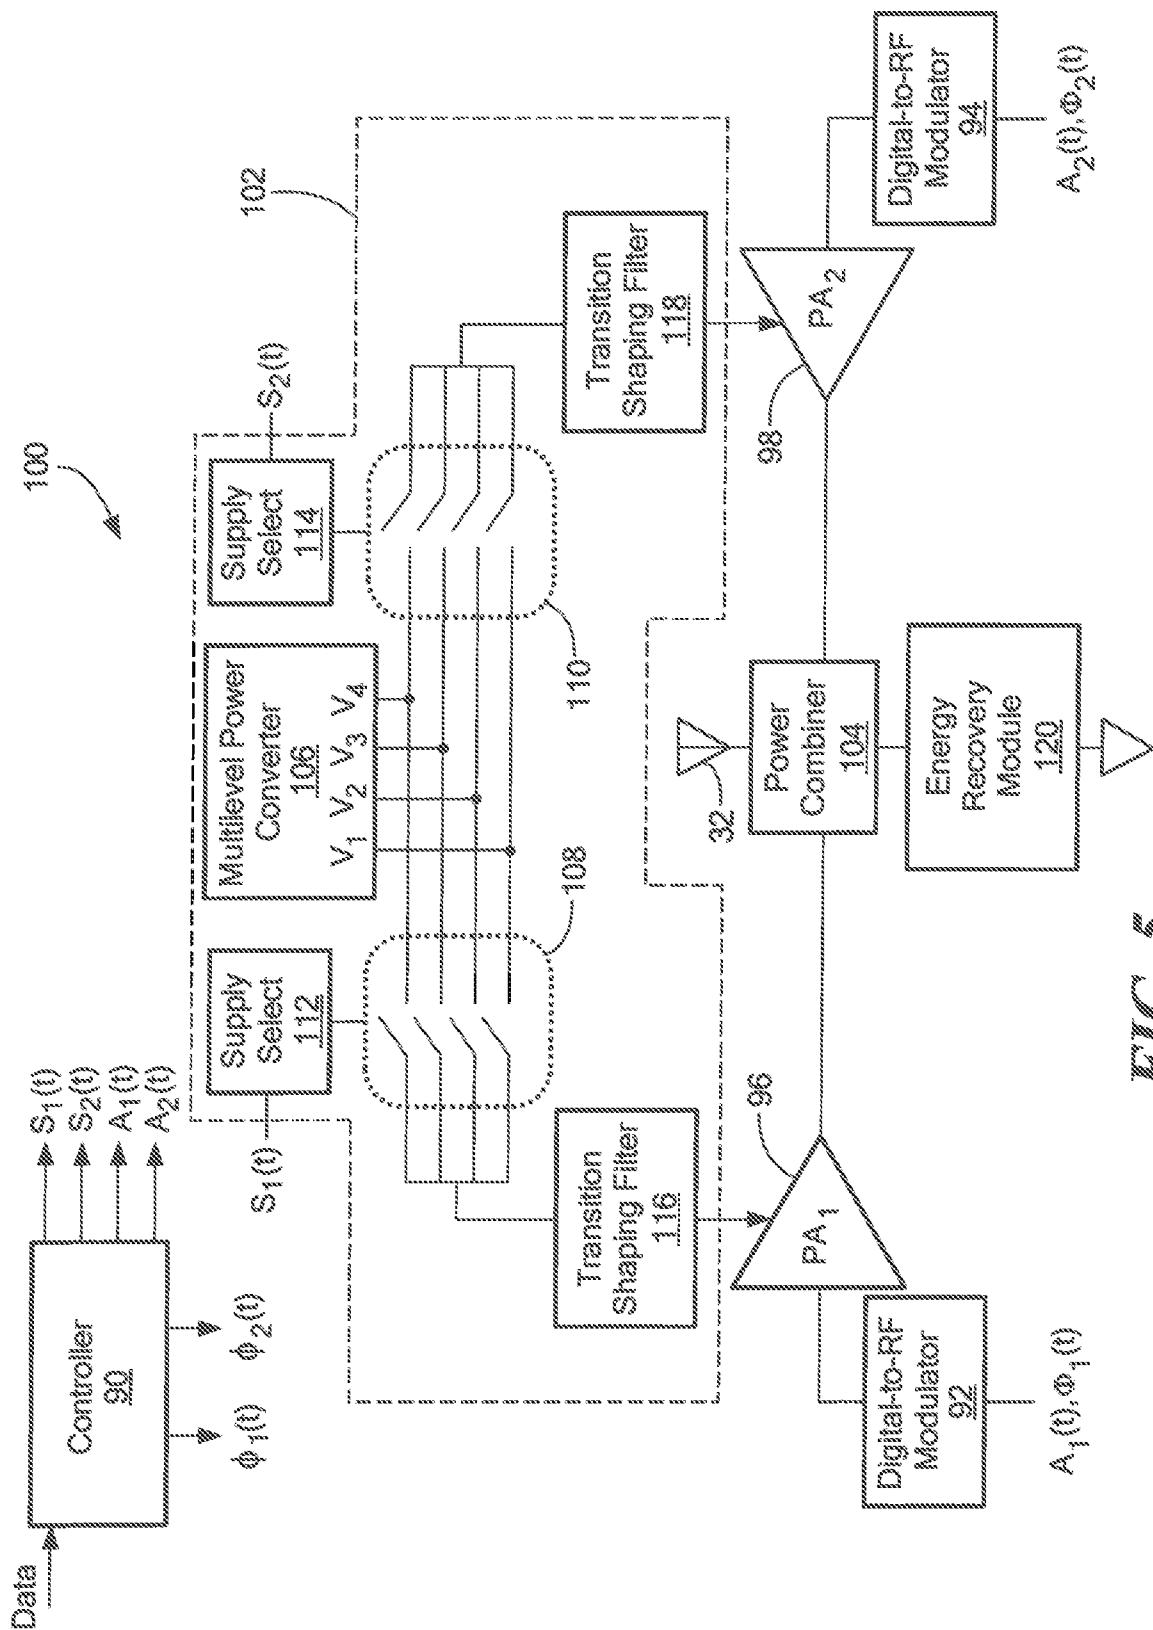


FIG. 5

10/21

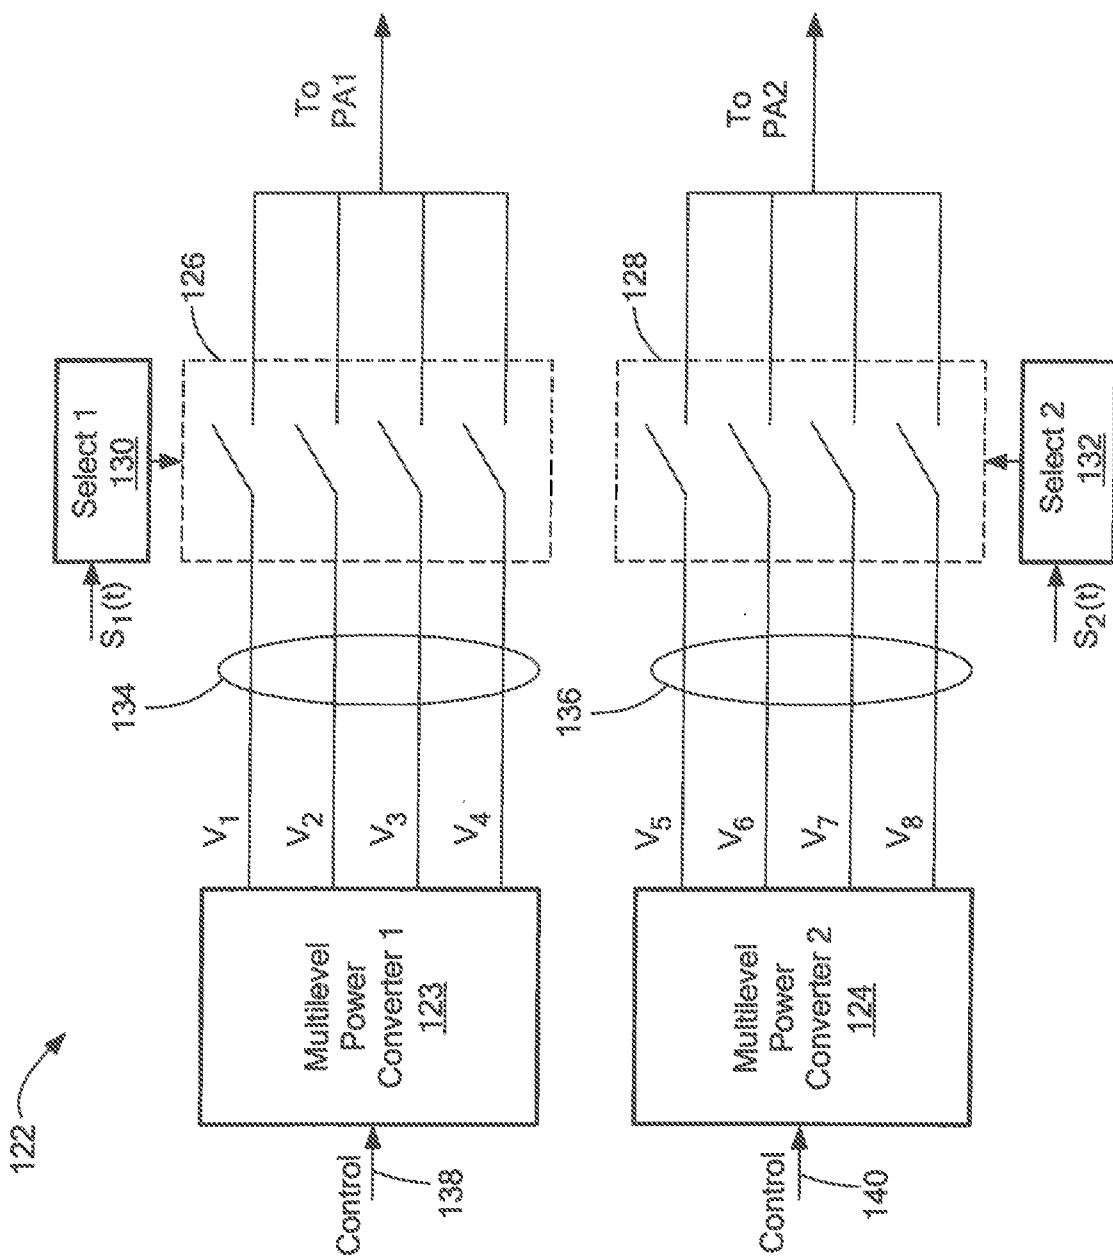


FIG. 6

11/21

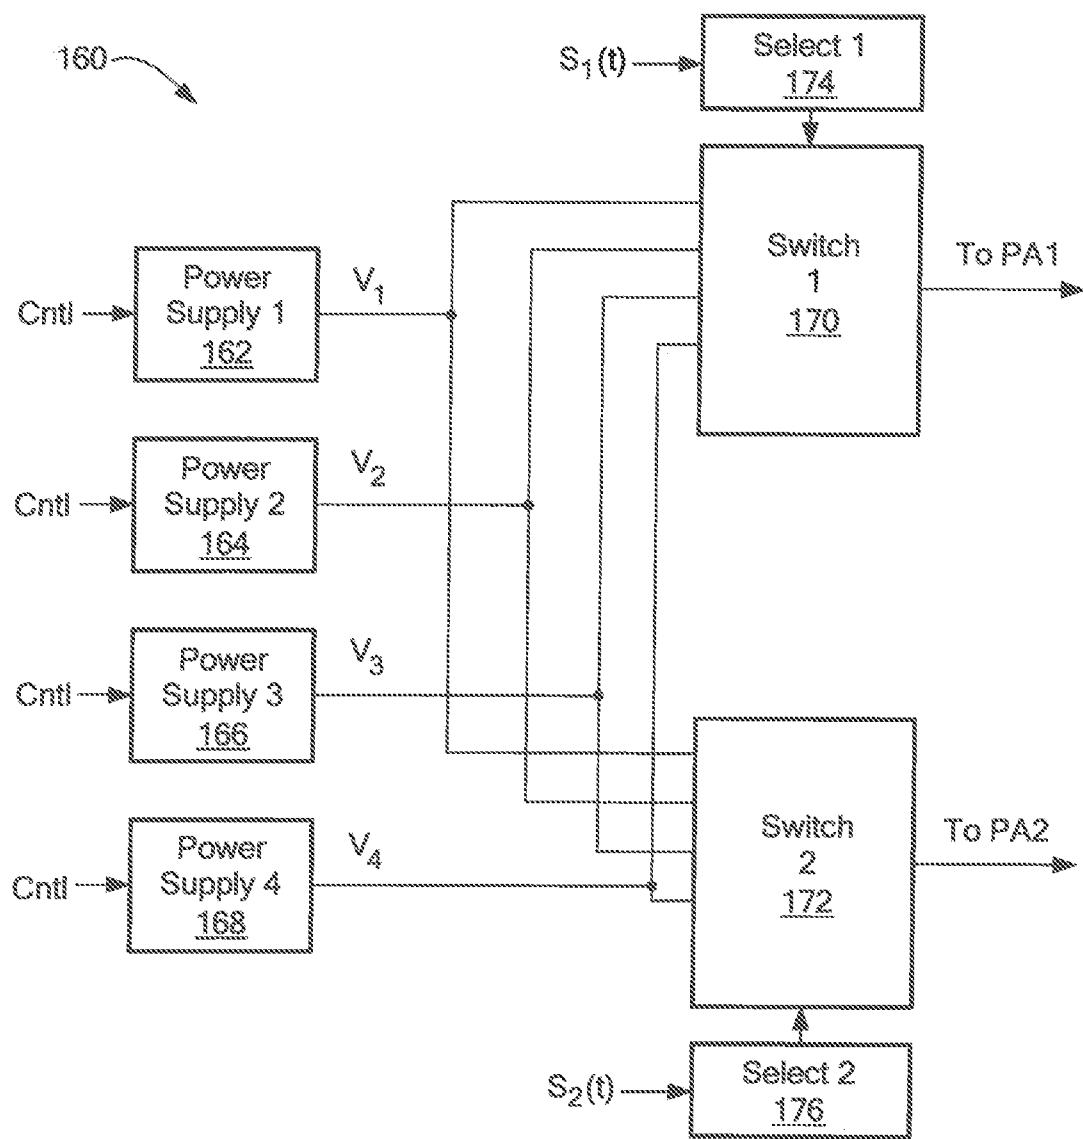


FIG. 7

12/21

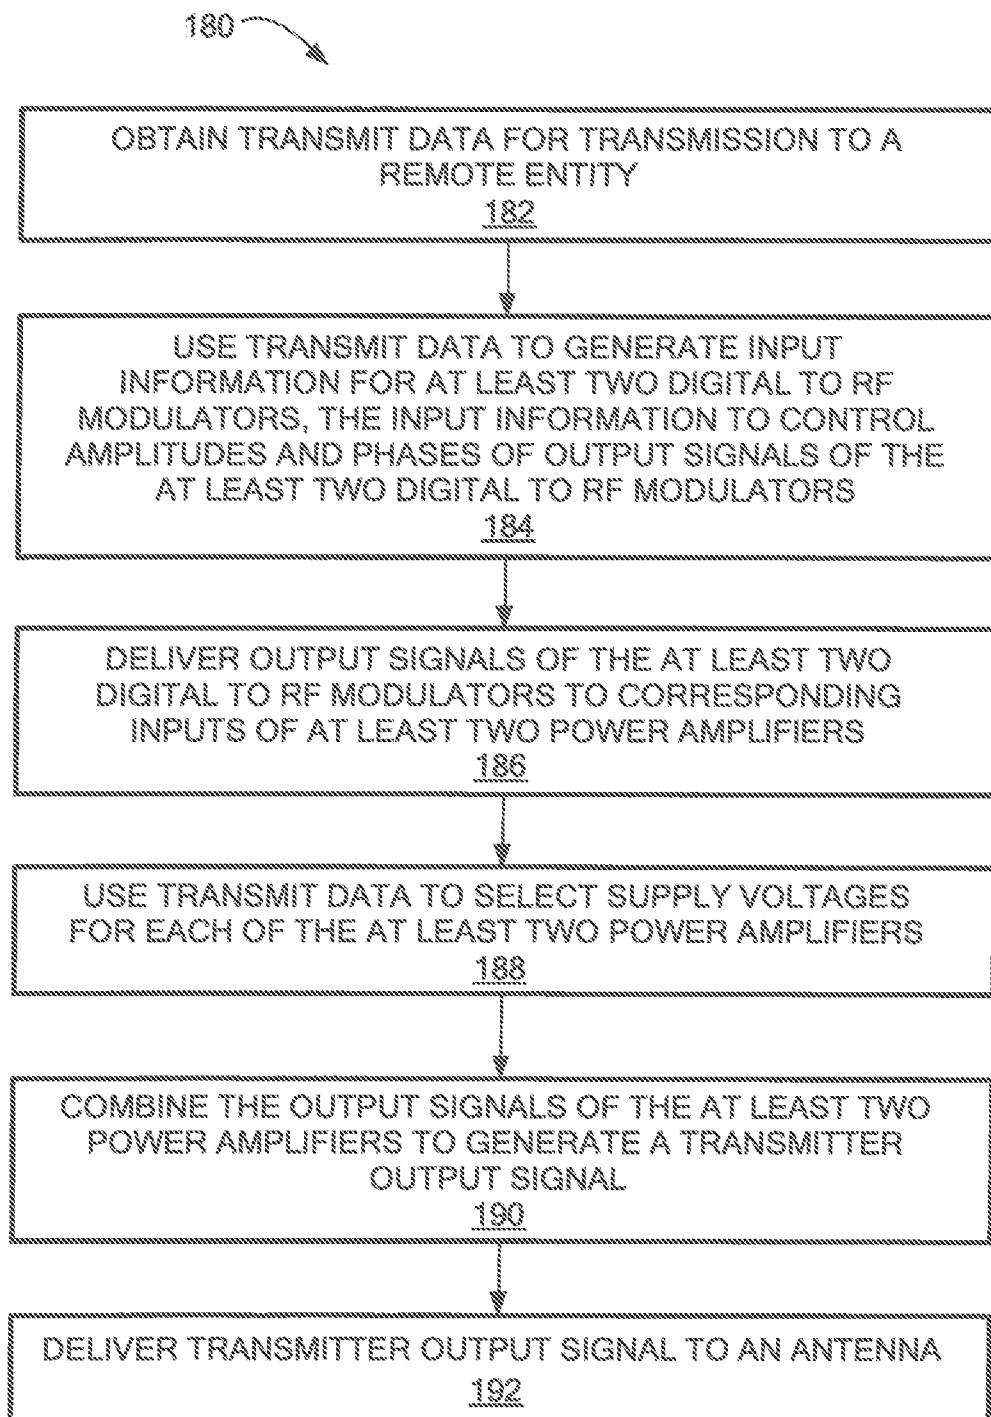


FIG. 8

13/21

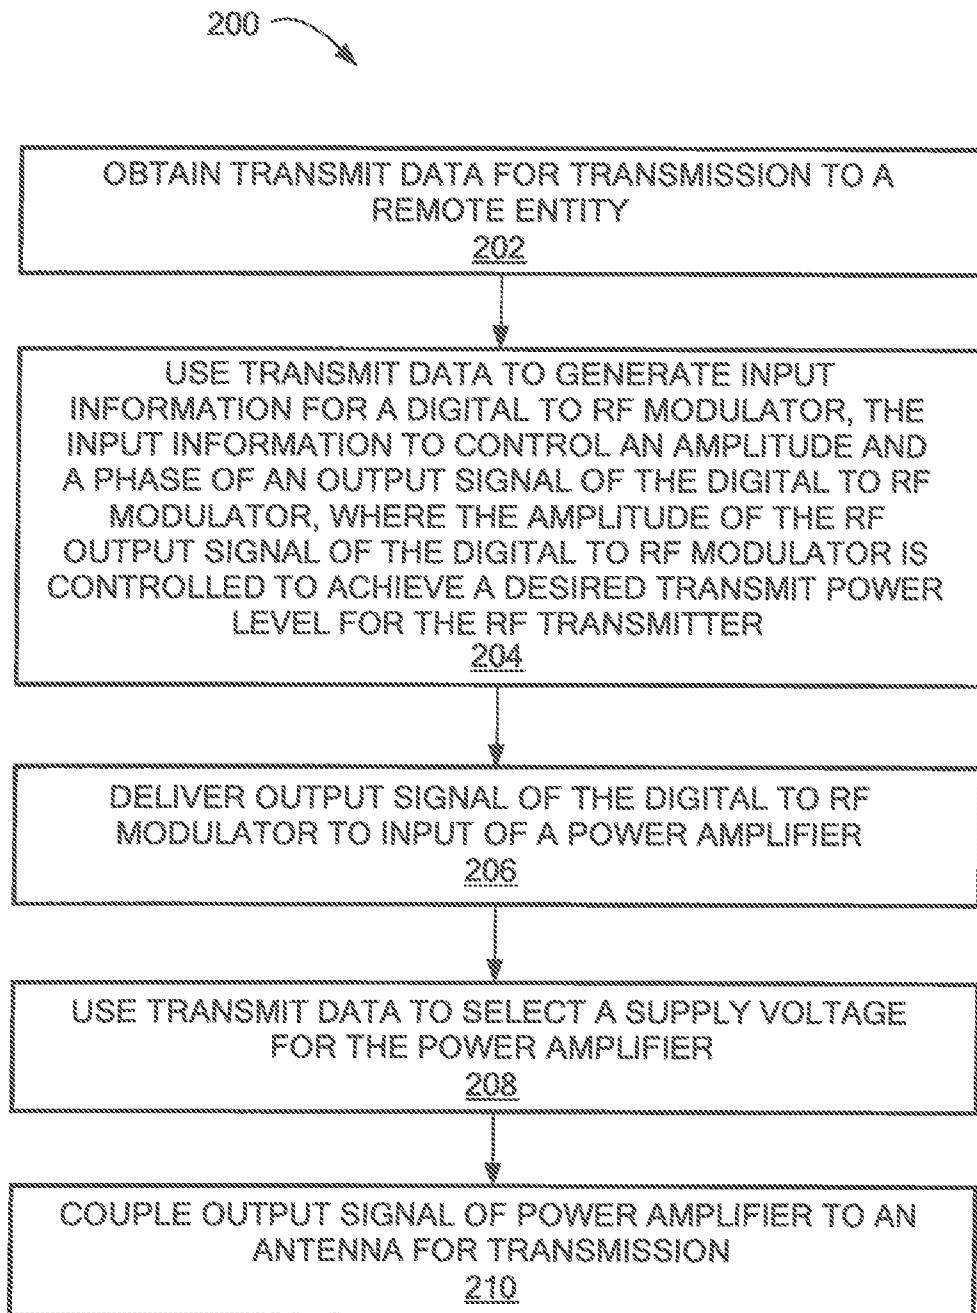


FIG. 9

14/21

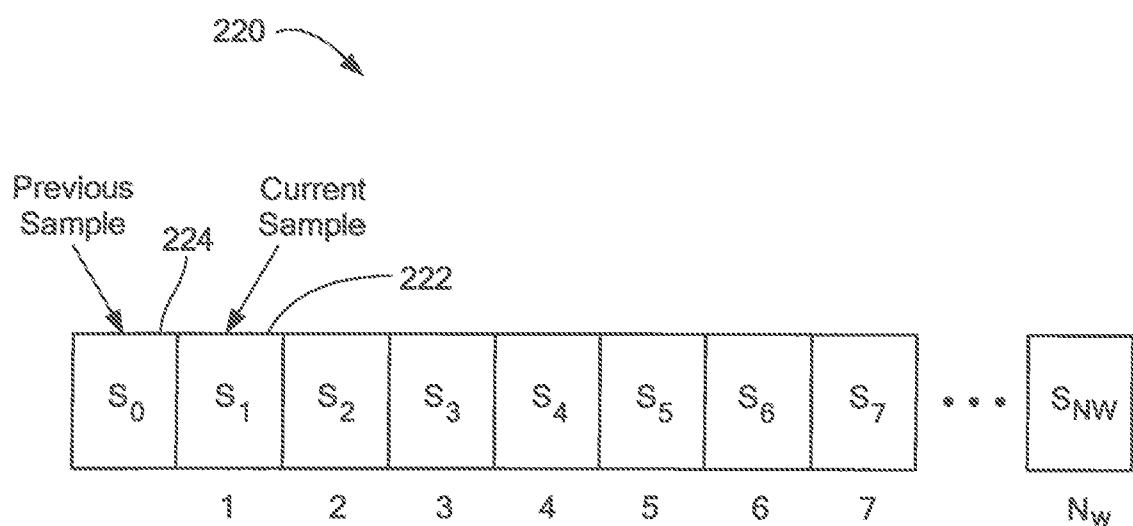


FIG. 10

15/21

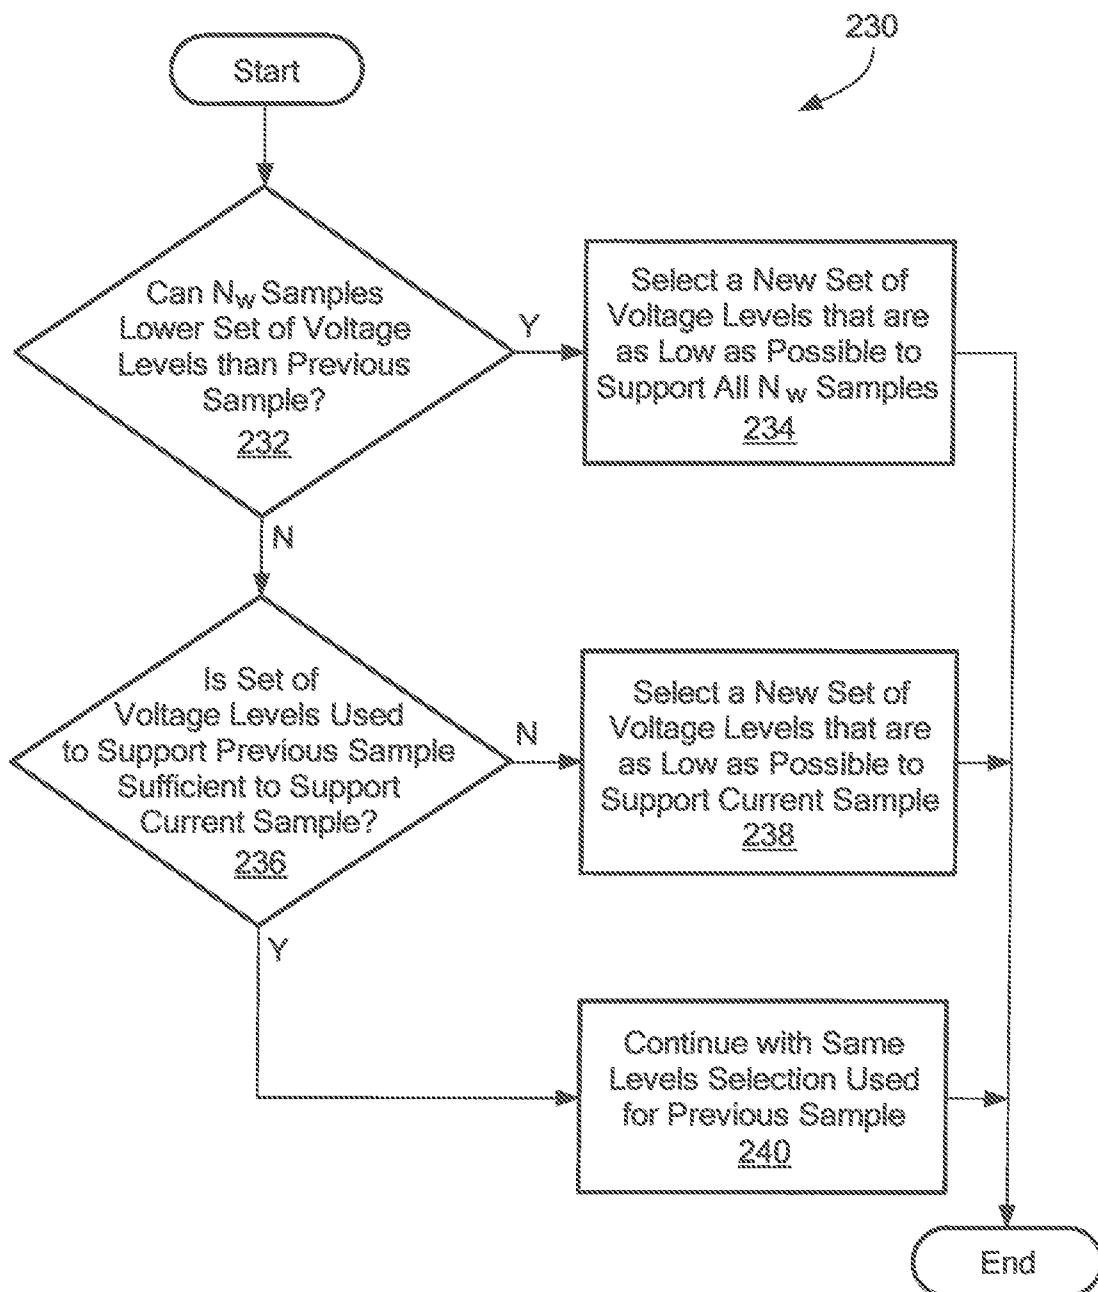


FIG. 11

16/21

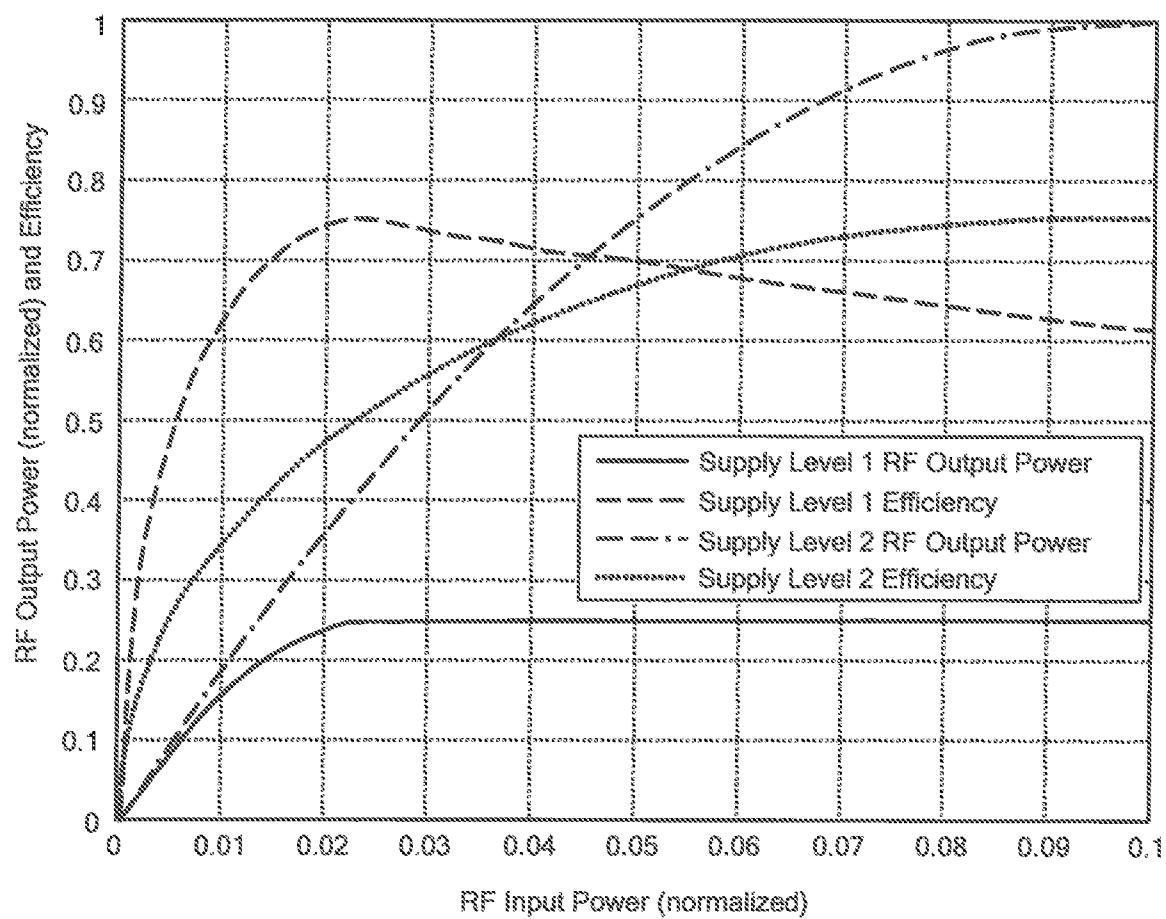


FIG. 12

17/21


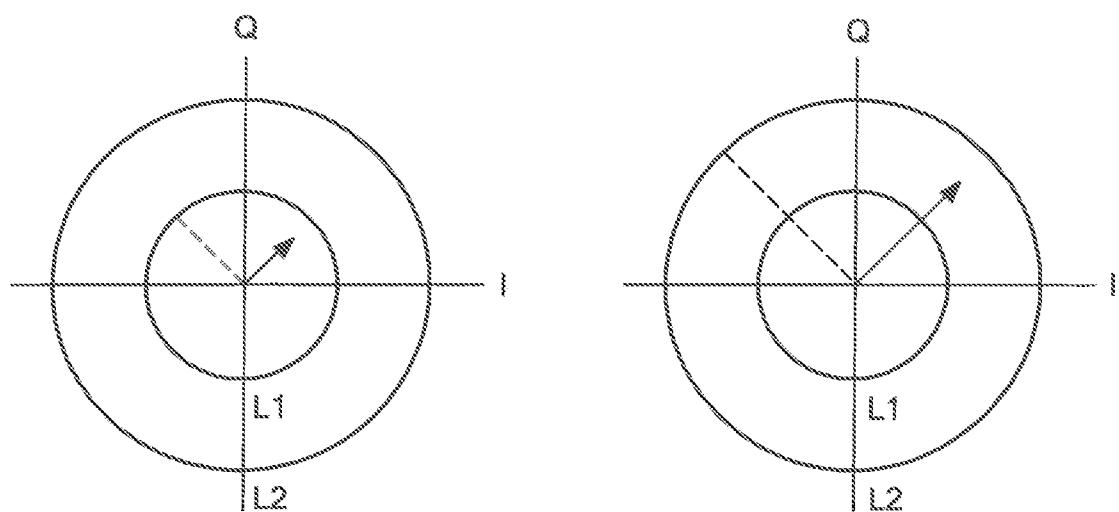


FIG. 13

18/21

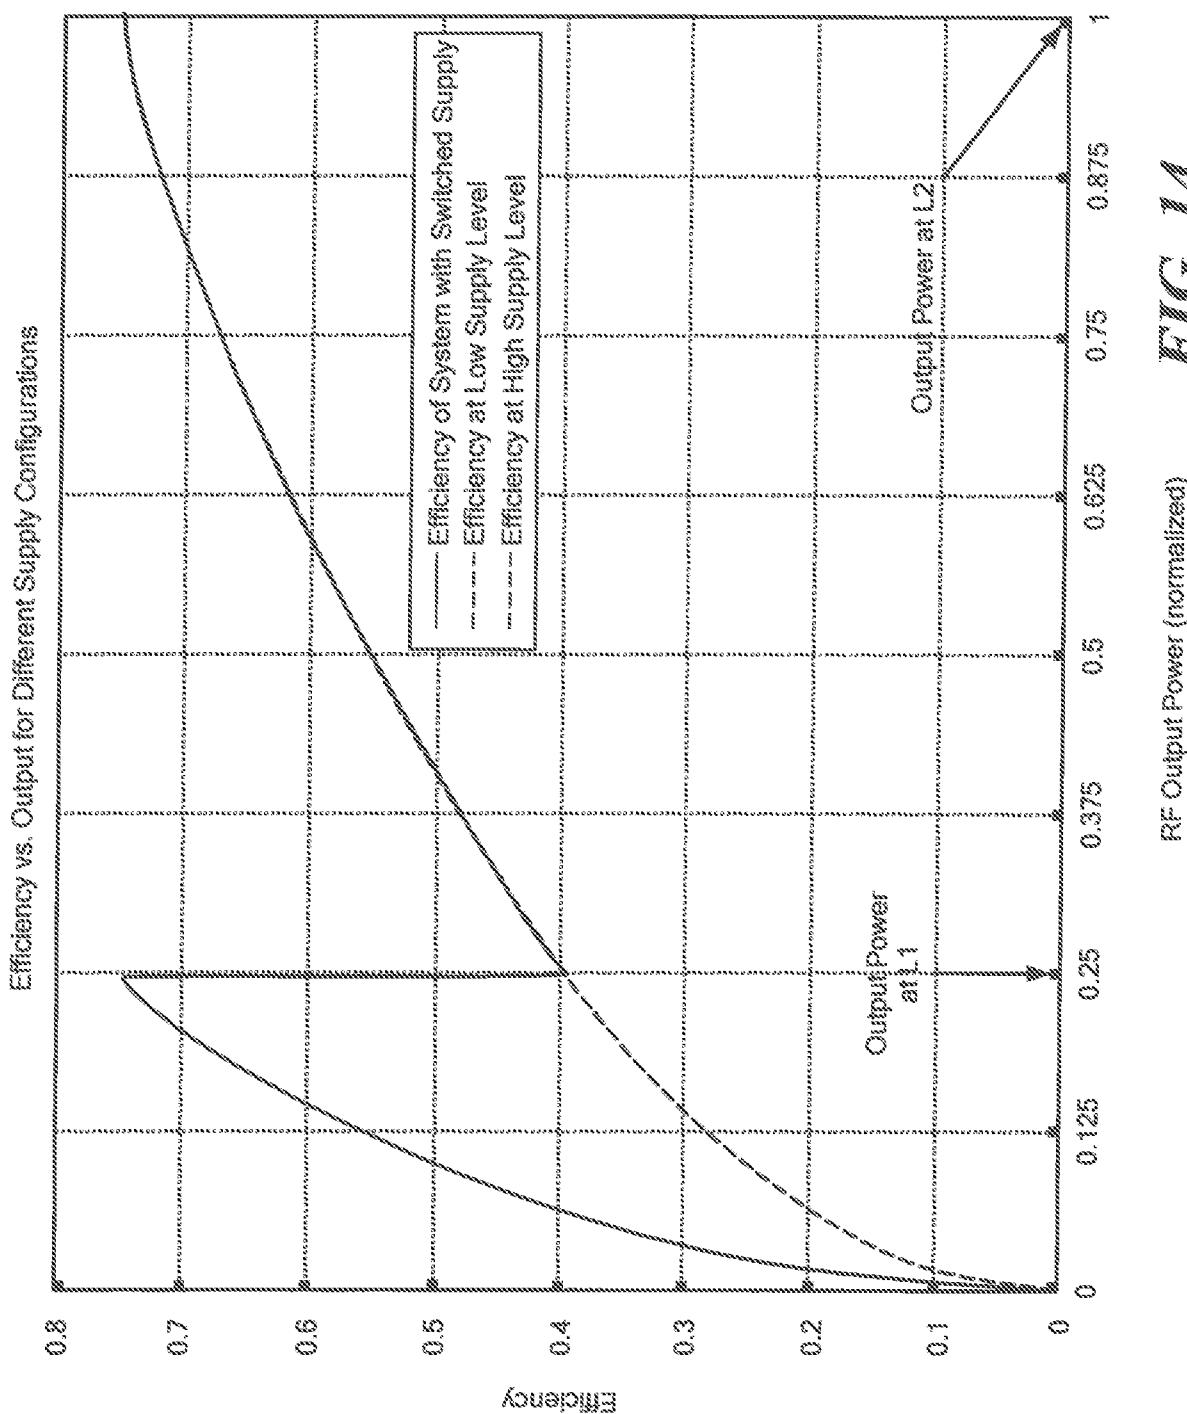

19/21

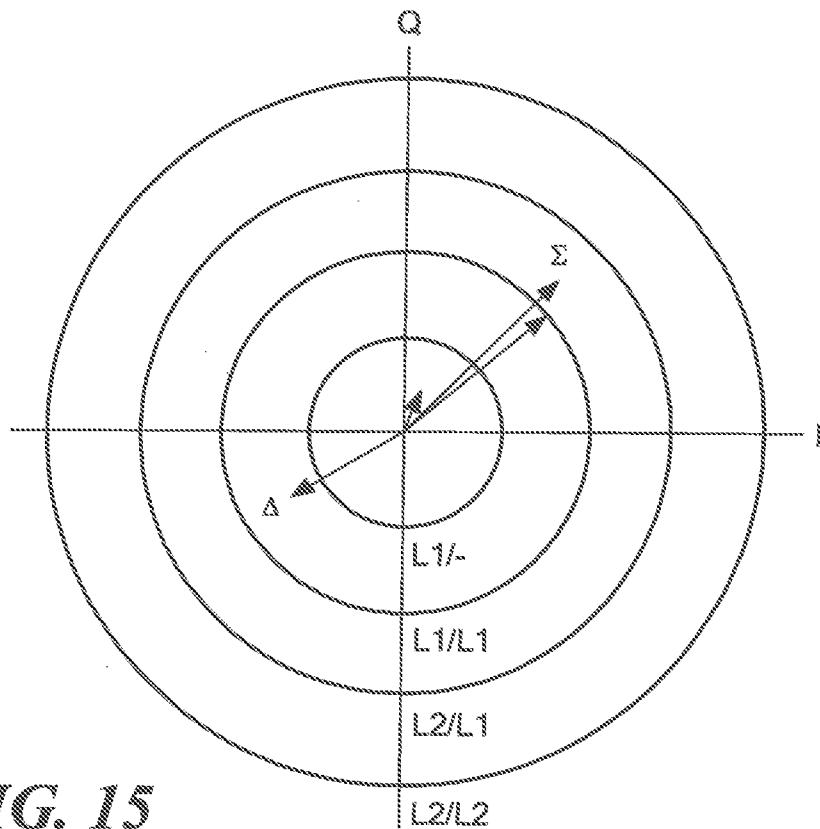


FIG. 15

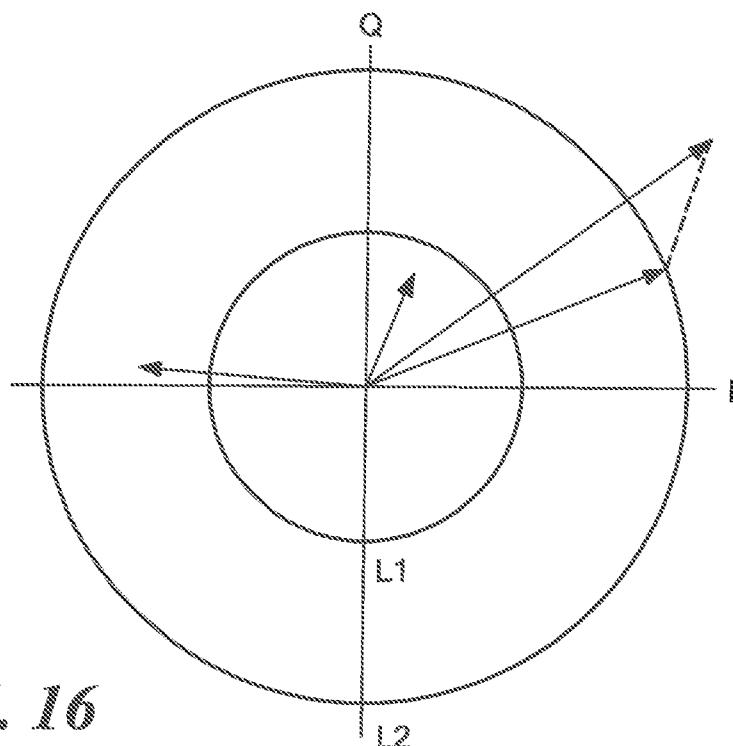


FIG. 16

20/21

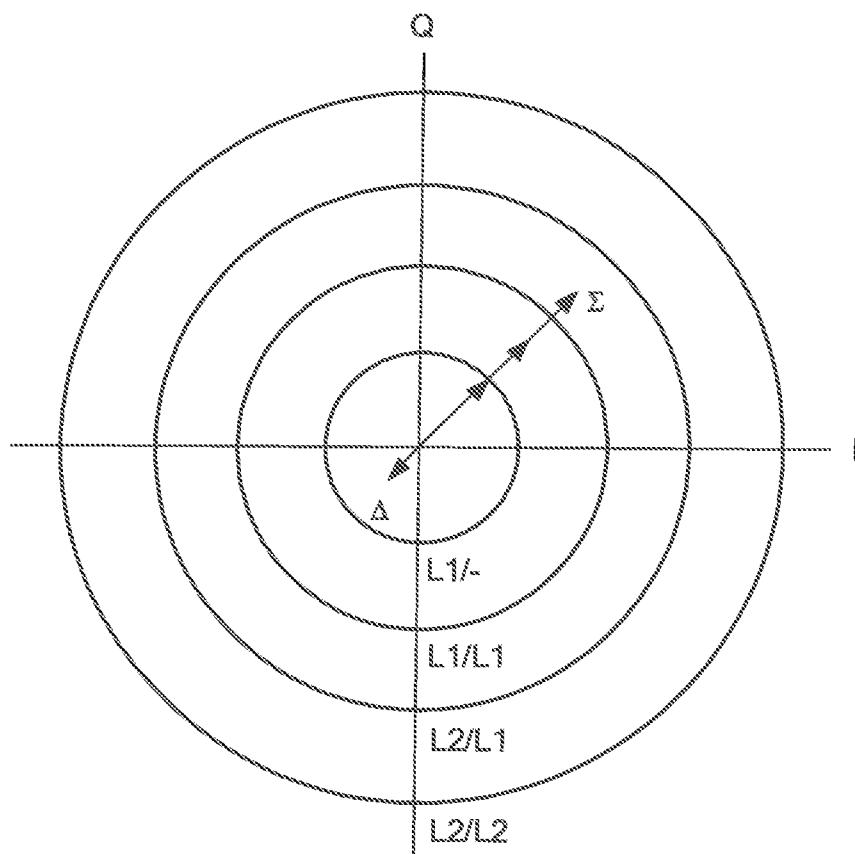


FIG. 17

21/21

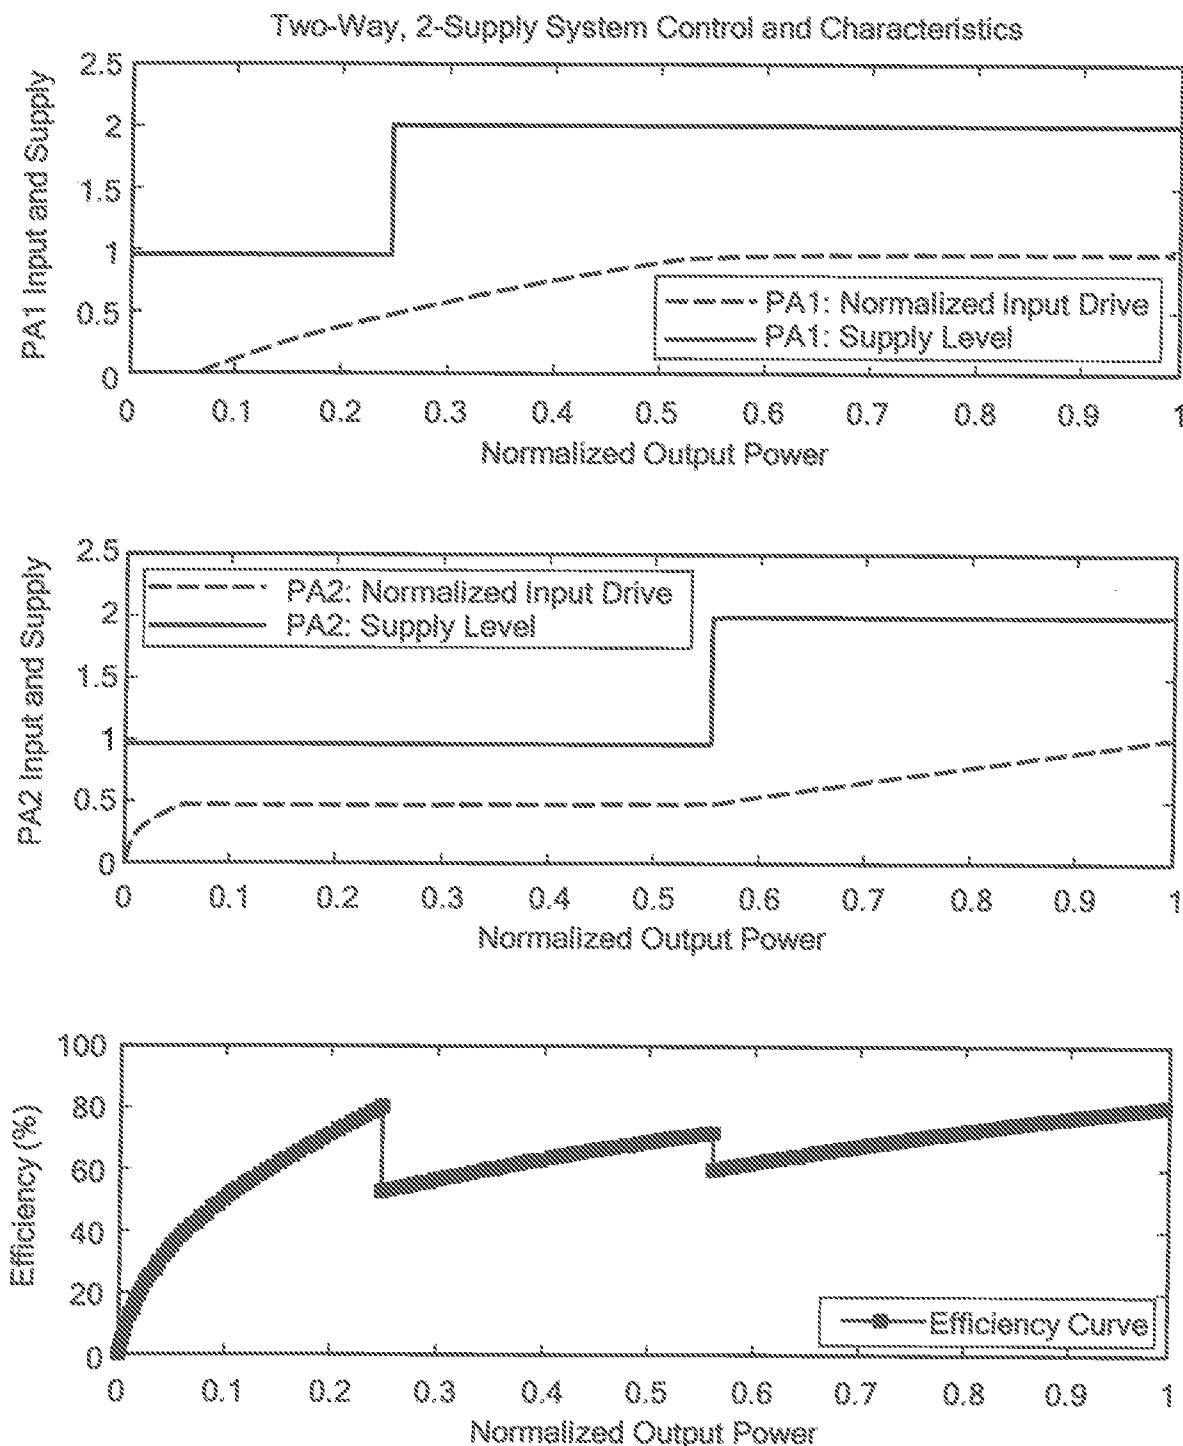


FIG. 18

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2013/065553

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H03F 3/68 (2014.01)

USPC - 330/124R

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - G01R 19/00; H01Q 11/12; H03C 1/00, 3/00; H03F 3/68; H03G 3/20; H04B 1/04; H04L 25/03 (2014.01)

USPC - 330/2, 10, 107, 124R, 127, 295; 332/144, 145, 149, 151, 152; 375/295, 296; 455/103, 115.1

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

CPC - H03C 1/62, 3/00; H03F 1/3247; H04B 1/0483; H04L 1/0003 (2013.01)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Orbit, Google Patents, Google

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012/0176195 A1 (DAWSON et al.) 12 July 2012 (12.07.2012) entire document	1, 2, 9, 13-15
Y		3-8, 10-12, 16-21, 28-31
X	US 2012/0235736 A1 (LEVESQUE et al.) 20 September 2012 (20.09.2012) entire document	22-24, 26, 27
Y		3, 4, 6, 7, 10, 17, 19, 25, 28-31
Y	US 7,423,477 B2 (SORRELLS et al.) 09 September 2008 (09.09.2008) entire document	8
Y	US 2011/0309679 A1 (FISHER et al.) 22 December 2011 (22.12.2011) entire document	5, 11, 12, 16-21, 25
A	US 2005/0062529 A1 (GAN et al.) 24 March 2005 (24.03.2005) entire document	1-31
A	US 6,449,465 B1 (GAILUS et al.) 10 September 2002 (10.09.2002) entire document	1-31
A	US 8,009,765 B2 (AHMED et al.) 30 August 2011 (30.08.2011) entire document	1-31
A	EP 1 609 239 B1 (LOUIS et al.) 21 July 2010 (21.07.2010) entire document	1-31

Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

02 March 2014

Date of mailing of the international search report

20 MAR 2014

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450
Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774